

FCC Test Report

Report No.: RF180123E04

FCC ID: KA2COVR2200A1

Test Model: COVR-2200

Received Date: Jan. 23, 2018

Test Date: Feb. 09 to 12, 2018

Issued Date: Mar. 09, 2018

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	34
4.2.1 Limits of Conducted Emission Measurement	34
4.2.2 Test Instruments	34
4.2.3 Test Procedures.....	35
4.2.4 Deviation from Test Standard	35
4.2.5 Test Setup.....	35
4.2.6 EUT Operating Conditions.....	35
4.2.7 Test Results	36
4.3 6dB Bandwidth Measurement	38
4.3.1 Limits of 6dB Bandwidth Measurement.....	38
4.3.2 Test Setup.....	38
4.3.3 Test Instruments	38
4.3.4 Test Procedure	38
4.3.5 Deviation from Test Standard	38
4.3.6 EUT Operating Conditions.....	38
4.3.7 Test Result.....	39
4.4 Occupied Bandwidth Measurement	41
4.4.1 Test Setup.....	41
4.4.2 Test Instruments	41
4.4.3 Test Procedure	41
4.4.4 Deviation from Test Standard	41
4.4.5 EUT Operating Conditions.....	41
4.4.6 Test Results	42
4.5 Conducted Output Power Measurement.....	44
4.5.1 Limits of Conducted Output Power Measurement	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments	44
4.5.4 Test Procedures.....	44
4.5.5 Deviation from Test Standard	44
4.5.6 EUT Operating Conditions.....	44
4.5.7 Test Results	45

4.6	Power Spectral Density Measurement.....	47
4.6.1	Limits of Power Spectral Density Measurement	47
4.6.2	Test Setup.....	47
4.6.3	Test Instruments	47
4.6.4	Test Procedure	47
4.6.5	Deviation from Test Standard	47
4.6.6	EUT Operating Condition	47
4.6.7	Test Results	48
4.7	Conducted Out of Band Emission Measurement.....	51
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	51
4.7.2	Test Setup.....	51
4.7.3	Test Instruments	51
4.7.4	Test Procedure	51
4.7.5	Deviation from Test Standard	51
4.7.6	EUT Operating Condition	51
4.7.7	Test Results	51
5	Pictures of Test Arrangements.....	60
	Appendix – Information on the Testing Laboratories	61

Release Control Record

Issue No.	Description	Date Issued
RF180123E04	Original release.	Mar. 09, 2018

1 Certificate of Conformity

Product: Tri Band Whole Home Wi-Fi Extender

Brand: D-Link

Test Model: COVR-2200

Sample Status: ENGINEERING SAMPLE

Applicant: D-Link Corporation

Test Date: Feb. 09 to 12, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu, **Date:** Mar. 09, 2018
Wendy Wu / Specialist

Approved by : May Chen, **Date:** Mar. 09, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.79dB at 0.43906MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz, 2487.10MHz, 2386.10MHz, 7311.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Tri Band Whole Home Wi-Fi Extender
Brand	D-Link
Test Model	COVR-2200
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 694.376mW Beamforming Mode: 624.15mW 5GHz: CDD Mode: 5.18 ~ 5.24GHz: 620.455mW 5.745 ~ 5.825GHz: 993.819mW Beamforming Mode: 5.18 ~ 5.24GHz: 598.859mW 5.745 ~ 5.825GHz: 575.319mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz + 5GHz (low band)	WLAN 5GHz (high band)

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz (low band)	WLAN 5GHz (high band)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
Shenzhen Gongjin Electronics Co., Ltd	S24B72-120A200-C4	Input: 100-240Vac, 0.8A, 50/60Hz Output: 12Vdc, 2A DC output cable (Unshielded, 1.2m)

4. The antennas provided to the EUT, please refer to the following table:

Ant No.	Model	Antenna Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type
Dual-Ant 0	290-60110	5.23	2.4~2.4835	PCB	i-pex(MHF)
		3.76	5.15~5.25		
		3.04	5.25~5.35		
Dual-Ant 1	290-60111	4.76	2.4~2.4835	PCB	i-pex(MHF)
		5.45	5.15~5.25		
		5.31	5.25~5.35		
5g_Ant 1	290-60107	5.24	5.47~5.725	PCB	i-pex(MHF)
		5.23	5.725~5.85		
5g_Ant 1_B	290-60105	5.12	5.47~5.725	Dipole	i-pex(MHF)
		5.09	5.725~5.85		
5g_Ant 0	290-60108	3.84	5.47~5.725	PCB	i-pex(MHF)
		5.15	5.725~5.85		
5g_Ant 0_B	290-60106	3.45	5.47~5.725	Dipole	i-pex(MHF)
		3.48	5.725~5.85		

5. For Antenna configuration mode of 5GHz (high band), please refer to the following table:

Condition	Antenna No.	
1	5g_Ant 1	5g_Ant 0
2	5g_Ant 1_B	5g_Ant 0_B
3	5g_Ant 1_B	5g_Ant 0
4	5g_Ant 1	5g_Ant 0_B

Note:

- From the above antennas, the radiated emissions worst case was found in **Condition 3**.
- For other test, **Condition 1** was selected for final test.

6. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)
3. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	22deg. C, 62%RH	120Vac, 60Hz	Eason Tseng
RE $<$ 1G	24deg. C, 67%RH	120Vac, 60Hz	Andy Ho
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.232/12.344 = 0.991$

802.11g: Duty cycle = $2.027/2.114 = 0.959$, Duty factor = $10 * \log(1/0.959) = 0.18$

VHT20: Duty cycle = $4.948/5.056 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

VHT40: Duty cycle = $2.408/2.497 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

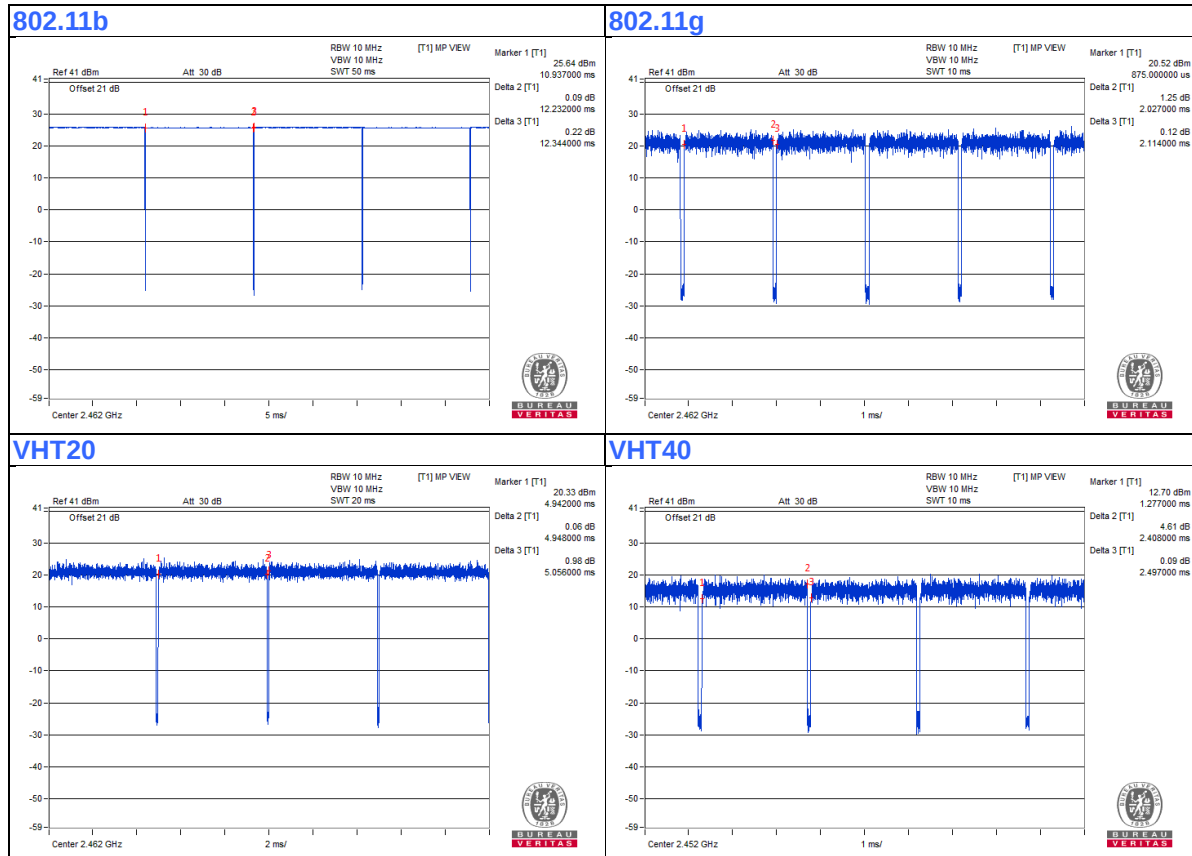

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E6420	482T3R1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	DC Cable	1	1.2	No	0	Supplied by client
3.	RJ-45 Cable	1	10	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

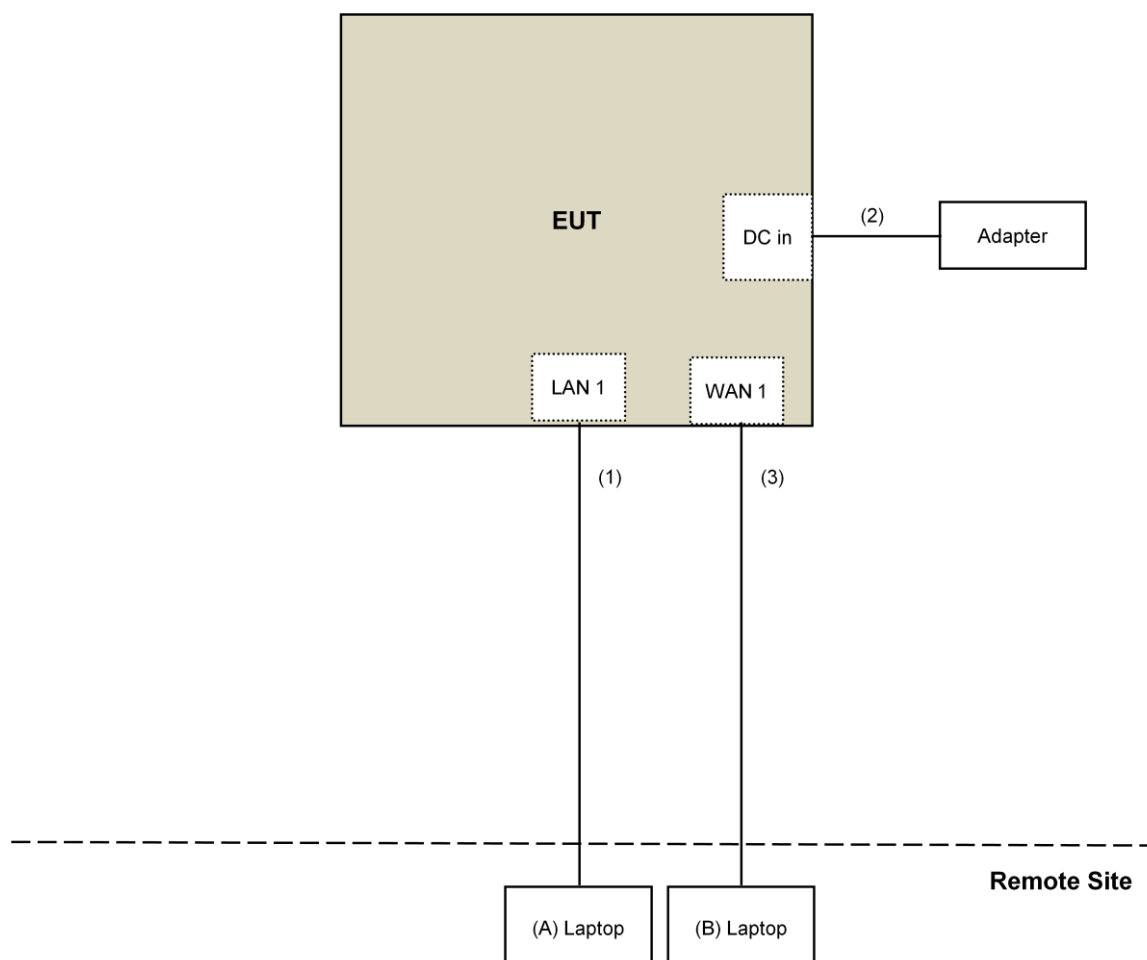

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Loop Antenna ^(*) TESEQ	HLA 6121	45745	May 19, 2017	May 18, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Jan. 29, 2018 Jan. 29, 2018 Jan. 29, 2018	Jan. 28, 2019 Jan. 28, 2019 Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Feb. 09 to 12, 2018

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz



For Radiated emission 30MHz to 1GHz

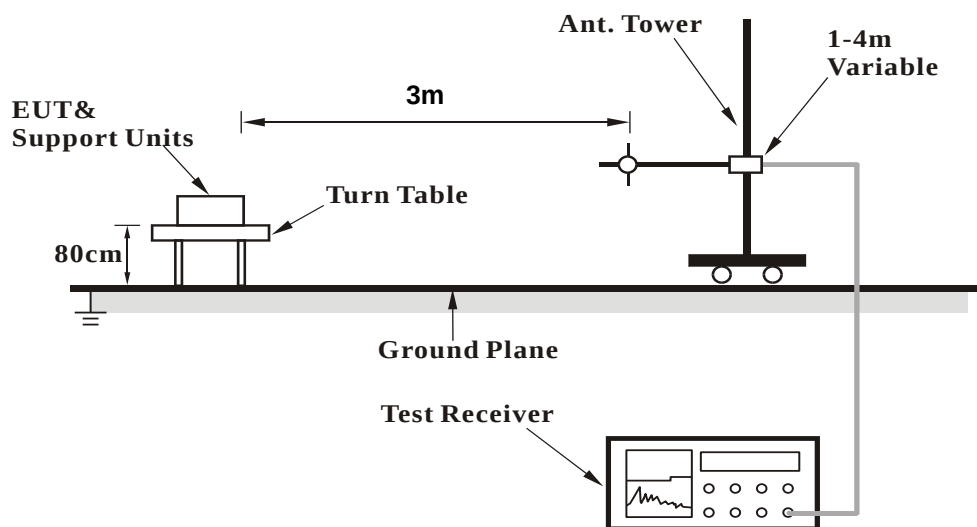

For Radiated emission above 1GHz

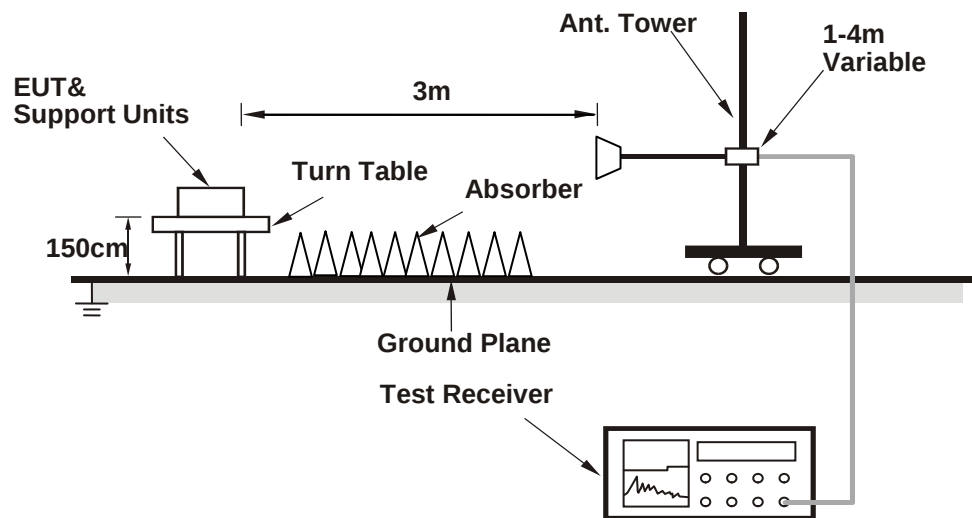

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (QRCT Ver:3.0.2664.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.10	56.8 PK	74.0	-17.2	1.62 H	360	58.8	-2.0
2	2386.10	45.9 AV	54.0	-8.1	1.62 H	360	47.9	-2.0
3	*2412.00	112.3 PK			1.62 H	360	114.4	-2.1
4	*2412.00	110.3 AV			1.62 H	360	112.4	-2.1
5	4824.00	47.6 PK	74.0	-26.4	1.78 H	220	44.9	2.7
6	4824.00	42.5 AV	54.0	-11.5	1.78 H	220	39.8	2.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.10	61.3 PK	74.0	-12.7	1.95 V	64	63.3	-2.0
2	2386.10	53.9 AV	54.0	-0.1	1.95 V	64	55.9	-2.0
3	*2412.00	120.4 PK			1.95 V	64	122.5	-2.1
4	*2412.00	118.1 AV			1.95 V	64	120.2	-2.1
5	4824.00	48.2 PK	74.0	-25.8	1.68 V	175	45.5	2.7
6	4824.00	45.6 AV	54.0	-8.4	1.68 V	175	42.9	2.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.64 H	357	57.5	-2.0
2	2390.00	42.1 AV	54.0	-11.9	1.64 H	357	44.1	-2.0
3	*2437.00	111.0 PK			1.64 H	357	113.3	-2.3
4	*2437.00	108.5 AV			1.64 H	357	110.8	-2.3
5	2483.50	54.9 PK	74.0	-19.1	1.64 H	357	57.1	-2.2
6	2483.50	41.9 AV	54.0	-12.1	1.64 H	357	44.1	-2.2
7	4874.00	46.8 PK	74.0	-27.2	1.74 H	212	43.9	2.9
8	4874.00	42.0 AV	54.0	-12.0	1.74 H	212	39.1	2.9
9	7311.00	50.0 PK	74.0	-24.0	1.65 H	355	40.7	9.3
10	7311.00	44.2 AV	54.0	-9.8	1.65 H	355	34.9	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.93 V	61	57.9	-2.0
2	2390.00	43.3 AV	54.0	-10.7	1.93 V	61	45.3	-2.0
3	*2437.00	118.3 PK			1.93 V	61	120.6	-2.3
4	*2437.00	116.0 AV			1.93 V	61	118.3	-2.3
5	2483.50	55.1 PK	74.0	-18.9	1.93 V	61	57.3	-2.2
6	2483.50	42.7 AV	54.0	-11.3	1.93 V	61	44.9	-2.2
7	4874.00	47.0 PK	74.0	-27.0	1.69 V	170	44.1	2.9
8	4874.00	45.2 AV	54.0	-8.8	1.69 V	170	42.3	2.9
9	7311.00	57.3 PK	74.0	-16.7	1.72 V	54	48.0	9.3
10	7311.00	53.9 AV	54.0	-0.1	1.72 V	54	44.6	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.4 PK			1.50 H	359	114.7	-2.3
2	*2462.00	110.0 AV			1.50 H	359	112.3	-2.3
3	2483.50	57.1 PK	74.0	-16.9	1.50 H	359	59.3	-2.2
4	2483.50	46.0 AV	54.0	-8.0	1.50 H	359	48.2	-2.2
5	4924.00	46.4 PK	74.0	-27.6	1.71 H	200	43.4	3.0
6	4924.00	41.8 AV	54.0	-12.2	1.71 H	200	38.8	3.0
7	7386.00	51.2 PK	74.0	-22.8	1.50 H	351	41.5	9.7
8	7386.00	44.1 AV	54.0	-9.9	1.50 H	351	34.4	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.6 PK			2.02 V	53	120.9	-2.3
2	*2462.00	116.7 AV			2.02 V	53	119.0	-2.3
3	2483.50	64.3 PK	74.0	-9.7	2.02 V	53	66.5	-2.2
4	2483.50	53.0 AV	54.0	-1.0	2.02 V	53	55.2	-2.2
5	4924.00	47.2 PK	74.0	-26.8	1.91 V	181	44.2	3.0
6	4924.00	44.6 AV	54.0	-9.4	1.91 V	181	41.6	3.0
7	7386.00	55.6 PK	74.0	-18.4	1.50 V	45	45.9	9.7
8	7386.00	53.8 AV	54.0	-0.2	1.50 V	45	44.1	9.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.70 H	359	62.3	-2.0
2	2390.00	44.3 AV	54.0	-9.7	1.70 H	359	46.3	-2.0
3	*2412.00	109.2 PK			1.70 H	359	111.3	-2.1
4	*2412.00	99.6 AV			1.70 H	359	101.7	-2.1
5	4824.00	44.6 PK	74.0	-29.4	1.74 H	204	41.9	2.7
6	4824.00	41.8 AV	54.0	-12.2	1.74 H	204	39.1	2.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	1.81 V	53	67.1	-2.0
2	2390.00	53.6 AV	54.0	-0.4	1.81 V	53	55.6	-2.0
3	*2412.00	118.0 PK			1.81 V	53	120.1	-2.1
4	*2412.00	108.4 AV			1.81 V	53	110.5	-2.1
5	4824.00	46.7 PK	74.0	-27.3	1.69 V	184	44.0	2.7
6	4824.00	44.5 AV	54.0	-9.5	1.69 V	184	41.8	2.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.67 H	360	65.1	-2.0
2	2390.00	47.2 AV	54.0	-6.8	1.67 H	360	49.2	-2.0
3	*2437.00	114.6 PK			1.70 H	359	116.9	-2.3
4	*2437.00	104.5 AV			1.70 H	359	106.8	-2.3
5	2486.50	60.2 PK	74.0	-13.8	1.62 H	360	62.4	-2.2
6	2486.50	45.1 AV	54.0	-8.9	1.62 H	360	47.3	-2.2
7	4874.00	46.7 PK	74.0	-27.3	1.74 H	204	43.8	2.9
8	4874.00	44.3 AV	54.0	-9.7	1.74 H	204	41.4	2.9
9	7311.00	59.8 PK	74.0	-14.2	1.61 H	357	50.5	9.3
10	7311.00	45.5 AV	54.0	-8.5	1.61 H	357	36.2	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	2.19 V	54	67.2	-2.0
2	2390.00	49.7 AV	54.0	-4.3	2.19 V	54	51.7	-2.0
3	*2437.00	122.2 PK			2.19 V	54	124.5	-2.3
4	*2437.00	112.3 AV			2.19 V	54	114.6	-2.3
5	2486.50	62.5 PK	74.0	-11.5	2.19 V	54	64.7	-2.2
6	2486.50	47.0 AV	54.0	-7.0	2.19 V	54	49.2	-2.2
7	4874.00	49.8 PK	74.0	-24.2	1.74 V	172	46.9	2.9
8	4874.00	47.2 AV	54.0	-6.8	1.74 V	172	44.3	2.9
9	7311.00	62.3 PK	74.0	-11.7	2.01 V	46	53.0	9.3
10	7311.00	48.3 AV	54.0	-5.7	2.01 V	46	39.0	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.3 PK			1.70 H	359	110.6	-2.3
2	*2462.00	98.5 AV			1.70 H	359	100.8	-2.3
3	2483.50	58.7 PK	74.0	-15.3	1.70 H	359	60.9	-2.2
4	2483.50	43.4 AV	54.0	-10.6	1.70 H	359	45.6	-2.2
5	4924.00	43.8 PK	74.0	-30.2	1.74 H	204	40.8	3.0
6	4924.00	41.3 AV	54.0	-12.7	1.74 H	204	38.3	3.0
7	7386.00	56.2 PK	74.0	-17.8	1.61 H	357	46.5	9.7
8	7386.00	42.8 AV	54.0	-11.2	1.61 H	357	33.1	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.0 PK			2.06 V	59	120.3	-2.3
2	*2462.00	107.4 AV			2.06 V	59	109.7	-2.3
3	2483.50	71.0 PK	74.0	-3.0	2.06 V	59	73.2	-2.2
4	2483.50	53.8 AV	54.0	-0.2	2.06 V	59	56.0	-2.2
5	4924.00	46.3 PK	74.0	-27.7	1.65 V	170	43.3	3.0
6	4924.00	44.1 AV	54.0	-9.9	1.65 V	170	41.1	3.0
7	7386.00	52.1 PK	74.0	-21.9	2.01 V	49	42.4	9.7
8	7386.00	50.2 AV	54.0	-3.8	2.01 V	49	40.5	9.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.65 H	345	62.6	-2.0
2	2390.00	44.3 AV	54.0	-9.7	1.65 H	345	46.3	-2.0
3	*2412.00	108.1 PK			1.65 H	345	110.2	-2.1
4	*2412.00	98.1 AV			1.65 H	345	100.2	-2.1
5	4824.00	43.6 PK	74.0	-30.4	1.76 H	204	40.9	2.7
6	4824.00	41.1 AV	54.0	-12.9	1.76 H	204	38.4	2.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	2.15 V	38	70.4	-2.0
2	2390.00	53.8 AV	54.0	-0.2	2.15 V	38	55.8	-2.0
3	*2412.00	118.6 PK			2.15 V	38	120.7	-2.1
4	*2412.00	106.0 AV			2.15 V	38	108.1	-2.1
5	4824.00	46.4 PK	74.0	-27.6	1.67 V	161	43.7	2.7
6	4824.00	44.3 AV	54.0	-9.7	1.67 V	161	41.6	2.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.67 H	360	65.7	-2.0
2	2390.00	47.6 AV	54.0	-6.4	1.67 H	360	49.6	-2.0
3	*2437.00	114.8 PK			1.67 H	360	117.1	-2.3
4	*2437.00	104.5 AV			1.67 H	360	106.8	-2.3
5	2490.70	60.1 PK	74.0	-13.9	1.67 H	360	62.3	-2.2
6	2490.70	44.7 AV	54.0	-9.3	1.67 H	360	46.9	-2.2
7	4874.00	46.2 PK	74.0	-27.8	1.75 H	199	43.3	2.9
8	4874.00	44.0 AV	54.0	-10.0	1.75 H	199	41.1	2.9
9	7311.00	59.7 PK	74.0	-14.3	1.63 H	355	50.4	9.3
10	7311.00	45.4 AV	54.0	-8.6	1.63 H	355	36.1	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	2.04 V	47	70.4	-2.0
2	2390.00	52.4 AV	54.0	-1.6	2.04 V	47	54.4	-2.0
3	*2437.00	123.0 PK			2.04 V	47	125.3	-2.3
4	*2437.00	112.0 AV			2.04 V	47	114.3	-2.3
5	2490.70	63.1 PK	74.0	-10.9	2.04 V	47	65.3	-2.2
6	2490.70	46.8 AV	54.0	-7.2	2.04 V	47	49.0	-2.2
7	4874.00	48.7 PK	74.0	-25.3	1.73 V	178	45.8	2.9
8	4874.00	46.6 AV	54.0	-7.4	1.73 V	178	43.7	2.9
9	7311.00	61.6 PK	74.0	-12.4	2.03 V	48	52.3	9.3
10	7311.00	47.8 AV	54.0	-6.2	2.03 V	48	38.5	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			1.69 H	360	109.9	-2.3
2	*2462.00	97.5 AV			1.69 H	360	99.8	-2.3
3	2483.50	58.4 PK	74.0	-15.6	1.69 H	360	60.6	-2.2
4	2483.50	43.5 AV	54.0	-10.5	1.69 H	360	45.7	-2.2
5	4924.00	43.2 PK	74.0	-30.8	1.69 H	214	40.2	3.0
6	4924.00	40.5 AV	54.0	-13.5	1.69 H	214	37.5	3.0
7	7386.00	55.2 PK	74.0	-18.8	1.65 H	350	45.5	9.7
8	7386.00	42.1 AV	54.0	-11.9	1.65 H	350	32.4	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.2 PK			1.50 V	59	119.5	-2.3
2	*2462.00	105.4 AV			1.50 V	59	107.7	-2.3
3	2483.50	70.2 PK	74.0	-3.8	1.50 V	59	72.4	-2.2
4	2483.50	53.9 AV	54.0	-0.1	1.50 V	59	56.1	-2.2
5	4924.00	45.9 PK	74.0	-28.1	1.62 V	160	42.9	3.0
6	4924.00	43.7 AV	54.0	-10.3	1.62 V	160	40.7	3.0
7	7386.00	58.6 PK	74.0	-15.4	1.98 V	43	48.9	9.7
8	7386.00	44.2 AV	54.0	-9.8	1.98 V	43	34.5	9.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2379.40	54.6 PK	74.0	-19.4	1.63 H	348	56.5	-1.9
2	2379.40	42.2 AV	54.0	-11.8	1.63 H	348	44.1	-1.9
3	*2422.00	106.4 PK			1.63 H	348	108.6	-2.2
4	*2422.00	96.2 AV			1.63 H	348	98.4	-2.2
5	4844.00	43.2 PK	74.0	-30.8	1.72 H	200	40.5	2.7
6	4844.00	41.6 AV	54.0	-12.4	1.72 H	200	38.9	2.7
7	7266.00	56.2 PK	74.0	-17.8	1.66 H	341	47.1	9.1
8	7266.00	42.7 AV	54.0	-11.3	1.66 H	341	33.6	9.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2379.40	68.4 PK	74.0	-5.6	2.00 V	42	70.3	-1.9
2	2379.40	53.8 AV	54.0	-0.2	2.00 V	42	55.7	-1.9
3	*2422.00	113.5 PK			2.00 V	42	115.7	-2.2
4	*2422.00	103.8 AV			2.00 V	42	106.0	-2.2
5	4844.00	45.2 PK	74.0	-28.8	1.60 V	175	42.5	2.7
6	4844.00	43.8 AV	54.0	-10.2	1.60 V	175	41.1	2.7
7	7266.00	58.2 PK	74.0	-15.8	1.94 V	37	49.1	9.1
8	7266.00	44.7 AV	54.0	-9.3	1.94 V	37	35.6	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.62 H	360	59.1	-2.0
2	2390.00	45.2 AV	54.0	-8.8	1.62 H	360	47.2	-2.0
3	*2437.00	107.3 PK			1.62 H	360	109.6	-2.3
4	*2437.00	97.4 AV			1.62 H	360	99.7	-2.3
5	2486.30	54.5 PK	74.0	-19.5	1.62 H	360	56.7	-2.2
6	2486.30	42.7 AV	54.0	-11.3	1.62 H	360	44.9	-2.2
7	4874.00	44.3 PK	74.0	-29.7	1.70 H	210	41.4	2.9
8	4874.00	42.1 AV	54.0	-11.9	1.70 H	210	39.2	2.9
9	7311.00	57.6 PK	74.0	-16.4	1.65 H	357	48.3	9.3
10	7311.00	43.8 AV	54.0	-10.2	1.65 H	357	34.5	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.50 V	28	67.3	-2.0
2	2390.00	53.8 AV	54.0	-0.2	1.50 V	28	55.8	-2.0
3	*2437.00	115.1 PK			1.50 V	28	117.4	-2.3
4	*2437.00	105.1 AV			1.50 V	28	107.4	-2.3
5	2486.30	62.3 PK	74.0	-11.7	1.50 V	28	64.5	-2.2
6	2486.30	46.6 AV	54.0	-7.4	1.50 V	28	48.8	-2.2
7	4874.00	46.1 PK	74.0	-27.9	1.60 V	174	43.2	2.9
8	4874.00	44.2 AV	54.0	-9.8	1.60 V	174	41.3	2.9
9	7311.00	59.6 PK	74.0	-14.4	1.96 V	29	50.3	9.3
10	7311.00	45.1 AV	54.0	-8.9	1.96 V	29	35.8	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.3 PK			1.66 H	359	106.6	-2.3
2	*2452.00	94.2 AV			1.66 H	359	96.5	-2.3
3	2487.10	53.2 PK	74.0	-20.8	1.66 H	359	55.4	-2.2
4	2487.10	41.1 AV	54.0	-12.9	1.66 H	359	43.3	-2.2
5	4904.00	42.8 PK	74.0	-31.2	1.70 H	206	39.9	2.9
6	4904.00	40.9 AV	54.0	-13.1	1.70 H	206	38.0	2.9
7	7356.00	55.4 PK	74.0	-18.6	1.63 H	345	45.7	9.7
8	7356.00	41.6 AV	54.0	-12.4	1.63 H	345	31.9	9.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	111.4 PK			1.82 V	39	113.7	-2.3
2	*2452.00	101.8 AV			1.82 V	39	104.1	-2.3
3	2487.10	67.8 PK	74.0	-6.2	1.82 V	39	70.0	-2.2
4	2487.10	53.9 AV	54.0	-0.1	1.82 V	39	56.1	-2.2
5	4904.00	44.5 PK	74.0	-29.5	1.64 V	164	41.6	2.9
6	4904.00	42.9 AV	54.0	-11.1	1.64 V	164	40.0	2.9
7	7356.00	57.2 PK	74.0	-16.8	1.98 V	41	47.5	9.7
8	7356.00	43.6 AV	54.0	-10.4	1.98 V	41	33.9	9.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.06	36.5 QP	43.5	-7.0	2.00 H	98	45.9	-9.4
2	140.58	34.1 QP	43.5	-9.4	2.00 H	302	42.2	-8.1
3	165.80	31.4 QP	43.5	-12.1	2.00 H	249	39.4	-8.0
4	270.56	28.2 QP	46.0	-17.8	1.50 H	138	36.4	-8.2
5	526.64	27.1 QP	46.0	-18.9	1.50 H	206	28.9	-1.8
6	730.34	38.8 QP	46.0	-7.2	1.00 H	147	37.0	1.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.76	32.0 QP	40.0	-8.0	1.00 V	231	40.5	-8.5
2	53.28	35.8 QP	40.0	-4.2	1.00 V	261	43.7	-7.9
3	157.07	31.5 QP	43.5	-12.0	1.00 V	324	39.0	-7.5
4	395.69	26.1 QP	46.0	-19.9	1.00 V	141	30.8	-4.7
5	683.78	29.7 QP	46.0	-16.3	1.50 V	305	28.5	1.2
6	910.76	33.6 QP	46.0	-12.4	2.00 V	264	28.9	4.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2017	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Feb. 09, 2018

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

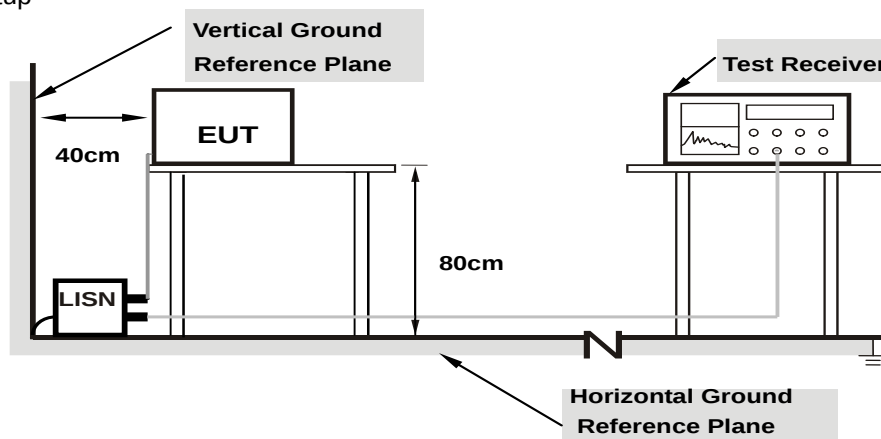

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.14	36.84	20.02	46.98	30.16	66.00	56.00	-19.02	-25.84
2	0.43906	10.20	29.48	22.09	39.68	32.29	57.08	47.08	-17.40	-14.79
3	0.79063	10.23	13.59	5.54	23.82	15.77	56.00	46.00	-32.18	-30.23
4	6.48047	10.59	15.79	9.83	26.38	20.42	60.00	50.00	-33.62	-29.58
5	12.23828	10.97	19.19	13.79	30.16	24.76	60.00	50.00	-29.84	-25.24
6	24.38281	11.58	14.94	8.74	26.52	20.32	60.00	50.00	-33.48	-29.68

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

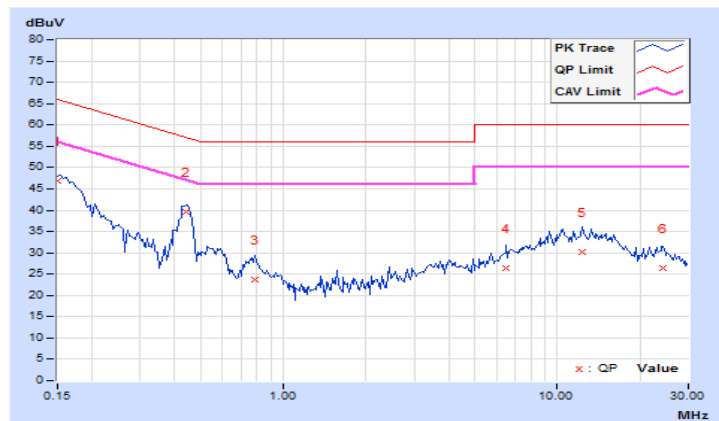


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.05	37.54	21.52	47.59	31.57	66.00	56.00	-18.41	-24.43
2	0.17734	10.05	32.78	16.57	42.83	26.62	64.61	54.61	-21.78	-27.99
3	0.23594	10.06	24.19	9.52	34.25	19.58	62.24	52.24	-27.99	-32.66
4	0.44297	10.10	29.25	22.01	39.35	32.11	57.01	47.01	-17.66	-14.90
5	12.38672	10.80	20.48	14.74	31.28	25.54	60.00	50.00	-28.72	-24.46
6	25.49219	11.35	22.45	17.28	33.80	28.63	60.00	50.00	-26.20	-21.37

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

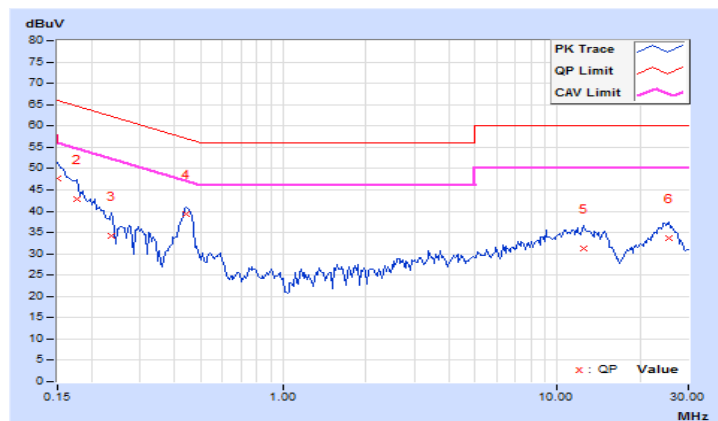


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.13	8.11	0.5	PASS
6	2437	8.11	8.55	0.5	PASS
11	2462	8.13	8.59	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.42	16.41	0.5	PASS
6	2437	16.40	16.40	0.5	PASS
11	2462	16.38	16.42	0.5	PASS

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.62	17.62	0.5	Pass
6	2437	17.63	17.63	0.5	Pass
11	2462	17.64	17.64	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.27	35.33	0.5	Pass
6	2437	35.33	35.31	0.5	Pass
9	2452	35.16	35.34	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

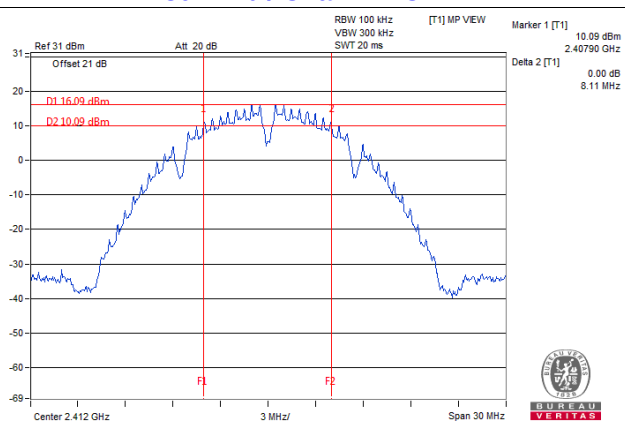


802.11g / Chain 0 : CH11

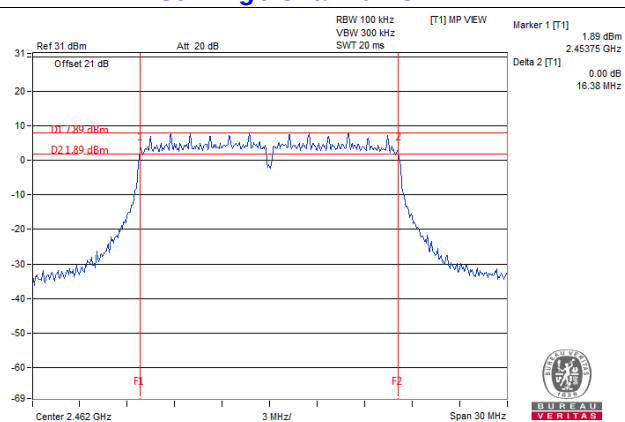

VHT20 / Chain 0 : CH1

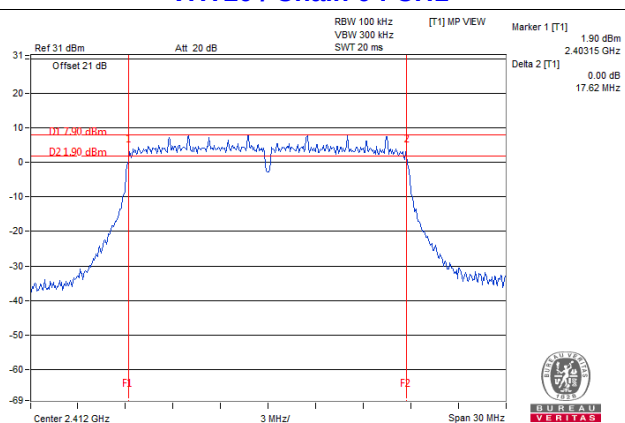


VHT40 / Chain 0 : CH9

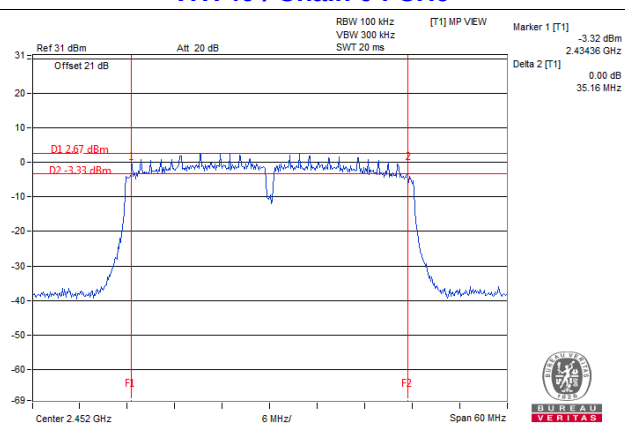

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	13.08	13.08
6	2437	13.08	13.08
11	2462	13.08	13.08

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	16.44	16.44
6	2437	20.28	17.52
11	2462	16.44	16.44

VHT20


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	17.76	17.64
6	2437	21.84	18.36
11	2462	17.64	17.76

VHT40


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
3	2422	36.24	36.24
6	2437	36.24	36.24
9	2452	36.00	36.24

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

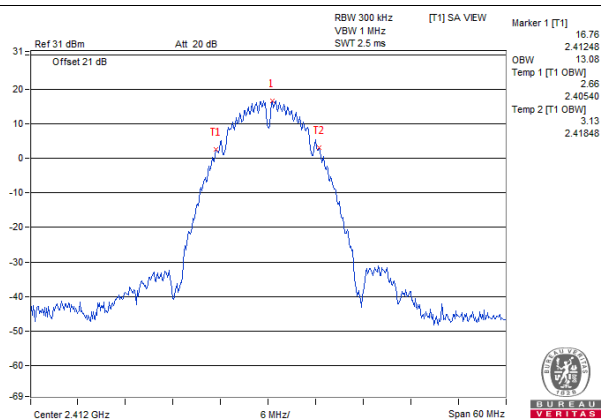


802.11g / Chain 0 : CH6

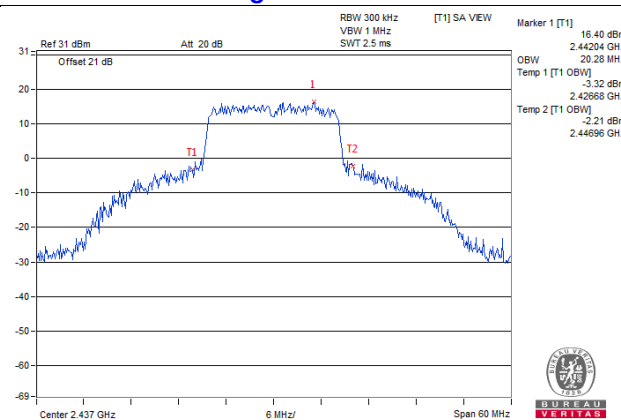

VHT20 / Chain 0 : CH6

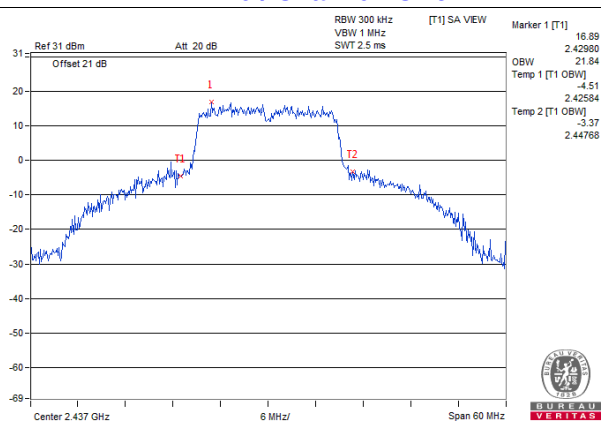

VHT40 / Chain 0 : CH3

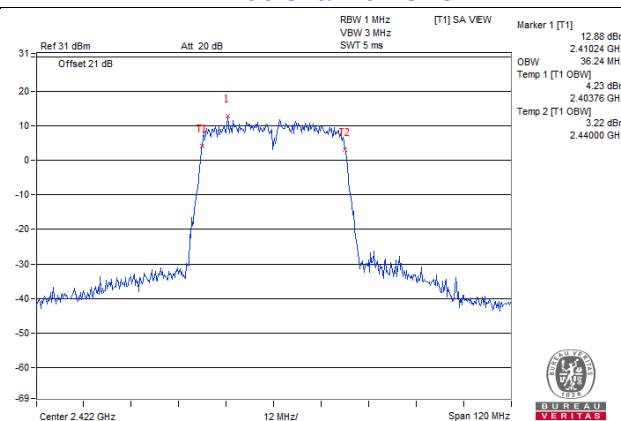

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.79	24.53	585.093	27.67	30.00	Pass
6	2437	23.09	23.16	410.718	26.14	30.00	Pass
11	2462	23.08	23.32	418.019	26.21	30.00	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.21	20.17	208.946	23.20	30.00	Pass
6	2437	25.48	25.33	694.376	28.42	30.00	Pass
11	2462	19.17	19.59	173.595	22.40	30.00	Pass

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.29	19.21	168.286	22.26	30.00	Pass
6	2437	25.36	25.25	678.523	28.32	30.00	Pass
11	2462	18.54	18.86	148.363	21.71	30.00	Pass

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.12	17.87	126.098	21.01	30.00	Pass
6	2437	19.55	19.41	177.454	22.49	30.00	Pass
9	2452	16.46	16.71	91.14	19.60	30.00	Pass

Beamforming Mode

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.29	19.21	168.286	22.26	27.99	Pass
6	2437	25.09	24.79	624.15	27.95	27.99	Pass
11	2462	18.54	18.86	148.363	21.71	27.99	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.01 - 6) = 27.99\text{dBm}$.

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.12	17.87	126.098	21.01	27.99	Pass
6	2437	19.55	19.41	177.454	22.49	27.99	Pass
9	2452	16.46	16.71	91.14	19.60	27.99	Pass


Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.01 - 6) = 27.99\text{dBm}$.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

802.11g, VHT20, VHT40

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-6.35	3.01	-3.34	5.99	Pass
	6	2437	-7.57	3.01	-4.56	5.99	Pass
	11	2462	-7.16	3.01	-4.15	5.99	Pass
1	1	2412	-6.58	3.01	-3.57	5.99	Pass
	6	2437	-7.17	3.01	-4.16	5.99	Pass
	11	2462	-7.28	3.01	-4.27	5.99	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.01-6) = 5.99\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.18	3.01	0.18	-8.99	5.99	Pass
	6	2437	-7.87	3.01	0.18	-4.68	5.99	Pass
	11	2462	-12.89	3.01	0.18	-9.70	5.99	Pass
1	1	2412	-12.12	3.01	0.18	-8.93	5.99	Pass
	6	2437	-7.96	3.01	0.18	-4.77	5.99	Pass
	11	2462	-13.48	3.01	0.18	-10.29	5.99	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.01-6) = 5.99\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

VHT20

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-14.47	3.01	0.09	-11.37	5.99	Pass
	6	2437	-8.06	3.01	0.09	-4.96	5.99	Pass
	11	2462	-13.90	3.01	0.09	-10.80	5.99	Pass
1	1	2412	-13.47	3.01	0.09	-10.37	5.99	Pass
	6	2437	-7.75	3.01	0.09	-4.65	5.99	Pass
	11	2462	-13.02	3.01	0.09	-9.92	5.99	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.01-6) = 5.99\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

VHT40


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-17.01	3.01	0.16	-13.84	5.99	Pass
	6	2437	-15.76	3.01	0.16	-12.59	5.99	Pass
	9	2452	-18.37	3.01	0.16	-15.20	5.99	Pass
1	3	2422	-17.30	3.01	0.16	-14.13	5.99	Pass
	6	2437	-16.21	3.01	0.16	-13.04	5.99	Pass
	9	2452	-18.44	3.01	0.16	-15.27	5.99	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.01-6) = 5.99\text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

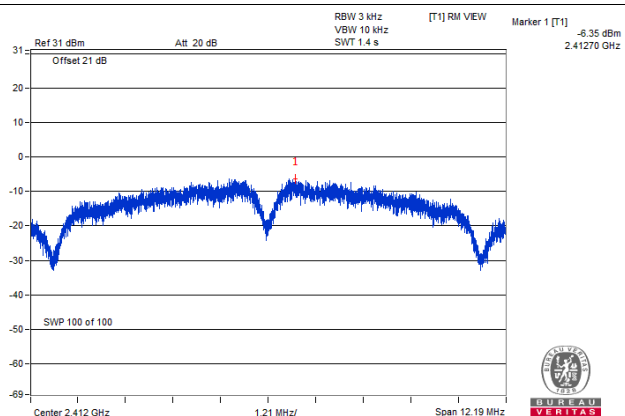


802.11g / Chain 0 : CH6

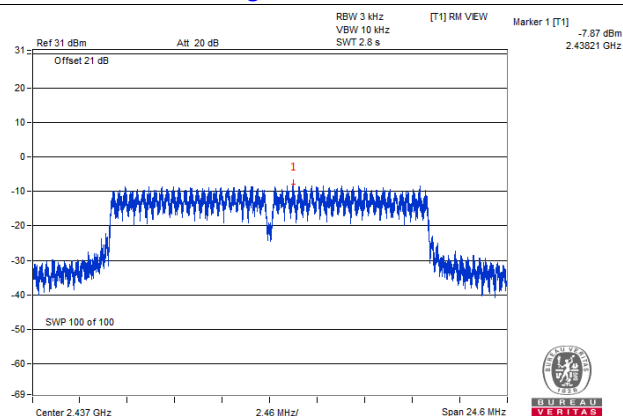

VHT20 / Chain 1 : CH6

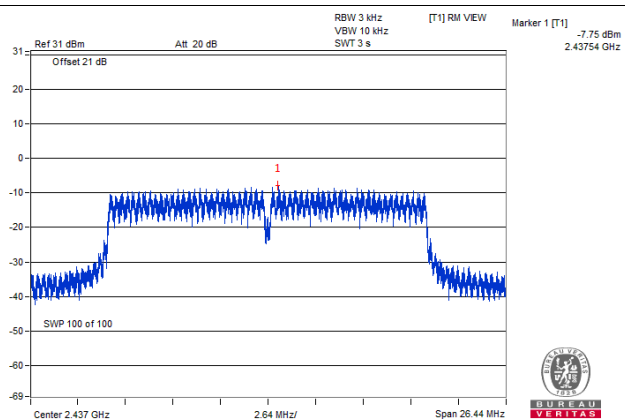

VHT40 / Chain 0 : CH6

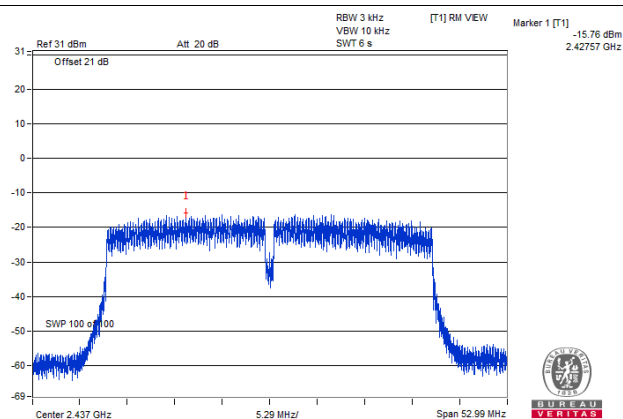


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


Same as Item 4.3.6

4.7.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

Maximum REF

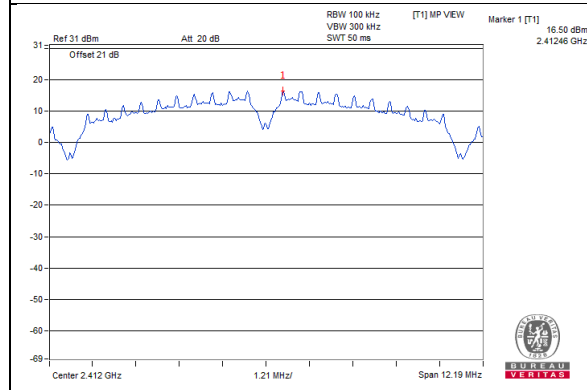


Chain 0


CH 1

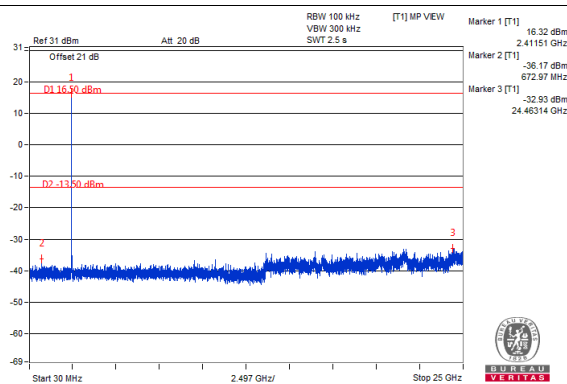


CH 6

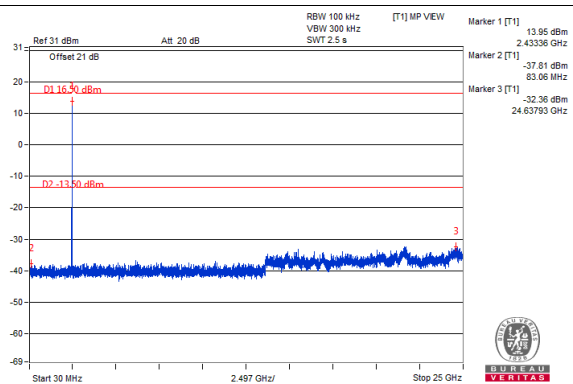


CH 11

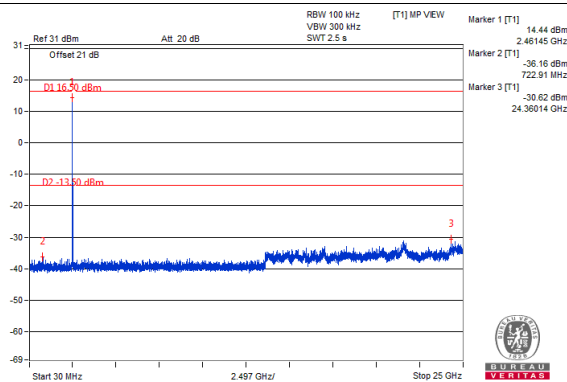

CH 1 Band edge

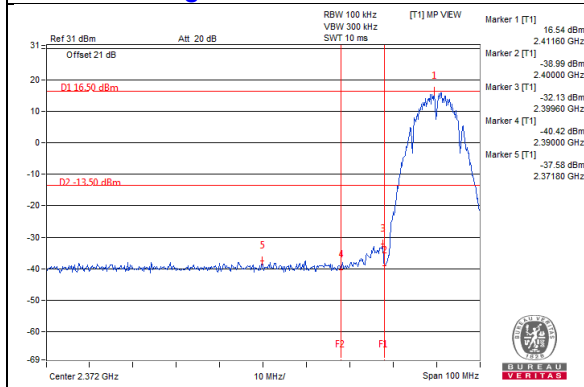


CH 11 Band edge

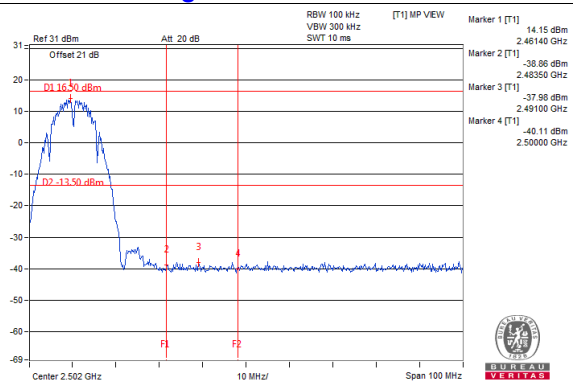


Chain 1


CH 1

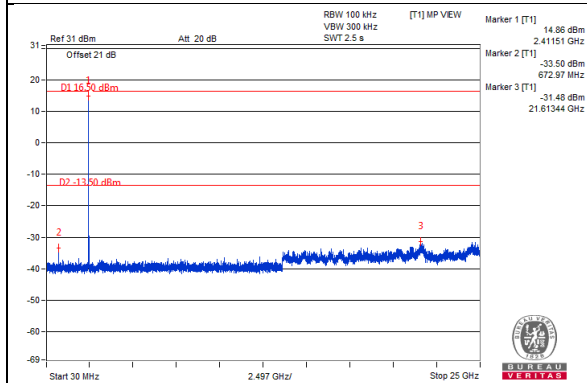


CH 6

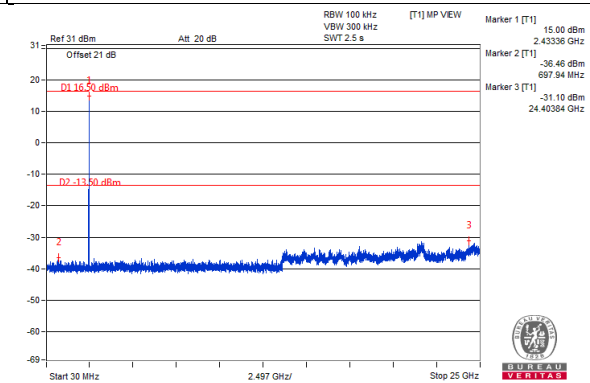


CH 11

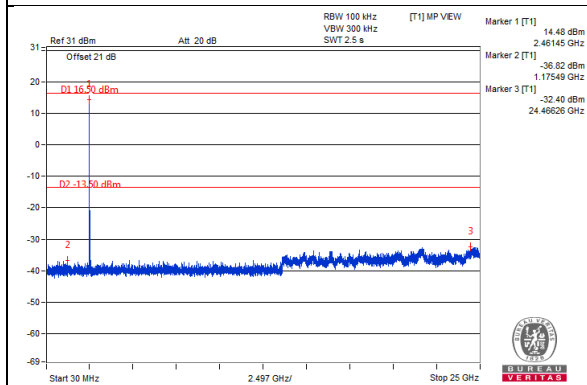

CH 1 Band edge

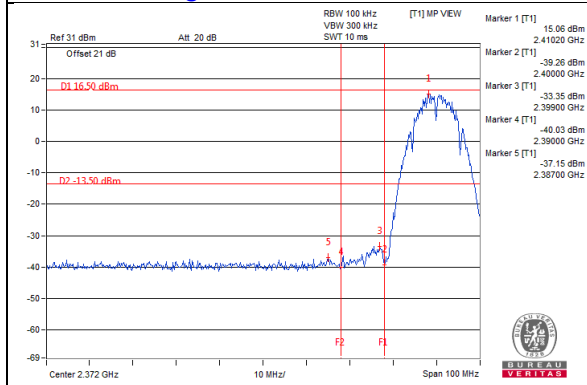


CH 11 Band edge

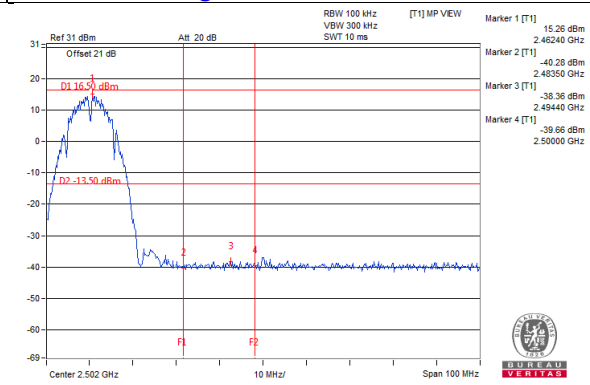


802.11g

Maximum REF

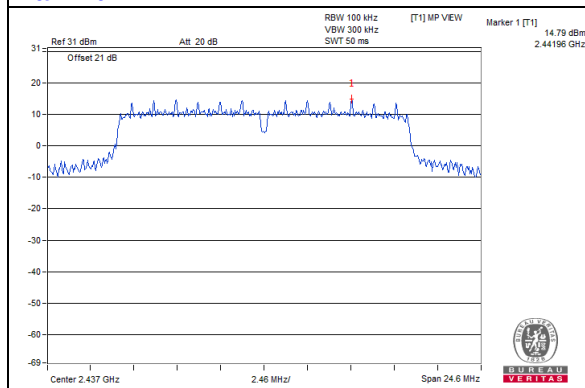


Chain 0


CH 1

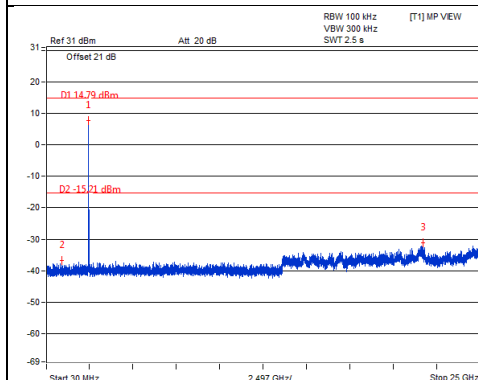


CH 6

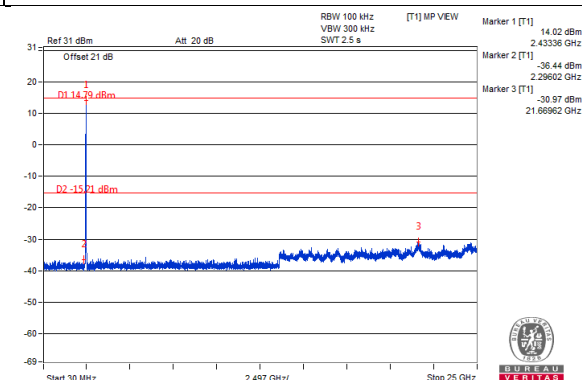


CH 11

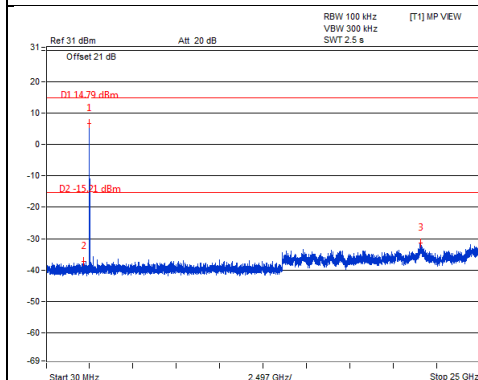

CH 1 Band edge

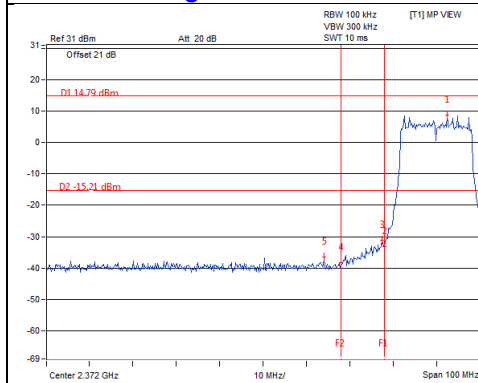


CH 11 Band edge

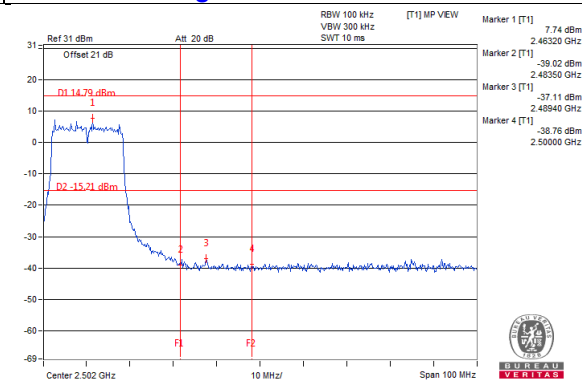


Chain 1


CH 1

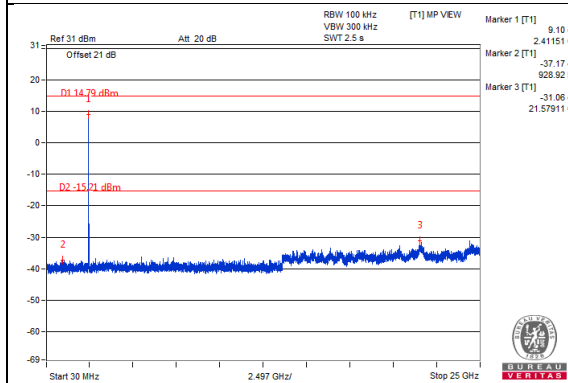


CH 6

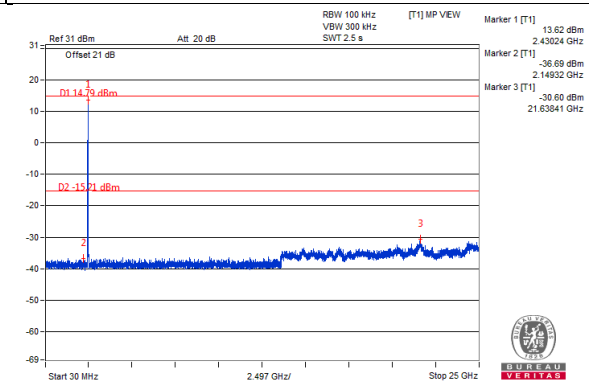


CH 11

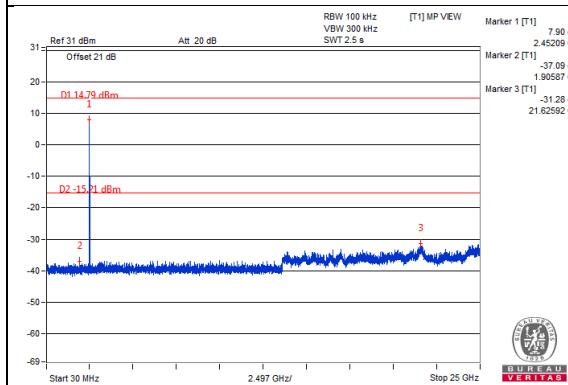

CH 1 Band edge

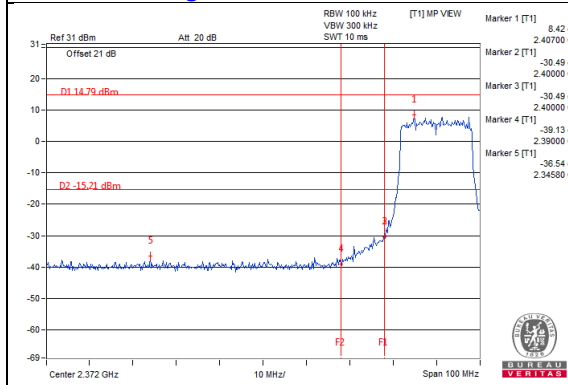


CH 11 Band edge

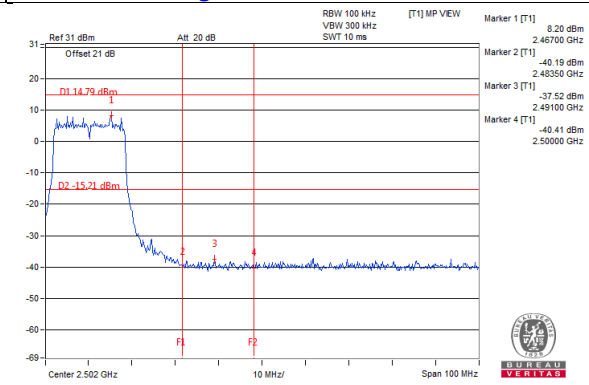


VHT20

Maximum REF

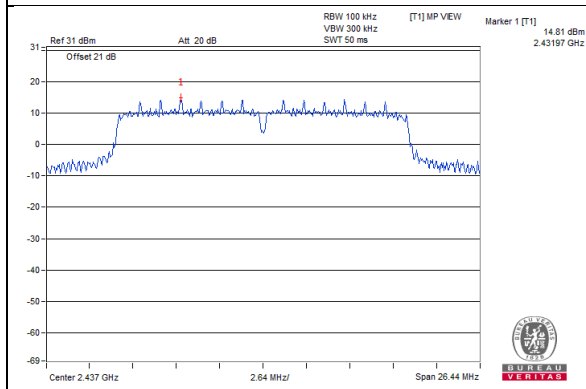


Chain 0


CH 1

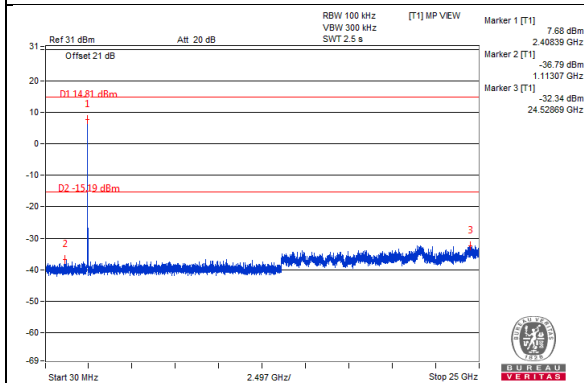


CH 6

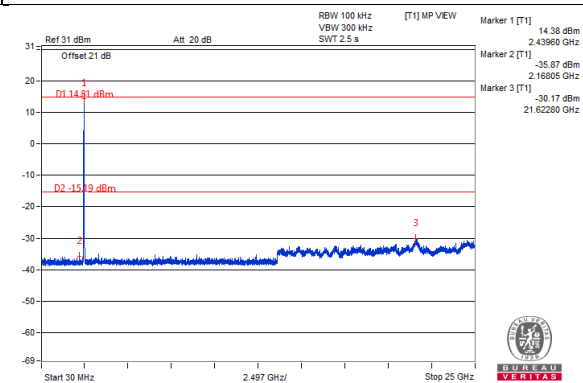


CH 11

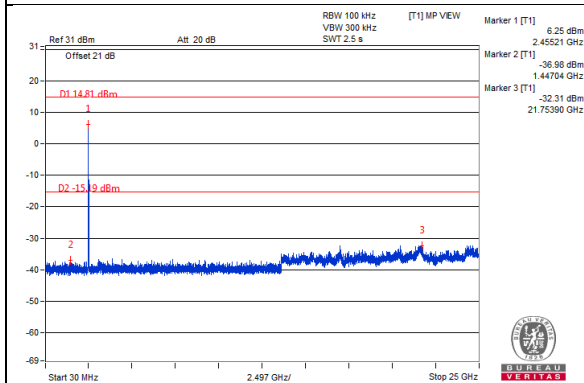

CH 1 Band edge

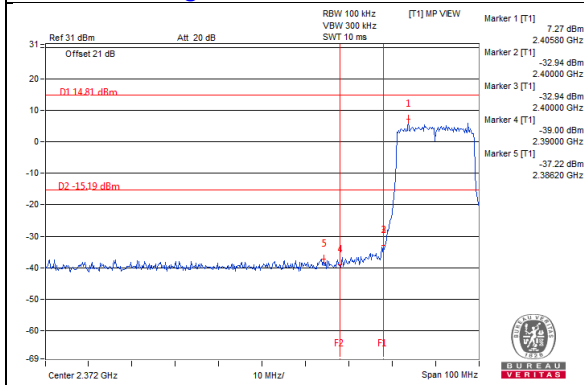


CH 11 Band edge

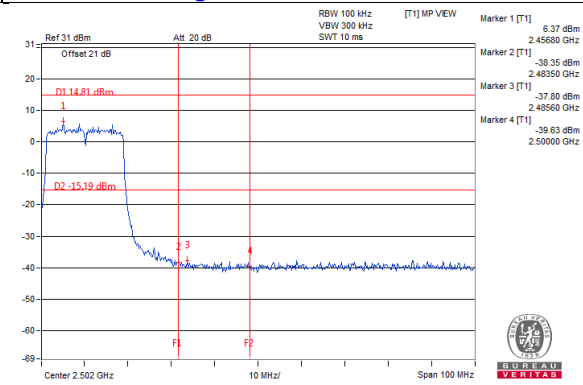


Chain 1


CH 1

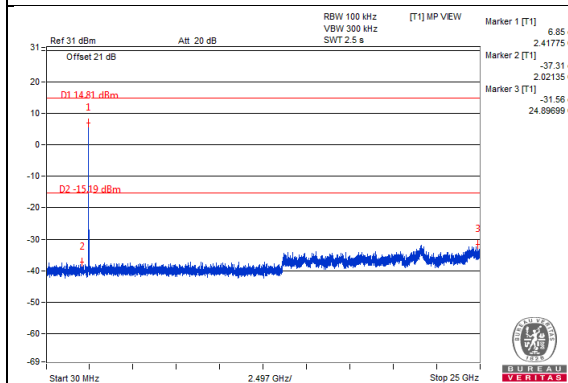


CH 6

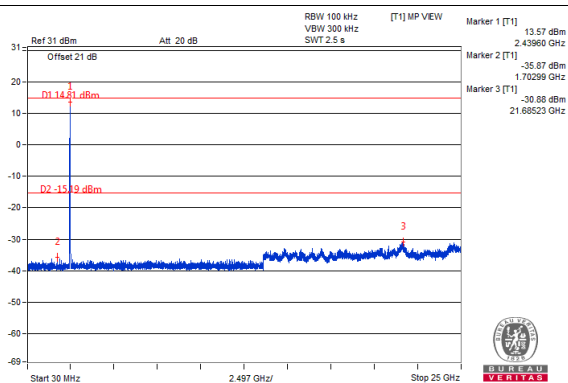


CH 11

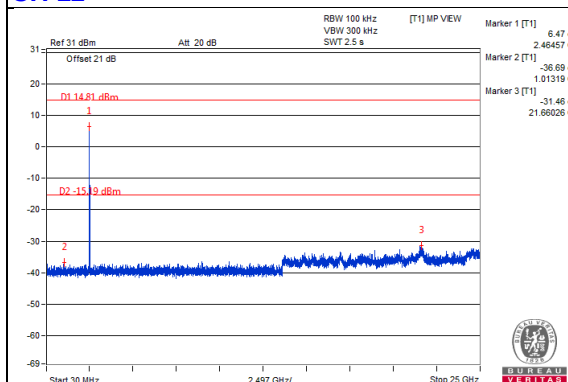

CH 1 Band edge

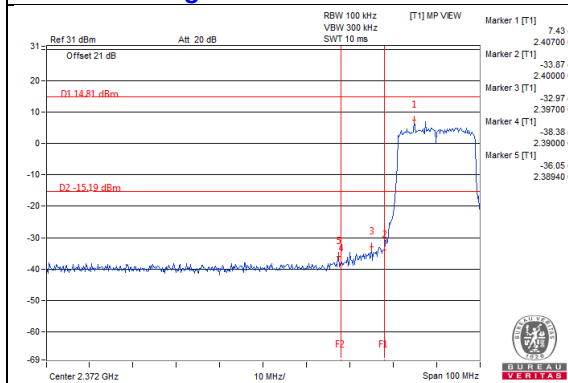


CH 11 Band edge

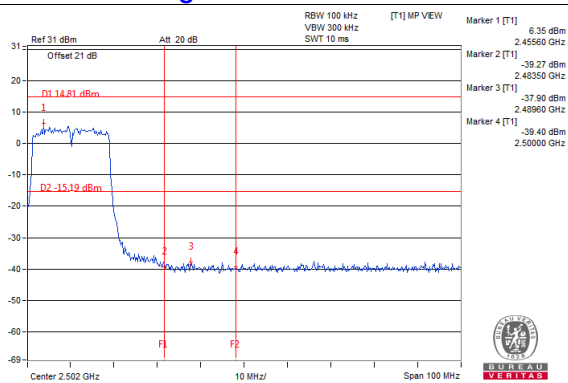


VHT40

Maximum REF

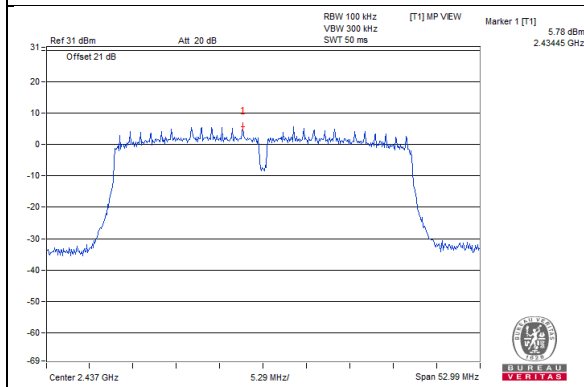


Chain 0


CH 3

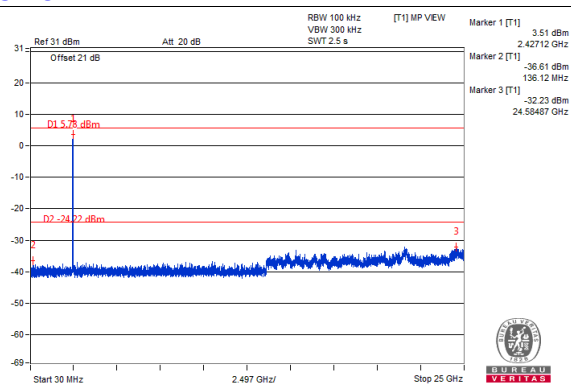


CH 6

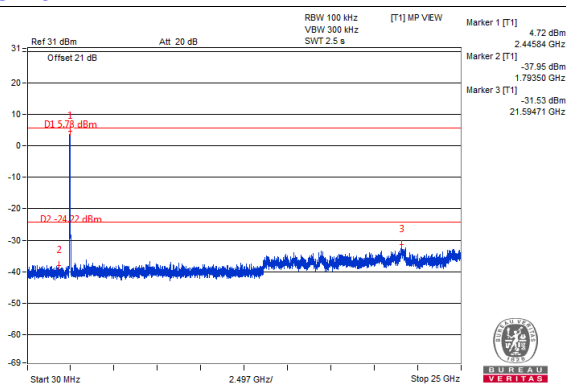


CH 9

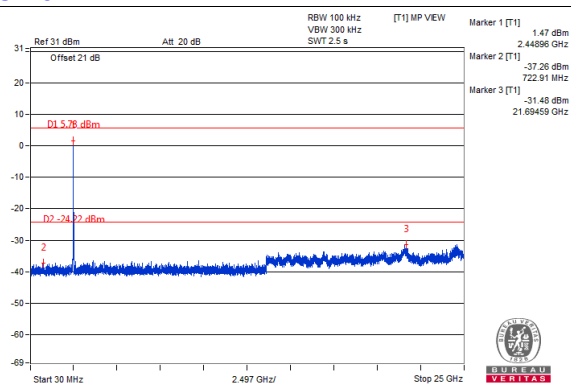

CH 3 Band edge

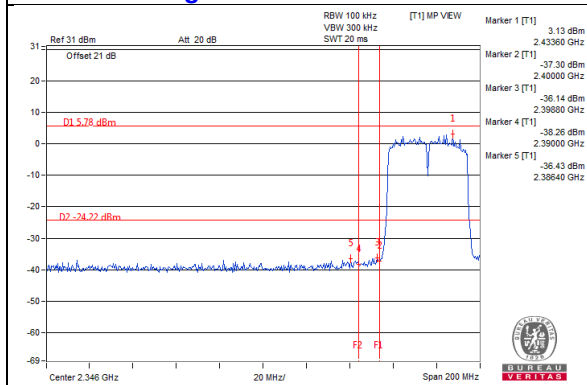


CH 9 Band edge

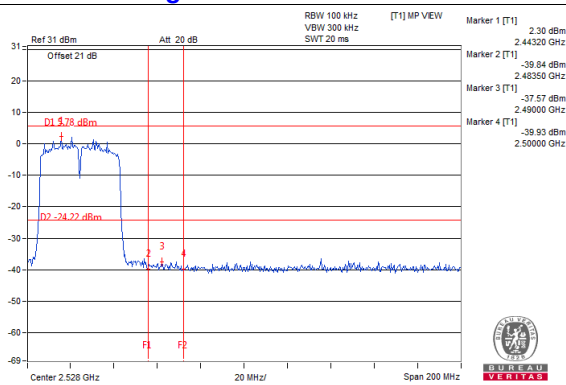


Chain 1


CH 3

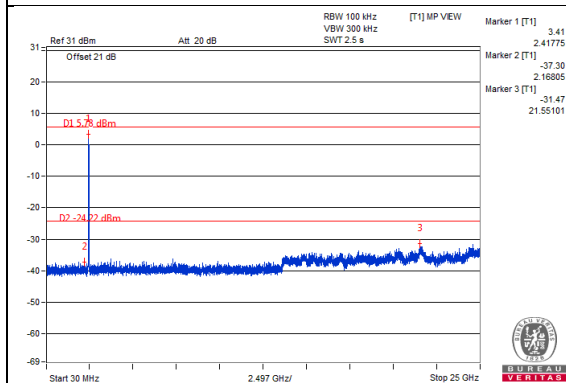


CH 6

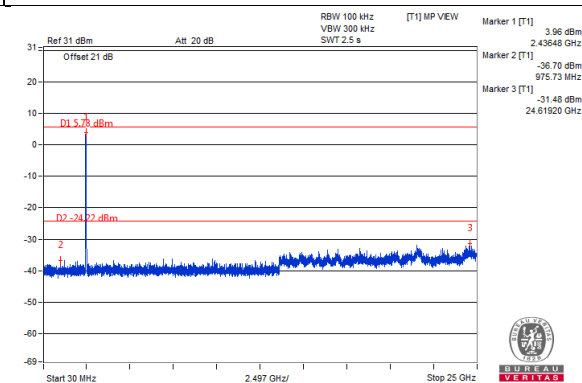


CH 9

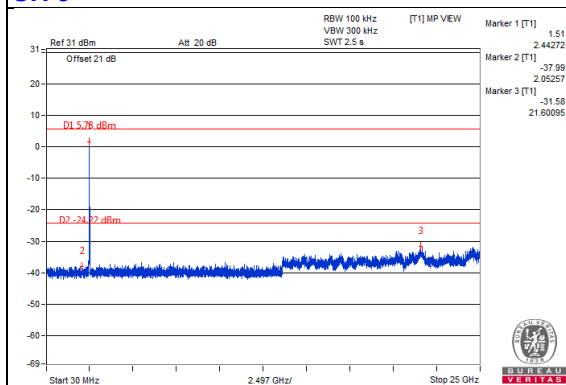

CH 3 Band edge

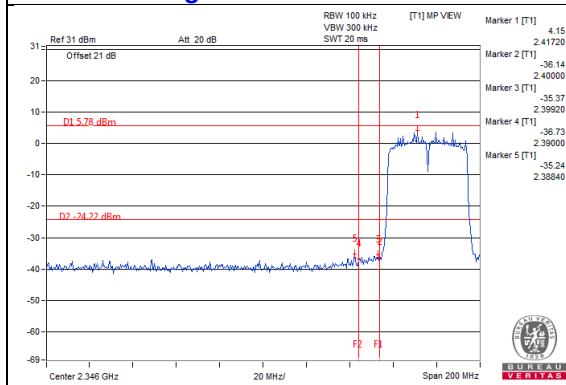

CH 9 Band edge

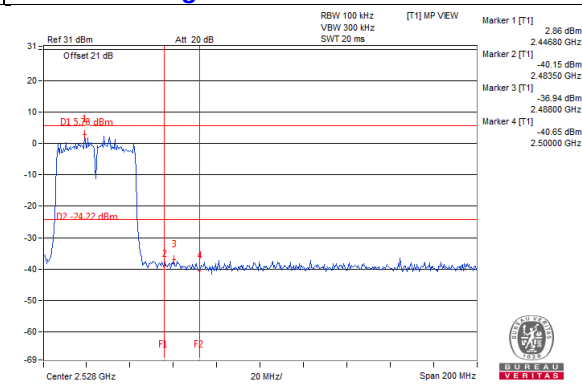

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---