

# FCC TEST REPORT

**REPORT NO.:** RF920815R03

**MODEL NO.:** DI-774

**RECEIVED:** Aug. 15, 2003

**TESTED:** Aug.14 ~ Aug.23, 2003

**APPLICANT:** D-Link Corporation

**ADDRESS:** No. 8, Li-Hsin VII Road Science Based  
Industrial Park Hsin-Chu, Taiwan

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 129 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0

## Table of Contents

|       |                                                                |    |
|-------|----------------------------------------------------------------|----|
| 1.    | CERTIFICATION.....                                             | 6  |
| 2.    | SUMMARY OF TEST RESULTS .....                                  | 7  |
| 3.    | GENERAL INFORMATION .....                                      | 9  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                               | 9  |
| 3.2   | DESCRIPTION OF TEST MODES .....                                | 10 |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS.....                  | 11 |
| 3.4   | DESCRIPTION OF SUPPORT UNITS.....                              | 12 |
| 4.    | TEST TYPES AND RESULTS (For Part 802.11b& draft 802.11g) ..... | 14 |
| 4.1   | CONDUCTED EMISSION MEASUREMENT.....                            | 14 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....                 | 14 |
| 4.1.2 | TEST INSTRUMENTS.....                                          | 14 |
| 4.1.3 | TEST PROCEDURES .....                                          | 15 |
| 4.1.4 | DEVIATION FROM TEST STANDARD .....                             | 15 |
| 4.1.5 | TEST SETUP.....                                                | 16 |
| 4.1.6 | EUT OPERATING CONDITIONS .....                                 | 16 |
| 4.1.7 | TEST RESULTS .....                                             | 17 |
| 4.2   | RADIATED EMISSION MEASUREMENT .....                            | 23 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....                  | 23 |
| 4.2.2 | TEST INSTRUMENTS.....                                          | 24 |
| 4.2.3 | TEST PROCEDURES .....                                          | 26 |
| 4.2.4 | DEVIATION FROM TEST STANDARD.....                              | 26 |
| 4.2.5 | TEST SETUP.....                                                | 27 |
| 4.2.6 | EUT OPERATING CONDITIONS .....                                 | 27 |
| 4.2.7 | TEST RESULTS .....                                             | 28 |
| 4.3   | 6dB BANDWIDTH MEASUREMENT .....                                | 36 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT.....                       | 36 |
| 4.3.2 | TEST INSTRUMENTS.....                                          | 36 |
| 4.3.3 | TEST PROCEDURE.....                                            | 37 |
| 4.3.4 | DEVIATION FROM TEST STANDARD .....                             | 37 |
| 4.3.5 | TEST SETUP.....                                                | 37 |
| 4.3.6 | EUT OPERATING CONDITIONS .....                                 | 37 |
| 4.3.7 | TEST RESULTS .....                                             | 38 |
| 4.4   | MAXIMUM PEAK OUTPUT POWER.....                                 | 46 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....           | 46 |
| 4.4.2 | INSTRUMENTS.....                                               | 46 |



|       |                                                              |    |
|-------|--------------------------------------------------------------|----|
| 4.4.3 | TEST PROCEDURES .....                                        | 47 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                           | 47 |
| 4.4.5 | TEST SETUP .....                                             | 47 |
| 4.4.6 | EUT OPERATING CONDITIONS .....                               | 47 |
| 4.4.7 | TEST RESULTS .....                                           | 48 |
| 4.5   | POWER SPECTRAL DENSITY MEASUREMENT .....                     | 49 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....           | 49 |
| 4.5.2 | TEST INSTRUMENTS .....                                       | 49 |
| 4.5.3 | TEST PROCEDURE .....                                         | 50 |
| 4.5.4 | DEVIATION FROM TEST STANDARD .....                           | 50 |
| 4.5.5 | TEST SETUP .....                                             | 50 |
| 4.5.6 | EUT OPERATING CONDITION .....                                | 50 |
| 4.5.7 | TEST RESULTS .....                                           | 51 |
| 4.6   | BAND EDGES MEASUREMENT .....                                 | 59 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT .....                       | 59 |
| 4.6.2 | TEST INSTRUMENTS .....                                       | 59 |
| 4.6.3 | TEST PROCEDURE .....                                         | 59 |
| 4.6.4 | DEVIATION FROM TEST STANDARD .....                           | 59 |
| 4.6.5 | EUT OPERATING CONDITION .....                                | 60 |
| 4.6.6 | TEST RESULTS .....                                           | 60 |
| 4.7   | ANTENNA REQUIREMENT .....                                    | 65 |
| 4.7.1 | STANDARD APPLICABLE .....                                    | 65 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION .....                         | 65 |
| 5.    | TEST TYPES AND RESULTS (For part 802.11A).....               | 66 |
| 5.1   | CONDUCTED EMISSION MEASUREMENT .....                         | 66 |
| 5.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....               | 66 |
| 5.1.2 | TEST INSTRUMENTS .....                                       | 66 |
| 5.1.3 | TEST PROCEDURES .....                                        | 67 |
| 5.1.4 | DEVIATION FROM TEST STANDARD .....                           | 67 |
| 5.1.5 | TEST SETUP .....                                             | 68 |
| 5.1.6 | EUT OPERATING CONDITIONS .....                               | 68 |
| 5.1.7 | TEST RESULTS .....                                           | 69 |
| 5.2   | RADIATED EMISSION MEASUREMENT .....                          | 71 |
| 5.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....                | 71 |
| 5.2.2 | LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS..... | 72 |
| 5.2.3 | TEST INSTRUMENTS .....                                       | 73 |
| 5.2.4 | TEST PROCEDURES .....                                        | 74 |
| 5.2.5 | DEVIATION FROM TEST STANDARD .....                           | 74 |
| 5.2.6 | TEST SETUP .....                                             | 75 |



|       |                                                         |     |
|-------|---------------------------------------------------------|-----|
| 5.2.7 | EUT OPERATING CONDITIONS .....                          | 75  |
| 5.2.8 | TEST RESULTS .....                                      | 76  |
| 5.3   | PEAK TRANSMIT POWER MEASUREMENT .....                   | 84  |
| 5.3.1 | LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....         | 84  |
| 5.3.2 | TEST INSTRUMENTS .....                                  | 84  |
| 5.3.3 | TEST PROCEDURE .....                                    | 85  |
| 5.3.4 | DEVIATION FROM TEST STANDARD .....                      | 85  |
| 5.3.5 | TEST SETUP .....                                        | 85  |
| 5.3.6 | EUT OPERATING CONDITIONS .....                          | 85  |
| 5.3.7 | TEST RESULTS .....                                      | 86  |
| 5.4   | PEAK POWER EXCURSION MEASUREMENT .....                  | 99  |
| 5.4.1 | LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....        | 99  |
| 5.4.2 | TEST INSTRUMENTS .....                                  | 99  |
| 5.4.3 | TEST PROCEDURE .....                                    | 100 |
| 5.4.4 | DEVIATION FROM TEST STANDARD .....                      | 100 |
| 5.4.5 | TEST SETUP .....                                        | 100 |
| 5.4.6 | EUT OPERATING CONDITIONS .....                          | 100 |
| 5.4.7 | TEST RESULTS .....                                      | 101 |
| 5.5   | PEAK POWER SPECTRAL DENSITY MEASUREMENT .....           | 108 |
| 5.5.1 | LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT ..... | 108 |
| 5.5.2 | TEST INSTRUMENTS .....                                  | 108 |
| 5.5.3 | TEST PROCEDURES .....                                   | 109 |
| 5.5.4 | DEVIATION FROM TEST STANDARD .....                      | 109 |
| 5.5.5 | TEST SETUP .....                                        | 109 |
| 5.5.6 | EUT OPERATING CONDITIONS .....                          | 109 |
| 5.5.7 | TEST RESULTS .....                                      | 110 |
| 5.6   | FREQUENCY STABILITY .....                               | 117 |
| 5.6.1 | LIMITS OF FREQUENCY STABILITY MEASUREMENT .....         | 117 |
| 5.6.2 | TEST INSTRUMENTS .....                                  | 117 |
| 5.6.3 | TEST PROCEDURE .....                                    | 117 |
| 5.6.4 | DEVIATION FROM TEST STANDARD .....                      | 118 |
| 5.6.5 | TEST SETUP .....                                        | 118 |
| 5.6.6 | EUT OPERATING CONDITION .....                           | 118 |
| 5.6.7 | TEST RESULTS .....                                      | 119 |
| 5.7   | BAND EDGES MEASUREMENT .....                            | 120 |
| 5.7.1 | TEST INSTRUMENTS .....                                  | 120 |
| 5.7.2 | TEST PROCEDURE .....                                    | 120 |
| 5.7.3 | EUT OPERATING CONDITION .....                           | 120 |
| 5.7.4 | TEST RESULTS .....                                      | 121 |



|       |                                              |     |
|-------|----------------------------------------------|-----|
| 5.8   | ANTENNA REQUIREMENT .....                    | 126 |
| 5.8.1 | STANDARD APPLICABLE.....                     | 126 |
| 5.8.2 | ANTENNA CONNECTED CONSTRUCTION .....         | 126 |
| 6.    | PHOTOGRAPHS OF THE TEST CONFIGURATION .....  | 127 |
| 7.    | INFORMATION ON THE TESTING LABORATORIES..... | 129 |



## 1. CERTIFICATION

**PRODUCT :** Tri-Mode Dualband Wireless Router  
**BRAND NAME :** D-Link  
**MODEL NO. :** DI-774  
**TEST ITEM:** Engineering Sample  
**APPLICANT :** D-Link Corporation  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Aug.14 ~ Aug.23, 2003. The test record data evaluation and Equipment under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Wendy Liao, **DATE:** Aug. 25, 2003  
Wendy Liao

**APPROVED BY:** Dr. Alan Lane, **DATE:** Aug. 25, 2003  
Dr. Alan Lane  
Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: 47 CFR Part 15, Subpart C |                                                                                        |        |                                                                                 |
|---------------------------------------------|----------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------|
| Standard Section                            | Test Type and Limit                                                                    | Result | REMARK                                                                          |
| 15.207                                      | AC Power Conducted Emission                                                            | PASS   | Meet the requirement of limit<br>Minimum passing margin is -16.81dB at 0.150MHz |
| 15.247(a)(2)                                | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System<br>Limit: min. 500kHz   | PASS   | Meet the requirement of limit                                                   |
| 15.247(b)                                   | Maximum Peak Output Power<br>Limit: max. 30dBm                                         | PASS   | Meet the requirement of limit                                                   |
| 15.247(c)                                   | Radiated Emissions<br>Limit: Table 15.209                                              | PASS   | Meet the requirement of limit<br>Minimum passing margin is -1.60dB at 39.70MHz  |
| 15.247(d)                                   | Power Spectral Density<br>Limit: max. 8dBm                                             | PASS   | Meet the requirement of limit                                                   |
| 15.247(c)                                   | Band Edge Measurement<br>Limit: 20dB less than the peak value of fundamental frequency | PASS   | Meet the requirement of limit                                                   |



| <b>APPLIED STANDARD: 47 CFR Part 15, Subpart E</b> |                                                                |               |                                                                                 |
|----------------------------------------------------|----------------------------------------------------------------|---------------|---------------------------------------------------------------------------------|
| <b>Standard Section</b>                            | <b>Test Type</b>                                               | <b>Result</b> | <b>REMARK</b>                                                                   |
| 15.407(b)(5)                                       | AC Power Conducted Emission                                    | PASS          | Meet the requirement of limit<br>Minimum passing margin is -14.18dB at 0.150MHz |
| 15.407(b/1/2/3)(b)(5)                              | Electric Field Strength Spurious Emissions, 30 MHz – 40000 MHz | PASS          | Meet the requirement of limit<br>Minimum passing margin is -1.60dB at 39.70MHz  |
| 15.407(a/1/2/3)                                    | Peak Transmit Power                                            | PASS          | Meet the requirement of limit                                                   |
| 15.407(a)(6)                                       | Peak Power Excursion                                           | PASS          | Meet the requirement of limit                                                   |
| 15.407(a/1/2/3)                                    | Peak Power Spectral Density                                    | PASS          | Meet the requirement of limit                                                   |
| 15.407(g)                                          | Frequency Stability                                            | PASS          | Meet the requirement of limit                                                   |



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                           |                                                                               |
|---------------------------|-------------------------------------------------------------------------------|
| <b>PRODUCT</b>            | Tri-Mode Dualband Wireless Router                                             |
| <b>MODEL NO.</b>          | DI-774                                                                        |
| <b>POWER SUPPLY</b>       | 5VDC from AC adapter                                                          |
| <b>MODULATION</b>         | BPSK, QPSK, CCK, 16QAM, 64QAM                                                 |
| <b>TRANSFER RATE</b>      | Up to 54Mbps                                                                  |
| <b>FREQUENCY RANGE</b>    | 802.11b: 2412MHz ~ 2462MHz<br>802.11a: 5.15GHz ~ 5.35GHz, 5.725GHz ~ 5.825GHz |
| <b>NUMBER OF CHANNEL</b>  | 802.11b: 11<br>802.11a: 12                                                    |
| <b>CHANNEL SPACING</b>    | 802.11b: 5MHz<br>802.11a: 20MHz                                               |
| <b>OUTPUT POWER</b>       | 802.11b and draft 802.11g: 17.10dBm<br>802.11a: 17.12dBm                      |
| <b>DATA CABLE</b>         | NA                                                                            |
| <b>ANTENNA TYPE</b>       | Dipole Antenna                                                                |
| <b>ANTENNA GAIN</b>       | 802.11b: 2dBi<br>802.11a: 5dBi                                                |
| <b>ASSOCIATED DEVICES</b> | NA                                                                            |

**NOTE:**

1. The EUT was operated with following Adapter.

|                       |                       |
|-----------------------|-----------------------|
| <b>Brand No.:</b>     | HIPRO                 |
| <b>Model No.:</b>     | HP-OJ015L6A           |
| <b>Input power :</b>  | 100-240V ~ 50-60Hz 1A |
| <b>Output power :</b> | 5V-3A                 |

2. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11g technology.
3. IEEE 802.11a, 802.11b, and Draft 802.11g Compliant.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

For 802.11b and draft 802.11g: Eleven channels are provided to this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412 MHz  | 7       | 2442 MHz  |
| 2       | 2417 MHz  | 8       | 2447 MHz  |
| 3       | 2422 MHz  | 9       | 2452 MHz  |
| 4       | 2427 MHz  | 10      | 2457 MHz  |
| 5       | 2432 MHz  | 11      | 2462 MHz  |
| 6       | 2437 MHz  |         |           |

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate of 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

For 802.11a: Twelve channels are provided to this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 5180 MHz  | 7       | 5300 MHz  |
| 2       | 5200 MHz  | 8       | 5320 MHz  |
| 3       | 5220 MHz  | 9       | 5745MHz   |
| 4       | 5240 MHz  | 10      | 5765MHz   |
| 5       | 5260 MHz  | 11      | 5785MHz   |
| 6       | 5280 MHz  | 12      | 5805MHz   |

**NOTE:**

1. The EUT allows data rates of up to 54Mbps and was tested at 6Mbps data rate that produced the highest output power.
2. Channel 1, 4, 5, 8, 9 and 12 are the closest frequencies to the band edge, were chosen for final test.



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a Tri-Mode Dualband Wireless Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247),  
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT                  | BRAND  | MODEL NO.  | SERIAL NO.               | FCC ID           |
|-----|--------------------------|--------|------------|--------------------------|------------------|
| 1   | NOTEBOOK                 | Dell   | PP01L      | TW-09C748-12800-19O-B220 | FCC DoC Approved |
| 2   | NOTEBOOK                 | Dell   | PP01L      | TW-09C748-12800-16M-5064 | FCC DoC Approved |
| 3   | USB 10/100 Fast Ethernet | D-Link | DU-E100    | UR15001597               | FCC DoC Approved |
| 4   | FAST ETHERNET PC CARD    | D-Link | DFE-680TXD | RE1A044413               | MQ4FE2K5MX       |
| 5   | PRINTER                  | EPSON  | LQ-300+    | DCGY017096               | FCC DoC Approved |
| 6   | MODEM                    | ACEEX  | 1414       | 980020569                | IFAXDM1414       |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS                                                  |
|-----|------------------------------------------------------------------------------------------------------|
| 1   | NA                                                                                                   |
| 2   | NA                                                                                                   |
| 3   | NA                                                                                                   |
| 4   | NA                                                                                                   |
| 5   | 1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core |
| 6   | 1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.      |

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

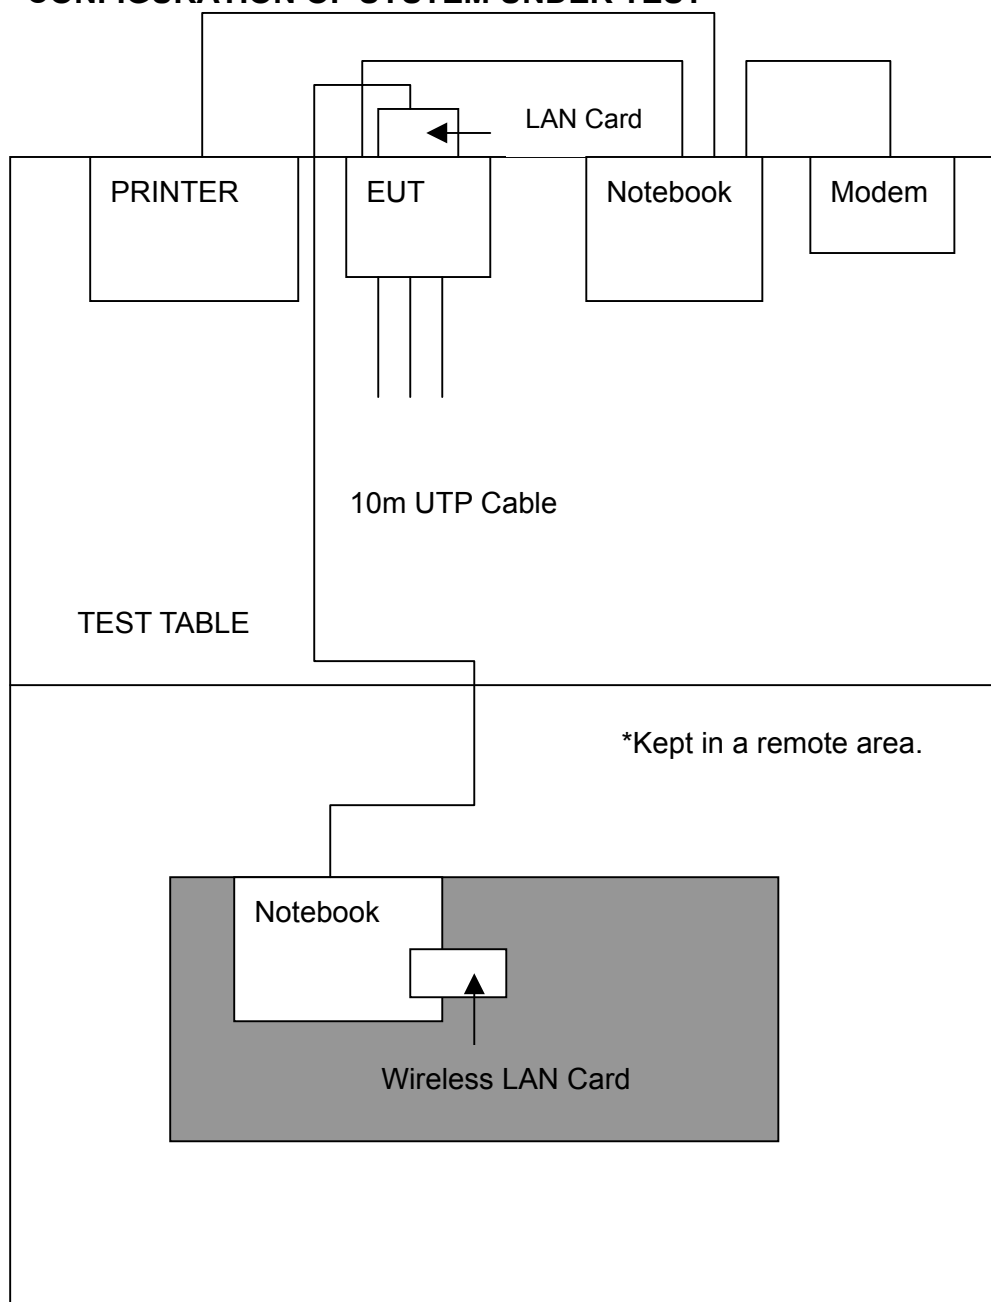

## TEST TYPES AND RESULTS (For Part 802.11B & DRAFT 802.11G)

### 3.6 CONDUCTED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 3.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                         | MODEL NO. | SERIAL NO.   | CALIBRATED UNTIL |
|----------------------------------------------------|-----------|--------------|------------------|
| ROHDE & SCHWARZ Test Receiver                      | ESCS30    | 847793/022   | Mar. 10, 2004    |
| ROHDE & SCHWARZ Artificial Mains Network (for EUT) | ESH2-Z5   | 828075/003   | July 08, 2004    |
| ROHDE & SCHWARZ 200-A Four-line V-Network          | ENV4200   | 830326/018   | Oct. 30, 2003    |
| * ROHDE & SCHWARZ 4-wire ISN                       | ENY41     | 838119/028   | Nov. 29, 2003    |
| * ROHDE & SCHWARZ 2-wire ISN                       | ENY22     | 837497/018   | Nov. 29, 2003    |
| EMCO-L.I.S.N. (for peripheral)                     | 3825/2    | 9003-1627    | July 08, 2004    |
| Software                                           | Cond-V2M3 | NA           | NA               |
| RF cable (JYEBAO)                                  | 5D-FB     | Cable-C05.01 | May. 23, 2004    |
| LYNICS Terminator (For EMCO LISN)                  | 0900510   | E1-01-305    | Feb. 23, 2004    |
| LYNICS Terminator (For EMCO LISN)                  | 0900510   | E1-01-306    | Feb. 23, 2004    |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 5.
  4. The VCCI Site Registration No. is C-1093.




### 3.6.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

### 3.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.6.5 TEST SETUP

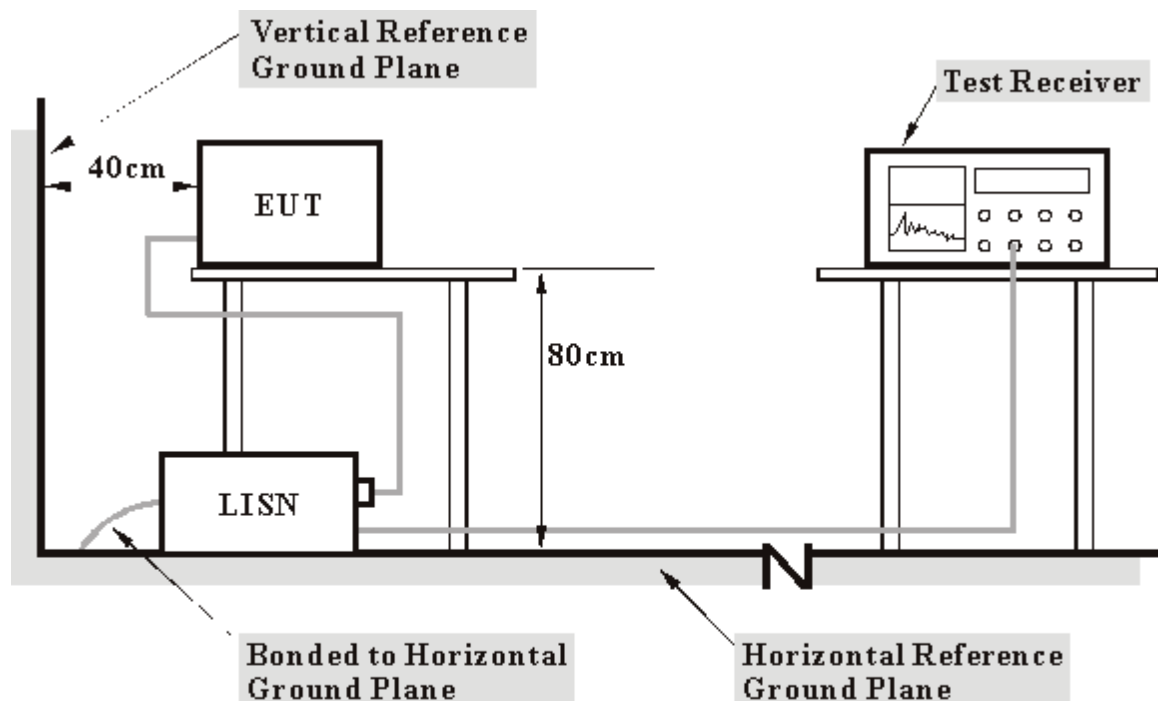

**Note: 1. Support units were connected to second LISN.**

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 3.6.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- The computer system sent data to EUT by command "PIN" via an RJ 45 cable.
- The computer system sent "H" messages to Color Monitor and Monitor displayed "H" patterns on its screen.
- The computer system sent "H" messages to modem.
- The computer system sent "H" messages to printer, and the printer prints them on paper.
- Prepared another computer system to act as a communication partner and placed it outside of testing area.
- The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- The communication partner sent data to EUT by command "PIN".




## 3.6.7 TEST RESULTS

|                                 |                                   |                              |          |
|---------------------------------|-----------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774   |
| <b>MODE</b>                     | Channel 1                         | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |          |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 48.88         | -   | 49.03          | -   | 66.00     | 56.00 | -16.97 | -   |
| 2  | 0.291          | 0.20                    | 35.83         | -   | 36.03          | -   | 60.51     | 50.51 | -24.48 | -   |
| 3  | 0.439          | 0.21                    | 31.25         | -   | 31.46          | -   | 57.08     | 47.08 | -25.62 | -   |
| 4  | 0.861          | 0.28                    | 29.25         | -   | 29.53          | -   | 56.00     | 46.00 | -26.47 | -   |
| 5  | 1.246          | 0.32                    | 26.81         | -   | 27.13          | -   | 56.00     | 46.00 | -28.87 | -   |
| 6  | 3.625          | 0.40                    | 20.19         | -   | 20.59          | -   | 56.00     | 46.00 | -35.41 | -   |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Emission level - Limit value  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

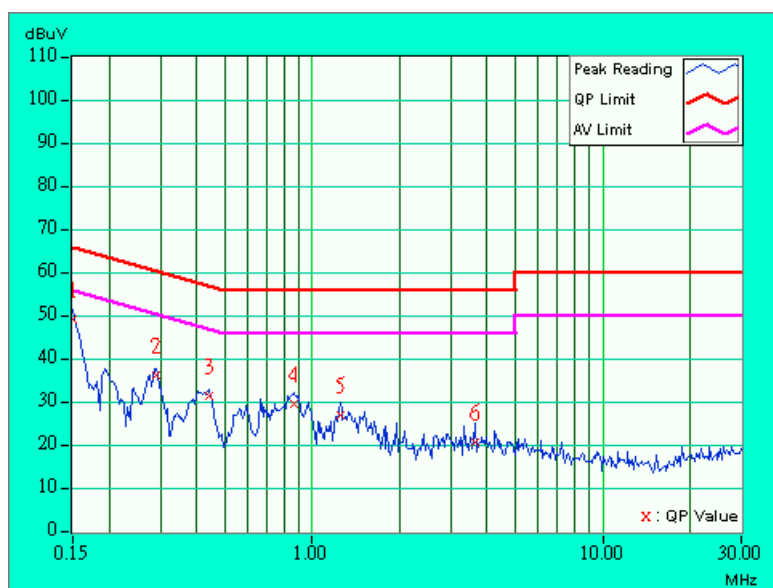

|                                 |                                   |                              |             |
|---------------------------------|-----------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774      |
| <b>MODE</b>                     | Channel 1                         | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |             |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 49.04         | -   | 49.19          | -   | 66.00     | 56.00 | -16.81 | -   |
| 2  | 0.197          | 0.20                    | 38.13         | -   | 38.33          | -   | 63.74     | 53.74 | -25.41 | -   |
| 3  | 0.291          | 0.20                    | 40.40         | -   | 40.60          | -   | 60.51     | 50.51 | -19.91 | -   |
| 4  | 0.439          | 0.21                    | 32.88         | -   | 33.09          | -   | 57.08     | 47.08 | -23.99 | -   |
| 5  | 0.560          | 0.23                    | 32.02         | -   | 32.25          | -   | 56.00     | 46.00 | -23.75 | -   |
| 6  | 0.970          | 0.30                    | 28.73         | -   | 29.03          | -   | 56.00     | 46.00 | -26.97 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

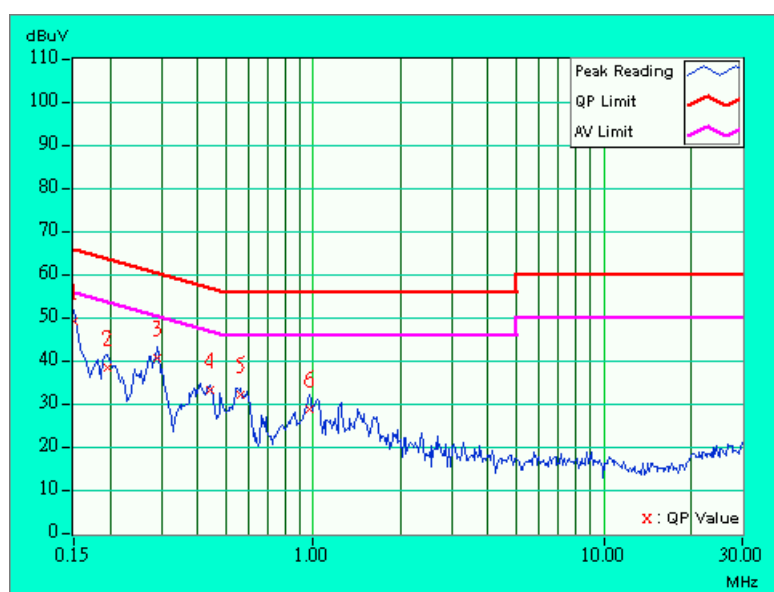

|                                 |                                   |                              |          |
|---------------------------------|-----------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774   |
| <b>MODE</b>                     | Channel 6                         | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |          |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 48.06         | -   | 48.21          | -   | 66.00     | 56.00 | -17.79 | -   |
| 2  | 0.193          | 0.19                    | 34.87         | -   | 35.06          | -   | 63.91     | 53.91 | -28.84 | -   |
| 3  | 0.291          | 0.20                    | 35.56         | -   | 35.76          | -   | 60.51     | 50.51 | -24.75 | -   |
| 4  | 0.435          | 0.21                    | 31.09         | -   | 31.30          | -   | 57.15     | 47.15 | -25.86 | -   |
| 5  | 0.857          | 0.28                    | 29.05         | -   | 29.33          | -   | 56.00     | 46.00 | -26.67 | -   |
| 6  | 1.328          | 0.33                    | 27.56         | -   | 27.89          | -   | 56.00     | 46.00 | -28.11 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

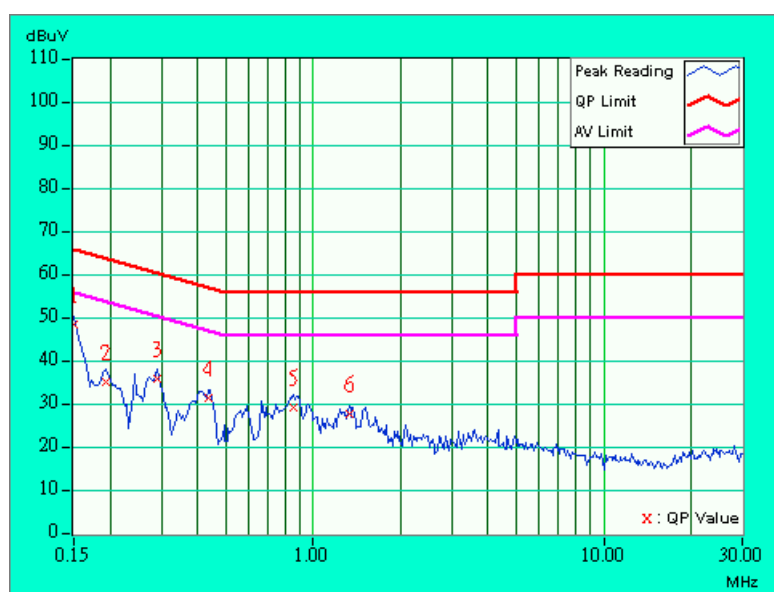

|                                 |                                   |                              |             |
|---------------------------------|-----------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774      |
| <b>MODE</b>                     | Channel 6                         | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |             |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 48.28         | -   | 48.43          | -   | 66.00     | 56.00 | -17.57 | -   |
| 2  | 0.291          | 0.20                    | 40.24         | -   | 40.44          | -   | 60.51     | 50.51 | -20.07 | -   |
| 3  | 0.291          | 0.20                    | 40.20         | -   | 40.40          | -   | 60.51     | 50.51 | -20.11 | -   |
| 4  | 0.412          | 0.20                    | 32.97         | -   | 33.17          | -   | 57.61     | 47.61 | -24.44 | -   |
| 5  | 0.560          | 0.23                    | 32.02         | -   | 32.25          | -   | 56.00     | 46.00 | -23.75 | -   |
| 6  | 0.966          | 0.29                    | 28.41         | -   | 28.70          | -   | 56.00     | 46.00 | -27.30 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

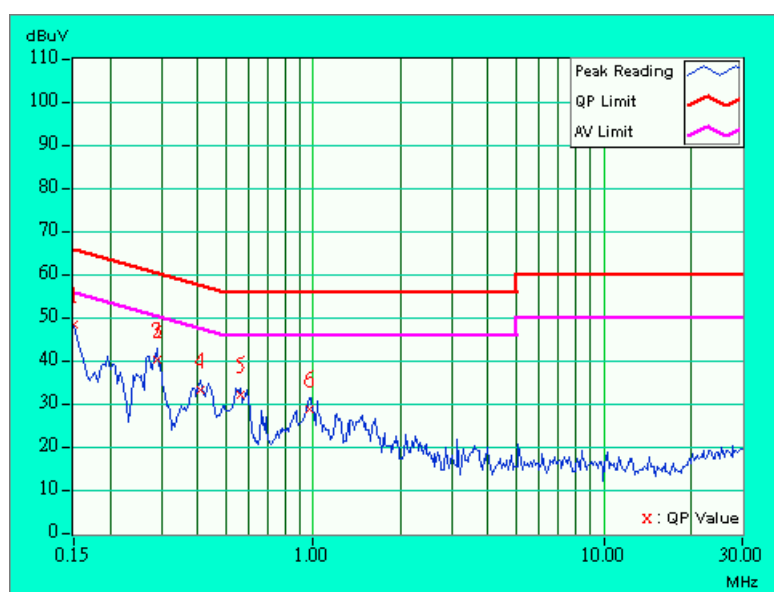

|                                 |                                   |                              |          |
|---------------------------------|-----------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774   |
| <b>MODE</b>                     | Channel 11                        | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |          |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 47.09         | -   | 47.24          | -   | 66.00     | 56.00 | -18.76 | -   |
| 2  | 0.197          | 0.20                    | 34.38         | -   | 34.58          | -   | 63.74     | 53.74 | -29.16 | -   |
| 3  | 0.291          | 0.20                    | 35.46         | -   | 35.66          | -   | 60.51     | 50.51 | -24.85 | -   |
| 4  | 0.408          | 0.20                    | 31.22         | -   | 31.42          | -   | 57.69     | 47.69 | -26.27 | -   |
| 5  | 0.857          | 0.28                    | 28.32         | -   | 28.60          | -   | 56.00     | 46.00 | -27.40 | -   |
| 6  | 1.250          | 0.33                    | 27.42         | -   | 27.75          | -   | 56.00     | 46.00 | -28.25 | -   |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

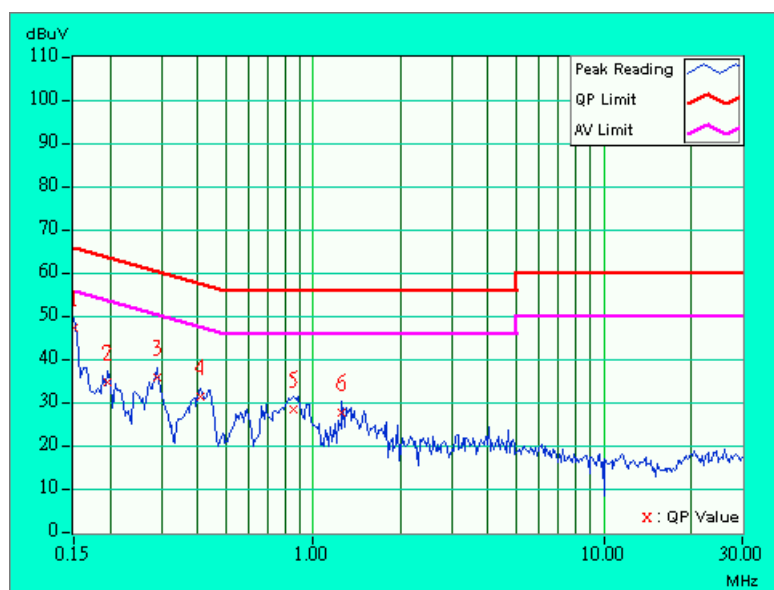

|                                 |                                   |                              |             |
|---------------------------------|-----------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                 | DI-774      |
| <b>MODE</b>                     | Channel 11                        | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 991 hPa          | <b>TESTED BY:</b> Gary Chang |             |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    |                |                         | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |                |                         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.150          | 0.15                    | 47.52         | -   | 47.67          | -   | 66.00     | 56.00 | -18.33 | -   |
| 2  | 0.193          | 0.19                    | 38.17         | -   | 38.36          | -   | 63.91     | 53.91 | -25.54 | -   |
| 3  | 0.291          | 0.20                    | 40.00         | -   | 40.20          | -   | 60.51     | 50.51 | -20.31 | -   |
| 4  | 0.404          | 0.20                    | 32.46         | -   | 32.66          | -   | 57.77     | 47.77 | -25.11 | -   |
| 5  | 0.541          | 0.22                    | 31.00         | -   | 31.22          | -   | 56.00     | 46.00 | -24.78 | -   |
| 6  | 0.986          | 0.30                    | 28.00         | -   | 28.30          | -   | 56.00     | 46.00 | -27.70 | -   |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

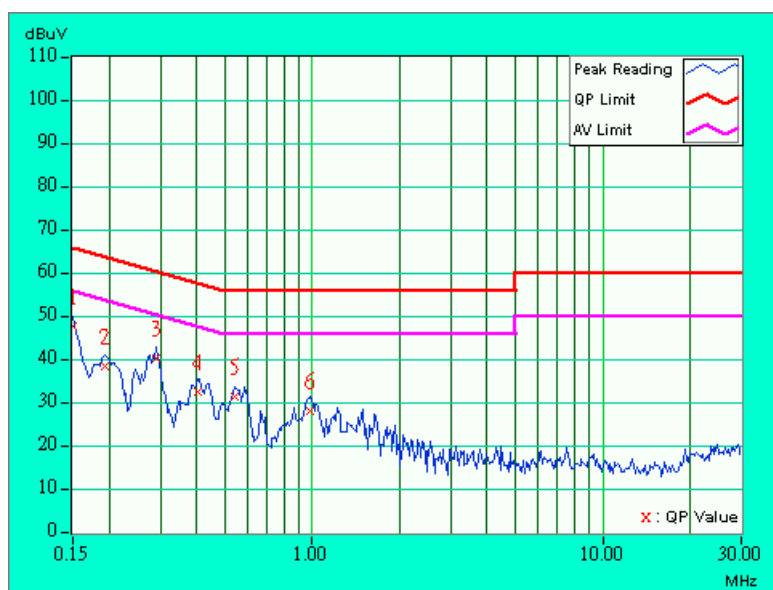



### 3.7 RADIATED EMISSION MEASUREMENT

#### 3.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies<br>(MHz) | Field strength<br>(microvolts/meter) | Measurement distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009-0.490          | 2400/F(kHz)                          | 300                              |
| 0.490-1.705          | 24000/F(kHz)                         | 30                               |
| 1.705-30.0           | 30                                   | 30                               |
| 30-88                | 100                                  | 3                                |
| 88-216               | 150                                  | 3                                |
| 216-960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 3.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER             | MODEL NO.          | SERIAL NO.               | CALIBRATED UNTIL |
|----------------------------------------|--------------------|--------------------------|------------------|
| *HP Spectrum Analyzer                  | 8590L              | 3520A00667               | Aug. 26, 2003    |
| *CHASE Preamplifier                    | CPA9231A/4         | 3215                     | Nov. 06, 2003    |
| * HP Preamplifier                      | 8449B              | 3008A01201               | Dec. 01, 2003    |
| * HP Preamplifier                      | 8449B              | 3008A01292               | Aug. 13, 2004    |
| * ROHDE & SCHWARZ TEST RECEIVER        | ESVS10             | 846285/012               | Sept. 16, 2003   |
| * ROHDE & SCHWARZ TEST RECEIVER        | ESMI               | 839013/007<br>839379/002 | Feb. 13, 2004    |
| SCHAFFNER Tunable Dipole Antenna       | VHBA 9123          | 459                      | Nov. 22, 2003    |
| SCHWARZBECK Tunable Dipole Antenna     | UHA 9105           | 977                      |                  |
| * CHASE BILOG Antenna                  | CBL6112B           | 2751                     | March 21, 2004   |
| * SCHWARZBECK Horn Antenna             | BBHA9120-D1        | D130                     | June 30, 2004    |
| * EMCO Horn Antenna                    | 3115               | 9312-4192                | Mar. 23 2004     |
| * CHANCE Turn Table & Tower Controller | ACS-I              | NA                       | NA               |
| * Software                             | ADT_Radiated_V5.14 | NA                       | NA               |
| * ANRITSU RF Switches                  | MP59B              | M51167                   | Aug. 16, 2004    |
| * TIMES RF cable                       | LMR-600            | CABLE-ST6-01             | Aug. 20, 2004    |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 6.
5. The VCCI Site Registration No. is R-728.



| DESCRIPTION & MANUFACTURER         | MODEL NO.          | SERIAL NO.               | CALIBRATED UNTIL |
|------------------------------------|--------------------|--------------------------|------------------|
| * HP Spectrum Analyzer             | 8590L              | 3544A01176               | Jun. 10, 2004    |
| * HP Preamplifier                  | 8447D              | 2944A08485               | May. 01, 2004    |
| * HP Preamplifier                  | 8449B              | 3008A01201               | Dec. 01, 2003    |
| * HP Preamplifier                  | 8449B              | 3008A01292               | Aug. 13, 2004    |
| ROHDE & SCHWARZ TEST RECEIVER      | ESI7               | 838496/016               | Feb. 23, 2004    |
| * ROHDE & SCHWARZ TEST RECEIVER    | ESMI               | 839013/007<br>839379/002 | Feb. 13, 2004    |
| SCHAFFNER Tunable Dipole Antenna   | VHBA 9123          | 459                      | Nov. 22, 2003    |
| SCHWARZBECK Tunable Dipole Antenna | UHA 9105           | 977                      |                  |
| * CHASE BILOG Antenna              | CBL6112A           | 2221                     | July 26, 2004    |
| * SCHWARZBECK Horn Antenna         | BBHA9120-D1        | D130                     | Jun 30, 2004     |
| * EMCO Horn Antenna                | 3115               | 9312-4192                | Mar. 23 2004     |
| * EMCO Turn Table                  | 1060               | 1115                     | NA               |
| * CHANCE Tower                     | CM-AT40            | CM-A010                  | NA               |
| * Software                         | ADT_Radiated_V5.14 | NA                       | NA               |
| * ANRITSU RF Switches              | MP59B              | M35046                   | Jan. 05. 2004    |
| * TIMES RF cable                   | LMR-600            | CABLE-ST5-01             | Jan. 05. 2004    |

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "\*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



### 3.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

### 3.7.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.7.5 TEST SETUP

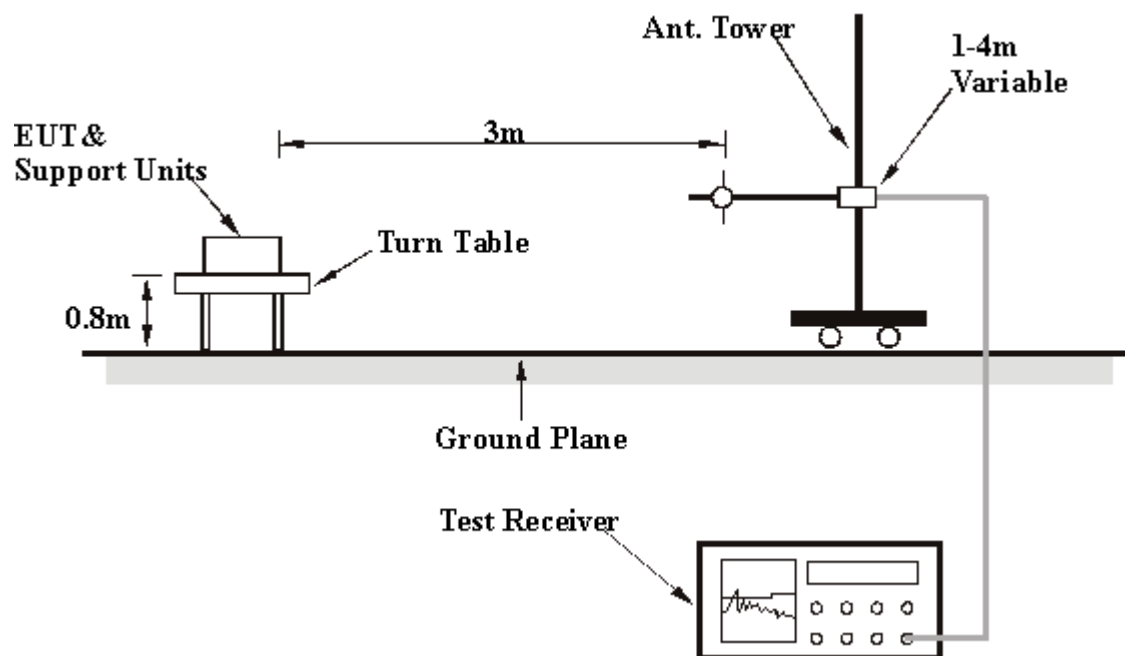

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 3.7.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 3.7.7 TEST RESULTS

|                                 |                                   |                          |                |
|---------------------------------|-----------------------------------|--------------------------|----------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774         |
| <b>MODE</b>                     | Channel 11                        | <b>FREQUENCY RANGE</b>   | Below 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 55%RH, 991 hPa          | <b>TEST MODE</b>         | CCK & OFDM     |
| <b>TESTED BY</b>                | Steven Lu                         |                          |                |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 86.04       | 25.2 QP                 | 40.00          | -14.80      | 2.00 H             | 172                  | 15.80            | 9.40                     |
| 2   | 250.94      | 37.8 QP                 | 46.00          | -8.20       | 1.25 H             | 172                  | 24.40            | 13.40                    |
| 3   | 270.34      | 34.7 QP                 | 46.00          | -11.30      | 1.25 H             | 136                  | 20.50            | 14.10                    |
| 4   | 351.18      | 35.3 QP                 | 46.00          | -10.70      | 1.25 H             | 154                  | 18.80            | 16.50                    |
| 5   | 375.97      | 34.7 QP                 | 46.00          | -11.30      | 1.00 H             | 88                   | 17.60            | 17.10                    |
| 6   | 451.41      | 36.8 QP                 | 46.00          | -9.20       | 2.00 H             | 190                  | 17.50            | 19.30                    |
| 7   | 500.99      | 37.3 QP                 | 46.00          | -8.70       | 1.00 H             | 178                  | 17.30            | 20.00                    |
| 8   | 631.40      | 37.8 QP                 | 46.00          | -8.20       | 1.25 H             | 124                  | 14.80            | 23.00                    |
| 9   | 641.10      | 35.4 QP                 | 46.00          | -10.60      | 1.25 H             | 148                  | 12.30            | 23.10                    |
| 10  | 720.86      | 33.7 QP                 | 46.00          | -12.30      | 1.75 H             | 190                  | 9.20             | 24.60                    |
| 11  | 760.73      | 32.5 QP                 | 46.00          | -13.50      | 1.00 H             | 154                  | 7.10             | 25.40                    |
| 12  | 811.39      | 36.9 QP                 | 46.00          | -9.10       | 2.00 H             | 166                  | 11.20            | 25.70                    |
| 13  | 841.57      | 30.3 QP                 | 46.00          | -15.70      | 1.00 H             | 118                  | 4.30             | 26.10                    |
| 14  | 900.84      | 35.6 QP                 | 46.00          | -10.40      | 1.00 H             | 130                  | 8.40             | 27.10                    |
| 15  | 991.38      | 35.8 QP                 | 54.00          | -18.20      | 1.00 H             | 280                  | 7.90             | 27.90                    |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                   |                          |                |
|---------------------------------|-----------------------------------|--------------------------|----------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774         |
| <b>MODE</b>                     | Channel 11                        | <b>FREQUENCY RANGE</b>   | Below 1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Quasi-Peak     |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 55%RH, 991 hPa          | <b>TEST MODE</b>         | CCK & OFDM     |
| <b>TESTED BY</b>                | Steven Lu                         |                          |                |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b> |             |                         |                |             |                    |                      |                  |                          |
|--------------------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No.                                                          | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1                                                            | 39.70       | 38.4 QP                 | 40.00          | -1.60       | 1.00 V             | 190                  | 24.10            | 14.30                    |
| 2                                                            | 86.04       | 36.2 QP                 | 40.00          | -3.80       | 1.50 V             | 136                  | 26.80            | 9.40                     |
| 3                                                            | 142.09      | 33.7 QP                 | 43.50          | -9.80       | 1.00 V             | 142                  | 19.80            | 13.80                    |
| 4                                                            | 250.94      | 37.7 QP                 | 46.00          | -8.30       | 1.00 V             | 52                   | 24.30            | 13.40                    |
| 5                                                            | 270.34      | 34.8 QP                 | 46.00          | -11.20      | 1.75 V             | 184                  | 20.60            | 14.10                    |
| 6                                                            | 351.18      | 37.0 QP                 | 46.00          | -9.00       | 1.00 V             | 166                  | 20.60            | 16.50                    |
| 7                                                            | 375.97      | 35.6 QP                 | 46.00          | -10.40      | 1.00 V             | 184                  | 18.50            | 17.10                    |
| 8                                                            | 451.41      | 38.3 QP                 | 46.00          | -7.70       | 1.25 V             | 268                  | 19.00            | 19.30                    |
| 9                                                            | 500.99      | 36.4 QP                 | 46.00          | -9.60       | 1.00 V             | 112                  | 16.40            | 20.00                    |
| 10                                                           | 631.40      | 39.3 QP                 | 46.00          | -6.70       | 1.00 V             | 82                   | 16.20            | 23.00                    |
| 11                                                           | 641.10      | 35.9 QP                 | 46.00          | -10.10      | 1.00 V             | 214                  | 12.70            | 23.10                    |
| 12                                                           | 720.86      | 36.8 QP                 | 46.00          | -9.20       | 1.00 V             | 286                  | 12.30            | 24.60                    |
| 13                                                           | 811.39      | 40.4 QP                 | 46.00          | -5.60       | 1.25 V             | 238                  | 14.60            | 25.70                    |
| 14                                                           | 900.84      | 36.1 QP                 | 46.00          | -9.90       | 1.25 V             | 136                  | 9.00             | 27.10                    |
| 15                                                           | 991.38      | 38.3 QP                 | 54.00          | -15.70      | 1.00 V             | 118                  | 10.40            | 27.90                    |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 1                         | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | CCK                      |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2412.00    | 101.8 PK                |                |             | 1.71 H             | 334                  | 72.20            | 29.70                    |
| 1   | *2412.00    | 96.1 AV                 |                |             | 1.71 H             | 334                  | 66.40            | 29.70                    |
| 2   | 4824.00     | 48.5 PK                 | 74.00          | -25.50      | 1.15 H             | 34                   | 13.20            | 35.30                    |
| 3   | 7236.00     | 52.3 PK                 | 74.00          | -21.70      | 1.09 H             | 97                   | 11.20            | 41.10                    |
| 3   | 7236.00     | 40.0 AV                 | 54.00          | -14.00      | 1.09 H             | 97                   | -1.10            | 41.10                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 2389.00     | 55.70 PK                | 74.00          | -18.30      | 1.59 V             | 107                  | 26.10            | 29.60                    |
| 1   | 2389.00     | 48.60 AV                | 54.00          | -5.40       | 1.59 V             | 107                  | 19.00            | 29.60                    |
| 2   | *2412.00    | 113.0 PK                |                |             | 1.59 V             | 107                  | 83.40            | 29.70                    |
| 2   | *2412.00    | 105.9 AV                |                |             | 1.59 V             | 107                  | 76.30            | 29.70                    |
| 3   | 4824.00     | 51.6 PK                 | 74.00          | -22.40      | 1.69 V             | 237                  | 16.40            | 35.30                    |
| 3   | 4824.00     | 41.2 AV                 | 54.00          | -12.80      | 1.69 V             | 237                  | 5.90             | 35.30                    |
| 4   | 7236.00     | 53.4 PK                 | 74.00          | -20.60      | 1.38 V             | 264                  | 12.30            | 41.10                    |
| 4   | 7236.00     | 46.9 AV                 | 54.00          | -7.10       | 1.38 V             | 264                  | 5.80             | 41.10                    |

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency

|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 6                         | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | CCK                      |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 104.5 PK                |                |             | 1.01 H             | 268                  | 74.80            | 29.70                    |
| 1   | *2437.00    | 96.9 AV                 |                |             | 1.01 H             | 268                  | 67.20            | 29.70                    |
| 2   | 4874.00     | 47.9 PK                 | 74.00          | -26.10      | 1.51 H             | 34                   | 12.40            | 35.50                    |
| 3   | 7310.00     | 51.0 PK                 | 74.00          | -23.00      | 1.31 H             | 24                   | 9.80             | 41.30                    |
| 3   | 7310.00     | 40.1 AV                 | 54.00          | -13.90      | 1.31 H             | 24                   | -1.10            | 41.30                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 112.7 PK                |                |             | 1.02 V             | 12                   | 83.00            | 29.70                    |
| 1   | *2437.00    | 105.7 AV                |                |             | 1.02 V             | 12                   | 76.00            | 29.70                    |
| 2   | 4874.00     | 53.2 PK                 | 74.00          | -20.80      | 1.08 V             | 124                  | 17.70            | 35.50                    |
| 2   | 4874.00     | 41.5 AV                 | 54.00          | -12.50      | 1.08 V             | 124                  | 6.00             | 35.50                    |
| 3   | 7311.00     | 55.9 PK                 | 74.00          | -18.10      | 1.51 V             | 227                  | 14.70            | 41.30                    |
| 3   | 7311.00     | 45.9 AV                 | 54.00          | -8.10       | 1.51 V             | 227                  | 4.70             | 41.30                    |

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency



|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 11                        | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | CCK                      |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2462.00    | 102.6 PK                |                |             | 1.68 H             | 91                   | 72.80            | 29.80                    |
| 1   | *2462.00    | 96.2 AV                 |                |             | 1.68 H             | 91                   | 66.40            | 29.80                    |
| 2   | 4924.00     | 47.0 PK                 | 74.00          | -27.00      | 1.13 H             | 64                   | 11.30            | 35.70                    |
| 3   | 7386.00     | 48.9 PK                 | 74.00          | -25.10      | 1.66 H             | 95                   | 7.40             | 41.50                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2462.00    | 112.1 PK                |                |             | 1.75 V             | 24                   | 82.20            | 29.80                    |
| 1   | *2462.00    | 104.9 AV                |                |             | 1.75 V             | 24                   | 75.00            | 29.80                    |
| 2   | 2483.50     | 55.0 PK                 | 74.00          | -19.00      | 1.75 V             | 24                   | 25.10            | 29.90                    |
| 2   | 2483.50     | 47.8 AV                 | 54.00          | -6.20       | 1.75 V             | 24                   | 17.90            | 29.90                    |
| 3   | 4924.00     | 50.4 PK                 | 74.00          | -23.60      | 1.41 V             | 134                  | 14.70            | 35.70                    |
| 4   | 7386.00     | 55.2 PK                 | 74.00          | -18.80      | 1.29 V             | 45                   | 13.70            | 41.50                    |
| 4   | 7386.00     | 44.1 AV                 | 54.00          | -9.90       | 1.29 V             | 45                   | 2.60             | 41.50                    |
| 5   | 9848.00     | 54.0 PK                 | 74.00          | -20.00      | 1.14 V             | 34                   | 10.30            | 43.80                    |
| 5   | 9848.00     | 44.8 AV                 | 54.00          | -9.20       | 1.14 V             | 34                   | 1.10             | 43.80                    |

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency



|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 1                         | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | OFDM                     |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2412.00    | 99.7 PK                 |                |             | 1.92 H             | 150                  | 70.00            | 29.70                    |
| 1   | *2412.00    | 90.7 AV                 |                |             | 1.92 H             | 150                  | 61.00            | 29.70                    |
| 2   | 4824.00     | 45.0 PK                 | 74.00          | -29.00      | 1.11 H             | 254                  | 9.70             | 35.30                    |
| 3   | 7236.00     | 52.6 PK                 | 74.00          | -21.40      | 1.21 H             | 78                   | 11.50            | 41.10                    |
| 3   | 7236.00     | 39.2 AV                 | 54.00          | -14.80      | 1.21 H             | 78                   | -1.90            | 41.10                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 2389.00     | 59.2 PK                 | 74.00          | -14.80      | 1.11 V             | 282                  | 29.60            | 29.60                    |
| 1   | 2389.00     | 50.7 AV                 | 54.00          | -3.30       | 1.11 V             | 282                  | 21.10            | 29.60                    |
| 2   | *2412.00    | 109.5 PK                |                |             | 1.50 V             | 260                  | 79.80            | 29.70                    |
| 2   | *2412.00    | 101.0 AV                |                |             | 1.50 V             | 260                  | 71.30            | 29.70                    |
| 3   | 4824.00     | 45.6 PK                 | 74.00          | -28.40      | 1.37 V             | 195                  | 10.30            | 35.30                    |
| 4   | 7236.00     | 58.0 PK                 | 74.00          | -16.00      | 1.24 V             | 184                  | 16.90            | 41.10                    |
| 4   | 7236.00     | 40.0 AV                 | 54.00          | -14.00      | 1.24 V             | 184                  | -1.10            | 41.10                    |

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency

|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 6                         | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | OFDM                     |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 103.5 PK                |                |             | 1.41 H             | 324                  | 73.70            | 29.70                    |
| 1   | *2437.00    | 94.2 AV                 |                |             | 1.41 H             | 324                  | 64.40            | 29.70                    |
| 2   | 4874.00     | 45.4 PK                 | 74.00          | -28.60      | 1.27 H             | 24                   | 9.90             | 35.50                    |
| 3   | 7311.00     | 60.0 PK                 | 74.00          | -14.00      | 1.18 H             | 18                   | 18.80            | 41.30                    |
| 3   | 7311.00     | 44.1 AV                 | 54.00          | -9.90       | 1.18 H             | 18                   | 2.90             | 41.30                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2437.00    | 113.0 PK                |                |             | 1.07 V             | 303                  | 83.30            | 29.70                    |
| 1   | *2437.00    | 104.3 AV                |                |             | 1.07 V             | 303                  | 74.60            | 29.70                    |
| 2   | 4874.00     | 49.6 PK                 | 74.00          | -24.40      | 1.41 V             | 312                  | 14.10            | 35.50                    |
| 3   | 7311.00     | 65.0 PK                 | 74.00          | -9.00       | 1.47 V             | 53                   | 23.80            | 41.30                    |
| 3   | 7311.00     | 49.4 AV                 | 54.00          | -4.60       | 1.47 V             | 53                   | 8.10             | 41.30                    |

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency

|                                 |                                   |                          |                          |
|---------------------------------|-----------------------------------|--------------------------|--------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband Wireless Router | <b>MODEL</b>             | DI-774                   |
| <b>MODE</b>                     | Channel 11                        | <b>FREQUENCY RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                      | <b>DETECTOR FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>991 hPa       | <b>TEST MODE</b>         | OFDM                     |
| <b>TESTED BY</b>                | Gary Chang                        |                          |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2462.00    | 101.5 PK                |                |             | 1.11 H             | 282                  | 71.70            | 29.80                    |
| 1   | *2462.00    | 91.6 AV                 |                |             | 1.11 H             | 282                  | 61.80            | 29.80                    |
| 2   | 4924.00     | 46.4 PK                 | 74.00          | -27.60      | 1.52 H             | 54                   | 10.70            | 35.70                    |
| 3   | 7386.00     | 51.3 PK                 | 74.00          | -22.70      | 1.17 H             | 52                   | 9.80             | 41.50                    |
| 3   | 7386.00     | 39.5 AV                 | 54.00          | -14.50      | 1.17 H             | 52                   | -2.00            | 41.50                    |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2462.00    | 109.2 PK                |                |             | 1.09 V             | 301                  | 79.40            | 29.80                    |
| 1   | *2462.00    | 100.2 AV                |                |             | 1.09 V             | 301                  | 70.40            | 29.80                    |
| 2   | 2483.50     | 60.6 PK                 | 74.00          | -13.40      | 1.09 V             | 301                  | 30.70            | 29.90                    |
| 2   | 2483.50     | 51.6 AV                 | 54.00          | -2.40       | 1.09 V             | 301                  | 21.70            | 29.90                    |
| 3   | 4924.00     | 46.6 PK                 | 74.00          | -27.40      | 1.47 V             | 1                    | 10.90            | 35.70                    |
| 4   | 7384.00     | 54.3 PK                 | 74.00          | -19.70      | 1.34 V             | 86                   | 12.80            | 41.50                    |
| 4   | 7384.00     | 40.1 AV                 | 54.00          | -13.90      | 1.34 V             | 86                   | -1.40            | 41.50                    |

#### REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency



### 3.8 6dB BANDWIDTH MEASUREMENT

#### 3.8.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 3.8.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2004    |

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

### 3.8.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.8.5 TEST SETUP



### 3.8.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 3.8.7 TEST RESULTS

|                             |                                   |                                 |                         |
|-----------------------------|-----------------------------------|---------------------------------|-------------------------|
| <b>EUT</b>                  | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                    | DI-774                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                      | <b>ENVIRONMENTAL CONDITIONS</b> | 24deg. C, 64RH, 991 hPa |
| <b>TEST MODE</b>            | CCK                               | <b>TESTED BY</b>                | Cody Chang              |


| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>6dB BANDWIDTH (MHz)</b> | <b>MINIMUM LIMIT (MHz)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|----------------------------|----------------------------|------------------|
| 1              | 2412                           | 11.76                      | 0.5                        | PASS             |
| 6              | 2437                           | 10.88                      | 0.5                        | PASS             |
| 11             | 2462                           | 11.04                      | 0.5                        | PASS             |



CH1

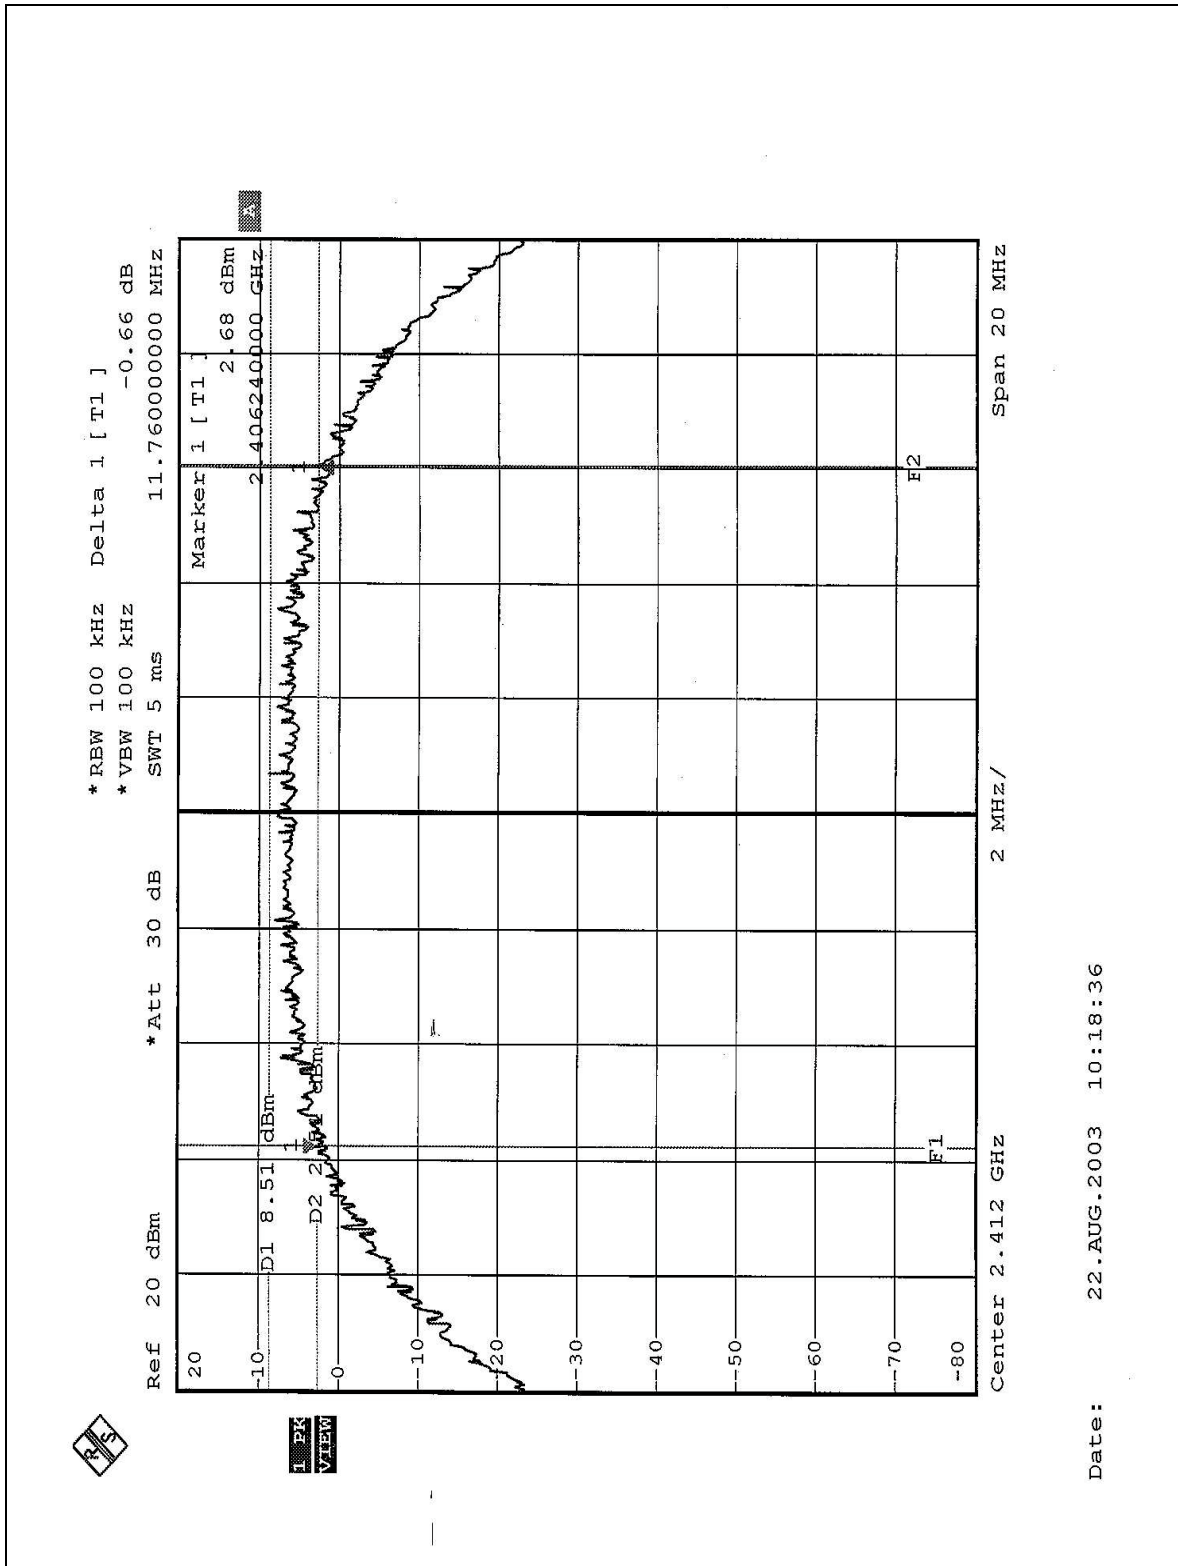


CH6

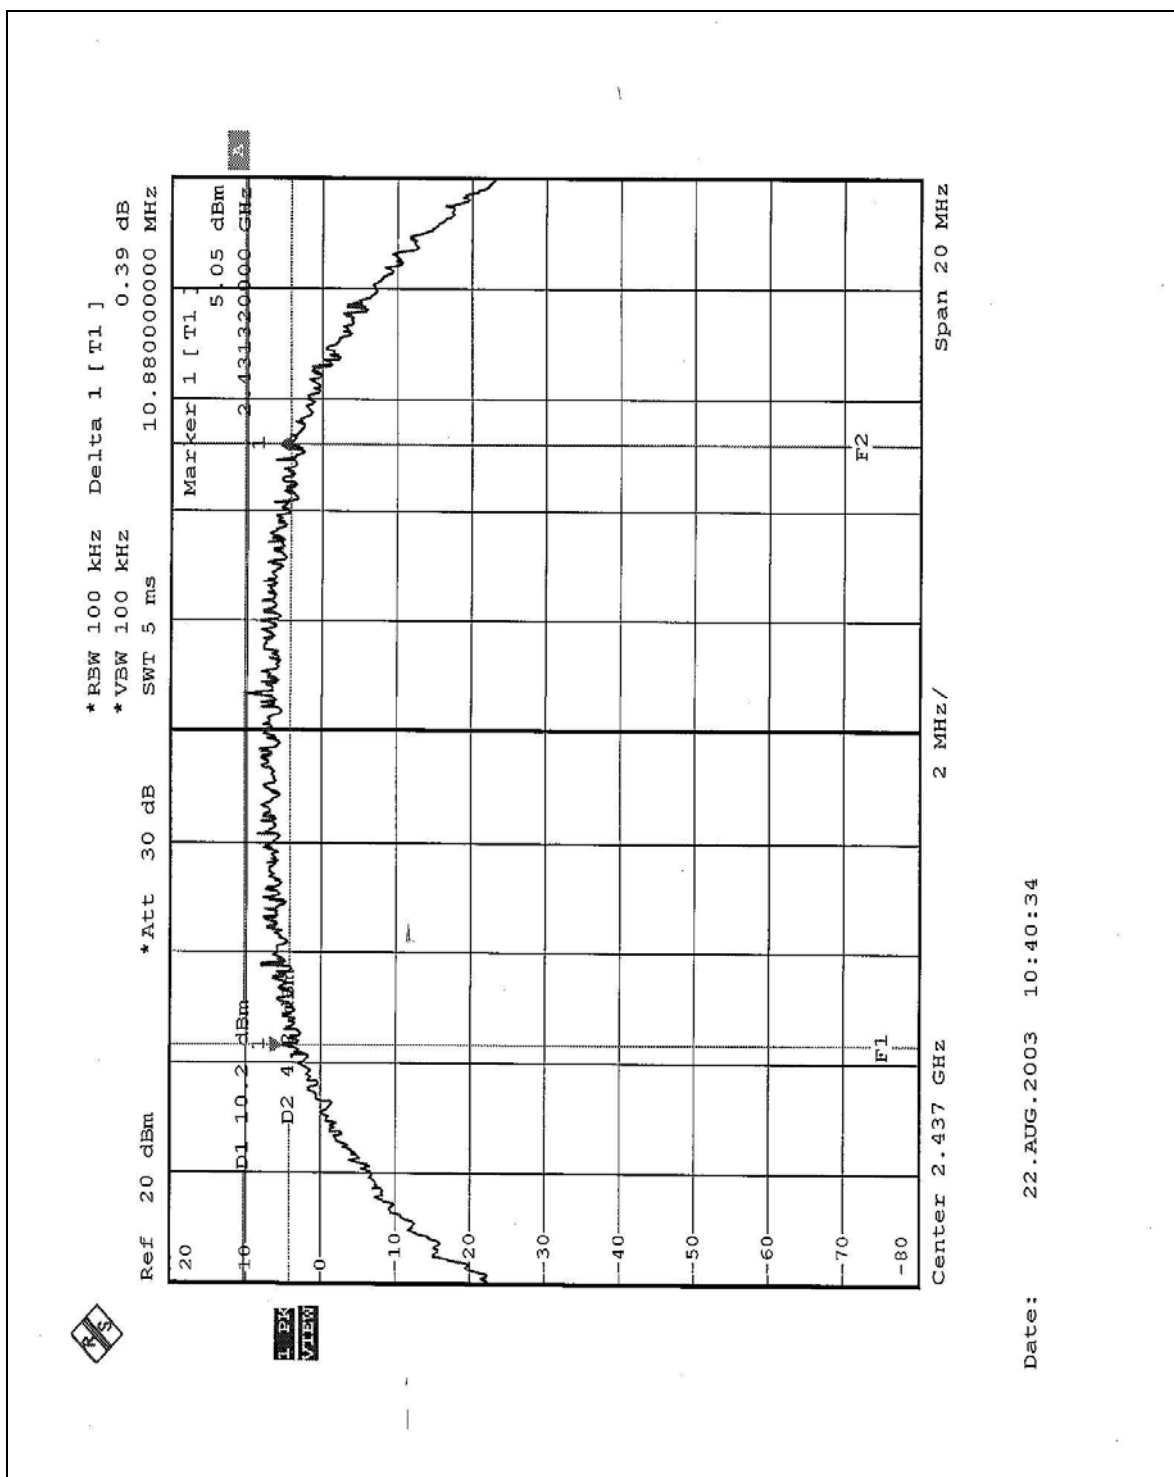



CH11

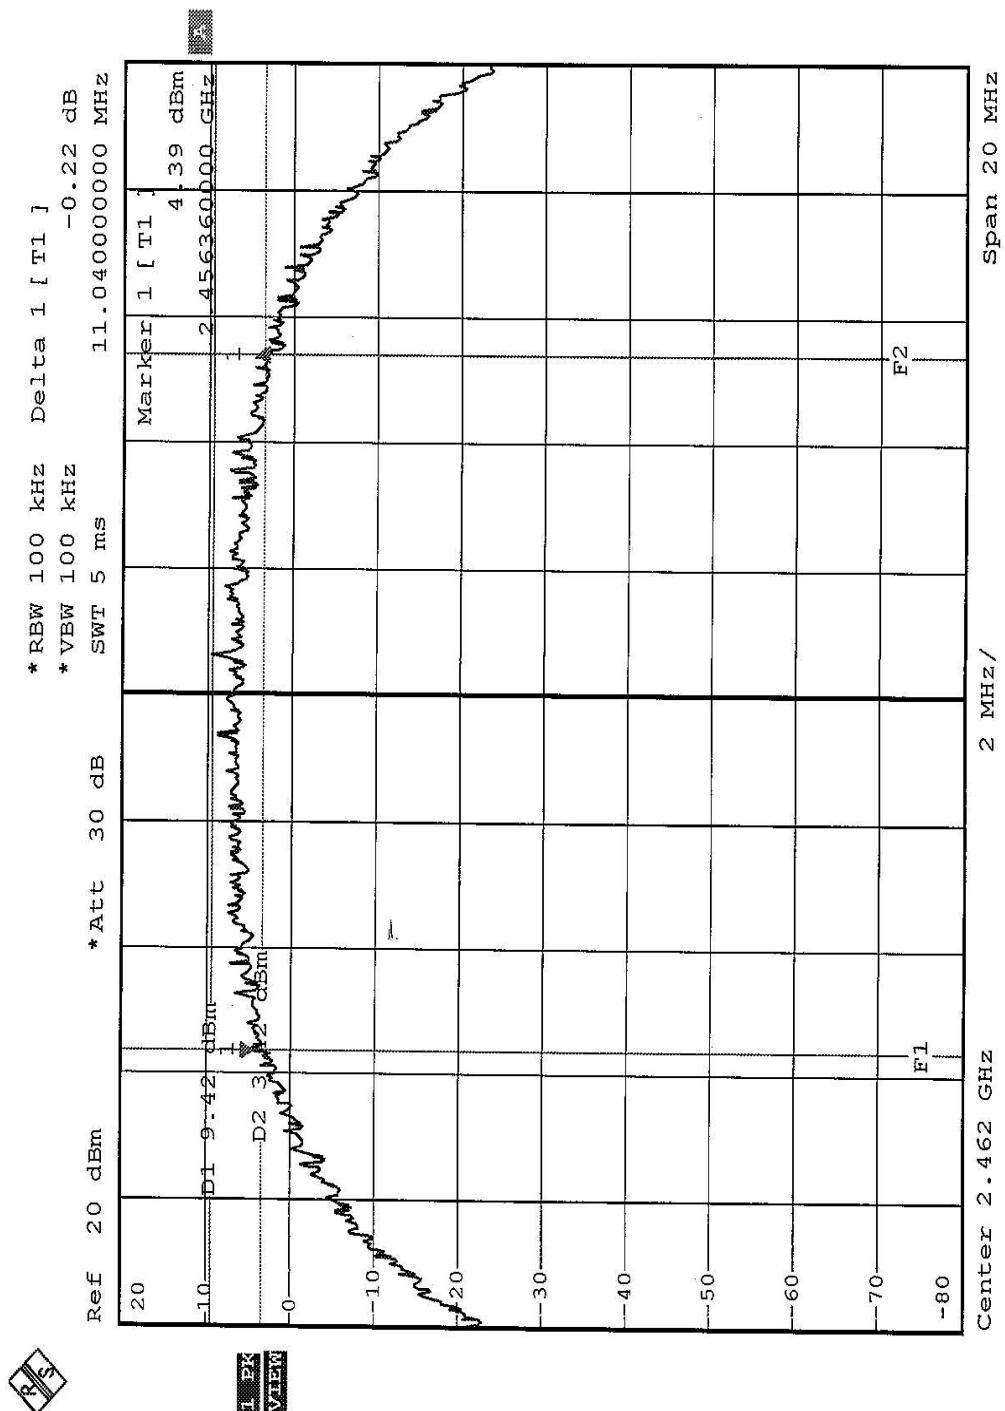


Date: 22.AUG.2003 10:44:08



|                             |                                   |                                 |                         |
|-----------------------------|-----------------------------------|---------------------------------|-------------------------|
| <b>EUT</b>                  | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                    | DI-774                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                      | <b>ENVIRONMENTAL CONDITIONS</b> | 24deg. C, 64RH, 991 hPa |
| <b>TEST MODE</b>            | OFDM                              | <b>TESTED BY</b>                | Cody Chang              |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>6dB BANDWIDTH (MHz)</b> | <b>MINIMUM LIMIT (MHz)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|----------------------------|----------------------------|------------------|
| 1              | 2412                           | 16.36                      | 0.5                        | PASS             |
| 6              | 2437                           | 16.36                      | 0.5                        | PASS             |
| 11             | 2462                           | 16.44                      | 0.5                        | PASS             |


CH1

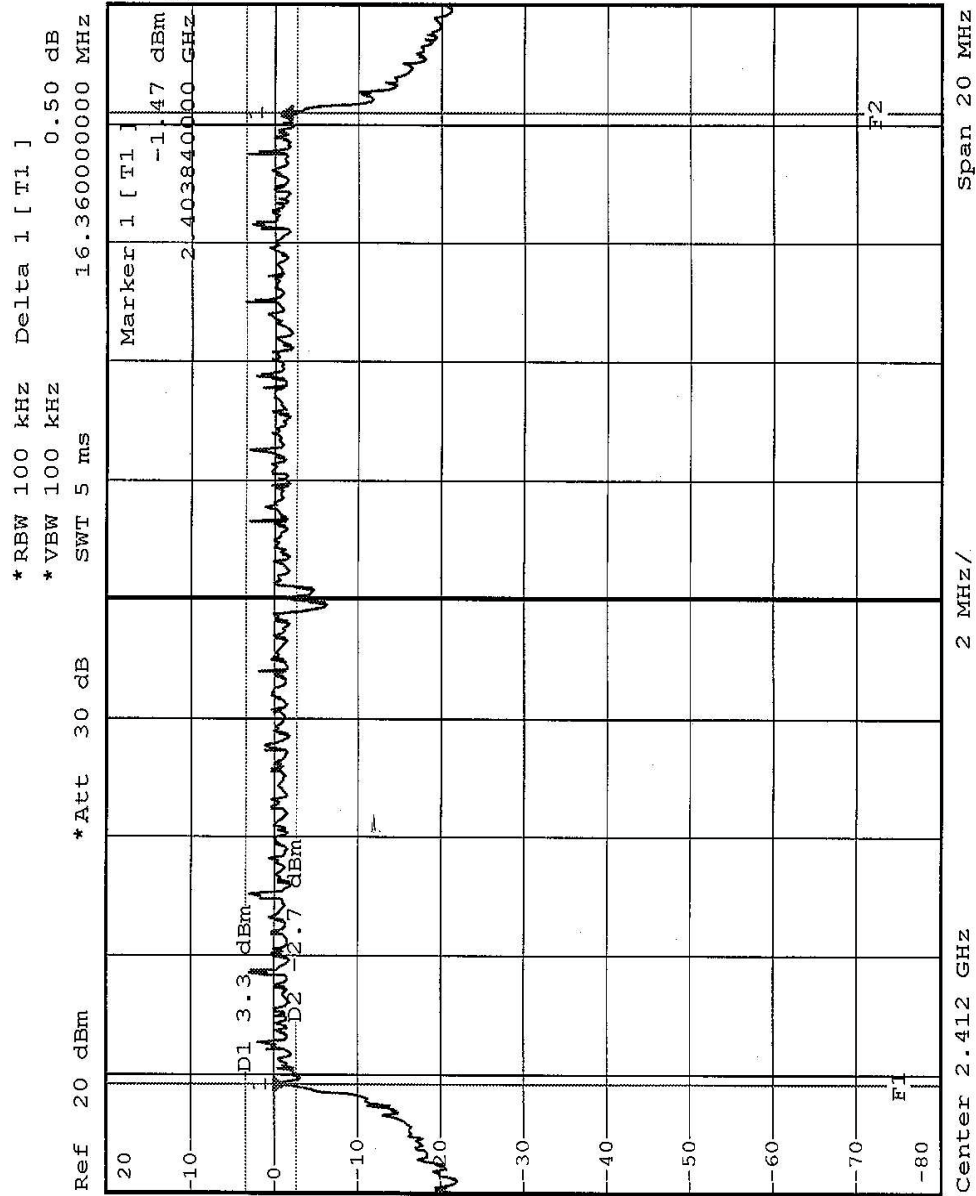


Date: 22.AUG.2003 11:13:50



CH6

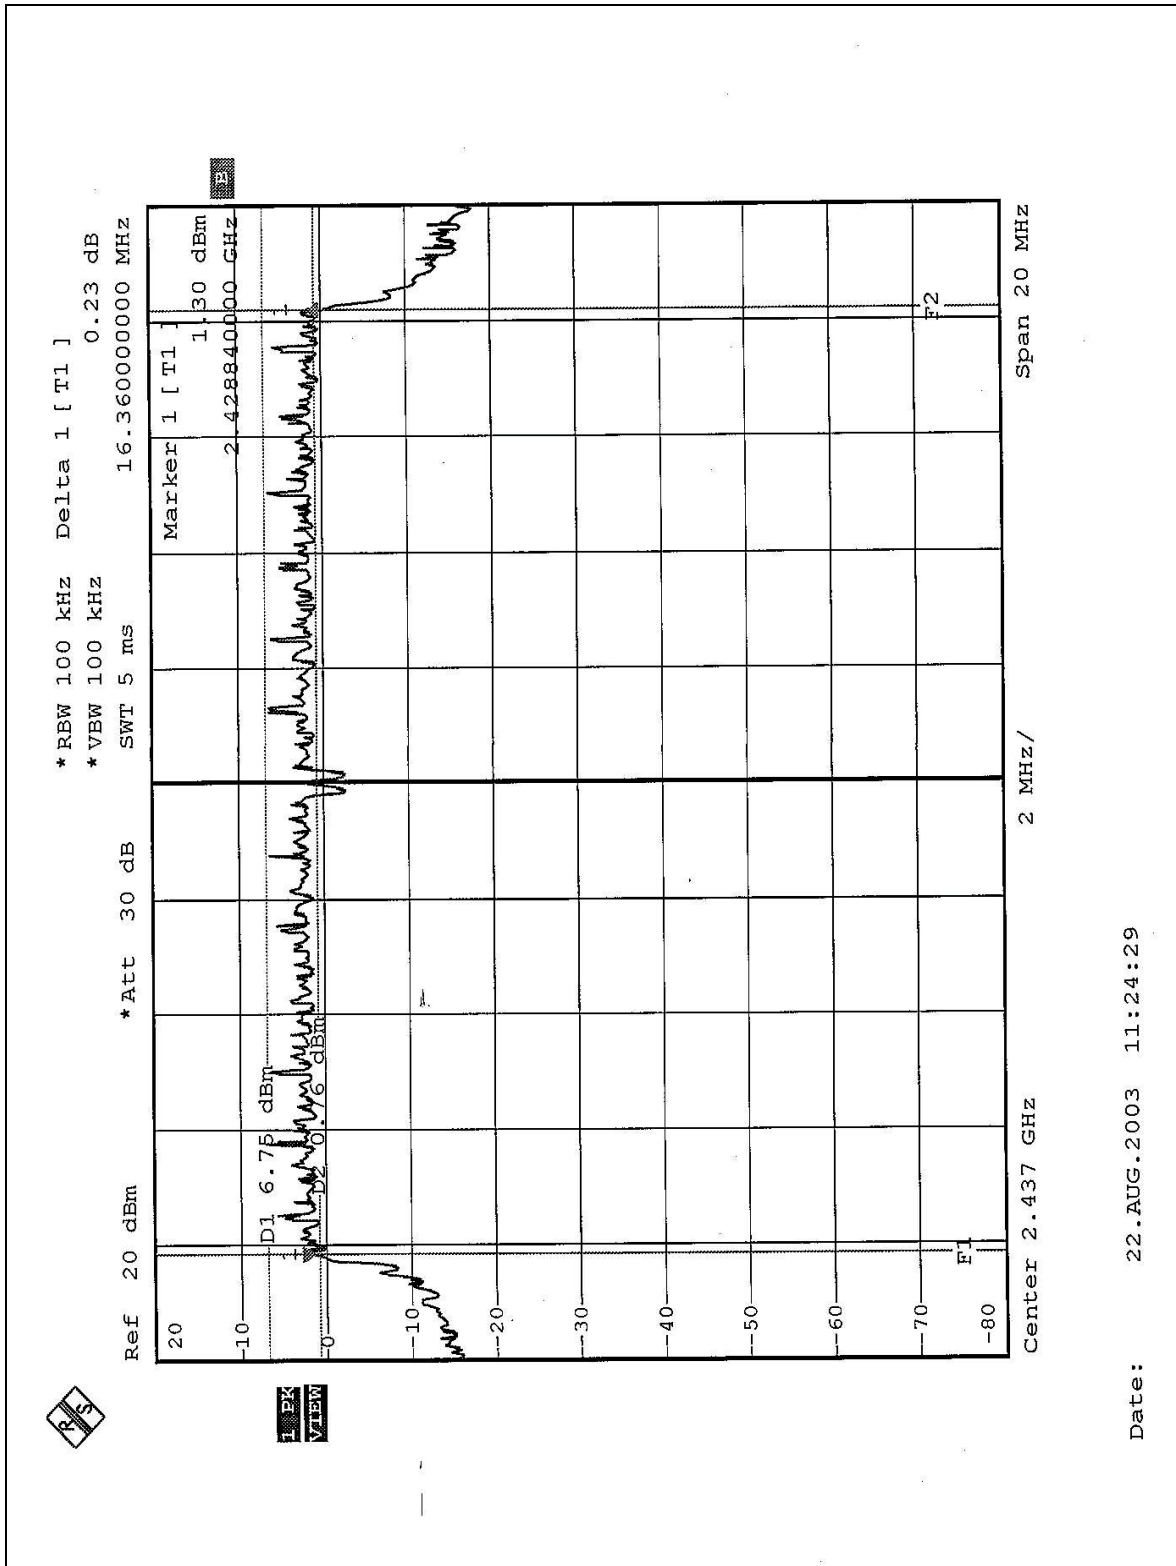

CH11

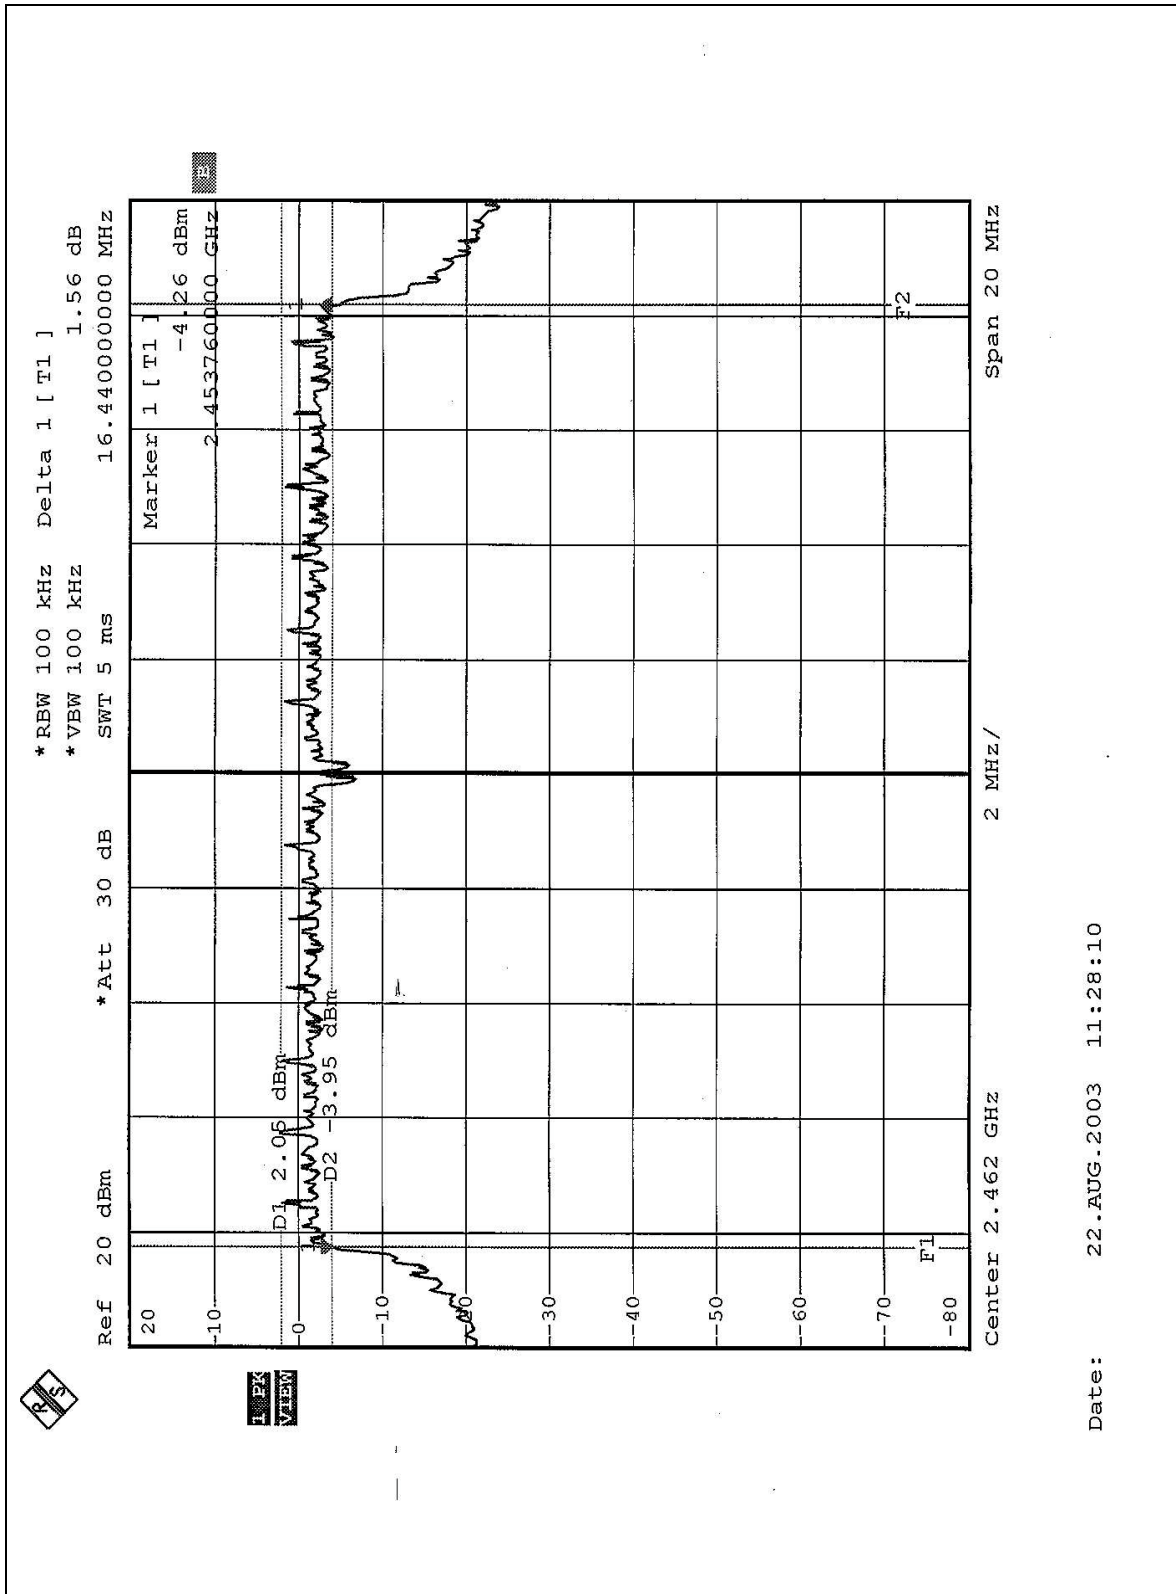

Date: 22.AUG.2003 11:28:10

### 3.9 MAXIMUM PEAK OUTPUT POWER

#### 3.9.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

#### 3.9.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER      | FSEK30    | 100049     | Aug. 12, 2004    |
| R&S SIGNAL GENERATOR       | SMP04     | 100011     | May 28, 2004     |
| TEKTRONIX OSCILLOSCOPE     | TDS 220   | B048470    | Mar. 05, 2004    |
| NARDA DETECTOR             | 4503A     | FSCM99899  | NA               |

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 3.9.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

### 3.9.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.9.5 TEST SETUP



### 3.9.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



## 3.9.7 TEST RESULTS

|                             |                                   |                                 |                         |
|-----------------------------|-----------------------------------|---------------------------------|-------------------------|
| <b>EUT</b>                  | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                    | DI-774                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                      | <b>ENVIRONMENTAL CONDITIONS</b> | 24deg. C, 65RH, 991 hPa |
| <b>TEST MODE</b>            | CCK                               | <b>TESTED BY</b>                | Cody Chang              |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>PEAK POWER OUTPUT (dBm)</b> | <b>PEAK POWER LIMIT (dBm)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|--------------------------------|-------------------------------|------------------|
| 1              | 2412                           | 16.90                          | 30                            | PASS             |
| 6              | 2437                           | 16.80                          | 30                            | PASS             |
| 11             | 2462                           | 17.10                          | 30                            | PASS             |

|                             |                                   |                                 |                         |
|-----------------------------|-----------------------------------|---------------------------------|-------------------------|
| <b>EUT</b>                  | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                    | DI-774                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                      | <b>ENVIRONMENTAL CONDITIONS</b> | 24deg. C, 65RH, 991 hPa |
| <b>TEST MODE</b>            | OFDM                              | <b>TESTED BY</b>                | Cody Chang              |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>PEAK POWER OUTPUT (dBm)</b> | <b>PEAK POWER LIMIT (dBm)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|--------------------------------|-------------------------------|------------------|
| 1              | 2412                           | 16.80                          | 30                            | PASS             |
| 6              | 2437                           | 17.00                          | 30                            | PASS             |
| 11             | 2462                           | 16.90                          | 30                            | PASS             |





### 3.10 POWER SPECTRAL DENSITY MEASUREMENT

#### 3.10.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

#### 3.10.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2004    |

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 3.10.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

### 3.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.10.5 TEST SETUP



### 3.10.6 EUT OPERATING CONDITION


Same as Item 4.3.6

## 3.10.7 TEST RESULTS


|                                 |                                      |                                     |                            |
|---------------------------------|--------------------------------------|-------------------------------------|----------------------------|
| <b>EUT</b>                      | Tri-Mode Dualband<br>Wireless Router | <b>MODEL</b>                        | DI-774                     |
| <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60Hz                         | <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 24deg. C, 65RH,<br>991 hPa |
| <b>TEST MODE</b>                | CCK                                  | <b>TESTED BY</b>                    | Cody Chang                 |

| <b>CHANNEL<br/>NUMBER</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz )</b> | <b>RF POWER LEVEL<br/>IN 3 kHz BW<br/>(dBm)</b> | <b>MAXIMUM<br/>LIMIT<br/>(dBm)</b> | <b>PASS/FAIL</b> |
|---------------------------|-----------------------------------------|-------------------------------------------------|------------------------------------|------------------|
| 1                         | 2412                                    | -6.19                                           | 8                                  | PASS             |
| 6                         | 2437                                    | -5.17                                           | 8                                  | PASS             |
| 11                        | 2462                                    | -5.60                                           | 8                                  | PASS             |

CH1

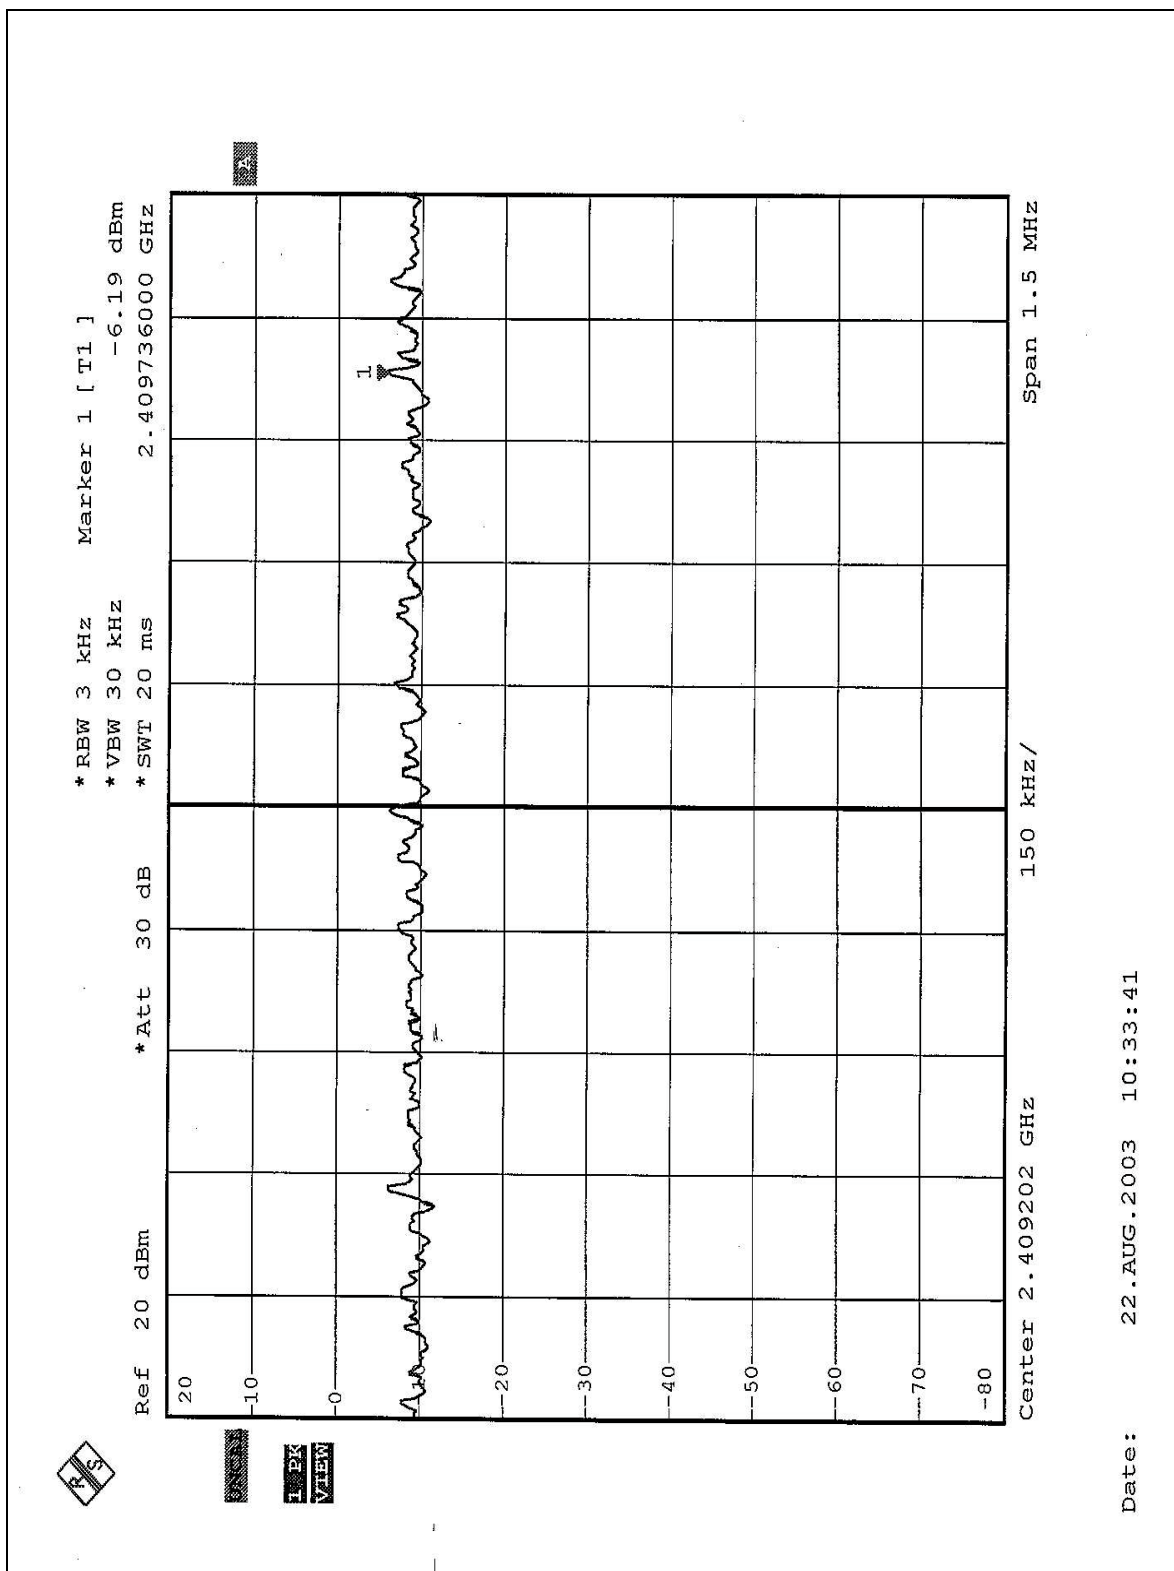


CH6

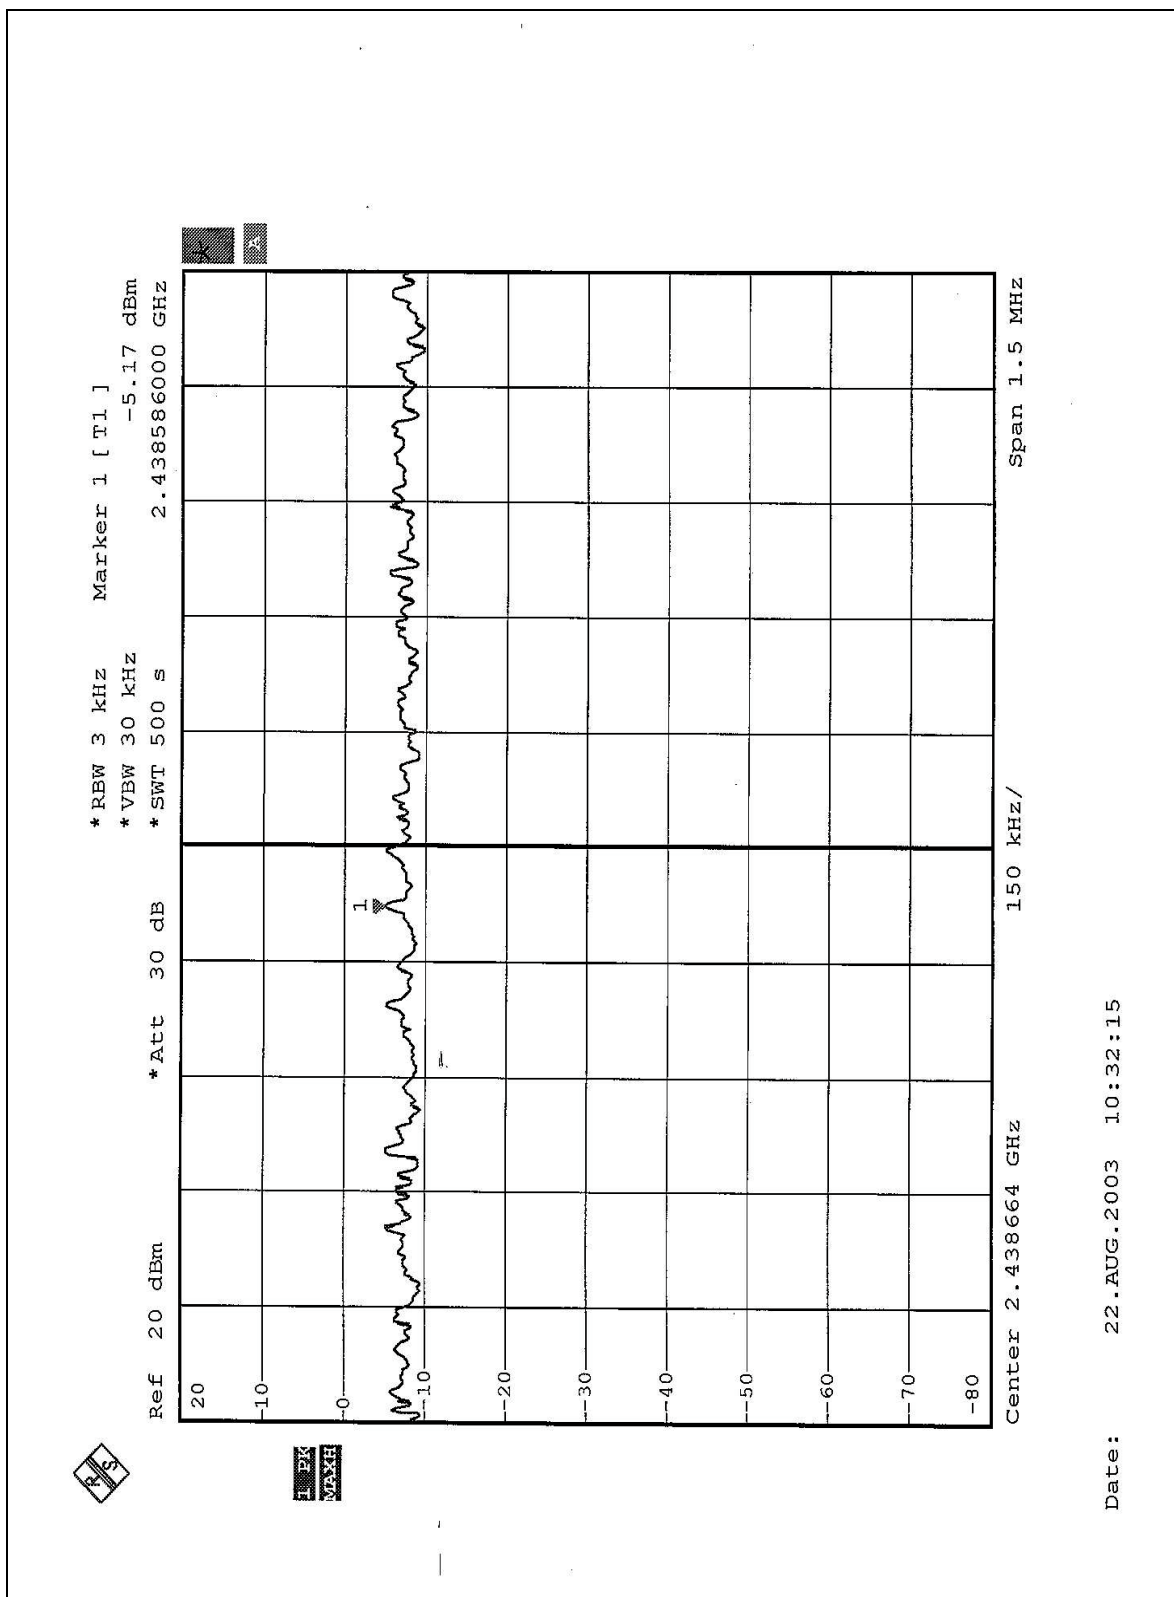

Date: 22.AUG.2003 10:32:15

CH11

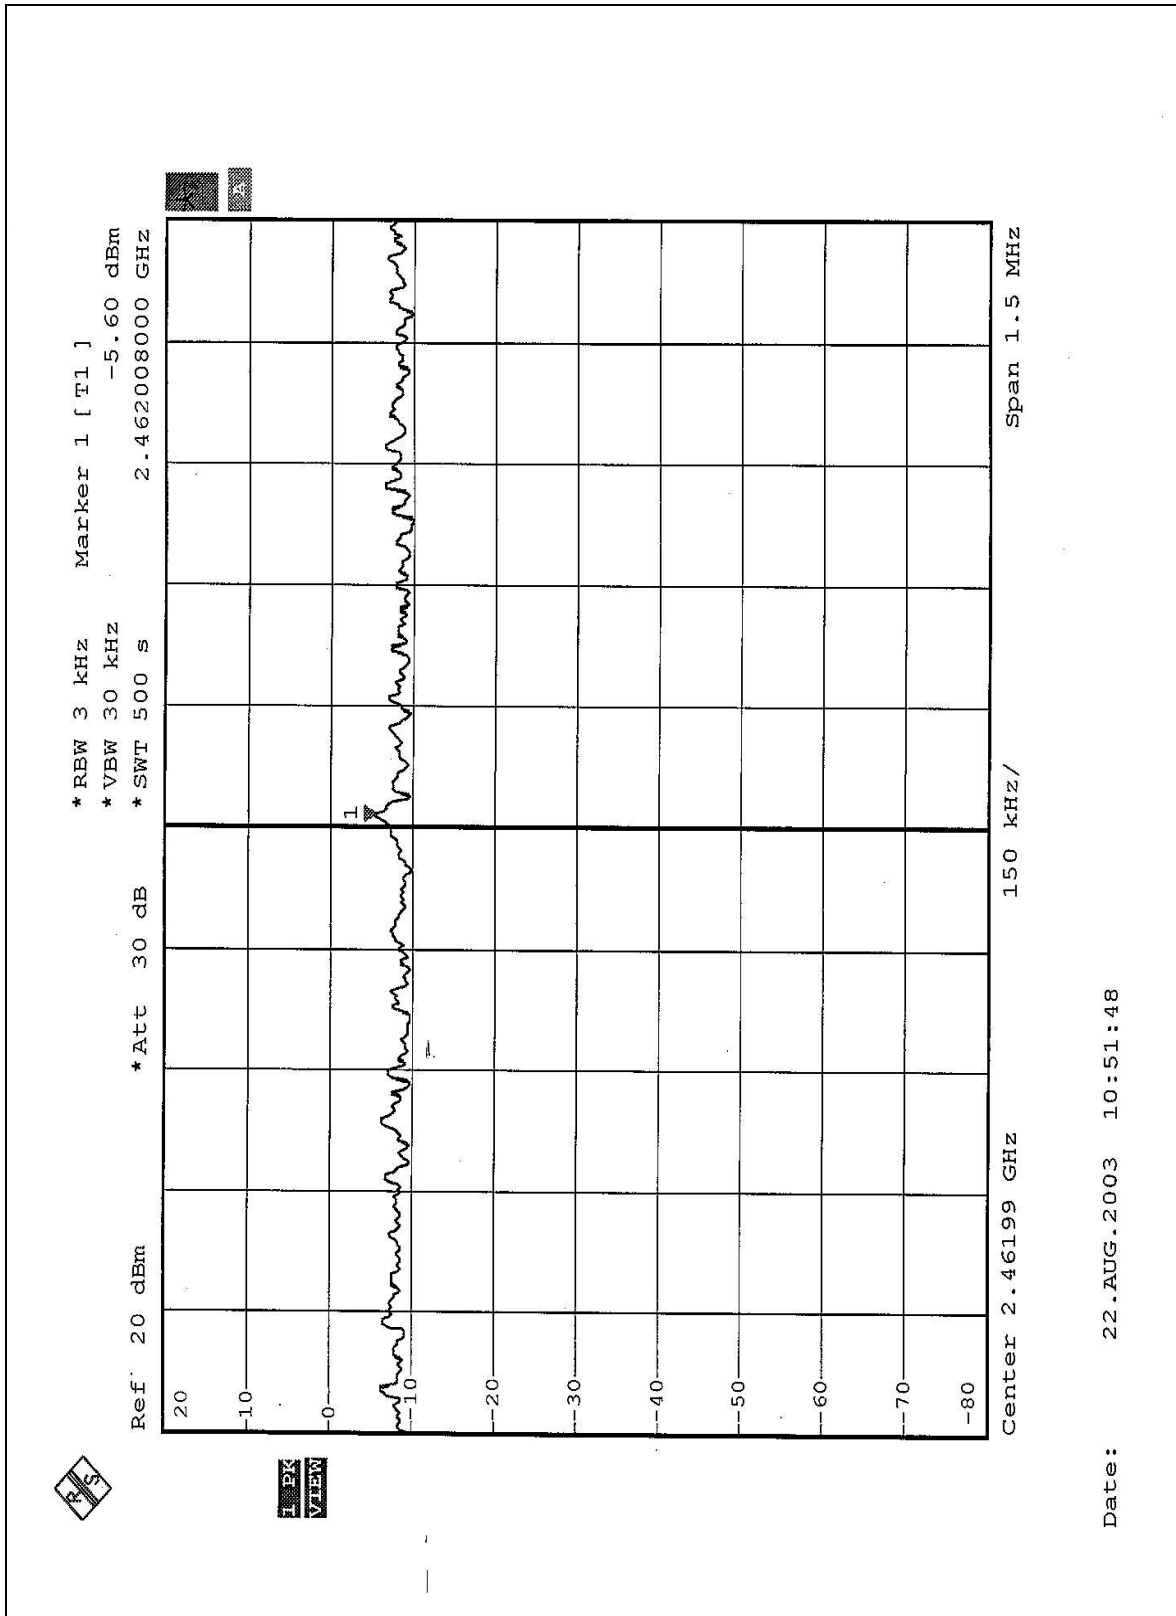




|                             |                                   |                                 |                         |
|-----------------------------|-----------------------------------|---------------------------------|-------------------------|
| <b>EUT</b>                  | Tri-Mode Dualband Wireless Router | <b>MODEL</b>                    | DI-774                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                      | <b>ENVIRONMENTAL CONDITIONS</b> | 24deg. C, 65RH, 991 hPa |
| <b>TEST MODE</b>            | OFDM                              | <b>TESTED BY</b>                | Cody Chang              |

| <b>CHANNEL NUMBER</b> | <b>CHANNEL FREQUENCY (MHz )</b> | <b>RF POWER LEVEL IN 3 kHz BW (dBm)</b> | <b>MAXIMUM LIMIT (dBm)</b> | <b>PASS/FAIL</b> |
|-----------------------|---------------------------------|-----------------------------------------|----------------------------|------------------|
| 1                     | 2412                            | -9.67                                   | 8                          | PASS             |
| 6                     | 2437                            | -7.07                                   | 8                          | PASS             |
| 11                    | 2462                            | -10.80                                  | 8                          | PASS             |


CH1

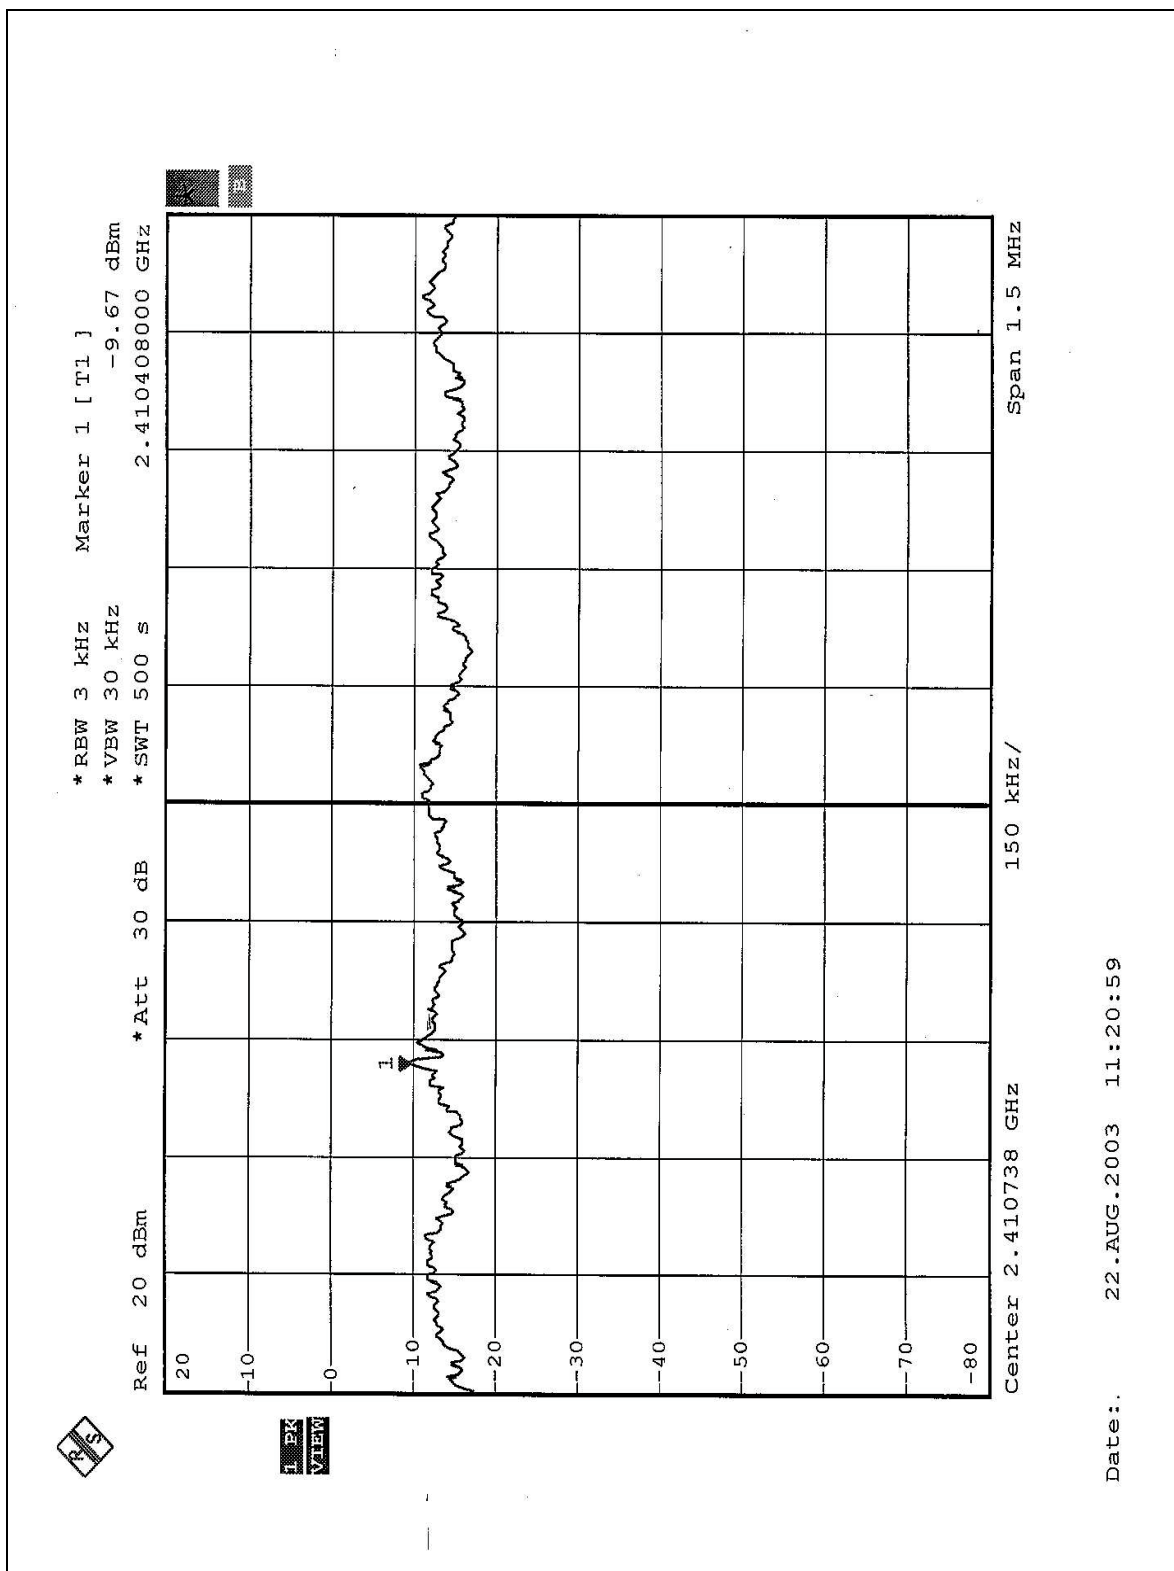


Date: 22.AUG.2003 11:20:59



CH6

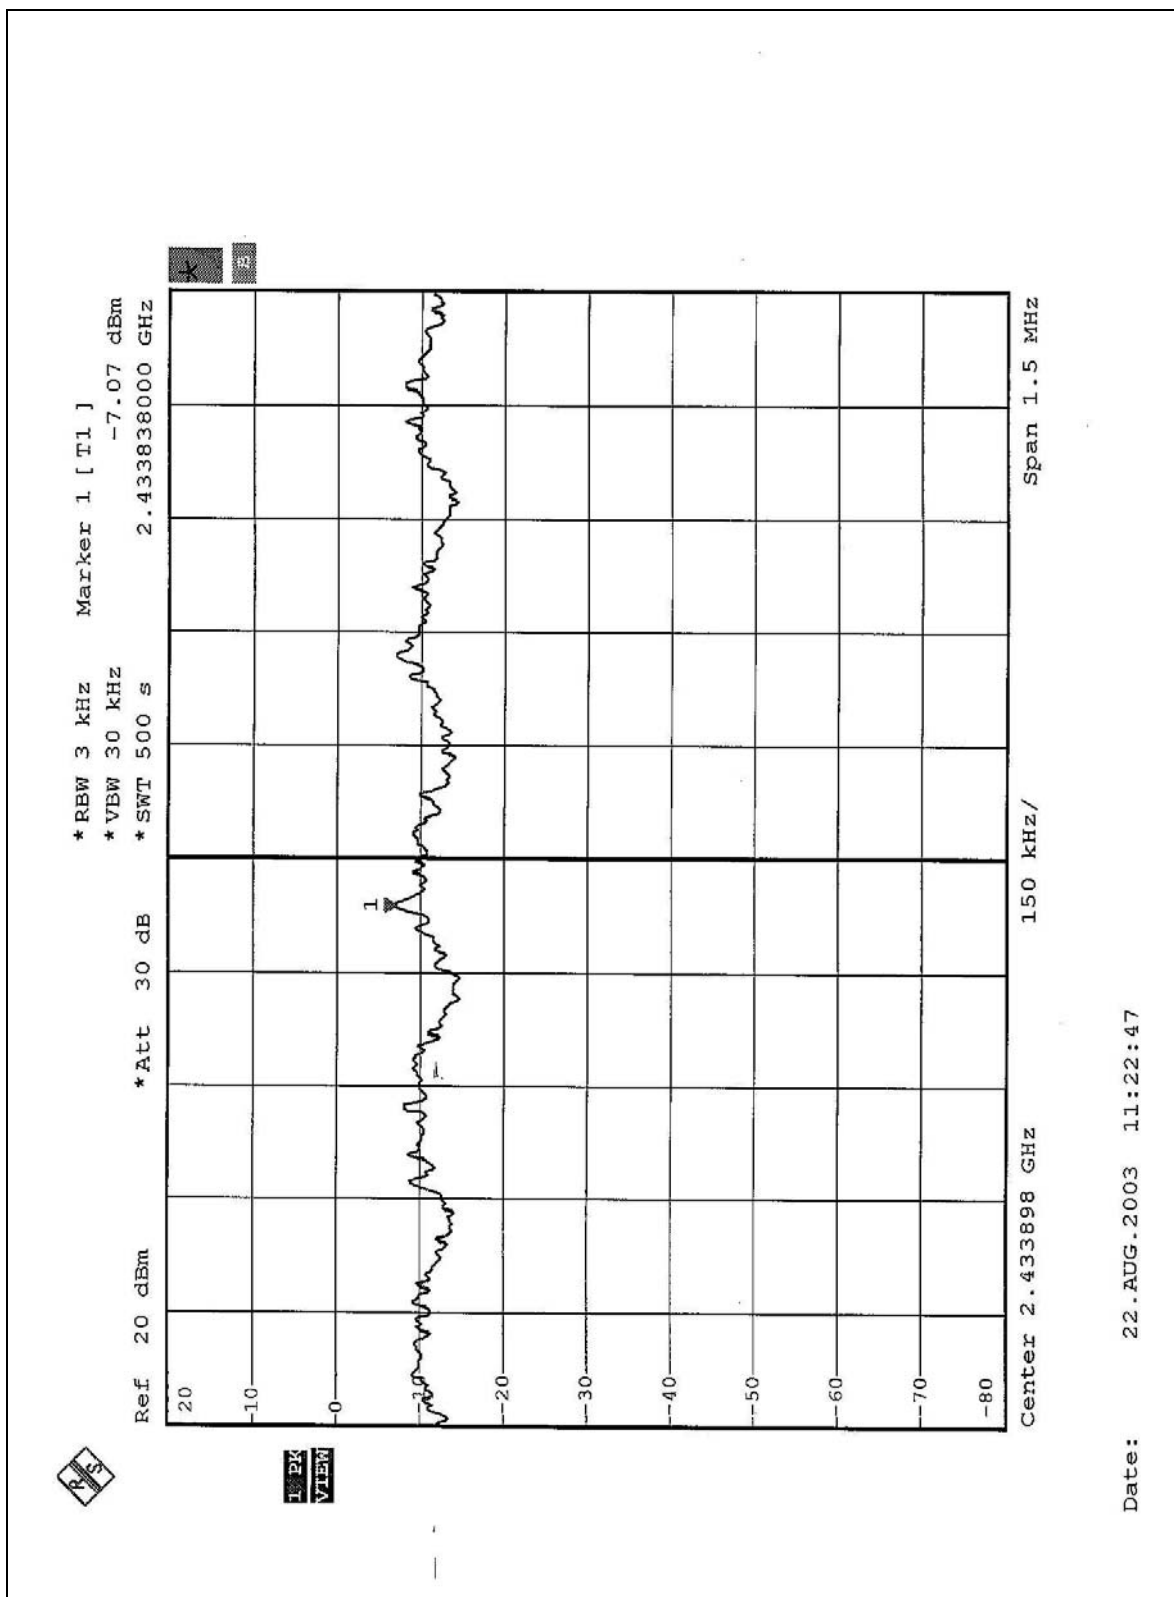

CH11

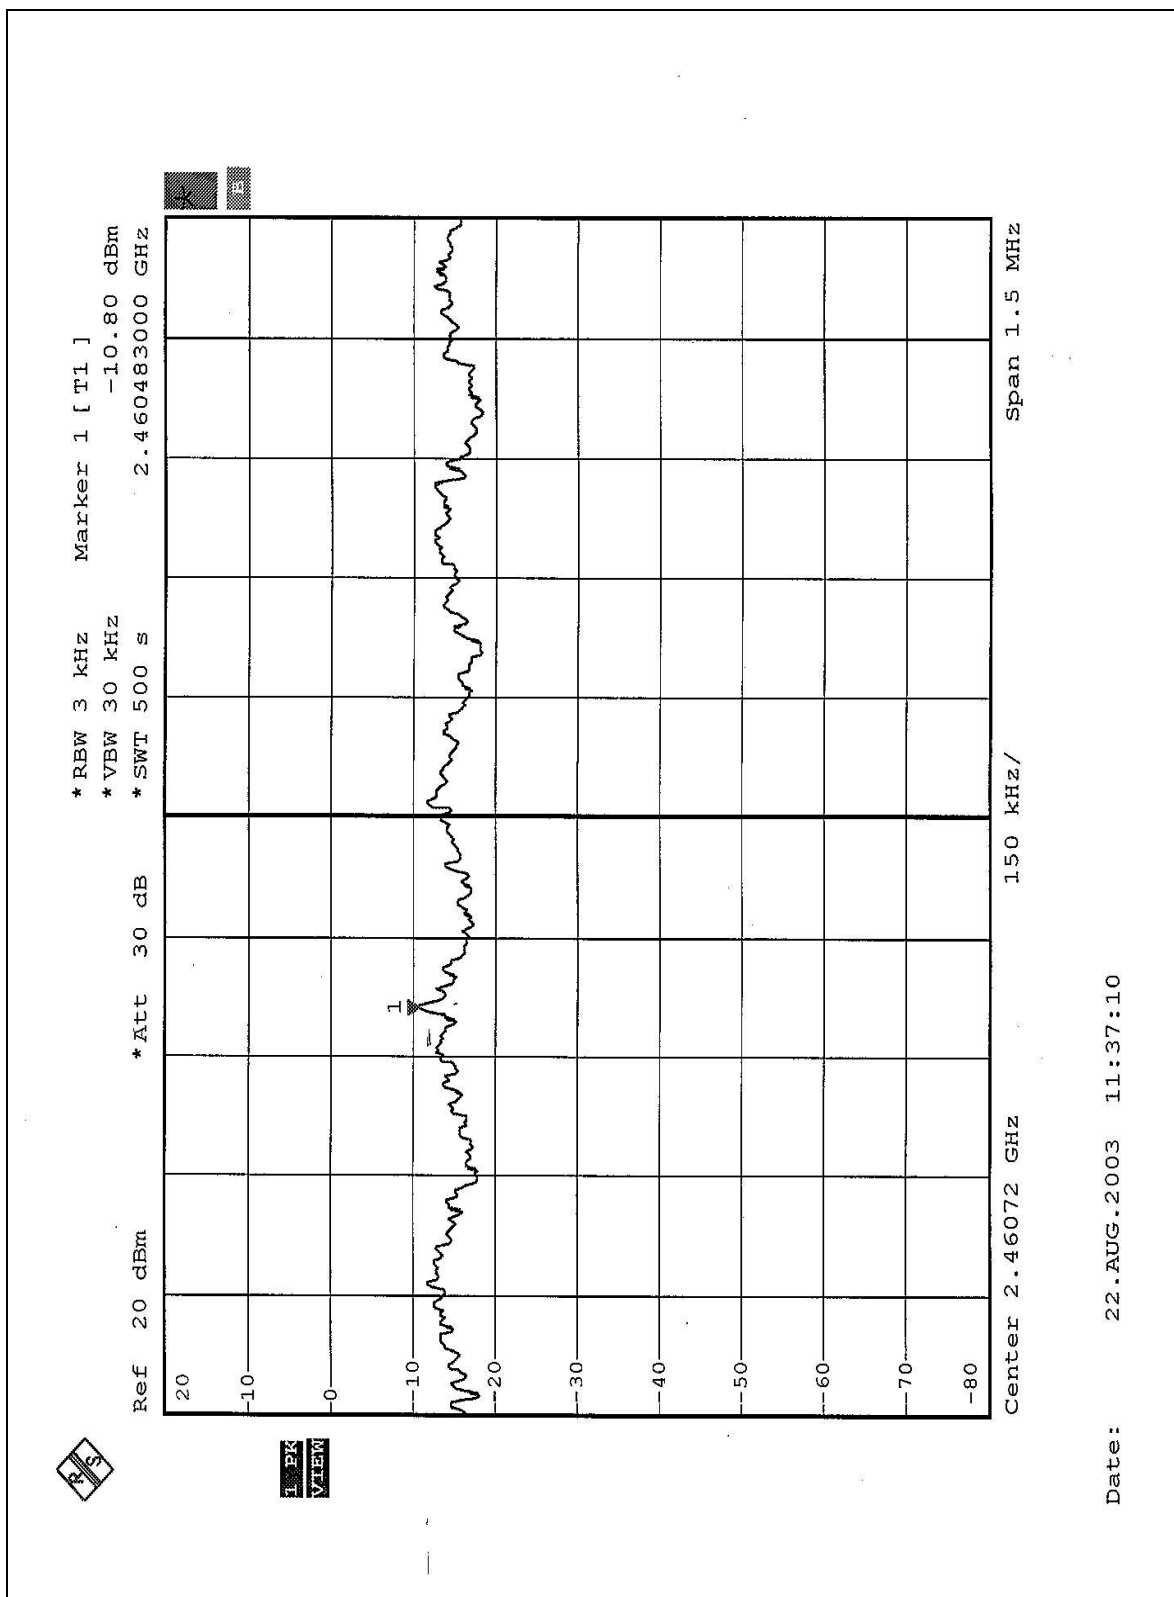

### 3.11 BAND EDGES MEASUREMENT

#### 3.11.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

#### 3.11.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | Aug. 12, 2004    |

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 3.11.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

#### 3.11.4 DEVIATION FROM TEST STANDARD

No deviation



### 3.11.5 EUT OPERATING CONDITION


Same as Item 4.3.6


### 3.11.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE1:** The band edge emission plot on the following 1-2 shows 59.54dB / 58.21dB delta between carrier maximum power and local maximum emission in restrict band (2.3864GHz / 2.4836GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 30) with CCK mode is 104.9dBuV/m, so the maximum field strength in restrict band is  $104.9 - 58.21 = 46.69$ dBuV/m which is under 54dBuV/m limit.


**NOTE2:** The band edge emission plot on the following 3-4 shows 49.68dB / 49.29dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 (page 31) with OFDM mode is 101.0dBuV/m, so the maximum field strength in restrict band is  $101.0 - 49.68 = 51.32$ dBuV/m which is under 54dBuV/m limit.

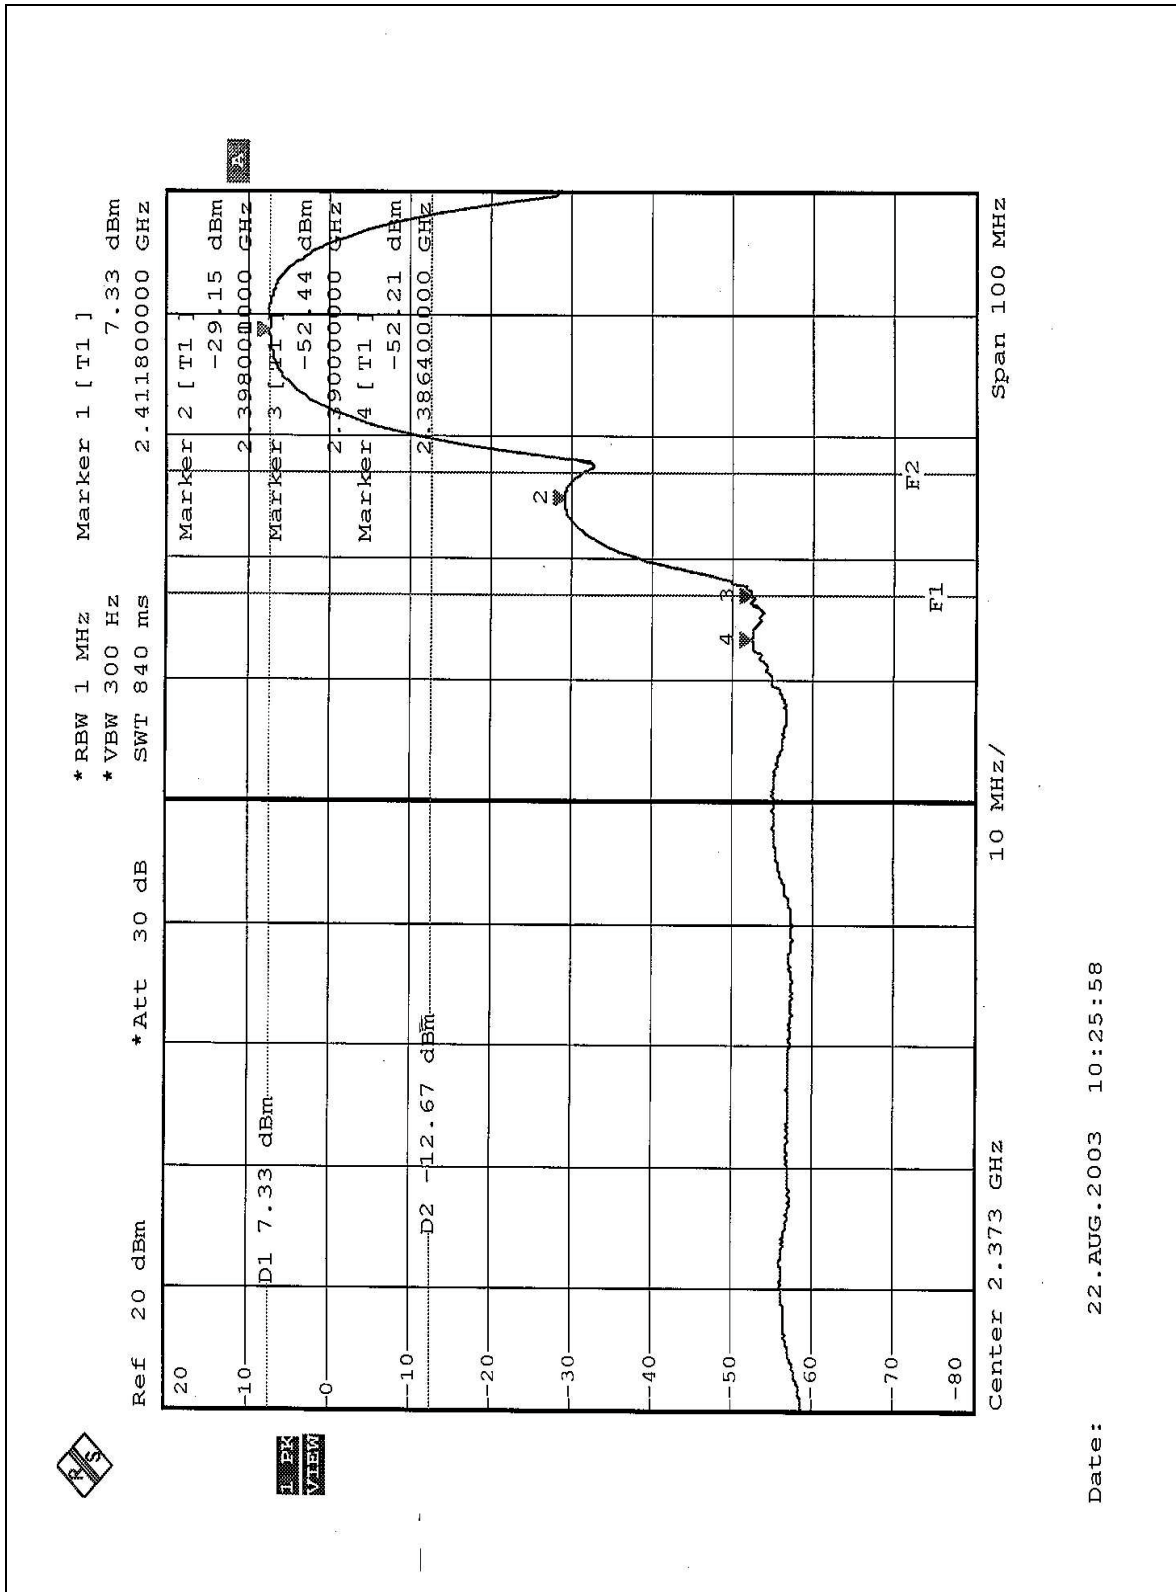

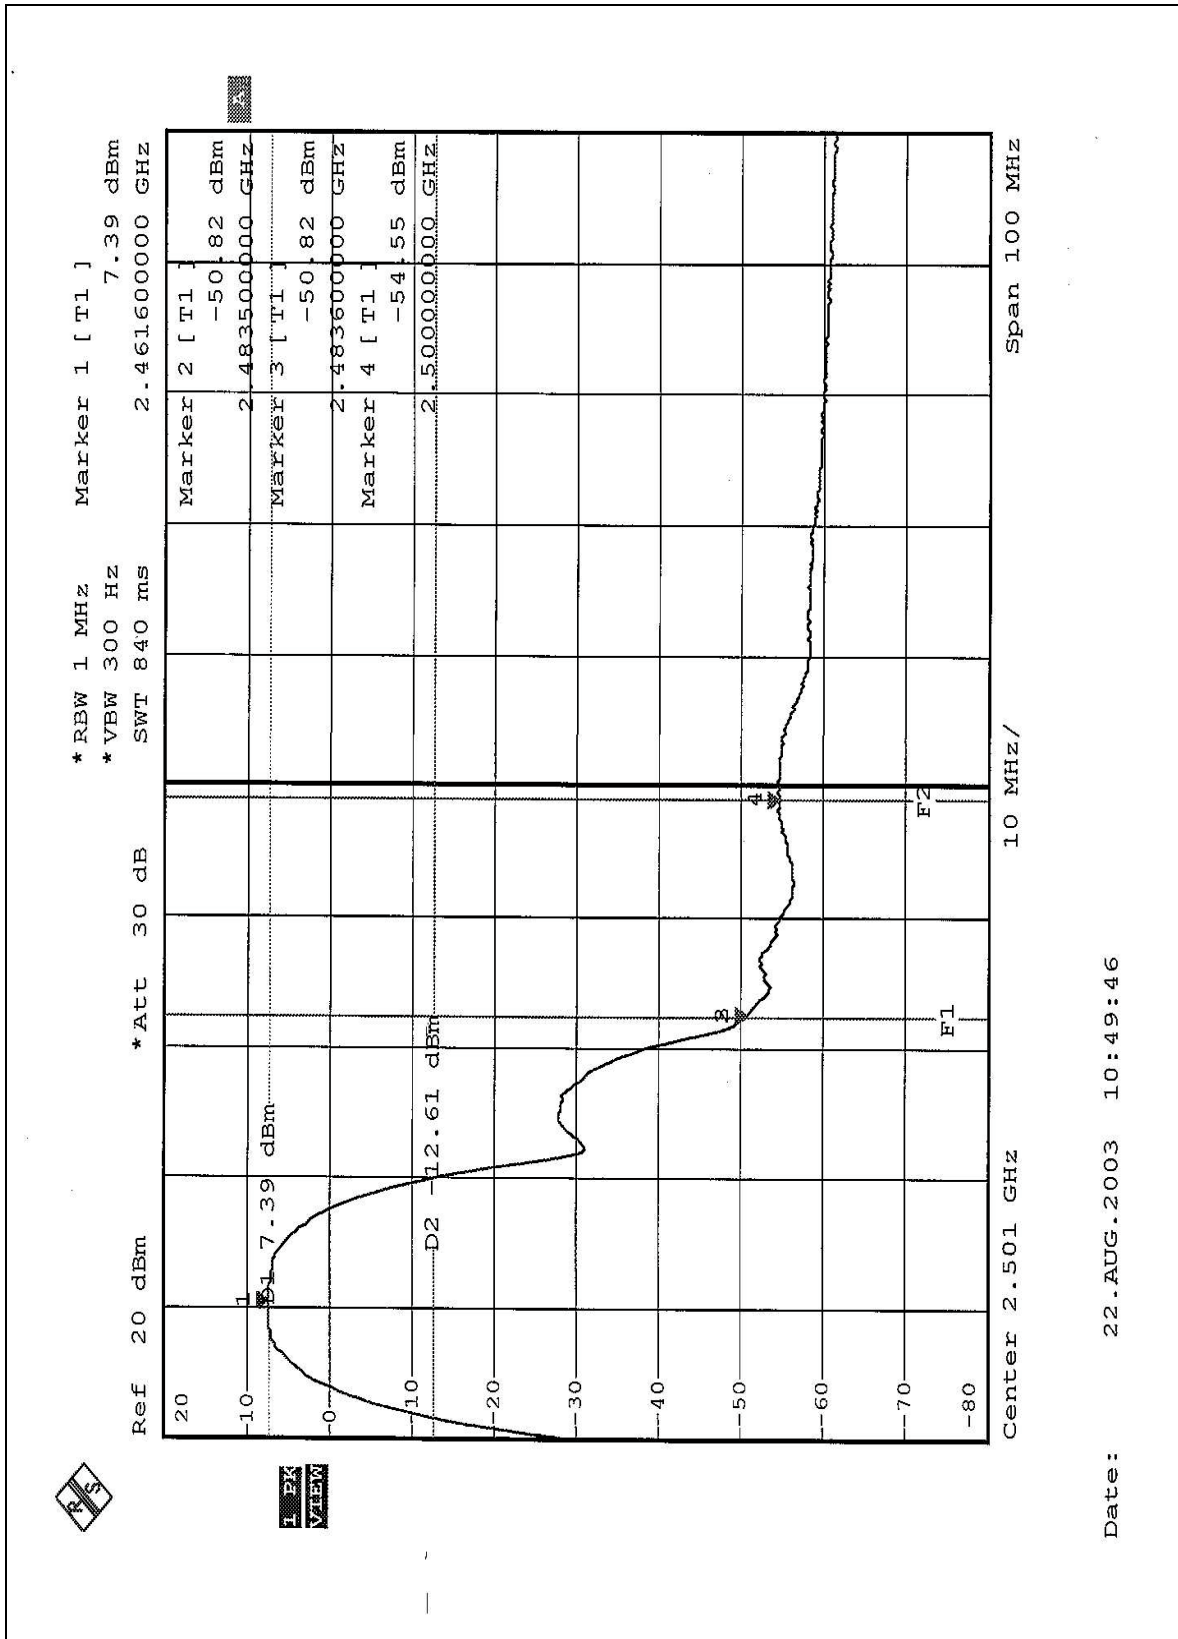

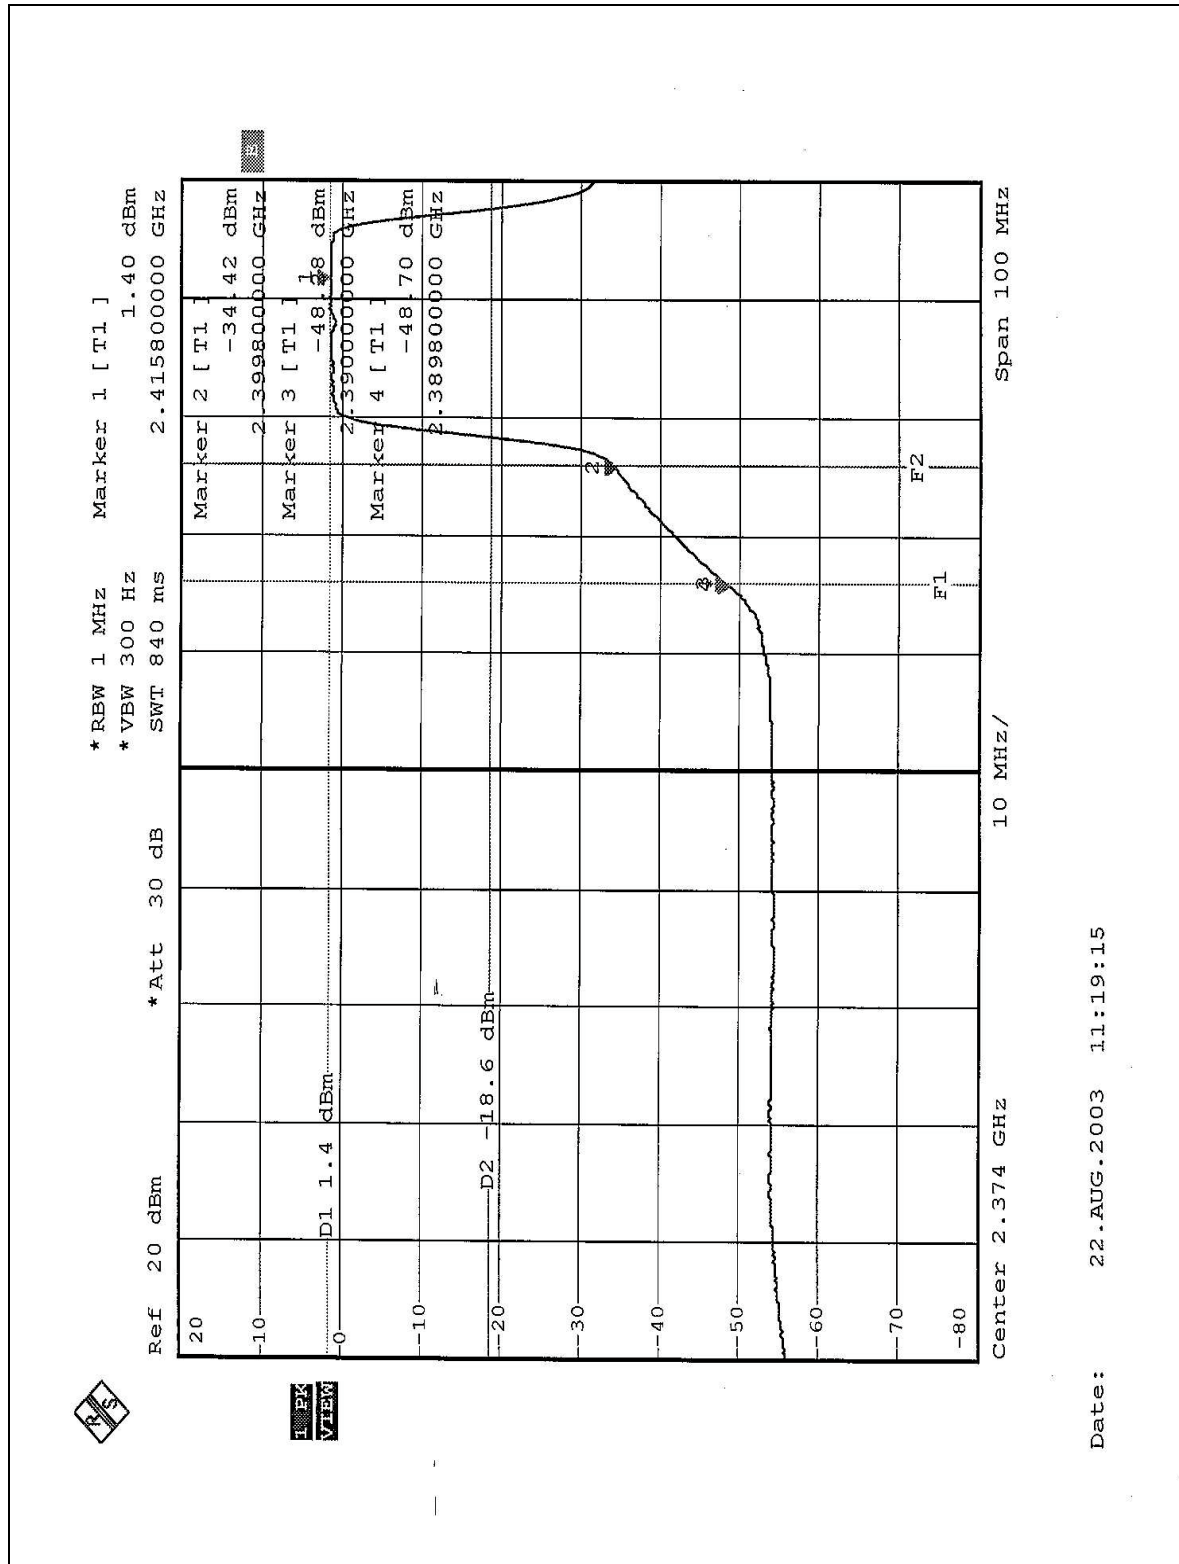

Date: 22.AUG.2003 11:19:15

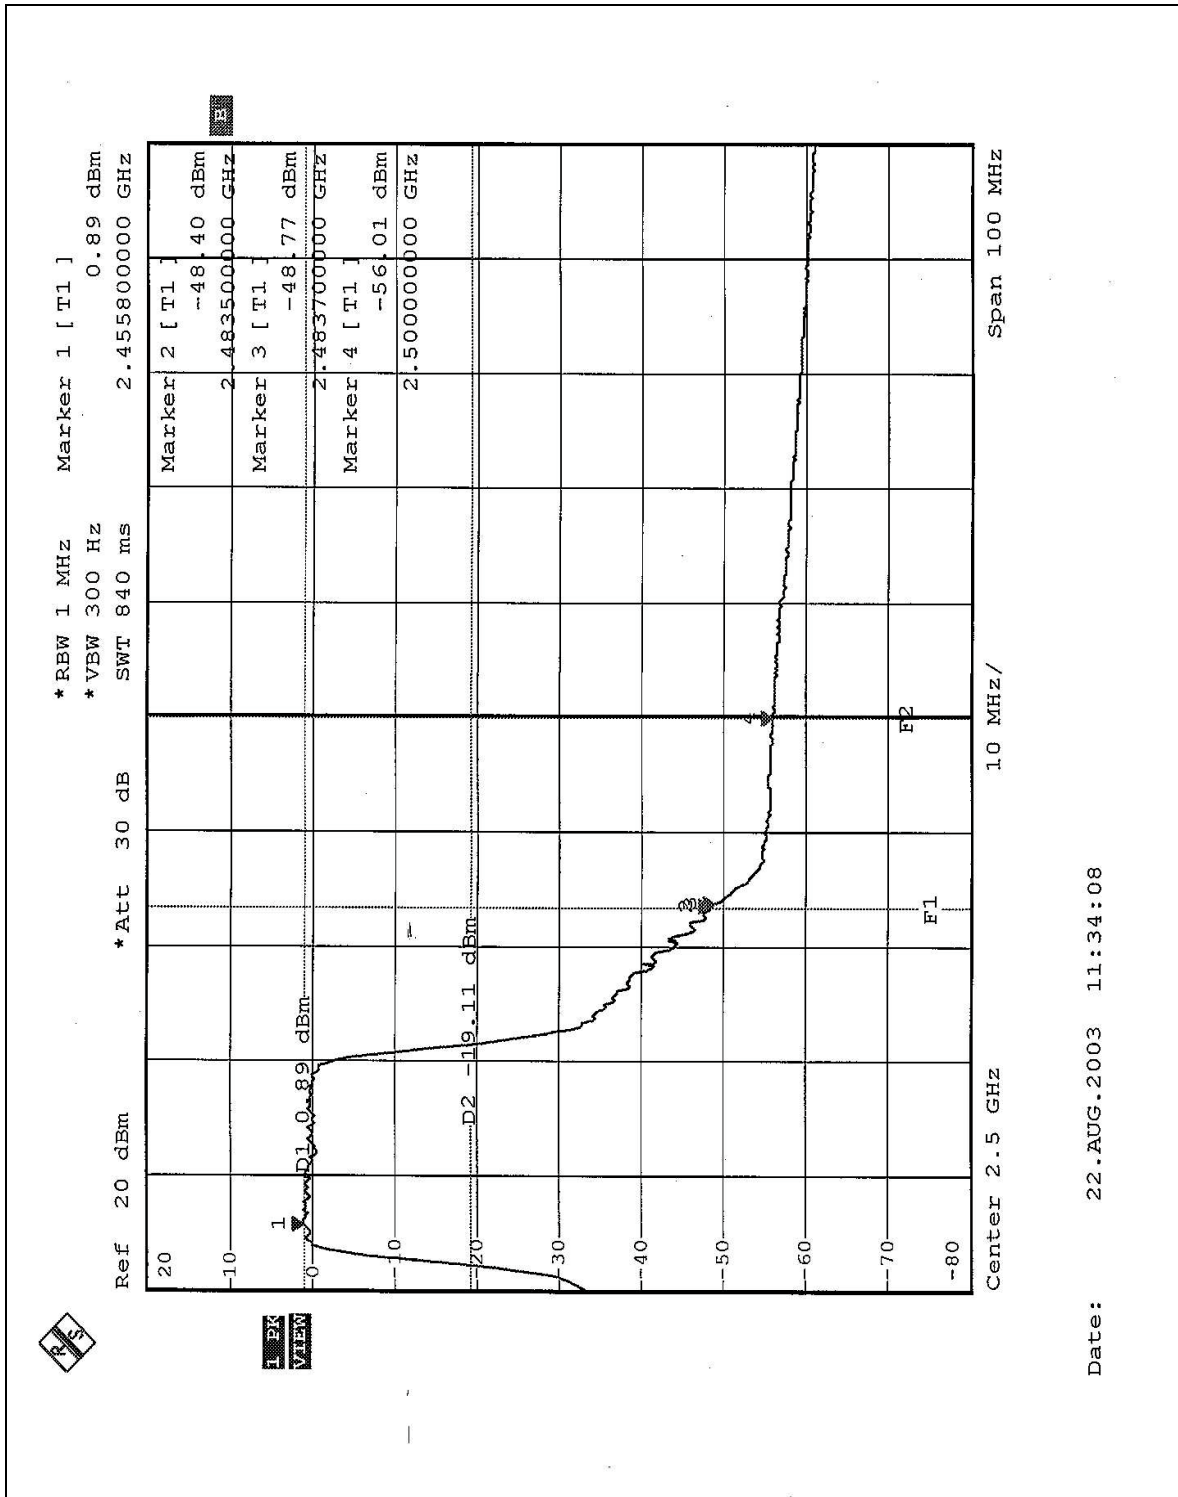

Date: 22.AUG.2003 11:34:08





### **3.12 ANTENNA REQUIREMENT**

#### **3.12.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **3.12.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 2dBi