

1

2

3

4

5

6



REVISIONS

ECN

DESCRIPTION

DATE

APPROVED

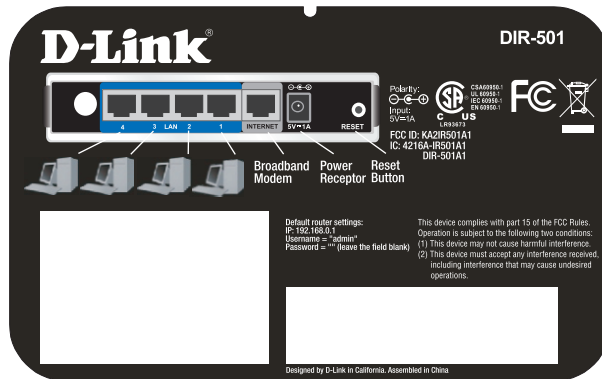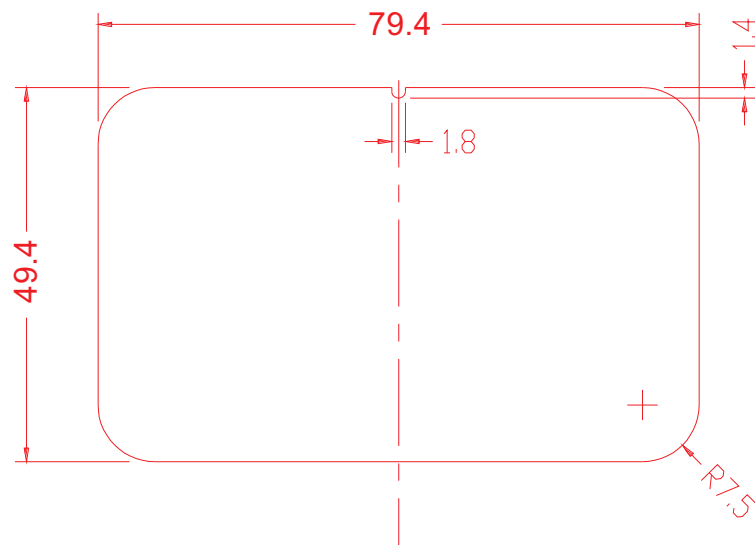

Note:公差容許

外形下料及沖孔尺寸 ± 0.15

ALPHA

Title

TOL $\pm$						
	RANGE	M1	M2	M3	I1	I2
6 以下	0.1	0.1	.15	.25	0.3	
6~30	0.1	.2	.15	.25	0.3	
30~80	.15	.25	.2	.45	0.5	
80~180	.15	0.3	.25	.45	0.5	
180~315	0.2	0.5	0.4	0.5	0.6	
315~800	0.3	0.6	0.6	0.6	0.8	

Doc/No.

Material

Drawn

Date

Part No.

Rev.
2

REV.DATE

ISSUED DATE

Heat Treatment

Checked

Date

UNIT mm

Q'TY

Scale 1:1

PAGE/OF

Version

Surface Treatment

Approved

Date

Sheet of

A4 297x210mm

D-Link®

DIR-501



Polarity:
Input:
20V-10A



CLASSIFIED
UL 10000-1
UL 10000-1
UL 10000-1



FCC ID: K429501A1
EC-4216A-RS01A1
DIR-501A1

Default router settings:
IP: 192.168.0.1
Username: "admin"
Password: "" (leave the field blank)
Made in China

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received,
including interference that may cause undesired
operations.

WT : 456639 P/N: 001R601NA A10
#4004975835*

