

WiFi 5.2GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 48.64$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/CH40_10mm/Area Scan (9x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.752 W/kg

Rear/Rear Touch/802.11a/CH40_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.551 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.110 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 W/kg

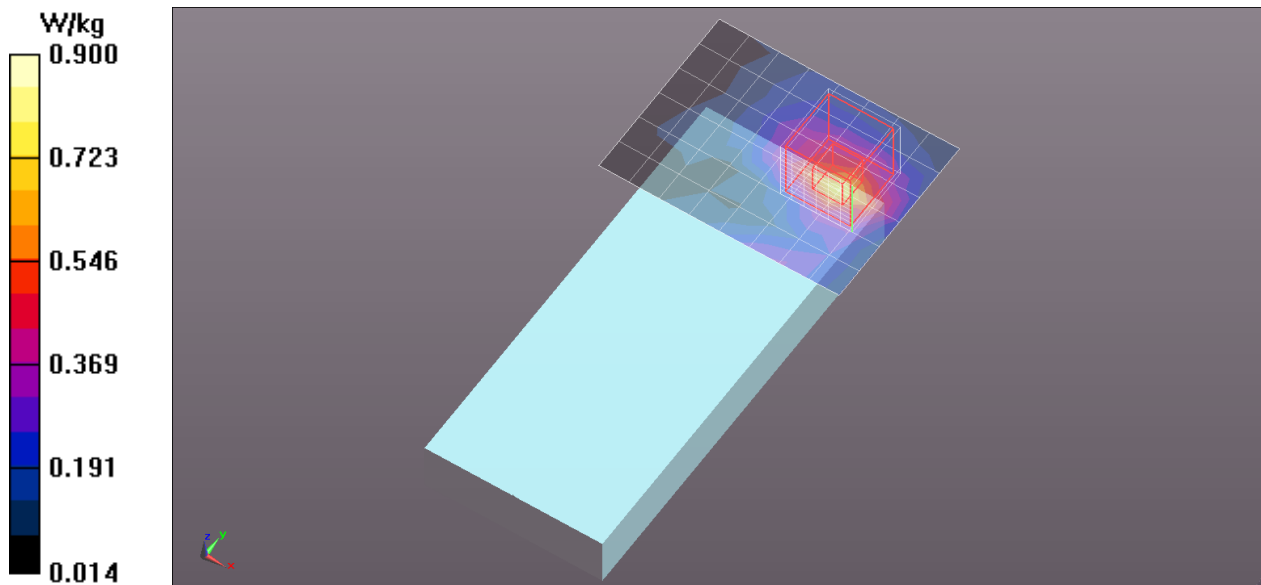

WiFi 5.2GHz Band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240.8$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 46.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/CH48_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.02 W/kg

Rear/Rear Touch/802.11a/CH48_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.033 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

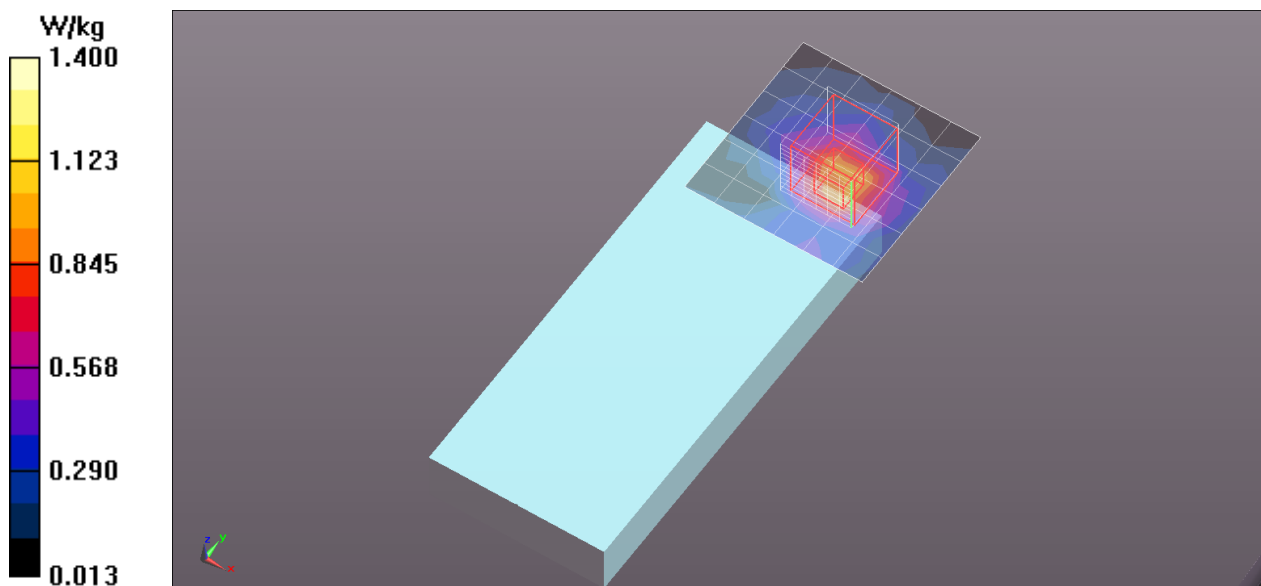

WiFi 5.2GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 48.64$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11a/CH40_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.724 W/kg

Front/Front Touch/802.11a/CH40_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 3.943 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.191 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.756 W/kg

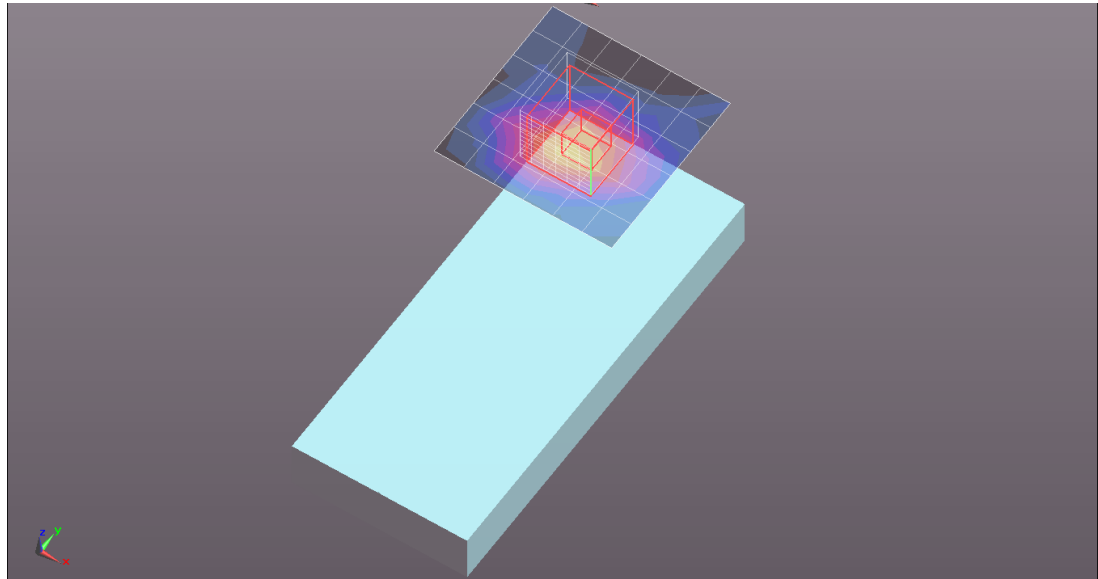

WiFi 5.2GHz Band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240.8$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 46.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11a/CH48_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.678 W/kg


Front/Front Touch/802.11a/CH48_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.552 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.893 W/kg

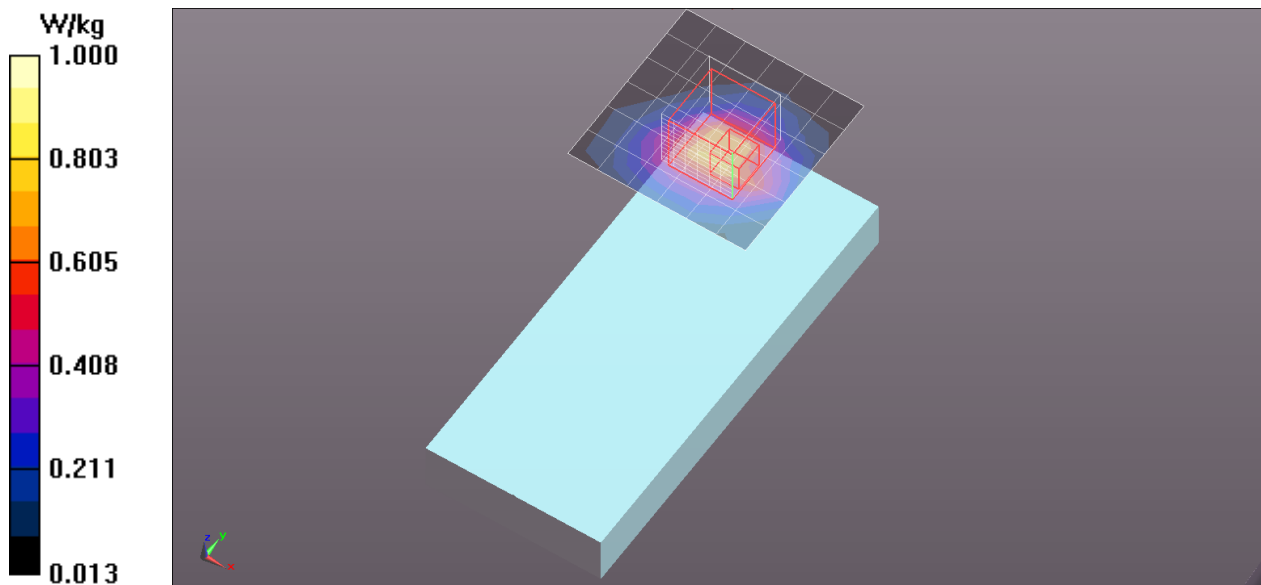

WiFi 5.2GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 48.64$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH40_10mm /Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.557 W/kg

Edge/Edge2/802.11a/CH40_10mm /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.673 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.162 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 W/kg

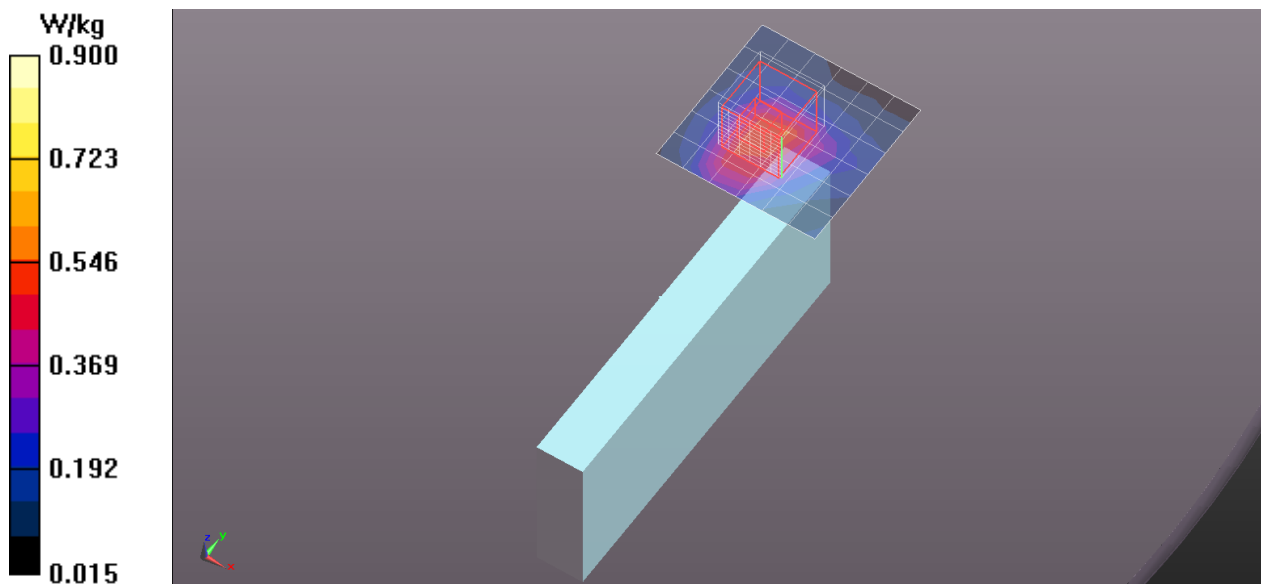

WiFi 5.2GHz Band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240.8$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 46.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH48_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.819 W/kg


Edge/Edge2/802.11a/CH48_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.206 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

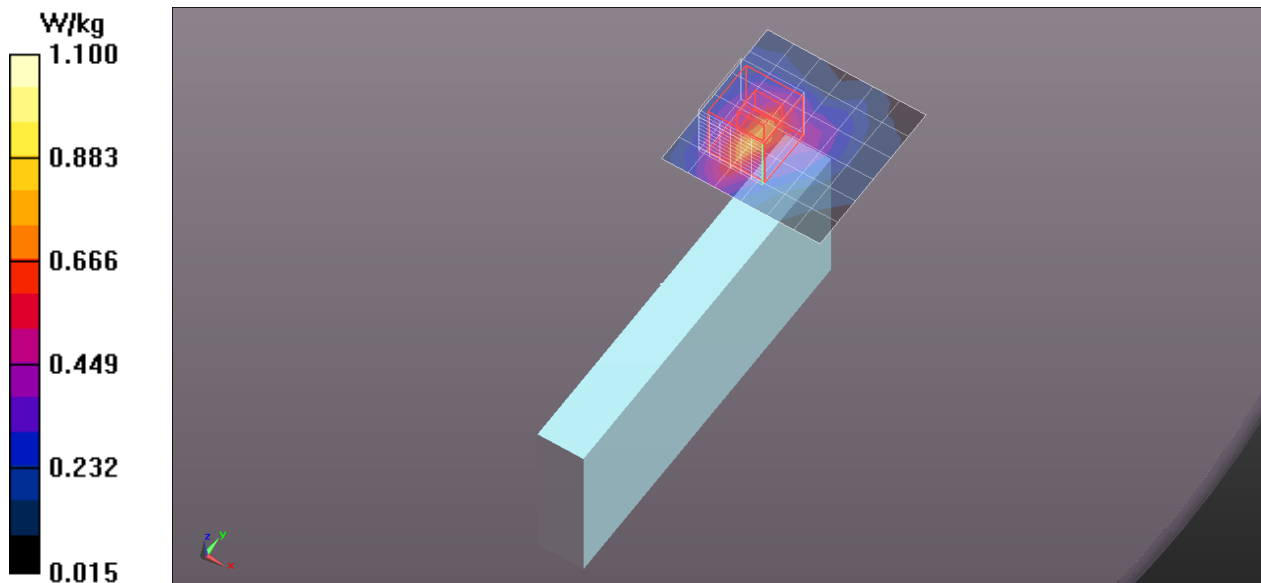

WiFi 5.2GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5200$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 48.64$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH40_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 W/kg

Edge/Edge3/802.11a/CH40_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.937 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.254 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 W/kg

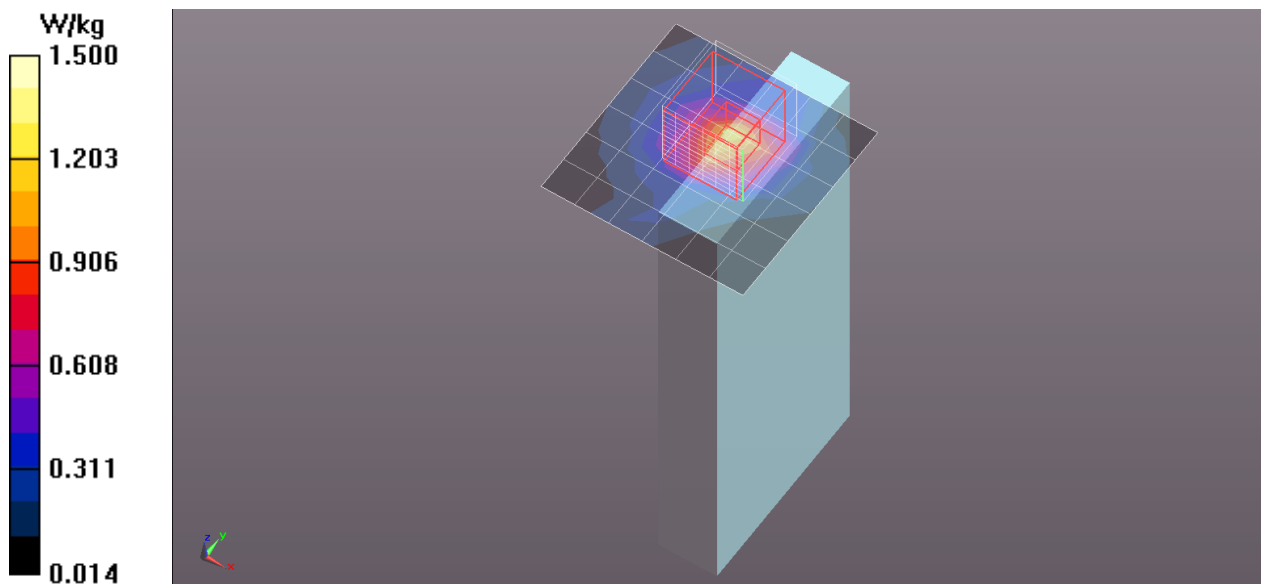

WiFi 5.2GHz Band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240.8$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 46.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH48_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.25 W/kg


Edge/Edge3/802.11a/CH48_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.358 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

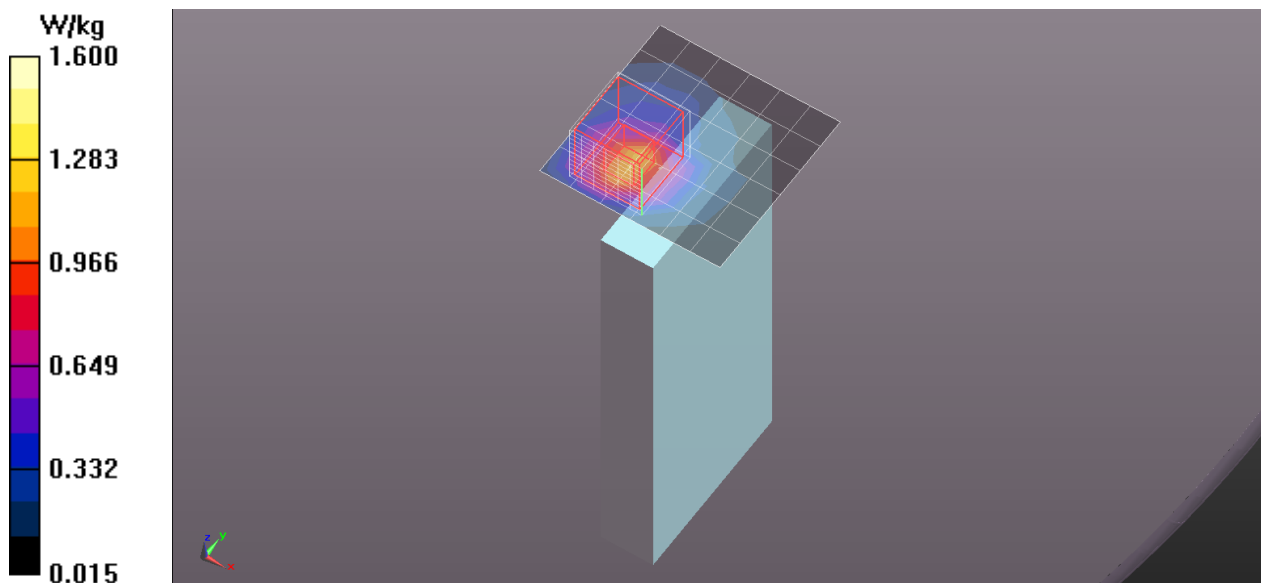

WiFi 5.2GHz Band

Frequency: 5230 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5230.9$ MHz; $\sigma = 5.096$ S/m; $\epsilon_r = 46.939$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11n HT40/CH46_10mm/Area Scan 3 (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.11 W/kg


Rear/Rear Touch/802.11n HT40/CH46_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.415 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

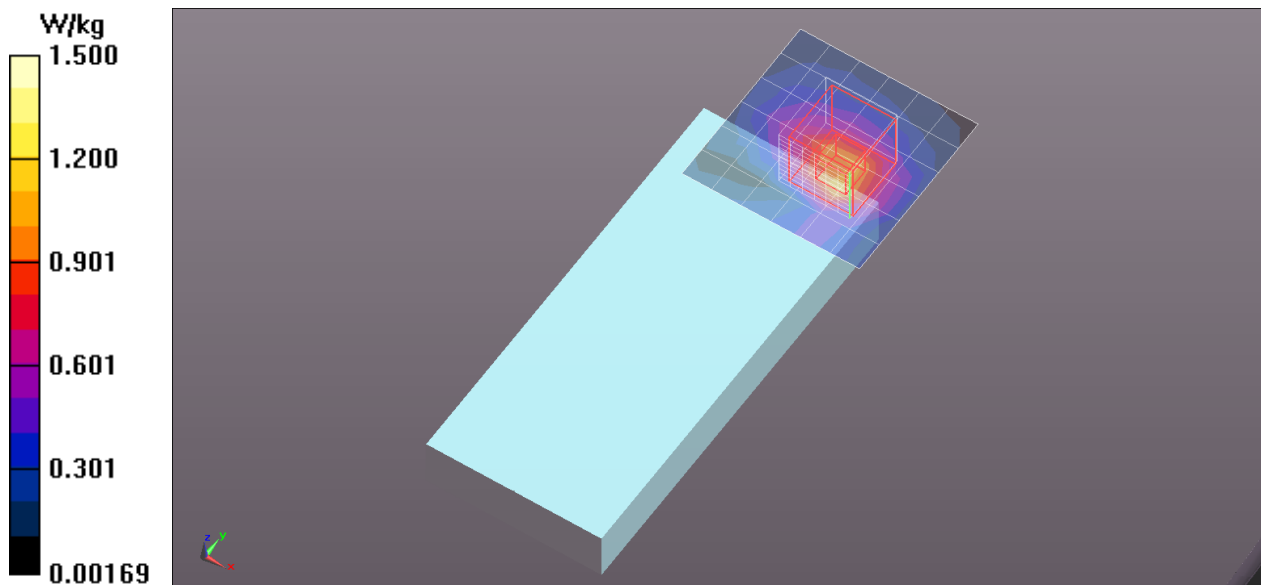

WiFi 5.2GHz Band

Frequency: 5230 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5230.9$ MHz; $\sigma = 5.096$ S/m; $\epsilon_r = 46.939$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11n HT40/CH46_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg


Front/Front Touch/802.11n HT40/CH46_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.288 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

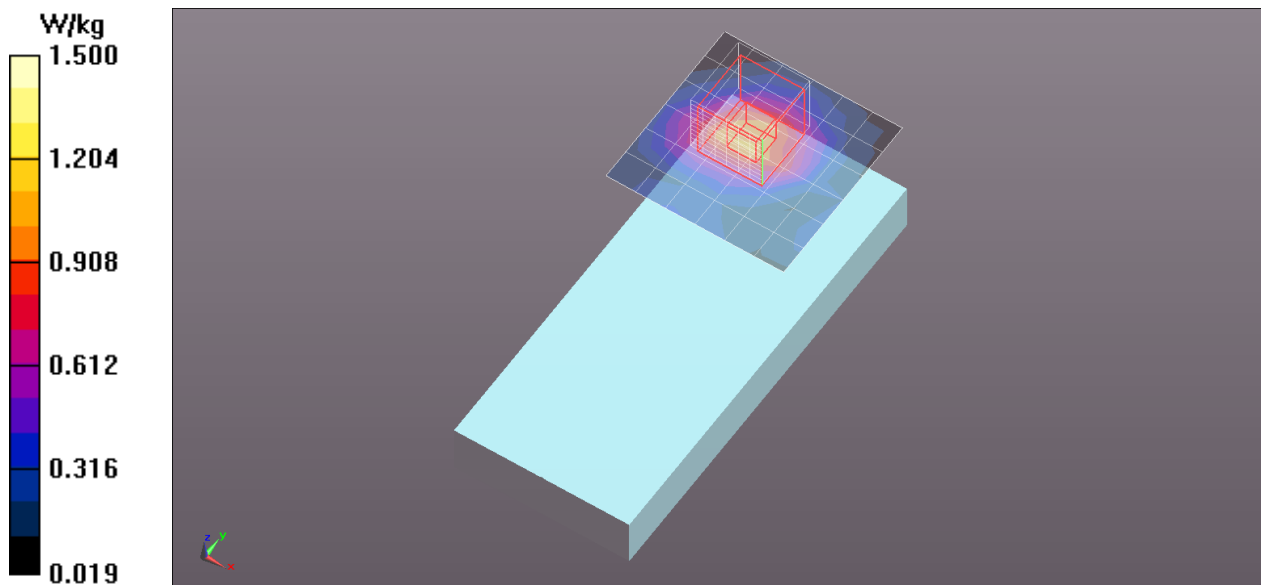

WiFi 5.2GHz Band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240.8$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 46.923$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11n HT40/CH46_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.12 W/kg


Edge/Edge2/802.11n HT40/CH46_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.660 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.233 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

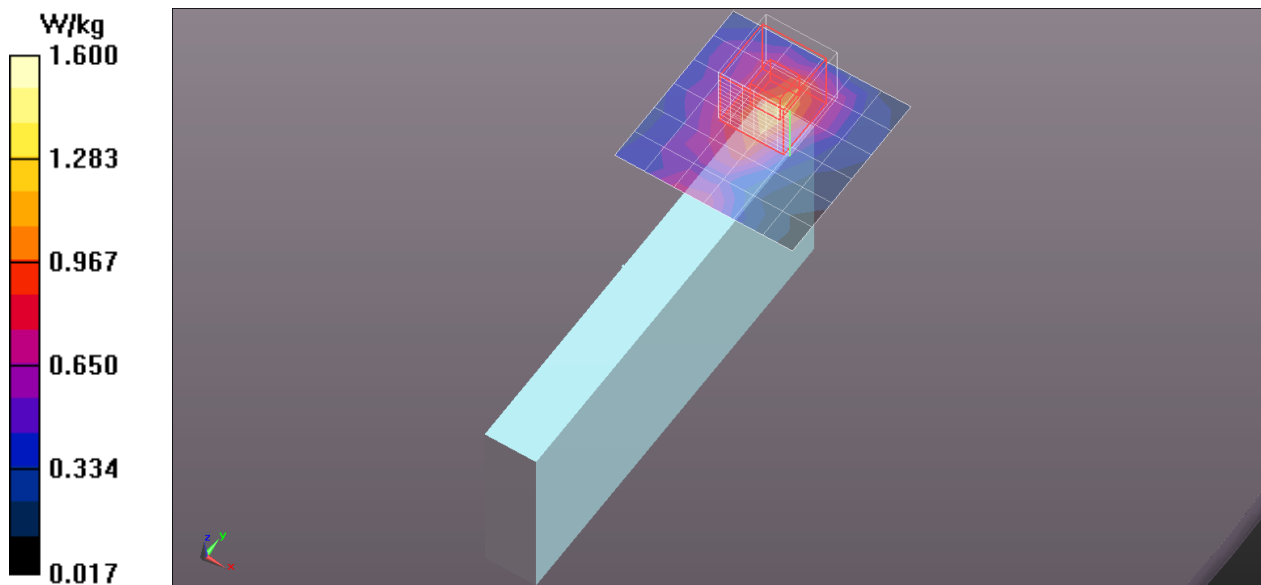

WiFi 5.2GHz Band

Frequency: 5230 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5230.9$ MHz; $\sigma = 5.096$ S/m; $\epsilon_r = 46.939$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11n HT40/CH46_10mm/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.45 W/kg


Edge/Edge3/802.11n HT40/CH46_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.105 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.49 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 2.53 W/kg

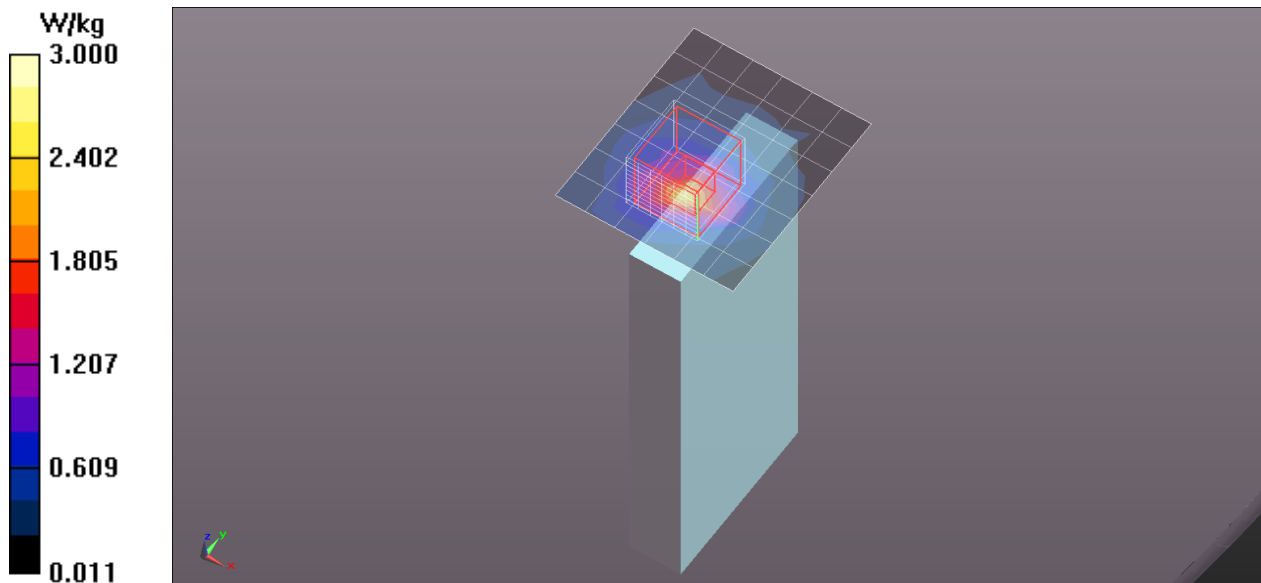


WiFi 5.2GHz Band

Frequency: 5230 MHz; Duty Cycle: 1:1

Edge/Edge3/802.11n HT40/CH46_10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.62 W/kg

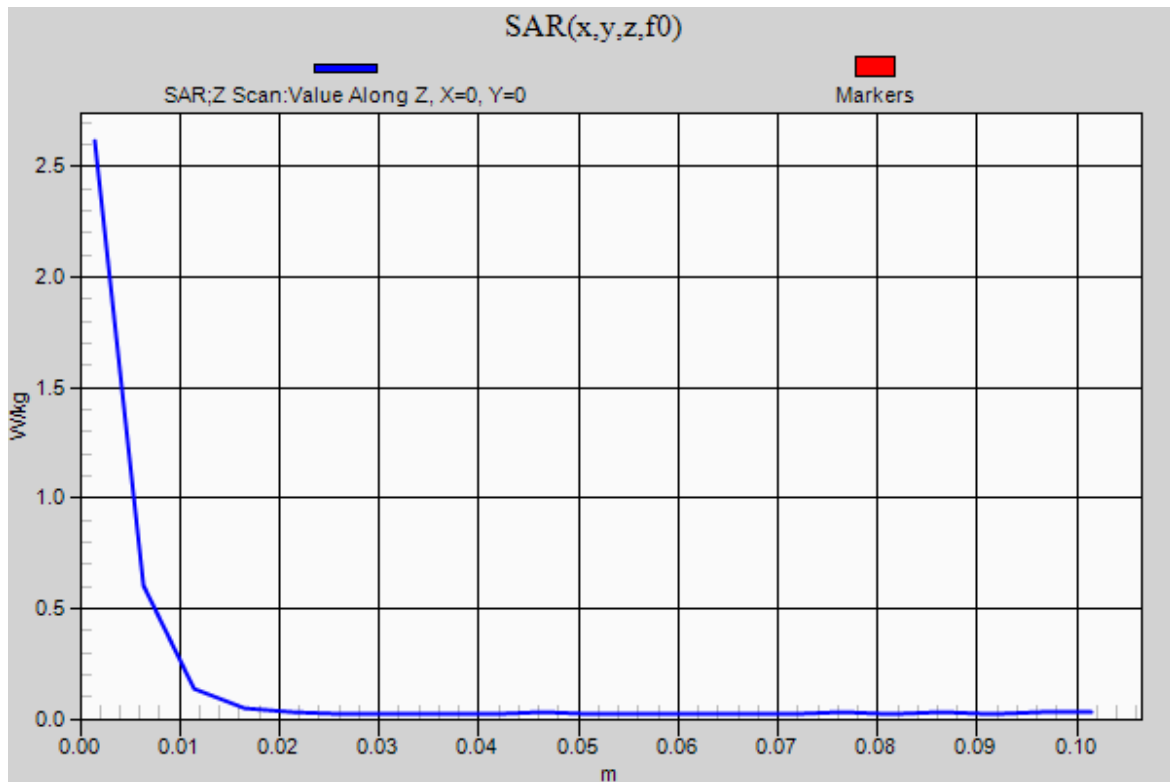

WiFi 5.2GHz Band

Frequency: 5230 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5230.9$ MHz; $\sigma = 5.096$ S/m; $\epsilon_r = 46.939$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11n HT40/CH46_10mm_Repeat/Area Scan (7x8x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.56 W/kg

Edge/Edge3/802.11n HT40/CH46_10mm_Repeat/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.779 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.59 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 2.66 W/kg

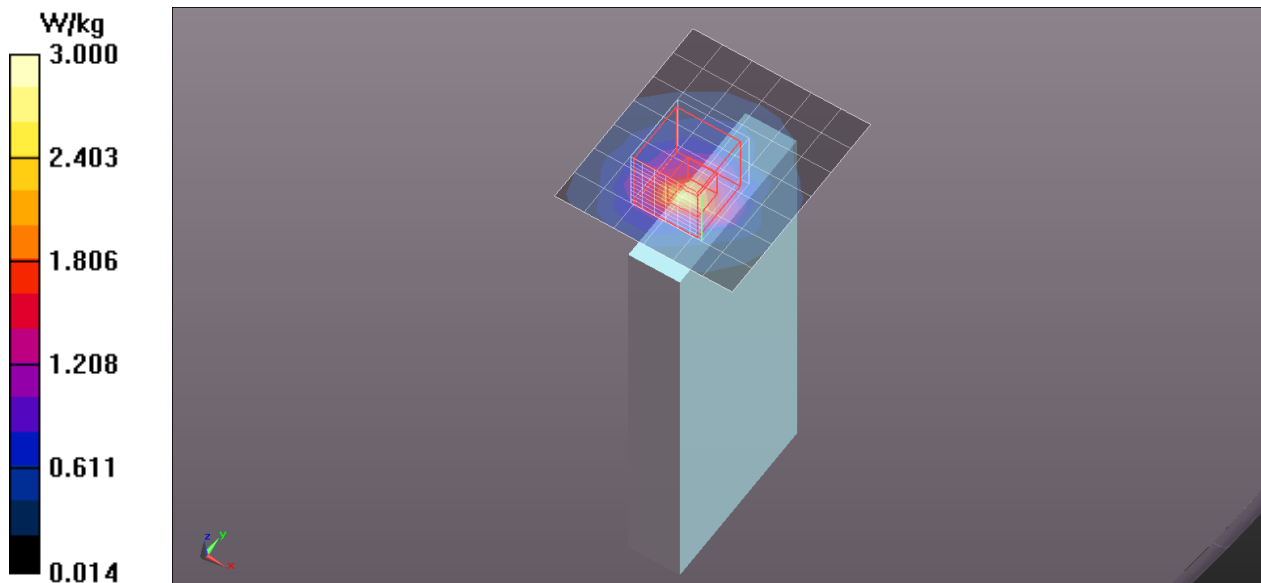

WiFi 5.2GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.071$ S/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11ac/CH42_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.749 W/kg

Rear/Rear Touch/802.11ac/CH42_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 4.515 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.166 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.784 W/kg

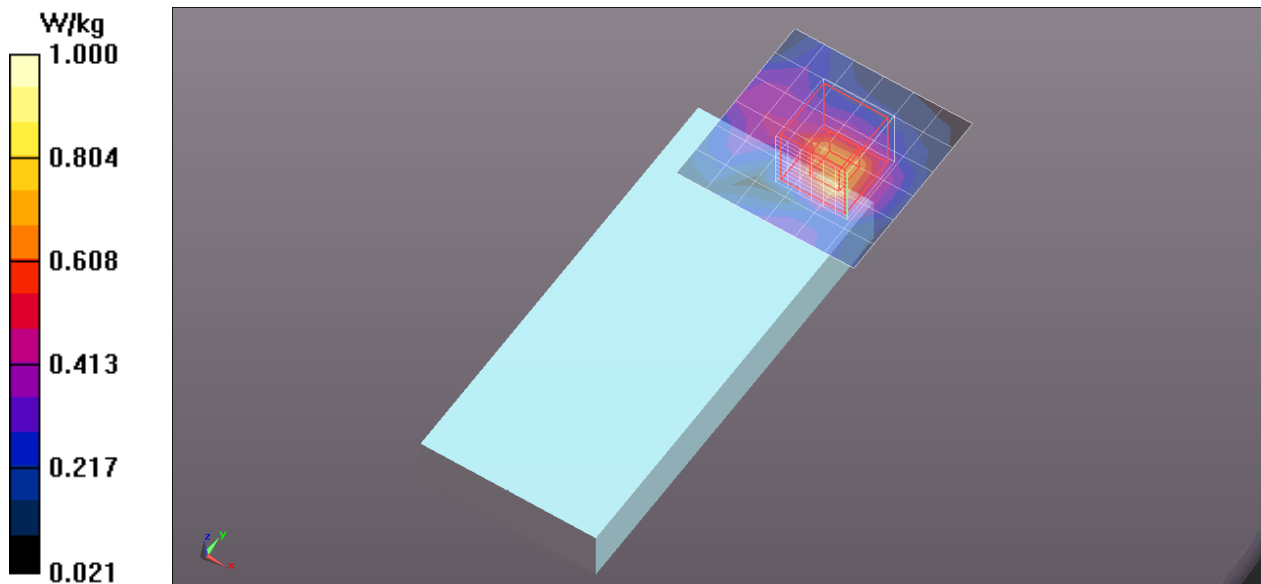

WiFi 5.2GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.071$ S/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11ac/CH42_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.678 W/kg

Front/Front Touch/802.11ac/CH42_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 4.945 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.175 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 W/kg

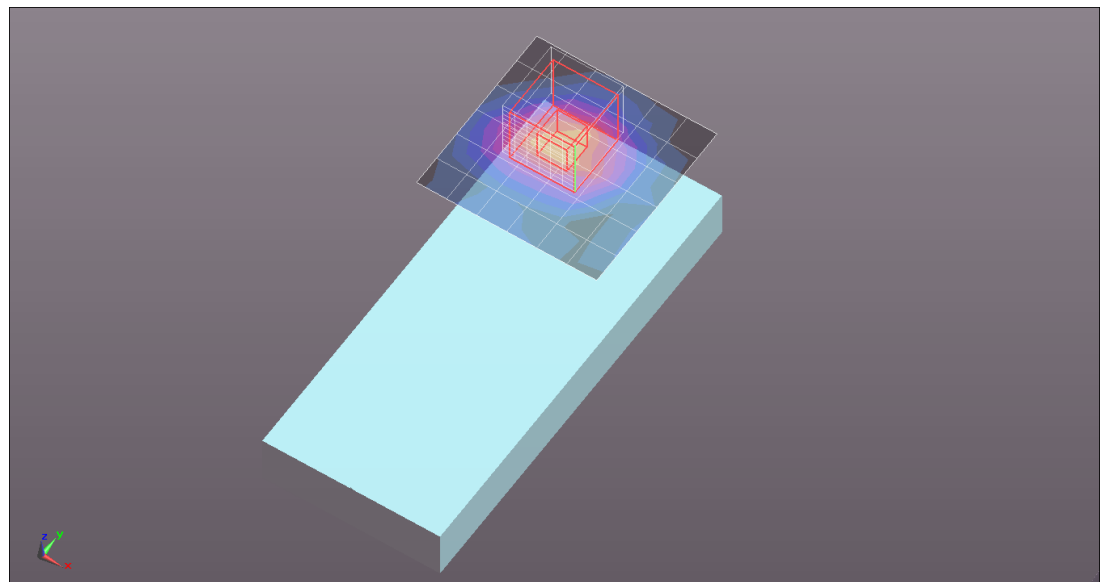

WiFi 5.2GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.071$ S/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11ac/CH42_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.668 W/kg

Edge/Edge2/802.11ac/CH42_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 9.251 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.151 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.657 W/kg

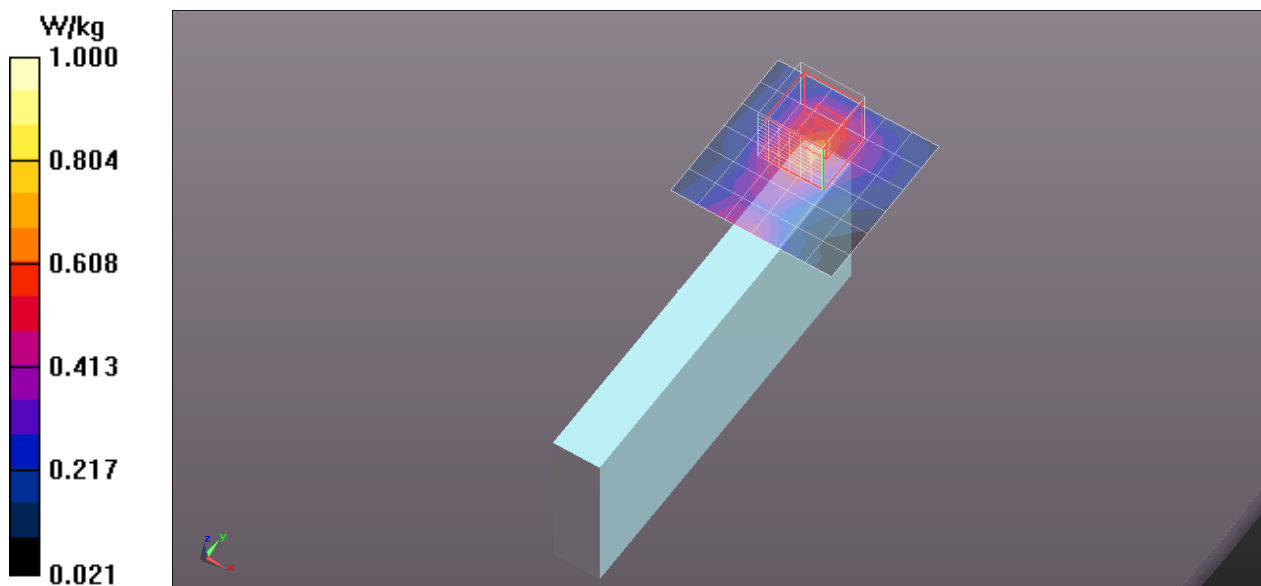

WiFi 5.2GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.071$ S/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11ac/CH42_10mm/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.92 W/kg

Edge/Edge3/802.11ac/CH42_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.122 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.307 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.74 W/kg

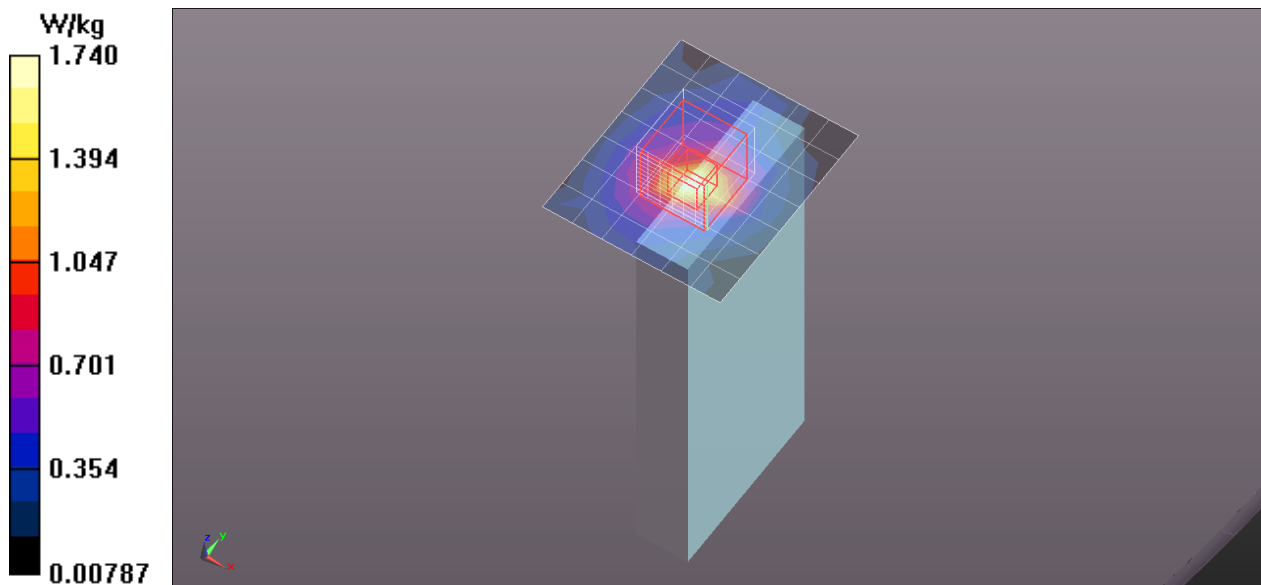

WiFi 5.8GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5765.5$ MHz; $\sigma = 5.818$ S/m; $\epsilon_r = 47.18$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/CH153_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.05 W/kg


Rear/Rear Touch/802.11a/CH153_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.917 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

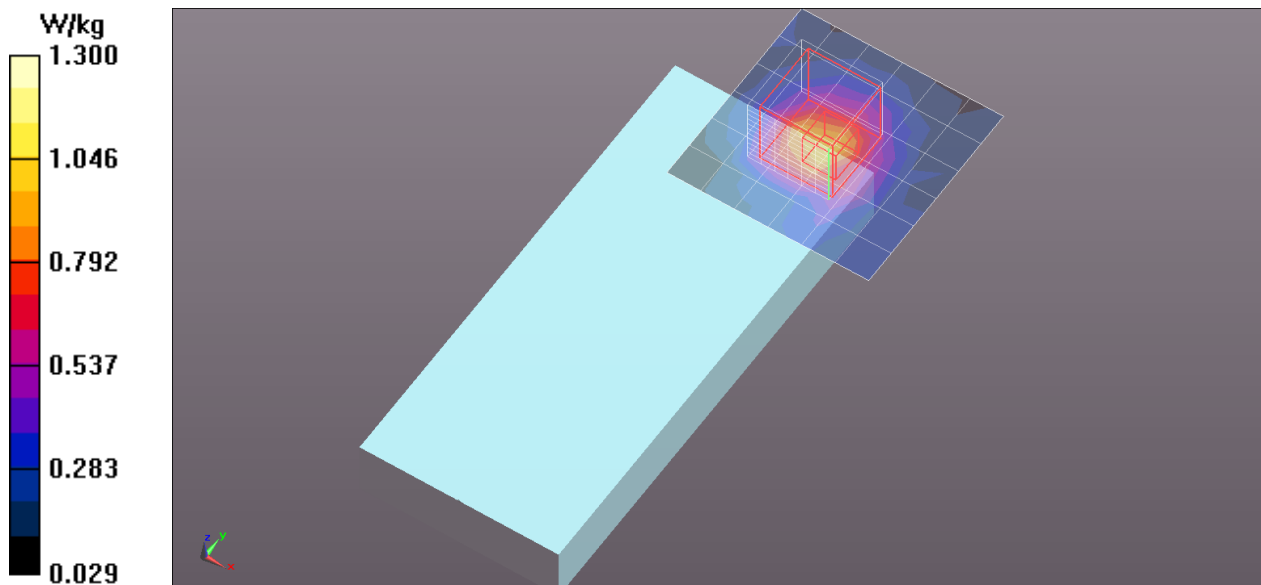

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 5.868$ S/m; $\epsilon_r = 47.103$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/CH161_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.296 W/kg

Rear/Rear Touch/802.11a/CH161_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.511 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.352 W/kg

Maximum value of SAR (measured) = 0.684 W/kg

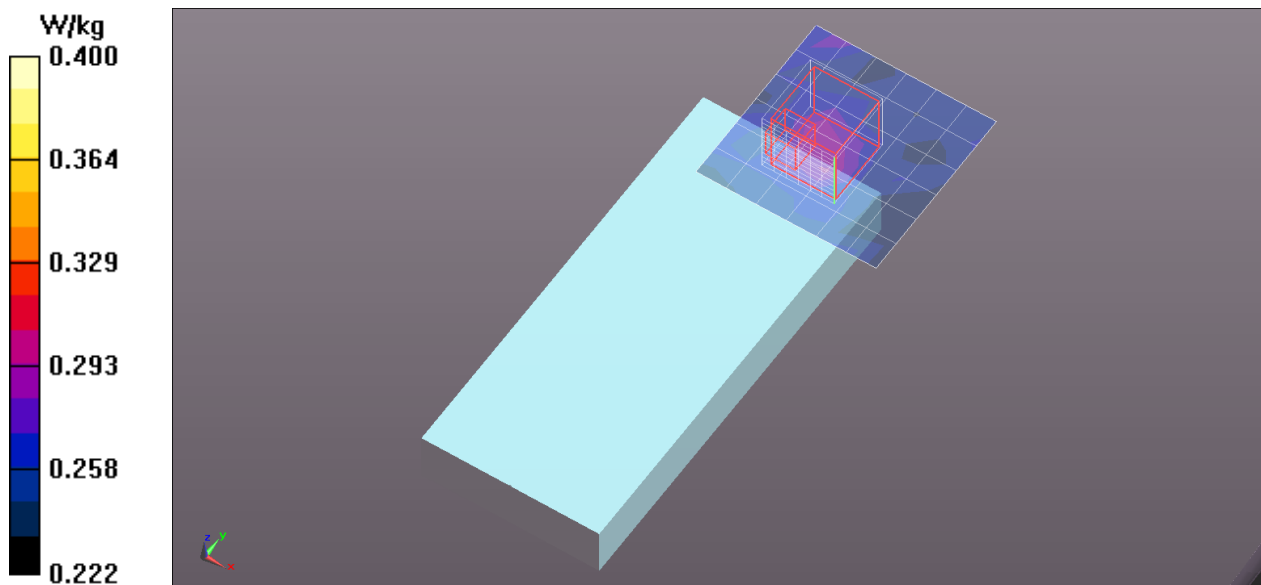

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 46.885$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/CH165_10mm/Area Scan 2 (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.742 W/kg

Rear/Rear Touch/802.11a/CH165_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.241 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.173 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.783 W/kg

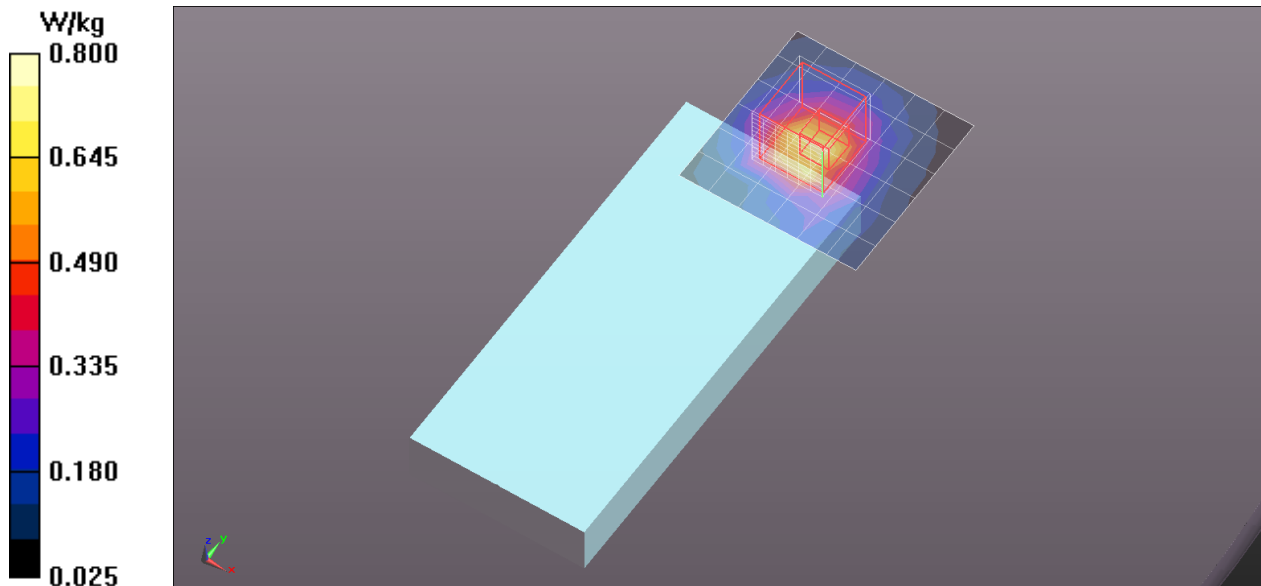

WiFi 5.8GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5765.5$ MHz; $\sigma = 5.818$ S/m; $\epsilon_r = 47.18$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11a/CH153_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.472 W/kg


Front/Front Touch/802.11a/CH153_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.430 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.518 W/kg

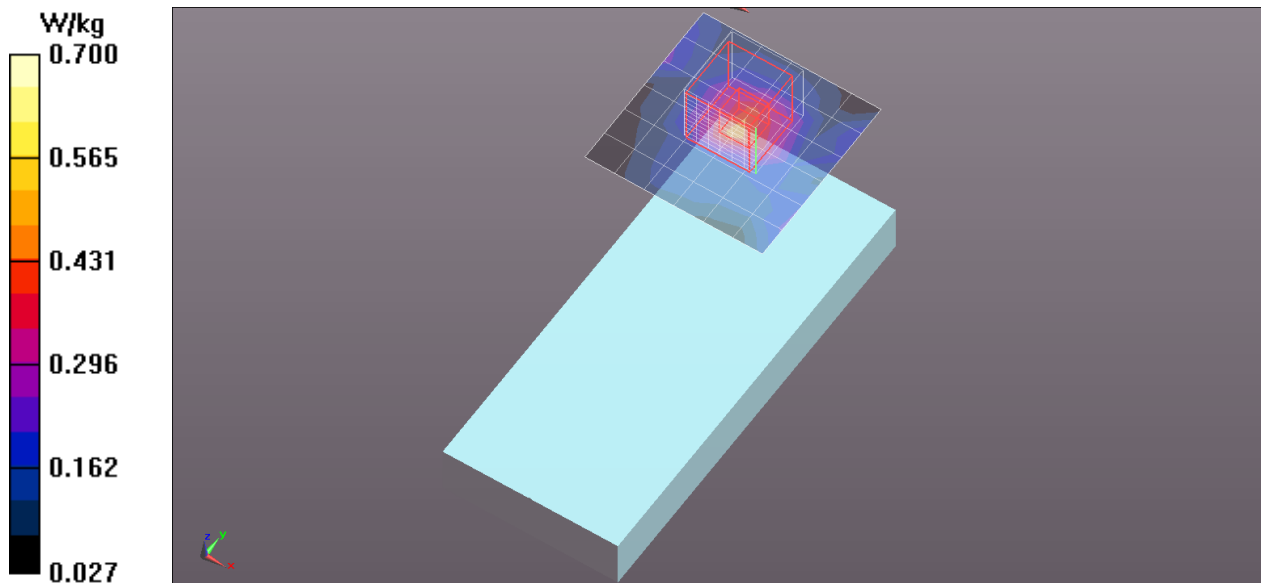

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.012$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11a/CH161_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.411 W/kg


Front/Front Touch/802.11a/CH161_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.452 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

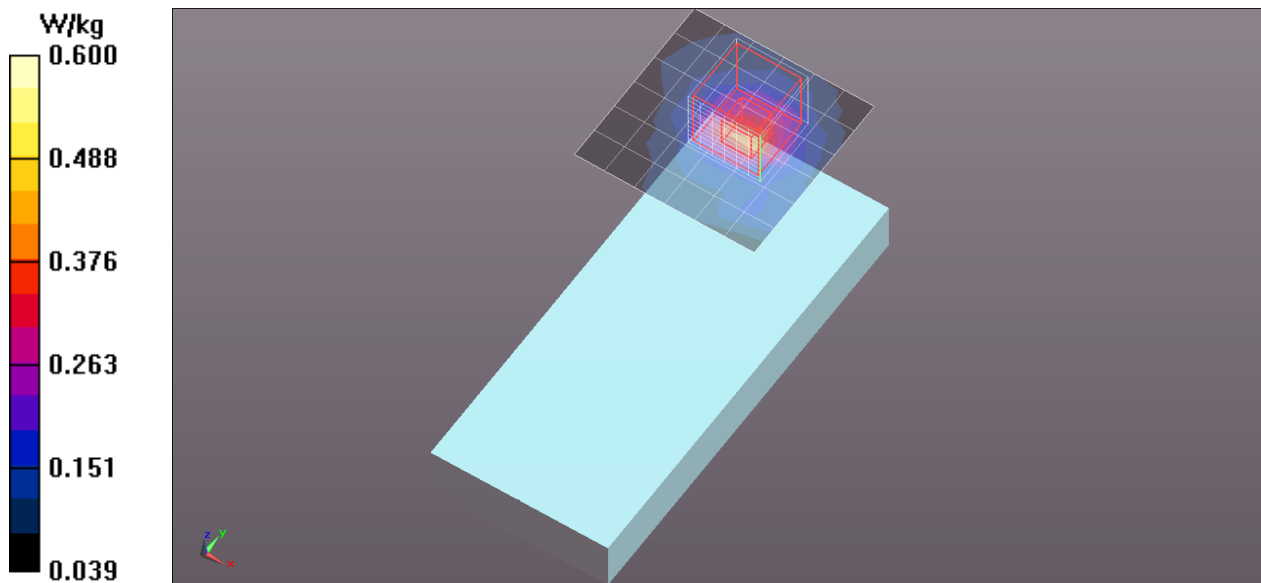

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.012$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11a/CH165_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.878 W/kg


Front/Front Touch/802.11a/CH165_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.001 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.403 W/kg

Maximum value of SAR (measured) = 0.866 W/kg

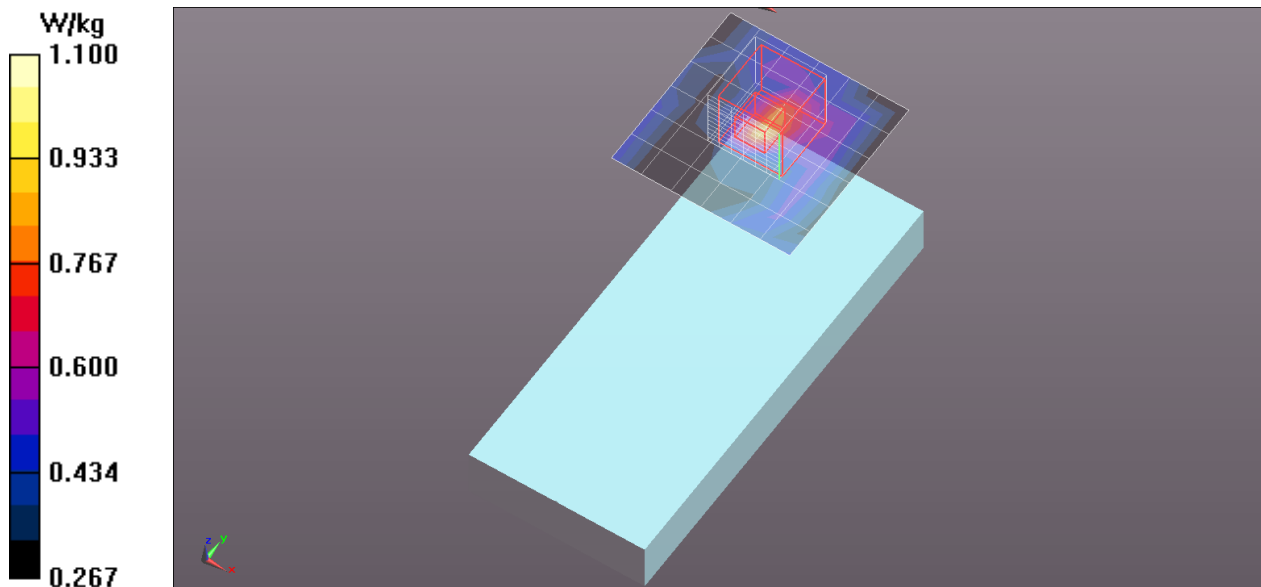

WiFi 5.8GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5765.5$ MHz; $\sigma = 5.818$ S/m; $\epsilon_r = 47.18$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH153_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.565 W/kg


Edge/Edge2/802.11a/CH153_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.324 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.678 W/kg

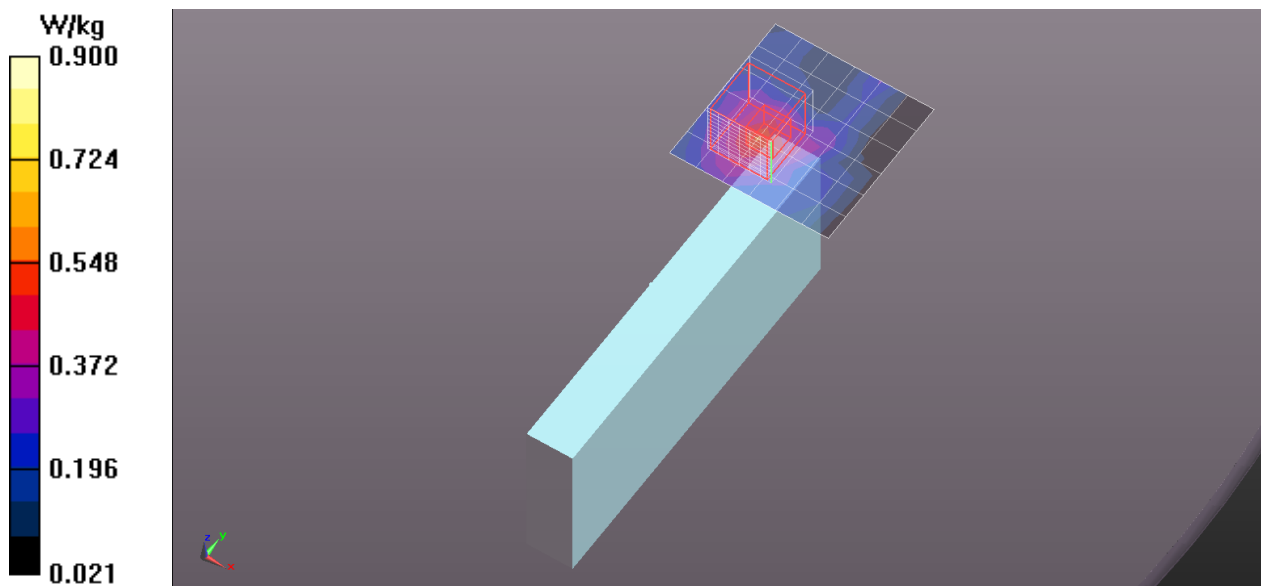

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.012$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH161_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.759 W/kg


Edge/Edge2/802.11a/CH161_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.304 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

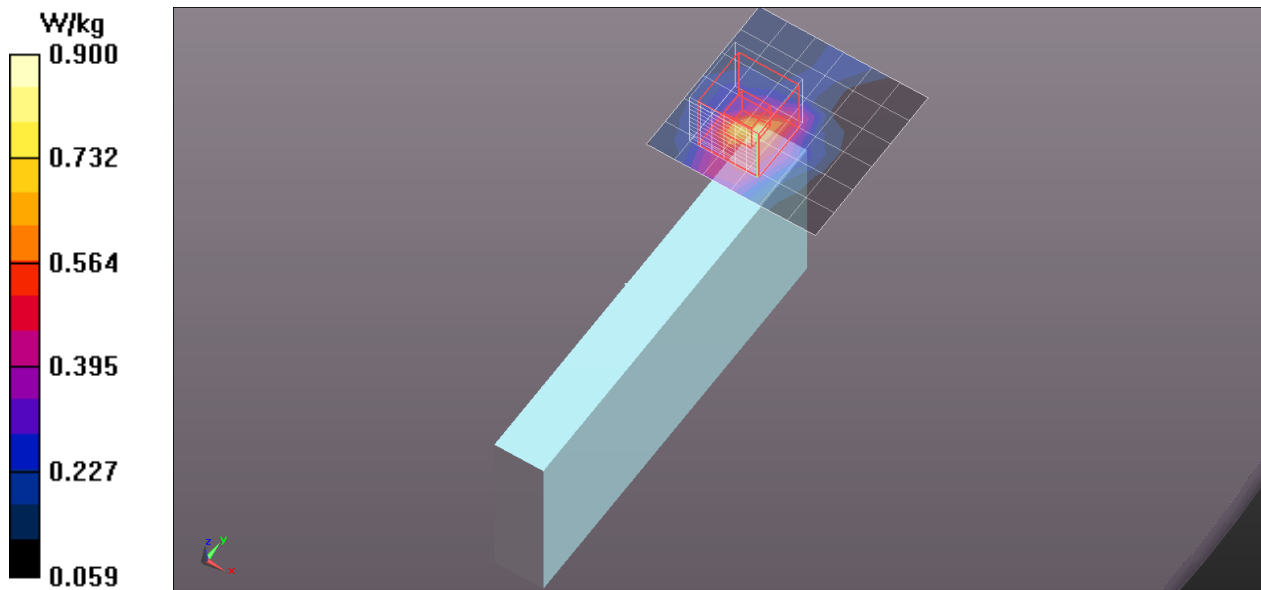

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.012$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH165_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.435 W/kg


Edge/Edge2/802.11a/CH165_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.309 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

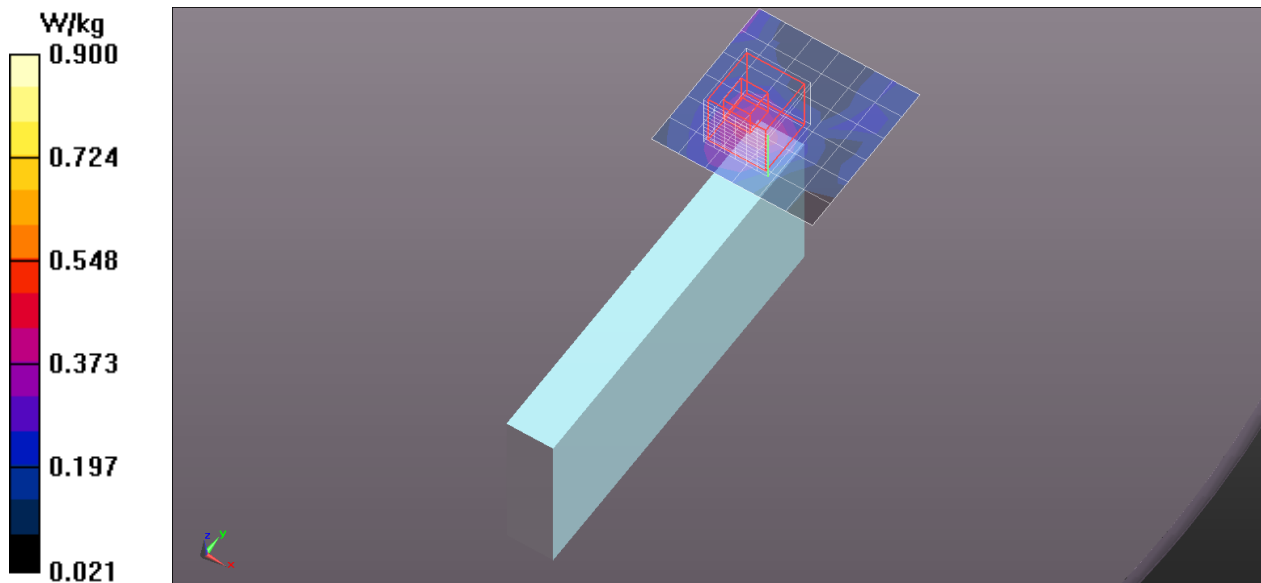

WiFi 5.8GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5765.5$ MHz; $\sigma = 5.818$ S/m; $\epsilon_r = 47.18$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH153_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.38 W/kg

Edge/Edge3/802.11a/CH153_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 9.999 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

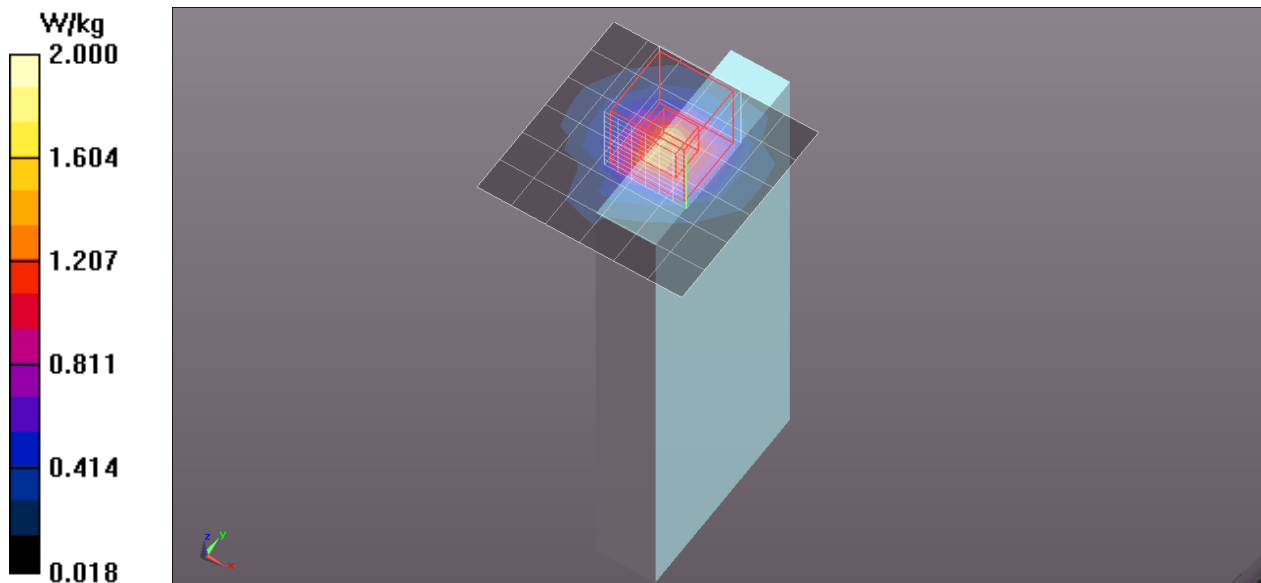

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.012$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH161_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.81 W/kg


Edge/Edge3/802.11a/CH161_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.841 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 1.88 W/kg

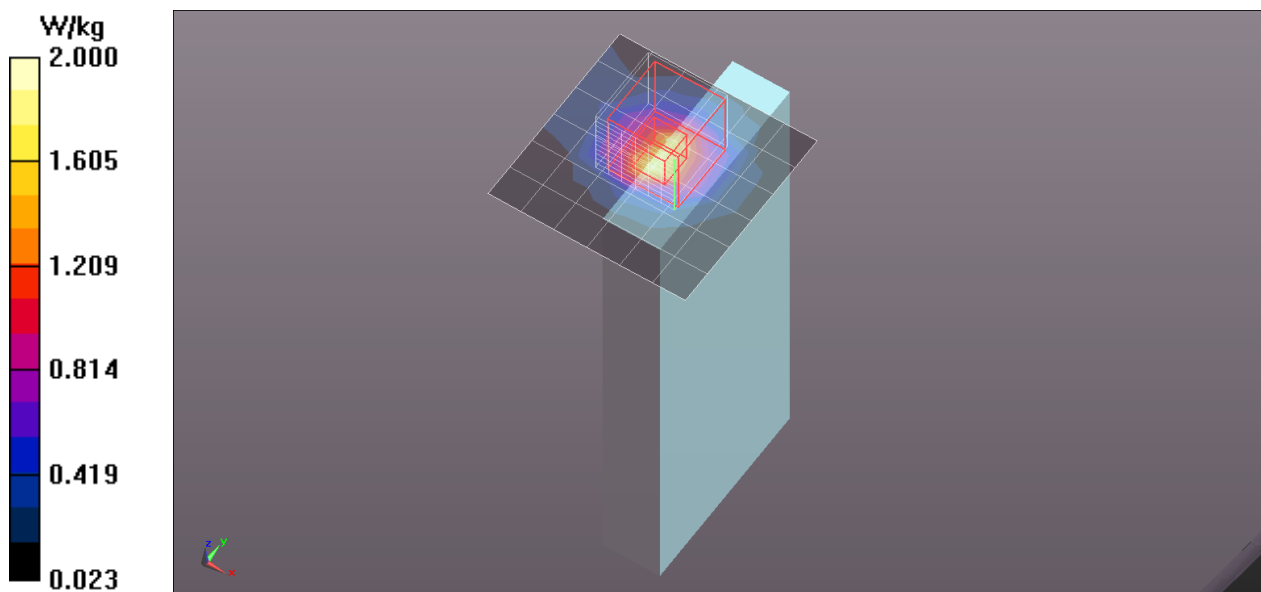

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 46.885$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH165_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.80 W/kg

Edge/Edge3/802.11a/CH165_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.311 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.275 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.91 W/kg

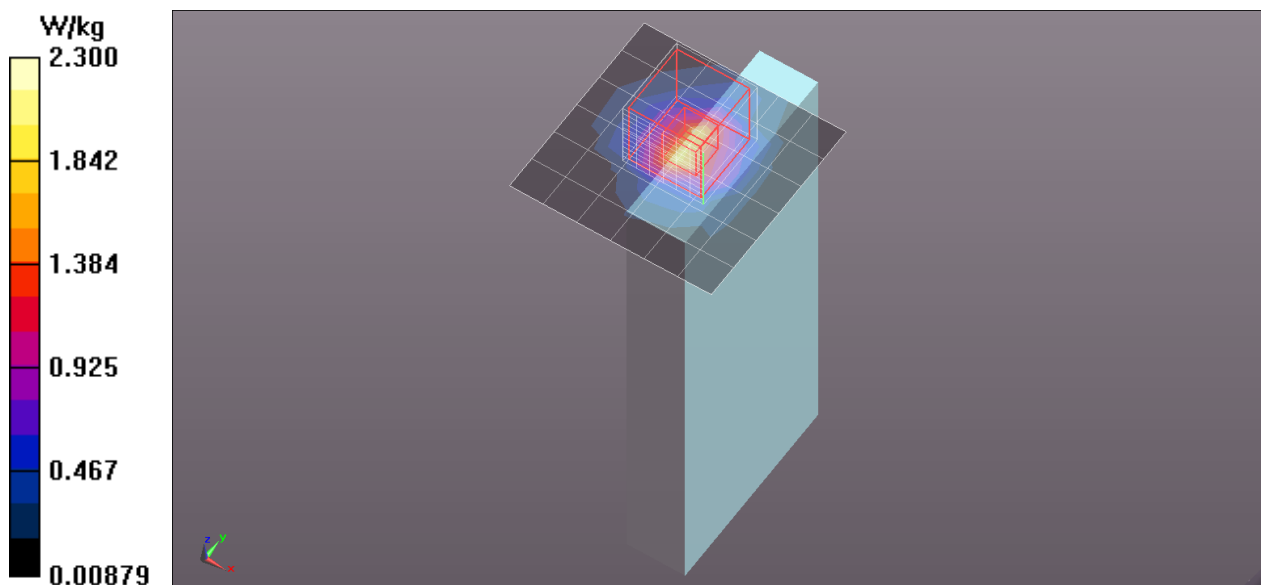

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1

Edge/Edge3/802.11a/CH161_10mm /Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.456 W/kg

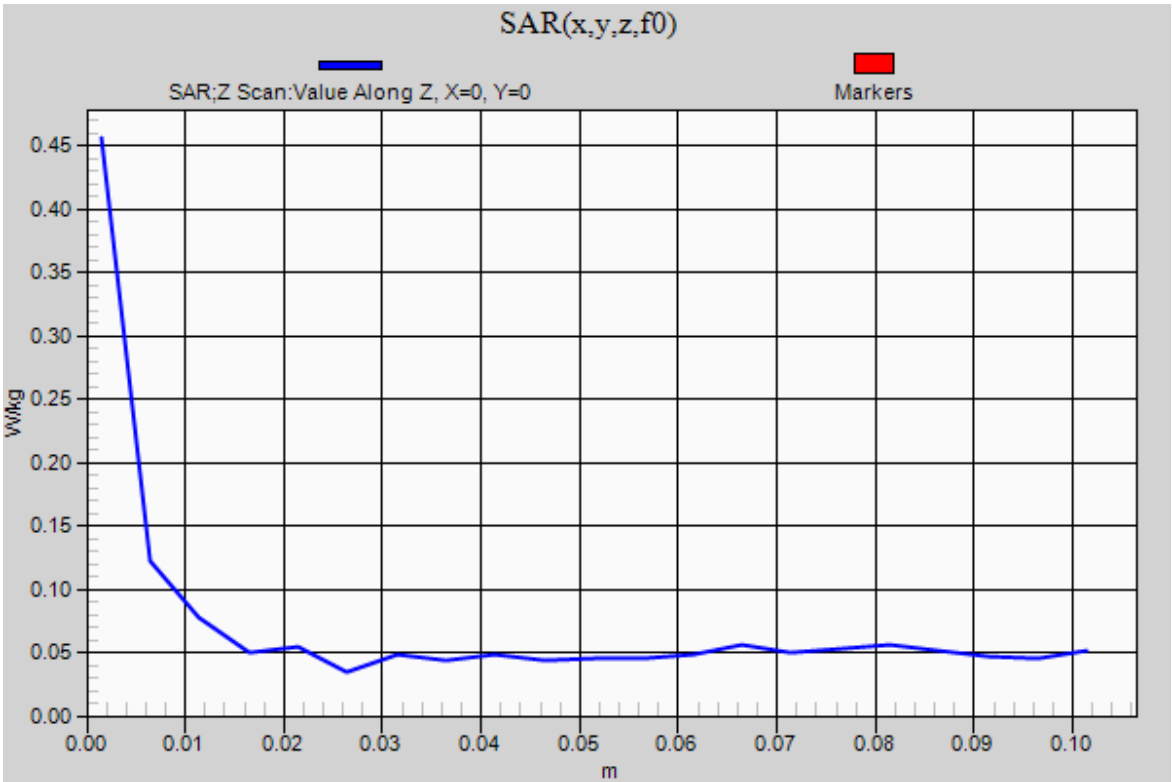

WiFi 5.8GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.962$ S/m; $\epsilon_r = 46.844$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11ac/CH155_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.856 W/kg


Rear/Rear Touch/802.11ac/CH155_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.007 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.872 W/kg

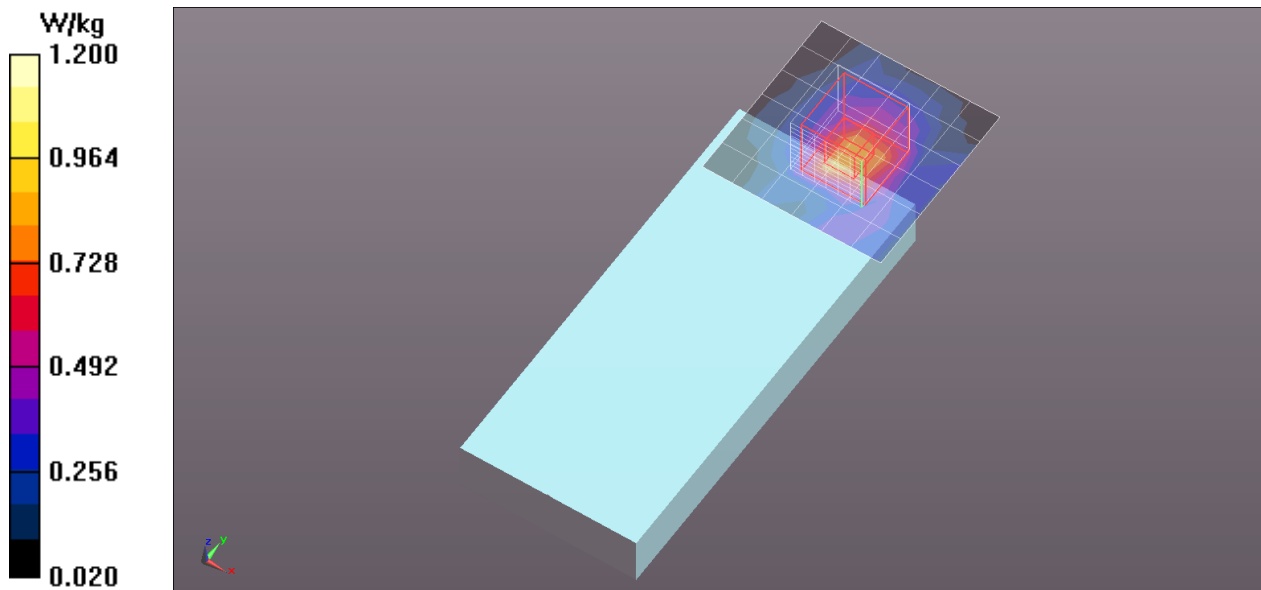

WiFi 5.8GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.962$ S/m; $\epsilon_r = 46.844$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Front Touch/802.11ac/CH155_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.428 W/kg


Front/Front Touch/802.11ac/CH155_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.886 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

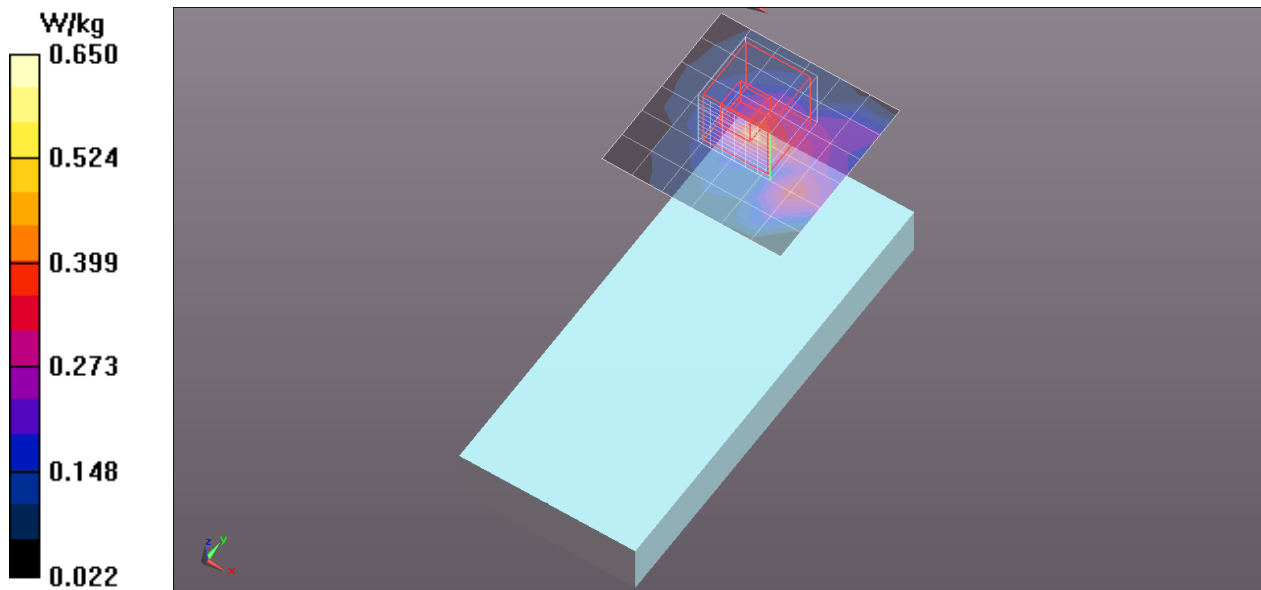

WiFi 5.8GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.962$ S/m; $\epsilon_r = 46.844$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge2/802.11a/CH155_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.611 W/kg


Edge/Edge2/802.11a/CH155_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.212 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.610 W/kg

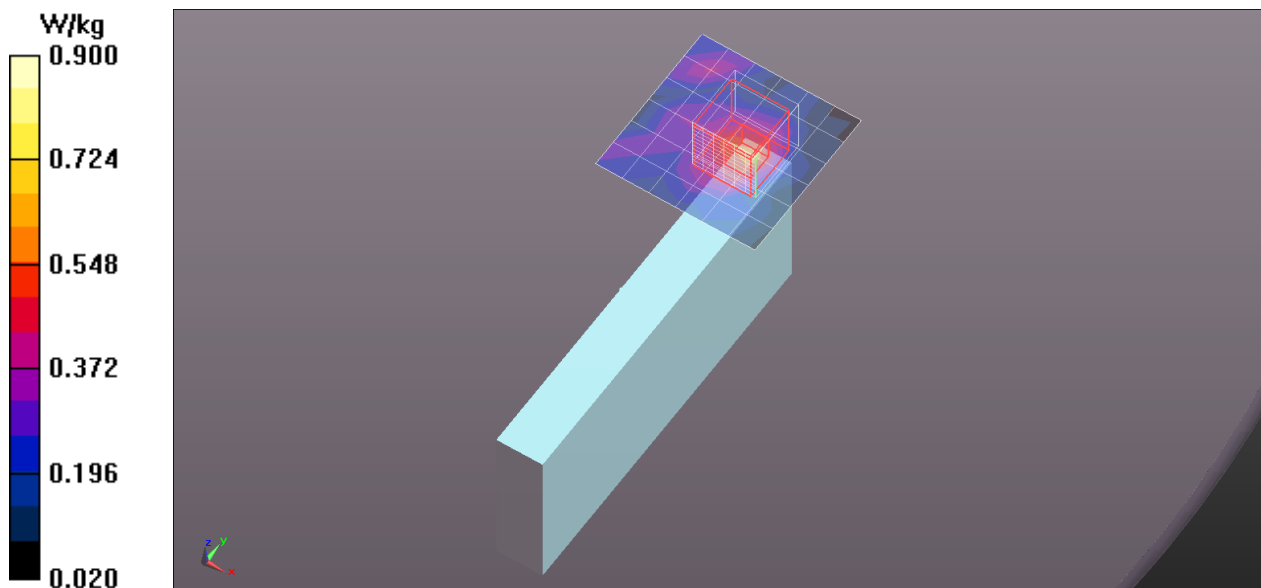

WiFi 5.8GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.962$ S/m; $\epsilon_r = 46.844$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH155_10mm/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.59 W/kg


Edge/Edge3/802.11a/CH155_10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.652 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

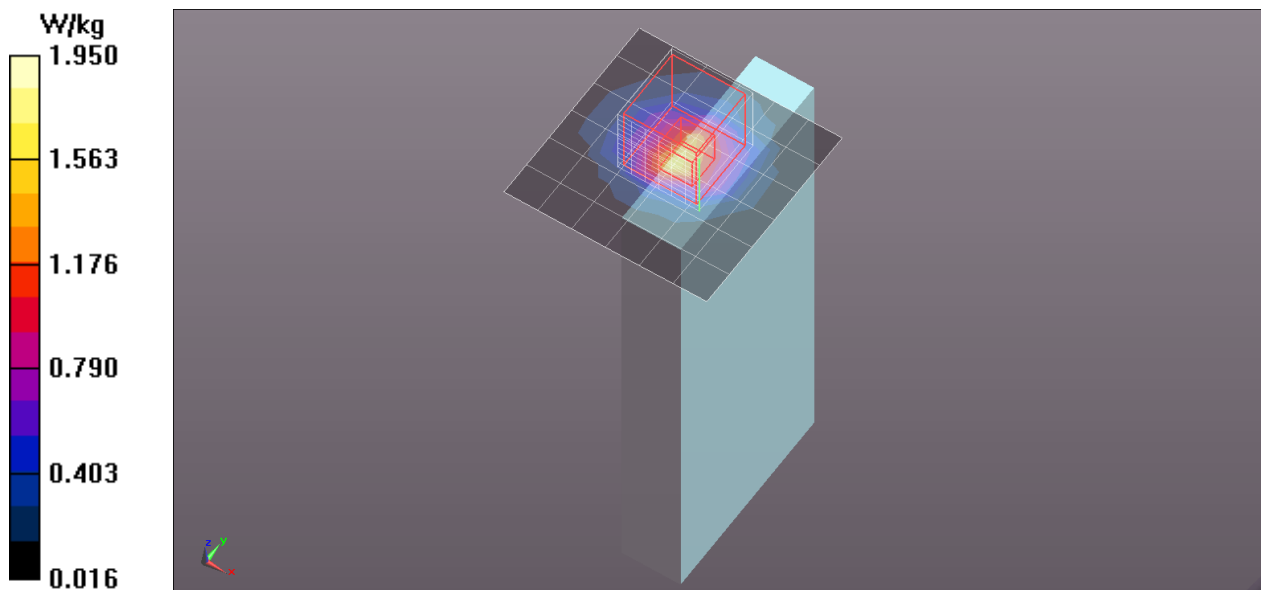

WiFi 5.8GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.962$ S/m; $\epsilon_r = 46.844$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH155_10mm_Repeat/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.74 W/kg

Edge/Edge3/802.11a/CH155_10mm_Repeat/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.666 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 2.06 W/kg

