



A D T

FCC TEST REPORT

REPORT NO.: RF980821L07

MODEL NO.: DIR-615E1 (refer to item 3.1 for more details)

RECEIVED: Jul. 16, 2009

TESTED: Aug. 25 ~ Aug. 27, 2009

ISSUED: Sep. 04, 2009

APPLICANT: D-Link Corporation

ADDRESS: 17595 Mt. Herrmann, Fountain Valley, CA 92708,
U.S.A.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 104 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD.....	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	32
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	32
4.2.2	TEST INSTRUMENTS.....	32
4.2.3	TEST PROCEDURES	33
4.2.4	DEVIATION FROM TEST STANDARD.....	33
4.2.5	TEST SETUP	34
4.2.6	EUT OPERATING CONDITIONS	34
4.2.7	TEST RESULTS	35
4.3	6dB BANDWIDTH MEASUREMENT	43
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	43
4.3.2	TEST INSTRUMENTS.....	43
4.3.3	TEST PROCEDURE.....	43
4.3.4	DEVIATION FROM TEST STANDARD.....	43
4.3.5	TEST SETUP	44
4.3.6	EUT OPERATING CONDITIONS	44
4.3.7	TEST RESULTS	45
4.4	MAXIMUM PEAK OUTPUT POWER.....	61

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	61
4.4.2	INSTRUMENTS	61
4.4.3	TEST PROCEDURES	61
4.4.4	DEVIATION FROM TEST STANDARD.....	62
4.4.5	TEST SETUP	62
4.4.6	EUT OPERATING CONDITIONS	62
4.4.7	TEST RESULTS	63
4.5	POWER SPECTRAL DENSITY MEASUREMENT	65
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	65
4.5.2	TEST INSTRUMENTS.....	65
4.5.3	TEST PROCEDURE.....	65
4.5.4	DEVIATION FROM TEST STANDARD.....	66
4.5.5	TEST SETUP.....	66
4.5.6	EUT OPERATING CONDITION.....	66
4.5.7	TEST RESULTS	67
4.6	BAND EDGES MEASUREMENT	83
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	83
4.6.2	TEST INSTRUMENTS.....	83
4.6.3	TEST PROCEDURE.....	84
4.6.4	DEVIATION FROM TEST STANDARD.....	84
4.6.5	EUT OPERATING CONDITION.....	84
4.6.6	TEST RESULTS	85
4.7	ANTENNA REQUIREMENT	101
4.7.1	STANDARD APPLICABLE	101
4.7.2	ANTENNA CONNECTED CONSTRUCTION	101
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	102
6.	INFORMATION ON THE TESTING LABORATORIES	103
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	104



A D T

1. CERTIFICATION

PRODUCT: D-Link DIR-615 Wireless N Router

MODEL: DIR-615E1 (refer to item 3.1 for more details)

BRAND: D-Link

APPLICANT: D-Link Corporation

TEST SAMPLE: ENGINEERING SAMPLE


TESTED: Aug. 25 ~ Aug. 27, 2009


STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: DIR-615E1, DIR-615E2) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Sep, 04, 2009
Joanna Wang / Senior Specialist

TECHNICAL ACCEPTANCE :  , **DATE** : Sep. 04, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY :  , **DATE** : Sep. 04, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.38dB at 0.150MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.02dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	2.93dB
	200MHz ~1000MHz	2.95dB
	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	D-Link DIR-615 Wireless N Router
MODEL NO.	DIR-615E1 (refer to NOTE 1 for more details)
FCC ID	KA2IR615E1
POWER SUPPLY	5Vdc from adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 270.0Mbps
OPERATING FREQUENCY	2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
OUTPUT POWER	364.38mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICES	Adapter

NOTE:

- The following models are provided to this EUT.

MODEL	DIFFERENCE
DIR-615E1	Fixed antenna
DIR-615E2	Detachable antenna

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
Draft 802.11n (20MHz)	2TX
Draft 802.11n (40MHz)	2TX

- The EUT uses following adapters.

ADAPTER 1	
BRAND	D-Link
MODEL	AMS1-0501200FU
INPUT POWER	100-240Vac, 50/60Hz, 0.2A
OUTPUT POWER	5Vdc, 1.2A
POEWR LINE	1.8m non-shielded cable without core

ADAPTER 2	
BRAND	D-Link
MODEL	CF0605-B IW
INPUT POWER	100-240Vac, 50-60Hz, 0.18A
OUTPUT POWER	5Vdc, 1.2A
POEWR LINE	1.8m non-shielded cable without core

4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


11 channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

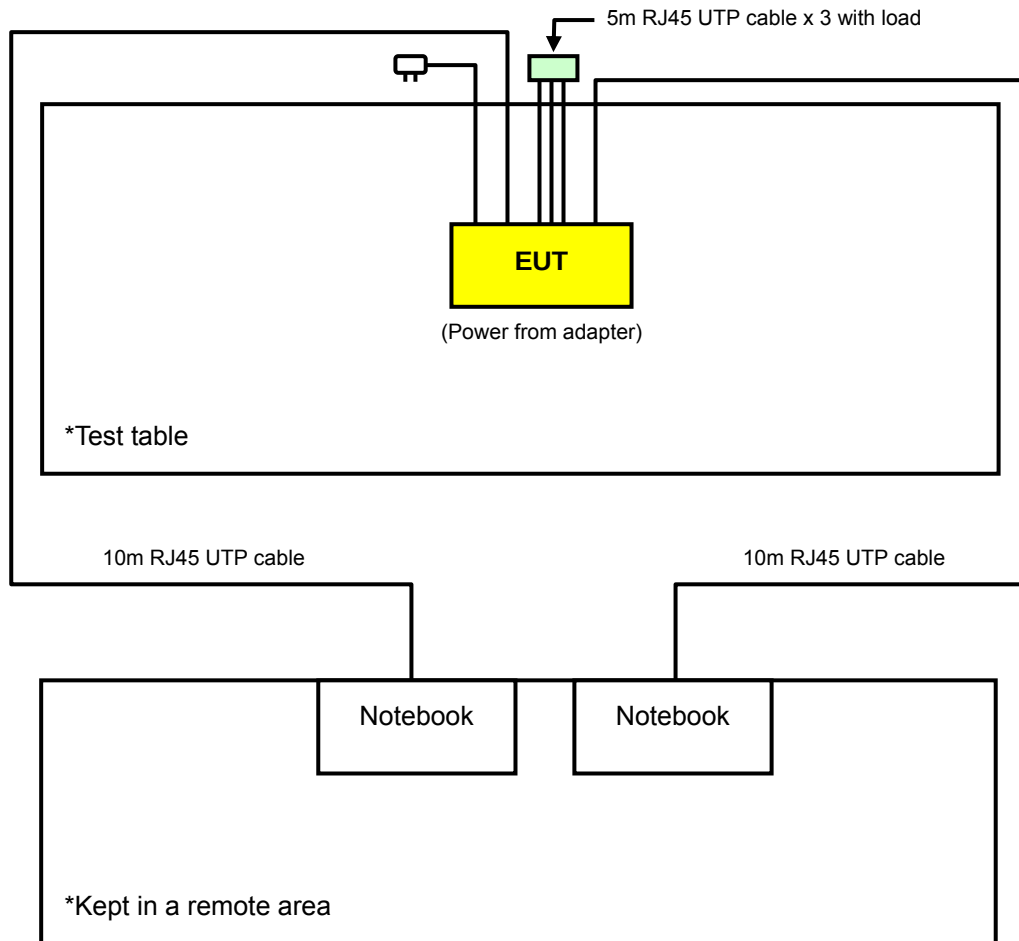

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	-	√	√	-	DIR-615E1 + Adapter 1
B	√	√	√	√	DIR-615E1 + Adapter 2
C	-	√	√	-	DIR-615E2 + Adapter 1
D	-	√	√	-	DIR-615E2 + Adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	X
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	
	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	
	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A, B, C, D	802.11g	1 to 11	6	OFDM	BPSK	6.0	X

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D	802.11g	1 to 11	6	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	16484462992	E2K24CLNS
2	NOTEBOOK	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable.
2	10m RJ45 UTP cable.

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1~2 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2009	Apr. 29, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 10, 2009	Aug. 09, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 13, 2009	May 12, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 17, 2009	Aug. 16, 2010
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

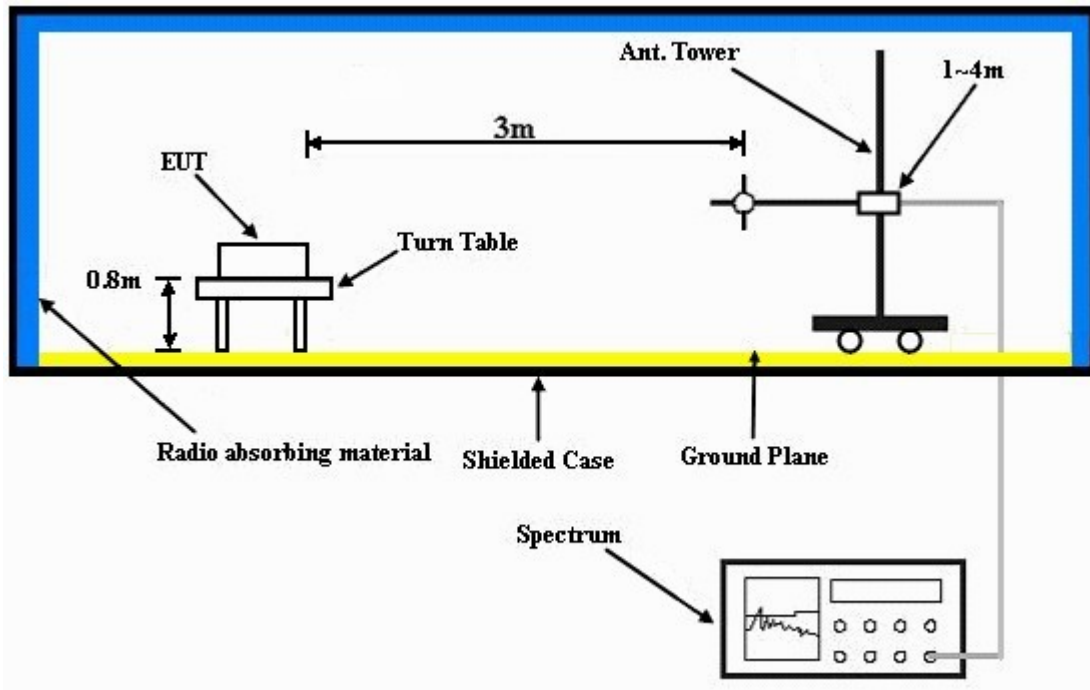

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared two notebook systems outside of testing area to act as communication partner.
- The communication partners connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".



A D T

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.03 PK	74.00	-17.97	1.34 H	303	23.81	32.22
2	2390.00	45.44 AV	54.00	-8.56	1.34 H	303	13.22	32.22
3	*2412.00	101.53 PK			1.34 H	303	69.23	32.30
4	*2412.00	96.76 AV			1.34 H	303	64.46	32.30
5	2496.00	57.67 PK	74.00	-16.33	1.33 H	303	25.06	32.61
6	2496.00	45.53 AV	54.00	-8.47	1.33 H	303	12.92	32.61
7	4824.00	49.00 PK	74.00	-25.00	1.28 H	292	10.67	38.33
8	4824.00	42.58 AV	54.00	-11.42	1.28 H	292	4.25	38.33
9	#7236.00	51.80 PK	81.53	-29.73	1.22 H	209	7.35	44.45
10	#7236.00	39.49 AV	76.76	-37.27	1.22 H	209	-4.96	44.45
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.34 PK	74.00	-15.66	1.10 V	287	26.12	32.22
2	2390.00	47.71 AV	54.00	-6.29	1.10 V	287	15.49	32.22
3	*2412.00	112.41 PK			1.10 V	287	80.11	32.30
4	*2412.00	107.31 AV			1.10 V	287	75.01	32.30
5	2496.00	58.85 PK	74.00	-15.15	1.13 V	354	26.24	32.61
6	2496.00	49.64 AV	54.00	-4.36	1.13 V	354	17.03	32.61
7	4824.00	49.48 PK	74.00	-24.52	1.12 V	223	11.15	38.33
8	4824.00	44.21 AV	54.00	-9.79	1.12 V	223	5.88	38.33
9	#7236.00	52.83 PK	92.41	-39.58	1.22 V	196	8.38	44.45
10	#7236.00	41.89 AV	87.31	-45.42	1.22 V	196	-2.56	44.45

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2349.00	57.06 PK	74.00	-16.94	1.30 H	210	25.00	32.06
2	2349.00	46.40 AV	54.00	-7.60	1.30 H	210	14.34	32.06
3	*2437.00	101.62 PK			1.30 H	210	69.23	32.39
4	*2437.00	96.83 AV			1.30 H	210	64.44	32.39
5	4874.00	49.37 PK	74.00	-24.63	1.00 H	347	10.96	38.41
6	4874.00	42.60 AV	54.00	-11.40	1.00 H	347	4.19	38.41
7	7311.00	51.83 PK	74.00	-22.17	1.36 H	94	7.19	44.64
8	7311.00	39.67 AV	54.00	-14.33	1.36 H	94	-4.97	44.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2349.00	58.83 PK	74.00	-15.17	1.12 V	280	26.77	32.06
2	2349.00	47.90 AV	54.00	-6.10	1.12 V	280	15.84	32.06
3	*2437.00	112.56 PK			1.12 V	280	80.17	32.39
4	*2437.00	107.58 AV			1.12 V	280	75.19	32.39
5	4874.00	50.01 PK	74.00	-23.99	1.09 V	7	11.60	38.41
6	4874.00	44.66 AV	54.00	-9.34	1.09 V	7	6.25	38.41
7	7311.00	54.07 PK	74.00	-19.93	1.29 V	195	9.44	44.64
8	7311.00	43.89 AV	54.00	-10.11	1.29 V	195	-0.74	44.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2377.00	58.37 PK	74.00	-15.63	1.25 H	226	26.20	32.17
2	2377.00	48.32 AV	54.00	-5.68	1.25 H	226	16.15	32.17
3	*2462.00	101.78 PK			1.25 H	226	69.30	32.48
4	*2462.00	96.90 AV			1.25 H	226	64.42	32.48
5	2483.50	55.34 PK	74.00	-18.66	1.12 H	300	22.78	32.56
6	2483.50	45.57 AV	54.00	-8.43	1.12 H	300	13.01	32.56
7	4924.00	50.01 PK	74.00	-23.99	1.11 H	157	11.50	38.51
8	4924.00	42.68 AV	54.00	-11.32	1.11 H	157	4.17	38.51
9	7386.00	51.94 PK	74.00	-22.06	1.52 H	6	7.11	44.83
10	7386.00	40.15 AV	54.00	-13.85	1.52 H	6	-4.68	44.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2377.00	59.65 PK	74.00	-14.35	1.24 V	22	27.48	32.17
2	2377.00	49.69 AV	54.00	-4.31	1.24 V	22	17.52	32.17
3	*2462.00	112.80 PK			1.11 V	289	80.32	32.48
4	*2462.00	107.68 AV			1.11 V	289	75.20	32.48
5	2483.50	56.29 PK	74.00	-17.71	1.11 V	289	23.73	32.56
6	2483.50	46.91 AV	54.00	-7.09	1.11 V	289	14.35	32.56
7	4924.00	50.79 PK	74.00	-23.21	1.01 V	174	12.28	38.51
8	4924.00	45.63 AV	54.00	-8.37	1.01 V	174	7.12	38.51
9	7386.00	53.94 PK	74.00	-20.06	1.01 V	113	9.11	44.83
10	7386.00	41.59 AV	54.00	-12.41	1.01 V	113	-3.24	44.83

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2372.00	63.01 PK	74.00	-10.99	1.09 H	41	30.86	32.15
2	2372.00	46.79 AV	54.00	-7.21	1.09 H	41	14.64	32.15
3	2390.00	62.10 PK	74.00	-11.90	1.09 H	41	29.88	32.22
4	2390.00	46.48 AV	54.00	-7.52	1.09 H	41	14.26	32.22
5	*2412.00	101.08 PK			1.09 H	41	68.78	32.30
6	*2412.00	91.33 AV			1.09 H	41	59.03	32.30
7	4824.00	45.17 PK	74.00	-28.83	1.00 H	158	6.84	38.33
8	4824.00	33.18 AV	54.00	-20.82	1.00 H	158	-5.15	38.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2372.00	65.79 PK	74.00	-8.21	1.23 V	35	33.64	32.15
2	2372.00	52.58 AV	54.00	-1.42	1.23 V	35	20.43	32.15
3	2390.00	68.81 PK	74.00	-5.19	1.21 V	7	36.59	32.22
4	2390.00	51.00 AV	54.00	-3.00	1.21 V	7	18.78	32.22
5	*2412.00	113.31 PK			1.21 V	7	81.01	32.30
6	*2412.00	101.22 AV			1.21 V	7	68.92	32.30
7	4824.00	46.17 PK	74.00	-27.83	1.21 V	108	7.84	38.33
8	4824.00	33.94 AV	54.00	-20.06	1.21 V	108	-4.39	38.33

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.67 PK	74.00	-16.33	1.00 H	115	25.45	32.22
2	2390.00	46.52 AV	54.00	-7.48	1.00 H	115	14.30	32.22
3	*2437.00	101.21 PK			1.00 H	115	68.82	32.39
4	*2437.00	91.46 AV			1.00 H	115	59.07	32.39
5	2483.50	57.11 PK	74.00	-16.89	1.11 H	115	24.55	32.56
6	2483.50	45.85 AV	54.00	-8.15	1.11 H	115	13.29	32.56
7	4874.00	46.66 PK	74.00	-27.34	1.02 H	115	8.25	38.41
8	4874.00	34.19 AV	54.00	-19.81	1.02 H	115	-4.22	38.41
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.43 PK	74.00	-7.57	1.19 V	1	34.21	32.22
2	2390.00	52.76 AV	54.00	-1.24	1.19 V	1	20.54	32.22
3	*2437.00	113.46 PK			1.21 V	1	81.07	32.39
4	*2437.00	101.67 AV			1.21 V	1	69.28	32.39
5	2483.50	63.69 PK	74.00	-10.31	1.11 V	18	31.13	32.56
6	2483.50	51.81 AV	54.00	-2.19	1.11 V	18	19.25	32.56
7	4874.00	46.80 PK	74.00	-27.20	1.11 V	125	8.39	38.41
8	4874.00	34.84 AV	54.00	-19.16	1.11 V	125	-3.57	38.41

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.38 PK			1.10 H	39	68.90	32.48
2	*2462.00	91.74 AV			1.10 H	39	59.26	32.48
3	2483.50	65.34 PK	74.00	-8.66	1.10 H	39	32.78	32.56
4	2483.50	46.53 AV	54.00	-7.47	1.10 H	39	13.97	32.56
5	2498.00	62.79 PK	74.00	-11.21	1.10 H	39	30.18	32.61
6	2498.00	46.66 AV	54.00	-7.34	1.10 H	39	14.05	32.61
7	4924.00	47.86 PK	74.00	-26.14	1.00 H	3	9.35	38.51
8	4924.00	35.61 AV	54.00	-18.39	1.00 H	3	-2.90	38.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.59 PK			1.17 V	359	81.11	32.48
2	*2462.00	101.47 AV			1.17 V	359	68.99	32.48
3	2483.50	71.53 PK	74.00	-2.47	1.16 V	0	38.97	32.56
4	2483.50	51.89 AV	54.00	-2.11	1.16 V	0	19.33	32.56
5	2498.00	63.79 PK	74.00	-10.21	1.11 V	359	31.18	32.61
6	2498.00	52.70 AV	54.00	-1.30	1.11 V	359	20.09	32.61
7	4924.00	47.70 PK	74.00	-26.30	1.01 V	122	9.18	38.51
8	4924.00	35.44 AV	54.00	-18.56	1.01 V	122	-3.08	38.51

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2373.00	57.37 PK	74.00	-16.63	1.02 H	228	25.22	32.15
2	2373.00	45.68 AV	54.00	-8.32	1.02 H	228	13.53	32.15
3	2390.00	61.68 PK	74.00	-12.32	1.02 H	227	29.46	32.22
4	2390.00	46.59 AV	54.00	-7.41	1.02 H	227	14.37	32.22
5	*2412.00	101.23 PK			1.02 H	227	68.93	32.30
6	*2412.00	88.34 AV			1.02 H	227	56.04	32.30
7	4824.00	45.79 PK	74.00	-28.21	1.01 H	133	7.46	38.33
8	4824.00	33.44 AV	54.00	-20.56	1.01 H	133	-4.89	38.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2373.00	64.52 PK	74.00	-9.48	1.00 V	11	32.37	32.15
2	2373.00	52.64 AV	54.00	-1.36	1.00 V	11	20.49	32.15
3	2390.00	68.97 PK	74.00	-5.03	1.00 V	11	36.75	32.22
4	2390.00	49.70 AV	54.00	-4.30	1.00 V	11	17.48	32.22
5	*2412.00	112.23 PK			1.00 V	204	79.93	32.30
6	*2412.00	100.09 AV			1.00 V	204	67.79	32.30
7	4824.00	47.75 PK	74.00	-26.25	1.01 V	126	9.42	38.33
8	4824.00	34.14 AV	54.00	-19.86	1.01 V	126	-4.19	38.33

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.19 PK	74.00	-16.81	1.04 H	311	24.97	32.22
2	2390.00	46.48 AV	54.00	-7.52	1.04 H	311	14.26	32.22
3	*2437.00	101.30 PK			1.04 H	311	68.91	32.39
4	*2437.00	88.51 AV			1.04 H	311	56.12	32.39
5	2483.50	56.71 PK	74.00	-17.29	1.11 H	311	24.15	32.56
6	2483.50	46.46 AV	54.00	-7.54	1.11 H	311	13.90	32.56
7	4874.00	45.92 PK	74.00	-28.08	1.22 H	125	7.51	38.41
8	4874.00	33.60 AV	54.00	-20.40	1.22 H	125	-4.81	38.41
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.57 PK	74.00	-9.43	1.15 V	82	32.35	32.22
2	2390.00	51.44 AV	54.00	-2.56	1.15 V	82	19.22	32.22
3	*2437.00	112.64 PK			1.15 V	180	80.25	32.39
4	*2437.00	100.52 AV			1.15 V	180	68.13	32.39
5	2483.50	61.26 PK	74.00	-12.74	1.12 V	62	28.70	32.56
6	2483.50	50.53 AV	54.00	-3.47	1.12 V	62	17.97	32.56
7	4874.00	47.94 PK	74.00	-26.06	1.51 V	206	9.53	38.41
8	4874.00	34.88 AV	54.00	-19.12	1.51 V	206	-3.53	38.41

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.58 PK			1.03 H	220	69.10	32.48
2	*2462.00	88.67 AV			1.03 H	220	56.19	32.48
3	2483.50	58.93 PK	74.00	-15.07	1.03 H	220	26.37	32.56
4	2483.50	46.71 AV	54.00	-7.29	1.03 H	220	14.15	32.56
5	2498.00	57.28 PK	74.00	-16.72	1.04 H	222	24.67	32.61
6	2498.00	46.61 AV	54.00	-7.39	1.04 H	222	14.00	32.61
7	4924.00	46.13 PK	74.00	-27.87	1.52 H	61	7.62	38.51
8	4924.00	33.67 AV	54.00	-20.33	1.52 H	61	-4.84	38.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.98 PK			1.16 V	165	80.50	32.48
2	*2462.00	101.08 AV			1.16 V	165	68.60	32.48
3	2483.50	71.17 PK	74.00	-2.83	1.14 V	140	38.61	32.56
4	2483.50	50.85 AV	54.00	-3.15	1.14 V	140	18.29	32.56
5	2498.00	63.16 PK	74.00	-10.84	1.14 V	181	30.55	32.61
6	2498.00	51.03 AV	54.00	-2.97	1.14 V	181	18.42	32.61
7	4924.00	48.89 PK	74.00	-25.11	1.21 V	115	10.38	38.51
8	4924.00	35.36 AV	54.00	-18.64	1.21 V	115	-3.15	38.51

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.08 PK	74.00	-13.92	1.04 H	154	27.86	32.22
2	2390.00	46.90 AV	54.00	-7.10	1.04 H	154	14.68	32.22
3	*2422.00	97.40 PK			1.04 H	154	65.06	32.34
4	*2422.00	87.65 AV			1.04 H	154	55.31	32.34
5	4844.00	46.14 PK	74.00	-27.86	1.01 H	13	7.78	38.36
6	4844.00	33.32 AV	54.00	-20.68	1.01 H	13	-5.04	38.36
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.98 PK	74.00	-1.02	1.14 V	86	40.76	32.22
2	2390.00	52.91 AV	54.00	-1.09	1.14 V	86	20.69	32.22
3	*2422.00	110.83 PK			1.15 V	161	78.49	32.34
4	*2422.00	96.16 AV			1.15 V	161	63.82	32.34
5	4844.00	45.69 PK	74.00	-28.31	1.11 V	102	7.33	38.36
6	4844.00	34.00 AV	54.00	-20.00	1.11 V	102	-4.36	38.36

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.53 PK			1.36 H	241	65.14	32.39
2	*2437.00	87.70 AV			1.36 H	241	55.31	32.39
3	4874.00	46.25 PK	74.00	-27.75	1.34 H	5	7.84	38.41
4	4874.00	33.41 AV	54.00	-20.59	1.34 H	5	-5.00	38.41
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.86 PK			1.10 V	166	78.47	32.39
2	*2437.00	96.25 AV			1.10 V	166	63.86	32.39
3	4874.00	45.71 PK	74.00	-28.29	1.00 V	208	7.30	38.41
4	4874.00	34.37 AV	54.00	-19.63	1.00 V	208	-4.04	38.41

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.68 PK			1.05 H	136	65.23	32.45
2	*2452.00	87.82 AV			1.05 H	136	55.37	32.45
3	2483.50	60.32 PK	74.00	-13.68	1.05 H	136	27.76	32.56
4	2483.50	47.11 AV	54.00	-6.89	1.05 H	136	14.55	32.56
5	4904.00	46.32 PK	74.00	-27.68	1.20 H	312	7.86	38.46
6	4904.00	33.58 AV	54.00	-20.42	1.20 H	312	-4.88	38.46
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.90 PK			1.08 V	300	78.45	32.45
2	*2452.00	96.35 AV			1.08 V	300	63.90	32.45
3	2483.50	72.45 PK	74.00	-1.55	1.08 V	299	39.89	32.56
4	2483.50	51.91 AV	54.00	-2.09	1.08 V	299	19.35	32.56
5	4904.00	45.76 PK	74.00	-28.24	1.20 V	208	7.30	38.46
6	4904.00	34.55 AV	54.00	-19.45	1.20 V	208	-3.91	38.46

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	144.61	32.60 QP	43.50	-10.90	1.50 H	61	19.43	13.16
2	249.60	34.95 QP	46.00	-11.05	1.50 H	4	22.13	12.81
3	624.85	36.82 QP	46.00	-9.18	1.50 H	316	14.71	22.11
4	751.23	35.32 QP	46.00	-10.68	1.25 H	10	11.34	23.98
5	799.84	37.55 QP	46.00	-8.45	1.00 H	58	12.24	25.32
6	875.67	35.52 QP	46.00	-10.48	1.50 H	169	9.64	25.88
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	27.58 QP	40.00	-12.42	1.25 V	172	15.30	12.28
2	92.12	33.97 QP	43.50	-9.53	1.25 V	244	24.72	9.24
3	109.62	34.36 QP	43.50	-9.14	1.25 V	265	23.86	10.49
4	624.85	33.07 QP	46.00	-12.93	1.00 V	115	10.96	22.11
5	799.84	36.41 QP	46.00	-9.59	1.00 V	16	11.10	25.32
6	945.66	31.33 QP	46.00	-14.67	1.25 V	358	4.87	26.46

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1008 hPa	TESTED BY	Lori Chiu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	41.06 QP	46.00	-4.94	1.25 H	118	28.24	12.81
2	599.58	37.60 QP	46.00	-8.40	1.50 H	184	15.70	21.90
3	624.85	36.99 QP	46.00	-9.01	1.50 H	352	14.88	22.11
4	751.23	32.41 QP	46.00	-13.59	1.25 H	226	8.43	23.98
5	799.84	35.96 QP	46.00	-10.04	1.00 H	55	10.65	25.32
6	875.67	33.77 QP	46.00	-12.23	1.50 H	166	7.89	25.88
7	899.00	31.82 QP	46.00	-14.18	1.00 H	163	5.72	26.10
8	949.55	31.78 QP	46.00	-14.22	2.00 H	193	5.30	26.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.18	28.29 QP	40.00	-11.71	1.25 V	238	14.76	13.53
2	105.73	31.34 QP	43.50	-12.16	1.25 V	247	21.32	10.02
3	399.31	31.64 QP	46.00	-14.36	1.50 V	229	15.60	16.04
4	624.85	31.61 QP	46.00	-14.39	1.00 V	238	9.50	22.11
5	799.84	35.82 QP	46.00	-10.18	1.25 V	352	10.50	25.32
6	949.55	32.80 QP	46.00	-13.20	1.25 V	10	6.31	26.49

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1008 hPa	TESTED BY	Lori Chiu
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.35 QP	40.00	-9.65	1.50 H	163	18.07	12.28
2	249.60	38.51 QP	46.00	-7.49	1.00 H	139	25.70	12.81
3	599.58	38.27 QP	46.00	-7.73	1.50 H	289	16.37	21.90
4	624.85	35.62 QP	46.00	-10.38	1.25 H	283	13.51	22.11
5	683.18	35.23 QP	46.00	-10.77	1.25 H	64	12.64	22.59
6	809.56	41.24 QP	46.00	-4.76	1.00 H	1	15.86	25.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	38.40 QP	40.00	-1.60	1.00 V	157	24.80	13.59
2	96.01	34.38 QP	43.50	-9.12	1.25 V	250	25.10	9.29
3	140.72	34.14 QP	43.50	-9.36	1.00 V	136	21.51	12.63
4	249.60	38.33 QP	46.00	-7.67	1.00 V	256	25.52	12.81
5	807.62	36.51 QP	46.00	-9.49	1.00 V	10	11.14	25.37
6	949.55	32.24 QP	46.00	-13.76	1.50 V	157	5.76	26.49

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1008 hPa	TESTED BY	Lori Chiu
TEST MODE	D		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.99 QP	40.00	-9.01	1.50 H	73	18.71	12.28
2	249.60	38.94 QP	46.00	-7.06	1.00 H	76	26.13	12.81
3	624.85	36.51 QP	46.00	-9.49	1.25 H	286	14.40	22.11
4	685.13	34.88 QP	46.00	-11.12	1.25 H	40	12.27	22.61
5	751.23	35.93 QP	46.00	-10.07	1.00 H	154	11.95	23.98
6	801.78	42.58 QP	46.00	-3.42	1.25 H	355	17.25	25.33
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	37.09 QP	40.00	-2.91	1.00 V	265	24.91	12.17
2	64.90	30.62 QP	40.00	-9.38	1.50 V	280	18.13	12.49
3	140.72	34.15 QP	43.50	-9.35	1.25 V	130	21.52	12.63
4	249.60	35.30 QP	46.00	-10.70	2.00 V	229	22.49	12.81
5	599.58	35.75 QP	46.00	-10.25	1.25 V	355	13.85	21.90
6	799.84	37.79 QP	46.00	-8.21	1.25 V	184	12.48	25.32

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 29, 2009	Jul. 28, 2010
Software ADT	ADT_Conc_ V7.3.7	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

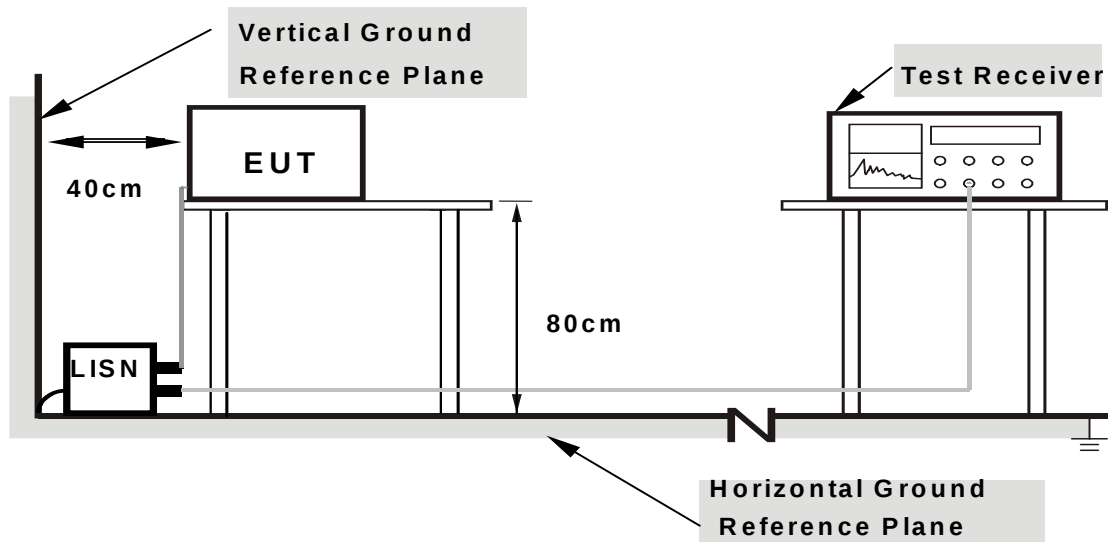

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.13	33.27	-	33.40	-	64.61	54.61	-31.21	-
2	0.478	0.14	35.46	-	35.60	-	56.37	46.37	-20.77	-
3	3.313	0.25	32.79	-	33.04	-	56.00	46.00	-22.96	-
4	7.809	0.38	35.13	-	35.51	-	60.00	50.00	-24.49	-
5	11.891	0.48	41.02	-	41.50	-	60.00	50.00	-18.50	-
6	20.258	0.67	43.82	-	44.49	-	60.00	50.00	-15.51	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

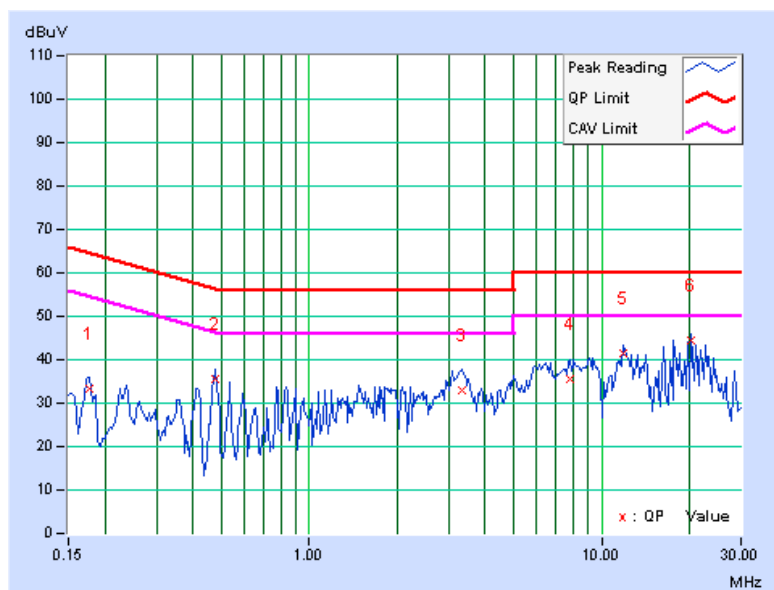

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	A		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.13	35.03	-	35.16	-	64.43	54.43	-29.27	-
2	0.478	0.15	32.94	-	33.09	-	56.37	46.37	-23.28	-
3	0.841	0.16	23.85	-	24.01	-	56.00	46.00	-31.99	-
4	3.258	0.26	34.16	-	34.42	-	56.00	46.00	-21.58	-
5	11.891	0.56	38.58	-	39.14	-	60.00	50.00	-20.86	-
6	18.242	0.77	42.32	-	43.09	-	60.00	50.00	-16.91	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

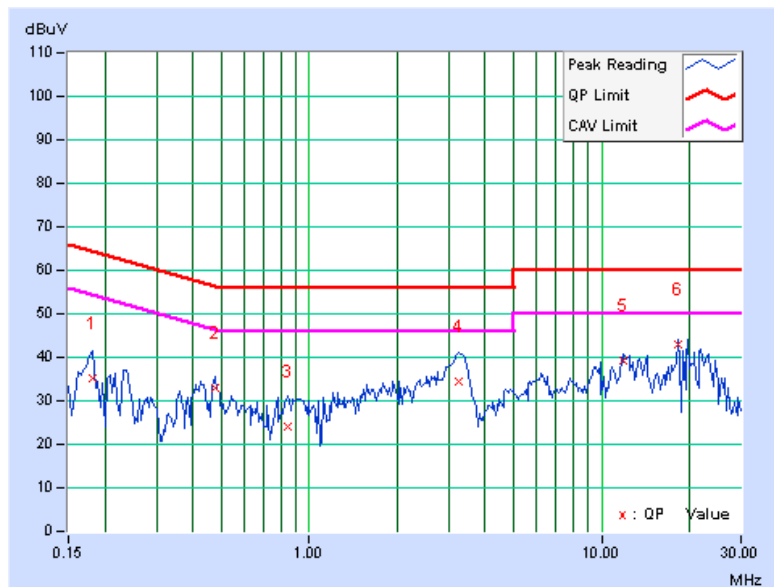

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	B		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	50.49	-	50.62	-	66.00	56.00	-15.38	-
2	0.177	0.13	45.81	-	45.94	-	64.61	54.61	-18.67	-
3	0.326	0.14	40.90	-	41.04	-	59.56	49.56	-18.52	-
4	0.943	0.17	32.58	-	32.75	-	56.00	46.00	-23.25	-
5	2.184	0.20	31.53	-	31.73	-	56.00	46.00	-24.27	-
6	23.126	0.65	36.14	-	36.79	-	60.00	50.00	-23.21	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

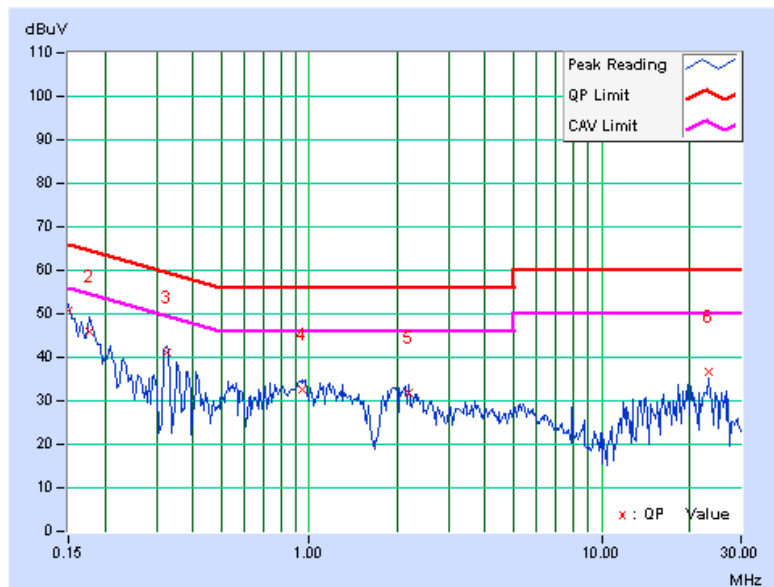

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	B		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	51.71	-	51.84	-	66.00	56.00	-14.16	-
2	0.181	0.13	45.92	-	46.05	-	64.43	54.43	-18.38	-
3	0.326	0.14	41.49	-	41.63	-	59.56	49.56	-17.93	-
4	0.982	0.17	30.31	-	30.48	-	56.00	46.00	-25.52	-
5	1.941	0.20	29.81	-	30.01	-	56.00	46.00	-25.99	-
6	23.128	0.80	34.58	-	35.38	-	60.00	50.00	-24.62	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

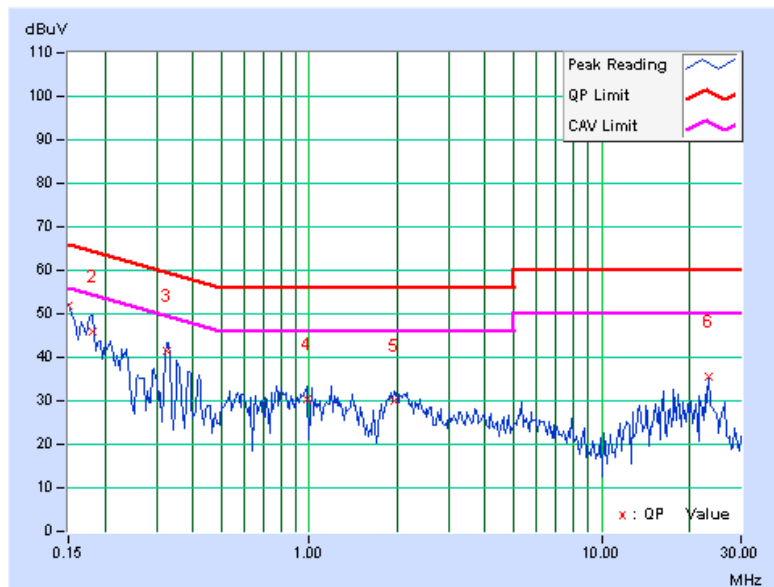

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.13	33.50	-	33.63	-	64.43	54.43	-30.80	-
2	0.478	0.14	36.66	-	36.80	-	56.37	46.37	-19.57	-
3	1.188	0.17	29.08	-	29.25	-	56.00	46.00	-26.75	-
4	3.242	0.25	34.82	-	35.07	-	56.00	46.00	-20.93	-
5	9.387	0.41	35.82	-	36.23	-	60.00	50.00	-23.77	-
6	19.710	0.66	41.43	-	42.09	-	60.00	50.00	-17.91	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

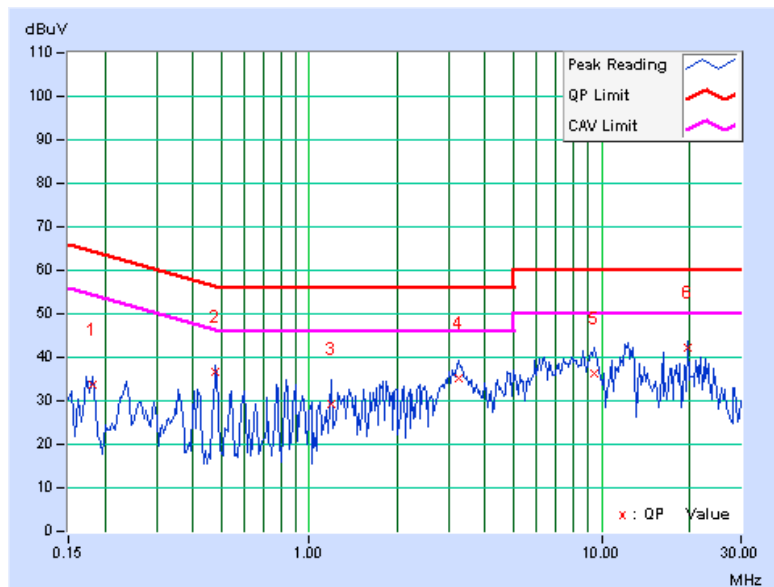

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	C		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.13	34.95	-	35.08	-	64.43	54.43	-29.35	-
2	0.236	0.13	35.93	-	36.06	-	62.24	52.24	-26.17	-
3	0.478	0.15	32.72	-	32.87	-	56.37	46.37	-23.50	-
4	3.375	0.27	36.85	-	37.12	-	56.00	46.00	-18.88	-
5	18.243	0.77	40.61	-	41.38	-	60.00	50.00	-18.62	-
6	23.129	0.80	41.14	-	41.94	-	60.00	50.00	-18.06	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

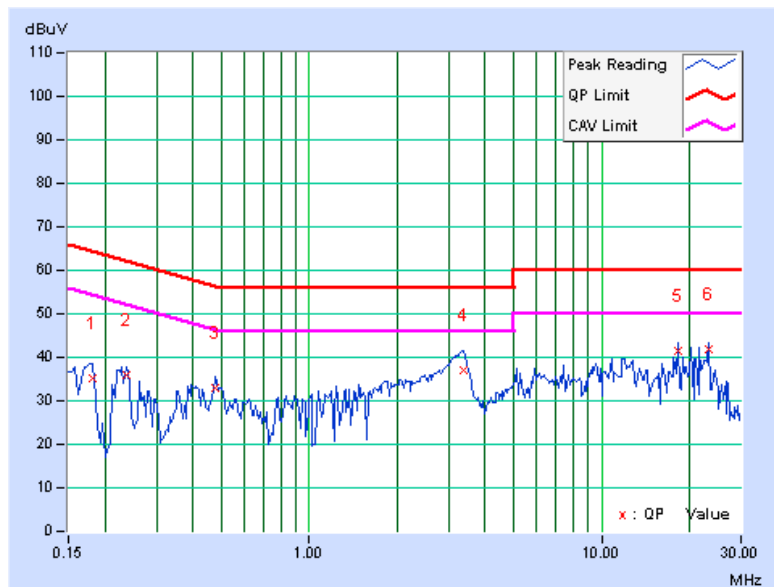

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	D		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	47.72	-	47.85	-	66.00	56.00	-18.15	-
2	0.177	0.13	43.97	-	44.10	-	64.61	54.61	-20.51	-
3	0.323	0.14	40.72	-	40.86	-	59.63	49.63	-18.77	-
4	0.932	0.17	31.03	-	31.20	-	56.00	46.00	-24.80	-
5	1.926	0.19	30.40	-	30.59	-	56.00	46.00	-25.41	-
6	23.129	0.65	38.91	-	39.56	-	60.00	50.00	-20.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

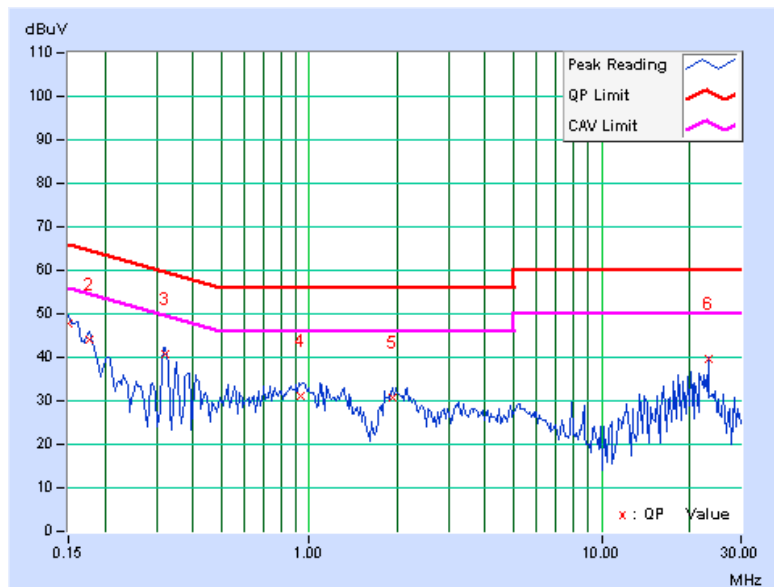

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 1007hPa	TESTED BY	Sun Lin
TEST MODE	D		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	47.97	-	48.10	-	66.00	56.00	-17.90	-
2	0.177	0.13	44.60	-	44.73	-	64.61	54.61	-19.88	-
3	0.322	0.14	40.58	-	40.72	-	59.66	49.66	-18.94	-
4	0.974	0.17	29.17	-	29.34	-	56.00	46.00	-26.66	-
5	1.848	0.20	28.38	-	28.58	-	56.00	46.00	-27.42	-
6	23.129	0.80	37.35	-	38.15	-	60.00	50.00	-21.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

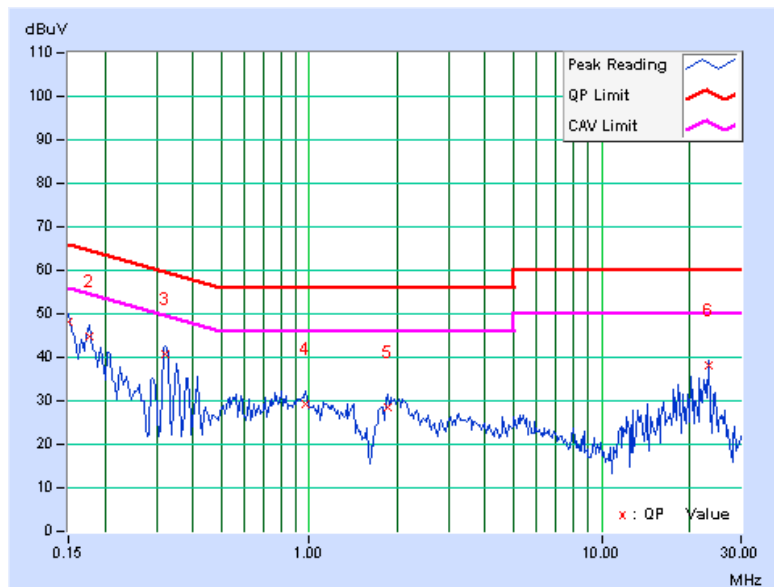

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

**A D T**

4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	12.09	11.20	0.5	PASS
6	2437	12.61	12.11	0.5	PASS
11	2462	12.13	12.58	0.5	PASS




A D T

FOR CHAIN 0: CH 1

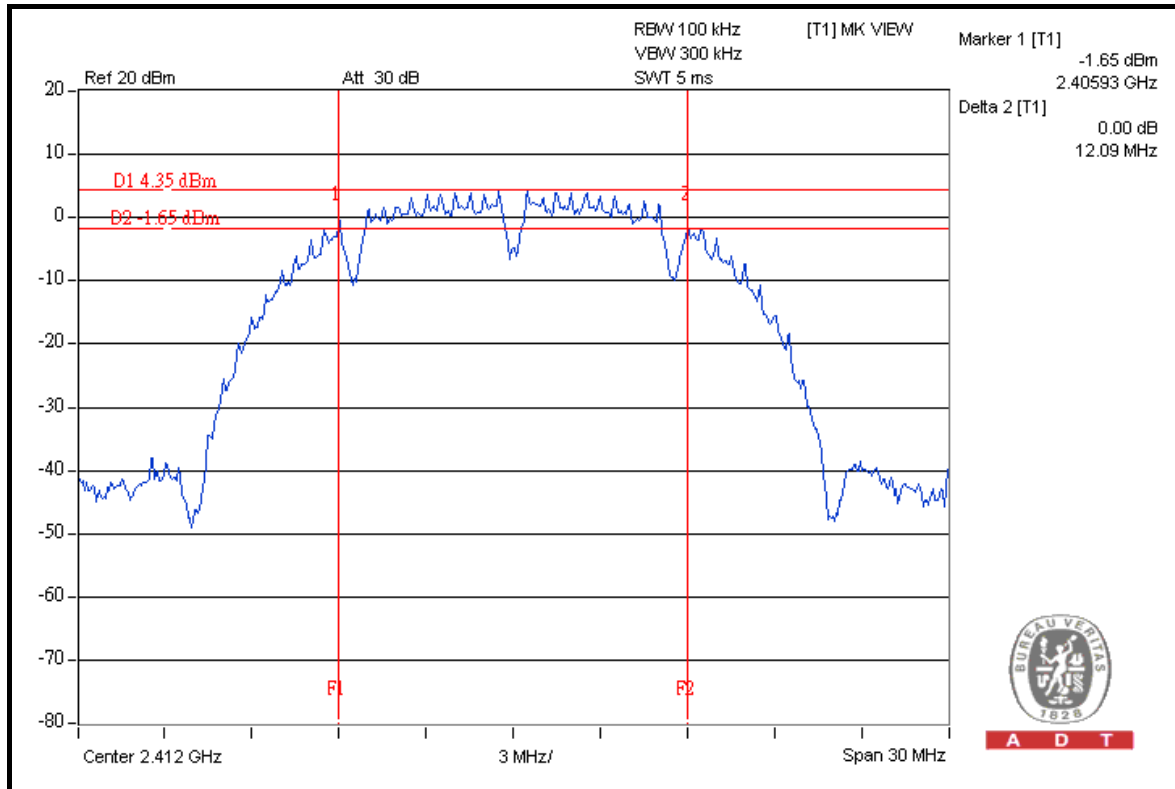


CH 6

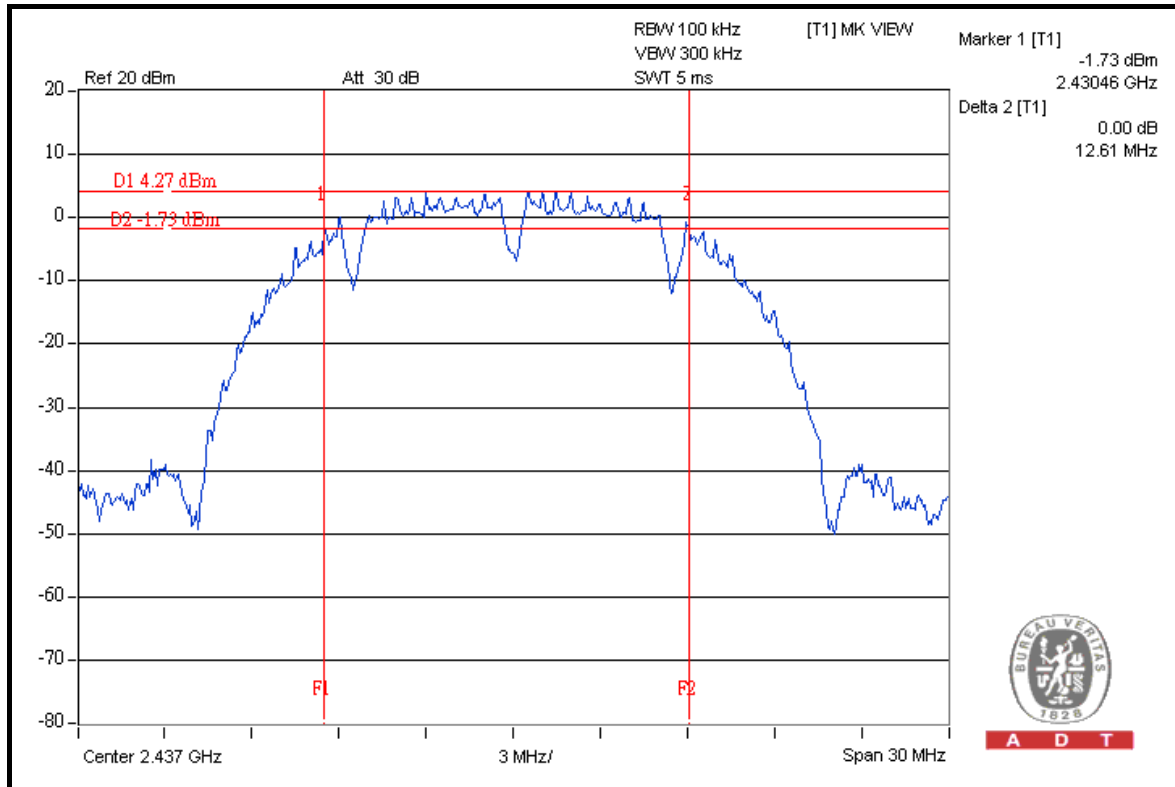




A D T

CH 11

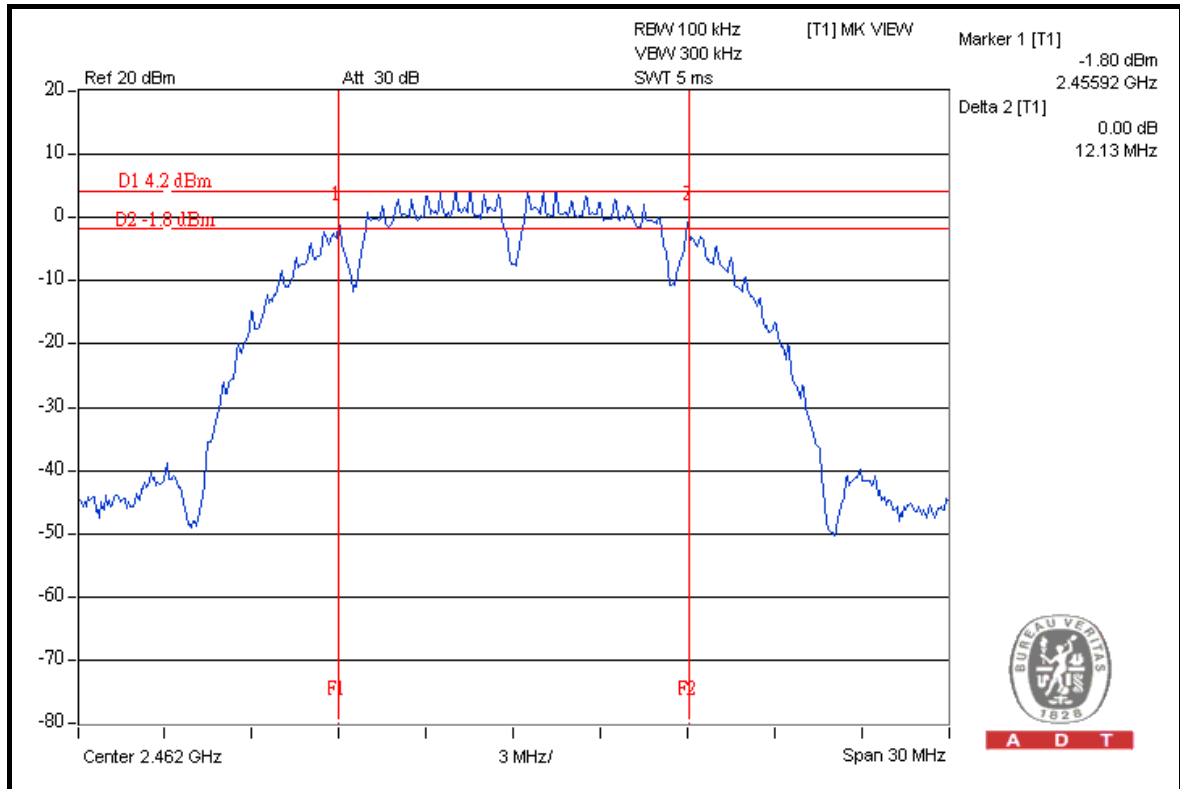


FOR CHAIN 1: CH 1

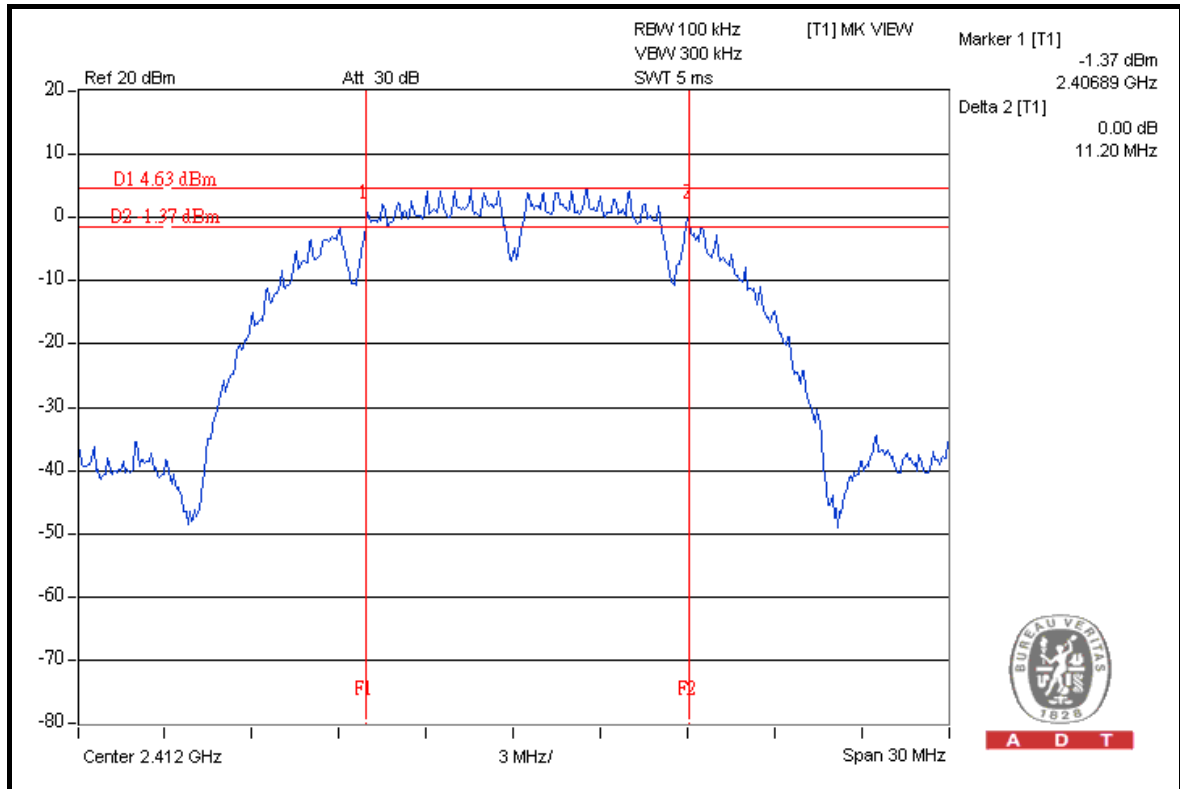




A D T

CH 6

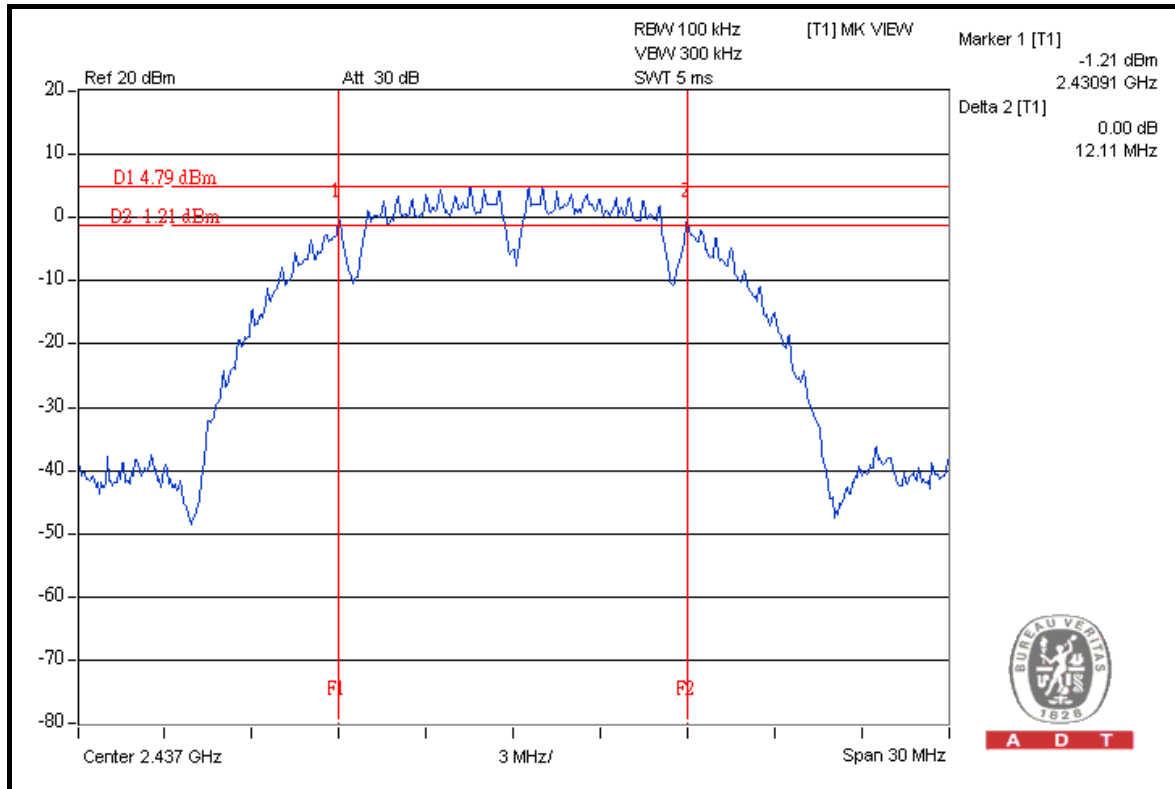

CH 11

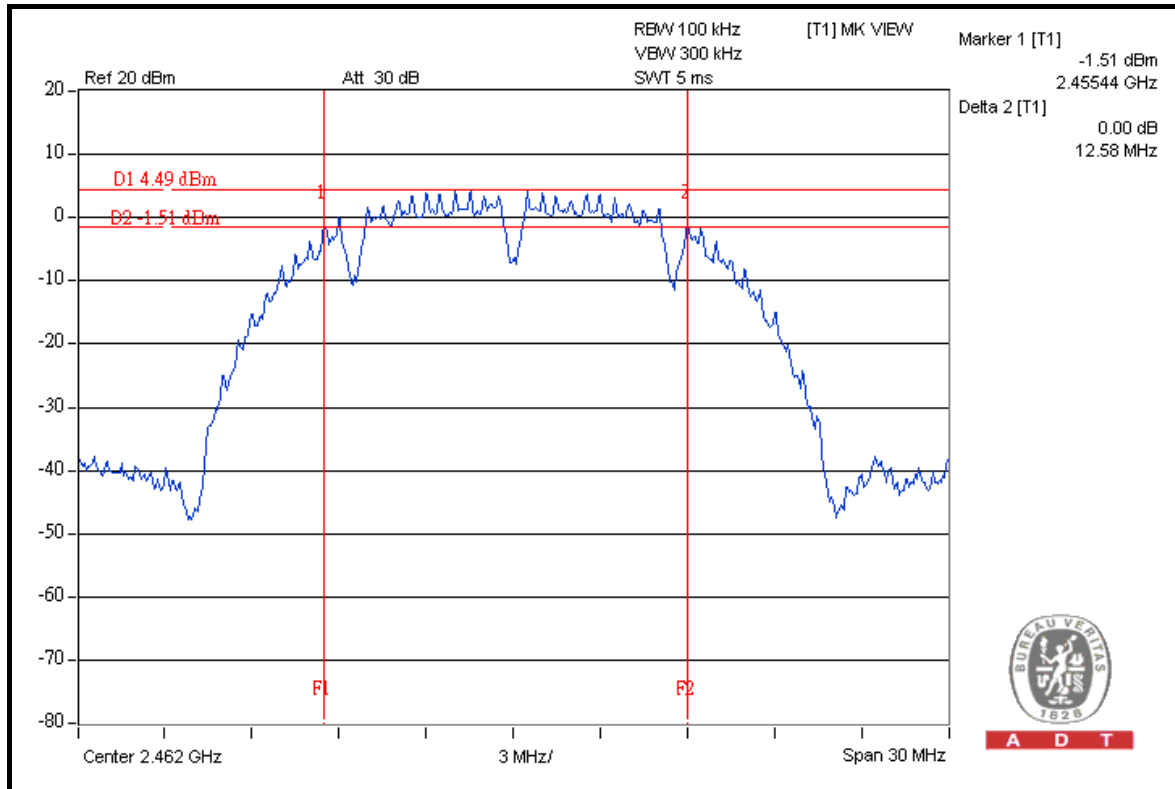

**A D T****802.11g OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.47	16.49	0.5	PASS
6	2437	16.45	16.45	0.5	PASS
11	2462	16.48	16.47	0.5	PASS




A D T

FOR CHAIN 0: CH 1

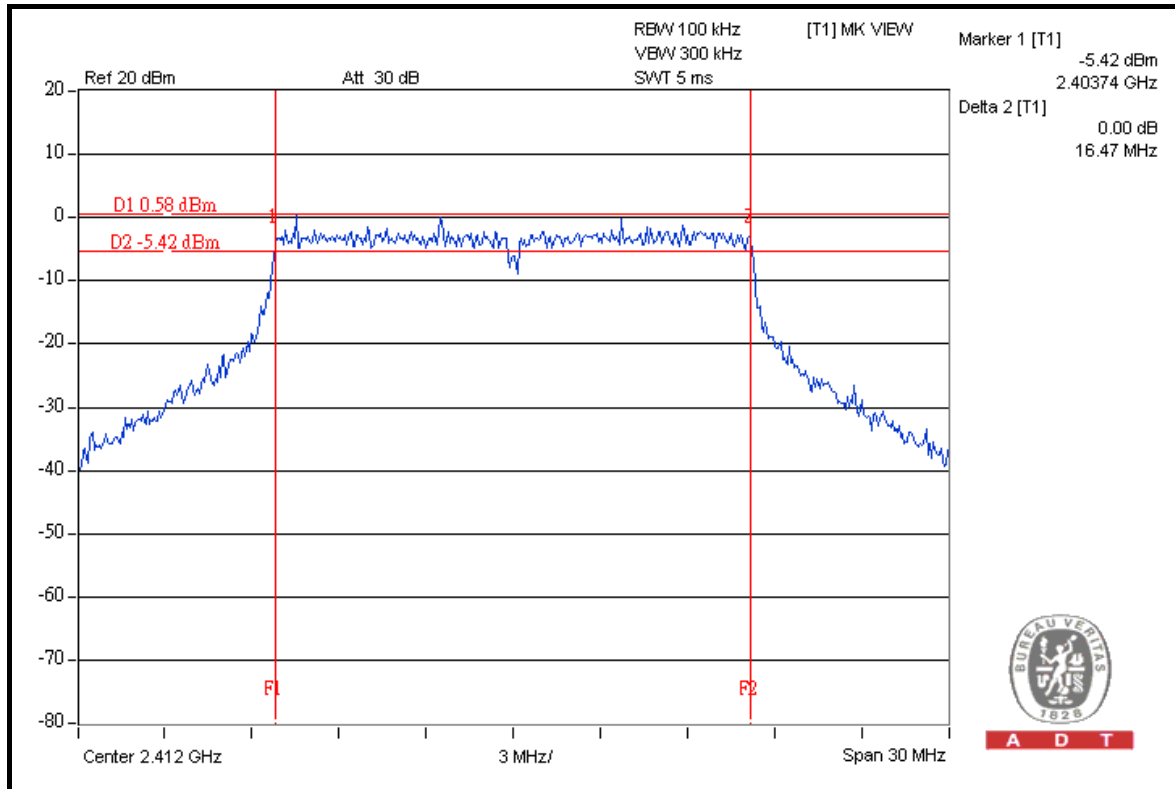


CH 6

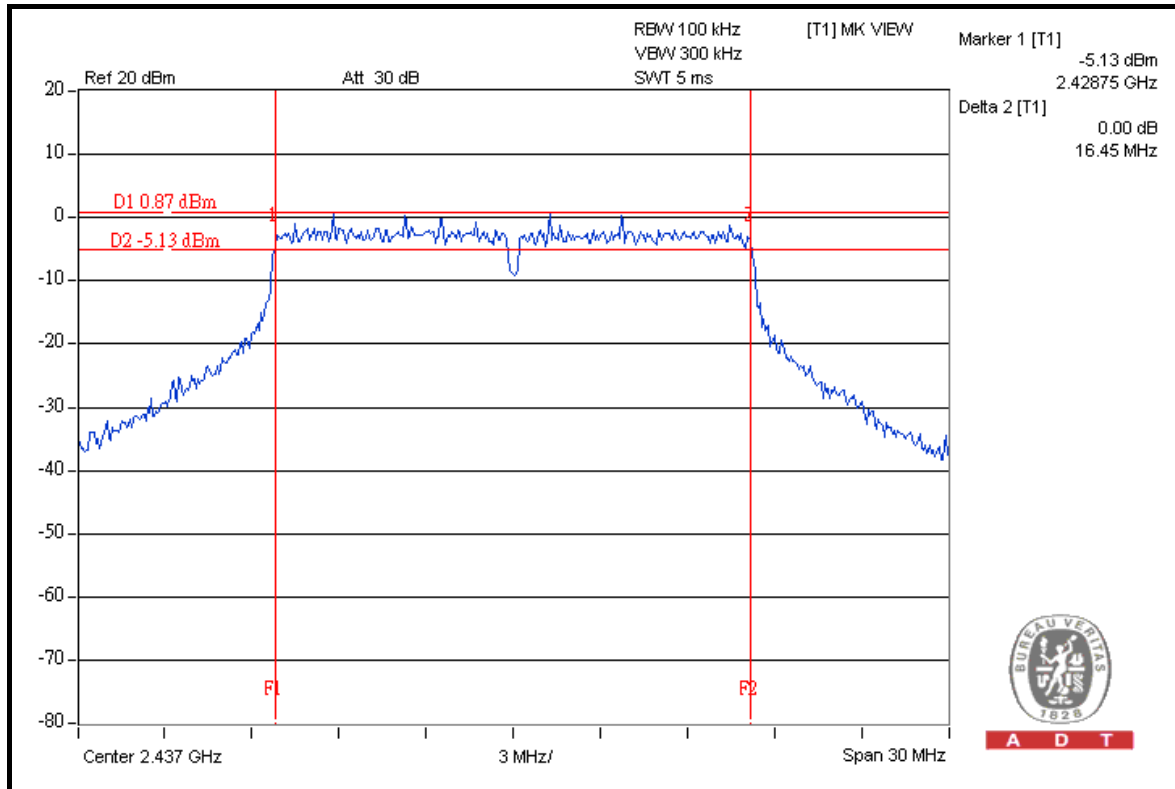




A D T

CH 11

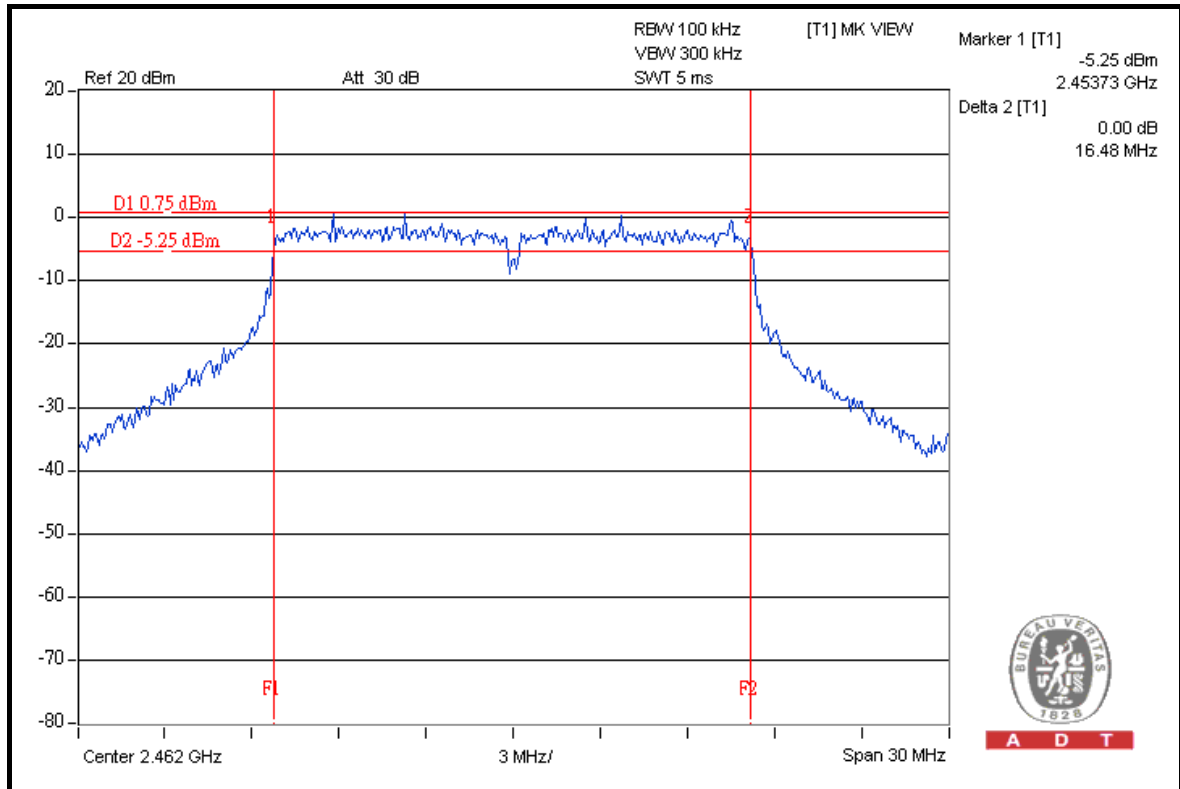


FOR CHAIN 1: CH 1

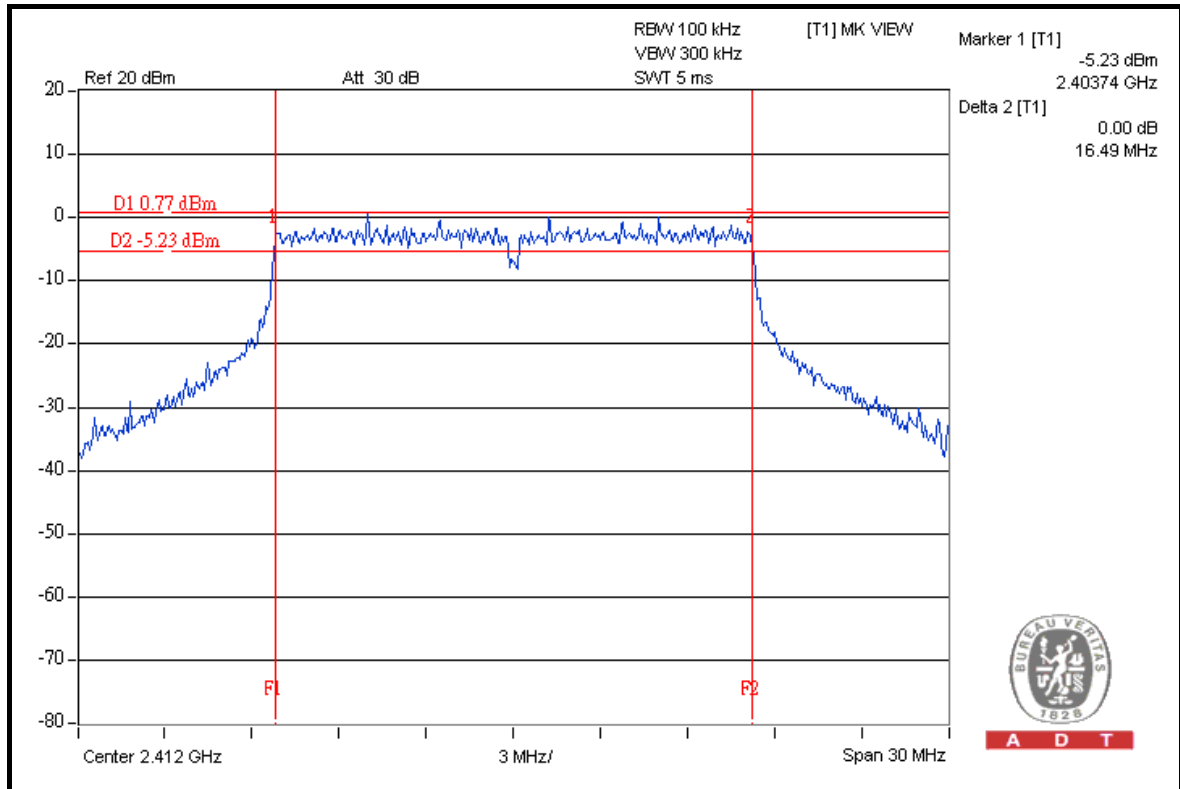




A D T

CH 6

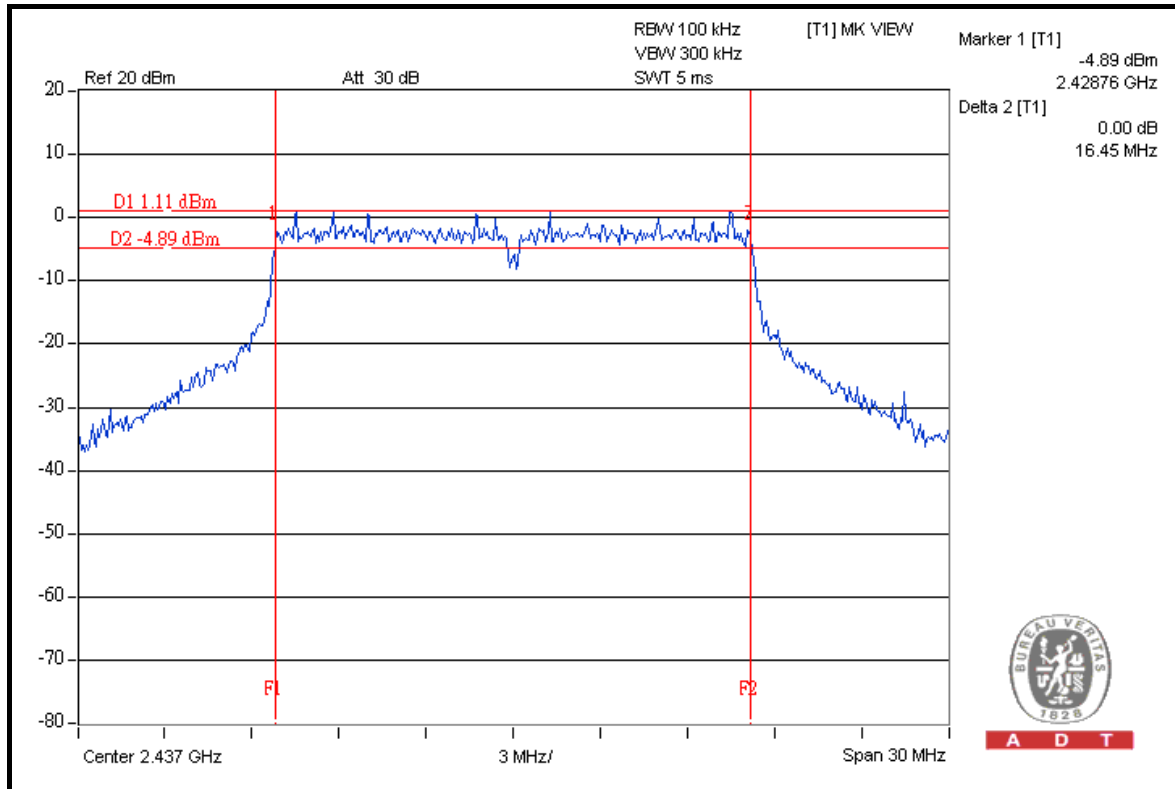

CH 11

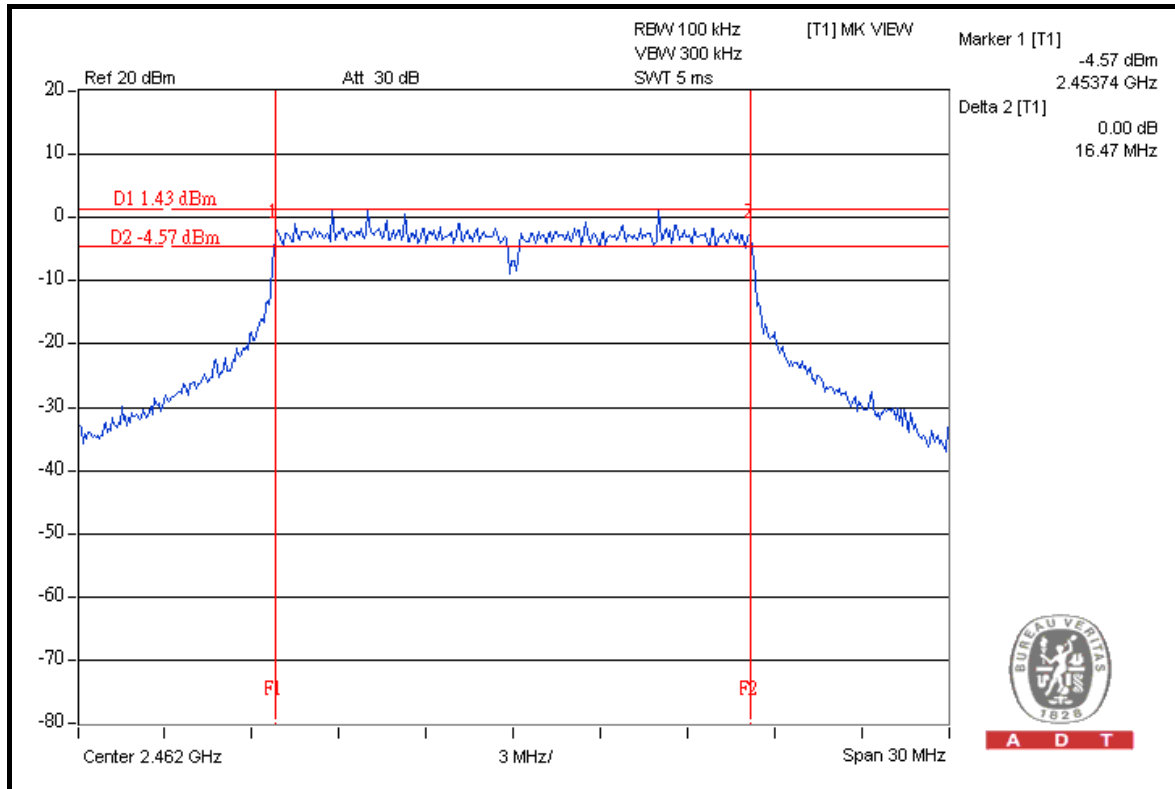

**A D T****DRAFT 802.11n (20MHz) OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.68	17.72	0.5	PASS
6	2437	17.65	17.73	0.5	PASS
11	2462	17.66	17.71	0.5	PASS




A D T

FOR CHAIN 0: CH 1

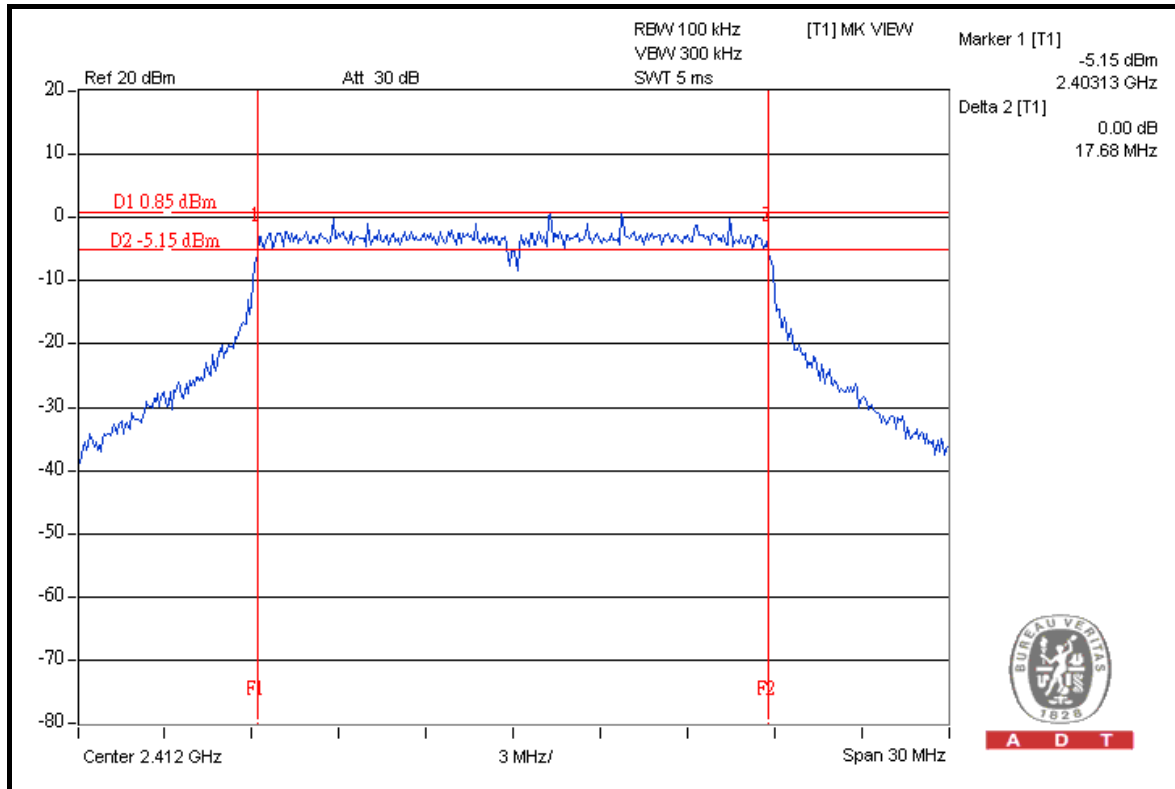


CH 6

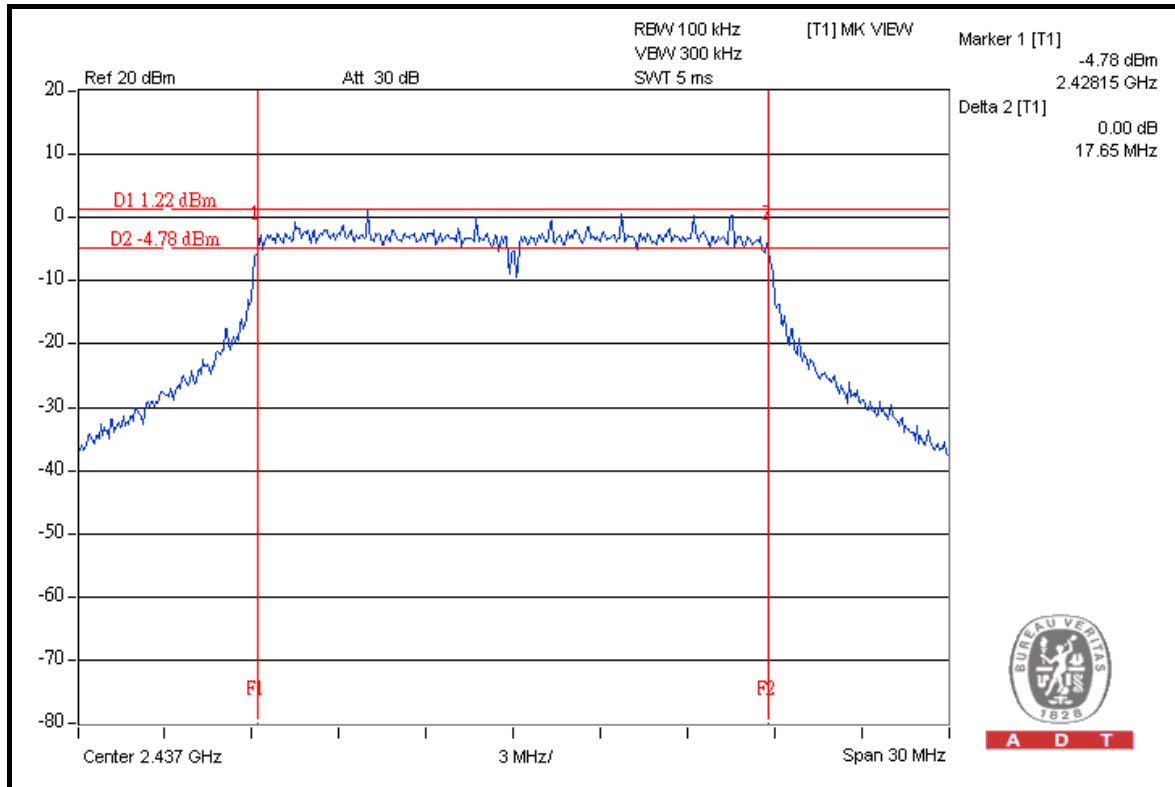




A D T

CH 11

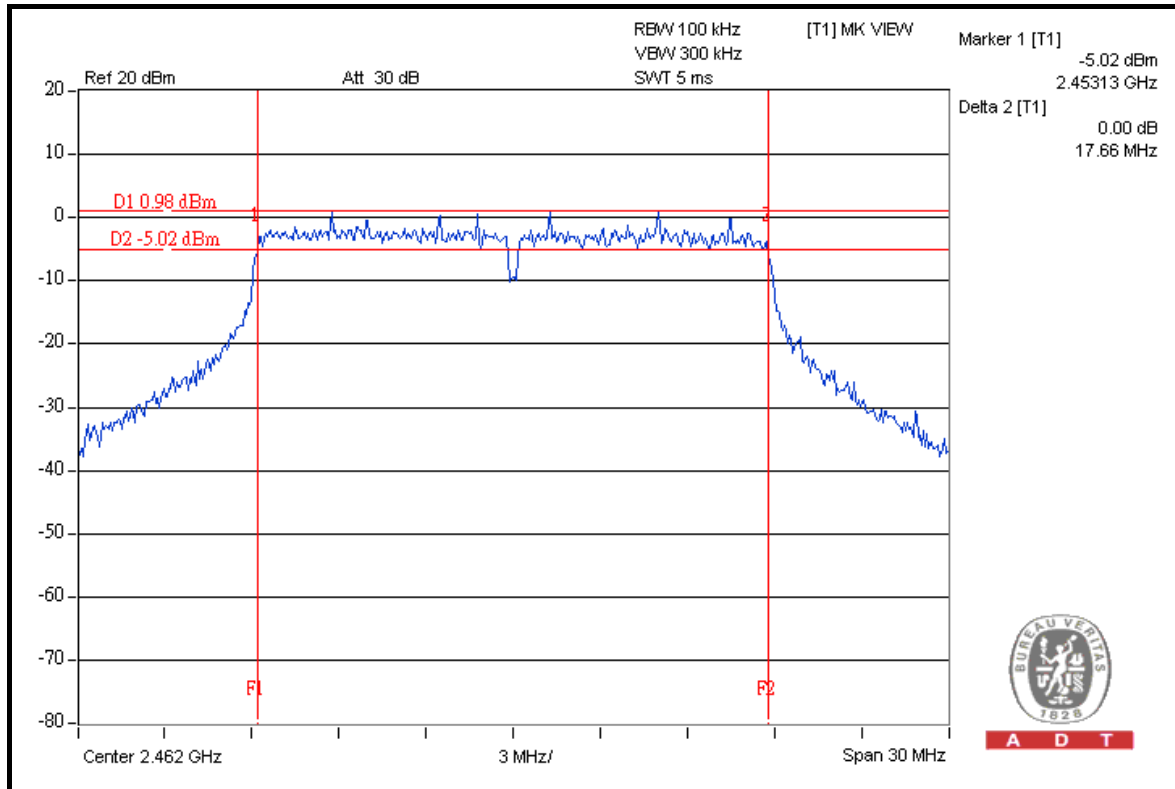


FOR CHAIN 1: CH 1

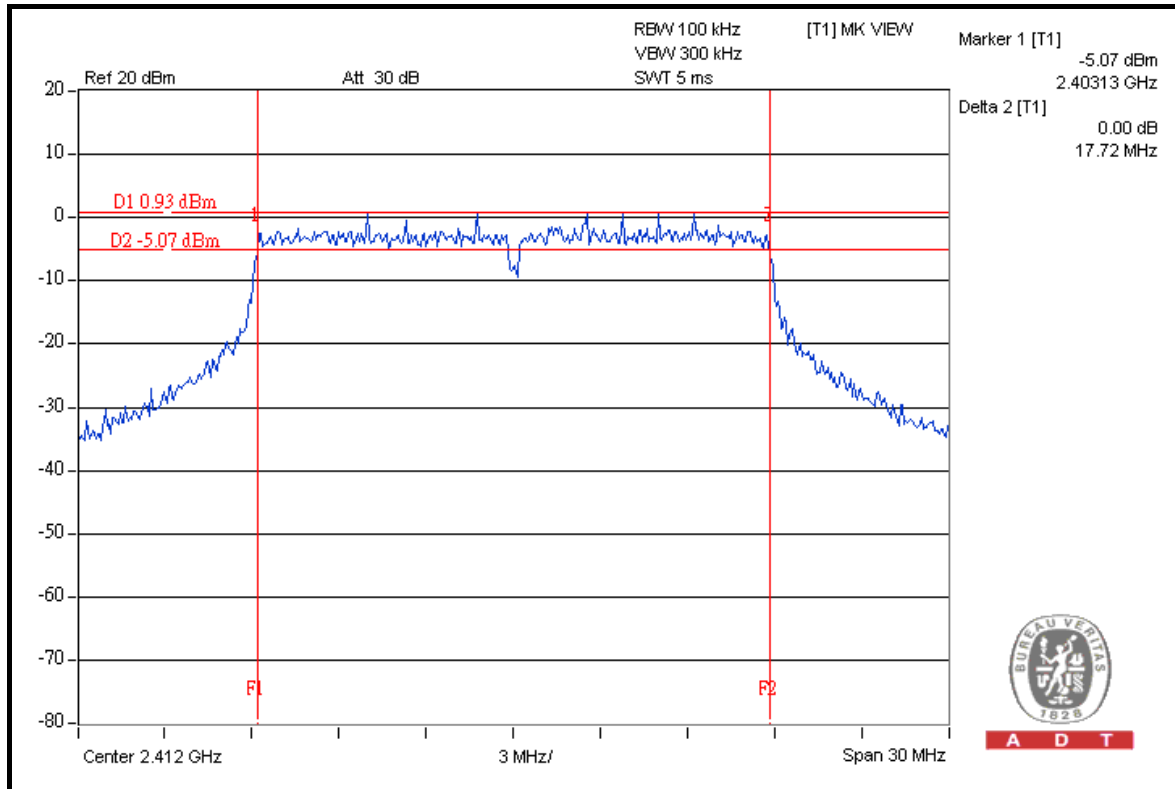




A D T

CH 6

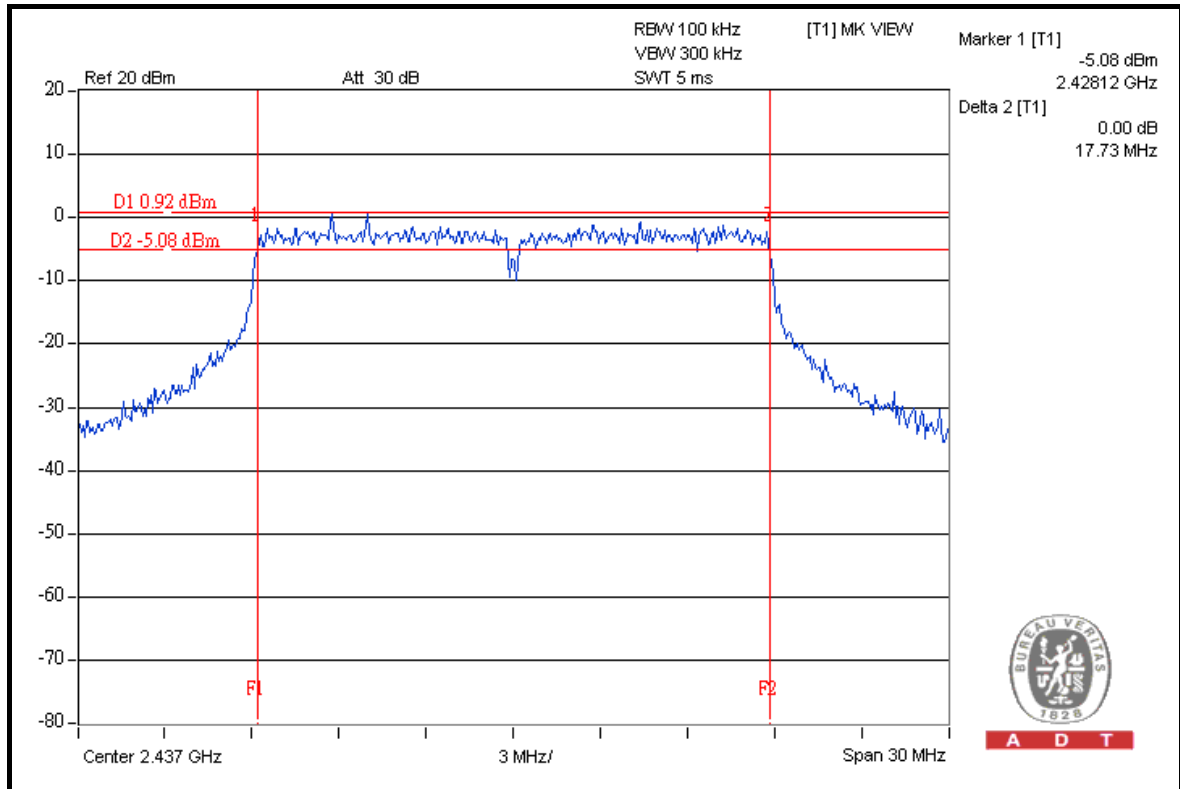

A D T

CH 11

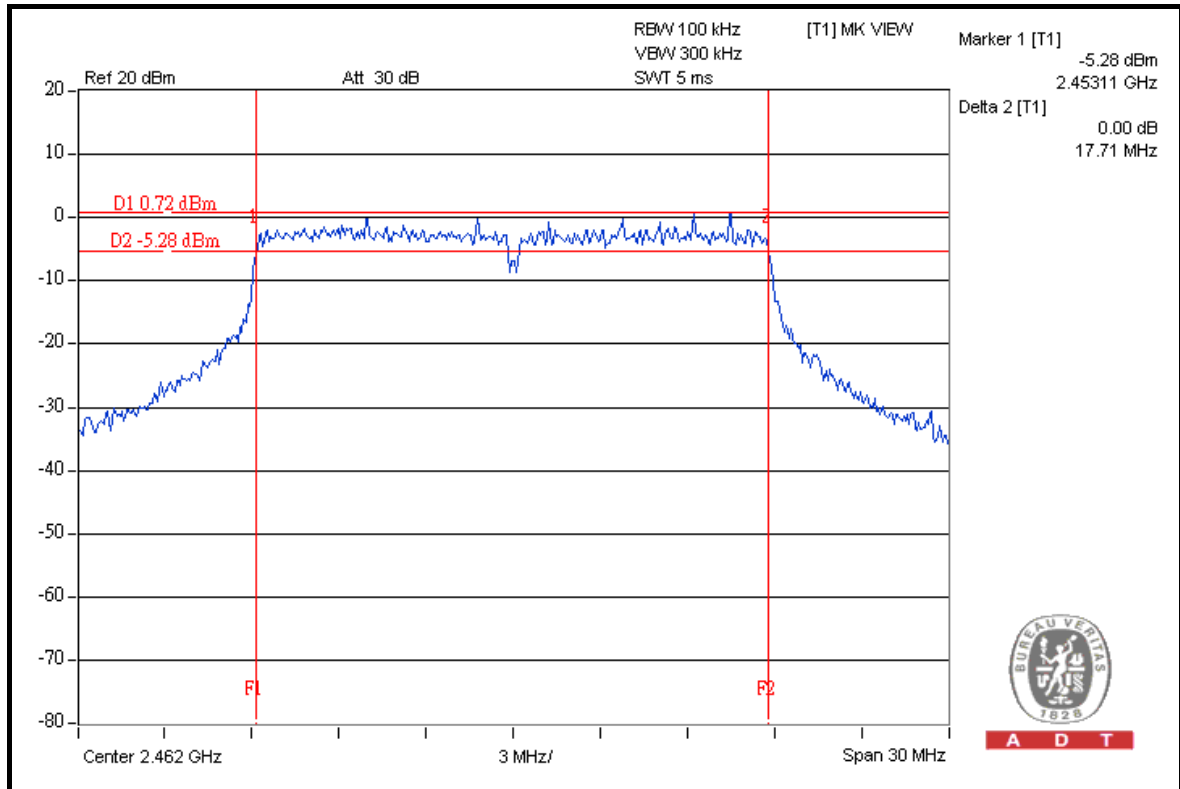

A D T

**A D T****DRAFT 802.11n (40MHz) OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	36.44	36.48	0.5	PASS
4	2437	36.44	36.49	0.5	PASS
7	2452	36.18	36.48	0.5	PASS




A D T

FOR CHAIN 0: CH 1

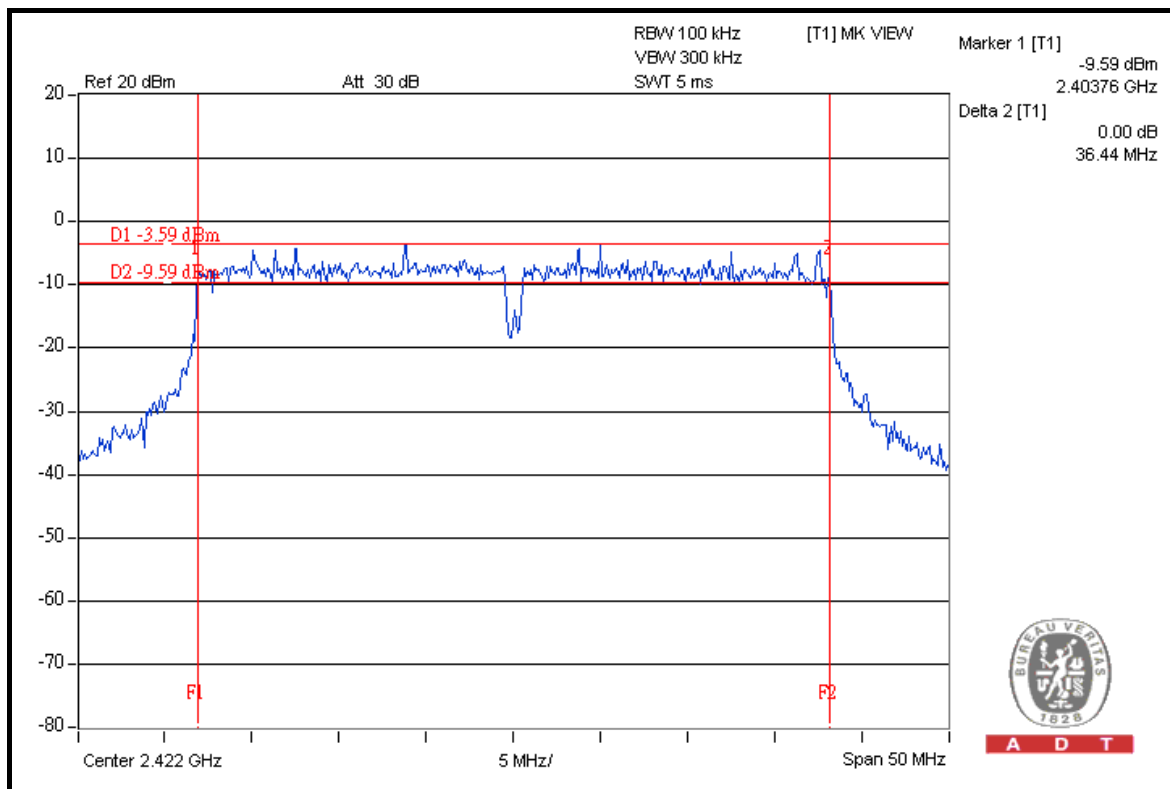


CH 4

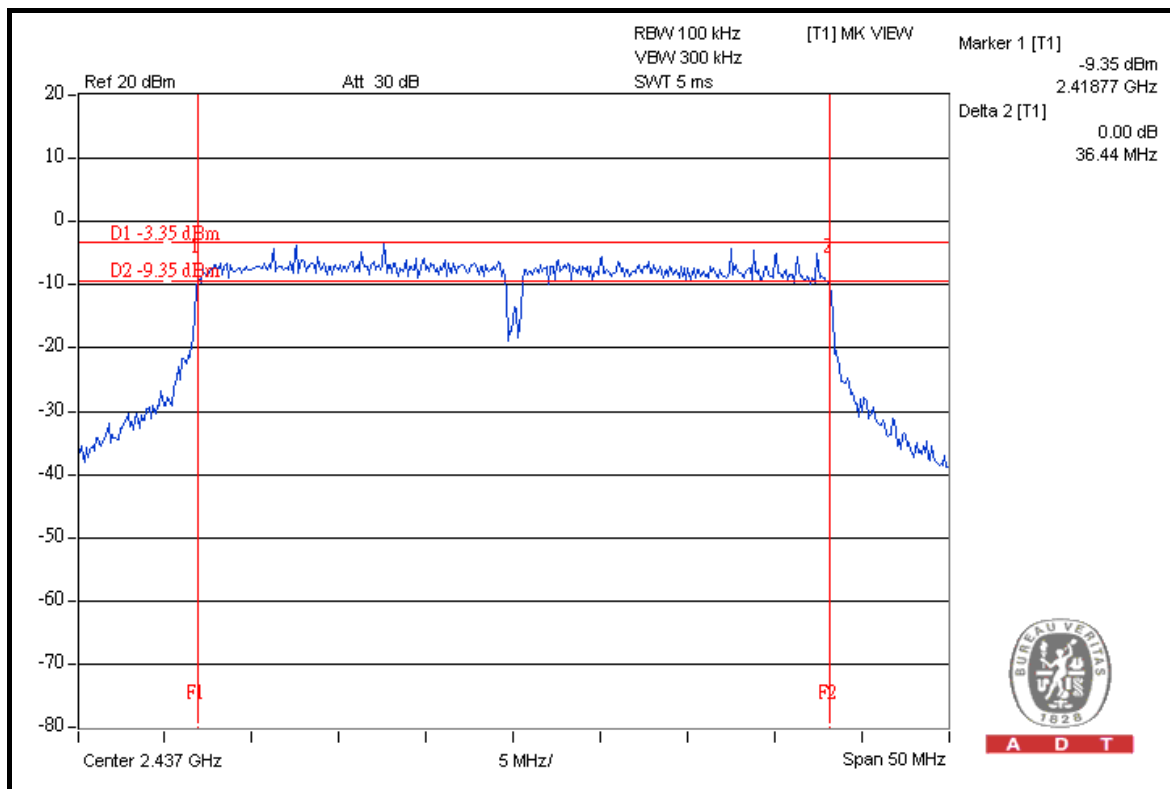




A D T

CH 7

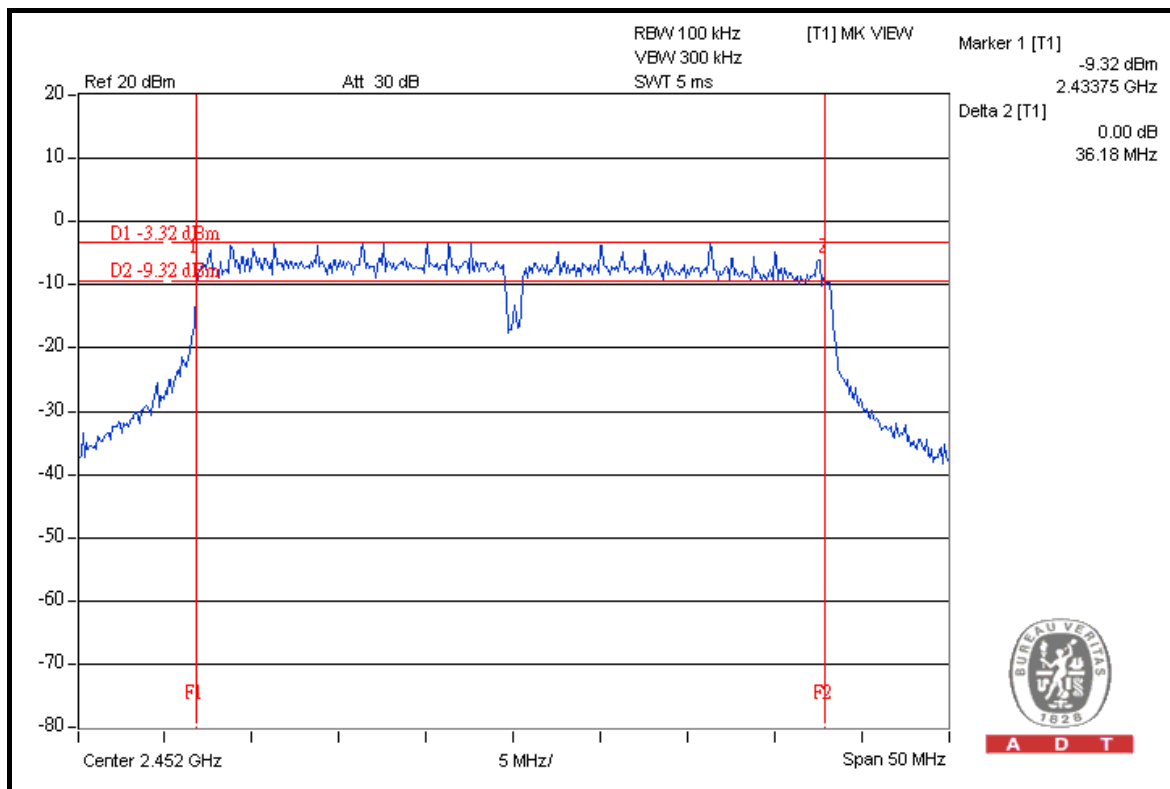


FOR CHAIN 1: CH 1

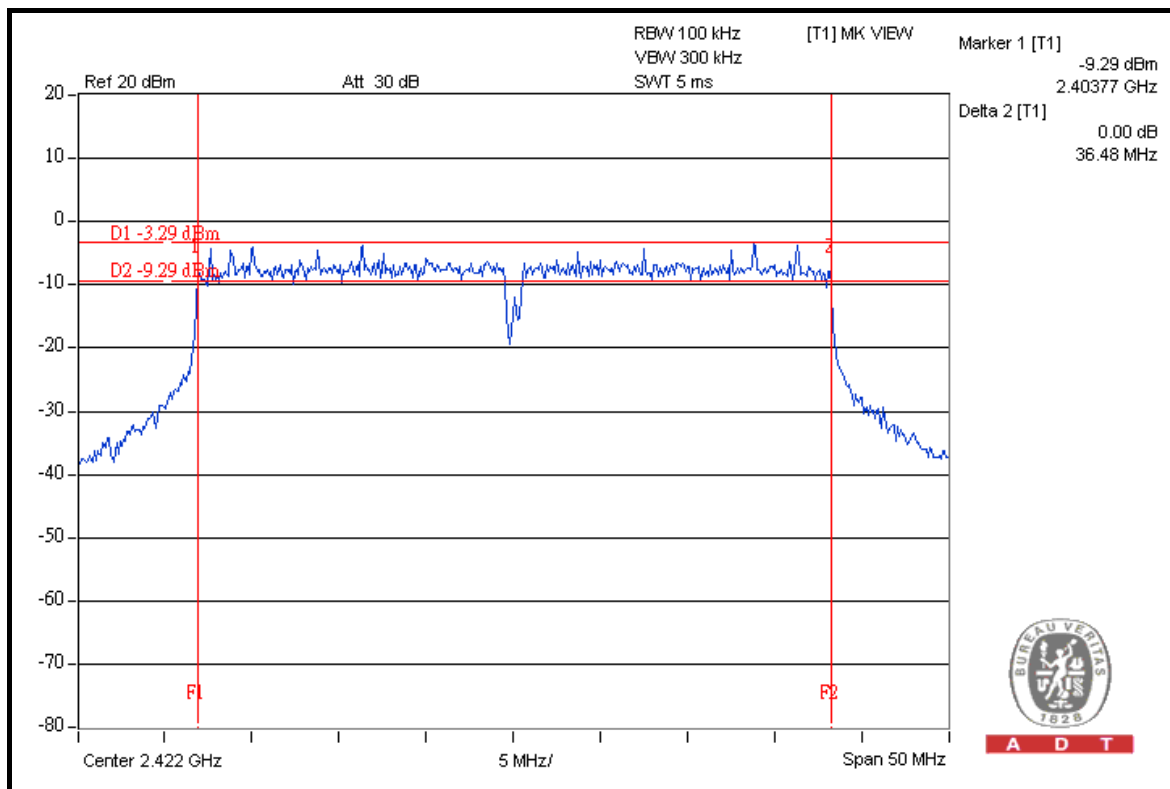




A D T

CH 4

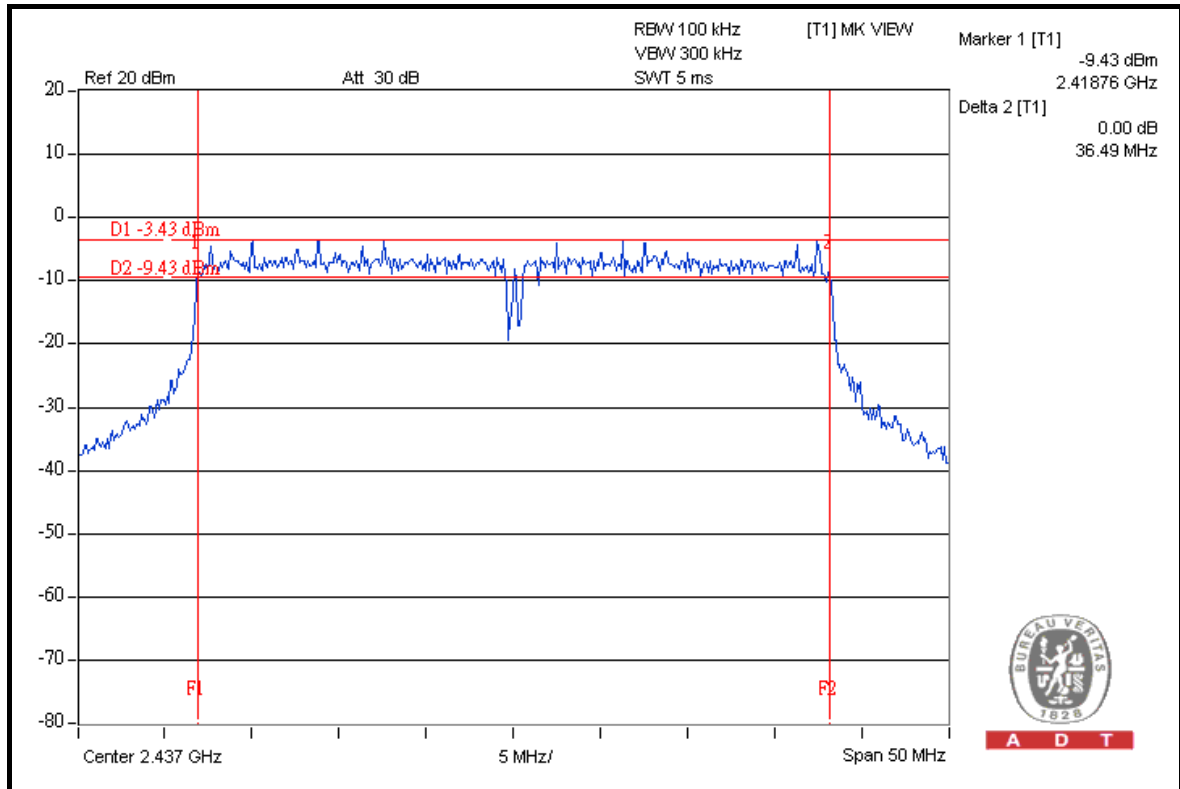

CH 7

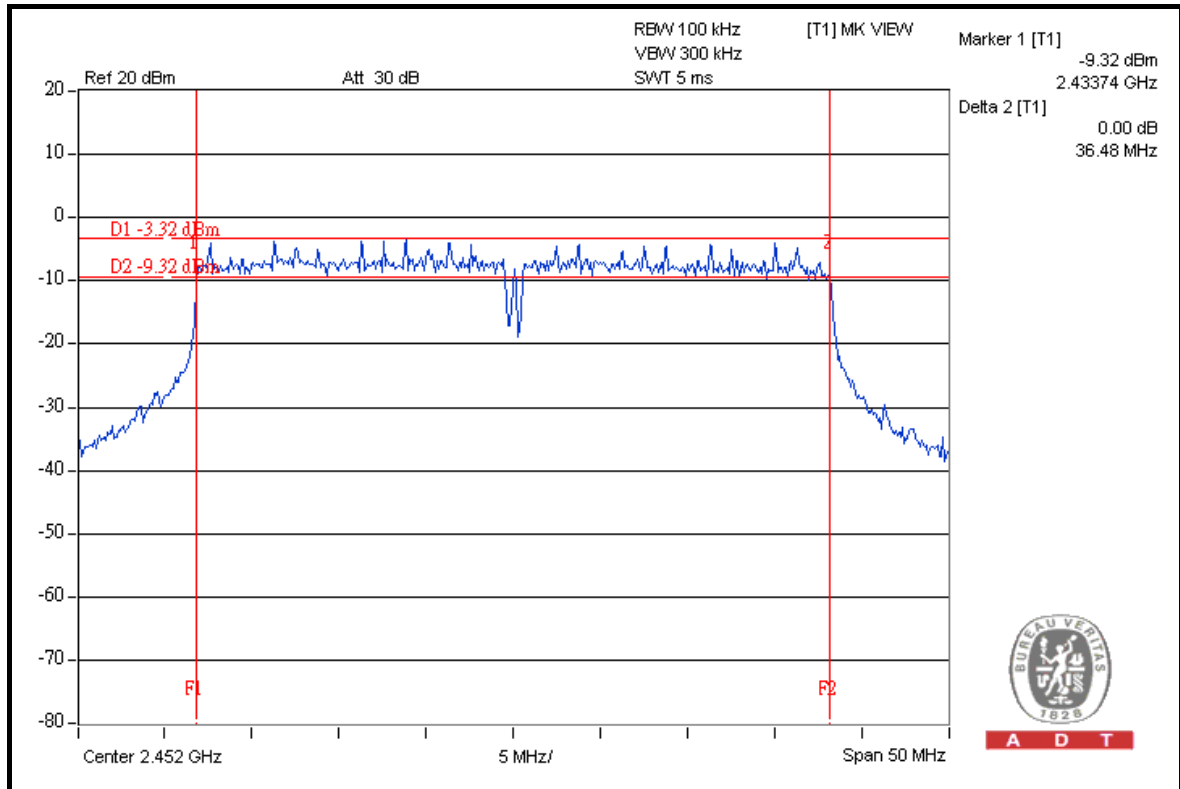

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 10, 2009	Aug. 09, 2010
Power Sensor	MA2411B	0738138	Aug. 10, 2009	Aug. 09, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

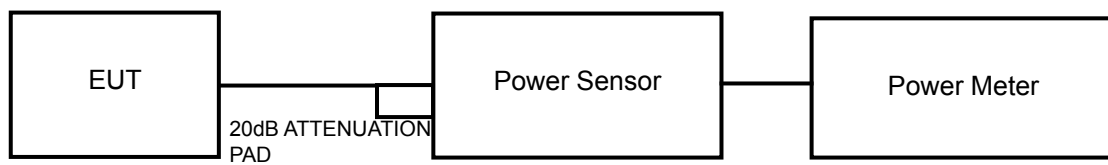

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	17.83	17.61	118.35	20.73	30	PASS
6	2437	17.63	17.79	118.06	20.72	30	PASS
11	2462	17.92	17.43	117.28	20.69	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.27	22.12	331.59	25.21	30	PASS
6	2437	22.65	22.56	364.38	25.62	30	PASS
11	2462	22.48	22.61	359.40	25.56	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.48	22.50	354.84	25.50	30	PASS
6	2437	22.61	22.58	363.52	25.61	30	PASS
11	2462	22.59	22.54	361.03	25.58	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	22.33	22.57	351.72	25.46	30	PASS
4	2437	22.65	22.36	356.26	25.52	30	PASS
7	2452	22.39	22.49	350.80	25.45	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-9.19	-9.77	0.23	-6.46	8	PASS
6	2437	-9.27	-9.45	0.23	-6.35	8	PASS
11	2462	-8.92	-9.78	0.23	-6.33	8	PASS




A D T

FOR CHAIN 0: CH 1

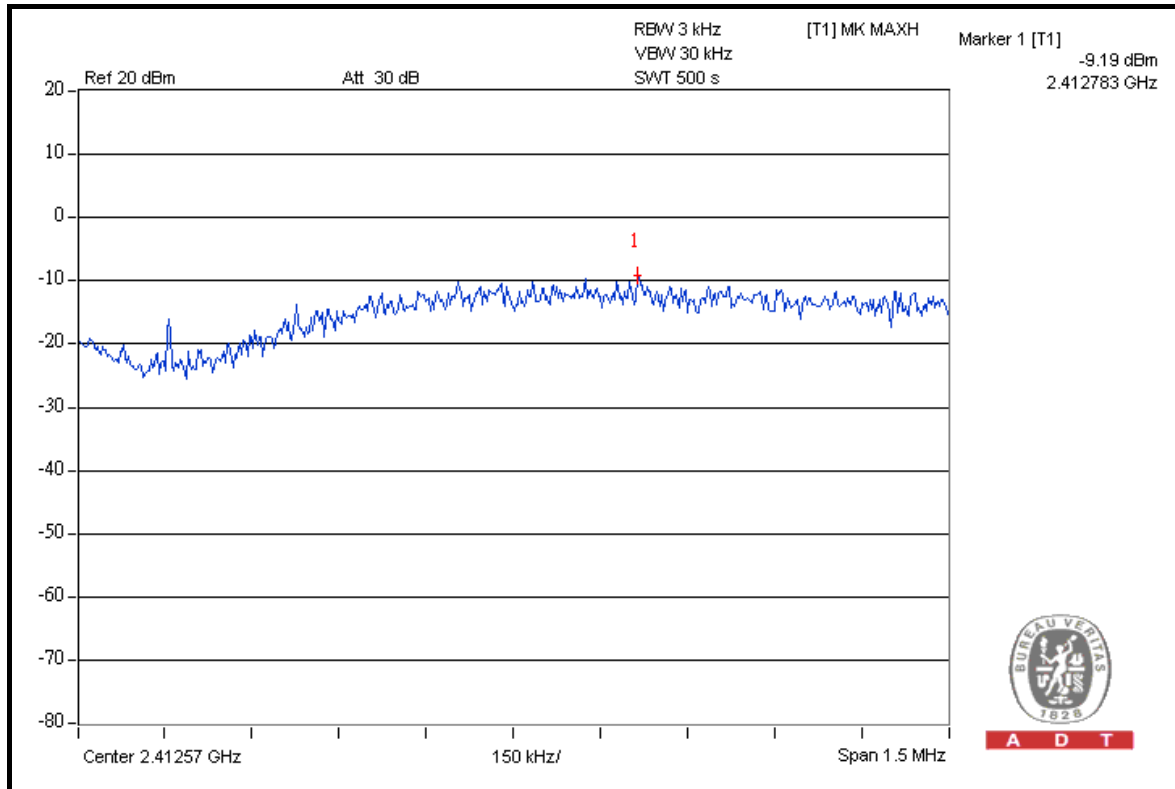


CH 6

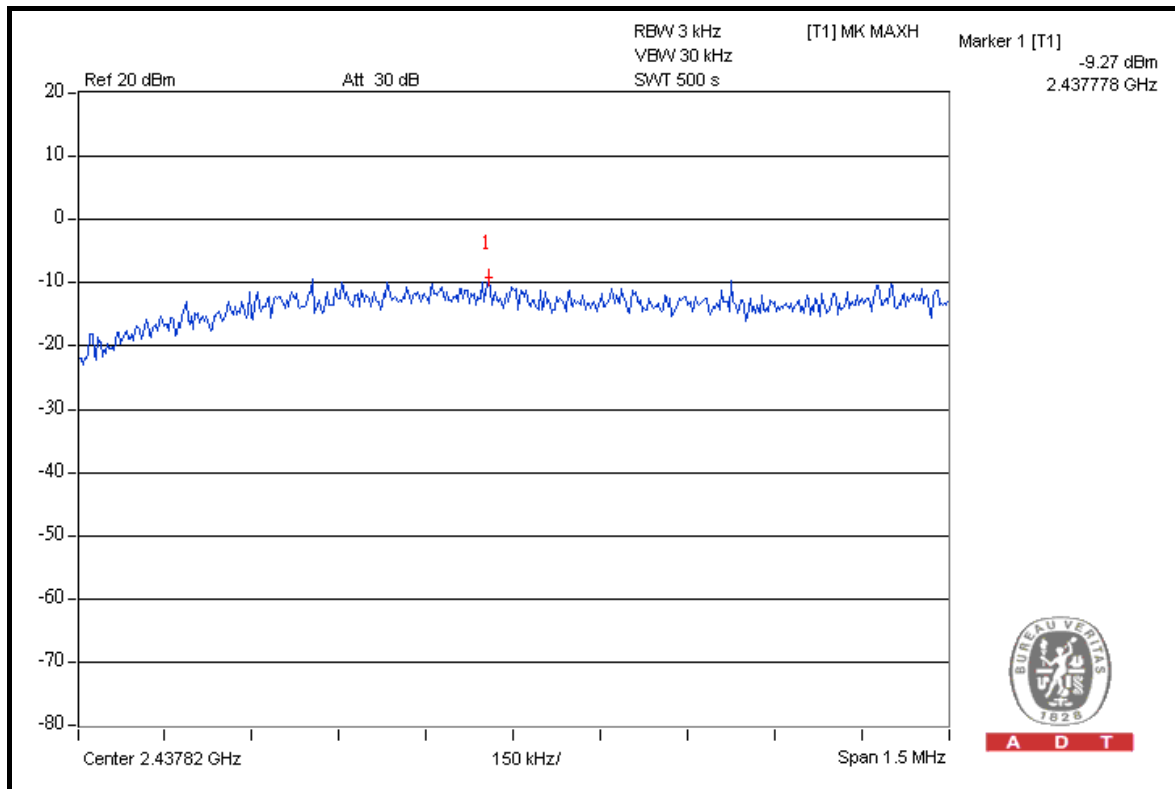




A D T

CH 11

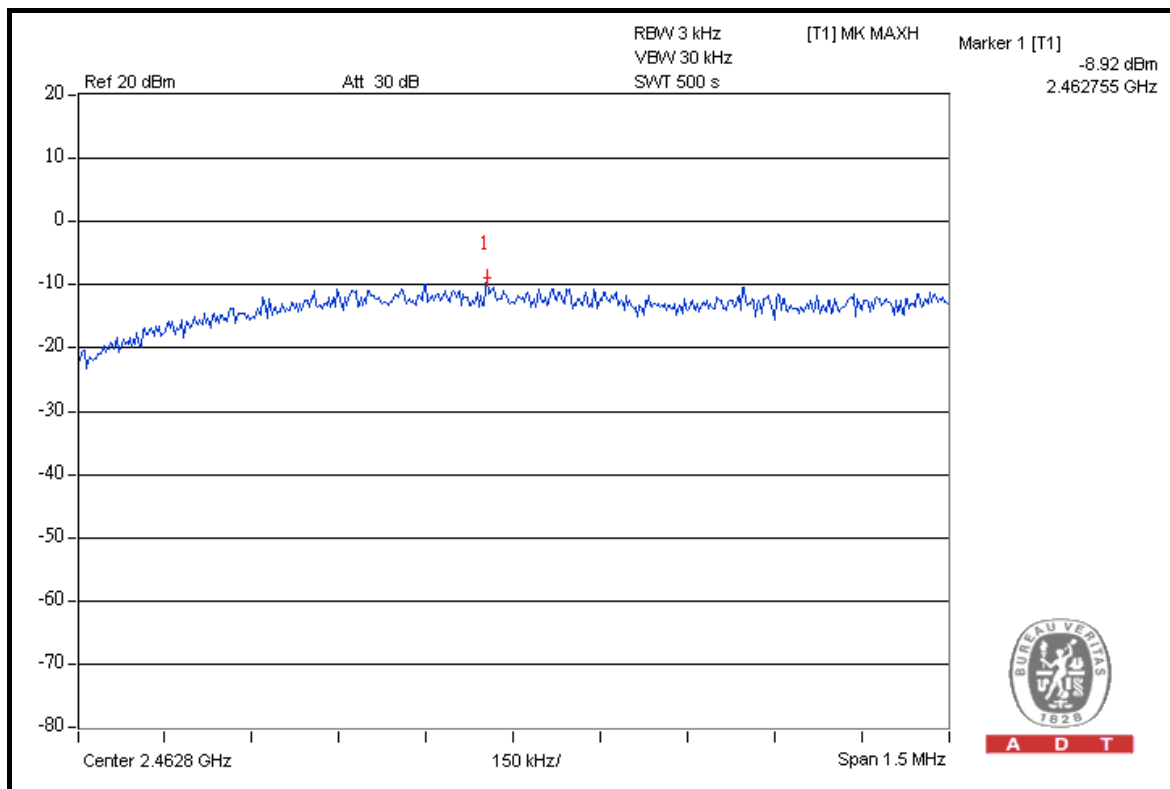


FOR CHAIN 1: CH 1

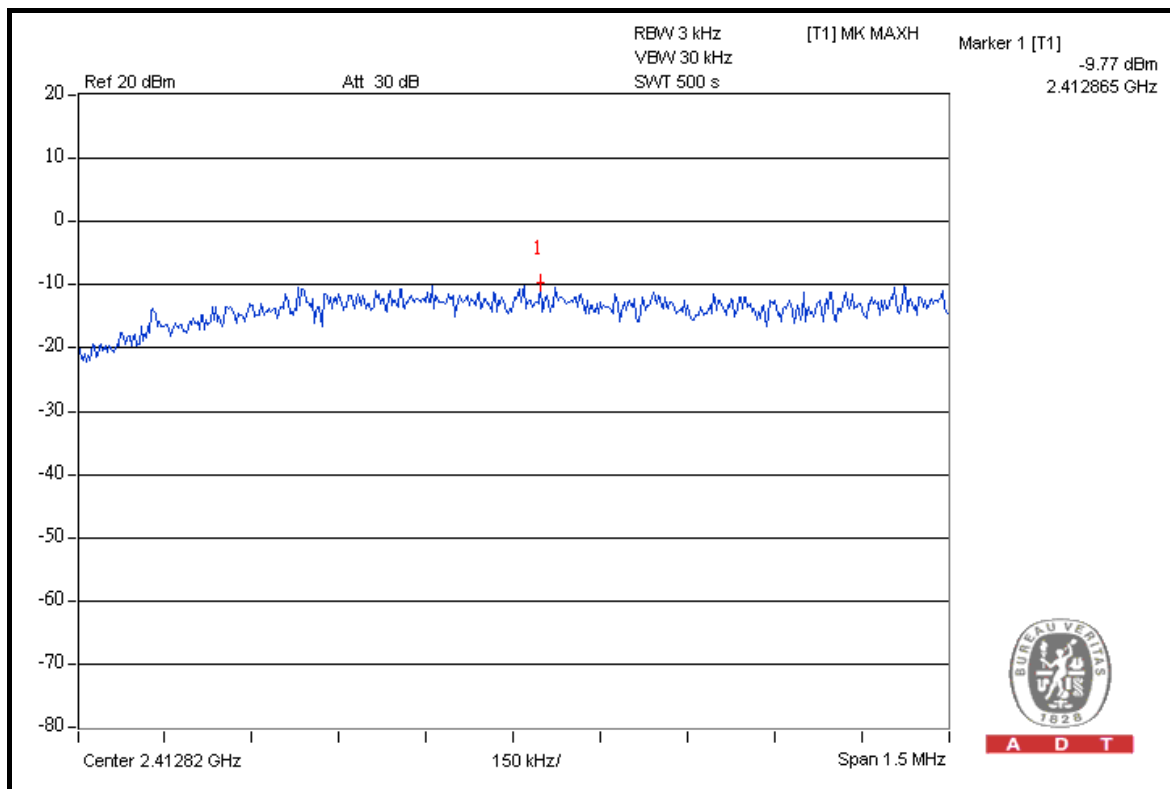




A D T

CH 6

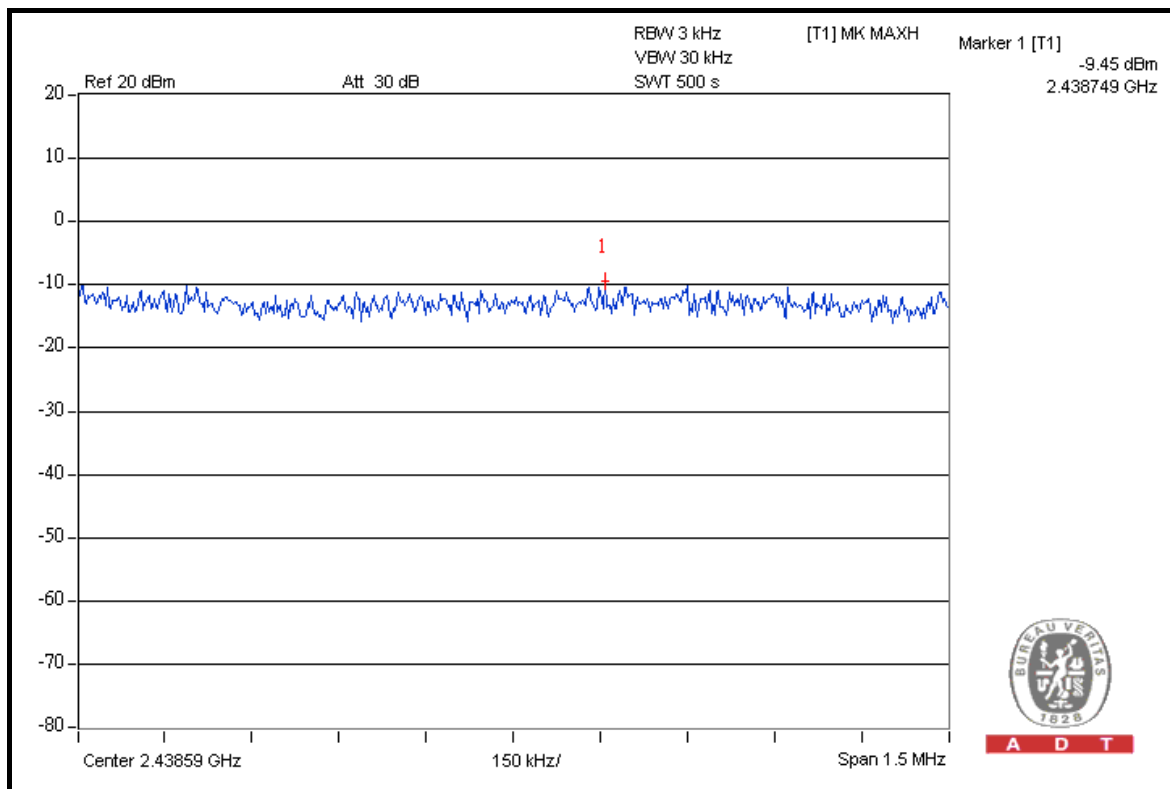

CH 11

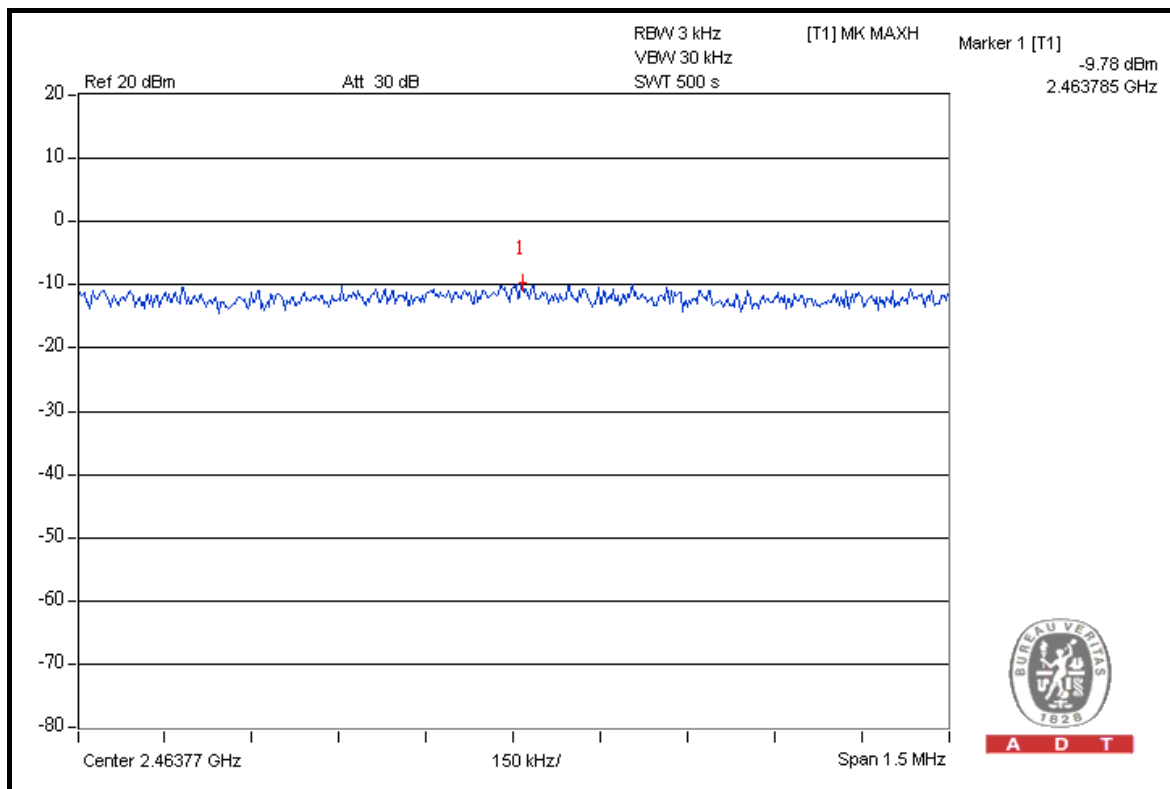

**A D T****802.11g OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-12.58	-12.48	0.11	-9.51	8	PASS
6	2437	-12.10	-11.83	0.13	-8.96	8	PASS
11	2462	-12.13	-11.78	0.13	-8.93	8	PASS




A D T

FOR CHAIN 0: CH 1

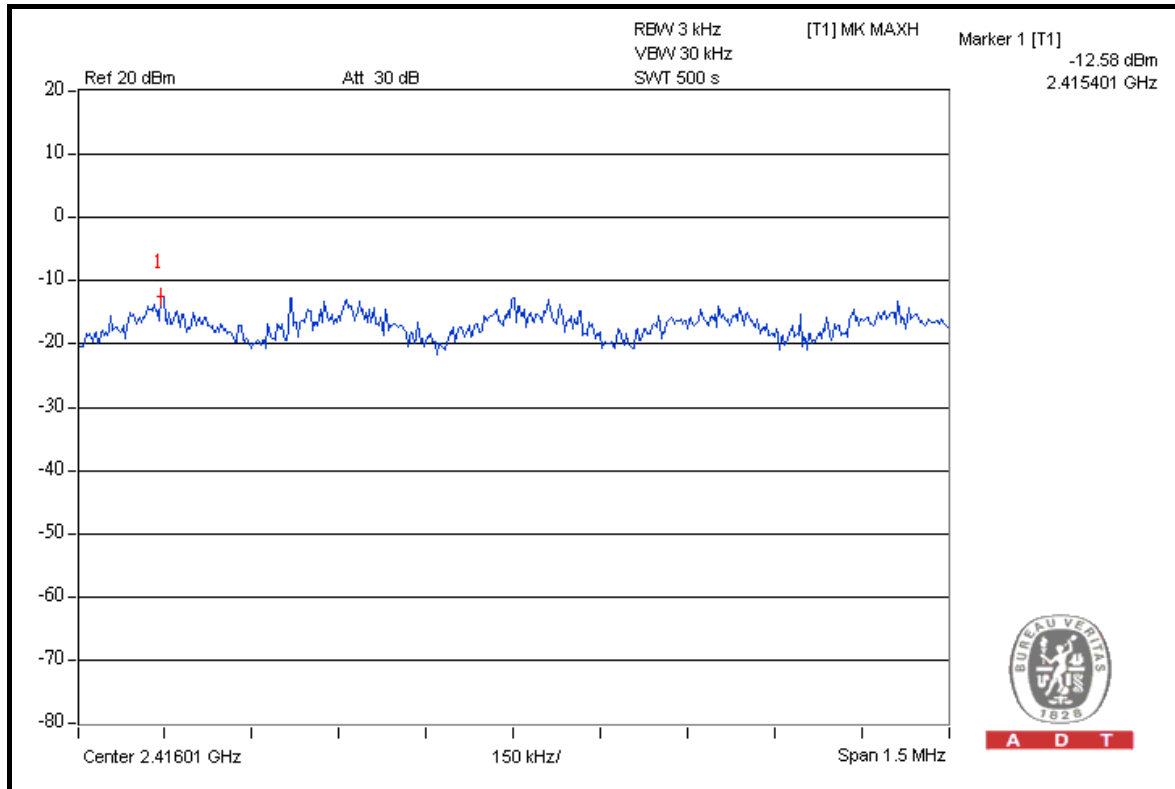


CH 6

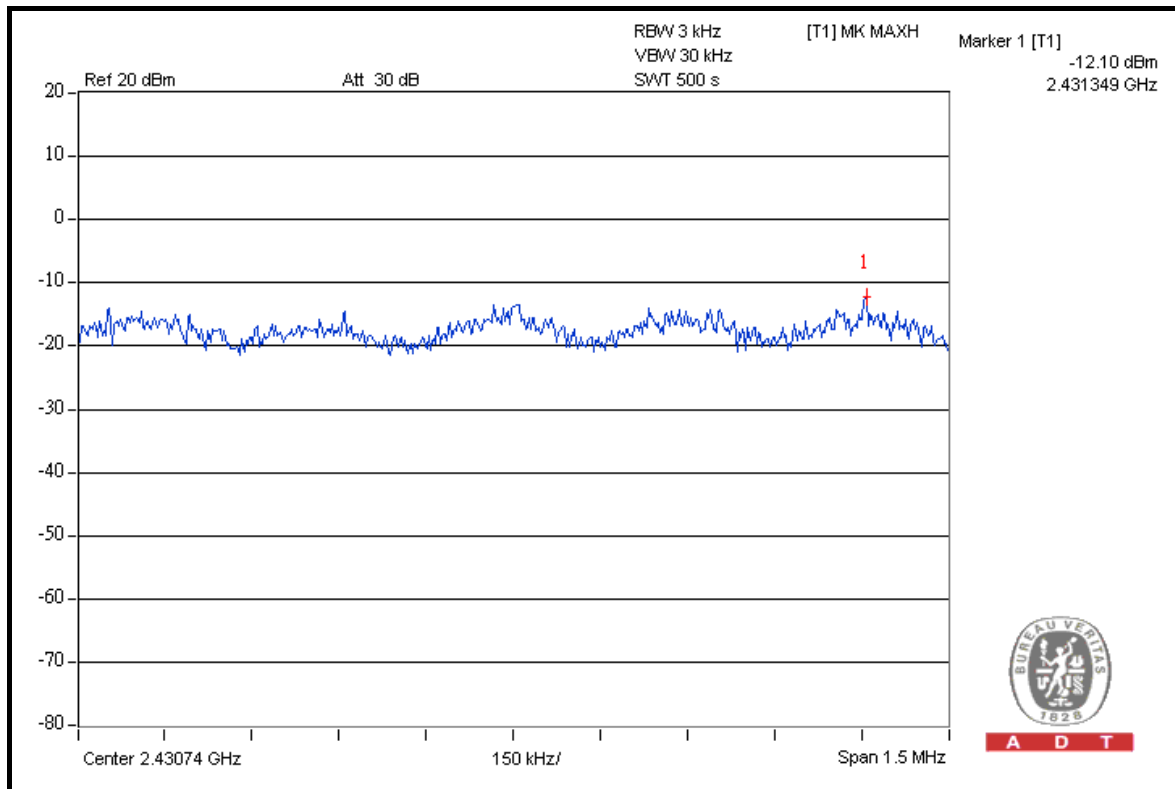




A D T

CH 11

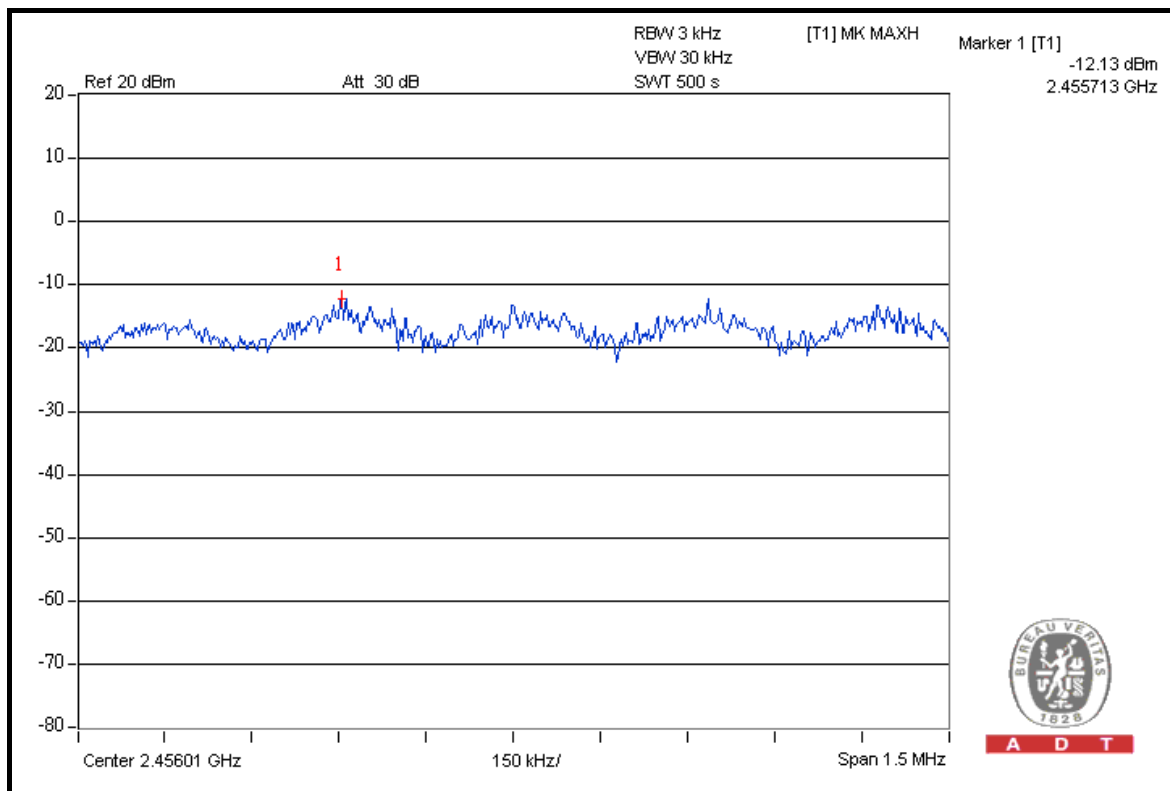


FOR CHAIN 1: CH 1

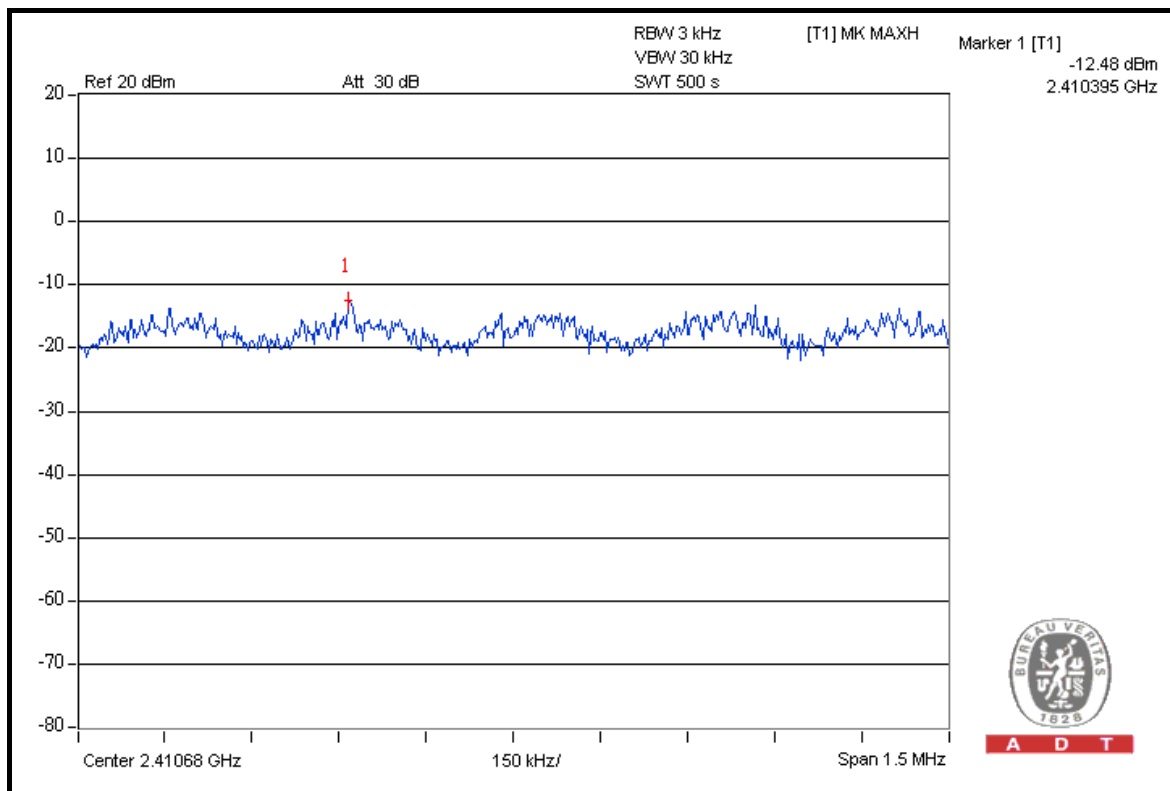




A D T

CH 6

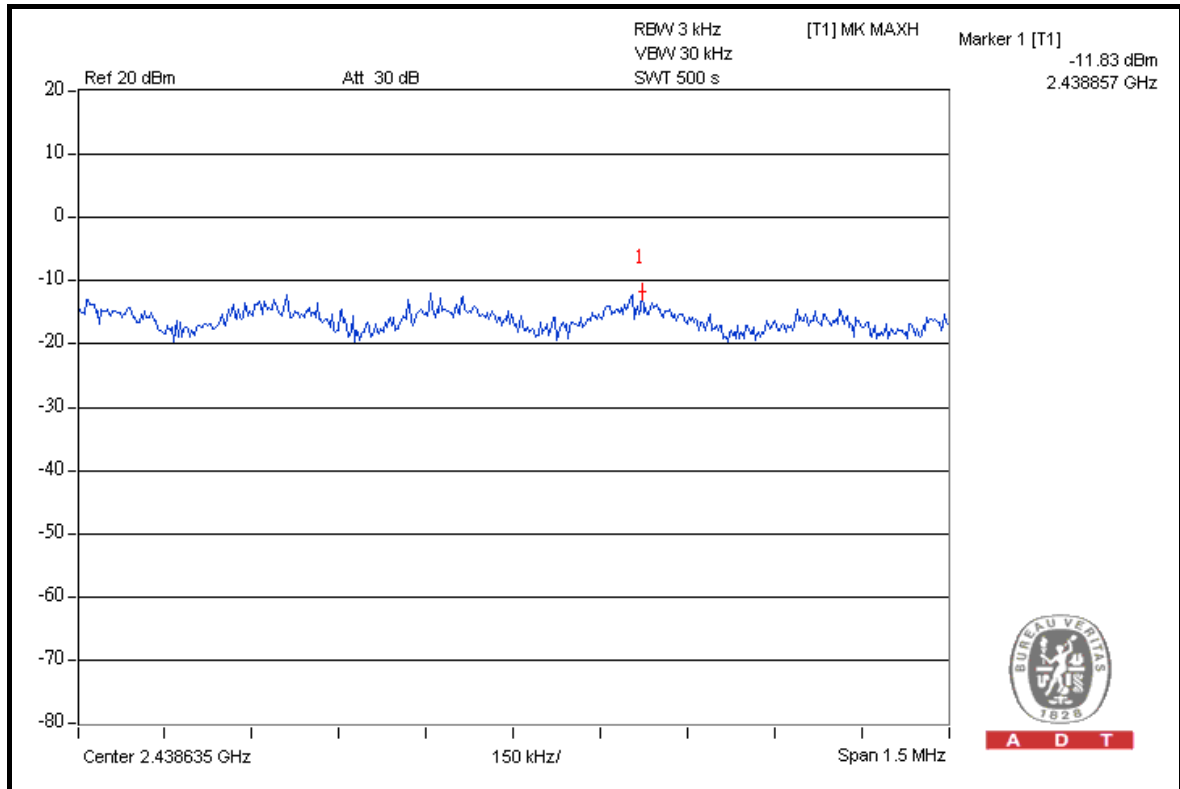

CH 11

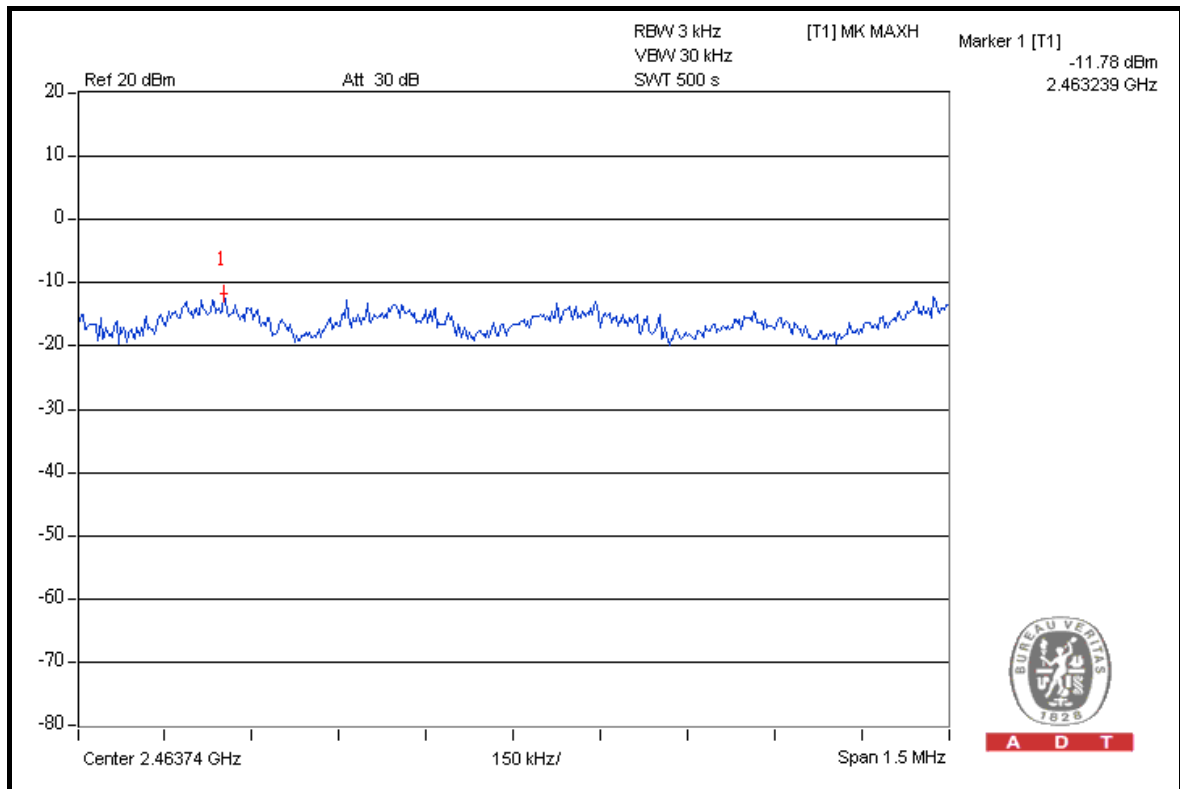

**A D T****DRAFT 802.11n (20MHz) OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-12.50	-12.05	0.12	-9.24	8	PASS
6	2437	-12.21	-11.83	0.13	-9.00	8	PASS
11	2462	-12.15	-11.81	0.13	-8.96	8	PASS




A D T

FOR CHAIN 0: CH 1

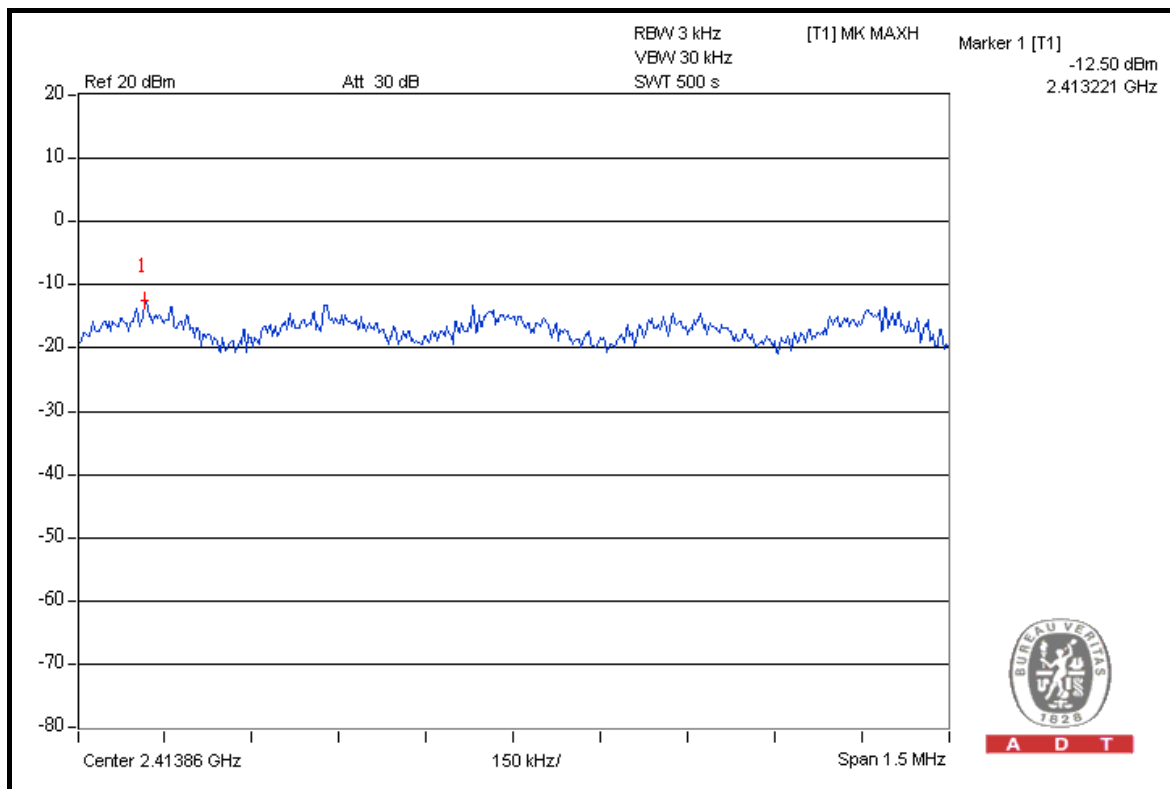


CH 6

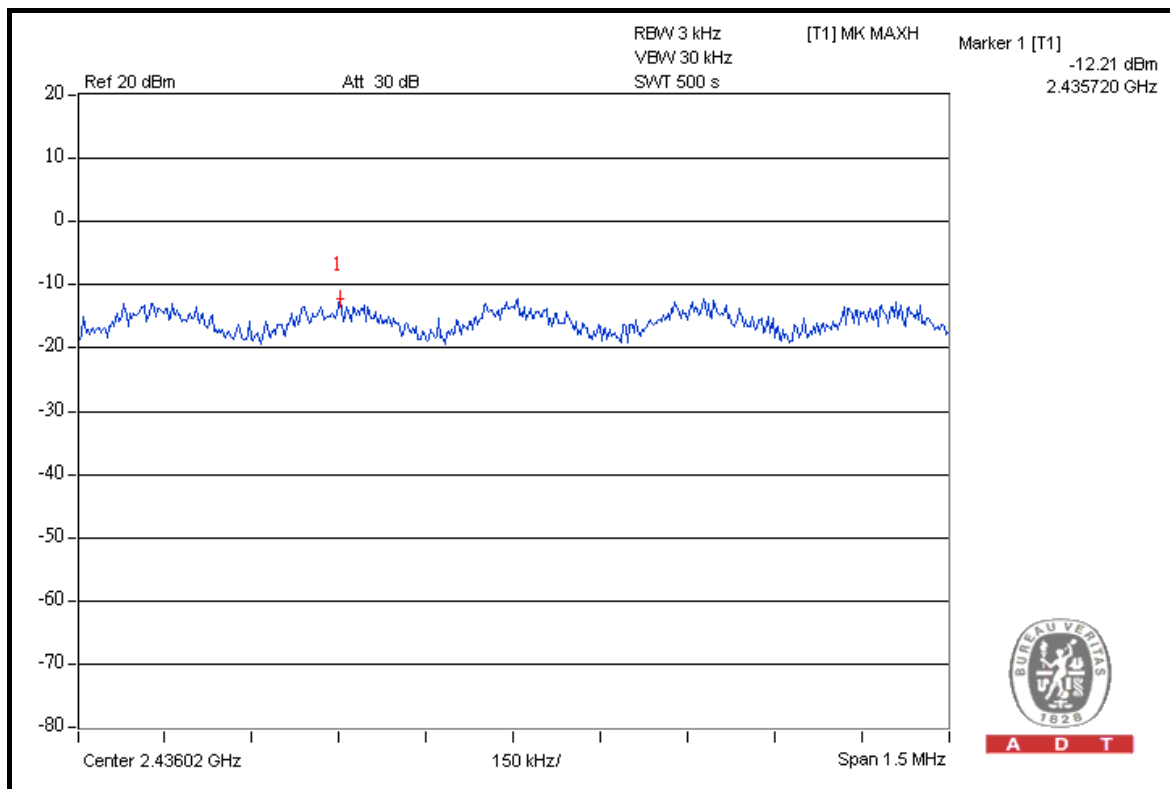




A D T

CH 11

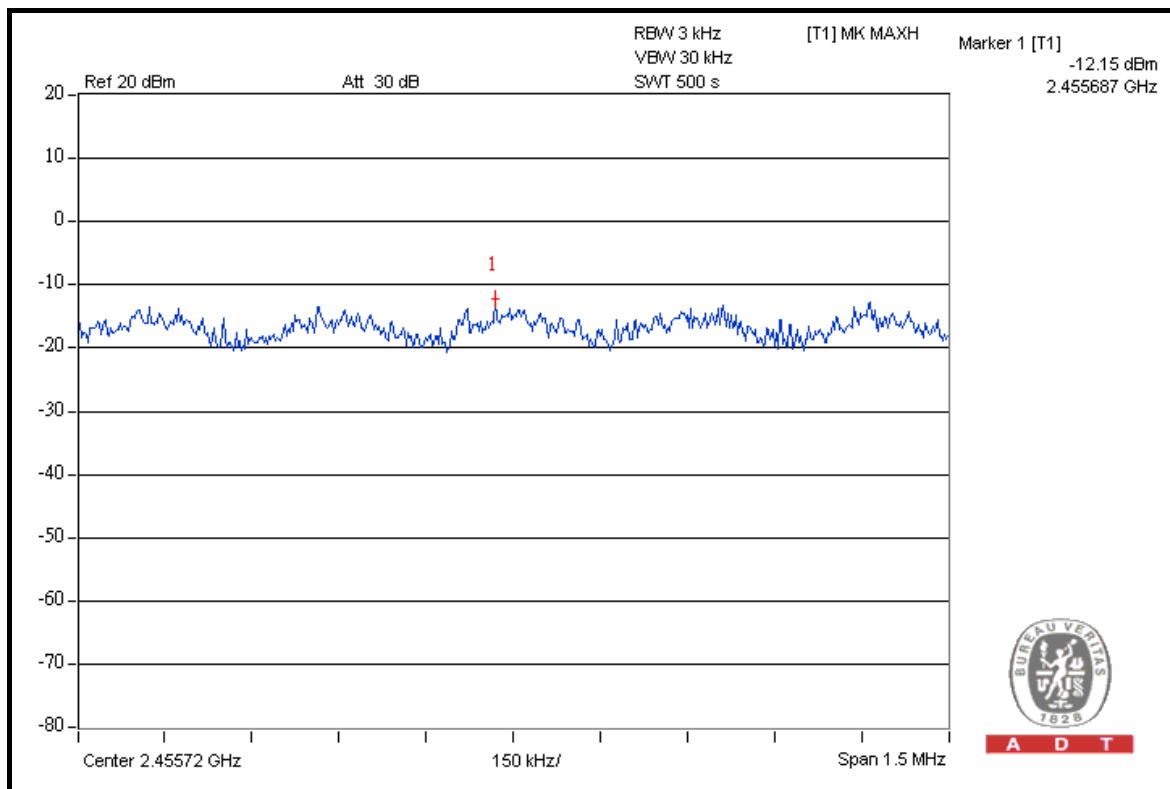

A D T

FOR CHAIN 1: CH 1

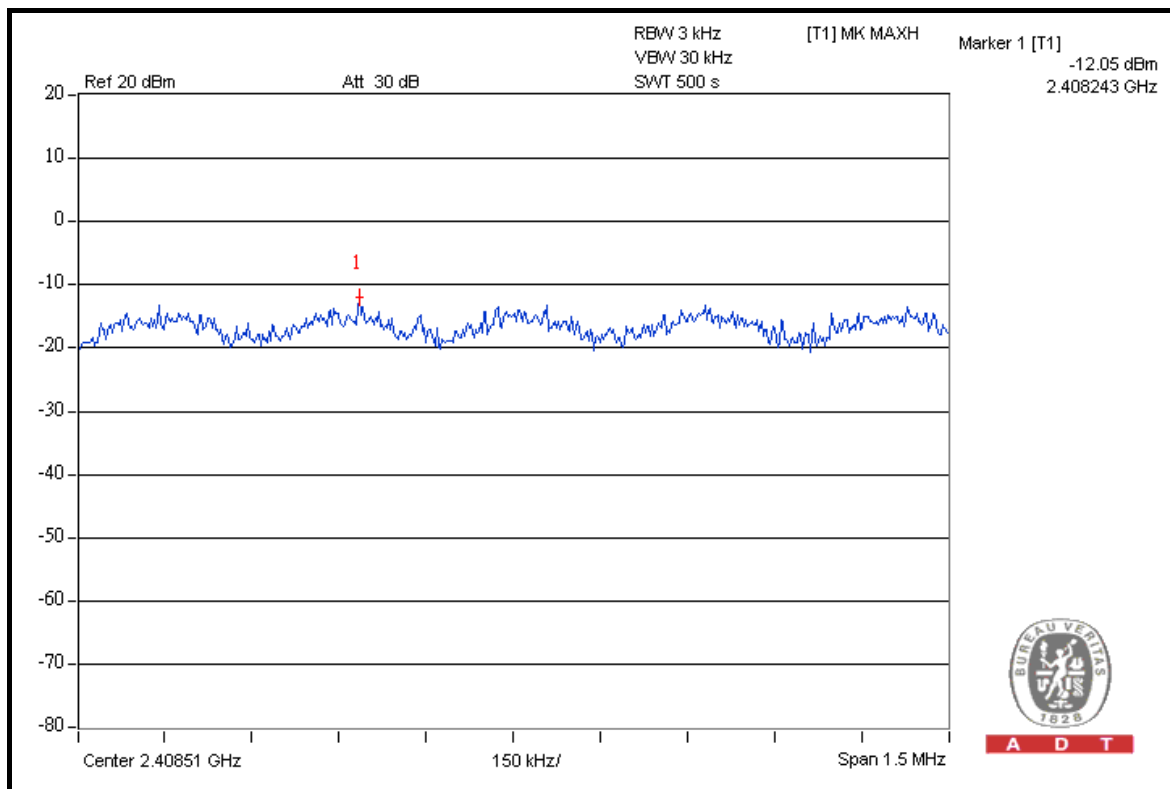


A D T




A D T

CH 6

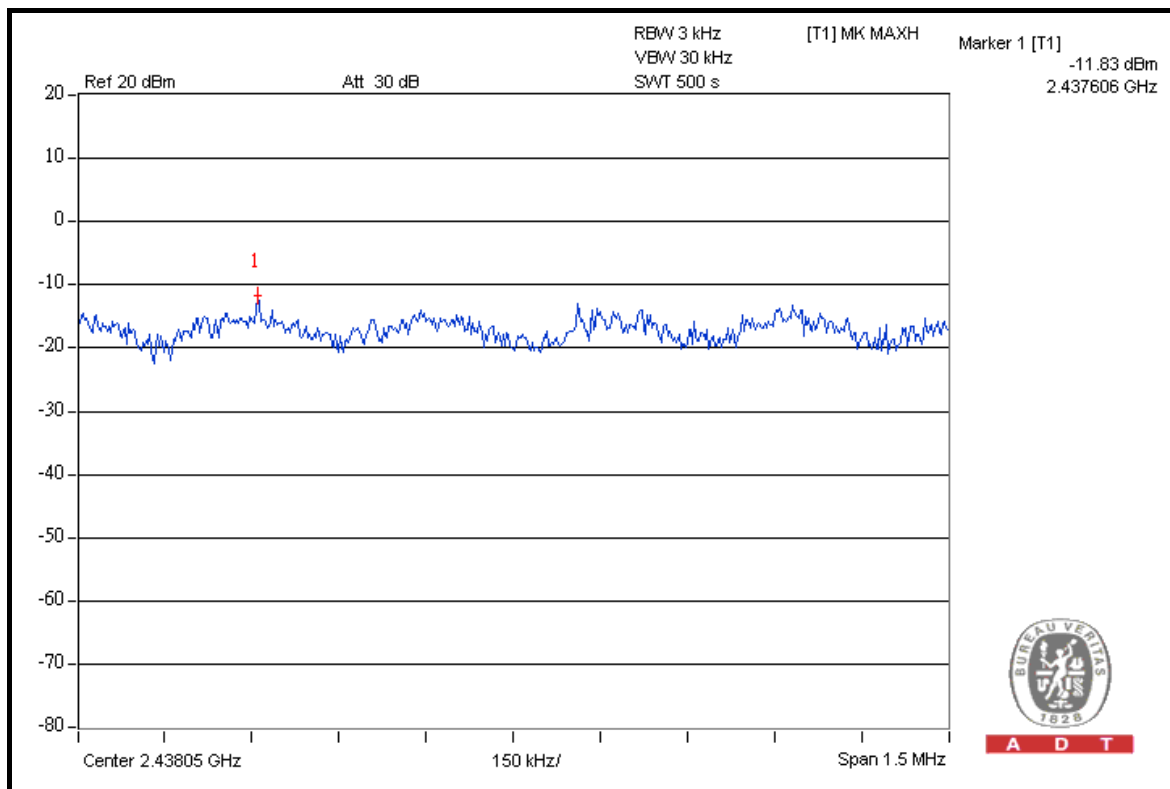

CH 11

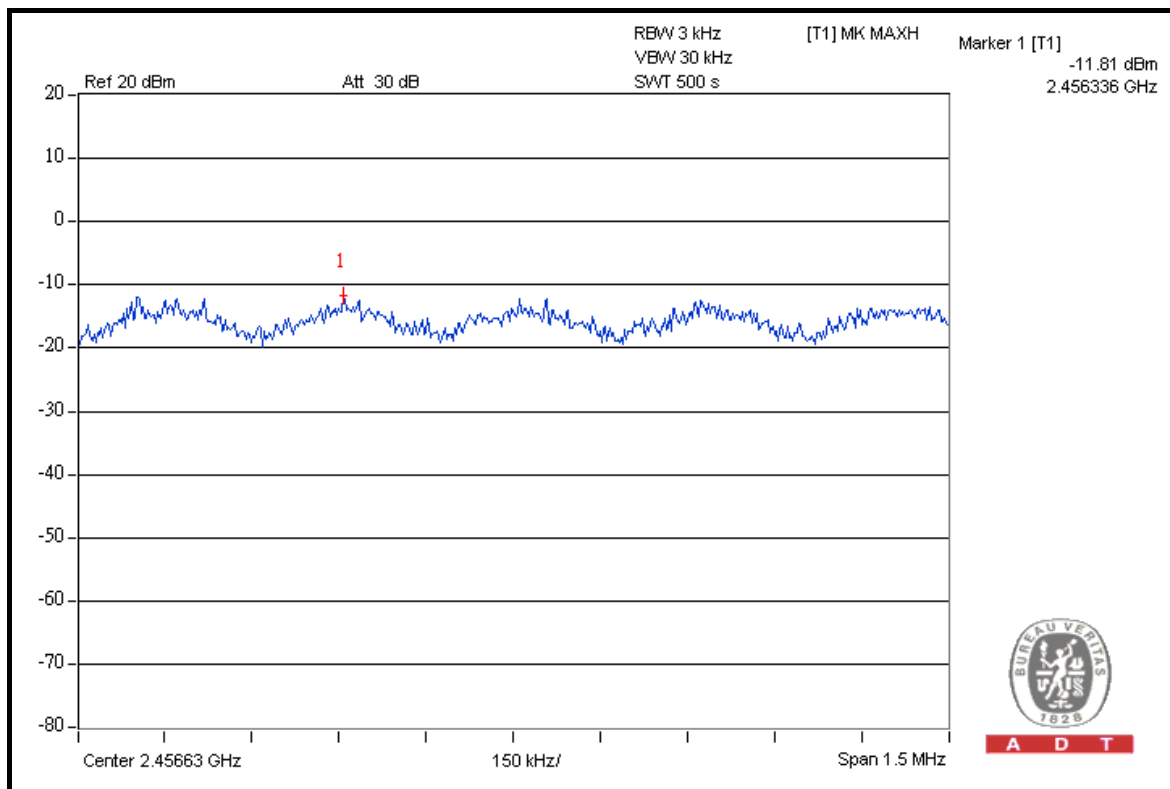

**A D T****DRAFT 802.11n (40MHz) OFDM MODULATION**


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 65 %RH, 1008 hPa
TESTED BY	Dean Wang		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	-16.93	-16.26	0.04	-13.57	8	PASS
4	2437	-16.40	-16.37	0.05	-13.37	8	PASS
7	2452	-16.70	-16.14	0.05	-13.37	8	PASS




A D T

FOR CHAIN 0: CH 1

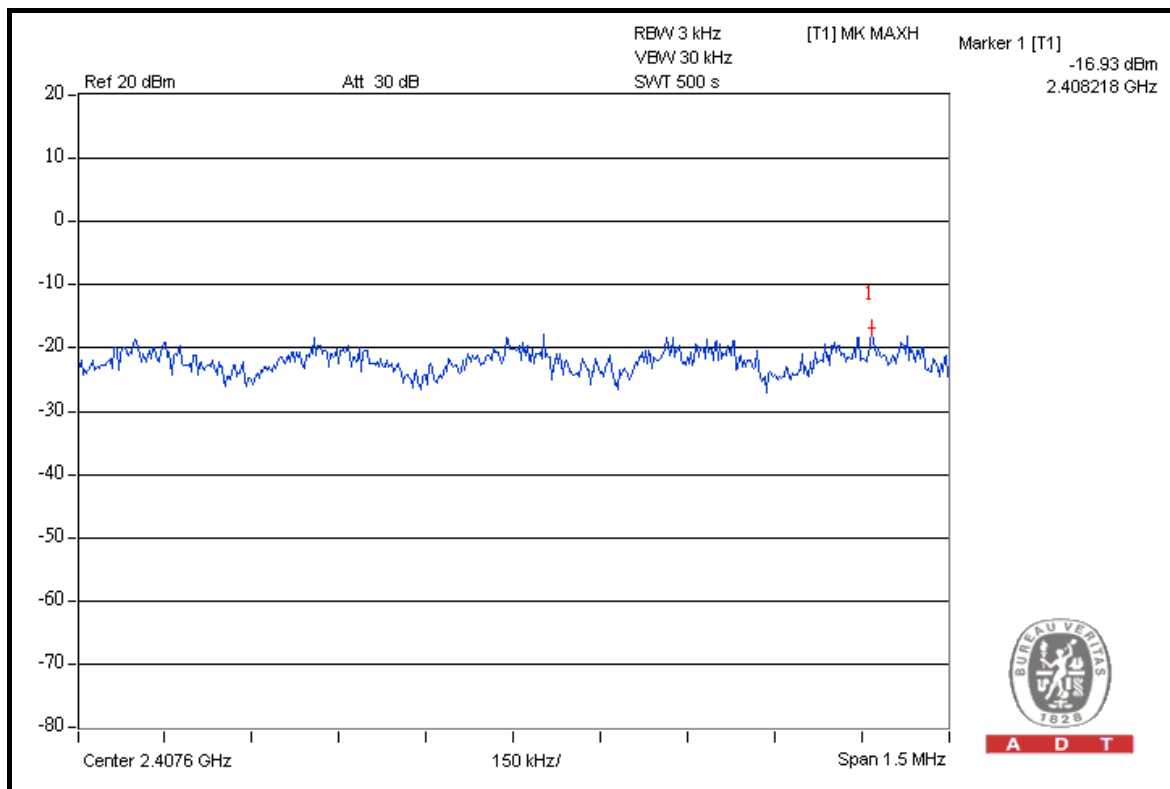


CH 4

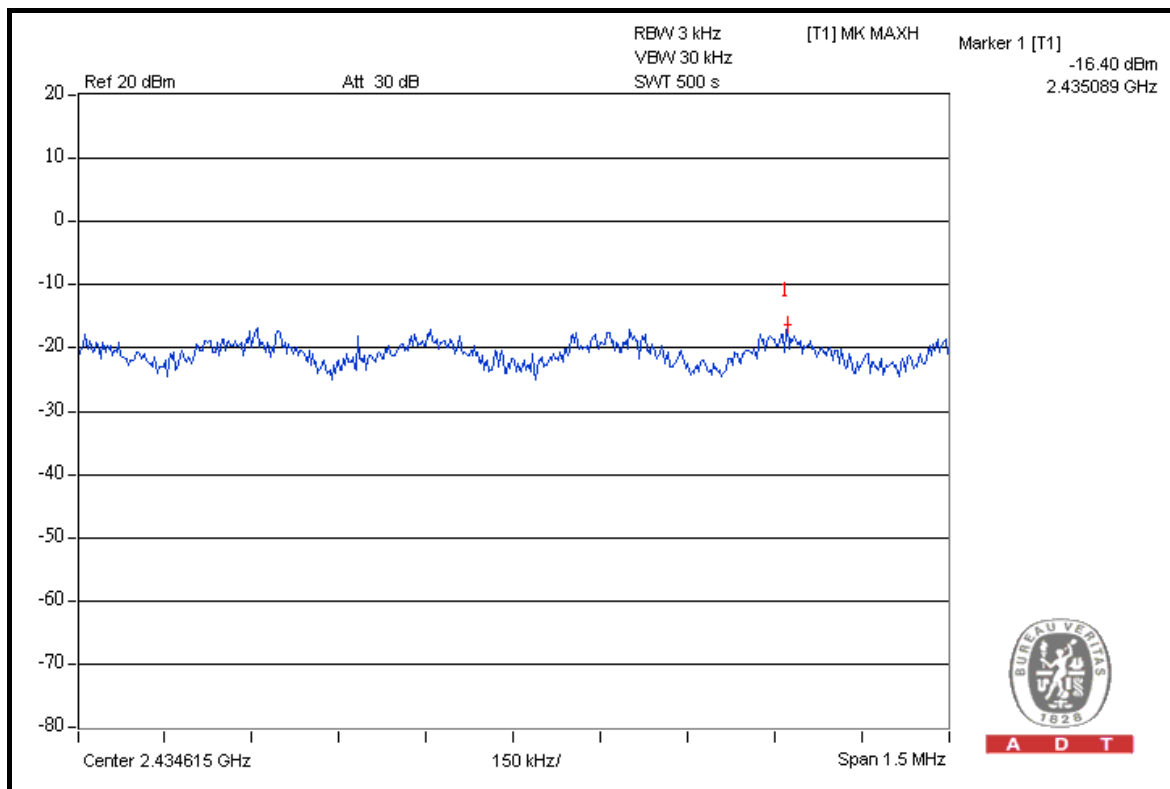




A D T

CH 7

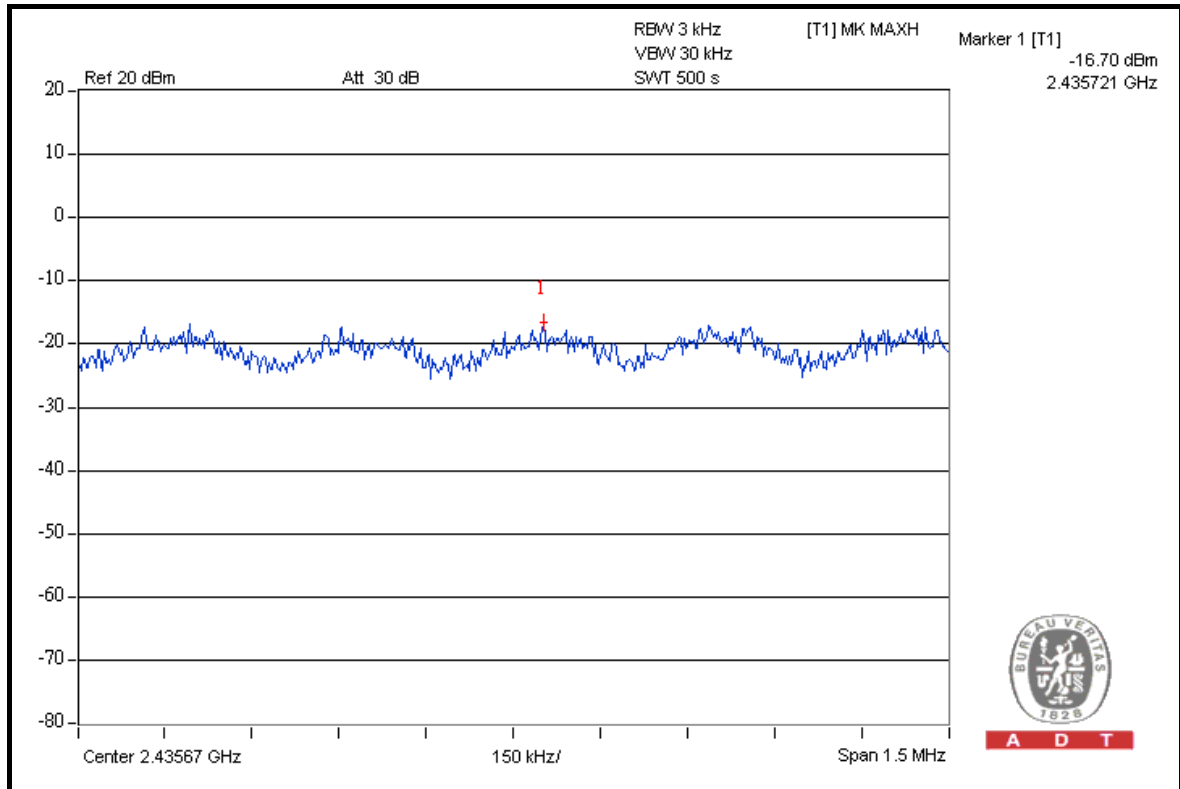

A D T

FOR CHAIN 1: CH 1

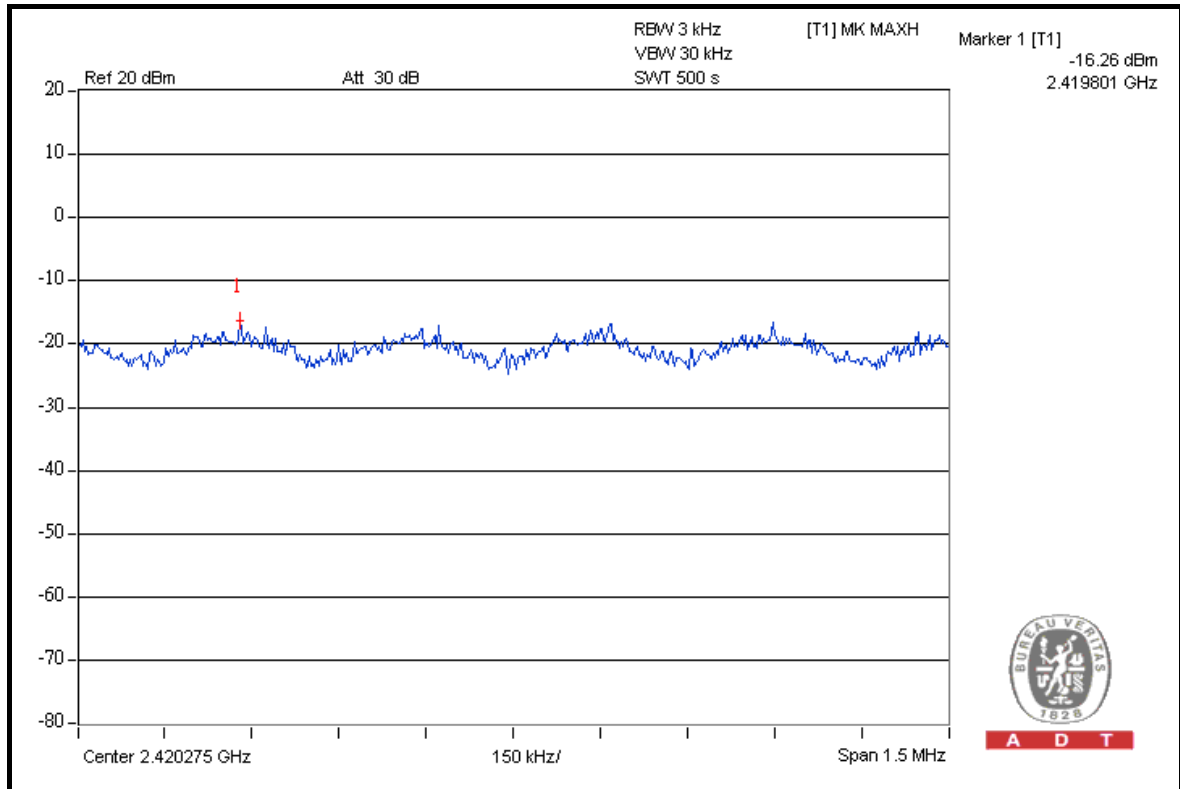


A D T




A D T

CH 4

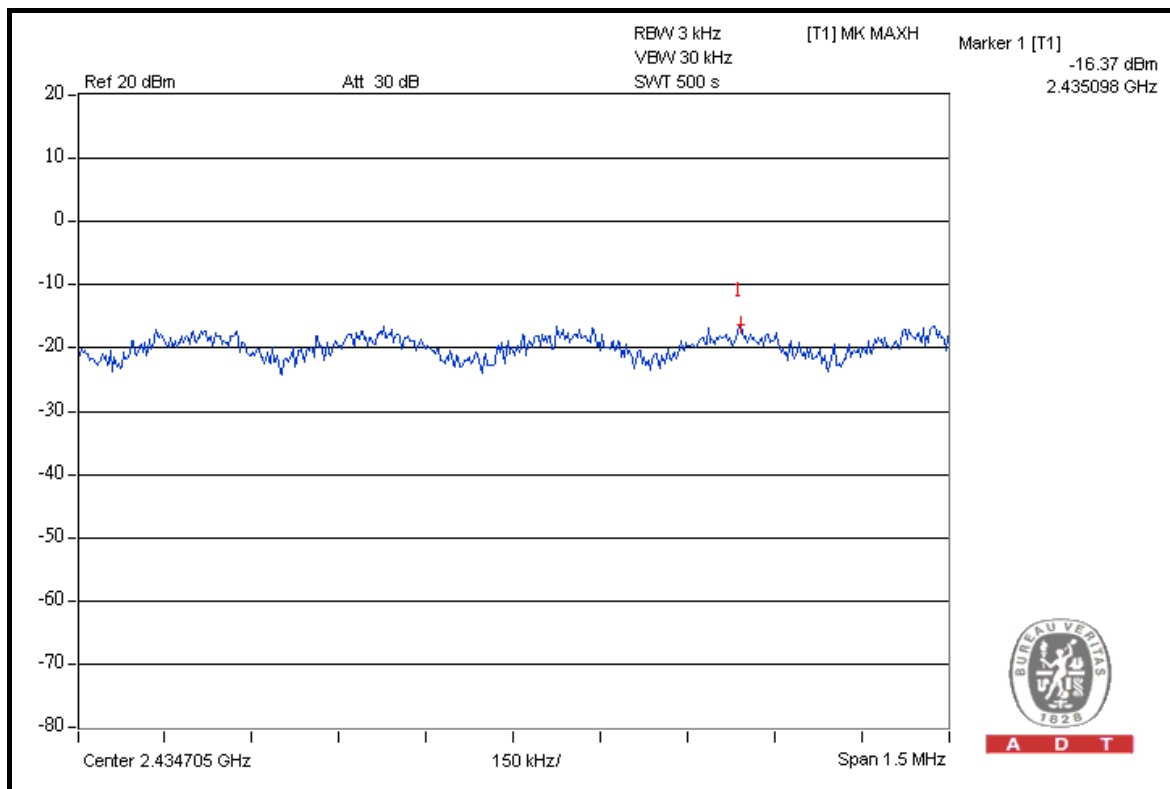

CH 7

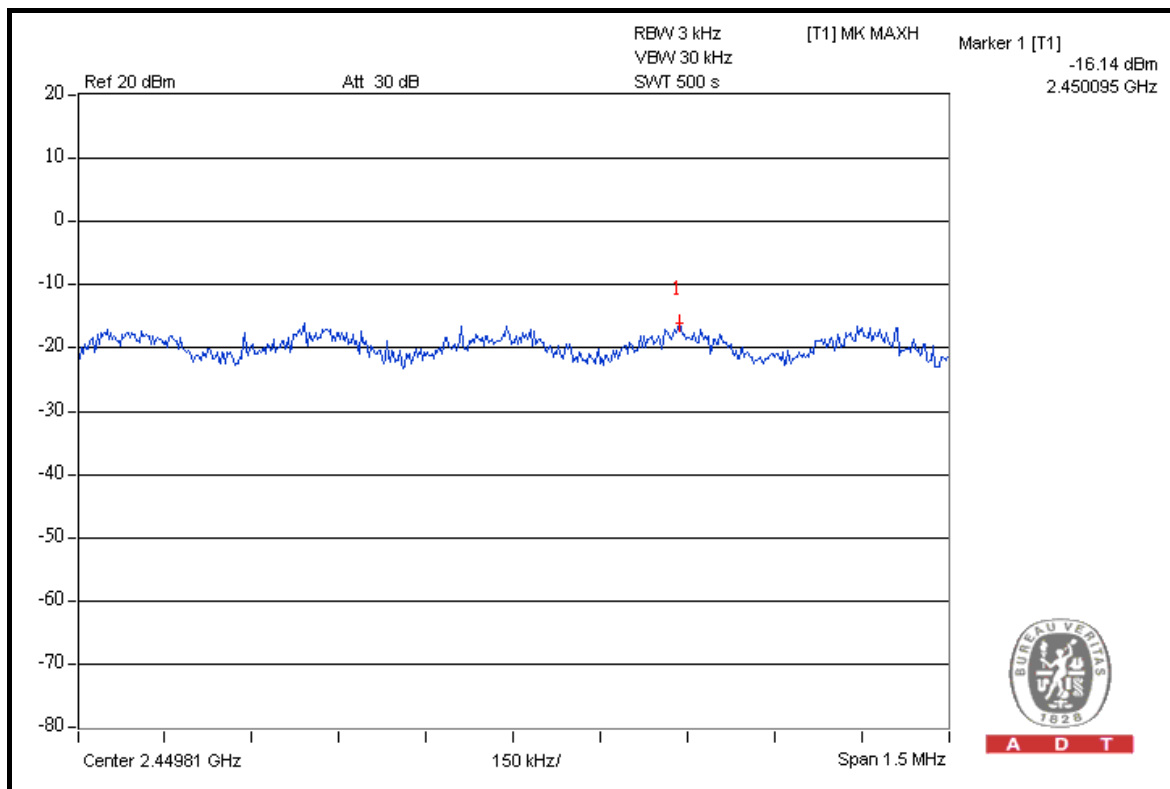

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2009	Apr. 29, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 10, 2009	Aug. 09, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 13, 2009	May 12, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 17, 2009	Aug. 16, 2010
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 53.59dBc between carrier maximum power and local maximum emission in restrict band (2.36740GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.41dBuV/m (Peak), so the maximum field strength in restrict band is $112.41 - 53.59 = 58.82$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot of on the next page shows 62.15dBc between carrier maximum power and local maximum emission in restrict band (2.37300GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.31dBuV/m (Average), so the maximum field strength in restrict band is $107.31 - 62.15 = 45.16$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 54.40dBc between carrier maximum power and local maximum emission in restrict band (2.49040GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.80dBuV/m (Peak), so the maximum field strength in restrict band is $112.80 - 54.40 = 58.40$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 61.17dBc between carrier maximum power and local maximum emission in restrict band (2.49880GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.68dBuV/m (Average), so the maximum field strength in restrict band is $107.68 - 61.17 = 46.51$ dBuV/m which is under 54dBuV/m limit.



A D T

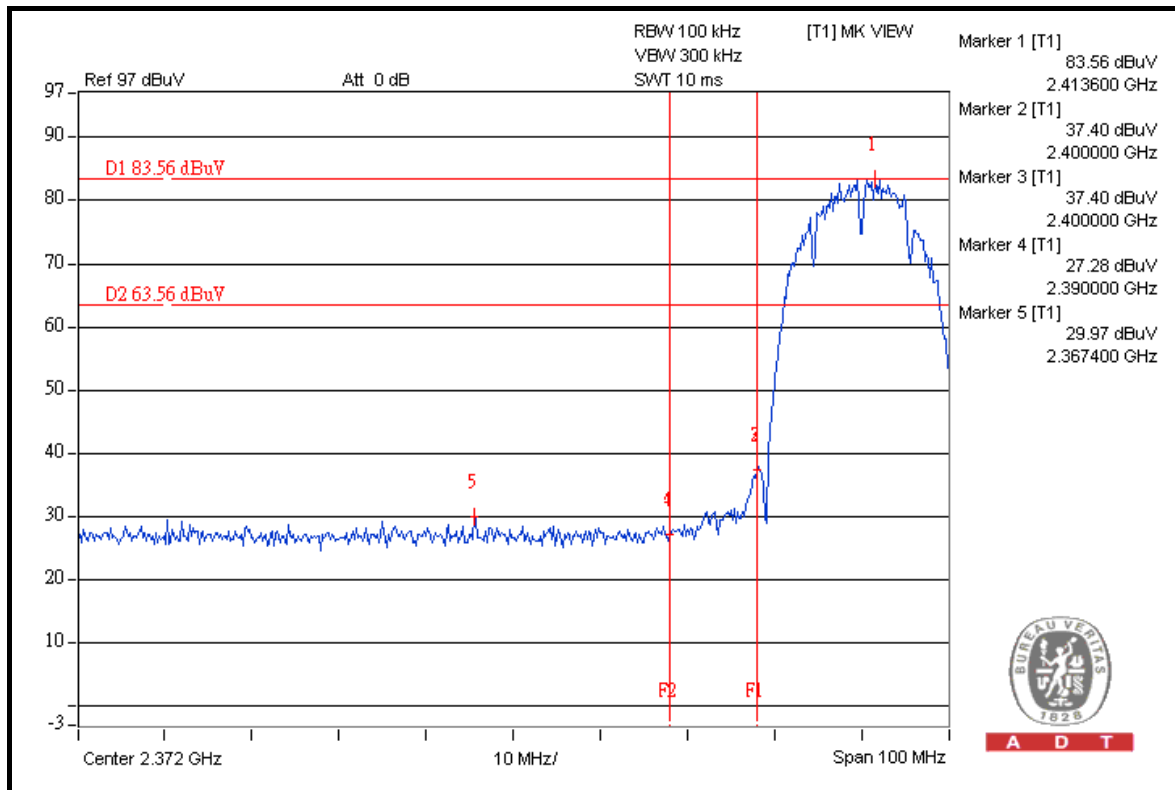


A D T

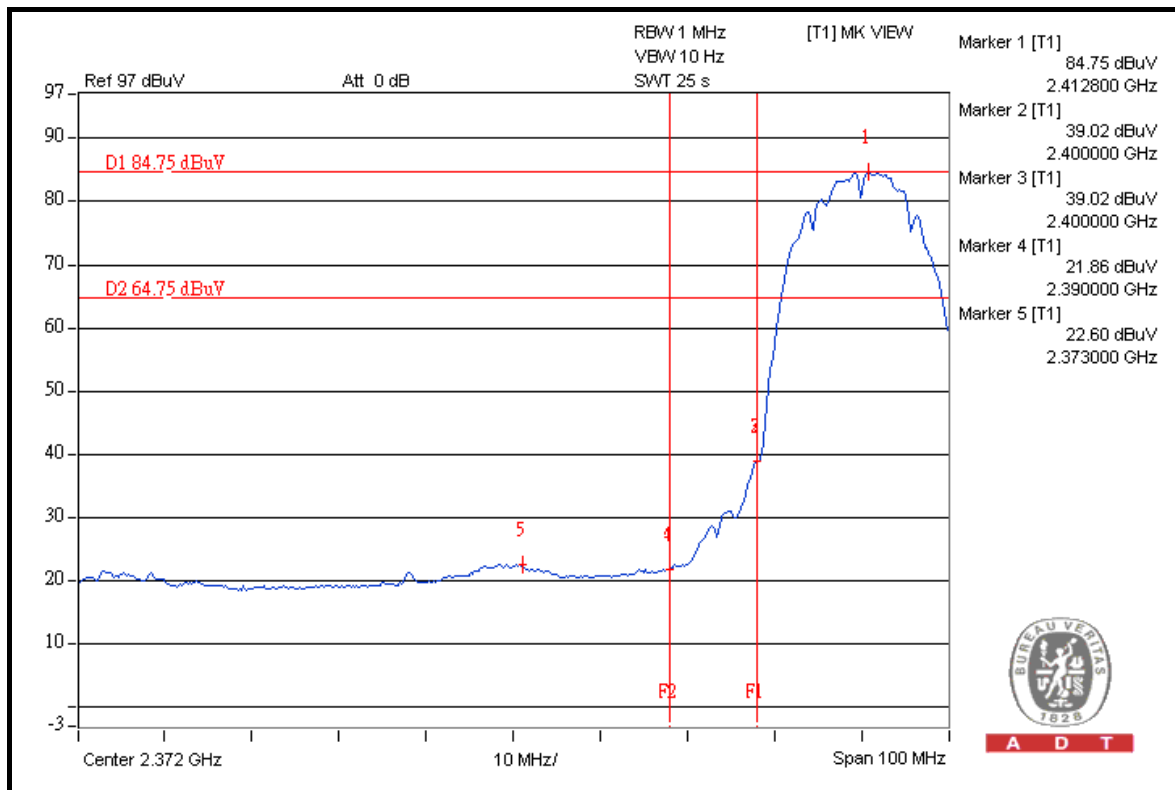


A D T



A D T

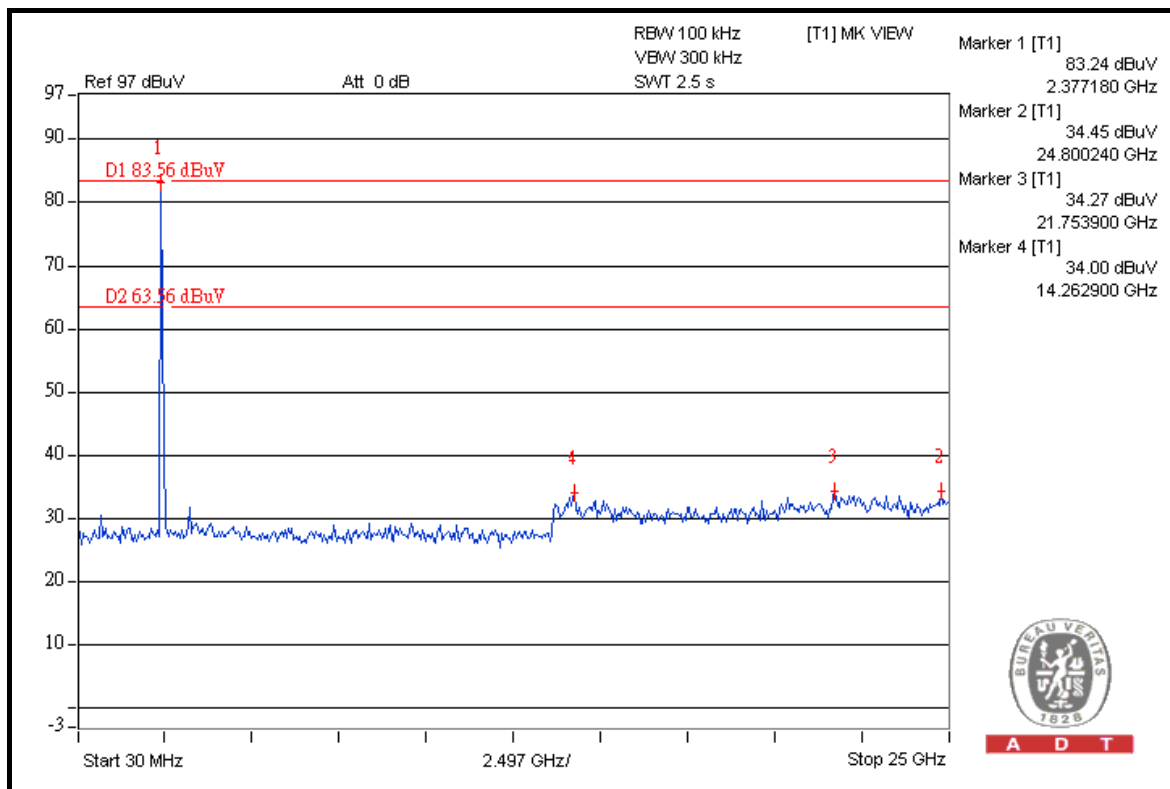


A D T

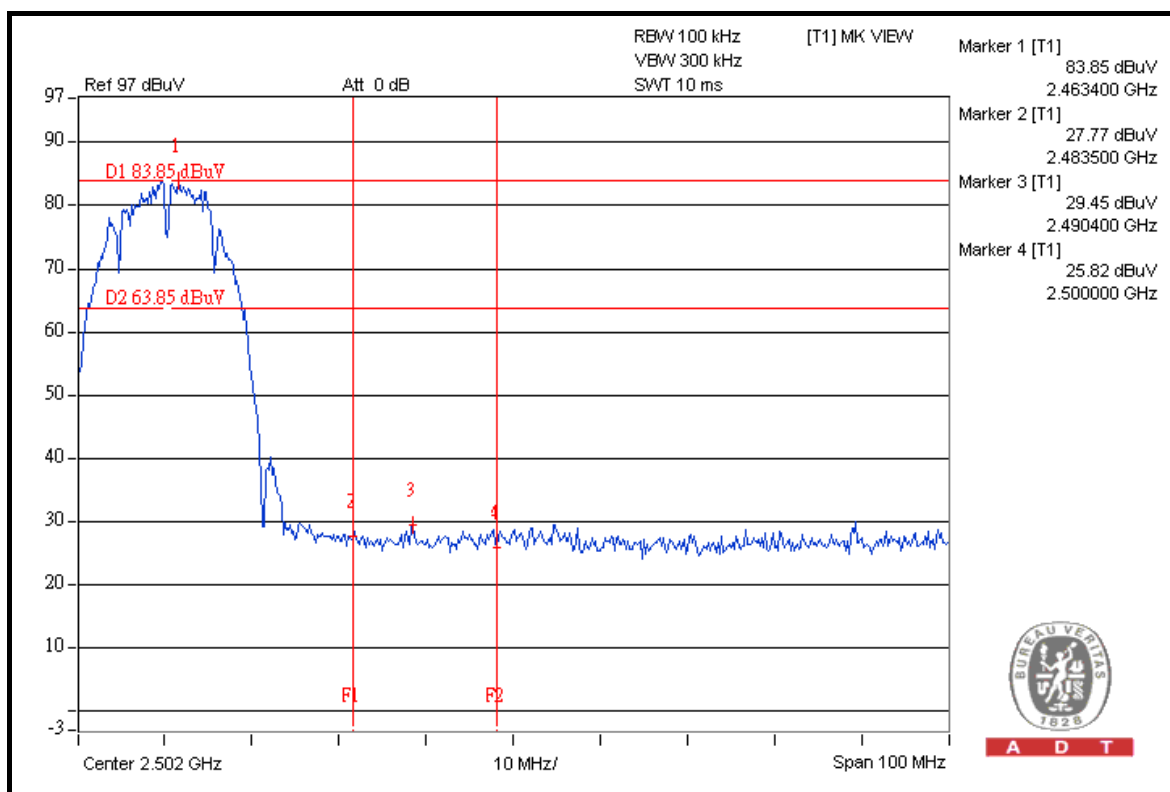


A D T



A D T

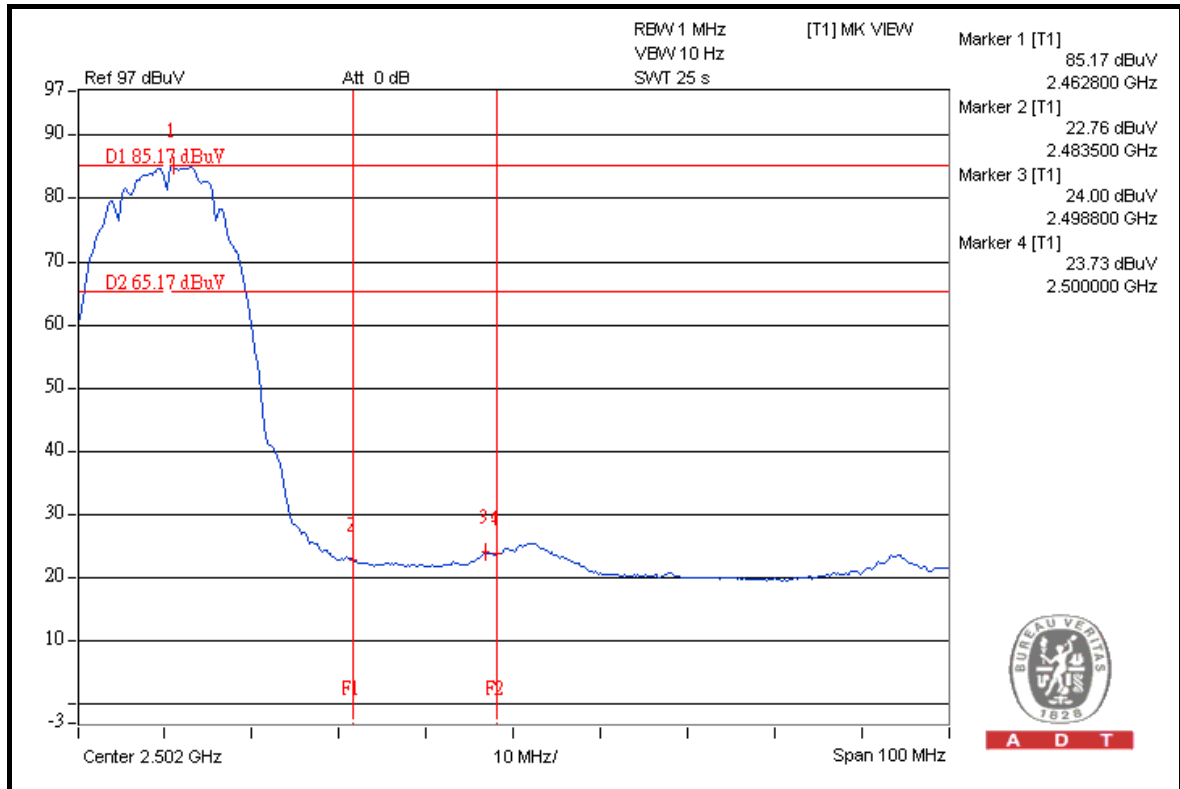

A D T

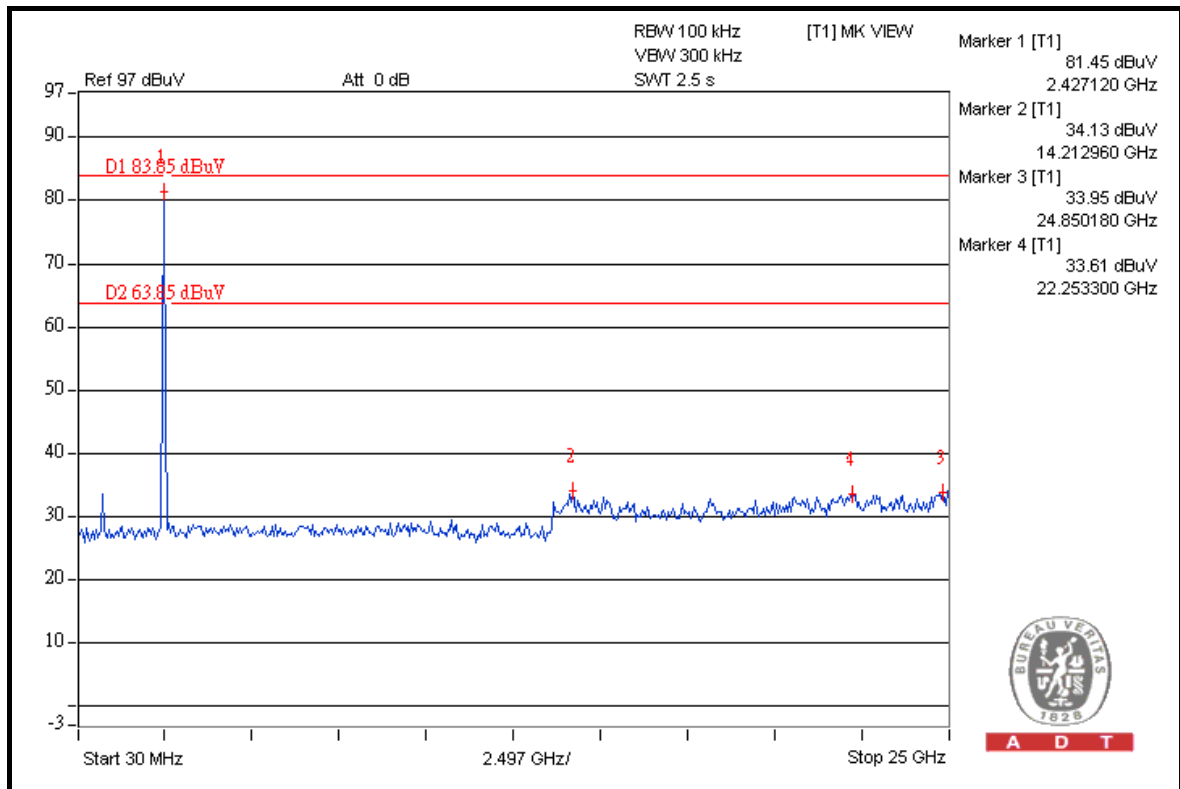

A D T

802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 46.55dBc between carrier maximum power and local maximum emission in restrict band (2.37300GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 113.31dBuV/m (Peak), so the maximum field strength in restrict band is $113.31 - 46.55 = 66.76$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot of on the next page shows 50.24dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 101.22dBuV/m (Average), so the maximum field strength in restrict band is $101.22 - 50.24 = 50.98$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 46.23dBc between carrier maximum power and local maximum emission in restrict band (2.49820GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 113.59dBuV/m (Peak), so the maximum field strength in restrict band is $113.59 - 46.23 = 67.36$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 50.37dBc between carrier maximum power and local maximum emission in restrict band (2.49860GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 101.47dBuV/m (Average), so the maximum field strength in restrict band is $101.47 - 50.37 = 51.10$ dBuV/m which is under 54dBuV/m limit.



A D T

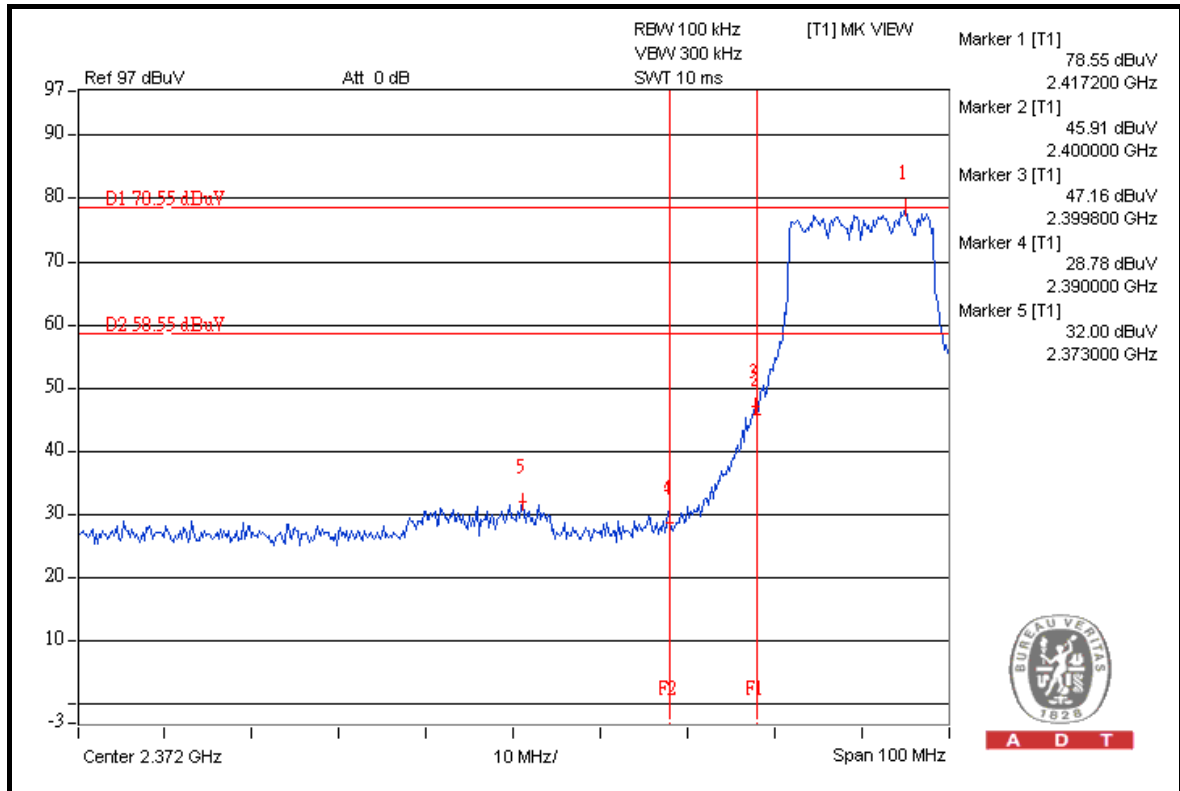


A D T

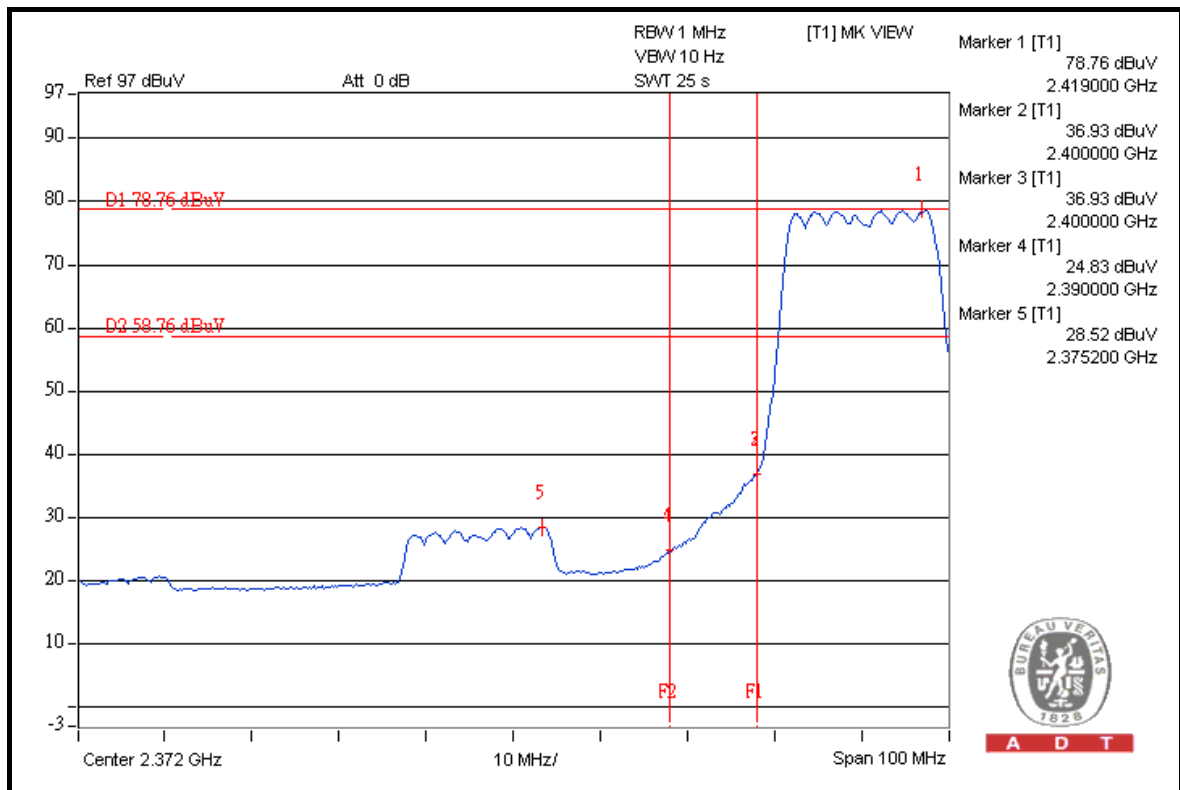


A D T



A D T

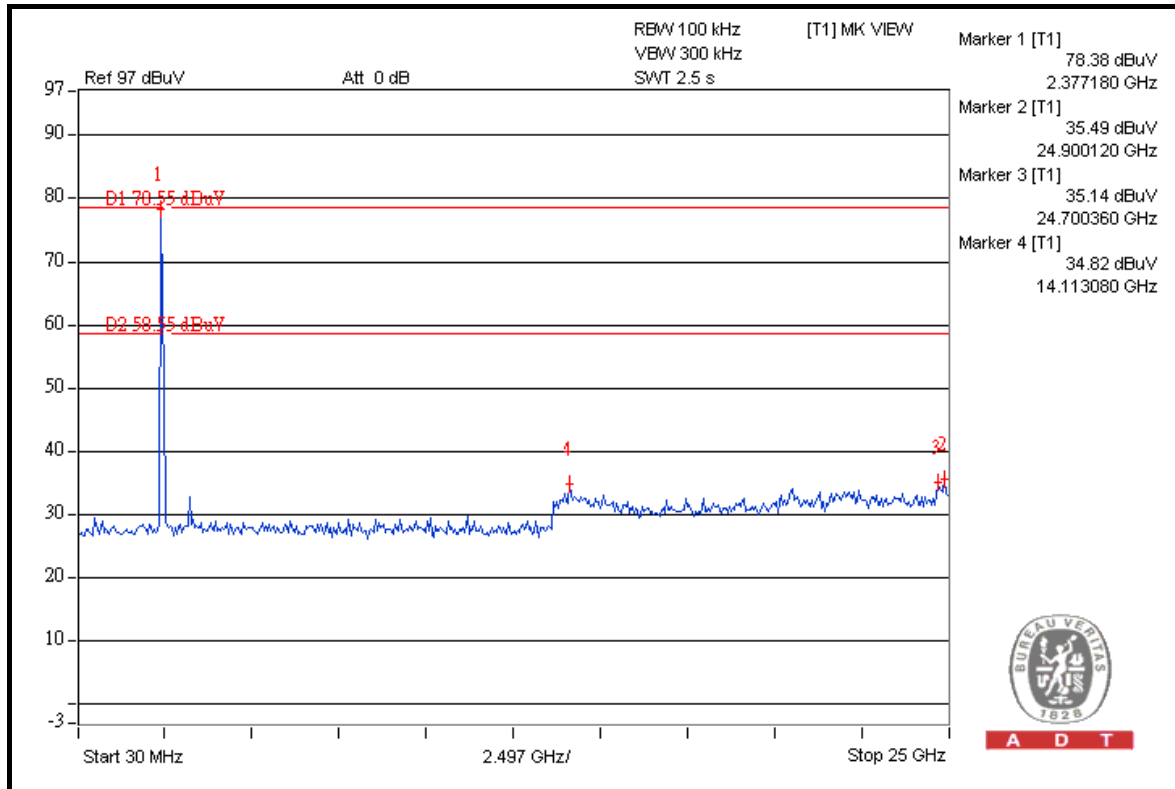


A D T

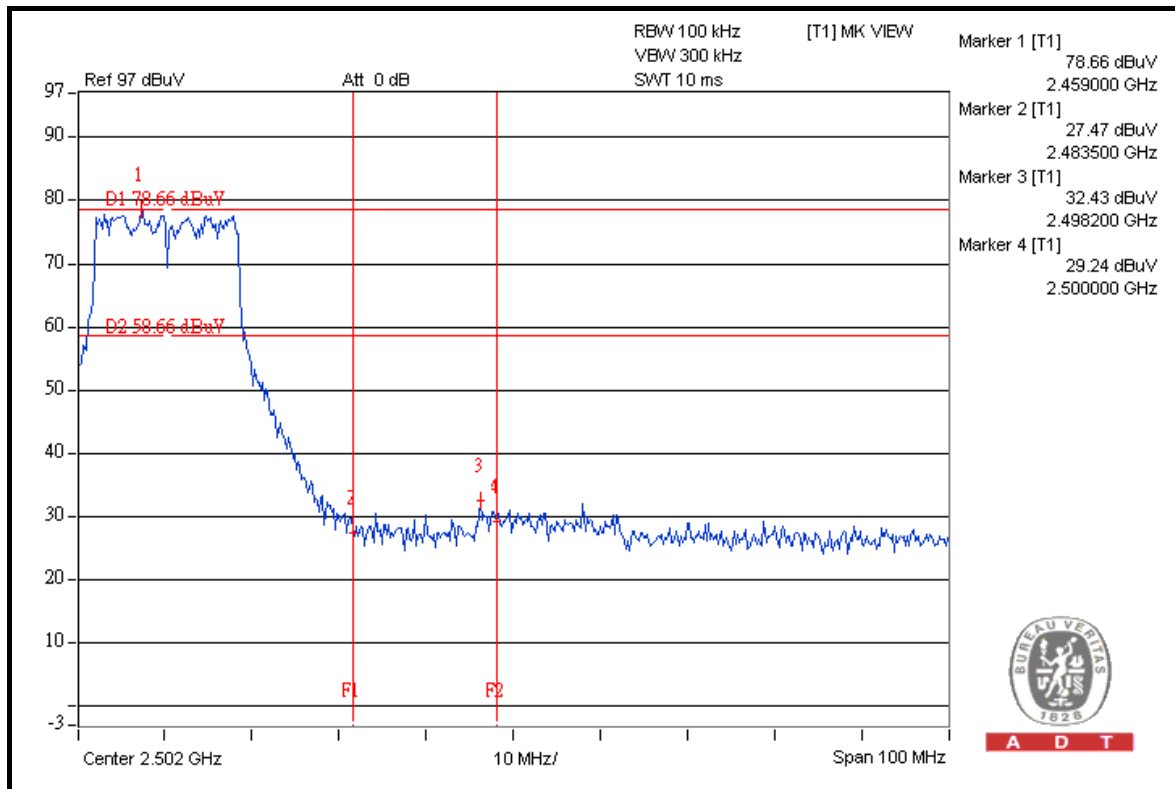


A D T



A D T

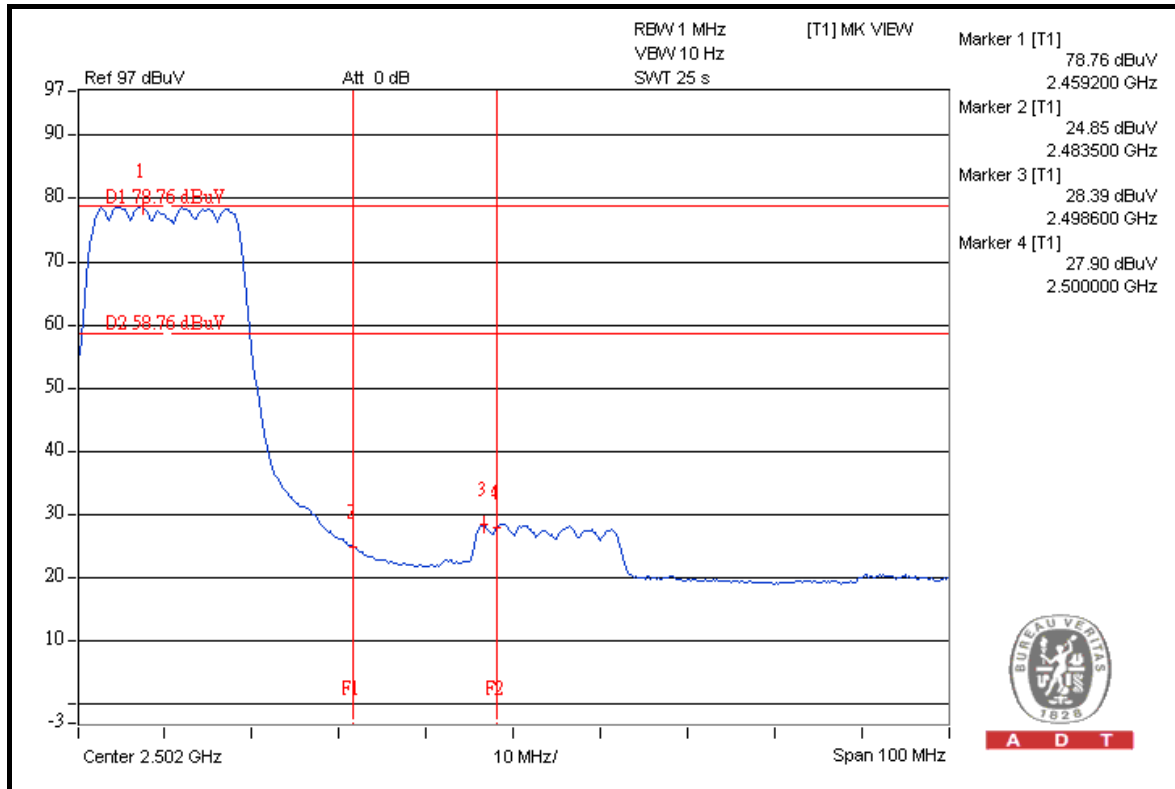

A D T

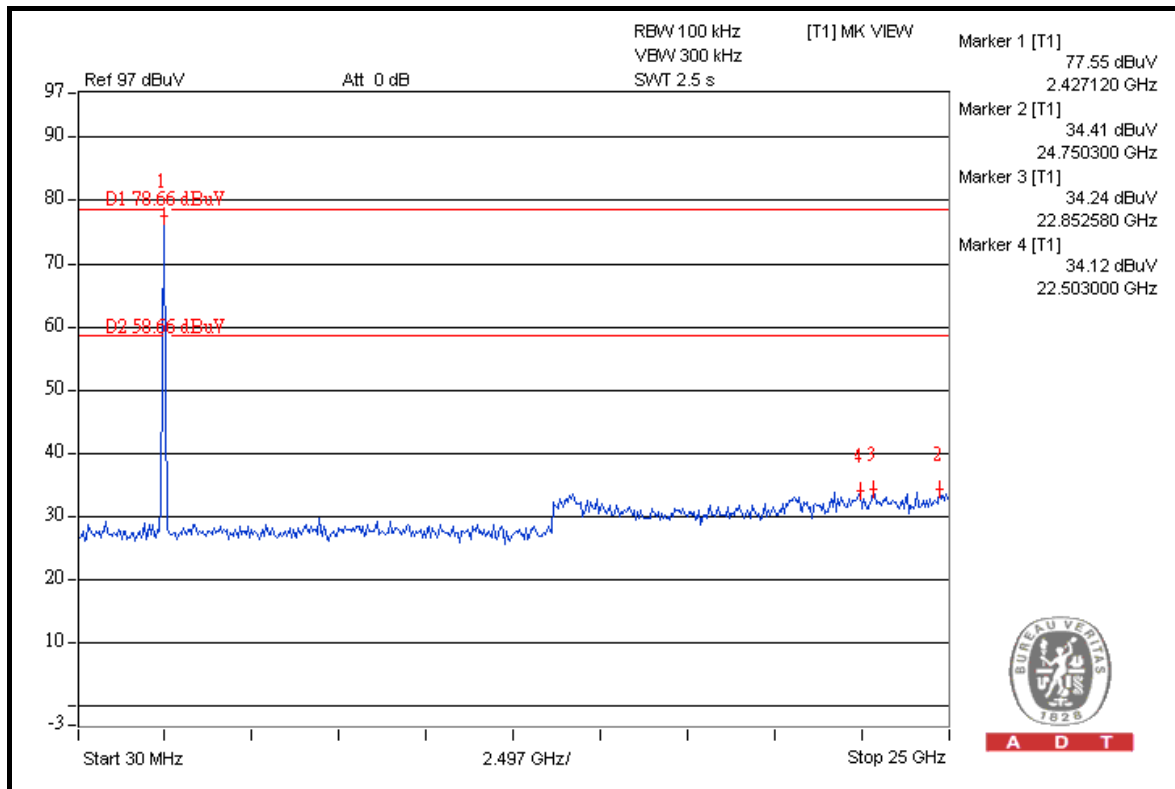

A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 46.37dBc between carrier maximum power and local maximum emission in restrict band (2.37640GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.23dBuV/m (Peak), so the maximum field strength in restrict band is $112.23 - 46.37 = 65.86$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot of on the next page shows 50.28dBc between carrier maximum power and local maximum emission in restrict band (2.37580GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.09dBuV/m (Average), so the maximum field strength in restrict band is $100.09 - 50.28 = 49.81$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 47.38dBc between carrier maximum power and local maximum emission in restrict band (2.48540GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.98dBuV/m (Peak), so the maximum field strength in restrict band is $112.98 - 47.38 = 65.60$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 51.34dBc between carrier maximum power and local maximum emission in restrict band (2.49800GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 101.08dBuV/m (Average), so the maximum field strength in restrict band is $101.08 - 51.34 = 49.74$ dBuV/m which is under 54dBuV/m limit.



A D T

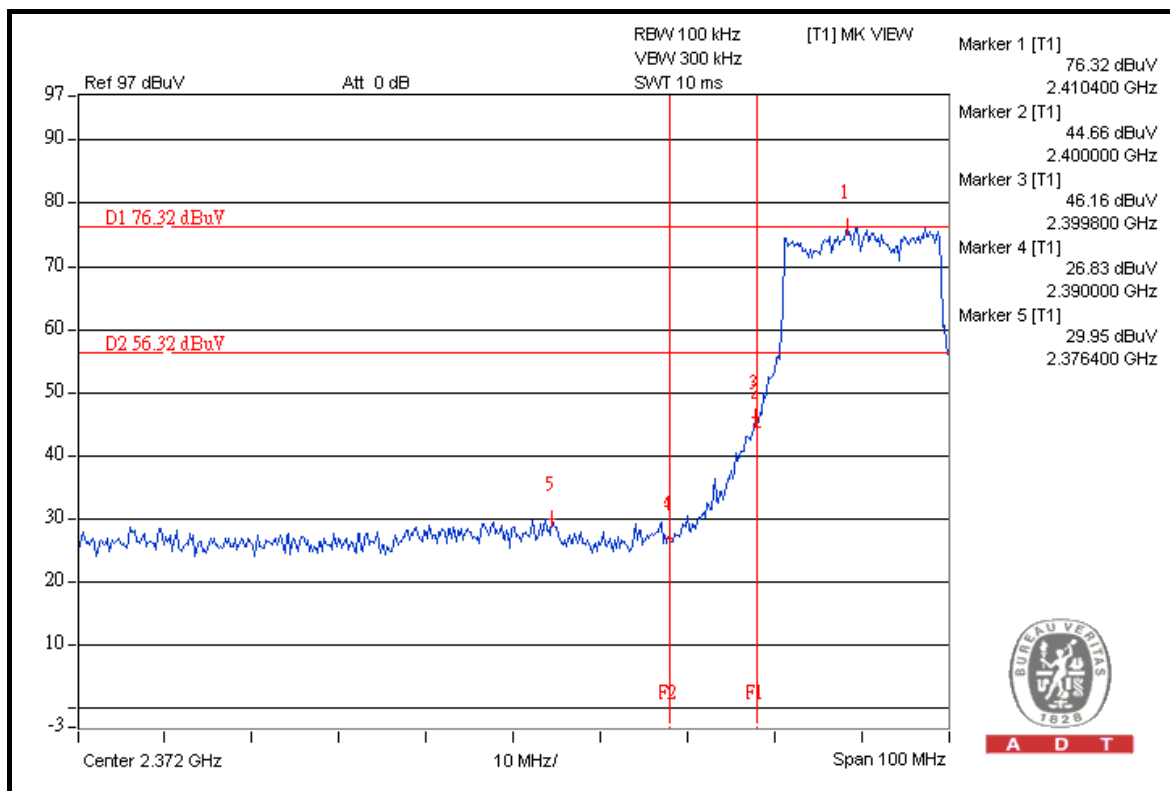


A D T

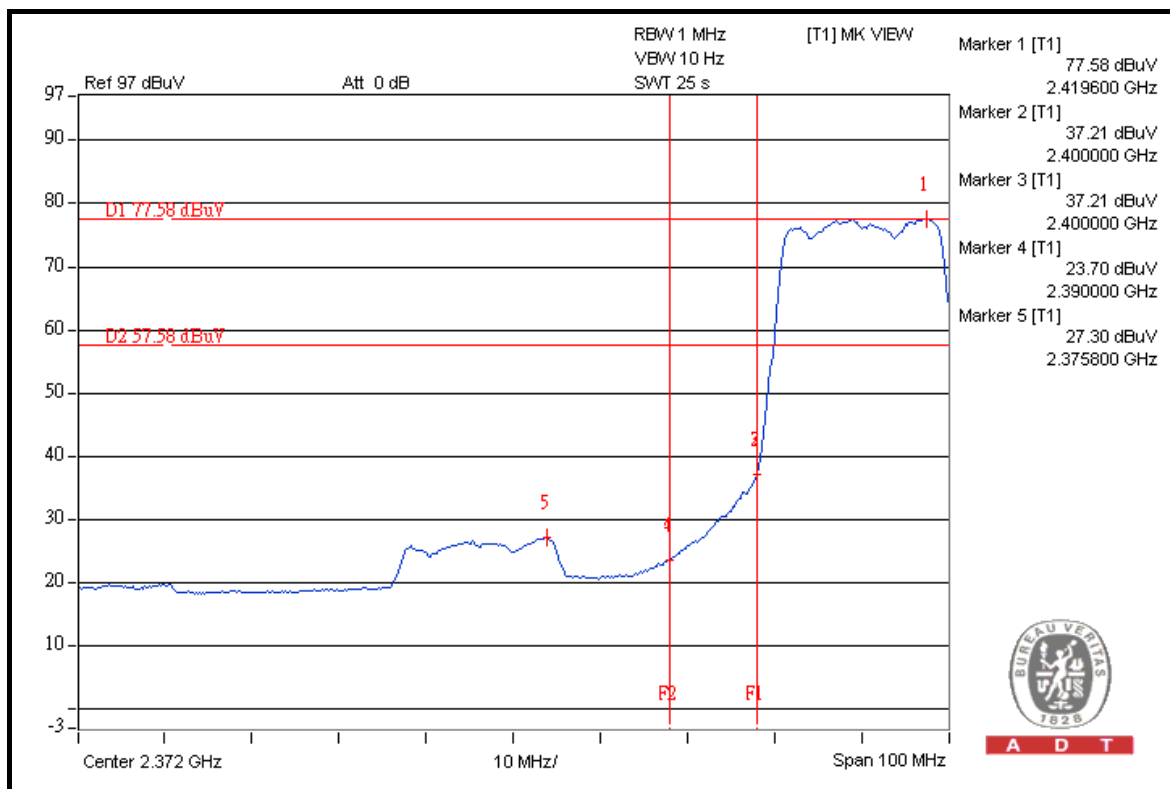


A D T



A D T

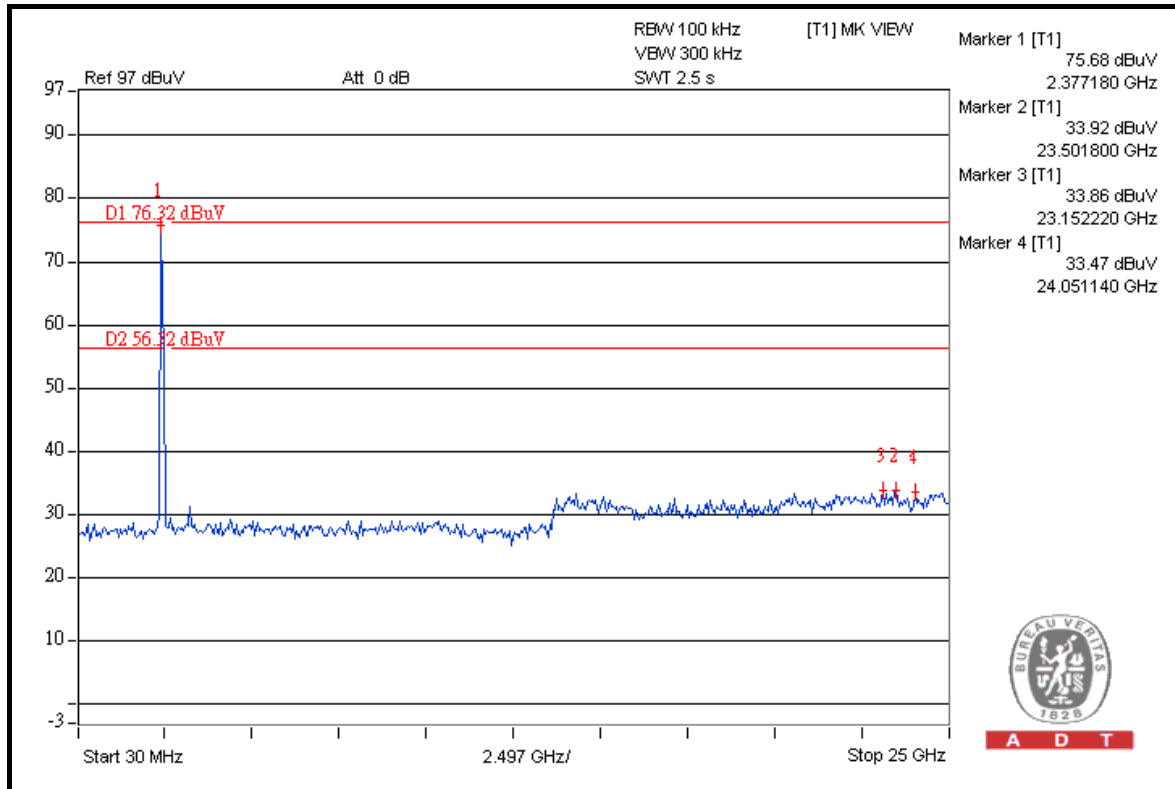



A D T

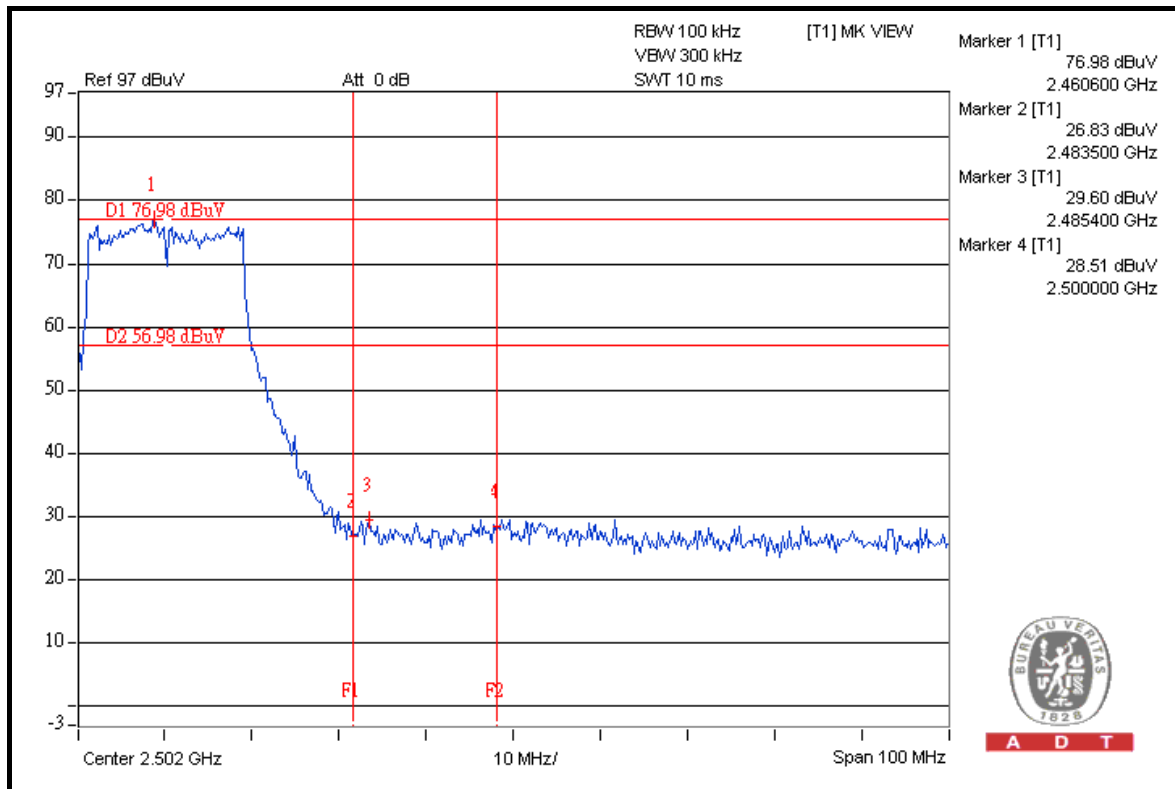

A D T



A D T

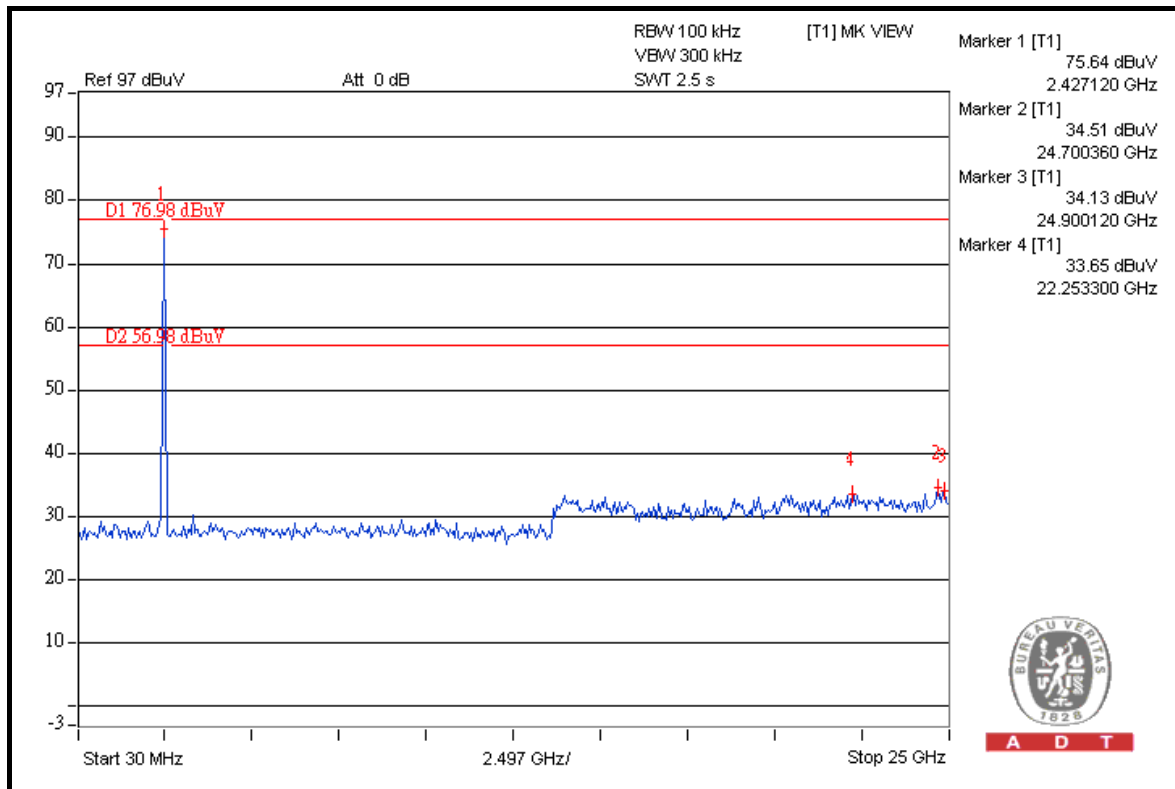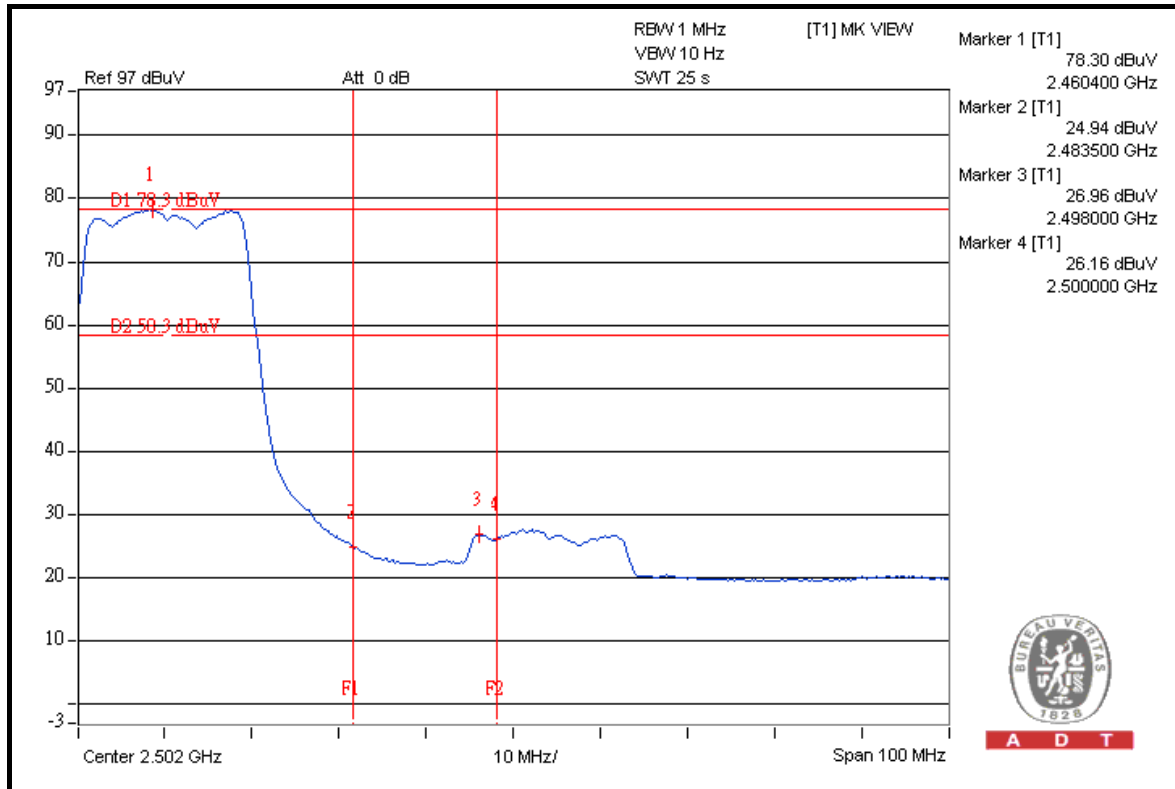

DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 42.19dBc between carrier maximum power and local maximum emission in restrict band (2.38720GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.83dBuV/m (Peak), so the maximum field strength in restrict band is $110.83 - 42.19 = 68.64$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot of on the next page shows 46.64dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 96.16dBuV/m (Average), so the maximum field strength in restrict band is $96.16 - 46.64 = 49.52$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 39.97dBc between carrier maximum power and local maximum emission in restrict band (2.48560GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 110.90dBuV/m (Peak), so the maximum field strength in restrict band is $110.90 - 39.97 = 70.93$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 46.34dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 96.35dBuV/m (Average), so the maximum field strength in restrict band is $96.35 - 46.34 = 50.01$ dBuV/m which is under 54dBuV/m limit.



A D T

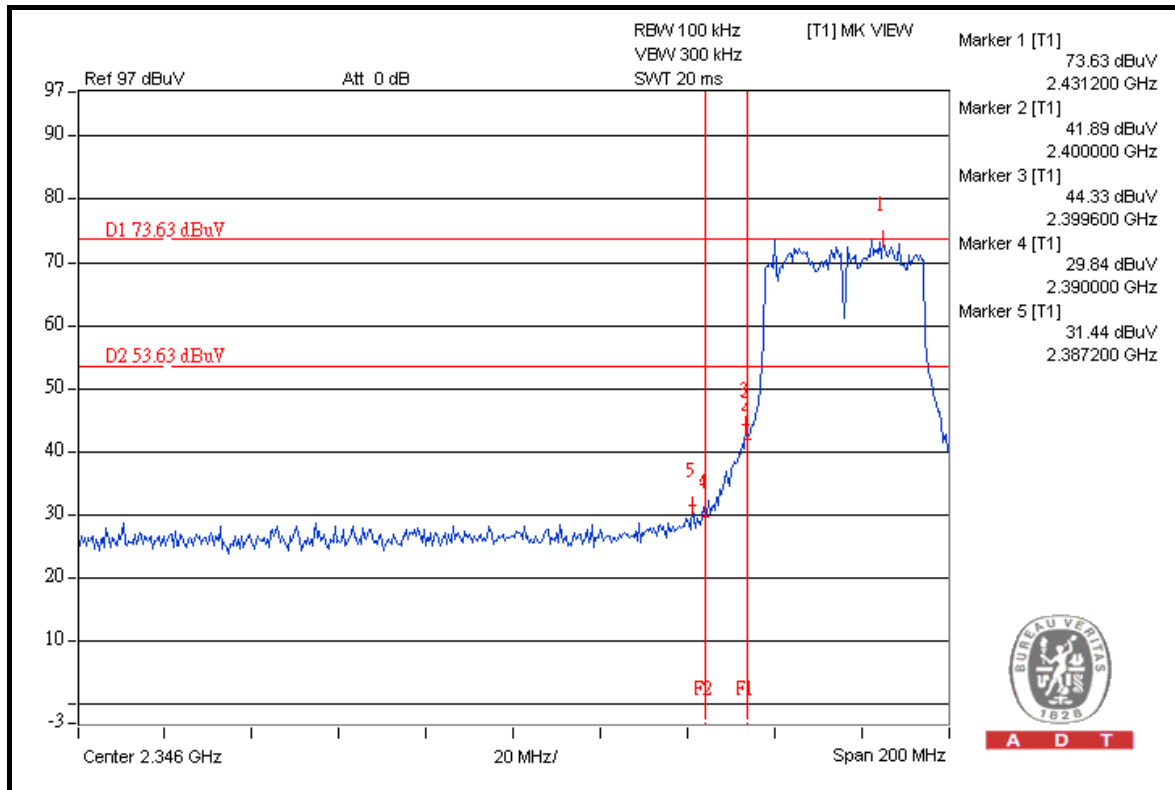


A D T

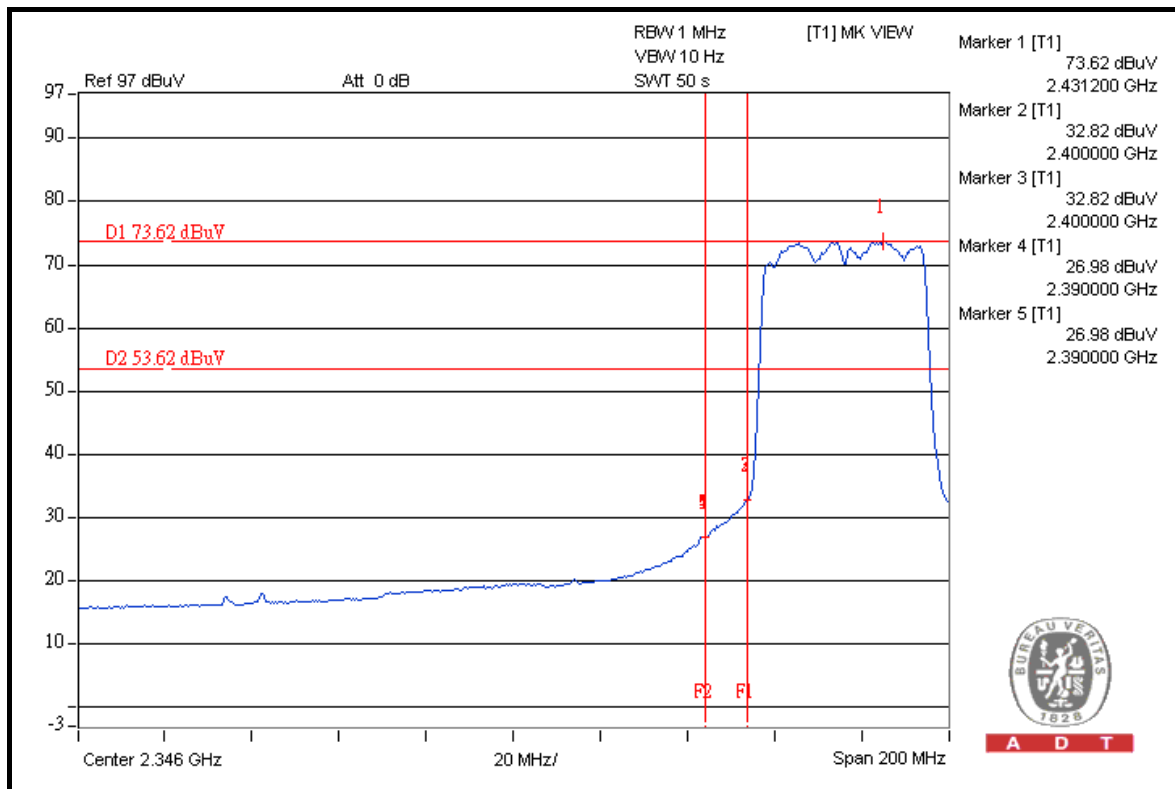


A D T



A D T

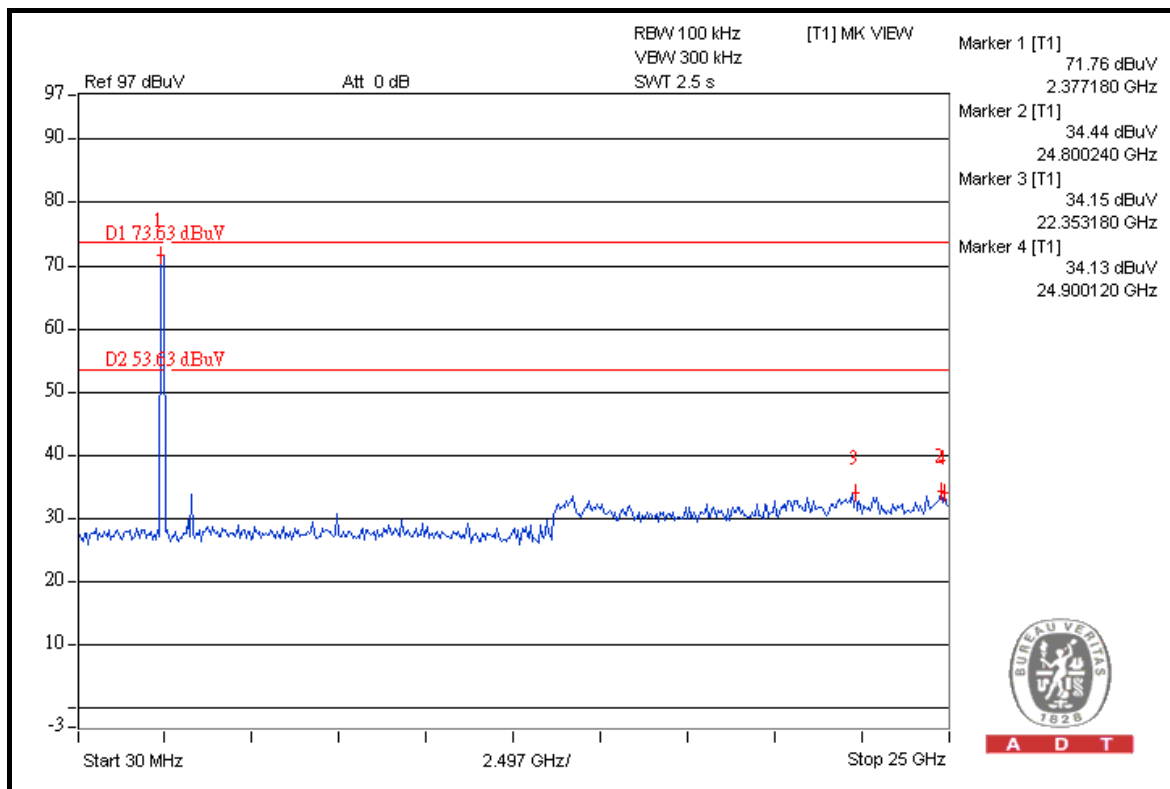



A D T

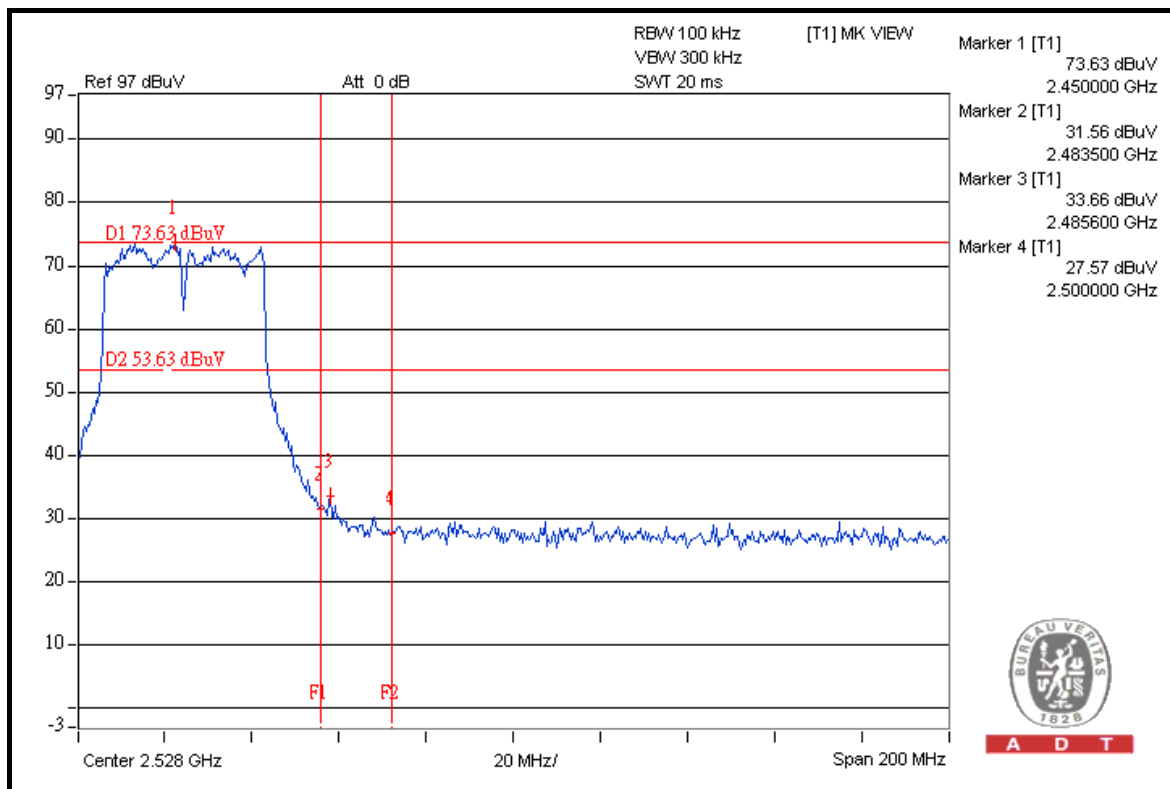

A D T



A D T

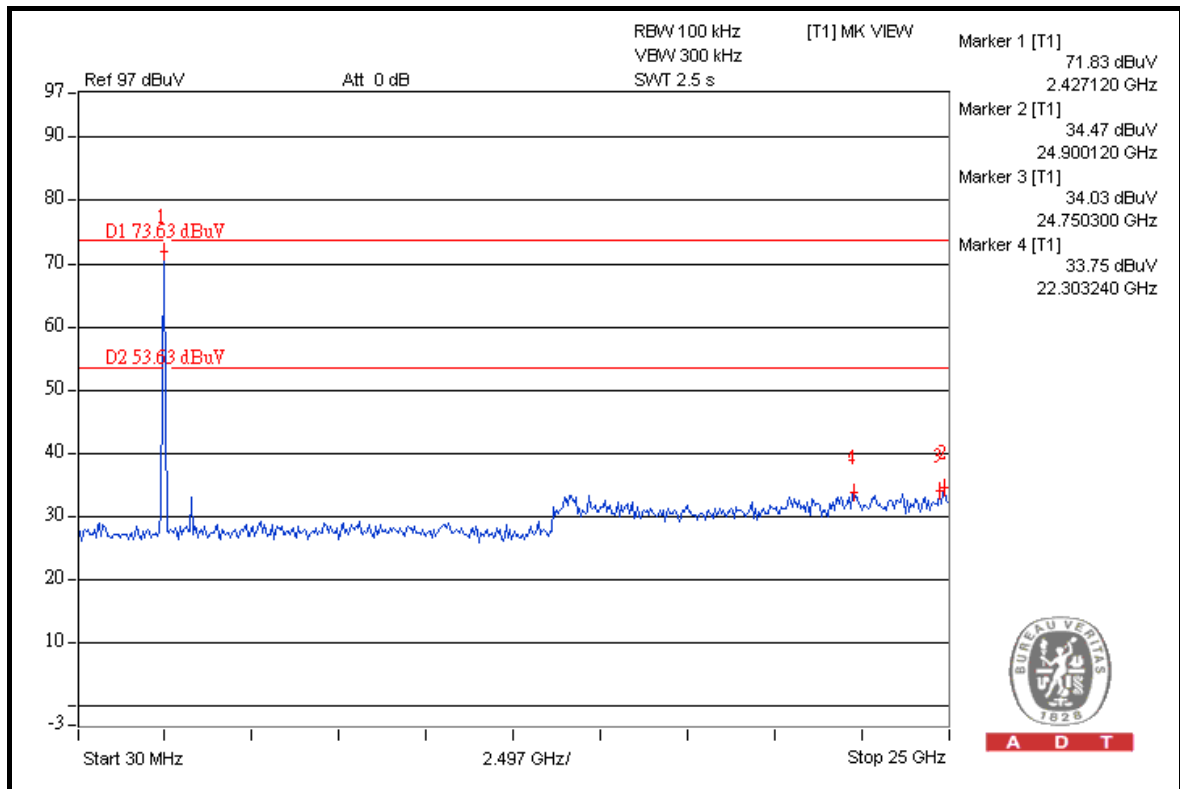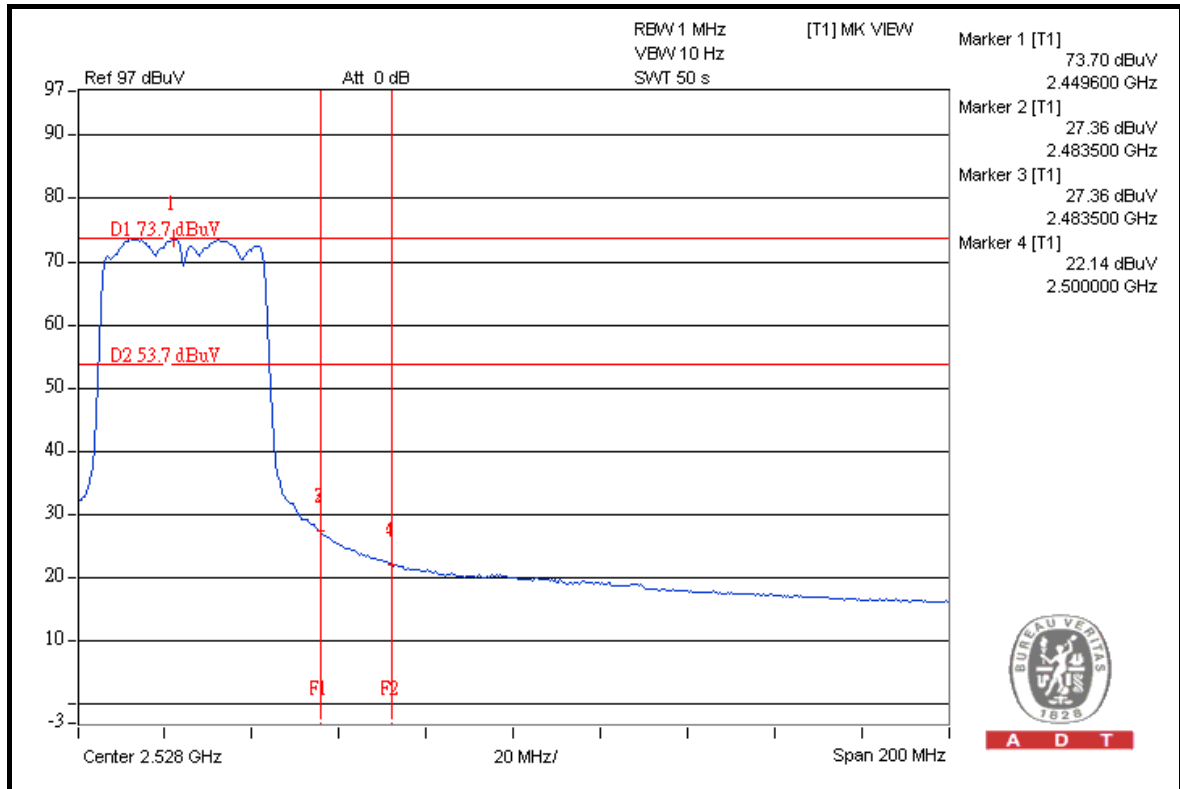



A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is dipole antenna without connector(fixed antenna) or with R-SMA connector(detachable antenna). The maximum gain of the antenna is 2dBi.



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---