

# FCC TEST REPORT

**REPORT NO.:** RF110526E05

**MODEL NO.:** DIR-619

**FCC ID:** KA2IR619A1

**RECEIVED:** May 26, 2011

**TESTED:** June 21 to 28, 2011 & Oct. 14 to 17, 2011

**ISSUED:** Nov. 10, 2011

**APPLICANT:** D-Link Corporation

**ADDRESS:** No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114,  
Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung  
Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 90 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

## Table of Contents

|                                                               |    |
|---------------------------------------------------------------|----|
| RELEASE CONTROL RECORD .....                                  | 4  |
| 1. CERTIFICATION .....                                        | 5  |
| 2. SUMMARY OF TEST RESULTS .....                              | 6  |
| 2.1 MEASUREMENT UNCERTAINTY .....                             | 7  |
| 3. GENERAL INFORMATION .....                                  | 8  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                          | 8  |
| 3.2 DESCRIPTION OF TEST MODES .....                           | 11 |
| 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... | 12 |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....            | 15 |
| 3.4 DESCRIPTION OF SUPPORT UNITS.....                         | 16 |
| 3.5 CONFIGURATION OF SYSTEM UNDER TEST .....                  | 17 |
| 4. TEST TYPES AND RESULTS .....                               | 19 |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                      | 19 |
| 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....          | 19 |
| 4.1.2 TEST INSTRUMENTS.....                                   | 20 |
| 4.1.3 TEST PROCEDURES .....                                   | 21 |
| 4.1.4 DEVIATION FROM TEST STANDARD .....                      | 21 |
| 4.1.5 TEST SETUP .....                                        | 22 |
| 4.1.6 EUT OPERATING CONDITIONS .....                          | 22 |
| 4.1.7 TEST RESULTS (MODE 1) .....                             | 23 |
| 4.1.8 TEST RESULTS (MODE 2) .....                             | 25 |
| 4.1.9 TEST RESULTS (MODE 3) .....                             | 27 |
| 4.2 RADIATED EMISSION MEASUREMENT .....                       | 29 |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....            | 29 |
| 4.2.2 TEST INSTRUMENTS.....                                   | 30 |
| 4.2.3 TEST PROCEDURES .....                                   | 32 |
| 4.2.4 DEVIATION FROM TEST STANDARD .....                      | 32 |
| 4.2.5 TEST SETUP .....                                        | 33 |
| 4.2.6 EUT OPERATING CONDITIONS .....                          | 34 |
| 4.2.7 TEST RESULTS .....                                      | 35 |
| 4.3 6dB BANDWIDTH MEASUREMENT .....                           | 64 |
| 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....               | 64 |
| 4.3.2 TEST INSTRUMENTS.....                                   | 64 |
| 4.3.3 TEST PROCEDURE.....                                     | 64 |
| 4.3.4 DEVIATION FROM TEST STANDARD .....                      | 64 |
| 4.3.5 TEST SETUP .....                                        | 64 |
| 4.3.6 EUT OPERATING CONDITIONS .....                          | 64 |
| 4.3.7 TEST RESULTS .....                                      | 65 |
| 4.4 MAXIMUM PEAK OUTPUT POWER.....                            | 69 |
| 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....   | 69 |



A D T

|       |                                                                                         |    |
|-------|-----------------------------------------------------------------------------------------|----|
| 4.4.2 | INSTRUMENTS.....                                                                        | 69 |
| 4.4.3 | TEST PROCEDURES .....                                                                   | 69 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                                                      | 69 |
| 4.4.5 | TEST SETUP .....                                                                        | 69 |
| 4.4.6 | EUT OPERATING CONDITIONS .....                                                          | 69 |
| 4.4.7 | TEST RESULTS .....                                                                      | 70 |
| 4.5   | POWER SPECTRAL DENSITY MEASUREMENT.....                                                 | 71 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....                                      | 71 |
| 4.5.2 | TEST INSTRUMENTS.....                                                                   | 71 |
| 4.5.3 | TEST PROCEDURE.....                                                                     | 71 |
| 4.5.4 | DEVIATION FROM TEST STANDARD .....                                                      | 71 |
| 4.5.5 | TEST SETUP .....                                                                        | 71 |
| 4.5.6 | EUT OPERATING CONDITION .....                                                           | 71 |
| 4.5.7 | TEST RESULTS .....                                                                      | 72 |
| 4.6   | CONDUCTED OUT-BAND EMISSION MEASUREMENT .....                                           | 76 |
| 4.6.1 | LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....                                  | 76 |
| 4.6.2 | TEST INSTRUMENTS.....                                                                   | 76 |
| 4.6.3 | TEST PROCEDURE.....                                                                     | 76 |
| 4.6.4 | DEVIATION FROM TEST STANDARD .....                                                      | 76 |
| 4.6.5 | EUT OPERATING CONDITION .....                                                           | 76 |
| 4.6.6 | TEST RESULTS .....                                                                      | 76 |
| 5.    | INFORMATION ON THE TESTING LABORATORIES .....                                           | 89 |
| 6.    | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 90 |




## RELEASE CONTROL RECORD

| ISSUE NO.   | REASON FOR CHANGE | DATE ISSUED   |
|-------------|-------------------|---------------|
| RF110526E05 | Original release  | Nov. 10, 2011 |

## 1. CERTIFICATION

**PRODUCT:** Wireless N Router  
**BRAND NAME:** D-Link  
**MODEL NO.:** DIR-619  
**TEST SAMPLE:** MASS-PRODUCTION  
**TESTED:** June 21 to 28, 2011 & Oct. 14 to 17, 2011  
**APPLICANT:** D-Link Corporation  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.4-2003  
ANSI C63.10-2009

The above equipment (Model: DIR-619) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Nov. 10, 2011  
( Lori Chung, Specialist )

**APPROVED BY** :  , **DATE:** Nov. 10, 2011  
( May Chen, Deputy Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C |                                                                                                          |        |                                                                                   |
|------------------------------------------|----------------------------------------------------------------------------------------------------------|--------|-----------------------------------------------------------------------------------|
| Standard Section                         | Test Type and Limit                                                                                      | Result | Remark                                                                            |
| 15.207                                   | AC Power Conducted Emission                                                                              | PASS   | Meet the requirement of limit.<br>Minimum passing margin is -7.93dB at 0.155 MHz. |
| 15.247(a)(2)                             | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System<br>Limit: min. 500kHz                     | PASS   | Meet the requirement of limit.                                                    |
| 15.247(b)                                | Maximum Peak Output Power<br>Limit: max. 30dBm                                                           | PASS   | Meet the requirement of limit.                                                    |
| 15.247(d)                                | Radiated Emissions<br>Limit: Table 15.209                                                                | PASS   | Meet the requirement of limit.<br>Minimum passing margin is -0.5dB at 2483.50MHz  |
| 15.247(e)                                | Power Spectral Density<br>Limit: max. 8dBm                                                               | PASS   | Meet the requirement of limit.                                                    |
| 15.247(d)                                | Conducted Out-Band Emission Measurement<br>Limit: 20dB less than the peak value of fundamental frequency | PASS   | Meet the requirement of limit.                                                    |
| 15.203                                   | Antenna Requirement                                                                                      | PASS   | Antenna connector is SMA Plug Reverse not a standard connector.                   |

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| Measurement                       | Value   |
|-----------------------------------|---------|
| Conducted emissions               | 2.45 dB |
| Radiated emissions (30MHz-1GHz)   | 3.81 dB |
| Radiated emissions (1GHz -18GHz)  | 2.49 dB |
| Radiated emissions (18GHz -40GHz) | 2.70 dB |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PRODUCT</b>               | Wireless N Router                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>MODEL NO.</b>             | DIR-619                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>FCC ID</b>                | KA2IR619A1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>POWER SUPPLY</b>          | DC 12V from power adapter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>MODULATION TYPE</b>       | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>MODULATION TECHNOLOGY</b> | DSSS, OFDM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>TRANSFER RATE</b>         | 802.11g: 54/48/36/24/18/12/9/6Mbps<br>802.11b: 11/5.5/2/1Mbps<br>HT20 MCS0~7 (800nS GI): 6.5Mbps, 13Mbps, 19.5Mbps, 26Mbps, 39Mbps, 52Mbps, 58.5Mbps, 65Mbps,<br>HT20 MCS8~15 (800nS GI): 13Mbps, 26Mbps, 39Mbps, 52Mbps, 78Mbps, 104Mbps, 117Mbps, 130Mbps.<br>HT40 MCS0~7 (800nS GI): 13.5Mbps, 27Mbps, 40.5Mbps, 54Mbps, 81Mbps, 108Mbps, 121.5Mbps, 135Mbps.<br>HT40 MCS8~15 (800nS GI): 27Mbps, 54Mbps, 81Mbps, 108Mbps, 162Mbps, 216Mbps, 243Mbps, 270Mbps.<br>HT20 MCS0~7 (400nS GI): 7.2Mbps, 14.4Mbps, 21.7Mbps, 28.9Mbps, 43.3Mbps, 57.8Mbps, 65.0Mbps, 72.2Mbps,<br>HT20 MCS8~15 (400nS GI): 14.444Mbps, 28.889Mbps, 43.333Mbps, 57.778Mbps, 86.667Mbps, 115.556Mbps, 130.000Mbps, 144.444Mbps.<br>HT40 MCS0~7 (400nS GI): 15.0Mbps, 30.0Mbps, 45.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 135.0Mbps, 150.0Mbps,<br>HT40 MCS8~15 (400nS GI): 30.0Mbps, 60.0Mbps, 90.0Mbps, 120.0Mbps, 180.0Mbps, 240.0Mbps, 270.0Mbps, 300.0Mbps. |
| <b>FREQUENCY RANGE</b>       | 2412MHz ~ 2462MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>NUMBER OF CHANNEL</b>     | 11 for 802.11b, 802.11g, 802.11n (20MHz)<br>7 for 802.11n (40MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>MAXIMUM OUTPUT POWER</b>  | 802.11b: 407.4mW<br>802.11g: 691.8mW<br>802.11n (20MHz): 903.8mW<br>802.11n (40MHz): 925.3mW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>ANTENNA TYPE</b>          | Please see NOTE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>DATA CABLE</b>            | Ethernet cable(Unshielded, 1.5m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>I/O PORTS</b>             | INTERNET port x 1<br>LAN port x 4(Ethernet:10,100Mbps)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>ASSOCIATED DEVICES</b>    | Adapter x 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

# NOTE:

1. There are two sets of antennas provided to this EUT, please refer to the following table:

| Set 1               |              |                               |                                          |              |                  |
|---------------------|--------------|-------------------------------|------------------------------------------|--------------|------------------|
| Transmitter Circuit | Manufacture  | Model name                    | Peak Gain (dBi)<br>(Included Cable loss) | Antenna Type | Connector Type   |
| Chain (0)           | WHA YU GROUP | C037-511046-A<br>(SSR-209146) | 3.52                                     | Dipole       | SMA Plug Reverse |
| Chain (1)           | WHA YU GROUP | C037-511046-A<br>(SSR-209146) | 3.52                                     | Dipole       | SMA Plug Reverse |
| Chain (2)           | WHA YU GROUP | C037-511046-A<br>(SSR-209146) | 3.52                                     | Dipole       | SMA Plug Reverse |
| Set 2               |              |                               |                                          |              |                  |
| Transmitter Circuit | Manufacture  | Model name                    | Peak Gain (dBi)<br>(Included Cable loss) | Antenna Type | Connector Type   |
| Chain (0)           | WHA YU GROUP | C037-511127-A                 | 4.705                                    | Dipole       | SMA Plug Reverse |
| Chain (1)           | WHA YU GROUP | C037-511127-A                 | 4.705                                    | Dipole       | SMA Plug Reverse |
| Chain (2)           | WHA YU GROUP | C037-511127-A                 | 4.705                                    | Dipole       | SMA Plug Reverse |

Antenna Set 2 was chosen for the final test.

2. The EUT must be supplied with a power adapter and following three different model names could be chosen:

| No. | Manufacturer | Brand  | Model No.   | Spec.                                                                                       |
|-----|--------------|--------|-------------|---------------------------------------------------------------------------------------------|
| 1   | Channel Well | D-Link | CAP012121US | Input: 100-240V, 0.35A, 47-63Hz<br>Output: 12.0V, 1.0A<br>DC output cable(1.2m, unshielded) |
| 2   | FRECOM       | D-Link | FM120010-US | Input: 100-240V, 0.6A, 50/60Hz<br>Output: 12V, 1A<br>DC output cable(1.25m, unshielded)     |
| 3   | JENTEC       | D-Link | CH1812-B    | Input: 100-240V, 0.4A, 50-60Hz<br>Output: 12V, 1.25A<br>DC output cable(1.5m, unshielded)   |

For radiated (below 1GHz) test, the EUT was pre-tested with above adapters, the worse case was found in **Adapter 3**. Therefore only the test data of the adapter was recorded in this report.

3. The EUT was pre-tested under the following test modes for two different axes placements:

| Test Mode | Description |
|-----------|-------------|
| Mode A    | Level-set   |
| Mode B    | Tower-set   |

From the above modes, the worst emission level was found in Mode A. Therefore only the test data of the modes were recorded in this report individually.

4. The EUT is 2 \* 3 spatial MIMO (2Tx & 3Rx) without beam forming function. The 11b and 11g legacy mode is limited to single transmitter only.
5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1       | 2412MHz   | 7       | 2442MHz   |
| 2       | 2417MHz   | 8       | 2447MHz   |
| 3       | 2422MHz   | 9       | 2452MHz   |
| 4       | 2427MHz   | 10      | 2457MHz   |
| 5       | 2432MHz   | 11      | 2462MHz   |
| 6       | 2437MHz   |         |           |

Seven channels are provided for 802.11n (40MHz):

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 3       | 2422MHz   | 7       | 2442MHz   |
| 4       | 2427MHz   | 8       | 2447MHz   |
| 5       | 2432MHz   | 9       | 2452MHz   |
| 6       | 2437MHz   |         |           |

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO |         |                    |      |    | DESCRIPTION    |
|--------------------|---------------|---------|--------------------|------|----|----------------|
|                    | PLC           | RE < 1G | RE <sup>3</sup> 1G | APCM | OB |                |
| MODE 1             | √             | -       | √                  | √    | √  | With adapter 1 |
| MODE 2             | √             | -       | -                  | -    | -  | With adapter 2 |
| MODE 3             | √             | √       | -                  | -    | -  | With adapter 3 |

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz  
**RE <sup>3</sup> 1G**: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement  
**OB**: Conducted Out-Band Emission Measurement

#### ANTENNA COMBINATION MODE:

| COMBINATION MODE | OPERATION MODE             | TX CHAIN(0) | TX CHAIN(1) | TX CHAIN(2) |
|------------------|----------------------------|-------------|-------------|-------------|
| A                | 802.11 b                   | √           |             |             |
| B                | 802.11 g                   | √           |             |             |
| C                | 802.11n(20MHz) for MCS0~7  | √           |             |             |
| D                | 802.11n(20MHz) for MCS8~15 | √           |             | √           |
| E                | 802.11n(40MHz) for MCS0~7  | √           |             |             |
| F                | 802.11n(40MHz) for MCS8~15 | √           |             | √           |

Note:  
1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.  
2. Mode A, B, D, and F the worst modes, were selected as representative mode for the report.

#### POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE            | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | COMBINATION |
|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|-------------|
| 802.11n (20MHz) | 1 to 11           | 6              | OFDM                  | BPSK            | 13               | D           |

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE            | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | COMBINATION |
|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|-------------|
| 802.11n (20MHz) | 1 to 11           | 6              | OFDM                  | BPSK            | 13               | D           |

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE            | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | COMBINATION |
|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|-------------|
| 802.11b         | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1                | A           |
| 802.11g         | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6                | B           |
| 802.11n (20MHz) | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 13               | D           |
| 802.11n (40MHz) | 3 to 9            | 3, 6, 9        | OFDM                  | BPSK            | 27               | F           |

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE            | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | COMBINATION |
|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|-------------|
| 802.11b         | 1 to 11           | 1, 6, 11       | DSSS                  | DBPSK           | 1                | A           |
| 802.11g         | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 6                | B           |
| 802.11n (20MHz) | 1 to 11           | 1, 6, 11       | OFDM                  | BPSK            | 13               | D           |
| 802.11n (40MHz) | 3 to 9            | 3, 6, 9        | OFDM                  | BPSK            | 27               | F           |

※ Bandwidth as show worst chain in report base on preliminary measurement.

### **CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE            | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | COMBINATION |
|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|-------------|
| 802.11b         | 1 to 11           | 1, 11          | DSSS                  | DBPSK           | 1                | A           |
| 802.11g         | 1 to 11           | 1, 11          | OFDM                  | BPSK            | 6                | B           |
| 802.11n (20MHz) | 1 to 11           | 1, 11          | OFDM                  | BPSK            | 13               | D           |
| 802.11n (40MHz) | 3 to 9            | 3, 9           | OFDM                  | BPSK            | 27               | F           |

### **TEST CONDITION:**

| APPLICABLE TO           | ENVIRONMENTAL CONDITIONS  | INPUT POWER  | TESTED BY  |
|-------------------------|---------------------------|--------------|------------|
| <b>RE<sup>3</sup>1G</b> | 26deg. C, 67%RH, 1005 hPa | 120Vac, 60Hz | Wen Yu     |
| <b>RE&lt;1G</b>         | 22deg. C, 69%RH, 1005 hPa | 120Vac, 60Hz | Frank Liu  |
| <b>PLC</b>              | 27deg. C, 64%RH, 1005 hPa | 120Vac, 60Hz | Kyle Huang |
| <b>APCM</b>             | 25deg. C, 60%RH, 1005 hPa | 120Vac, 60Hz | Rex Huang  |
| <b>OB</b>               | 26deg. C, 67%RH, 1005 hPa | 120Vac, 60Hz | Wen Yu     |



A D T

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4-2003**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| For conducted test   |                   |       |           |               |         |
|----------------------|-------------------|-------|-----------|---------------|---------|
| NO.                  | PRODUCT           | BRAND | MODEL NO. | SERIAL NO.    | FCC ID  |
| 1                    | NOTEBOOK COMPUTER | DELL  | PP27L     | 7YLB32S       | FCC DoC |
| 2                    | NOTEBOOK COMPUTER | DELL  | PP18L     | 4799903248    | FCC DoC |
| For other test items |                   |       |           |               |         |
| NO.                  | PRODUCT           | BRAND | MODEL NO. | SERIAL NO.    | FCC ID  |
| 1                    | NOTEBOOK COMPUTER | DELL  | PP27L     | 7YLB32S       | FCC DoC |
| 2                    | NOTEBOOK COMPUTER | DELL  | PP32LA    | GSLB32S       | FCC DoC |
| 3                    | HUB               | ZyXEL | ES-116P   | S060H02000215 | FCC DoC |

| For conducted test   |                                                     |
|----------------------|-----------------------------------------------------|
| NO.                  | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
| 1                    | UTP cable (10m)                                     |
| 2                    | UTP cable (10m)                                     |
| For other test items |                                                     |
| NO.                  | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
| 1                    | UTP cable (10m)                                     |
| 2                    | UTP cable (10m)                                     |
| 3                    | UTP cable (10m)                                     |


**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

**For Conducted Emission test:**

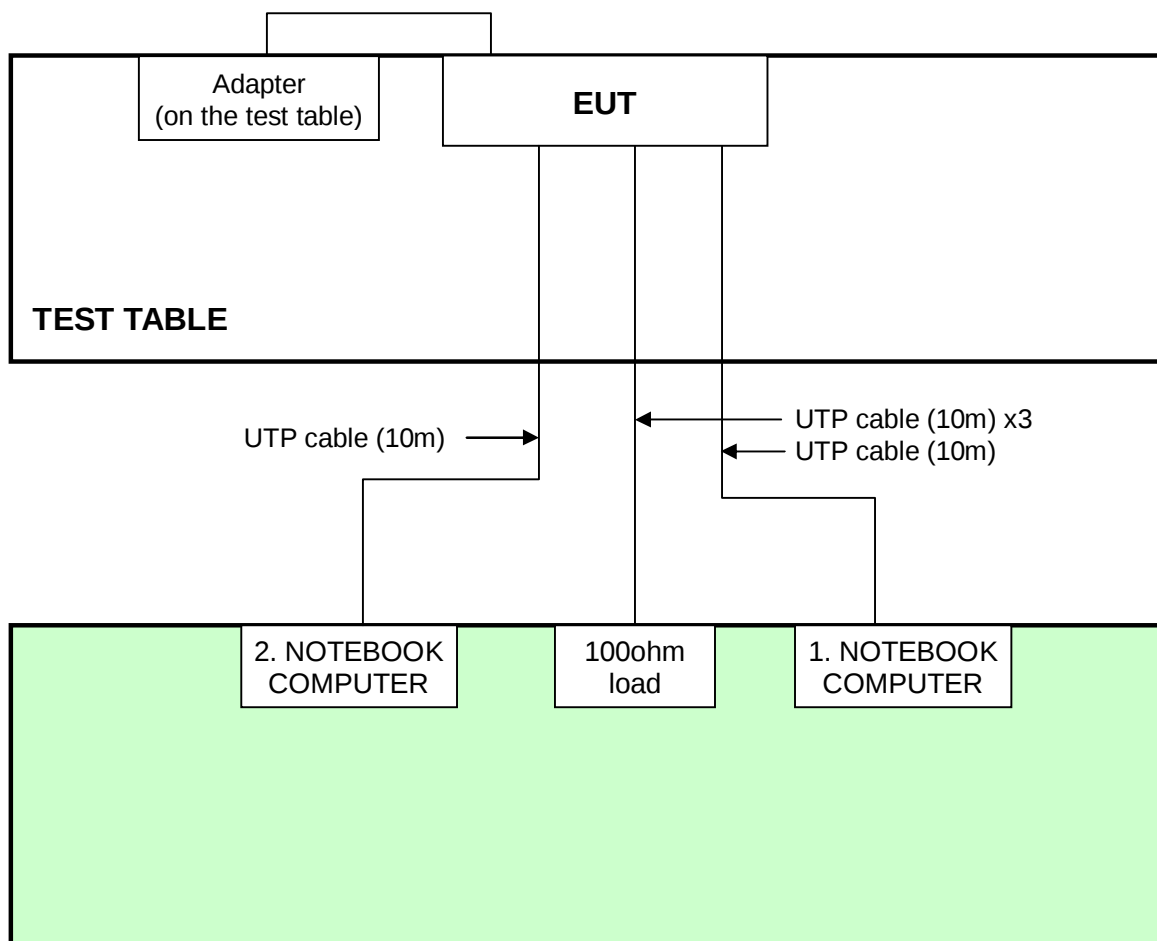

**For other test items:**

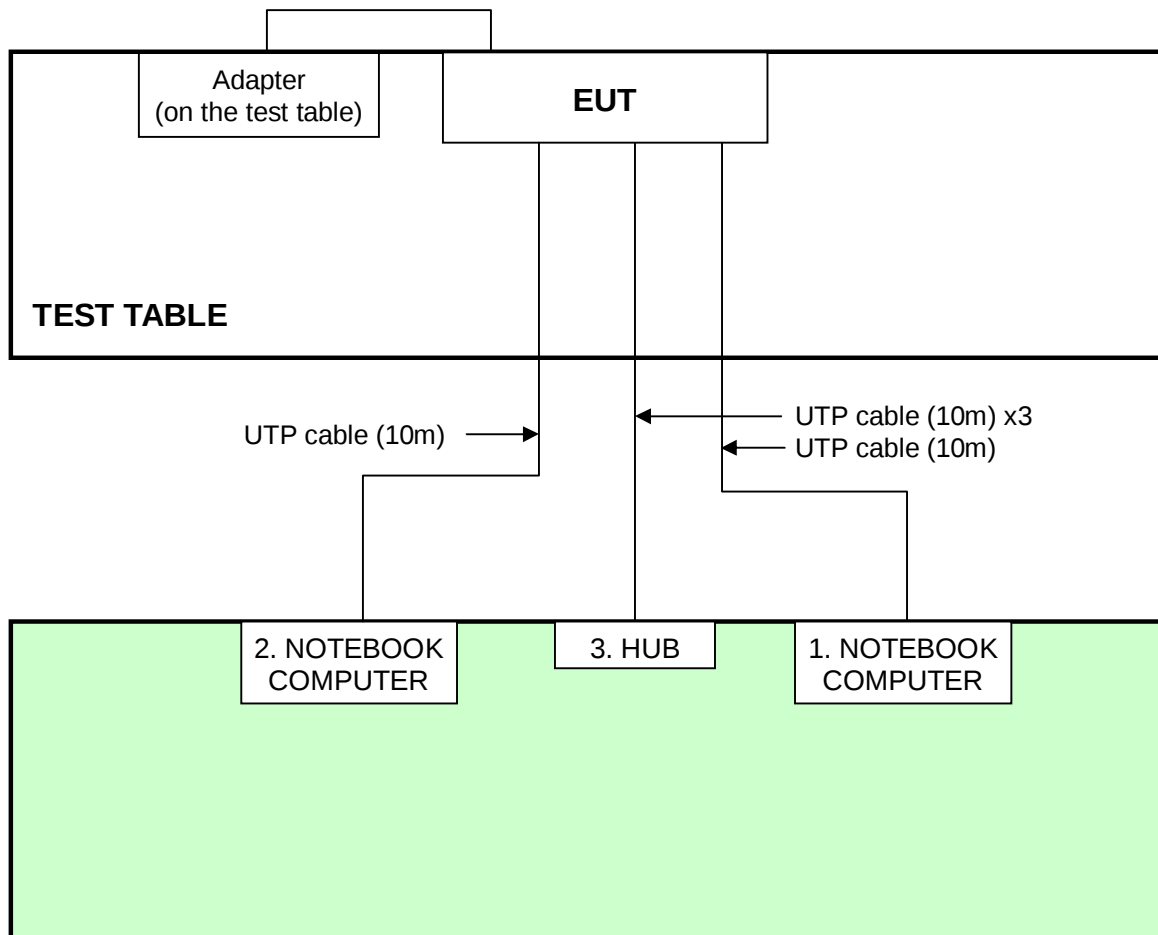

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

##### Test mode 1~2 <Test Date: June 28, 2011>

| DESCRIPTION & MANUFACTURER                                  | MODEL NO.             | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|-------------------------------------------------------------|-----------------------|------------|-----------------|------------------|
| ROHDE & SCHWARZ<br>Test Receiver                            | ESCS 30               | 100287     | Mar. 02, 2011   | Mar. 01, 2012    |
| Line-Impedance<br>Stabilization Network<br>(for EUT)        | NSLK 8127             | 8127-523   | Sep. 17, 2010   | Sep. 16, 2011    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral) | ENV-216               | 100072     | June 10, 2011   | June 09, 2012    |
| RF Cable (JYEBAO)                                           | 5DFB                  | CONCAB-003 | Aug. 06, 2010   | Aug. 05, 2011    |
| 50 ohms Terminator                                          | 50                    | 3          | Nov. 03, 2010   | Nov. 02, 2011    |
| Software                                                    | BV<br>ADT_Cond_V7.3.7 | NA         | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

##### Test mode 3 <Test Date: Oct. 17, 2011>

| DESCRIPTION & MANUFACTURER                                  | MODEL NO.             | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|-------------------------------------------------------------|-----------------------|------------|-----------------|------------------|
| ROHDE & SCHWARZ<br>Test Receiver                            | ESCS 30               | 100287     | Mar. 02, 2011   | Mar. 01, 2012    |
| Line-Impedance<br>Stabilization Network<br>(for EUT)        | NSLK 8127             | 8127-523   | Sep. 20, 2011   | Sep. 19, 2012    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral) | ENV-216               | 100072     | June 10, 2011   | June 09, 2012    |
| RF Cable (JYEBAO)                                           | 5DFB                  | CONCAB-003 | Aug. 05, 2011   | Aug. 04, 2012    |
| 50 ohms Terminator                                          | 50                    | 3          | Nov. 03, 2010   | Nov. 02, 2011    |
| Software                                                    | BV<br>ADT_Cond_V7.3.7 | NA         | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

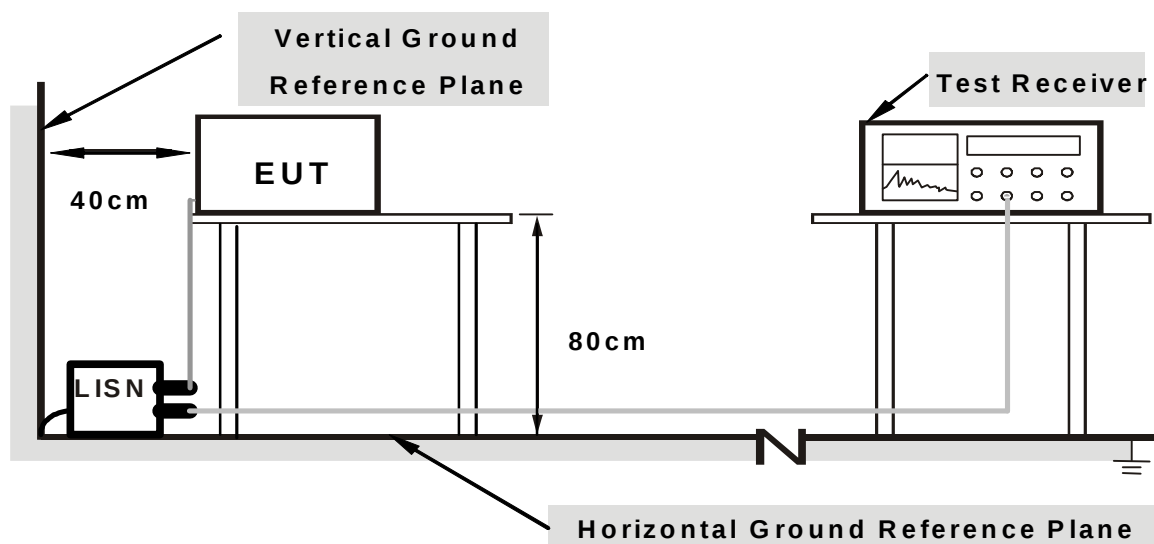

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS


1. Turned on the power of all equipment.
2. Prepared other computer system support units 1~2 (Notebook Computer) to act as communication partner and placed it outside of testing area.
3. The communication partner ran test program “MP\_TEST.exe” to enable EUT under transmission/receiving condition continuously via UTP cables.

#### 4.1.7 TEST RESULTS (MODE 1)

|       |          |               |       |
|-------|----------|---------------|-------|
| PHASE | Line (L) | 6dB BANDWIDTH | 9 kHz |
|-------|----------|---------------|-------|

| No | Freq.  | Corr.  | Reading Value |           | Emission Level |           | Limit     |           | Margin |        |
|----|--------|--------|---------------|-----------|----------------|-----------|-----------|-----------|--------|--------|
|    | [MHz]  | Factor | [dB (uV)]     | [dB (uV)] | [dB (uV)]      | [dB (uV)] | [dB (uV)] | [dB (uV)] | (dB)   | (dB)   |
|    |        | (dB)   | Q.P.          | AV.       | Q.P.           | AV.       | Q.P.      | AV.       | Q.P.   | AV.    |
| 1  | 0.154  | 0.36   | 44.38         | 31.17     | 44.74          | 31.53     | 65.79     | 55.79     | -21.04 | -24.25 |
| 2  | 0.220  | 0.36   | 40.69         | 32.85     | 41.05          | 33.21     | 62.81     | 52.81     | -21.76 | -19.60 |
| 3  | 0.500  | 0.37   | 45.77         | 34.06     | 46.14          | 34.43     | 56.00     | 46.00     | -9.86  | -11.57 |
| 4  | 2.457  | 0.47   | 31.25         | 23.27     | 31.72          | 23.74     | 56.00     | 46.00     | -24.28 | -22.26 |
| 5  | 2.758  | 0.48   | 31.98         | 24.21     | 32.46          | 24.69     | 56.00     | 46.00     | -23.54 | -21.31 |
| 6  | 20.320 | 1.06   | 42.26         | 37.85     | 43.32          | 38.91     | 60.00     | 50.00     | -16.68 | -11.09 |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. The emission levels of other frequencies were very low against the limit.  
3. Margin value = Emission level - Limit value  
4. Correction factor = Insertion loss + Cable loss  
5. Emission Level = Correction Factor + Reading Value.

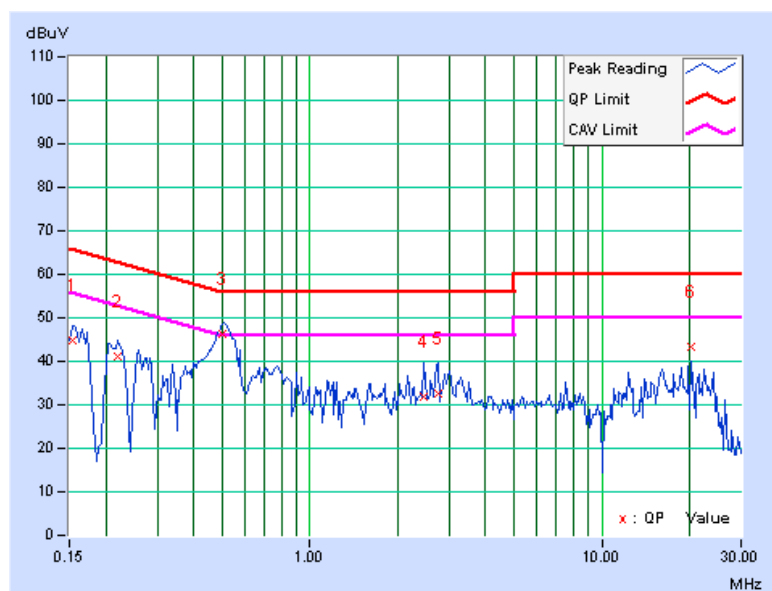

|       |             |               |       |
|-------|-------------|---------------|-------|
| PHASE | Neutral (N) | 6dB BANDWIDTH | 9 kHz |
|-------|-------------|---------------|-------|

| No | Freq.  | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|--------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]  | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |        | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.170  | 0.10   | 43.76         | 27.15 | 43.86          | 27.25 | 64.98     | 54.98 | -21.13 | -27.74 |
| 2  | 0.209  | 0.10   | 41.28         | 28.41 | 41.38          | 28.51 | 63.26     | 53.26 | -21.88 | -24.75 |
| 3  | 0.365  | 0.11   | 32.38         | 16.79 | 32.49          | 16.90 | 58.62     | 48.62 | -26.13 | -31.72 |
| 4  | 0.500  | 0.12   | 42.76         | 31.14 | 42.88          | 31.26 | 56.00     | 46.00 | -13.12 | -14.74 |
| 5  | 19.711 | 1.12   | 41.33         | 36.16 | 42.45          | 37.28 | 60.00     | 50.00 | -17.55 | -12.72 |
| 6  | 23.129 | 1.40   | 38.81         | 32.19 | 40.21          | 33.59 | 60.00     | 50.00 | -19.79 | -16.41 |

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. The emission levels of other frequencies were very low against the limit.  
3. Margin value = Emission level - Limit value  
4. Correction factor = Insertion loss + Cable loss  
5. Emission Level = Correction Factor + Reading Value.

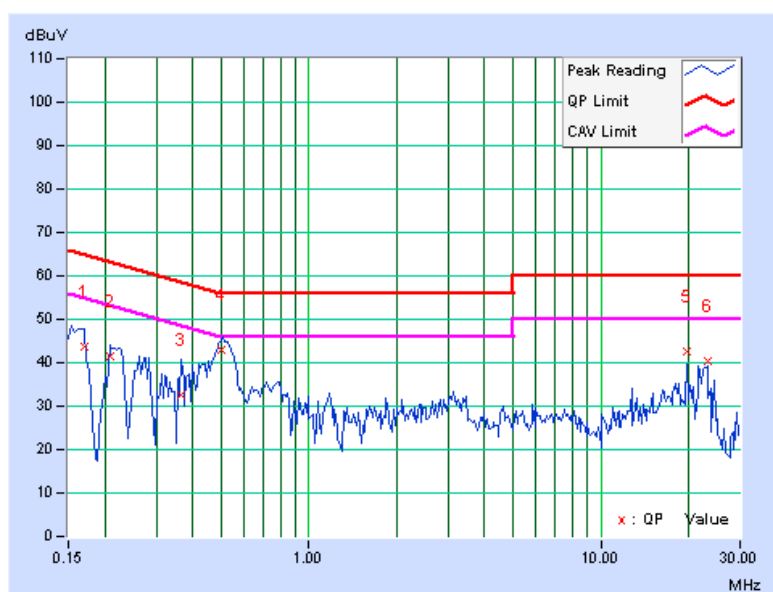


#### 4.1.8 TEST RESULTS (MODE 2)

|       |          |               |       |
|-------|----------|---------------|-------|
| PHASE | Line (L) | 6dB BANDWIDTH | 9 kHz |
|-------|----------|---------------|-------|

|    | Freq.  | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|--------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| No |        | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    | [MHz]  | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.166  | 0.36   | 43.71         | 31.86 | 44.07          | 32.22 | 65.18     | 55.18 | -21.10 | -22.95 |
| 2  | 0.197  | 0.36   | 41.38         | 29.61 | 41.74          | 29.97 | 63.74     | 53.74 | -22.00 | -23.77 |
| 3  | 0.552  | 0.37   | 35.93         | 29.54 | 36.30          | 29.91 | 56.00     | 46.00 | -19.70 | -16.09 |
| 4  | 2.754  | 0.48   | 28.62         | 20.76 | 29.10          | 21.24 | 56.00     | 46.00 | -26.90 | -24.76 |
| 5  | 3.148  | 0.49   | 34.59         | 22.17 | 35.08          | 22.66 | 56.00     | 46.00 | -20.92 | -23.34 |
| 6  | 12.633 | 0.85   | 28.36         | 25.48 | 29.21          | 26.33 | 60.00     | 50.00 | -30.79 | -23.67 |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

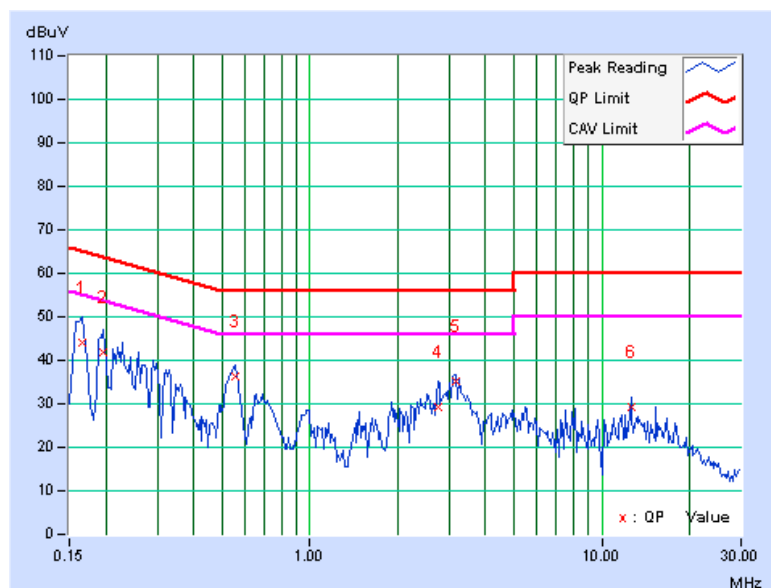

|       |             |               |       |
|-------|-------------|---------------|-------|
| PHASE | Neutral (N) | 6dB BANDWIDTH | 9 kHz |
|-------|-------------|---------------|-------|

| No | Freq.  | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|--------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    |        | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    | [MHz]  | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.162  | 0.10   | 46.18         | 35.22 | 46.28          | 35.32 | 65.37     | 55.37 | -19.10 | -20.06 |
| 2  | 0.177  | 0.10   | 42.22         | 22.38 | 42.32          | 22.48 | 64.61     | 54.61 | -22.29 | -32.13 |
| 3  | 0.548  | 0.12   | 35.19         | 29.06 | 35.31          | 29.18 | 56.00     | 46.00 | -20.69 | -16.82 |
| 4  | 1.535  | 0.18   | 27.34         | 19.23 | 27.52          | 19.41 | 56.00     | 46.00 | -28.48 | -26.59 |
| 5  | 2.945  | 0.22   | 28.97         | 21.99 | 29.19          | 22.21 | 56.00     | 46.00 | -26.81 | -23.79 |
| 6  | 20.258 | 1.15   | 28.61         | 24.95 | 29.76          | 26.10 | 60.00     | 50.00 | -30.24 | -23.90 |

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. The emission levels of other frequencies were very low against the limit.  
3. Margin value = Emission level - Limit value  
4. Correction factor = Insertion loss + Cable loss  
5. Emission Level = Correction Factor + Reading Value.

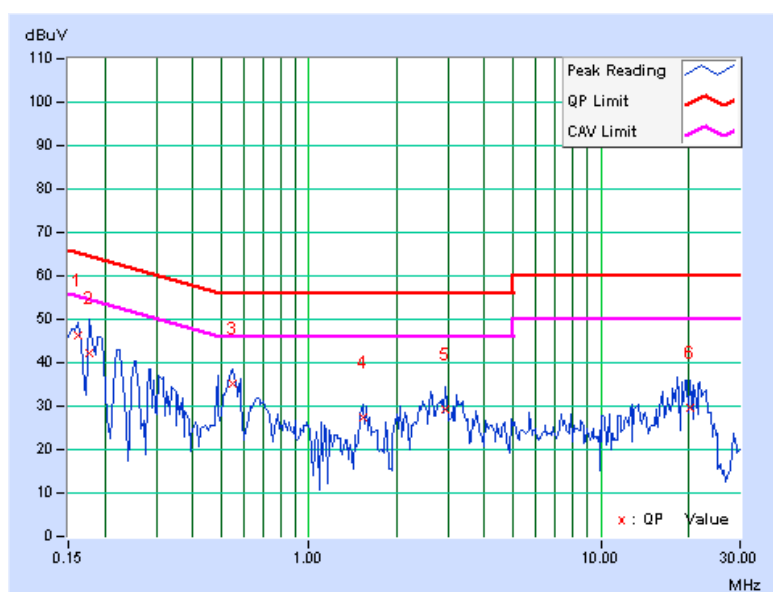


#### 4.1.9 TEST RESULTS (MODE 3)

|       |          |               |       |
|-------|----------|---------------|-------|
| PHASE | Line (L) | 6dB BANDWIDTH | 9 kHz |
|-------|----------|---------------|-------|

| No | Freq.  | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|--------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    |        | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    | [MHz]  | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.155  | 0.06   | 57.73         | 44.79 | 57.79          | 44.85 | 65.72     | 55.72 | -7.93  | -10.87 |
| 2  | 0.207  | 0.06   | 50.33         | 38.42 | 50.39          | 38.48 | 63.31     | 53.31 | -12.92 | -14.83 |
| 3  | 0.263  | 0.07   | 40.09         | 29.44 | 40.16          | 29.51 | 61.33     | 51.33 | -21.17 | -21.82 |
| 4  | 0.638  | 0.09   | 39.87         | 34.61 | 39.96          | 34.70 | 56.00     | 46.00 | -16.04 | -11.30 |
| 5  | 18.484 | 0.95   | 34.70         | 29.28 | 35.65          | 30.23 | 60.00     | 50.00 | -24.35 | -19.77 |
| 6  | 24.069 | 1.11   | 38.07         | 37.36 | 39.18          | 38.47 | 60.00     | 50.00 | -20.82 | -11.53 |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

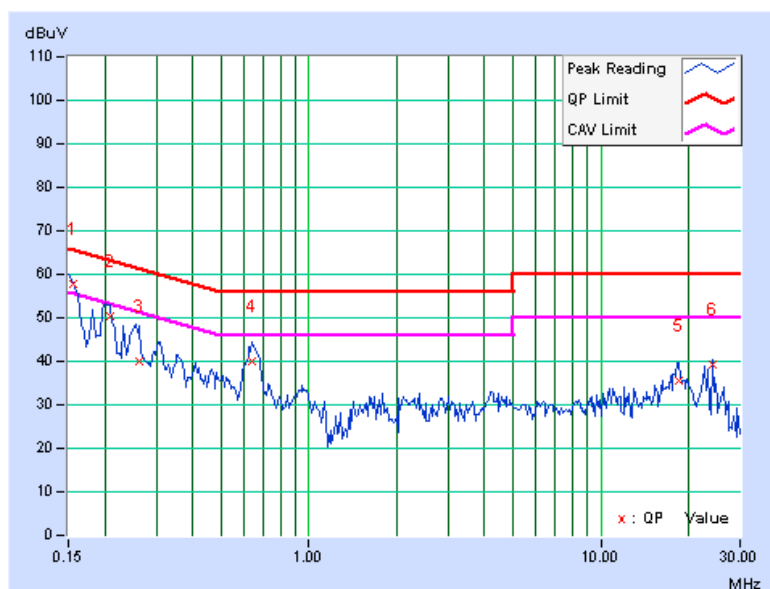

|       |             |               |       |
|-------|-------------|---------------|-------|
| PHASE | Neutral (N) | 6dB BANDWIDTH | 9 kHz |
|-------|-------------|---------------|-------|

| No | Freq.  | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|--------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    |        | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    | [MHz]  | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.159  | 0.07   | 53.00         | 38.23 | 53.07          | 38.30 | 65.54     | 55.54 | -12.47 | -17.24 |
| 2  | 0.205  | 0.08   | 51.51         | 39.38 | 51.59          | 39.46 | 63.42     | 53.42 | -11.83 | -13.96 |
| 3  | 0.252  | 0.08   | 43.54         | 33.57 | 43.62          | 33.65 | 61.71     | 51.71 | -18.08 | -18.05 |
| 4  | 0.630  | 0.10   | 38.31         | 32.91 | 38.41          | 33.01 | 56.00     | 46.00 | -17.59 | -12.99 |
| 5  | 18.242 | 0.94   | 39.53         | 34.36 | 40.47          | 35.30 | 60.00     | 50.00 | -19.53 | -14.70 |
| 6  | 24.069 | 1.12   | 36.96         | 35.98 | 38.08          | 37.10 | 60.00     | 50.00 | -21.92 | -12.90 |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

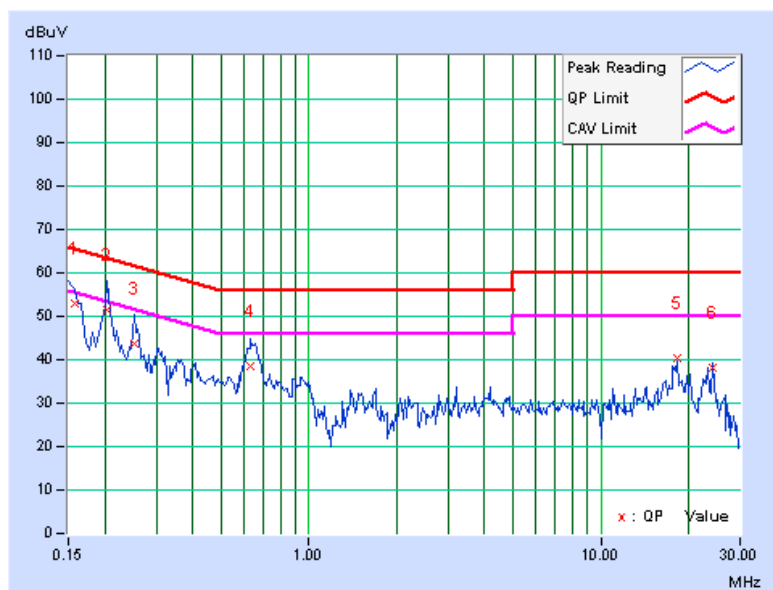

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.

## 4.2.2 TEST INSTRUMENTS

**For Below 1GHz (Test Date: Oct. 14, 2011)**

| DESCRIPTION & MANUFACTURER           | MODEL NO.                   | SERIAL NO.                          | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------|-----------------------------|-------------------------------------|-----------------|------------------|
| Agilent Spectrum Analyzer            | E4446A                      | MY48250254                          | July 12, 2011   | July 11, 2012    |
| Agilent Pre-Selector                 | N9039A                      | MY46520311                          | July 12, 2011   | July 11, 2012    |
| Agilent Signal Generator             | N5181A                      | MY49060517                          | July 12, 2011   | July 11, 2012    |
| Mini-Circuits Pre-Amplifier          | ZFL-1000VH2B                | AMP-ZFL-03                          | Nov. 16, 2010   | Nov. 15, 2011    |
| Agilent Pre-Amplifier                | 8449B                       | 3008A02578                          | July 04, 2011   | July 03, 2012    |
| Miteq Pre-Amplifier                  | AFS33-1800265<br>0-30-8P-44 | 881786                              | Nov. 16, 2010   | Nov. 15, 2011    |
| SCHWARZBECK Trilog Broadband Antenna | VULB 9168                   | 9168-360                            | Apr. 14, 2011   | Apr. 13, 2012    |
| AISI Horn_Antenna                    | AIH.8018                    | 0000320091110                       | Nov. 12, 2010   | Nov. 11, 2011    |
| SCHWARZBECK Horn_Antenna             | BBHA 9170                   | 9170-424                            | Oct. 07, 2011   | Oct. 06, 2012    |
| RF Cable                             | NA                          | RF104-201<br>RF104-203<br>RF104-204 | Dec. 27, 2010   | Dec. 26, 2011    |
| RF Cable                             | NA                          | CHGCAB_001                          | Oct. 12, 2011   | Oct. 11, 2012    |
| Software                             | ADT_Radiated_V8.7.05        | NA                                  | NA              | NA               |
| CT Antenna Tower & Turn Table        | NA                          | NA                                  | NA              | NA               |

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. G.  
4. The FCC Site Registration No. is 966073.  
5. The VCCI Site Registration No. is G-137.  
6. The CANADA Site Registration No. is IC 7450H-2.



A D T

**For Above 1GHz(Test Date: June 21, 2011)**

| DESCRIPTION & MANUFACTURER           | MODEL NO.                  | SERIAL NO.           | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------|----------------------------|----------------------|-----------------|------------------|
| ROHDE & SCHWARZ Spectrum Analyzer    | FSP40                      | 100036               | Dec. 08, 2010   | Dec. 07, 2011    |
| Agilent PSA Spectrum Analyzer        | E4446A                     | MY48250113           | Nov. 30 , 2010  | Nov. 29 , 2011   |
| HP Pre_Amplifier                     | 8449B                      | 300801923            | Nov. 01, 2010   | Oct. 31, 2011    |
| ROHDE & SCHWARZ Test Receiver        | ESCS30                     | 847124/029           | Sep. 03, 2010   | Sep. 02, 2011    |
| SCHWARZBECK TRILOG Broadband Antenna | VULB 9168                  | 138                  | Apr. 14, 2011   | Apr. 13, 2012    |
| Schwarzbeck Horn_Antenna             | BBHA9120                   | D124                 | Dec. 17, 2010   | Dec. 16, 2011    |
| Schwarzbeck Horn_Antenna             | BBHA 9170                  | BBHA9170153          | Jan. 17, 2011   | Jan. 16, 2012    |
| RF Switches                          | EMH-011                    | 1001                 | NA              | NA               |
| RF CABLE (Chaintek)                  | Sucoflex 104+ Sucoflex 106 | RF104-101+R F106-101 | Aug. 24, 2010   | Aug. 23, 2011    |
| RF Cable                             | 8DFB                       | STCCAB-30M-1GHz      | NA              | NA               |
| Software                             | ADT_Radiated_V7.6.15.9.2   | NA                   | NA              | NA               |
| CT Antenna Tower & Turn Table        | NA                         | NA                   | NA              | NA               |

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in Open Site No. C.  
4. The FCC Site Registration No. is 656396.  
5. The VCCI Site Registration No. is R-1626.  
6. The CANADA Site Registration No. is IC 7450G-3.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room for below 1GHz test and at a 10 meter open site for above 1GHz test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

## 4.2.5 TEST SETUP

### < Frequency Range below 1GHz >

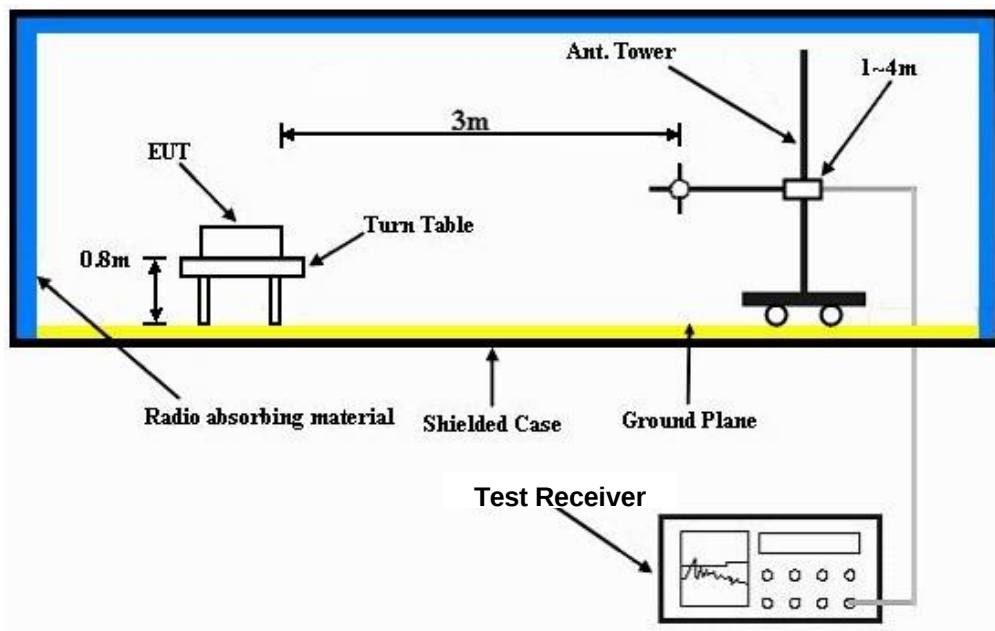

### < Frequency Range above 1GHz >

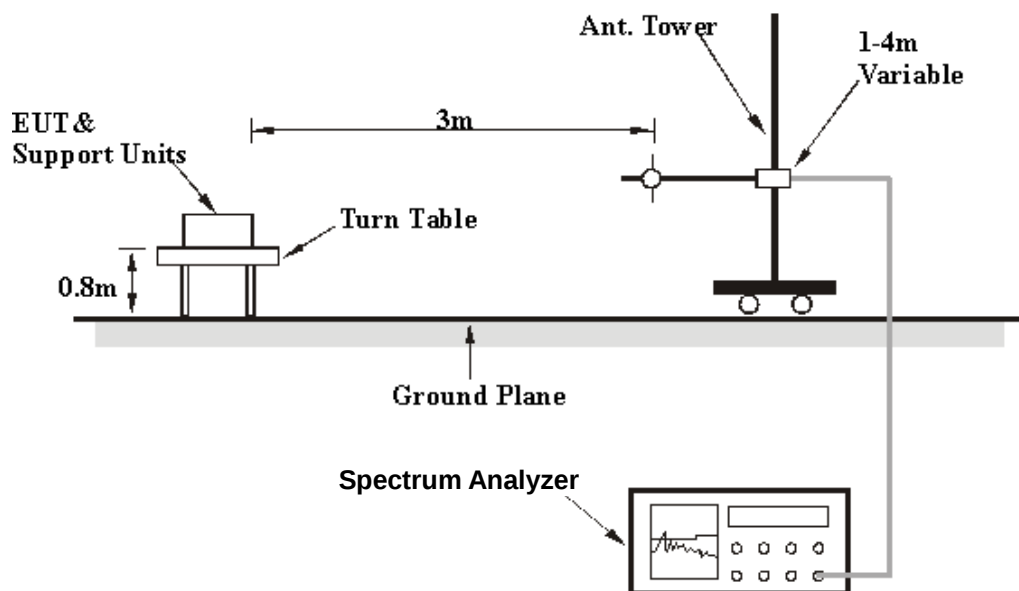

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |               |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL                  | Channel 6                   | FREQUENCY RANGE    | Below 1000MHz |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Quasi-Peak    |
| ENVIRONMENTAL CONDITIONS | 29deg. C, 74%RH<br>1005 hPa | TESTED BY          | Amos Chuang   |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 101.88      | 36.9 QP                 | 43.5           | -6.6        | 1.75 H             | 250                  | 27.10            | 9.78                     |
| 2                                                   | 156.24      | 32.4 QP                 | 43.5           | -11.1       | 1.50 H             | 98                   | 17.70            | 14.69                    |
| 3                                                   | 312.56      | 37.6 QP                 | 46.0           | -8.4        | 1.00 H             | 305                  | 22.13            | 15.49                    |
| 4                                                   | 500.02      | 37.6 QP                 | 46.0           | -8.4        | 2.00 H             | 313                  | 17.65            | 19.92                    |
| 5                                                   | 624.96      | 33.0 QP                 | 46.0           | -13.0       | 1.50 H             | 360                  | 10.72            | 22.27                    |
| 6                                                   | 848.30      | 32.7 QP                 | 46.0           | -13.3       | 1.00 H             | 126                  | 6.85             | 25.85                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 77.25       | 34.4 QP                 | 40.0           | -5.6        | 1.50 V             | 133                  | 23.94            | 10.45                    |
| 2                                                   | 312.56      | 34.6 QP                 | 46.0           | -11.4       | 1.50 V             | 354                  | 18.89            | 15.68                    |
| 3                                                   | 398.29      | 31.2 QP                 | 46.0           | -14.8       | 1.50 V             | 38                   | 13.53            | 17.66                    |
| 4                                                   | 500.02      | 39.7 QP                 | 46.0           | -6.3        | 1.25 V             | 268                  | 19.63            | 20.06                    |
| 5                                                   | 624.96      | 31.5 QP                 | 46.0           | -14.5       | 1.50 V             | 0                    | 9.04             | 22.42                    |
| 6                                                   | 847.95      | 33.4 QP                 | 46.0           | -12.6       | 1.50 V             | 172                  | 7.24             | 26.19                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

# ABOVE 1GHz WORST-CASE DATA

## 802.11b DSSS MODULATION

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 1                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2375.60     | 57.8 PK                 | 74.0           | -16.2       | 1.00 H             | 80                   | 27.80            | 30.00                    |
| 2                                                   | 2375.60     | 46.2 AV                 | 54.0           | -7.8        | 1.00 H             | 80                   | 16.20            | 30.00                    |
| 3                                                   | *2412.00    | 107.0 PK                |                |             | 1.00 H             | 80                   | 76.85            | 30.15                    |
| 4                                                   | *2412.00    | 104.6 AV                |                |             | 1.00 H             | 80                   | 74.45            | 30.15                    |
| 5                                                   | 4824.00     | 50.4 PK                 | 74.0           | -23.6       | 1.00 H             | 107                  | 14.97            | 35.43                    |
| 6                                                   | 4824.00     | 44.3 AV                 | 54.0           | -9.7        | 1.00 H             | 107                  | 8.87             | 35.43                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 62.2 PK                 | 74.0           | -11.8       | 1.70 V             | 254                  | 32.14            | 30.06                    |
| 2                                                   | 2390.00     | 53.3 AV                 | 54.0           | -0.7        | 1.70 V             | 254                  | 23.24            | 30.06                    |
| 3                                                   | *2412.00    | 115.2 PK                |                |             | 1.70 V             | 254                  | 85.05            | 30.15                    |
| 4                                                   | *2412.00    | 112.2 AV                |                |             | 1.70 V             | 254                  | 82.05            | 30.15                    |
| 5                                                   | 4824.00     | 53.1 PK                 | 74.0           | -20.9       | 1.20 V             | 147                  | 17.67            | 35.43                    |
| 6                                                   | 4824.00     | 50.1 AV                 | 54.0           | -3.9        | 1.20 V             | 147                  | 14.67            | 35.43                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 64%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2375.90     | 57.6 PK                 | 74.0           | -16.4       | 1.00 H             | 84                   | 25.99            | 31.61                    |
| 2                                                   | 2375.90     | 46.2 AV                 | 54.0           | -7.8        | 1.00 H             | 84                   | 14.59            | 31.61                    |
| 3                                                   | *2437.00    | 107.6 PK                |                |             | 1.00 H             | 78                   | 75.79            | 31.81                    |
| 4                                                   | *2437.00    | 105.3 AV                |                |             | 1.00 H             | 78                   | 73.49            | 31.81                    |
| 5                                                   | 2497.00     | 56.5 PK                 | 74.0           | -17.5       | 1.00 H             | 91                   | 24.49            | 32.01                    |
| 6                                                   | 2497.00     | 44.0 AV                 | 54.0           | -10.0       | 1.00 H             | 91                   | 11.99            | 32.01                    |
| 7                                                   | 4874.00     | 50.6 PK                 | 74.0           | -23.4       | 1.00 H             | 102                  | 11.46            | 39.14                    |
| 8                                                   | 4874.00     | 44.7 AV                 | 54.0           | -9.3        | 1.00 H             | 102                  | 5.56             | 39.14                    |
| 9                                                   | 7311.00     | 54.9 PK                 | 74.0           | -19.1       | 1.25 H             | 79                   | 8.27             | 46.63                    |
| 10                                                  | 7311.00     | 44.7 AV                 | 54.0           | -9.3        | 1.25 H             | 79                   | -1.93            | 46.63                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2375.80     | 63.8 PK                 | 74.0           | -10.2       | 1.73 V             | 8                    | 33.79            | 30.01                    |
| 2                                                   | 2375.80     | 52.7 AV                 | 54.0           | -1.3        | 1.73 V             | 8                    | 22.69            | 30.01                    |
| 3                                                   | *2437.00    | 115.8 PK                |                |             | 1.41 V             | 8                    | 85.56            | 30.24                    |
| 4                                                   | *2437.00    | 113.7 AV                |                |             | 1.41 V             | 8                    | 83.46            | 30.24                    |
| 5                                                   | 2499.70     | 65.7 PK                 | 74.0           | -8.3        | 1.38 V             | 10                   | 35.21            | 30.49                    |
| 6                                                   | 2499.70     | 52.9 AV                 | 54.0           | -1.1        | 1.38 V             | 10                   | 22.41            | 30.49                    |
| 7                                                   | 4874.00     | 53.0 PK                 | 74.0           | -21.0       | 1.04 V             | 147                  | 17.48            | 35.52                    |
| 8                                                   | 4874.00     | 49.9 AV                 | 54.0           | -4.1        | 1.04 V             | 147                  | 14.38            | 35.52                    |
| 9                                                   | 7311.00     | 55.9 PK                 | 74.0           | -18.1       | 1.54 V             | 290                  | 13.94            | 41.96                    |
| 10                                                  | 7311.00     | 50.6 AV                 | 54.0           | -3.4        | 1.54 V             | 290                  | 8.64             | 41.96                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.





A D T

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 11                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |



| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 106.0 PK                |                |             | 1.00 H             | 115                  | 75.66            | 30.34                    |
| 2                                                   | *2462.00    | 103.5 AV                |                |             | 1.00 H             | 115                  | 73.16            | 30.34                    |
| 3                                                   | 2483.50     | 57.5 PK                 | 74.0           | -16.5       | 1.00 H             | 115                  | 27.07            | 30.43                    |
| 4                                                   | 2483.50     | 47.0 AV                 | 54.0           | -7.0        | 1.00 H             | 115                  | 16.57            | 30.43                    |
| 5                                                   | 4924.00     | 50.5 PK                 | 74.0           | -23.5       | 1.02 H             | 116                  | 14.88            | 35.62                    |
| 6                                                   | 4924.00     | 44.8 AV                 | 54.0           | -9.2        | 1.02 H             | 116                  | 9.18             | 35.62                    |
| 7                                                   | 7386.00     | 55.3 PK                 | 74.0           | -18.7       | 1.27 H             | 66                   | 13.20            | 42.10                    |
| 8                                                   | 7386.00     | 45.0 AV                 | 54.0           | -9.0        | 1.27 H             | 66                   | 2.90             | 42.10                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 116.4 PK                |                |             | 1.64 V             | 30                   | 86.06            | 30.34                    |
| 2                                                   | *2462.00    | 113.4 AV                |                |             | 1.64 V             | 30                   | 83.06            | 30.34                    |
| 3                                                   | 2483.50     | 64.9 PK                 | 74.0           | -9.1        | 1.64 V             | 39                   | 34.47            | 30.43                    |
| 4                                                   | 2483.50     | 53.1 AV                 | 54.0           | -0.9        | 1.64 V             | 39                   | 22.67            | 30.43                    |
| 5                                                   | 4924.00     | 54.5 PK                 | 74.0           | -19.5       | 1.18 V             | 148                  | 18.88            | 35.62                    |
| 6                                                   | 4924.00     | 52.6 AV                 | 54.0           | -1.4        | 1.18 V             | 148                  | 16.98            | 35.62                    |
| 7                                                   | 7386.00     | 55.8 PK                 | 74.0           | -18.2       | 1.70 V             | 284                  | 13.70            | 42.10                    |
| 8                                                   | 7386.00     | 50.9 AV                 | 54.0           | -3.1        | 1.70 V             | 284                  | 8.80             | 42.10                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.



# RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

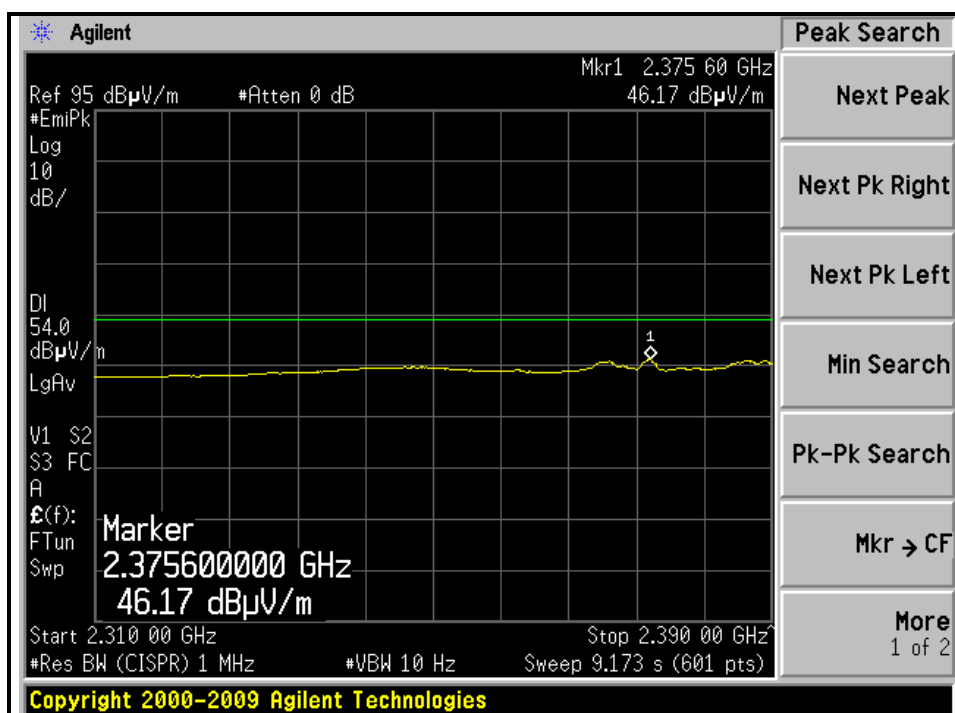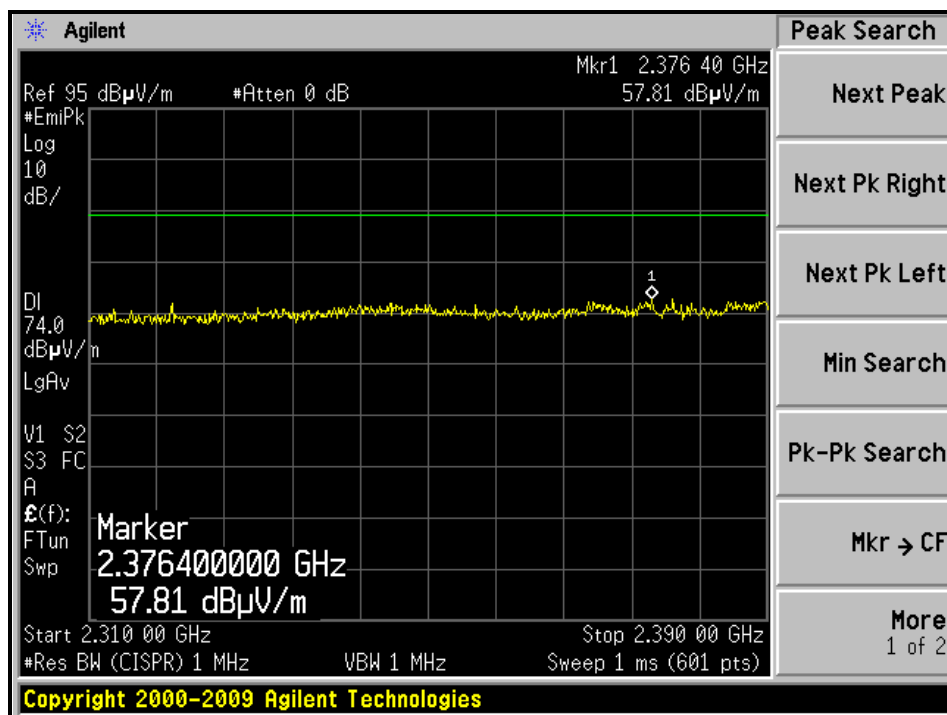



# RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL )

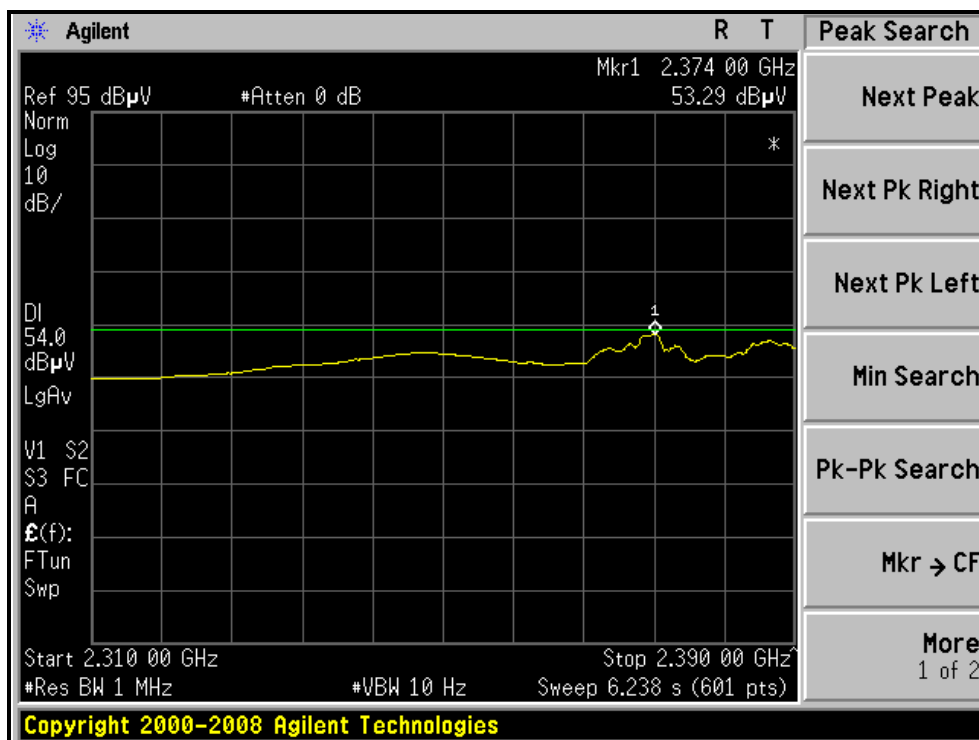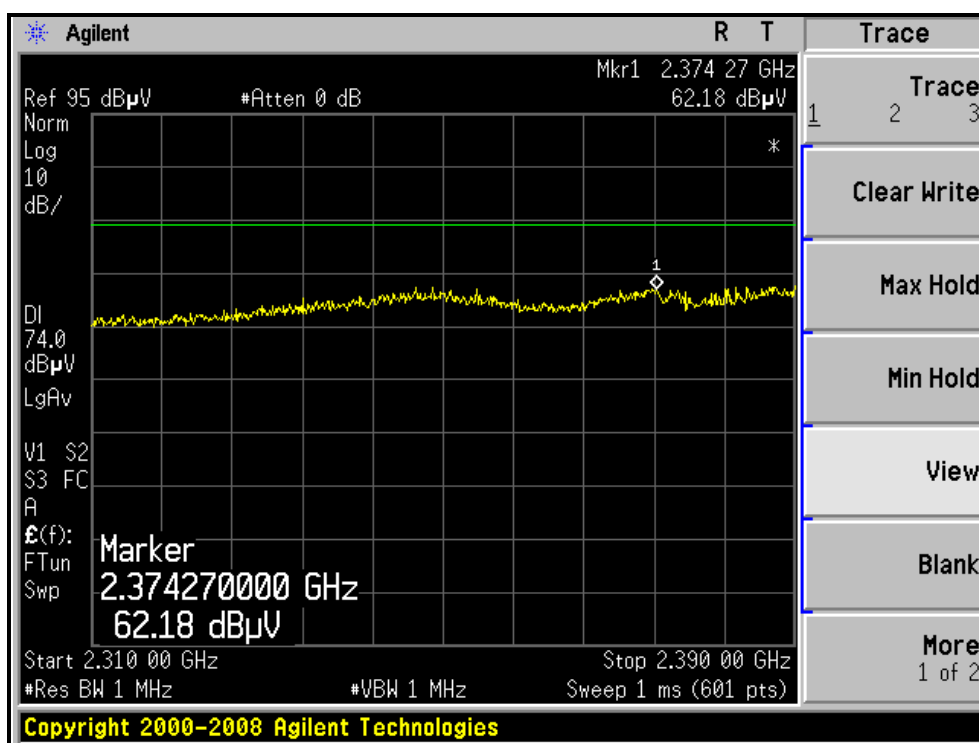

# RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL )

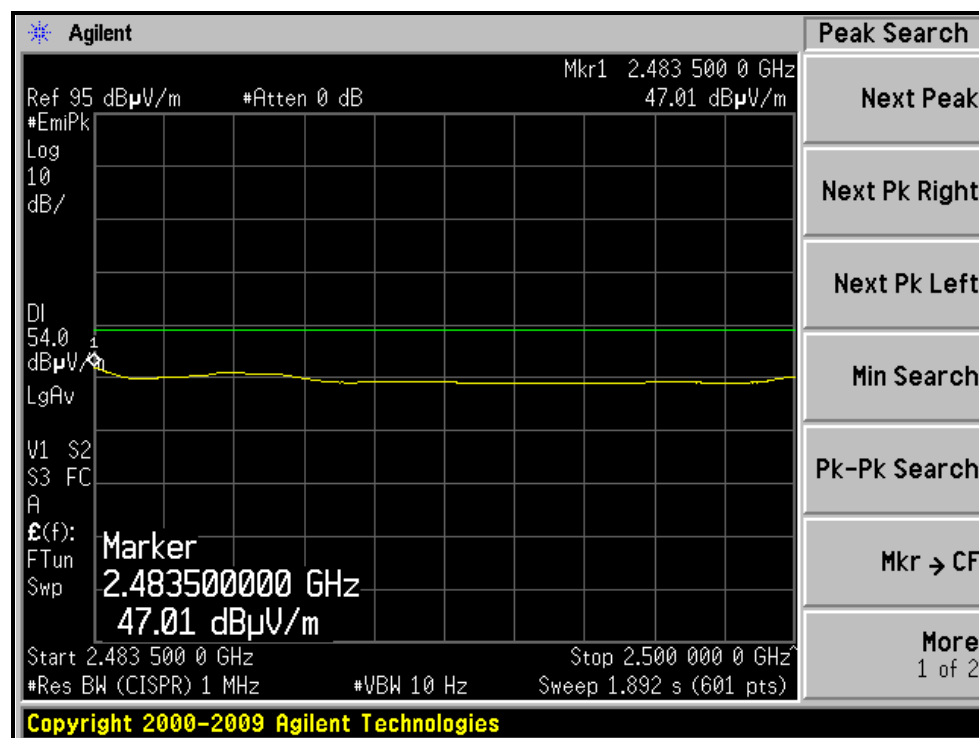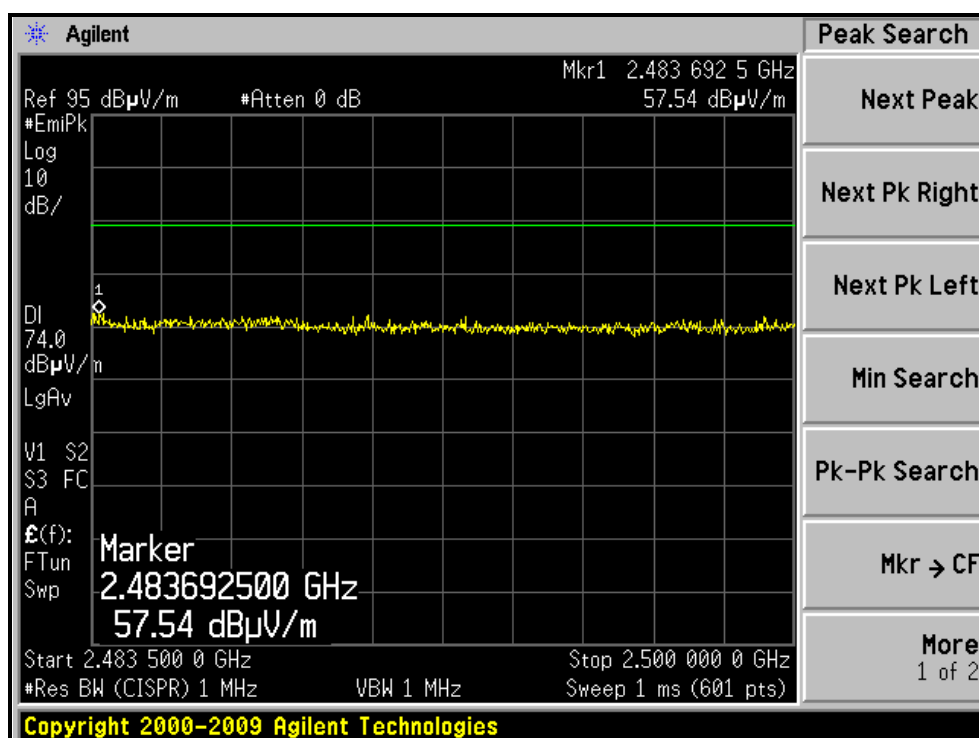

# RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL )

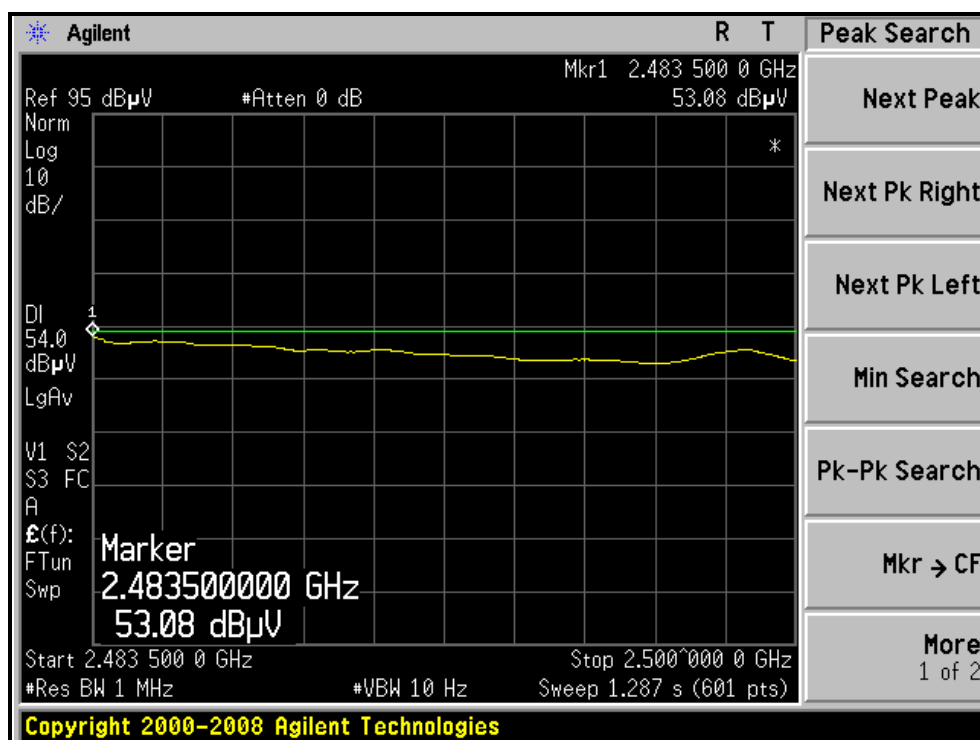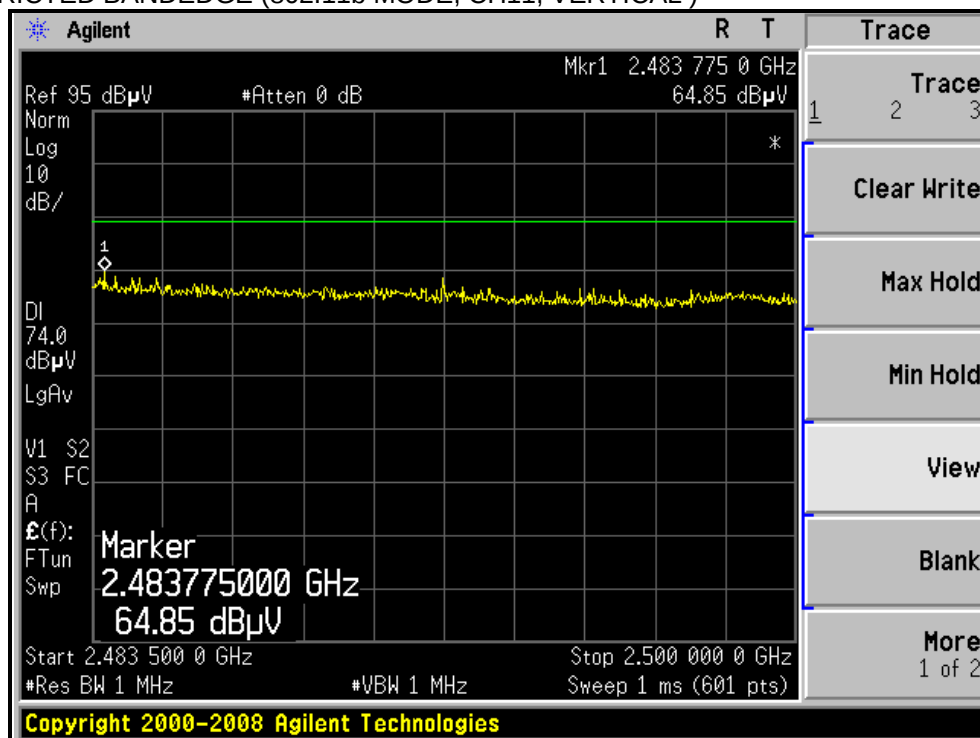

## 802.11g OFDM MODULATION

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 1                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 69.7 PK                 | 74.0           | -4.3        | 1.00 H             | 80                   | 39.64            | 30.06                    |
| 2                                                   | 2390.00     | 47.5 AV                 | 54.0           | -6.5        | 1.00 H             | 80                   | 17.44            | 30.06                    |
| 3                                                   | *2412.00    | 107.1 PK                |                |             | 1.00 H             | 80                   | 76.95            | 30.15                    |
| 4                                                   | *2412.00    | 96.7 AV                 |                |             | 1.00 H             | 80                   | 66.55            | 30.15                    |
| 5                                                   | 4824.00     | 46.5 PK                 | 74.0           | -27.5       | 1.03 H             | 114                  | 11.07            | 35.43                    |
| 6                                                   | 4824.00     | 34.2 AV                 | 54.0           | -19.8       | 1.03 H             | 114                  | -1.23            | 35.43                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 63.9 PK                 | 74.0           | -10.1       | 1.45 V             | 272                  | 33.84            | 30.06                    |
| 2                                                   | 2390.00     | 52.3 AV                 | 54.0           | -1.7        | 1.45 V             | 272                  | 22.24            | 30.06                    |
| 3                                                   | *2412.00    | 114.6 PK                |                |             | 1.44 V             | 2                    | 84.45            | 30.15                    |
| 4                                                   | *2412.00    | 104.1 AV                |                |             | 1.44 V             | 2                    | 73.95            | 30.15                    |
| 5                                                   | 4824.00     | 48.3 PK                 | 74.0           | -25.7       | 1.08 V             | 146                  | 12.87            | 35.43                    |
| 6                                                   | 4824.00     | 35.1 AV                 | 54.0           | -18.9       | 1.08 V             | 146                  | -0.33            | 35.43                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2376.80     | 61.3 PK                 | 74.0           | -12.7       | 1.02 H             | 80                   | 31.29            | 30.01                    |
| 2                                                   | 2376.80     | 45.5 AV                 | 54.0           | -8.5        | 1.02 H             | 80                   | 15.49            | 30.01                    |
| 3                                                   | *2437.00    | 107.9 PK                |                |             | 1.00 H             | 77                   | 77.66            | 30.24                    |
| 4                                                   | *2437.00    | 97.4 AV                 |                |             | 1.00 H             | 77                   | 67.16            | 30.24                    |
| 5                                                   | 2496.90     | 62.2 PK                 | 74.0           | -11.8       | 1.05 H             | 88                   | 31.72            | 30.48                    |
| 6                                                   | 2496.90     | 44.5 AV                 | 54.0           | -9.5        | 1.05 H             | 88                   | 14.02            | 30.48                    |
| 7                                                   | 4874.00     | 46.7 PK                 | 74.0           | -27.3       | 1.04 H             | 113                  | 11.18            | 35.52                    |
| 8                                                   | 4874.00     | 34.3 AV                 | 54.0           | -19.7       | 1.04 H             | 113                  | -1.22            | 35.52                    |
| 9                                                   | 7311.00     | 54.6 PK                 | 74.0           | -19.4       | 1.24 H             | 62                   | 12.64            | 41.96                    |
| 10                                                  | 7311.00     | 41.5 AV                 | 54.0           | -12.5       | 1.24 H             | 62                   | -0.46            | 41.96                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2377.00     | 69.5 PK                 | 74.0           | -4.5        | 1.41 V             | 45                   | 39.49            | 30.01                    |
| 2                                                   | 2377.00     | 50.1 AV                 | 54.0           | -3.9        | 1.41 V             | 45                   | 20.09            | 30.01                    |
| 3                                                   | *2437.00    | 114.2 PK                |                |             | 1.42 V             | 1                    | 83.96            | 30.24                    |
| 4                                                   | *2437.00    | 105.6 AV                |                |             | 1.42 V             | 1                    | 75.36            | 30.24                    |
| 5                                                   | 2496.90     | 71.9 PK                 | 74.0           | -2.1        | 1.38 V             | 9                    | 41.42            | 30.48                    |
| 6                                                   | 2496.90     | 50.0 AV                 | 54.0           | -4.0        | 1.38 V             | 9                    | 19.52            | 30.48                    |
| 7                                                   | 4874.00     | 47.8 PK                 | 74.0           | -26.2       | 1.34 V             | 147                  | 12.28            | 35.52                    |
| 8                                                   | 4874.00     | 35.4 AV                 | 54.0           | -18.6       | 1.34 V             | 147                  | -0.12            | 35.52                    |
| 9                                                   | 7311.00     | 54.8 PK                 | 74.0           | -19.2       | 1.23 V             | 305                  | 12.84            | 41.96                    |
| 10                                                  | 7311.00     | 41.7 AV                 | 54.0           | -12.3       | 1.23 V             | 305                  | -0.26            | 41.96                    |



- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 11                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |



| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 105.9 PK                |                |             | 1.00 H             | 114                  | 75.56            | 30.34                    |
| 2                                                   | *2462.00    | 94.4 AV                 |                |             | 1.00 H             | 114                  | 64.06            | 30.34                    |
| 3                                                   | 2483.50     | 66.6 PK                 | 74.0           | -7.4        | 1.00 H             | 114                  | 36.17            | 30.43                    |
| 4                                                   | 2483.50     | 46.2 AV                 | 54.0           | -7.8        | 1.00 H             | 114                  | 15.77            | 30.43                    |
| 5                                                   | 4924.00     | 46.9 PK                 | 74.0           | -27.1       | 1.00 H             | 103                  | 11.28            | 35.62                    |
| 6                                                   | 4924.00     | 34.4 AV                 | 54.0           | -19.6       | 1.00 H             | 103                  | -1.22            | 35.62                    |
| 7                                                   | 7386.00     | 54.4 PK                 | 74.0           | -19.6       | 1.20 H             | 60                   | 12.30            | 42.10                    |
| 8                                                   | 7386.00     | 41.2 AV                 | 54.0           | -12.8       | 1.20 H             | 60                   | -0.90            | 42.10                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 114.4 PK                |                |             | 1.37 V             | 34                   | 84.06            | 30.34                    |
| 2                                                   | *2462.00    | 105.3 AV                |                |             | 1.37 V             | 34                   | 74.96            | 30.34                    |
| 3                                                   | 2483.50     | 65.8 PK                 | 74.0           | -8.2        | 1.42 V             | 9                    | 35.37            | 30.43                    |
| 4                                                   | 2483.50     | 53.3 AV                 | 54.0           | -0.7        | 1.42 V             | 9                    | 22.87            | 30.43                    |
| 5                                                   | 4924.00     | 48.6 PK                 | 74.0           | -25.4       | 1.33 V             | 149                  | 12.98            | 35.62                    |
| 6                                                   | 4924.00     | 35.9 AV                 | 54.0           | -18.1       | 1.33 V             | 149                  | 0.28             | 35.62                    |
| 7                                                   | 7386.00     | 54.1 PK                 | 74.0           | -19.9       | 1.64 V             | 300                  | 12.00            | 42.10                    |
| 8                                                   | 7386.00     | 40.7 AV                 | 54.0           | -13.3       | 1.64 V             | 300                  | -1.40            | 42.10                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.



# RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL )

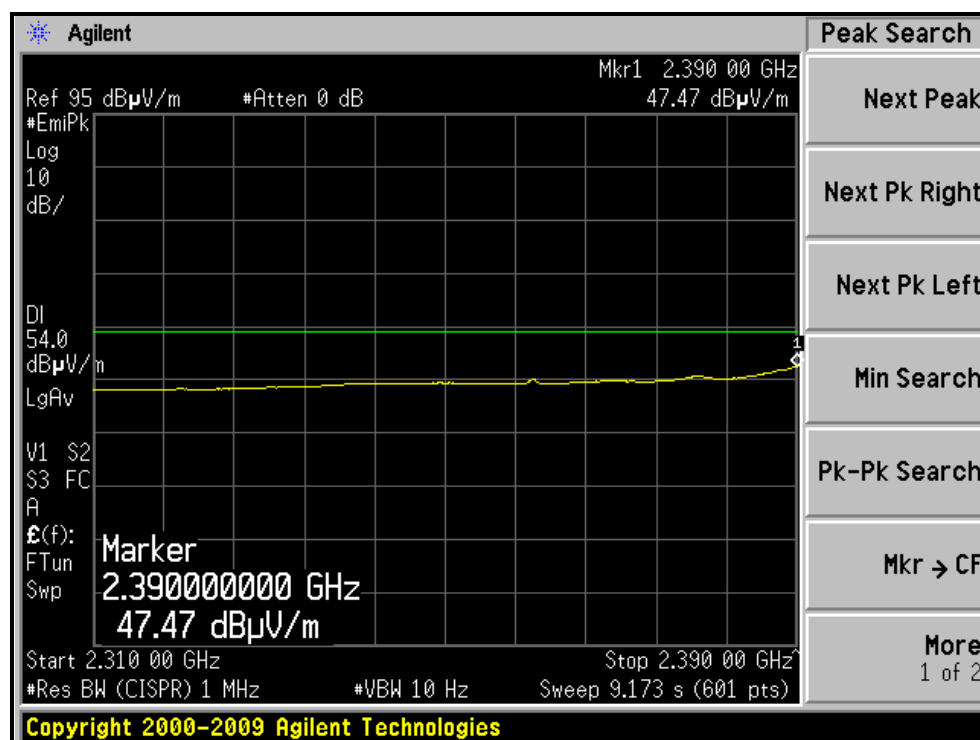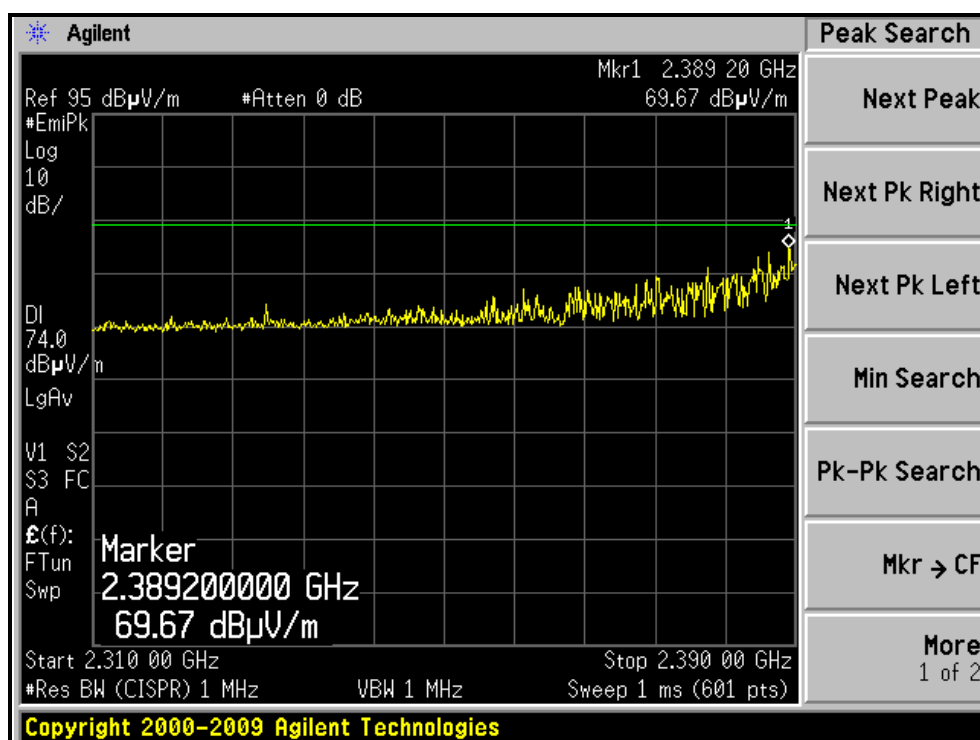



# RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL )

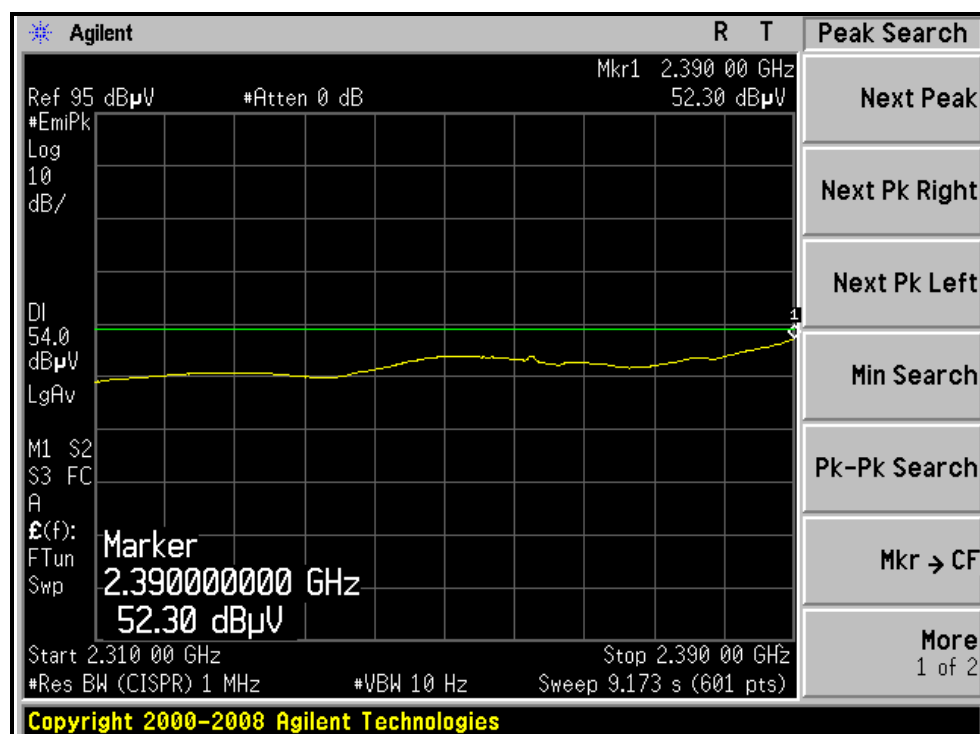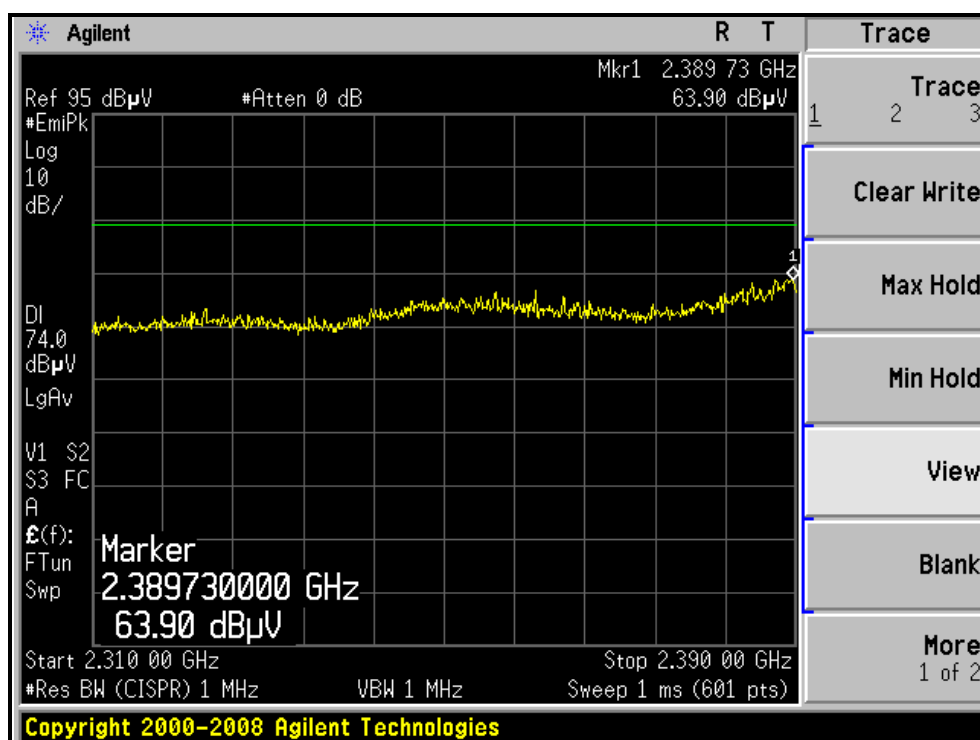

# RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL )

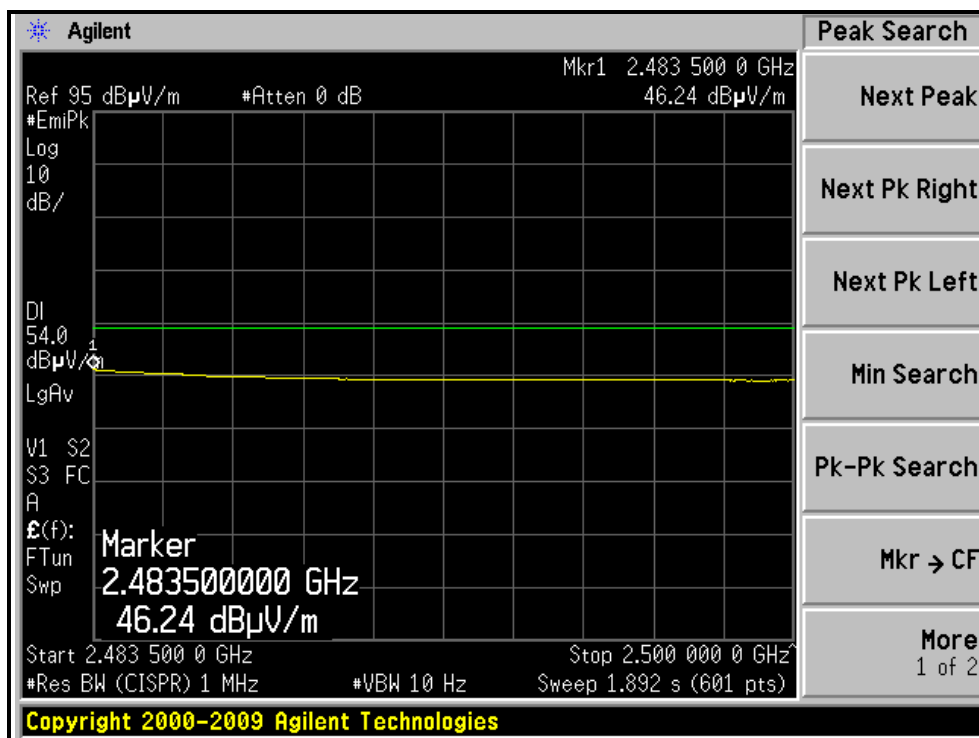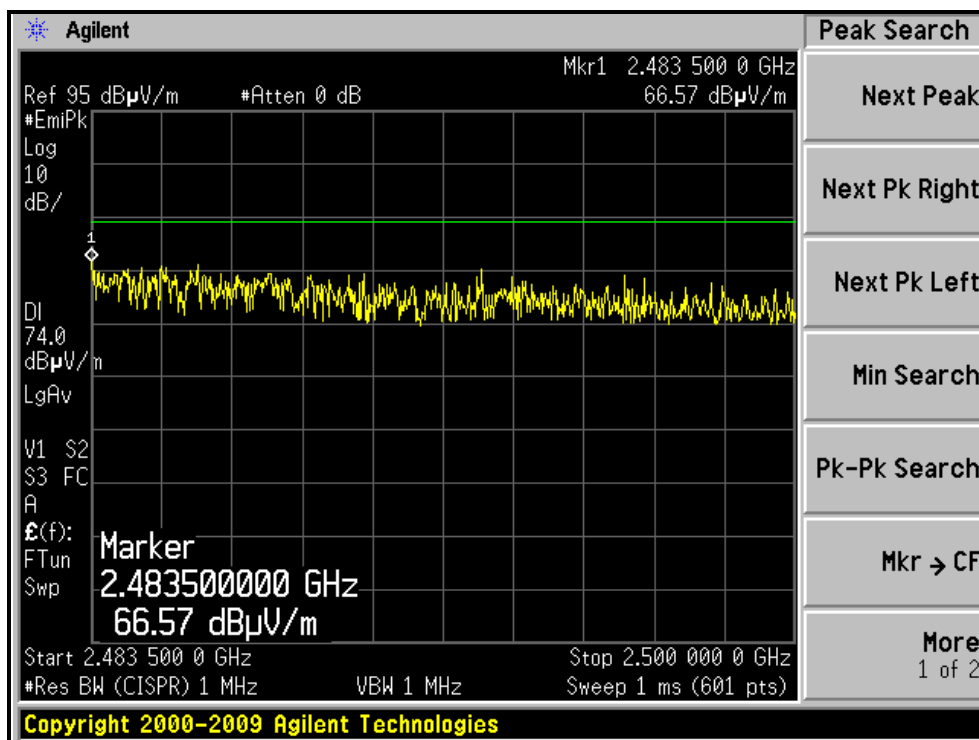

# RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL )

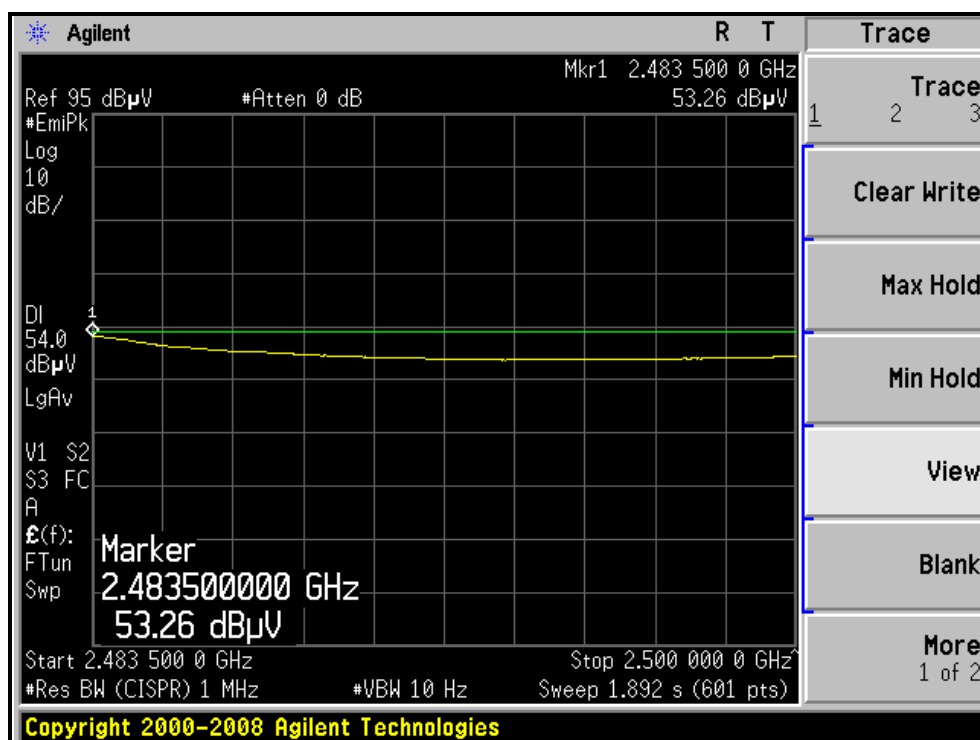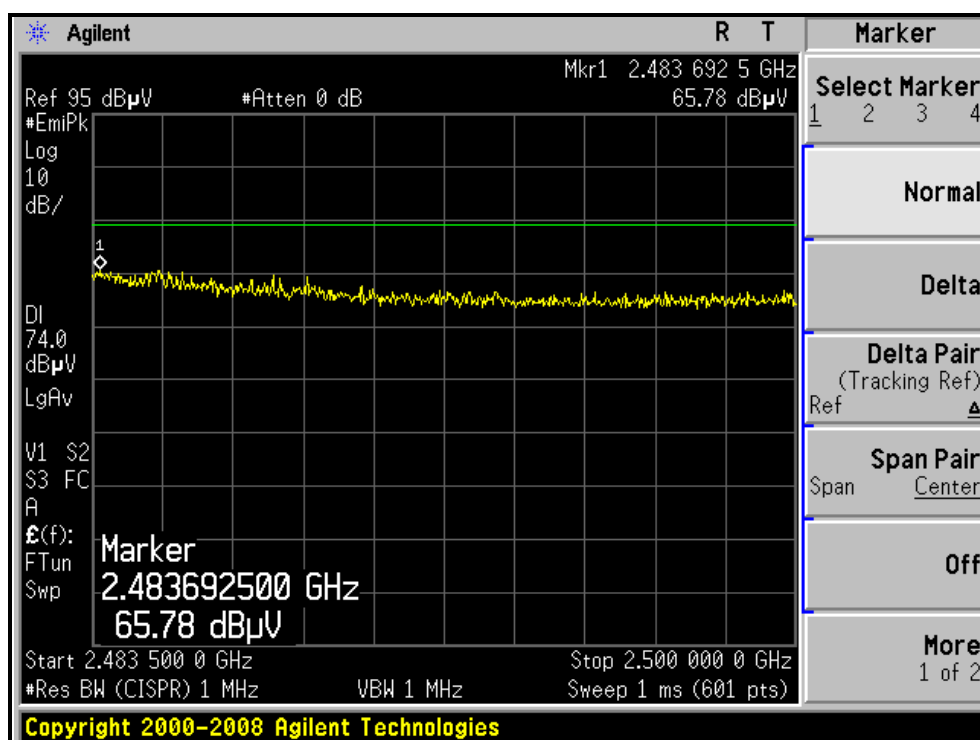

### 802.11n (20MHz) OFDM MODULATION

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 1                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2360.00     | 58.0 PK                 | 74.0           | -16.0       | 1.00 H             | 92                   | 28.06            | 29.94                    |
| 2                                                   | 2360.00     | 46.2 AV                 | 54.0           | -7.8        | 1.00 H             | 92                   | 16.26            | 29.94                    |
| 3                                                   | *2412.00    | 105.5 PK                |                |             | 1.00 H             | 77                   | 75.35            | 30.15                    |
| 4                                                   | *2412.00    | 93.1 AV                 |                |             | 1.00 H             | 77                   | 62.95            | 30.15                    |
| 5                                                   | 4824.00     | 46.6 PK                 | 74.0           | -27.4       | 1.00 H             | 105                  | 11.17            | 35.43                    |
| 6                                                   | 4824.00     | 31.3 AV                 | 54.0           | -22.7       | 1.00 H             | 105                  | -4.13            | 35.43                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 67.5 PK                 | 74.0           | -6.5        | 1.48 V             | 80                   | 37.44            | 30.06                    |
| 2                                                   | 2390.00     | 53.2 AV                 | 54.0           | -0.8        | 1.48 V             | 80                   | 23.14            | 30.06                    |
| 3                                                   | *2412.00    | 112.7 PK                |                |             | 1.46 V             | 92                   | 82.55            | 30.15                    |
| 4                                                   | *2412.00    | 101.9 AV                |                |             | 1.46 V             | 92                   | 71.75            | 30.15                    |
| 5                                                   | 4824.00     | 47.3 PK                 | 74.0           | -26.7       | 1.06 V             | 159                  | 11.87            | 35.43                    |
| 6                                                   | 4824.00     | 32.7 AV                 | 54.0           | -21.3       | 1.06 V             | 159                  | -2.73            | 35.43                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ”: Fundamental frequency.



A D T

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2360.00     | 57.9 PK                 | 74.0           | -16.1       | 1.03 H             | 163                  | 27.96            | 29.94                    |
| 2                                                   | 2360.00     | 45.6 AV                 | 54.0           | -8.4        | 1.03 H             | 163                  | 15.66            | 29.94                    |
| 3                                                   | *2437.00    | 105.9 PK                |                |             | 1.00 H             | 182                  | 75.66            | 30.24                    |
| 4                                                   | *2437.00    | 93.5 AV                 |                |             | 1.00 H             | 182                  | 63.26            | 30.24                    |
| 5                                                   | 2497.00     | 57.9 PK                 | 74.0           | -16.1       | 1.04 H             | 192                  | 27.42            | 30.48                    |
| 6                                                   | 2497.00     | 45.9 AV                 | 54.0           | -8.1        | 1.04 H             | 192                  | 15.42            | 30.48                    |
| 7                                                   | 4874.00     | 48.4 PK                 | 74.0           | -25.6       | 1.00 H             | 49                   | 12.88            | 35.52                    |
| 8                                                   | 4874.00     | 33.5 AV                 | 54.0           | -20.5       | 1.00 H             | 49                   | -2.02            | 35.52                    |
| 9                                                   | 7311.00     | 58.7 PK                 | 74.0           | -15.3       | 1.24 H             | 56                   | 16.74            | 41.96                    |
| 10                                                  | 7311.00     | 42.1 AV                 | 54.0           | -11.9       | 1.24 H             | 56                   | 0.14             | 41.96                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2377.10     | 62.3 PK                 | 74.0           | -11.7       | 1.44 V             | 43                   | 32.29            | 30.01                    |
| 2                                                   | 2377.10     | 52.0 AV                 | 54.0           | -2.0        | 1.44 V             | 43                   | 21.99            | 30.01                    |
| 3                                                   | *2437.00    | 115.5 PK                |                |             | 1.67 V             | 323                  | 85.26            | 30.24                    |
| 4                                                   | *2437.00    | 104.6 AV                |                |             | 1.67 V             | 323                  | 74.36            | 30.24                    |
| 5                                                   | 2497.00     | 61.8 PK                 | 74.0           | -12.2       | 1.43 V             | 99                   | 31.32            | 30.48                    |
| 6                                                   | 2497.00     | 53.2 AV                 | 54.0           | -0.8        | 1.43 V             | 99                   | 22.72            | 30.48                    |
| 7                                                   | 4874.00     | 49.9 PK                 | 74.0           | -24.1       | 1.00 V             | 21                   | 14.38            | 35.52                    |
| 8                                                   | 4874.00     | 34.2 AV                 | 54.0           | -19.8       | 1.00 V             | 21                   | -1.32            | 35.52                    |
| 9                                                   | 7311.00     | 59.9 PK                 | 74.0           | -14.1       | 1.00 V             | 255                  | 17.94            | 41.96                    |
| 10                                                  | 7311.00     | 43.3 AV                 | 54.0           | -10.7       | 1.00 V             | 255                  | 1.34             | 41.96                    |



- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 11                  | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |



| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 105.3 PK                |                |             | 1.00 H             | 78                   | 74.96            | 30.34                    |
| 2                                                   | *2462.00    | 92.8 AV                 |                |             | 1.00 H             | 78                   | 62.46            | 30.34                    |
| 3                                                   | 2483.50     | 63.2 PK                 | 74.0           | -10.8       | 1.00 H             | 77                   | 32.77            | 30.43                    |
| 4                                                   | 2483.50     | 45.8 AV                 | 54.0           | -8.2        | 1.00 H             | 77                   | 15.37            | 30.43                    |
| 5                                                   | 4924.00     | 48.3 PK                 | 74.0           | -25.7       | 1.06 H             | 55                   | 12.68            | 35.62                    |
| 6                                                   | 4924.00     | 33.3 AV                 | 54.0           | -20.7       | 1.06 H             | 55                   | -2.32            | 35.62                    |
| 7                                                   | 7386.00     | 58.7 PK                 | 74.0           | -15.3       | 1.29 H             | 48                   | 16.60            | 42.10                    |
| 8                                                   | 7386.00     | 42.3 AV                 | 54.0           | -11.7       | 1.29 H             | 48                   | 0.20             | 42.10                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 113.6 PK                |                |             | 1.40 V             | 340                  | 83.26            | 30.34                    |
| 2                                                   | *2462.00    | 103.6 AV                |                |             | 1.40 V             | 340                  | 73.26            | 30.34                    |
| 3                                                   | 2483.50     | 65.8 PK                 | 74.0           | -8.2        | 1.64 V             | 340                  | 35.37            | 30.43                    |
| 4                                                   | 2483.50     | 53.0 AV                 | 54.0           | -1.0        | 1.64 V             | 340                  | 22.57            | 30.43                    |
| 5                                                   | 4924.00     | 50.1 PK                 | 74.0           | -23.9       | 1.14 V             | 152                  | 14.48            | 35.62                    |
| 6                                                   | 4924.00     | 34.3 AV                 | 54.0           | -19.7       | 1.14 V             | 152                  | -1.32            | 35.62                    |
| 7                                                   | 7386.00     | 57.4 PK                 | 74.0           | -16.6       | 1.01 V             | 288                  | 15.30            | 42.10                    |
| 8                                                   | 7386.00     | 40.9 AV                 | 54.0           | -13.1       | 1.01 V             | 288                  | -1.20            | 42.10                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL )

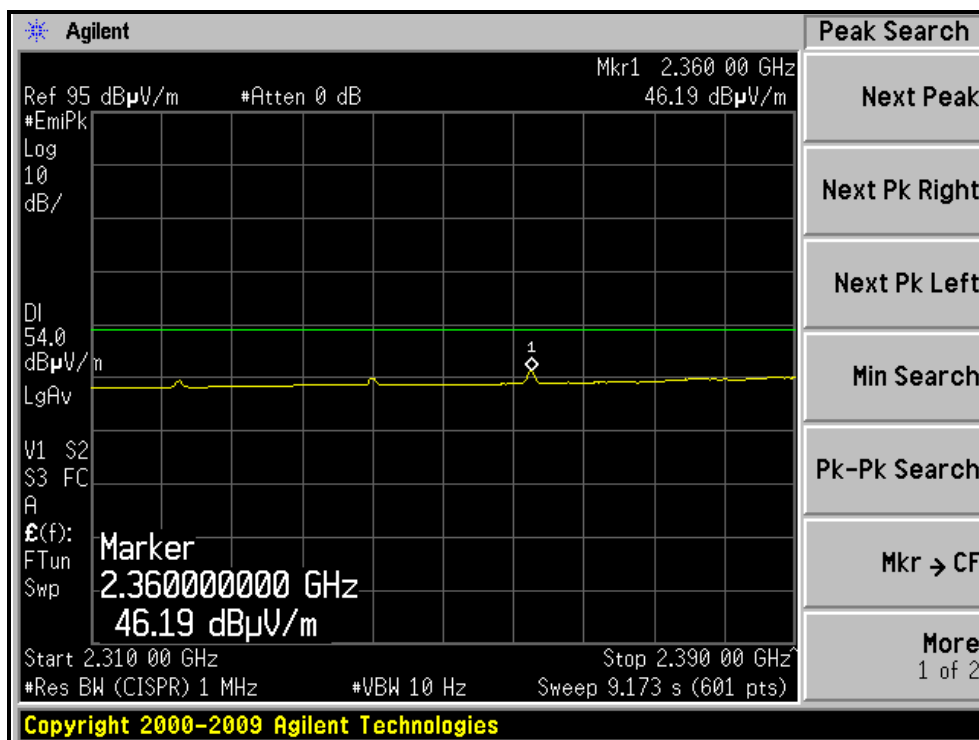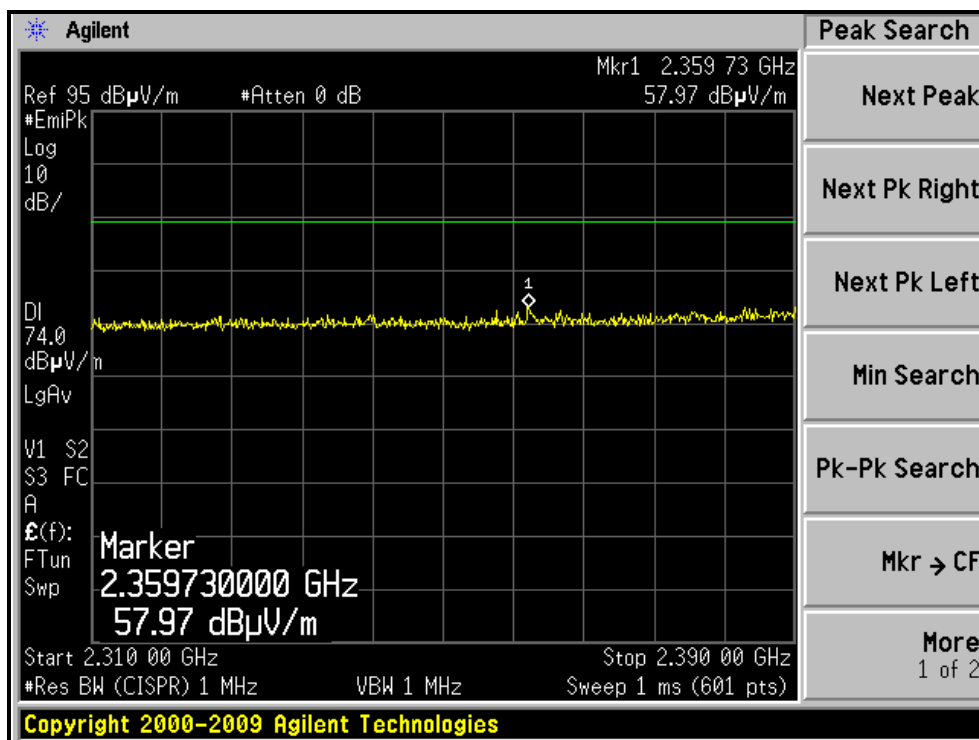



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL )

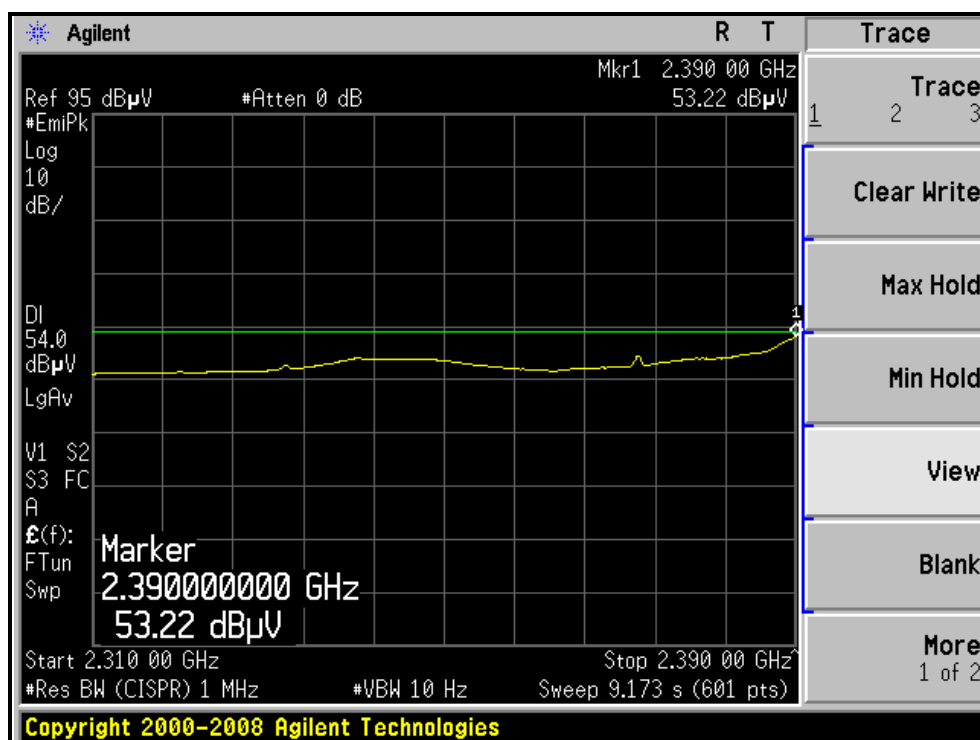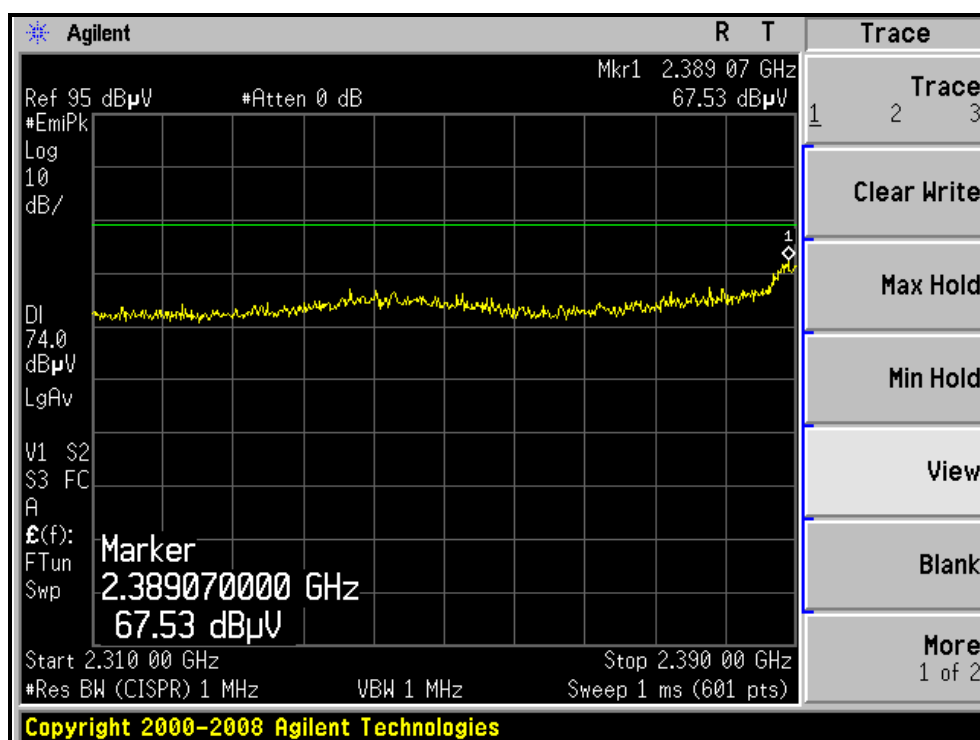

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL )

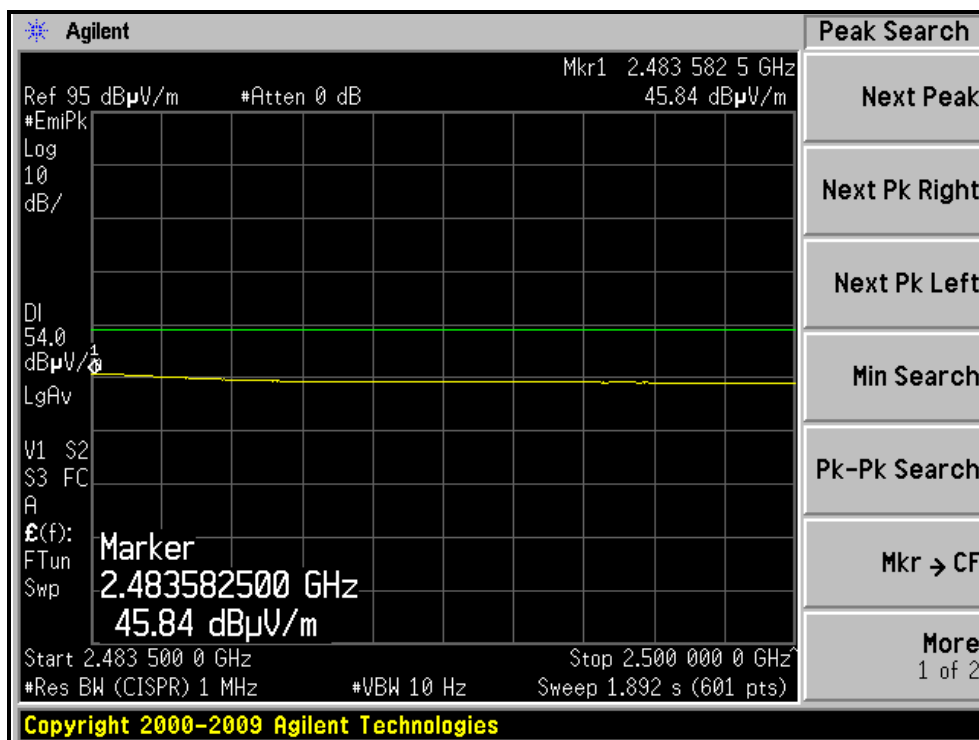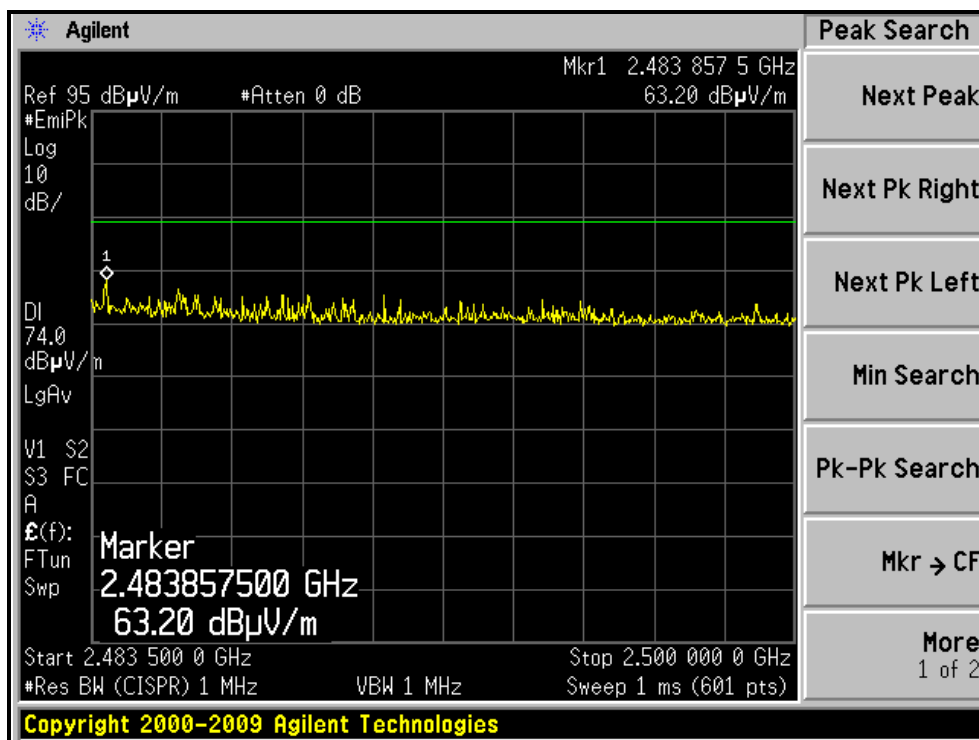

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL )

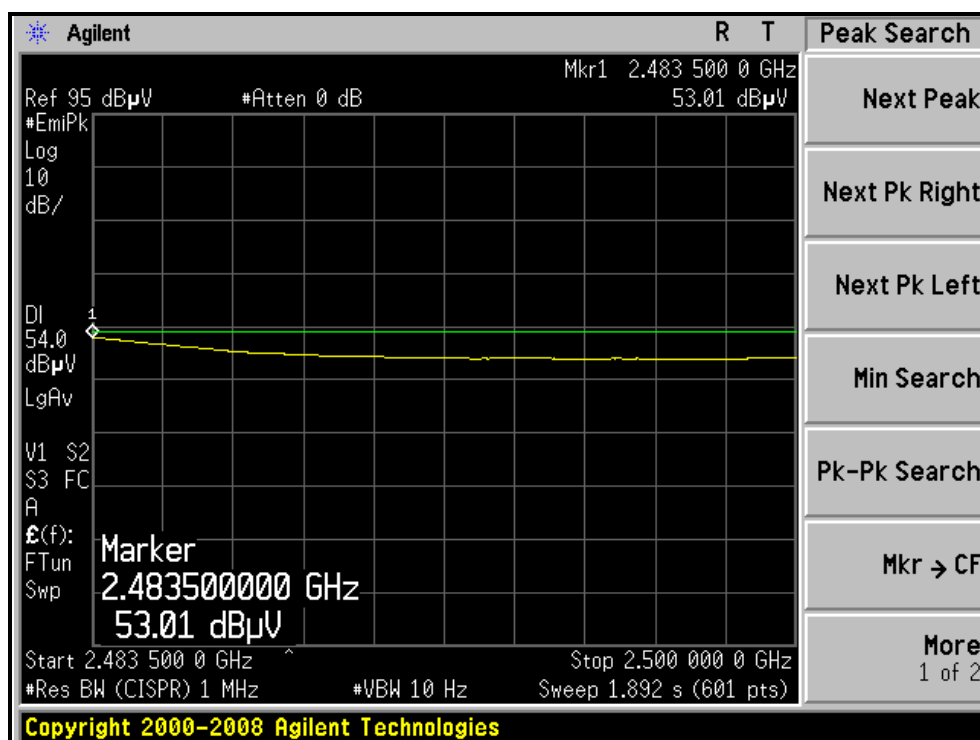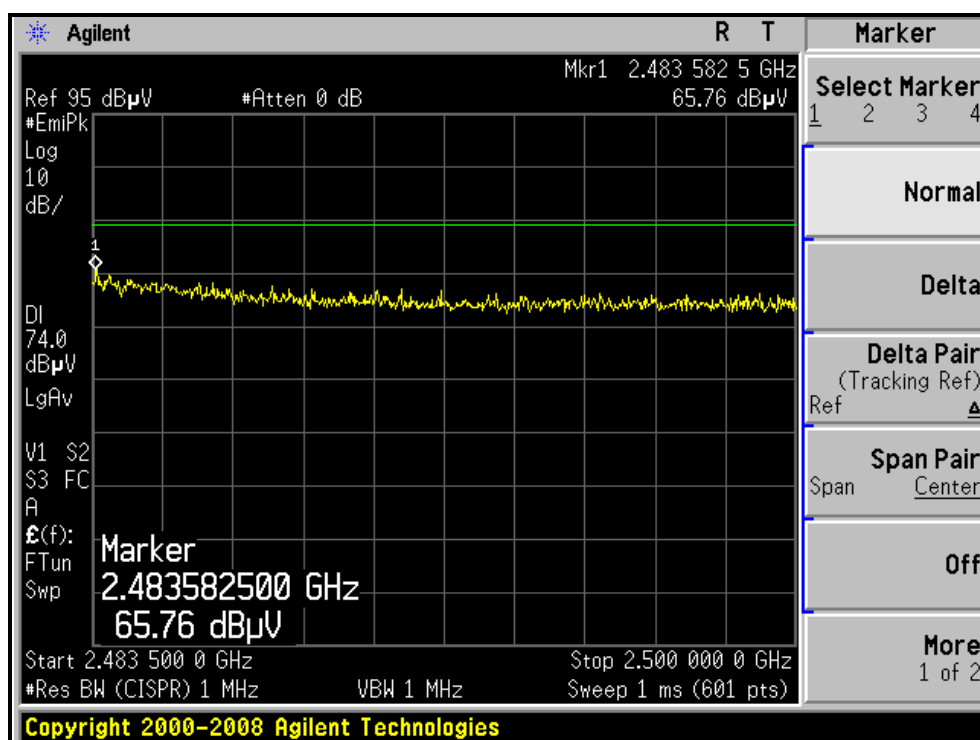

### 802.11n (40MHz) OFDM MODULATION

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 3                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2388.90     | 62.7 PK                 | 74.0           | -11.3       | 1.00 H             | 77                   | 32.64            | 30.06                    |
| 2                                                   | 2388.90     | 46.7 AV                 | 54.0           | -7.3        | 1.00 H             | 77                   | 16.64            | 30.06                    |
| 3                                                   | *2422.00    | 100.2 PK                |                |             | 1.00 H             | 77                   | 70.01            | 30.19                    |
| 4                                                   | *2422.00    | 88.2 AV                 |                |             | 1.00 H             | 77                   | 58.01            | 30.19                    |
| 5                                                   | 4844.00     | 42.8 PK                 | 74.0           | -31.2       | 1.00 H             | 53                   | 7.33             | 35.47                    |
| 6                                                   | 4844.00     | 30.1 AV                 | 54.0           | -23.9       | 1.00 H             | 53                   | -5.37            | 35.47                    |
| 7                                                   | 7266.00     | 51.4 PK                 | 74.0           | -22.6       | 1.21 H             | 53                   | 9.53             | 41.87                    |
| 8                                                   | 7266.00     | 36.4 AV                 | 54.0           | -17.6       | 1.21 H             | 53                   | -5.47            | 41.87                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 66.5 PK                 | 74.0           | -7.5        | 1.47 V             | 81                   | 36.44            | 30.06                    |
| 2                                                   | 2390.00     | 53.3 AV                 | 54.0           | -0.7        | 1.47 V             | 81                   | 23.24            | 30.06                    |
| 3                                                   | *2422.00    | 107.5 PK                |                |             | 1.43 V             | 271                  | 77.31            | 30.19                    |
| 4                                                   | *2422.00    | 97.4 AV                 |                |             | 1.43 V             | 271                  | 67.21            | 30.19                    |
| 5                                                   | 4844.00     | 43.1 PK                 | 74.0           | -30.9       | 1.47 V             | 168                  | 7.63             | 35.47                    |
| 6                                                   | 4844.00     | 30.7 AV                 | 54.0           | -23.3       | 1.47 V             | 168                  | -4.77            | 35.47                    |
| 7                                                   | 7266.00     | 51.5 PK                 | 74.0           | -22.5       | 1.00 V             | 258                  | 9.63             | 41.87                    |
| 8                                                   | 7266.00     | 37.5 AV                 | 54.0           | -16.5       | 1.00 V             | 258                  | -4.37            | 41.87                    |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “: Fundamental frequency.

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 6                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2389.50     | 59.2 PK                 | 74.0           | -14.8       | 1.03 H             | 69                   | 29.14            | 30.06                    |
| 2                                                   | 2389.50     | 46.5 AV                 | 54.0           | -7.5        | 1.03 H             | 69                   | 16.44            | 30.06                    |
| 3                                                   | *2437.00    | 105.1 PK                |                |             | 1.00 H             | 78                   | 74.86            | 30.24                    |
| 4                                                   | *2437.00    | 92.3 AV                 |                |             | 1.00 H             | 78                   | 62.06            | 30.24                    |
| 5                                                   | 2496.90     | 60.5 PK                 | 74.0           | -13.5       | 1.05 H             | 80                   | 30.02            | 30.48                    |
| 6                                                   | 2496.90     | 46.1 AV                 | 54.0           | -7.9        | 1.05 H             | 80                   | 15.62            | 30.48                    |
| 7                                                   | 4874.00     | 48.3 PK                 | 74.0           | -25.7       | 1.00 H             | 52                   | 12.78            | 35.52                    |
| 8                                                   | 4874.00     | 33.5 AV                 | 54.0           | -20.5       | 1.00 H             | 52                   | -2.02            | 35.52                    |
| 9                                                   | 7311.00     | 60.1 PK                 | 74.0           | -13.9       | 1.21 H             | 62                   | 18.14            | 41.96                    |
| 10                                                  | 7311.00     | 43.5 AV                 | 54.0           | -10.5       | 1.21 H             | 62                   | 1.54             | 41.96                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2376.70     | 62.8 PK                 | 74.0           | -11.2       | 1.41 V             | 43                   | 32.79            | 30.01                    |
| 2                                                   | 2376.70     | 52.1 AV                 | 54.0           | -1.9        | 1.41 V             | 43                   | 22.09            | 30.01                    |
| 3                                                   | *2437.00    | 110.1 PK                |                |             | 1.65 V             | 42                   | 79.86            | 30.24                    |
| 4                                                   | *2437.00    | 101.0 AV                |                |             | 1.65 V             | 42                   | 70.76            | 30.24                    |
| 5                                                   | 2484.00     | 64.7 PK                 | 74.0           | -9.3        | 1.66 V             | 360                  | 34.27            | 30.43                    |
| 6                                                   | 2484.00     | 53.3 AV                 | 54.0           | -0.7        | 1.66 V             | 360                  | 22.87            | 30.43                    |
| 7                                                   | 4874.00     | 48.7 PK                 | 74.0           | -25.3       | 1.30 V             | 152                  | 13.18            | 35.52                    |
| 8                                                   | 4874.00     | 34.1 AV                 | 54.0           | -19.9       | 1.30 V             | 152                  | -1.42            | 35.52                    |
| 9                                                   | 7311.00     | 60.3 PK                 | 74.0           | -13.7       | 1.00 V             | 258                  | 18.34            | 41.96                    |
| 10                                                  | 7311.00     | 44.1 AV                 | 54.0           | -9.9        | 1.00 V             | 258                  | 2.14             | 41.96                    |



**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.

| EUT TEST CONDITION       |                             | MEASUREMENT DETAIL |                           |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL                  | Channel 9                   | FREQUENCY RANGE    | 1 ~ 25GHz                 |
| INPUT POWER              | 120Vac, 60 Hz               | DETECTOR FUNCTION  | Peak (PK)<br>Average (AV) |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 67%RH<br>1005 hPa | TESTED BY          | Wen Yu                    |



| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2452.00    | 101.2 PK                |                |             | 1.00 H             | 76                   | 70.90            | 30.30                    |
| 2                                                   | *2452.00    | 88.8 AV                 |                |             | 1.00 H             | 76                   | 58.50            | 30.30                    |
| 3                                                   | 2483.50     | 61.5 PK                 | 74.0           | -12.5       | 1.00 H             | 76                   | 31.07            | 30.43                    |
| 4                                                   | 2483.50     | 46.4 AV                 | 54.0           | -7.6        | 1.00 H             | 76                   | 15.97            | 30.43                    |
| 5                                                   | 4904.00     | 45.6 PK                 | 74.0           | -28.4       | 1.00 H             | 43                   | 10.02            | 35.58                    |
| 6                                                   | 4904.00     | 34.1 AV                 | 54.0           | -19.9       | 1.00 H             | 43                   | -1.48            | 35.58                    |
| 7                                                   | 7356.00     | 53.7 PK                 | 74.0           | -20.3       | 1.24 H             | 51                   | 11.66            | 42.04                    |
| 8                                                   | 7356.00     | 41.3 AV                 | 54.0           | -12.7       | 1.24 H             | 51                   | -0.74            | 42.04                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                         |                |             |                    |                      |                  |                          |
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2452.00    | 108.8 PK                |                |             | 1.67 V             | 37                   | 78.50            | 30.30                    |
| 2                                                   | *2452.00    | 99.2 AV                 |                |             | 1.67 V             | 37                   | 68.92            | 30.30                    |
| 3                                                   | 2483.50     | 66.5 PK                 | 74.0           | -7.5        | 1.66 V             | 105                  | 36.07            | 30.43                    |
| 4                                                   | 2483.50     | 53.5 AV                 | 54.0           | -0.5        | 1.66 V             | 105                  | 23.07            | 30.43                    |
| 5                                                   | 4904.00     | 46.2 PK                 | 74.0           | -27.8       | 1.17 V             | 164                  | 10.62            | 35.58                    |
| 6                                                   | 4904.00     | 32.1 AV                 | 54.0           | -21.9       | 1.17 V             | 164                  | -3.48            | 35.58                    |
| 7                                                   | 7356.00     | 53.1 PK                 | 74.0           | -20.9       | 1.02 V             | 289                  | 11.06            | 42.04                    |
| 8                                                   | 7356.00     | 39.3 AV                 | 54.0           | -14.7       | 1.02 V             | 289                  | -2.74            | 42.04                    |

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.  
5. “ \* “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, HORIZONTAL )

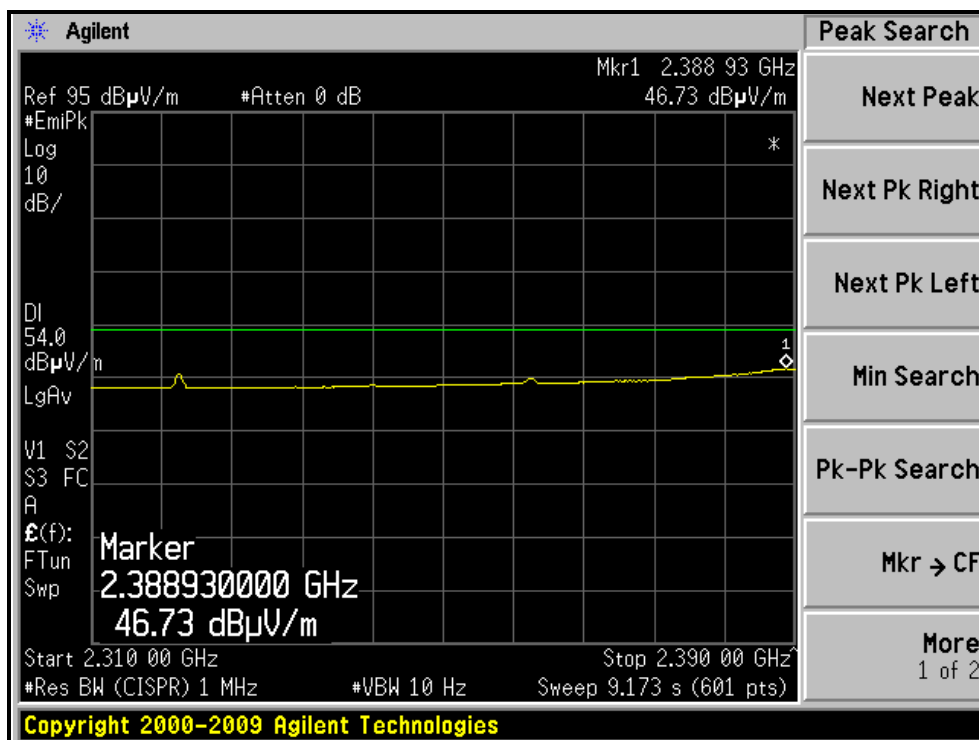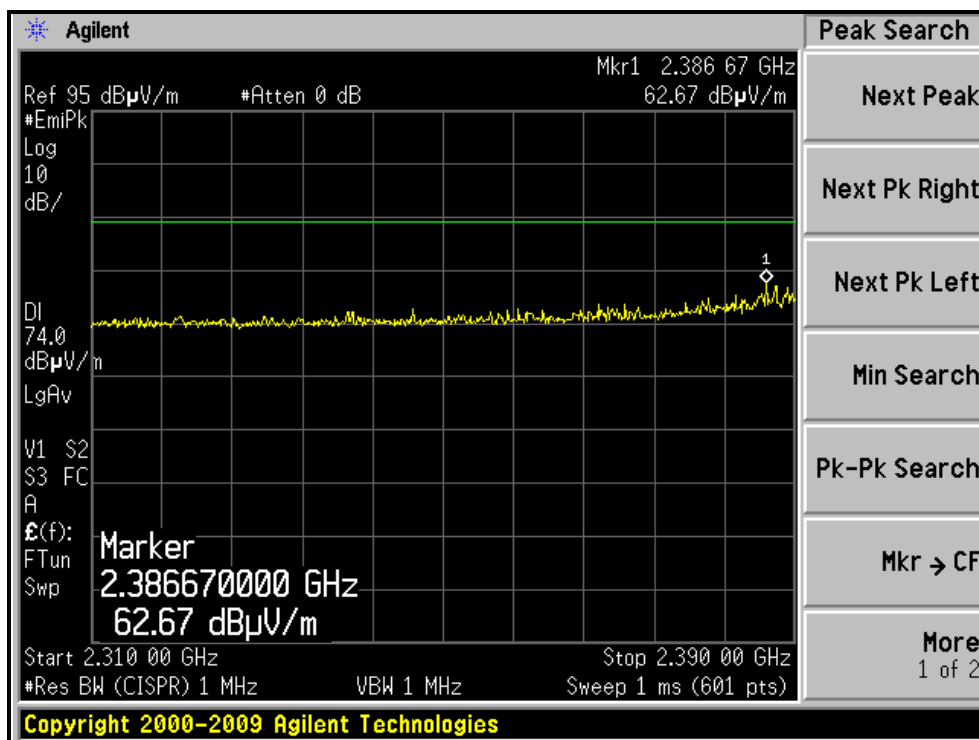



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, VERTICAL )

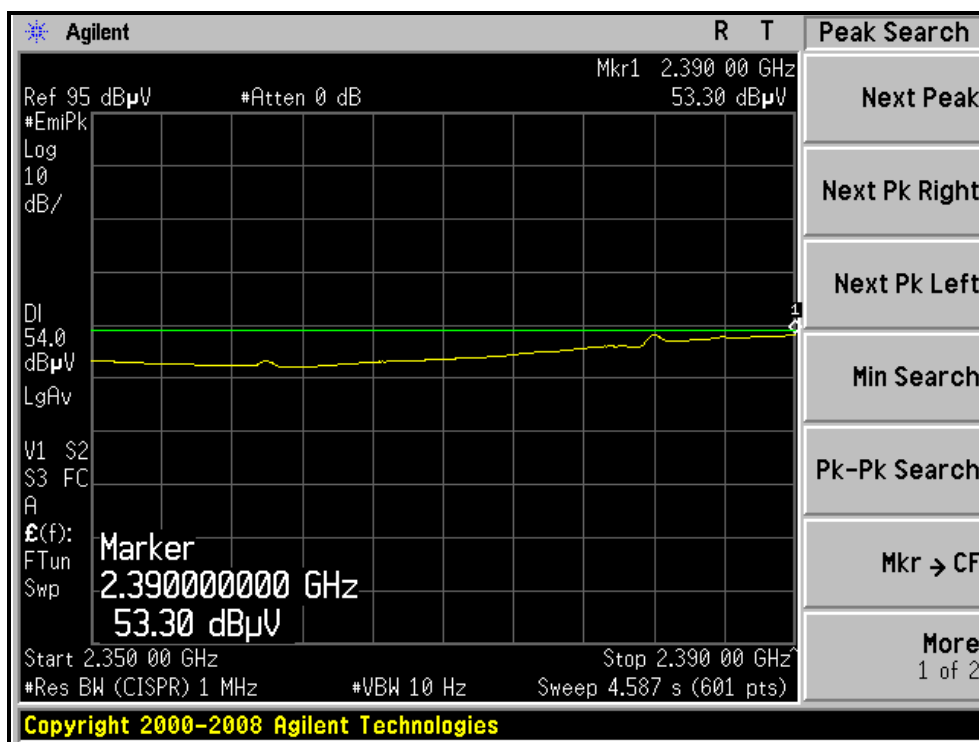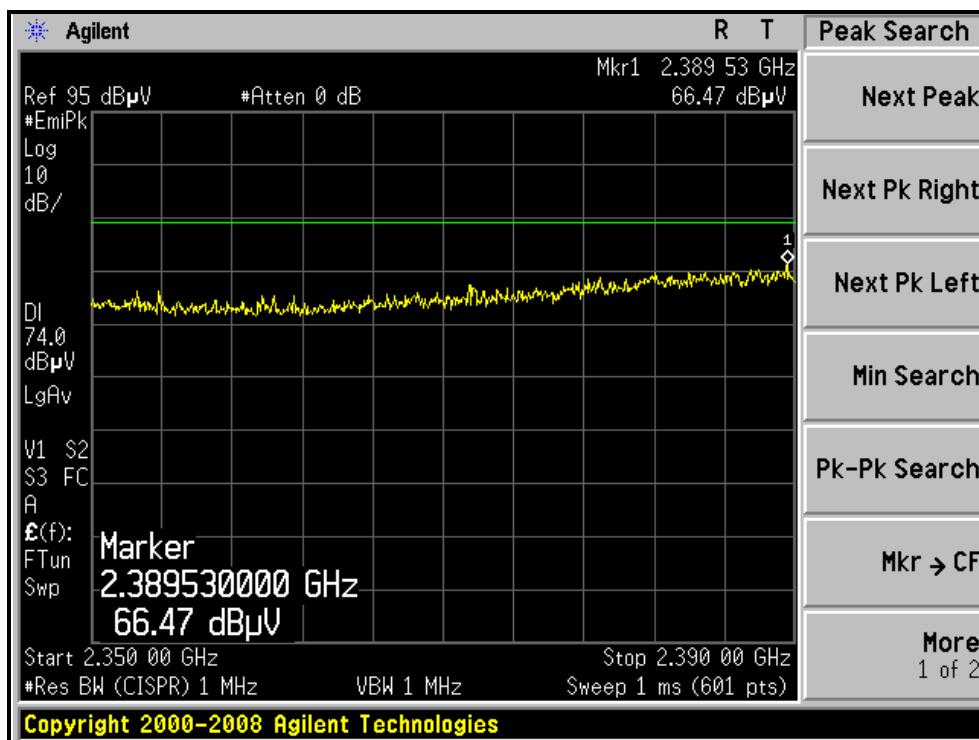

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, HORIZONTAL )

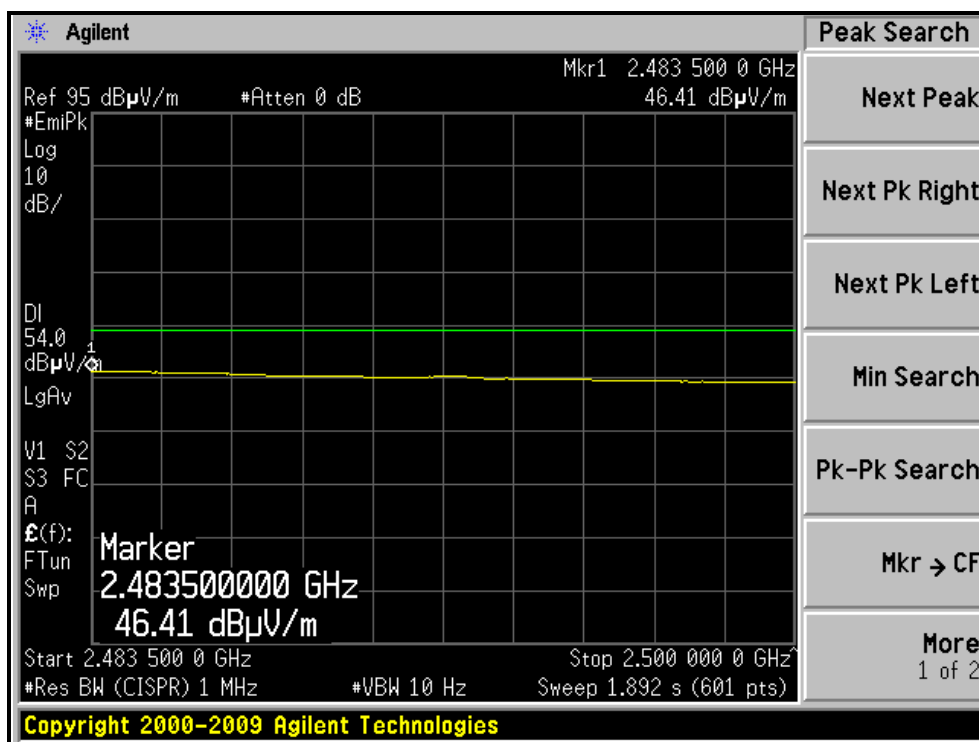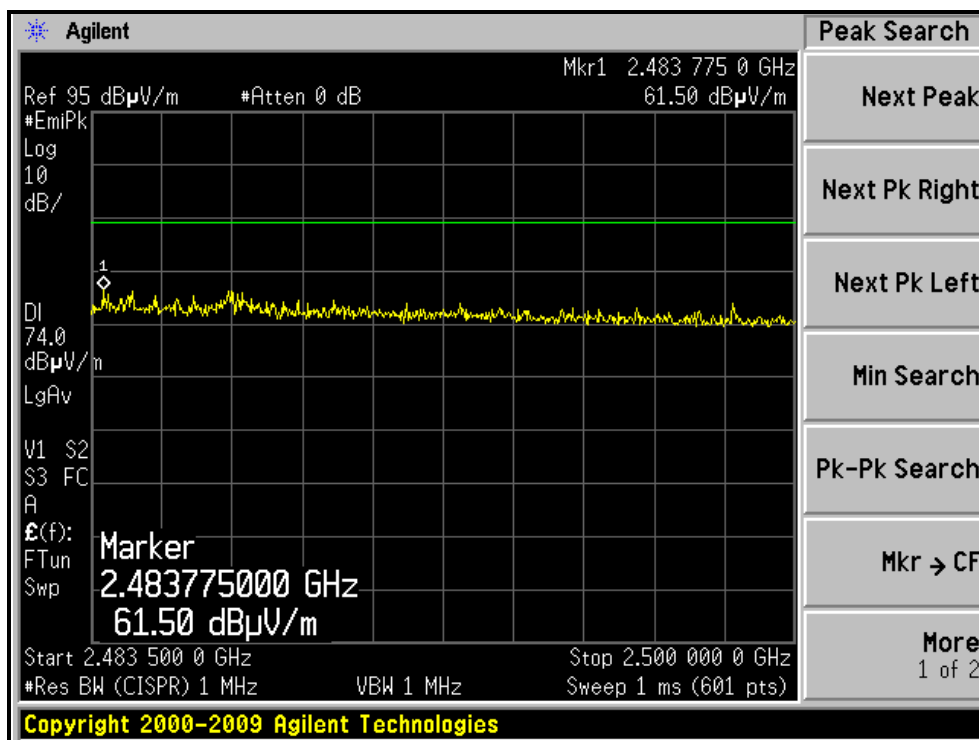

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, VERTICAL )

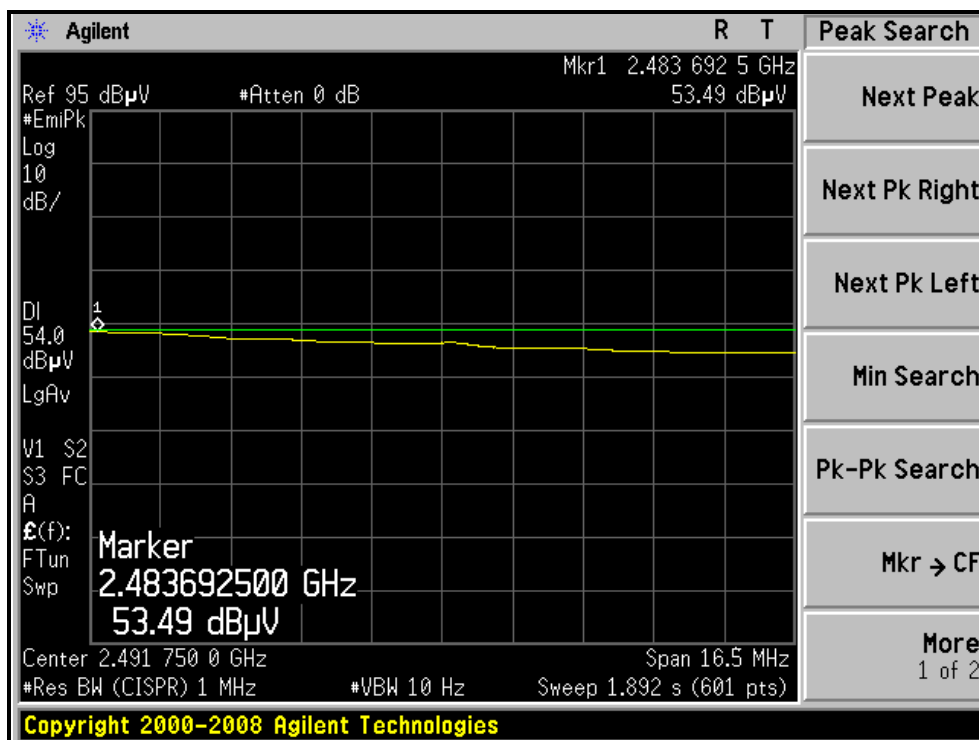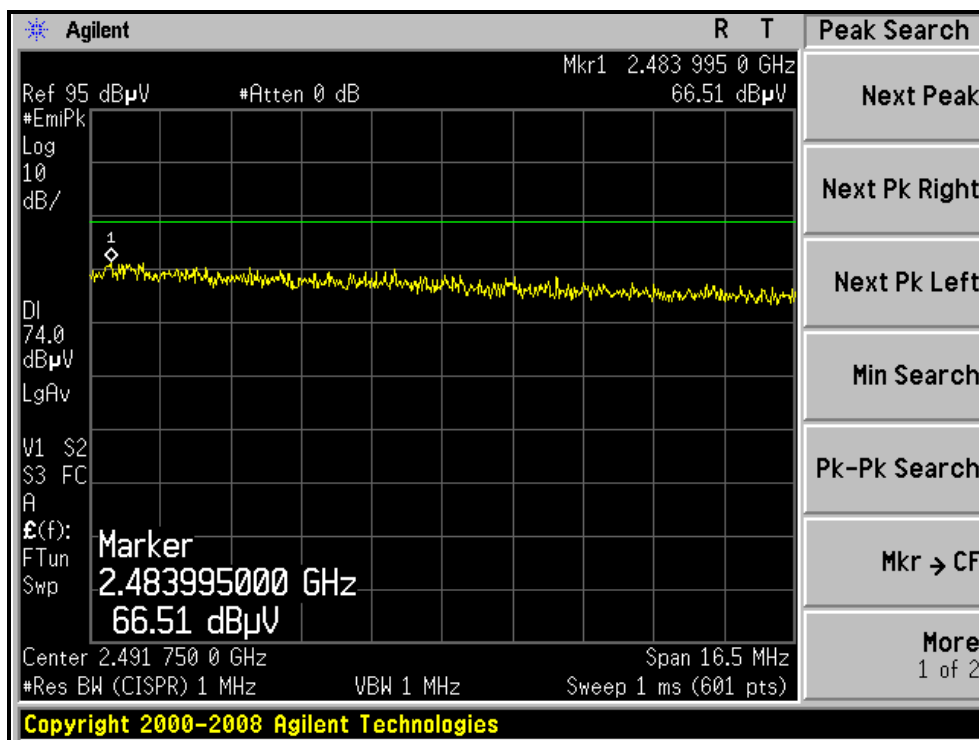

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Test date: June 22, 2011

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S Spectrum Analyzer      | FSP 40    | 100060     | May 11, 2011    | May 10, 2012     |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.7 TEST RESULTS

### 802.11b DSSS MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1       | 2412                    | 9.1                 | 0.5                 | PASS        |
| 6       | 2437                    | 9.13                | 0.5                 | PASS        |
| 11      | 2462                    | 9.13                | 0.5                 | PASS        |


### CH11

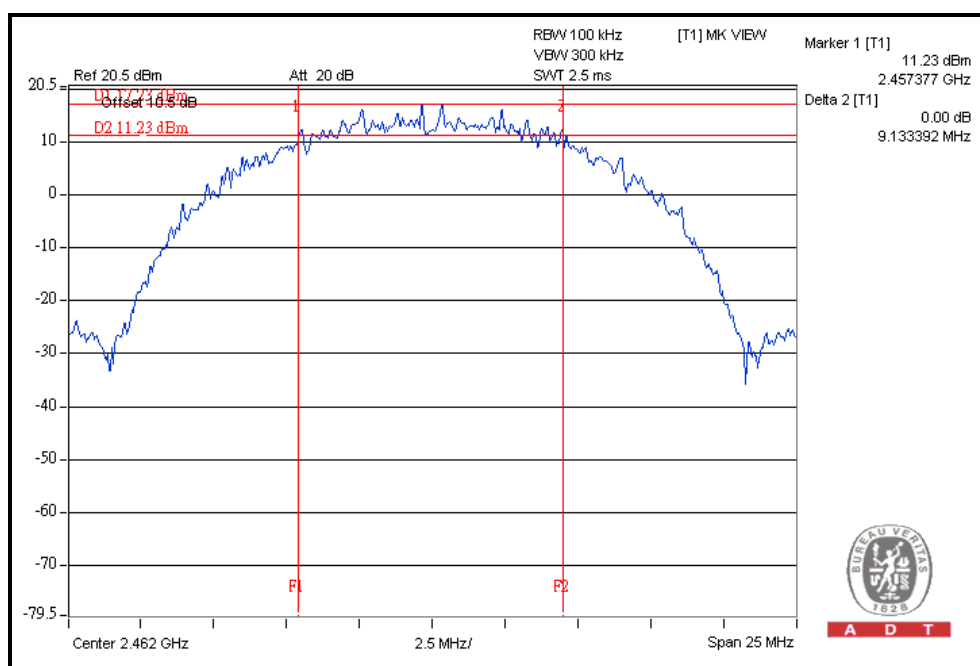

## 802.11g OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1       | 2412                    | 16.61               | 0.5                 | PASS        |
| 6       | 2437                    | 16.61               | 0.5                 | PASS        |
| 11      | 2462                    | 16.59               | 0.5                 | PASS        |


## CH6

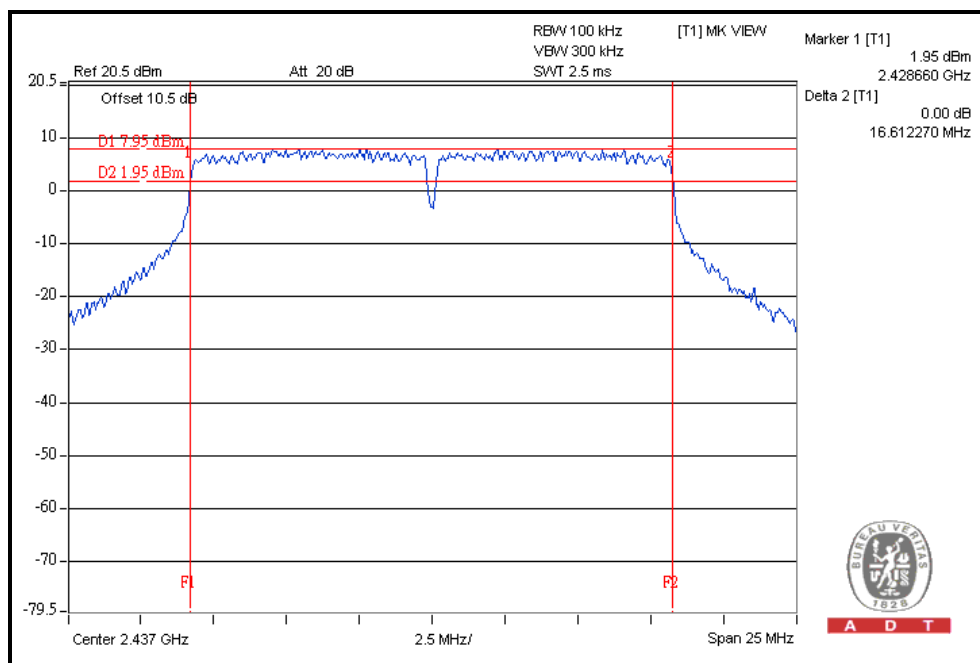

## 802.11n (20MHz) OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------------------|-------------|
| 1       | 2412                    | 17.84               | 0.5                 | PASS        |
| 6       | 2437                    | 17.85               | 0.5                 | PASS        |
| 11      | 2462                    | 17.80               | 0.5                 | PASS        |


CH6

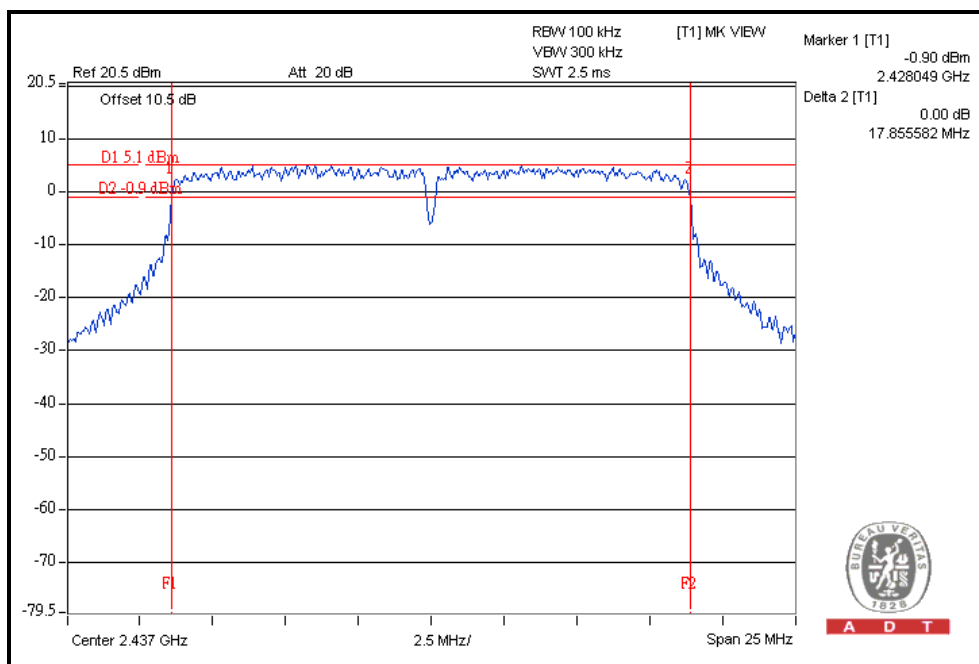

## 802.11n (40MHz) OFDM MODULATION:

| CHANNEL | CHANNEL<br>FREQUENCY<br>(MHz) | 6dB BANDWIDTH<br>(MHz) | MINIMUM LIMIT<br>(MHz) | PASS / FAIL |
|---------|-------------------------------|------------------------|------------------------|-------------|
| 3       | 2422                          | 36.52                  | 0.5                    | PASS        |
| 6       | 2437                          | 36.55                  | 0.5                    | PASS        |
| 9       | 2452                          | 36.54                  | 0.5                    | PASS        |

### CH6

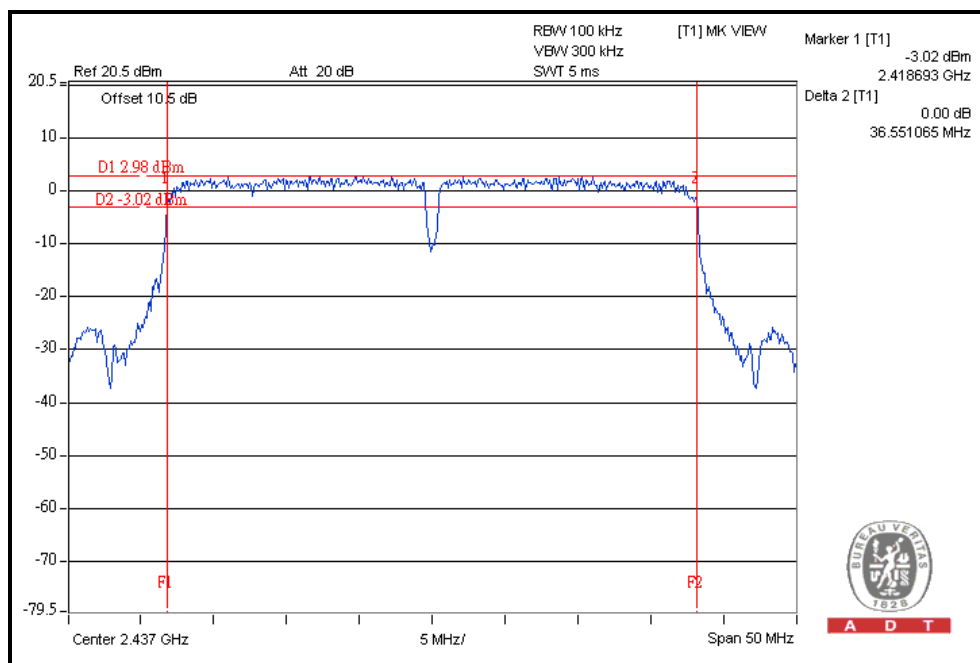

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

Test Date: June 22, 2011

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Anritsu Power Meter        | ML2495A   | 0824006    | May 04, 2011    | May 03, 2012     |
| Pulse Power Sensor         | MA2411B   | 0738172    | May 03, 2011    | May 02, 2012     |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


##### 4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

##### 4.4.5 TEST SETUP

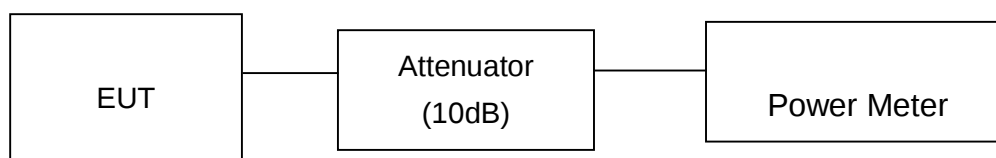

##### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1       | 2412                    | 323.6                  | 25.1                    | 30                     | PASS        |
| 6       | 2437                    | 371.5                  | 25.7                    | 30                     | PASS        |
| 11      | 2462                    | 407.4                  | 26.1                    | 30                     | PASS        |

##### 802.11g OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-------------|
| 1       | 2412                    | 691.8                  | 28.4                    | 30                     | PASS        |
| 6       | 2437                    | 691.8                  | 28.4                    | 30                     | PASS        |
| 11      | 2462                    | 616.6                  | 27.9                    | 30                     | PASS        |

##### 802.11n (20MHz) OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) |          | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|-------------------------|----------|-----------------------|------------------------|------------------------|-------------|
|         |                         | CHAIN(0)                | CHAIN(2) |                       |                        |                        |             |
| 1       | 2412                    | 24.9                    | 24.0     | 560.2                 | 27.5                   | 30                     | PASS        |
| 6       | 2437                    | 26.6                    | 26.5     | 903.8                 | 29.6                   | 30                     | PASS        |
| 11      | 2462                    | 25.7                    | 25.9     | 760.6                 | 28.8                   | 30                     | PASS        |

##### 802.11n (40MHz) OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (dBm) |          | TOTAL PEAK POWER (mW) | TOTAL PEAK POWER (dBm) | PEAK POWER LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|-------------------------|----------|-----------------------|------------------------|------------------------|-------------|
|         |                         | CHAIN(0)                | CHAIN(2) |                       |                        |                        |             |
| 3       | 2422                    | 23.4                    | 23.5     | 442.6                 | 26.5                   | 30                     | PASS        |
| 6       | 2437                    | 26.5                    | 26.8     | 925.3                 | 29.7                   | 30                     | PASS        |
| 9       | 2452                    | 25.0                    | 25.1     | 639.8                 | 28.1                   | 30                     | PASS        |

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Test date: June 22, 2011

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S Spectrum Analyzer      | FSP 40    | 100060     | May 11, 2011    | May 10, 2012     |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



### 4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

## 4.5.7 TEST RESULTS

### 802.11b DSSS MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 1       | 2412                     | 1.6                             | 8                   | PASS        |
| 6       | 2437                     | 1.6                             | 8                   | PASS        |
| 11      | 2462                     | 2.5                             | 8                   | PASS        |


### CH11

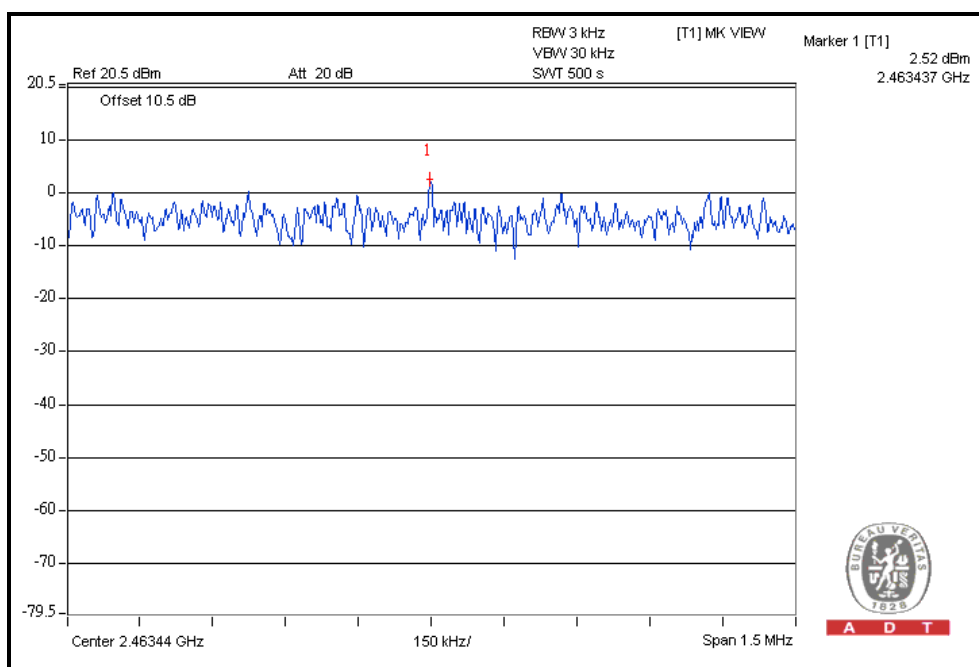

## 802.11g OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz ) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|--------------------------|---------------------------------|---------------------|-------------|
| 1       | 2412                     | -6.7                            | 8                   | PASS        |
| 6       | 2437                     | -6.3                            | 8                   | PASS        |
| 11      | 2462                     | -8.0                            | 8                   | PASS        |


CH6

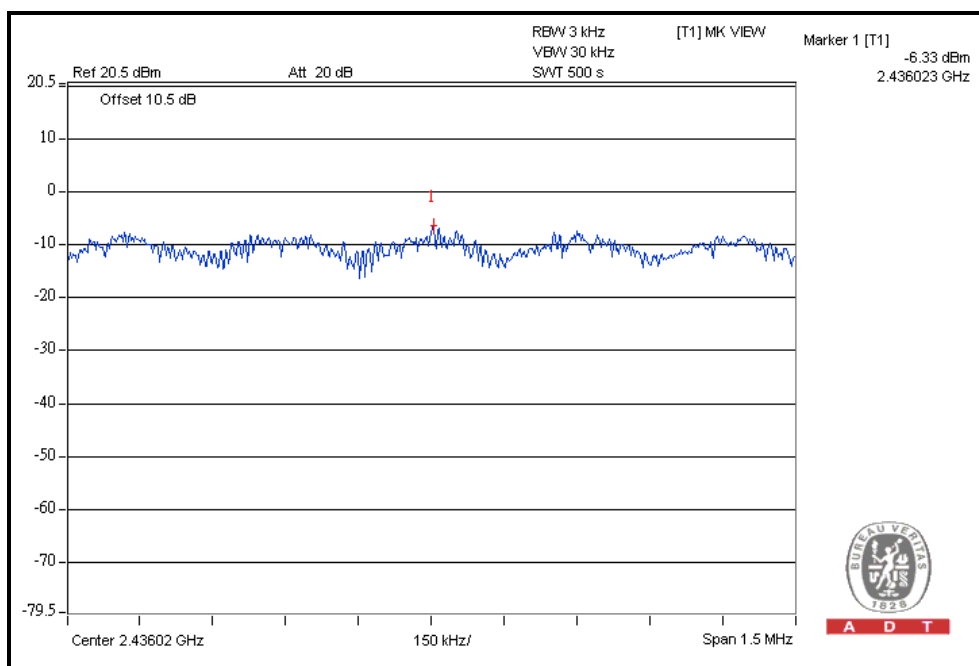

## 802.11n (20MHz) OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) |          | TOTAL POWER Density (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|---------------------------------|----------|---------------------------|---------------------|-------------|
|         |                         | Chain(0)                        | CHAIN(2) |                           |                     |             |
| 1       | 2412                    | -9.2                            | -9.9     | -6.5                      | 8                   | PASS        |
| 6       | 2437                    | -7.8                            | -8.6     | -5.2                      | 8                   | PASS        |
| 11      | 2462                    | -9.2                            | -9.8     | -6.5                      | 8                   | PASS        |


For Chain(0): CH6

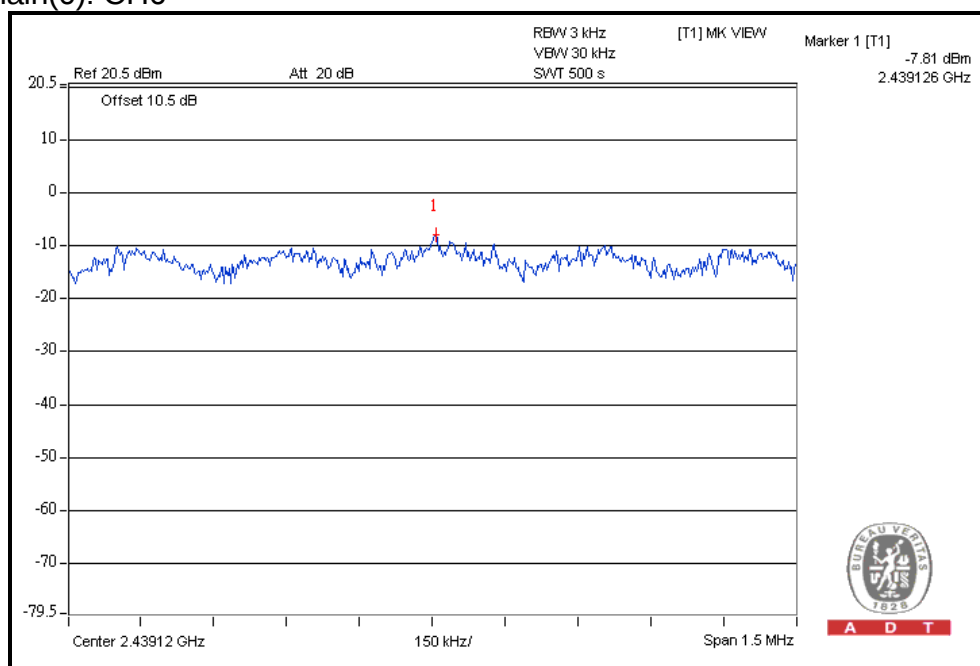

## 802.11n (40MHz) OFDM MODULATION:

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) |          | TOTAL POWER DENSITY (dBm) | MAXIMUM LIMIT (dBm) | PASS / FAIL |
|---------|-------------------------|---------------------------------|----------|---------------------------|---------------------|-------------|
|         |                         | CHAIN(0)                        | CHAIN(2) |                           |                     |             |
| 3       | 2422                    | -14.9                           | -15.4    | -12.1                     | 8                   | PASS        |
| 6       | 2437                    | -11.1                           | -11.4    | -8.2                      | 8                   | PASS        |
| 9       | 2452                    | -13.3                           | -14.5    | -10.8                     | 8                   | PASS        |

For Chain(0): CH6

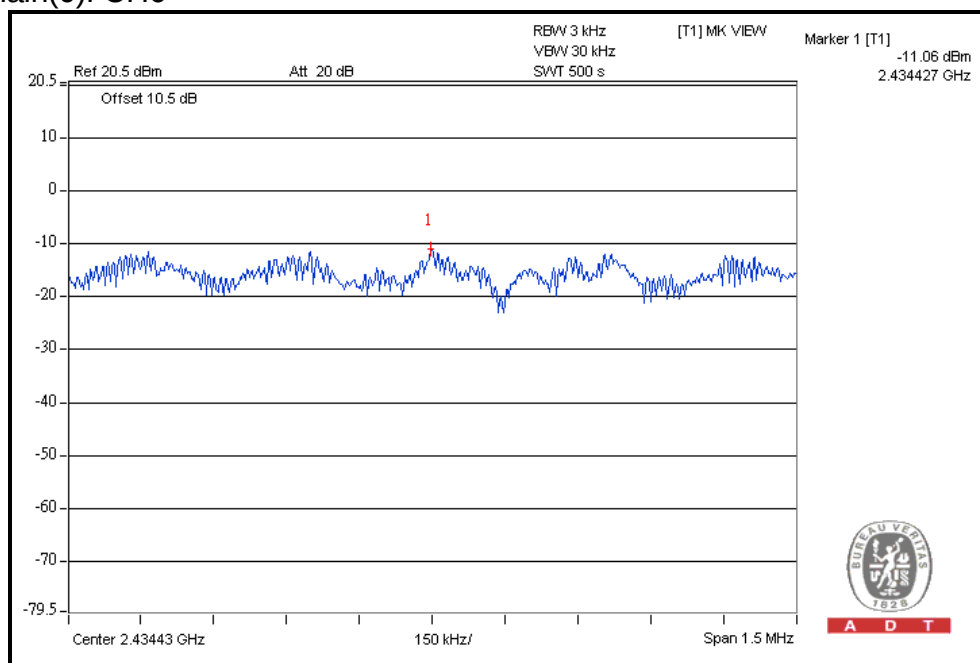



A D T

## 4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Test Date: June 22, 2011

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S Spectrum Analyzer      | FSP 40    | 100060     | May 11, 2011    | May 10, 2012     |

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz or 200 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION



Same as Item 4.3.6

### 4.6.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

## 802.11b DSSS MODULATION:


CH1

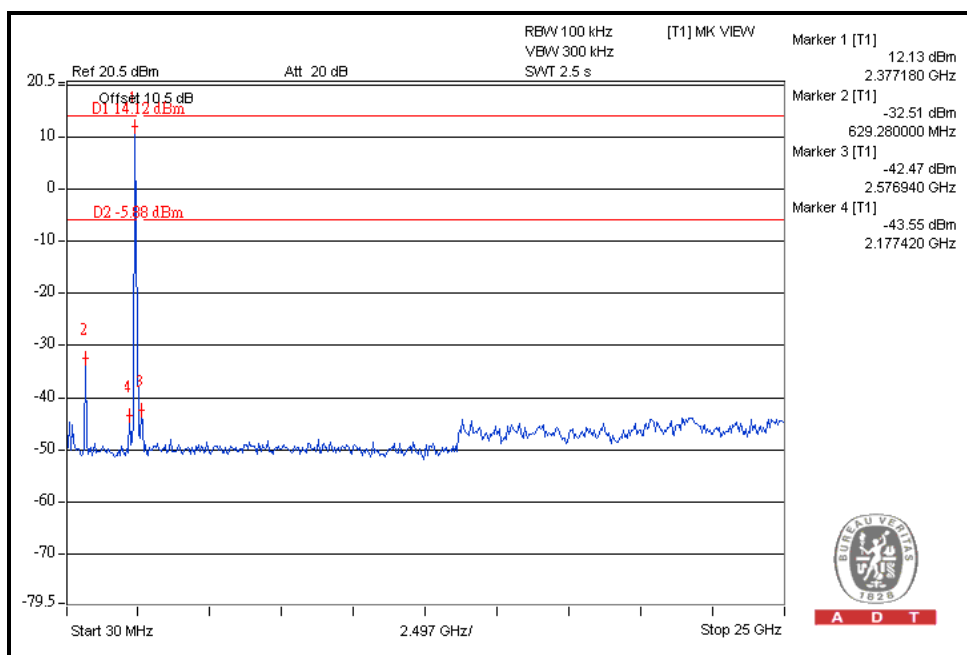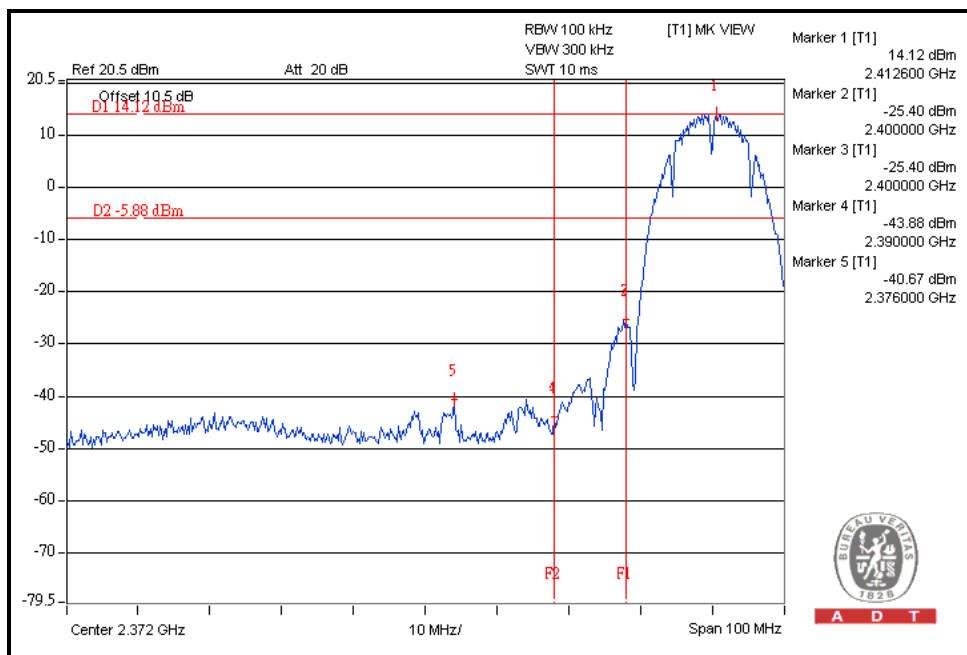

# CH11

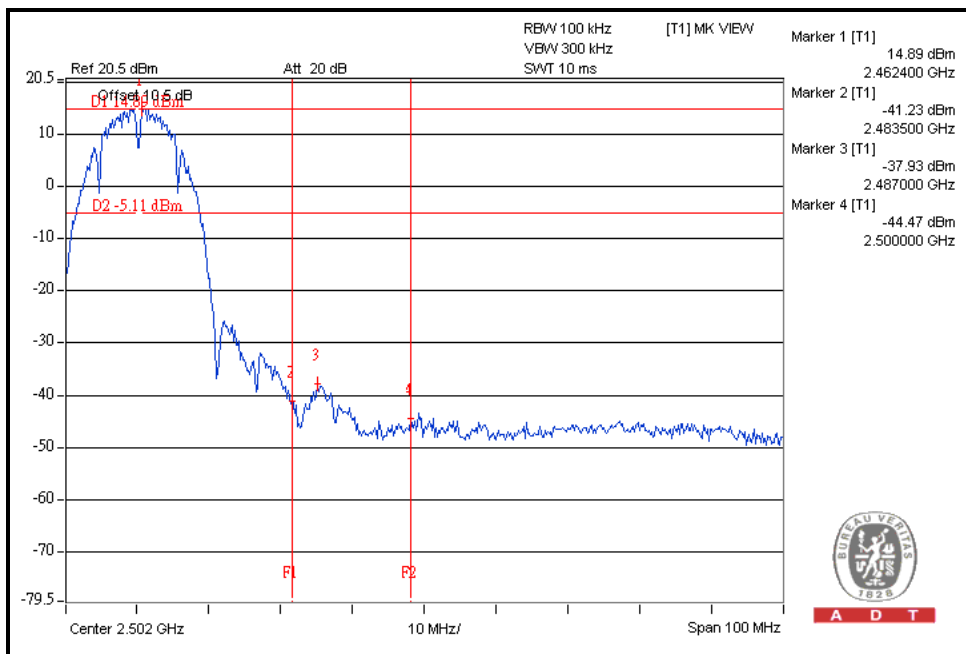



A D T

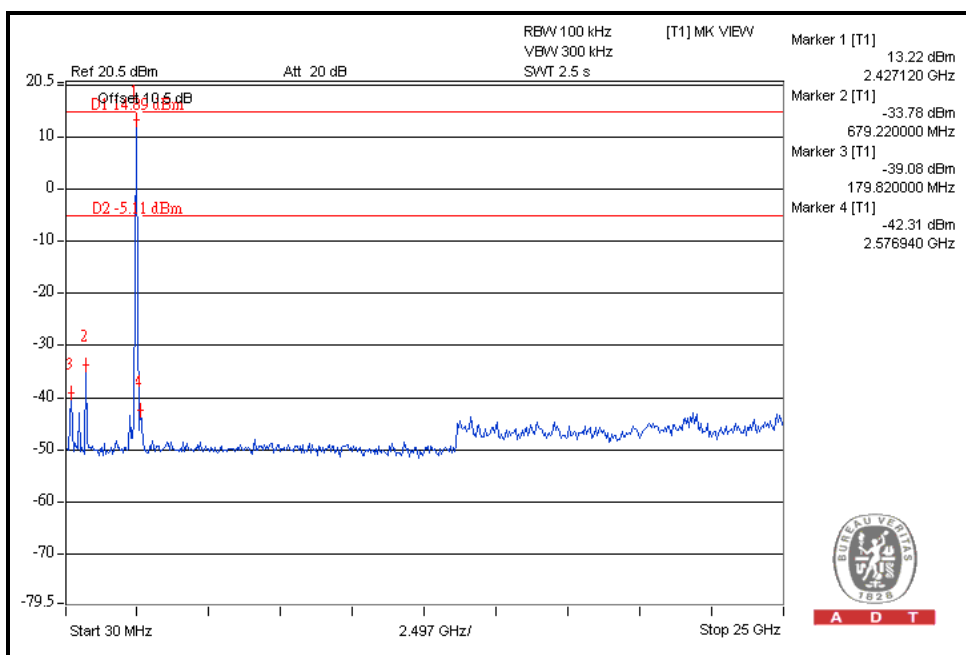


A D T

## 802.11g OFDM MODULATION:


CH1

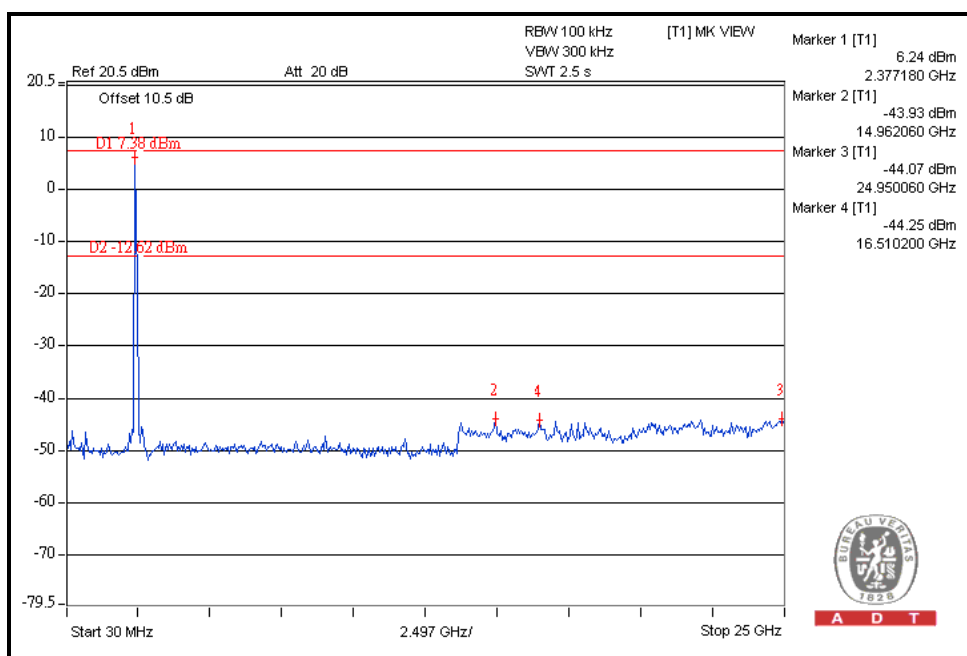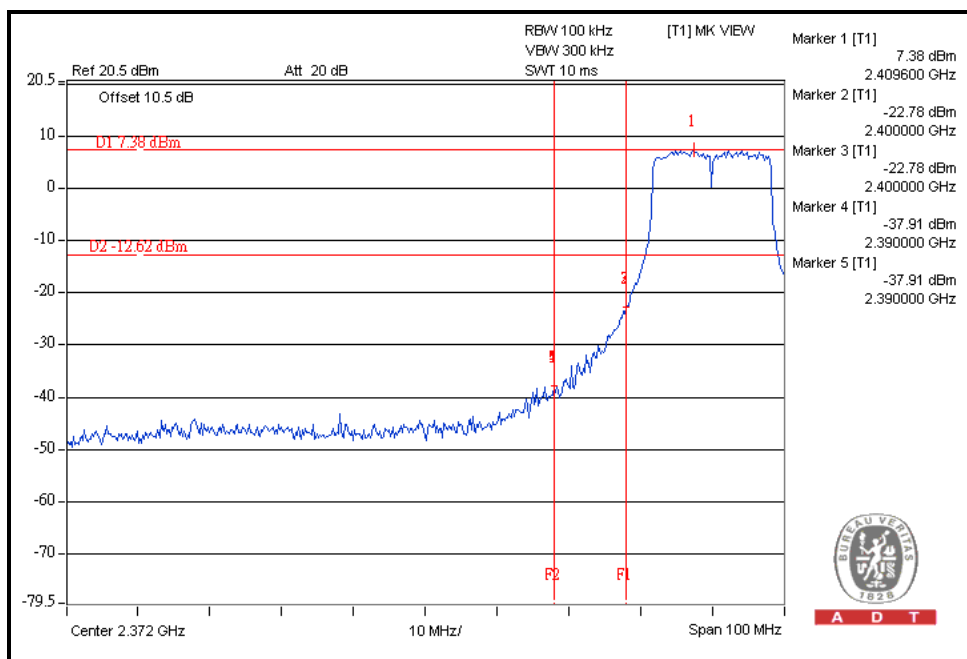

# CH11

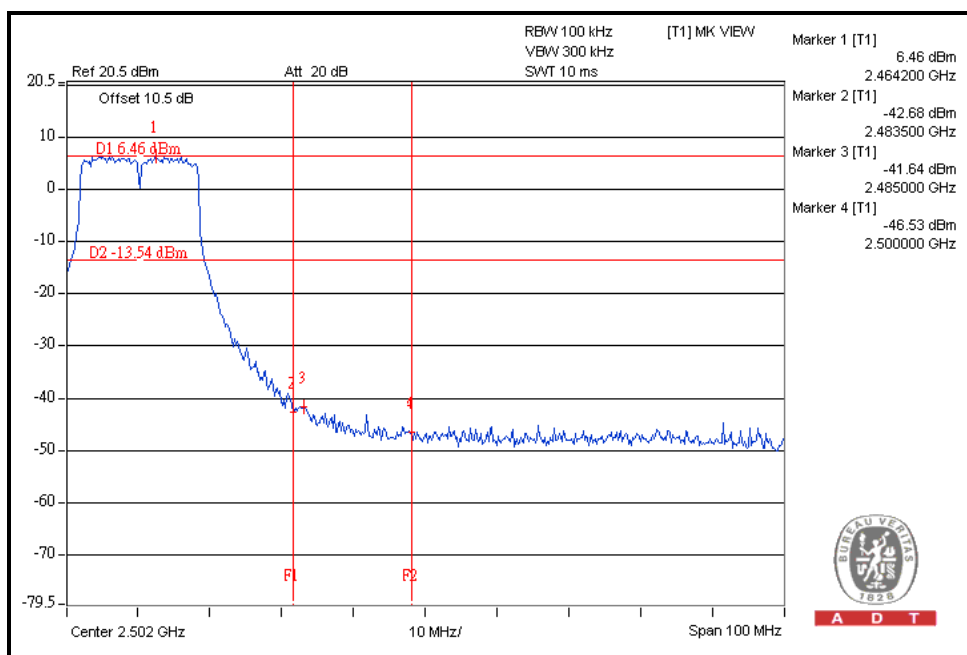



A D T

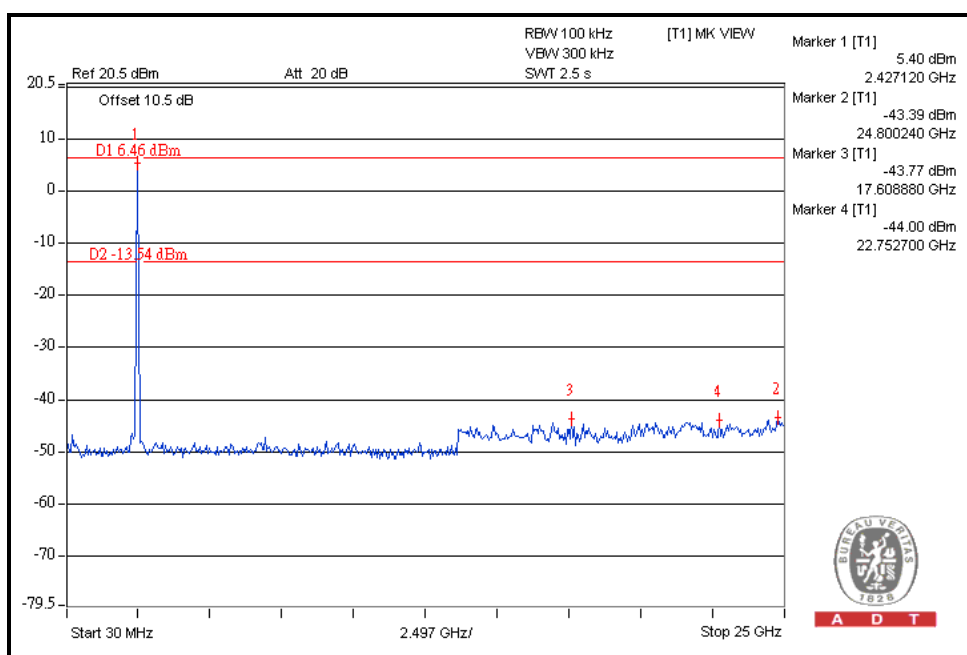



A D T

## 802.11n (20MHz) OFDM MODULATION:



For Chain(0) : CH1

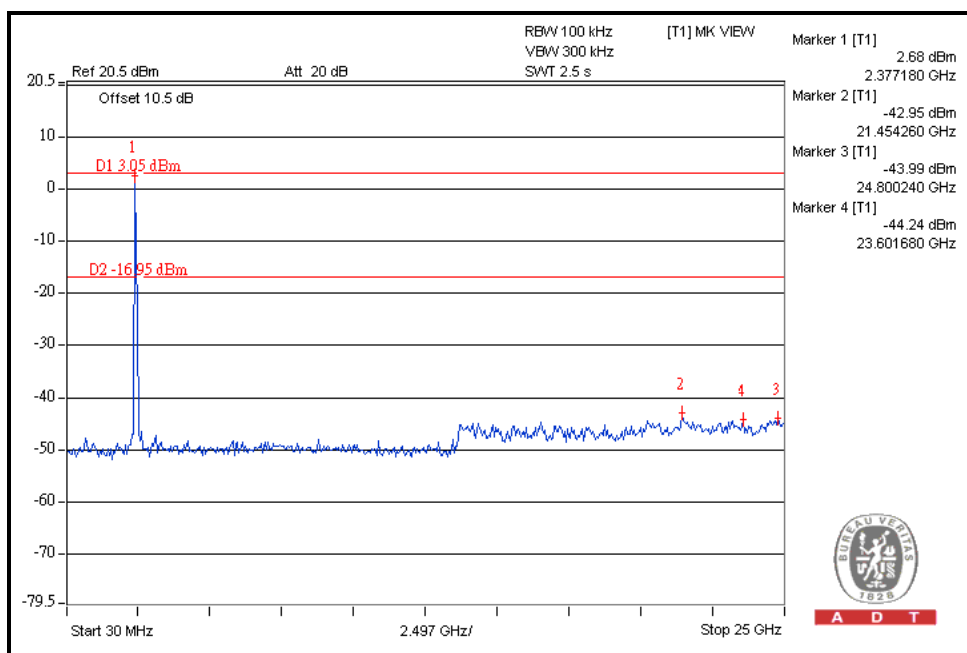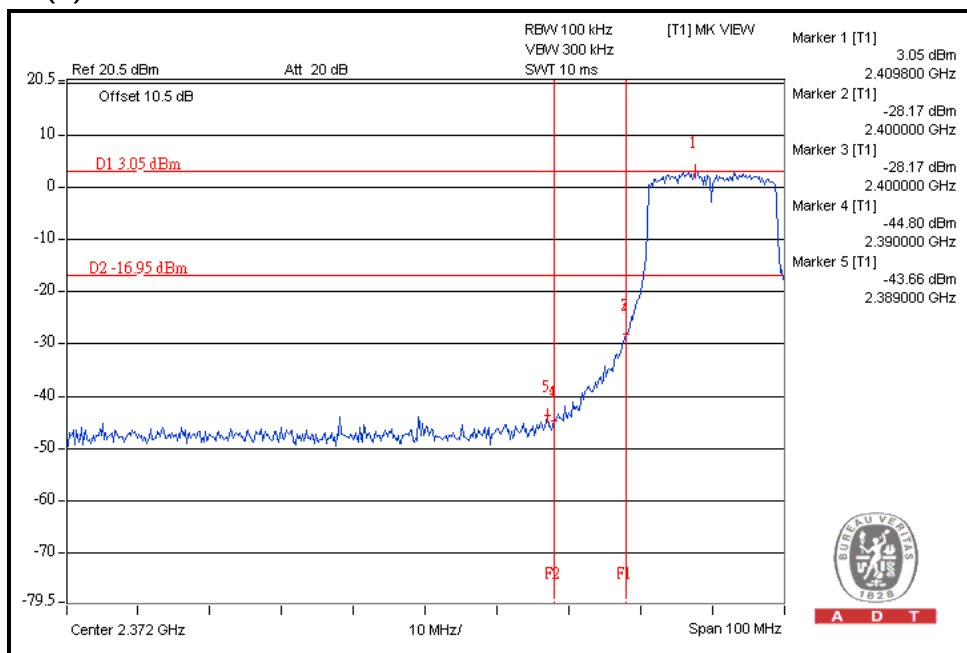



For Chain(0) : CH11

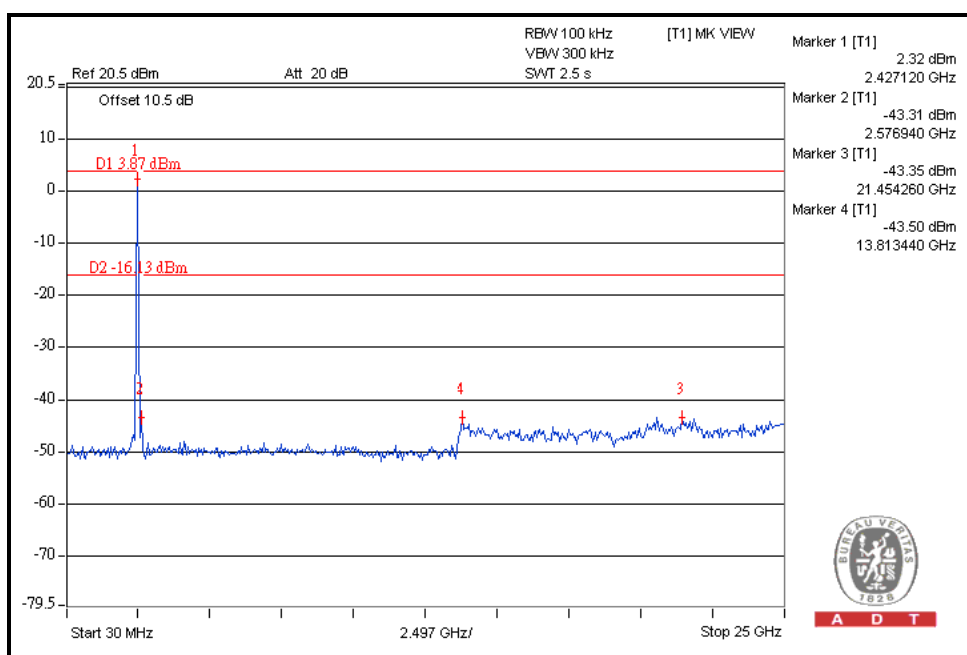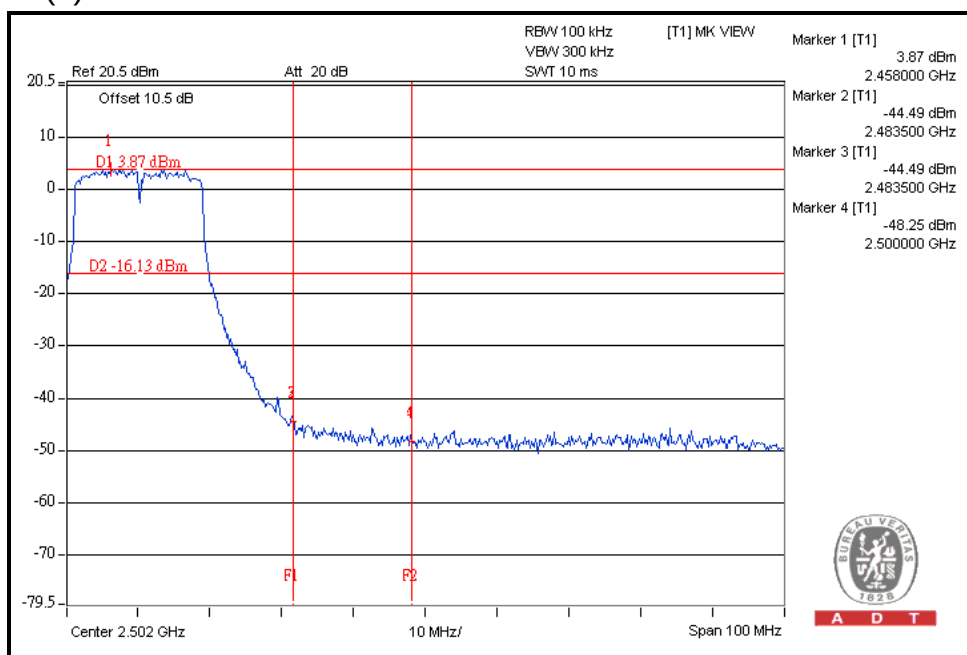

For Chain(2) : CH1

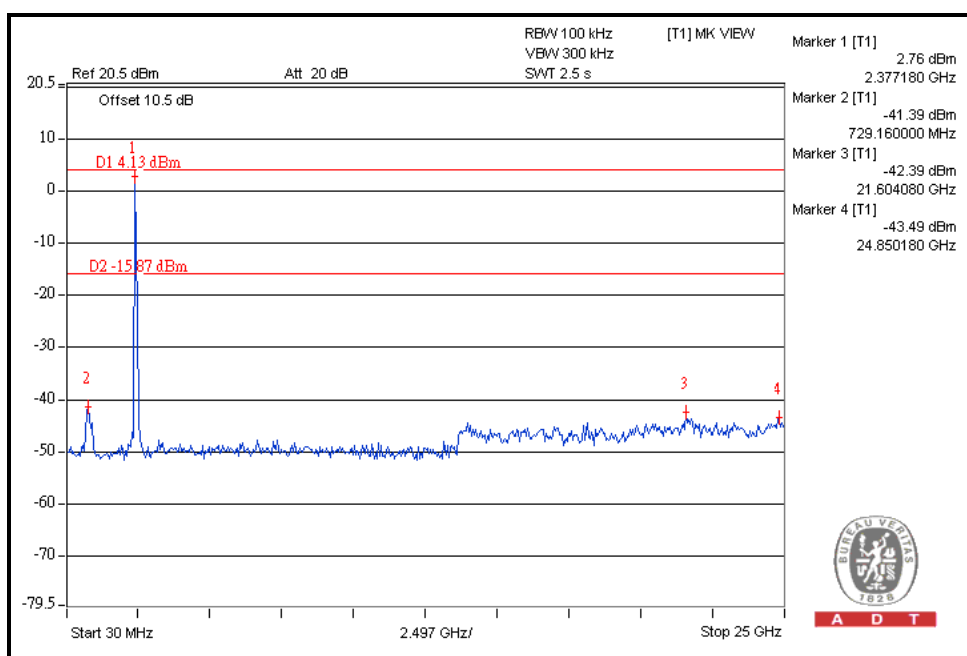
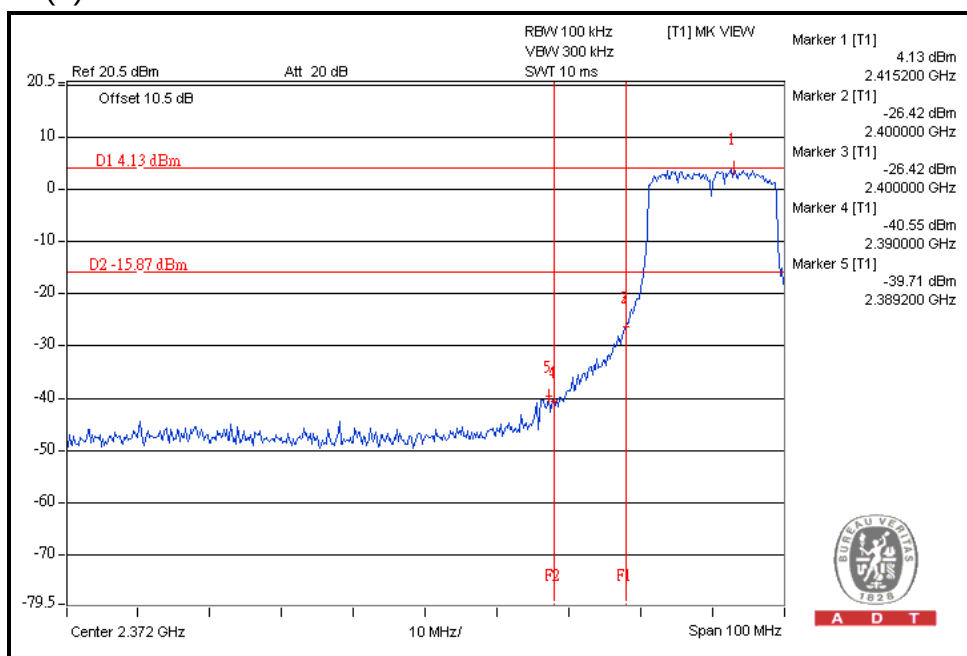


For Chain(2) : CH11

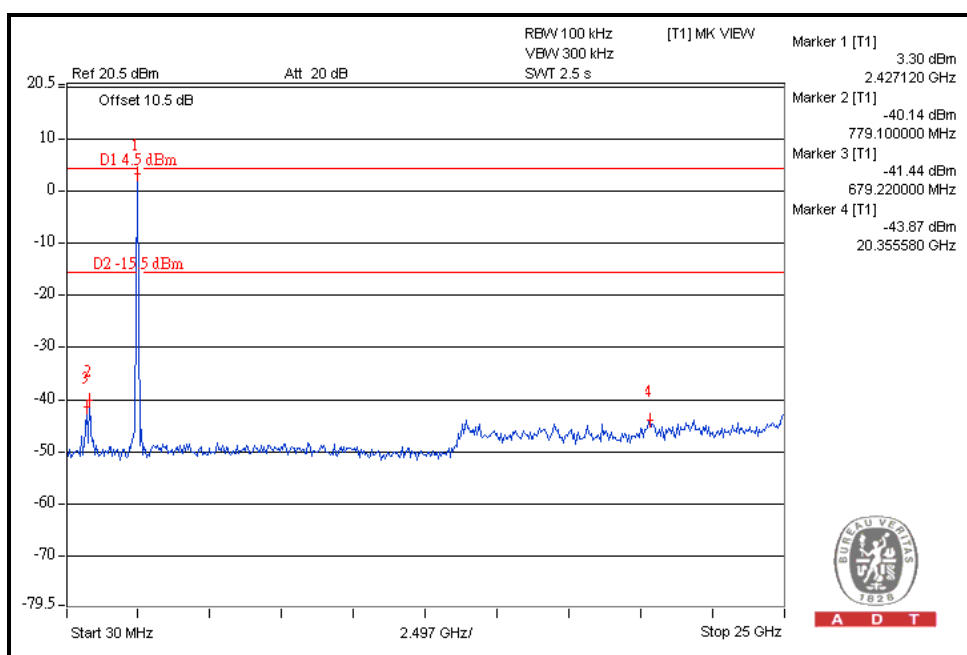
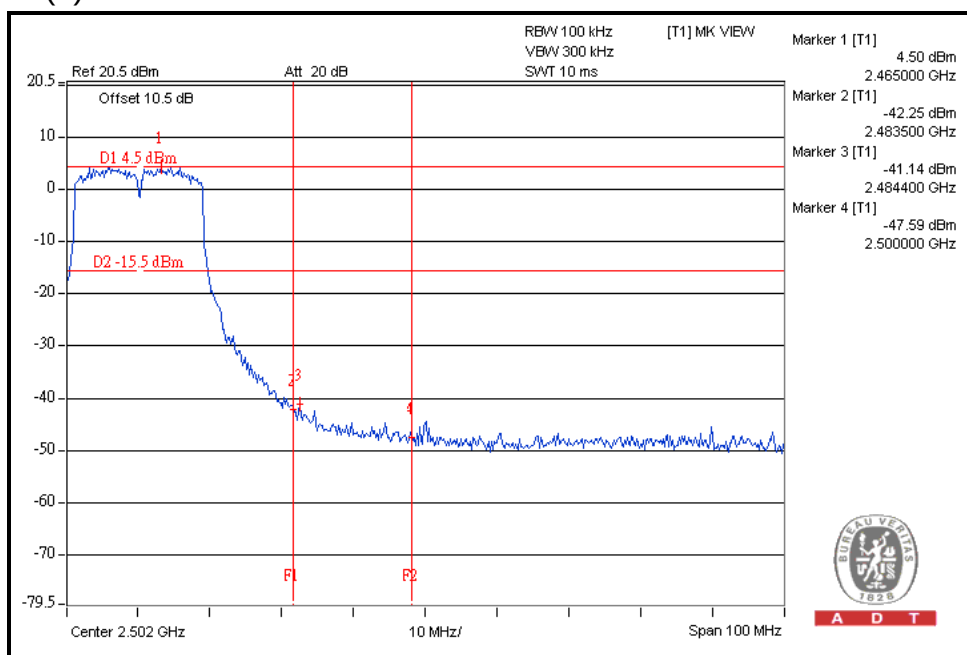


## 802.11n (40MHz) OFDM MODULATION:



For Chain(0) : CH3

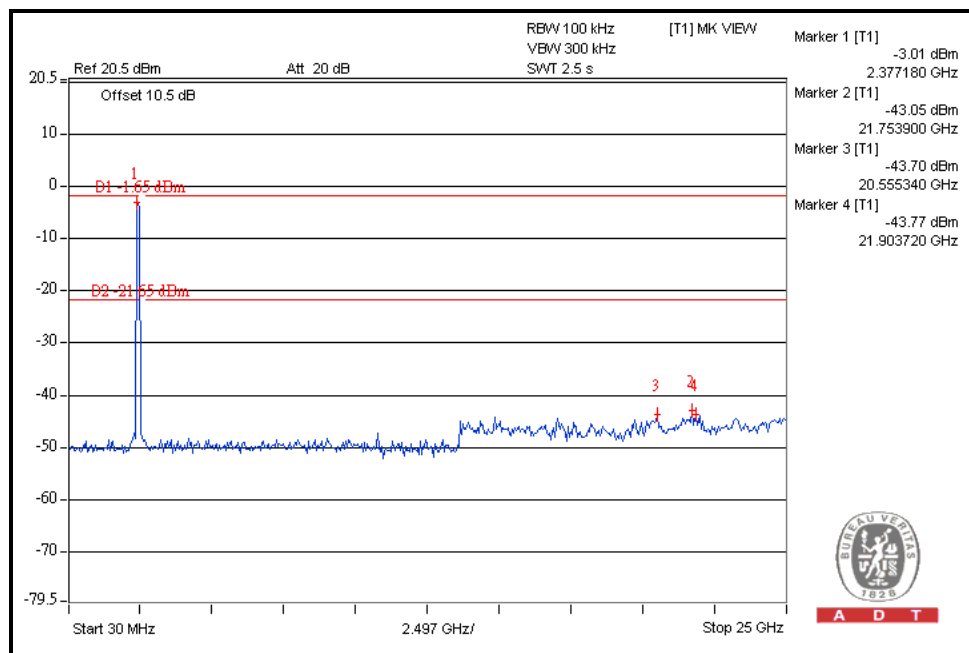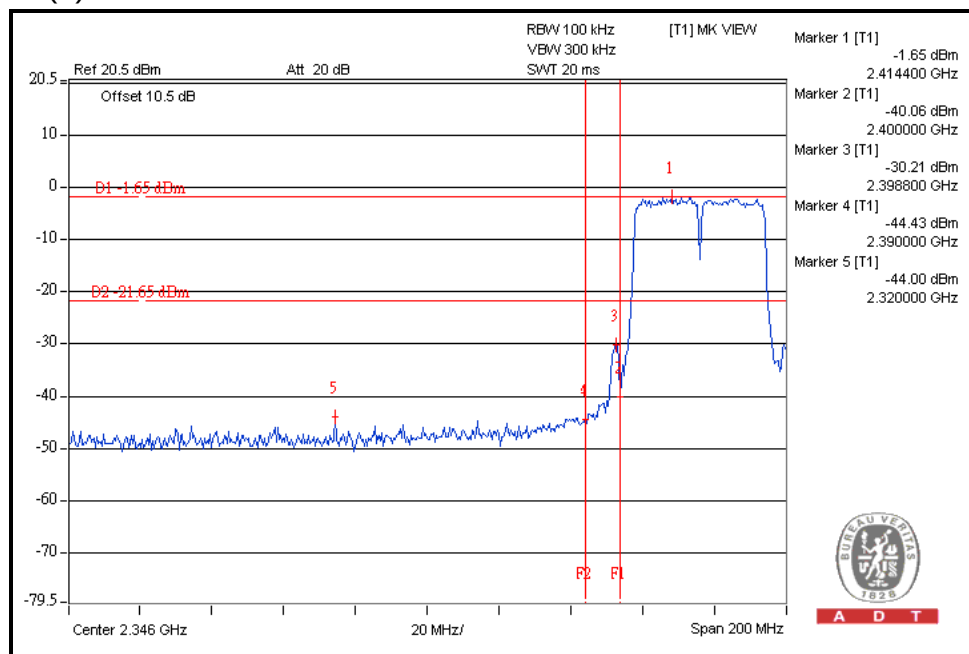



For Chain(0) : CH9

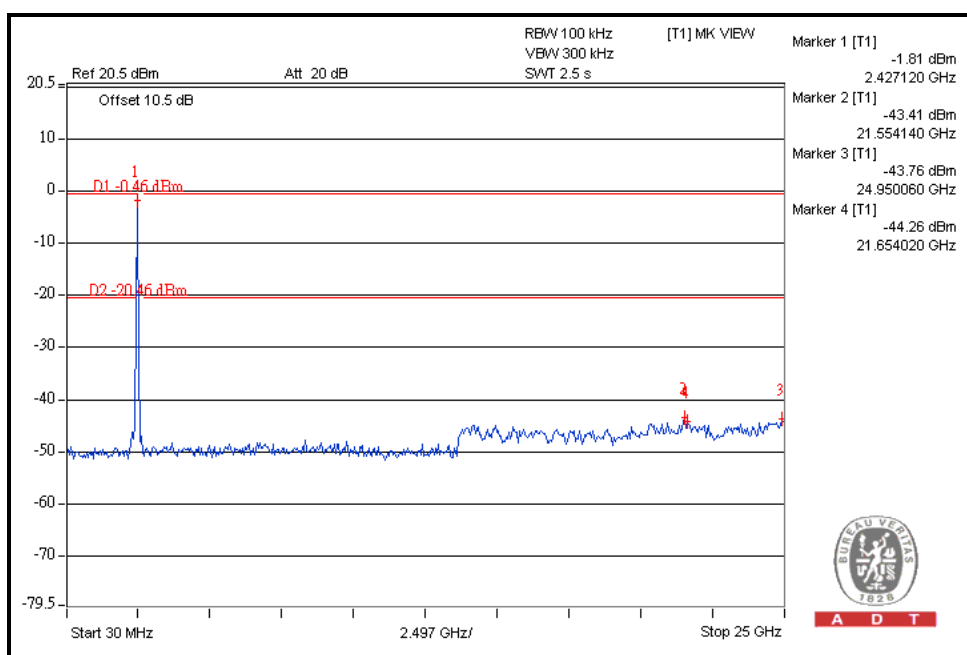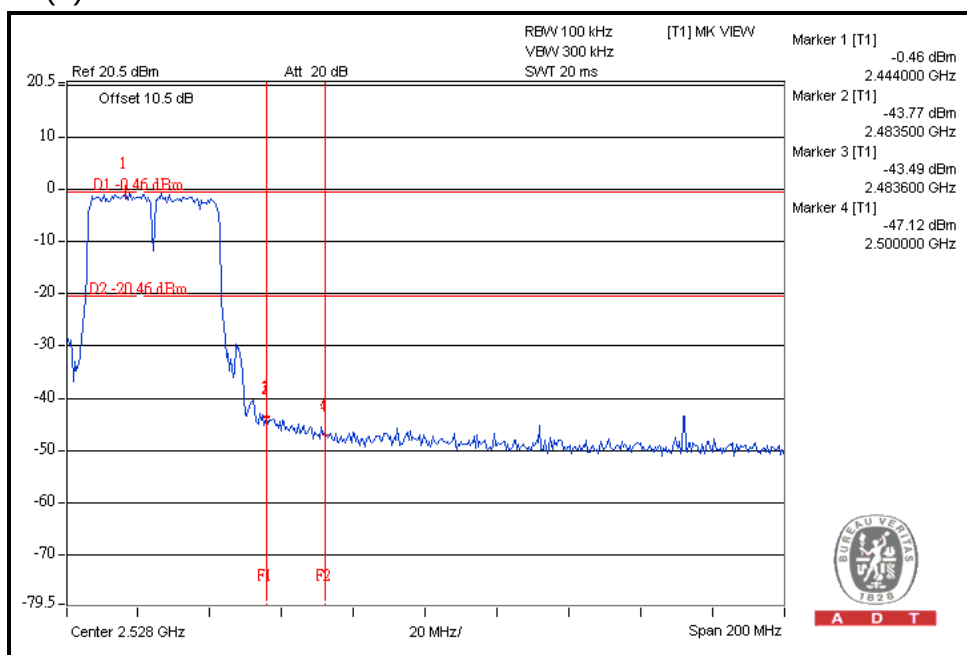

For Chain(2) : CH3

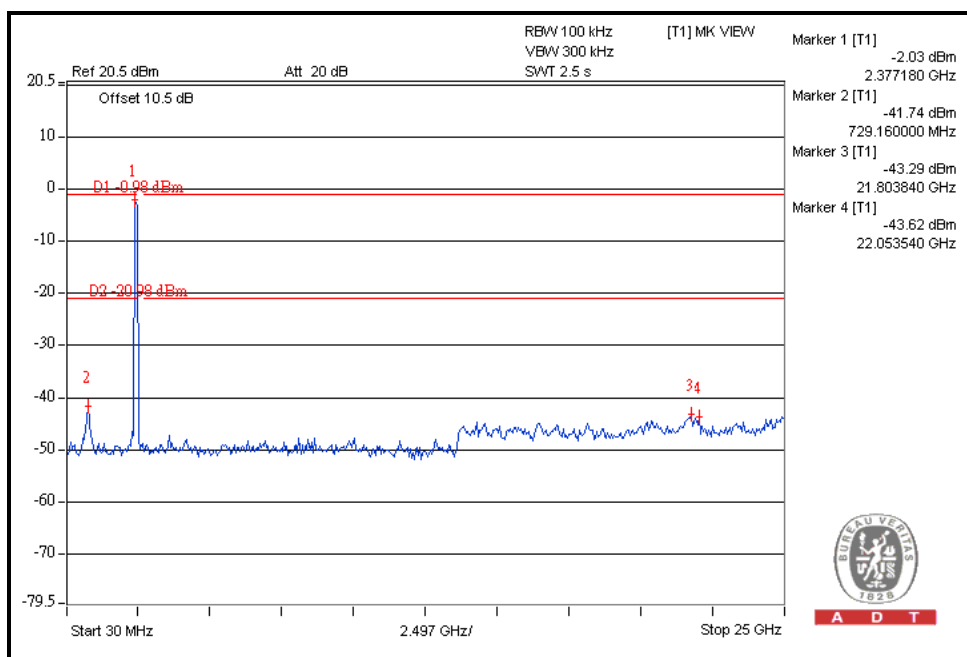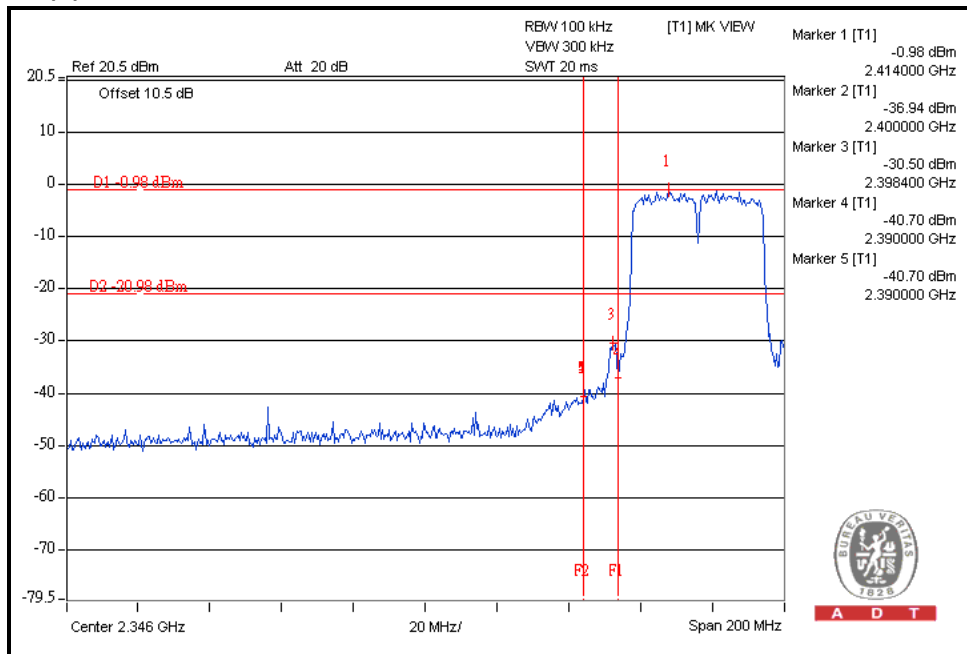

For Chain(2) : CH9

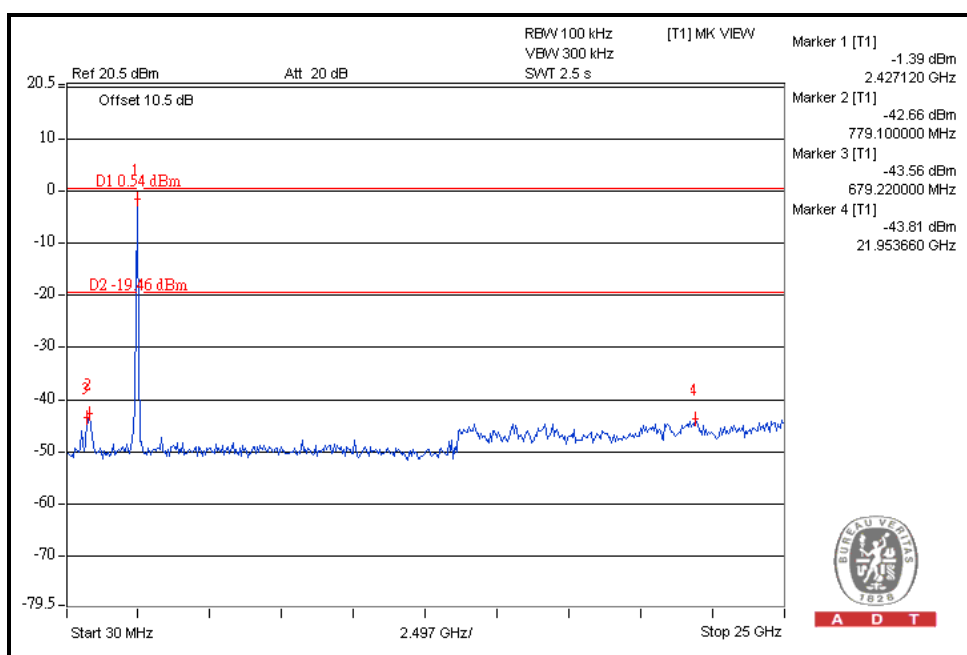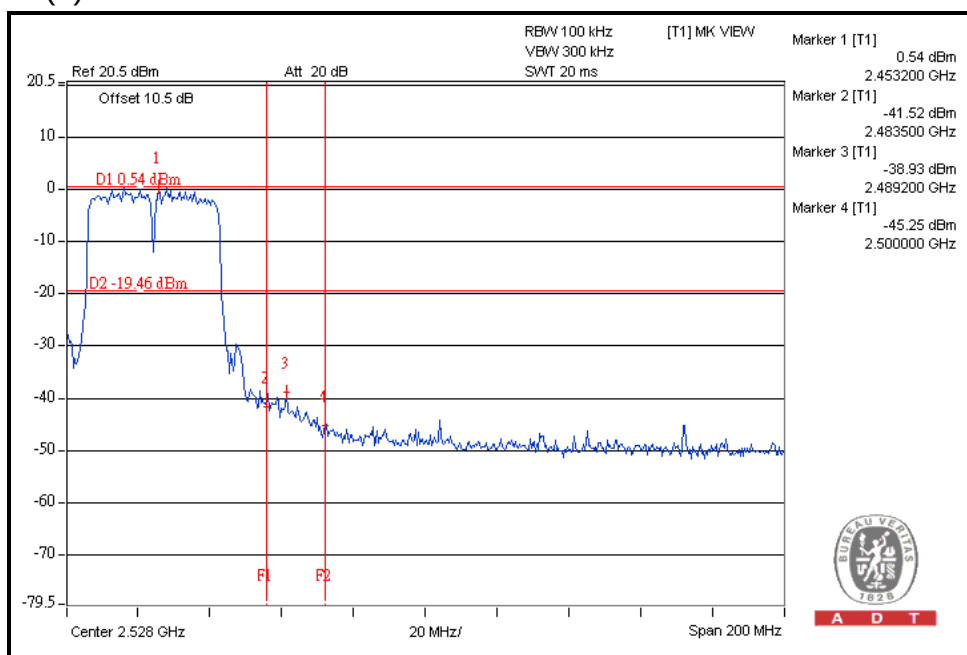

## 5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

--- END ---