



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR869A1

Product Name	AC1750 Wi-Fi Router
Brand Name	D-Link
Model No.	DIR-869
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Dec. 17, 2015
Final Test Date	Jan. 08, 2016
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	10
3.11. Test Configurations	11
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	18
4.3. 6dB Spectrum Bandwidth Measurement	29
4.4. Maximum Conducted Output Power Measurement.....	34
4.5. Power Spectral Density Measurement	37
4.6. Radiated Emissions Measurement	46
4.7. Band Edge Emissions Measurement	71
4.8. Frequency Stability Measurement	80
4.9. Antenna Requirements	87
5. LIST OF MEASURING EQUIPMENTS	88
6. MEASUREMENT UNCERTAINTY	90
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT	B1 ~ B3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1603AB	Rev. 01	Initial issue of report	Jan. 28, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : AC1750 Wi-Fi Router
Brand Name : D-Link
Model No. : DIR-869
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 17, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	8.46 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	0.31 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.81 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.27 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.06 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3X)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 16.85 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.41 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.47 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.83 MHz Band 4: IEEE 802.11a: 17.02 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.41 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.48 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 72.94 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 27.87 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 27.75 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 27.84 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 20.14 dBm Band 4: IEEE 802.11a: 29.69 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 29.64 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 27.18 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 19.43 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

Antenna and Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	LEI	MU18A2120150-A1	Input:100-240V~50/60Hz, 0.5A Output:12V, 1.5A
Adapter 2	CWT	2ABB018F US	Input:100-240V~50/60Hz, 0.6A Output:12.0V, 1.5A

3.3. Table for Filed Antenna

Set	Ant.	Brand	P/N	Antenna Type	Connector		Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz
1	1	Nienyi	5330818141DLG	Dipole Antenna	N/A	-	2.5	-
	2	Nienyi	5331818138DLG	Dipole Antenna	-	I-PEX	-	3
	3	Nienyi	5332818110DLG	Dipole Antenna	N/A	I-PEX	3	3
	4	Nienyi	5332818129DLG	Dipole Antenna	N/A	I-PEX	3	3

Set	Ant.	Brand	P/N	Antenna Type	Connector		Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz
2	1	WHA YU	C037-511415-A	Dipole Antenna	N/A	-	2.47	-
	2	WHA YU	C037-511416-A	Dipole Antenna	-	I-PEX	-	2.85
	3	WHA YU	C037-511417-A	Dipole Antenna	N/A	I-PEX	2.35	2.83
	4	WHA YU	C037-511418-A	Dipole Antenna	N/A	I-PEX	2.47	2.72

Note: The EUT has two sets of antenna and each set has four antennas. There's only set 1 selected and recorded in the report.

For 2.4GHz function:

For IEEE 802.11b/g/n mode (3TX/3RX):

Ant. 1, Ant. 3 and Ant. 4 can be used as transmitting antennas and can transmit simultaneously.


Ant. 1, Ant. 3 and Ant. 4 can be used as receiving antennas and can receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting antennas and can transmit simultaneously.

Ant. 2, Ant. 3 and Ant. 4 can be used as receiving antennas and can receive simultaneously.

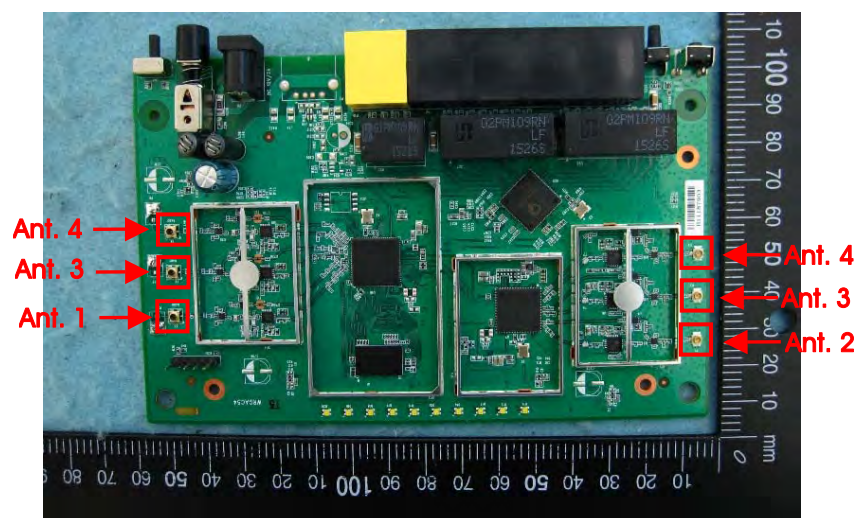

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	2+3+4
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	2+3+4
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	2+3+4
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	2+3+4
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	2+3+4
	11ac VHT40	Band 4	MCS0/Nss1	151/159	2+3+4
	11ac VHT80	Band 4	MCS0/Nss1	155	2+3+4
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	2+3+4

Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3+4
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	2+3+4
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	2+3+4
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	2+3+4
Frequency Stability	20 MHz	Band 1&4	-	40/157	4
	40 MHz	Band 1&4	-	38/151	4
	80 MHz	Band 1&4	-	42/155	4

Note 1: All the specification of test configurations and test modes were based on customer's request.

Note 2: The EUT can only be used in Z-axis position.

Note 3: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link + Adapter 1

Mode 2. Normal Link + Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test<Below 1GHz>:

Mode 1. Normal Link + Place EUT in Z axis + Adapter 1

Mode 2. Normal Link + Place EUT in Z axis + Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test<Above 1GHz>:

Mode 1. CTX + Place EUT in Z axis

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA5D1603) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC

For Test Site No: 03CH01-CB<Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E4300	DoC
NB	Apple	Mac Book	DoC

For Test Site No: 03CH01-CB<Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Cart.bat					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	20	22	22	21	24.5	21.5
802.11ac MCS0/Nss1 VHT20	19.5	22	22	21	24.5	21.5
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz		5755 MHz	
	19		23		20	
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	15.5			15		

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.019	2.171	93.00%	0.32	0.50
802.11ac MCS0/Nss1 VHT20	1.875	2.011	93.24%	0.30	0.53
802.11ac MCS0/Nss1 VHT40	0.942	1.010	93.27%	0.30	1.06
802.11ac MCS0/Nss1 VHT80	0.458	0.524	87.40%	0.58	2.18

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

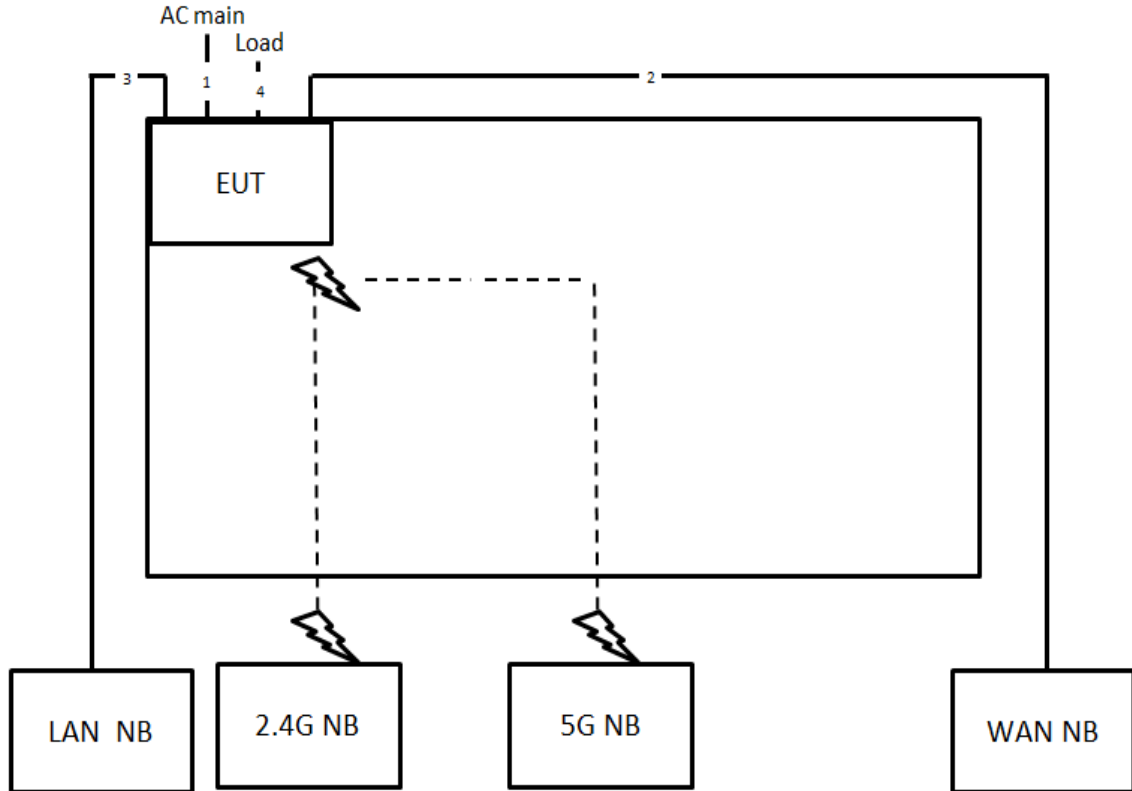

Item	Connection	Shield	Length
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

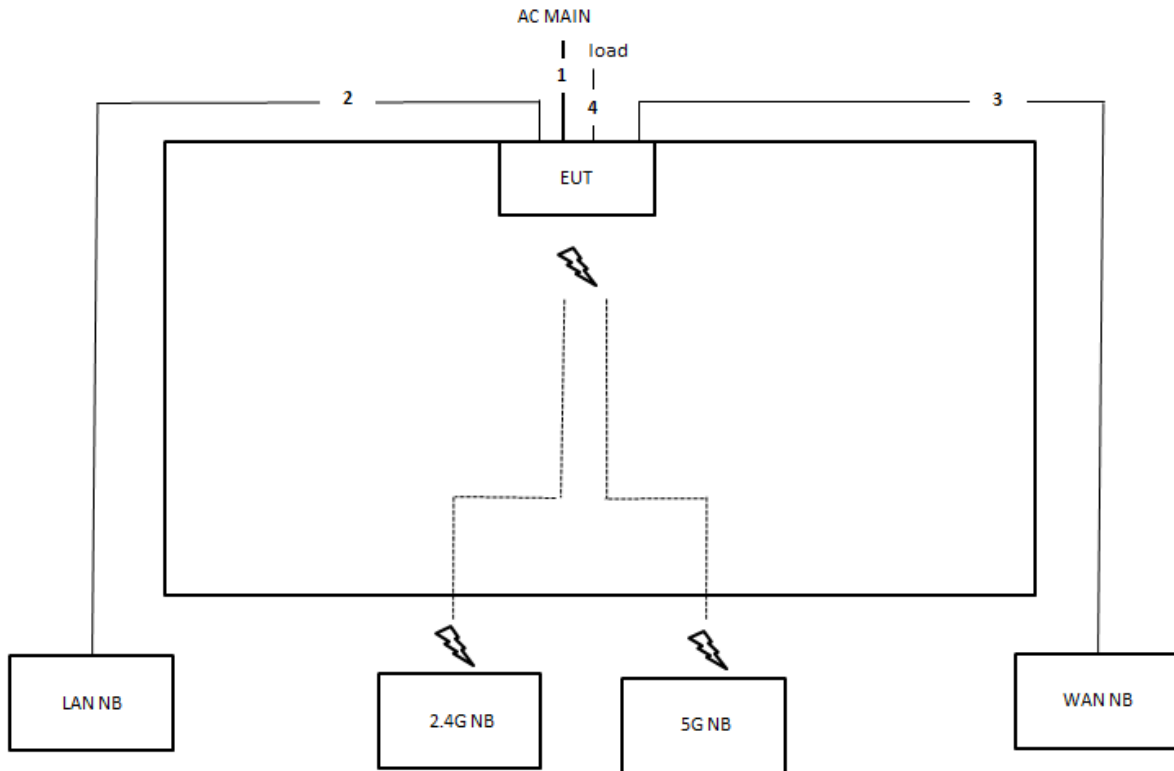

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m

Test Configuration: above 1GHz

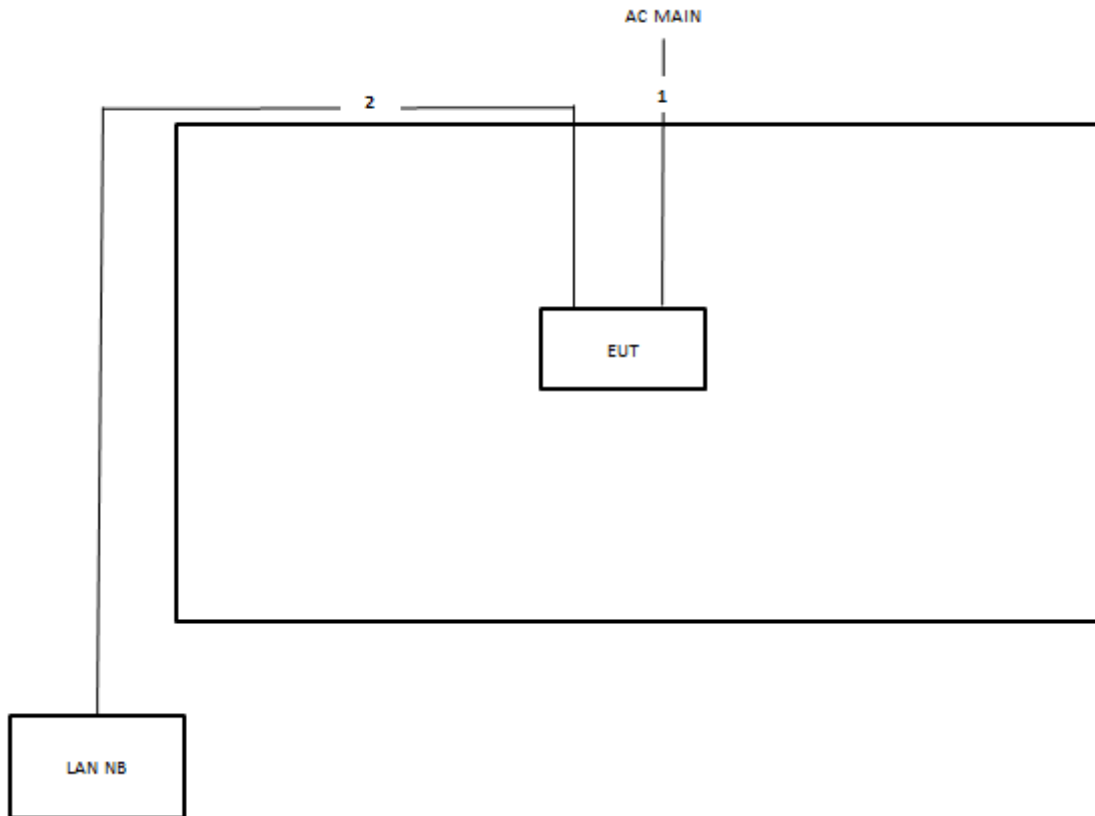

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

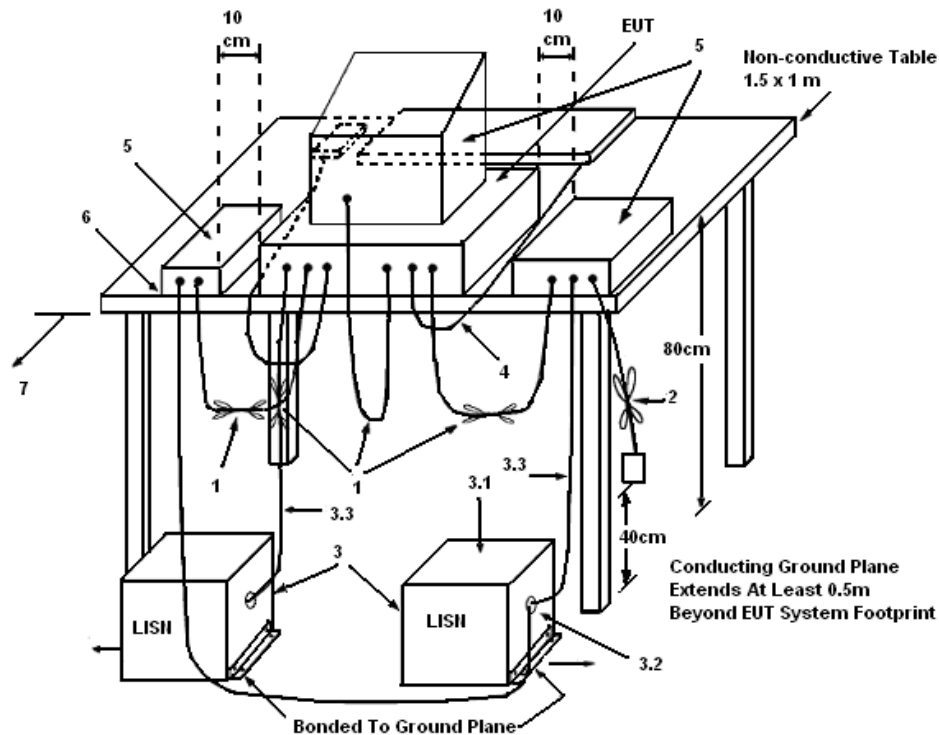

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	52%
Test Engineer	Sollo Lo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

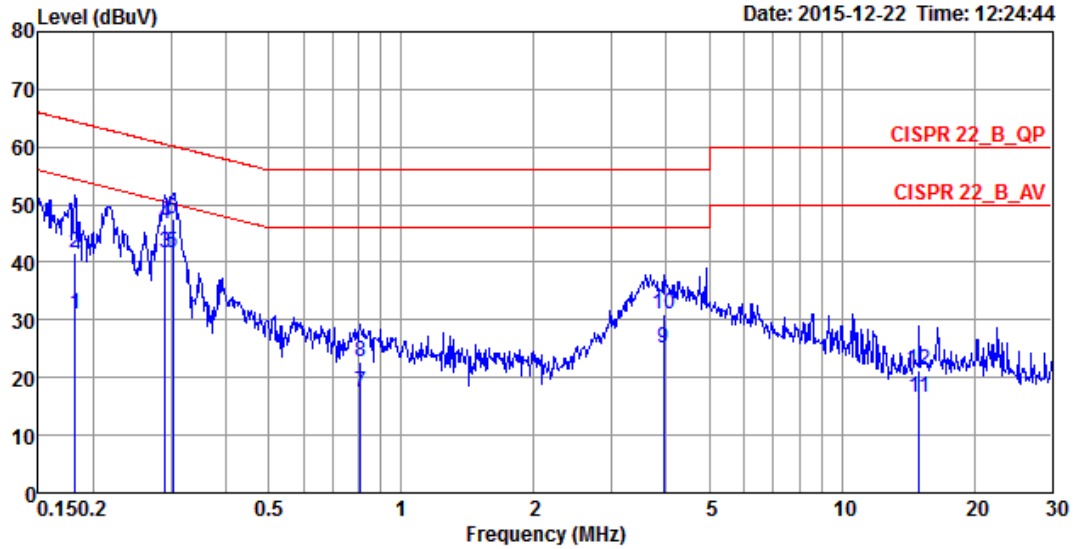

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1815	30.91	-23.51	54.42	20.96	9.93	0.02	LINE	Average
2	0.1815	41.61	-22.81	64.42	31.66	9.93	0.02	LINE	QP
3	0.2909	41.52	-8.98	50.50	31.55	9.93	0.04	LINE	Average
4	0.2909	46.74	-13.76	60.50	36.77	9.93	0.04	LINE	QP
5	0.3035	41.69	-8.46	50.15	31.72	9.93	0.04	LINE	Average
6	0.3035	47.52	-12.63	60.15	37.55	9.93	0.04	LINE	QP
7	0.8088	17.49	-28.51	46.00	7.51	9.95	0.03	LINE	Average
8	0.8088	22.72	-33.28	56.00	12.74	9.95	0.03	LINE	QP
9	3.9430	25.02	-20.98	46.00	14.93	10.02	0.07	LINE	Average
10	3.9430	30.95	-25.05	56.00	20.86	10.02	0.07	LINE	QP
11	14.9860	16.66	-33.34	50.00	6.07	10.33	0.26	LINE	Average
12	14.9860	21.13	-38.87	60.00	10.54	10.33	0.26	LINE	QP

Temperature	25°C	Humidity	52%
Test Engineer	Sollo Lo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

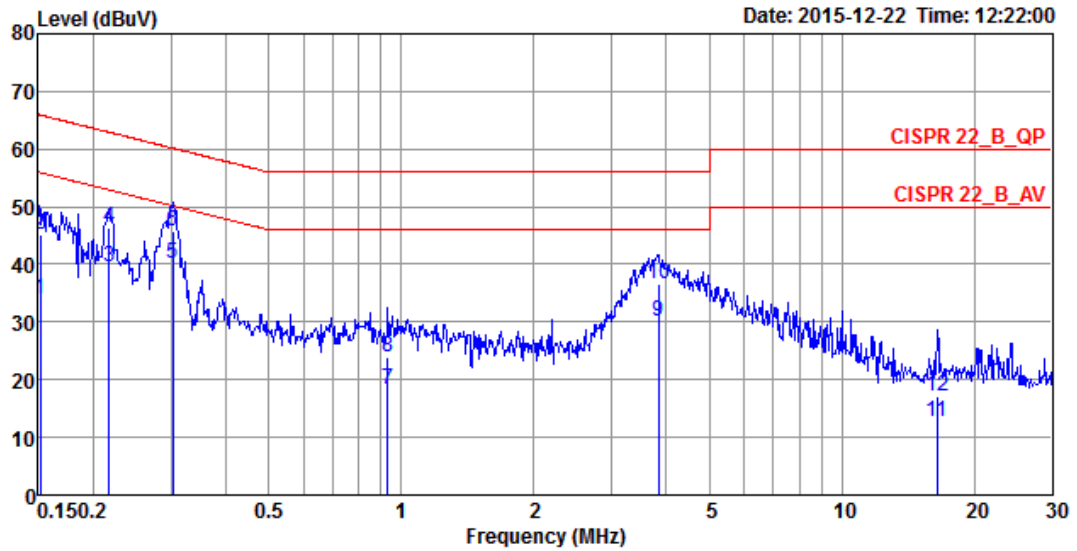

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	33.90	-22.01	55.91	24.10	9.78	0.02	NEUTRAL	Average
2	0.1516	45.23	-20.68	65.91	35.43	9.78	0.02	NEUTRAL	QP
3	0.2174	39.55	-13.37	52.92	29.74	9.79	0.02	NEUTRAL	Average
4	0.2174	46.46	-16.46	62.92	36.65	9.79	0.02	NEUTRAL	QP
5	0.3035	40.12	-10.03	50.15	30.29	9.79	0.04	NEUTRAL	Average
6	0.3035	45.84	-14.31	60.15	36.01	9.79	0.04	NEUTRAL	QP
7	0.9331	18.28	-27.72	46.00	8.42	9.81	0.05	NEUTRAL	Average
8	0.9331	23.94	-32.06	56.00	14.08	9.81	0.05	NEUTRAL	QP
9	3.8399	30.03	-15.97	46.00	20.09	9.87	0.07	NEUTRAL	Average
10	3.8399	36.53	-19.47	56.00	26.59	9.87	0.07	NEUTRAL	QP
11	16.4856	12.78	-37.22	50.00	2.39	10.13	0.26	NEUTRAL	Average
12	16.4856	17.24	-42.76	60.00	6.85	10.13	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.43	16.76
	5200 MHz	21.48	16.85
	5240 MHz	22.52	16.76
	5745 MHz	19.83	16.41
	5785 MHz	23.13	17.02
	5825 MHz	21.22	16.58
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.17	18.32
	5200 MHz	23.39	18.41
	5240 MHz	22.78	18.32
	5745 MHz	21.13	17.89
	5785 MHz	25.30	18.41
	5825 MHz	19.74	17.28
802.11ac MCS0/Nss1 VHT40	5190 MHz	44.93	36.47
	5230 MHz	39.86	35.17
	5755 MHz	43.77	37.19
	5795 MHz	44.35	37.48
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.74	75.83
	5775 MHz	80.29	72.94

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5180 MHz

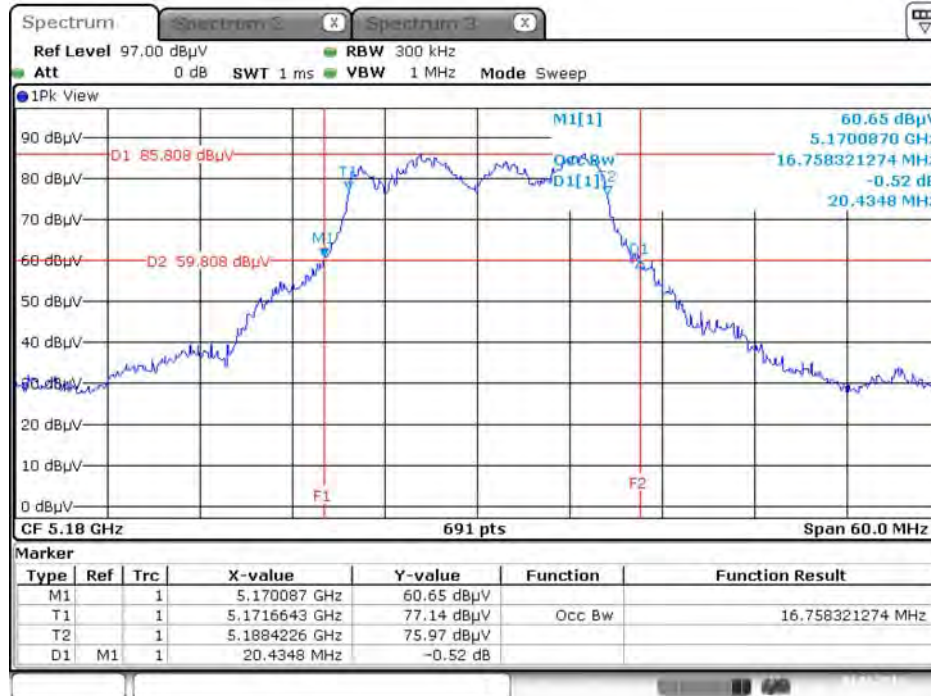


Date: 4 JAN 2016 23:26:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5200 MHz

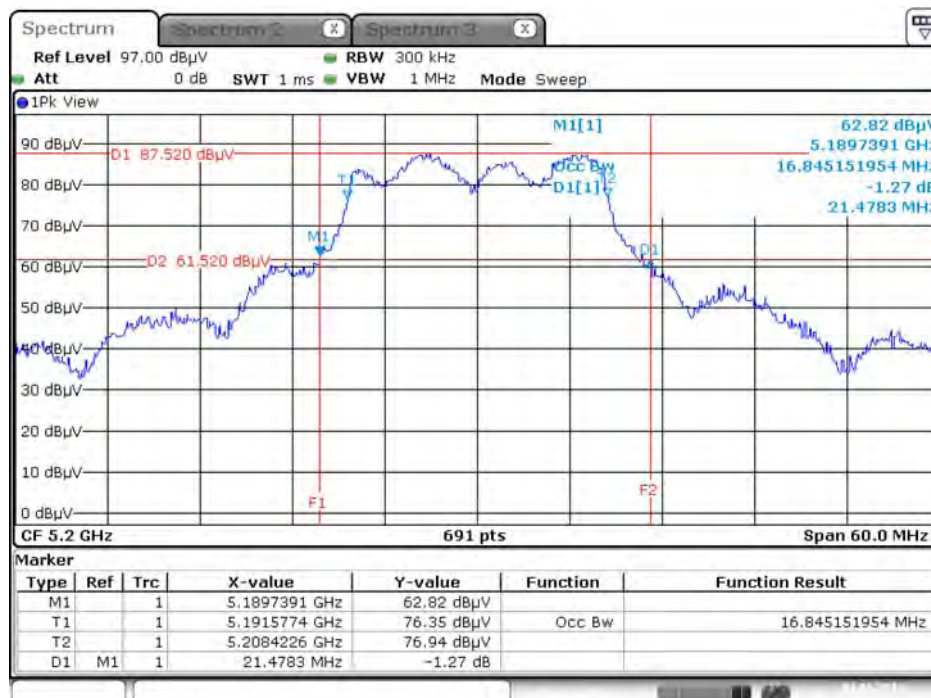


Date: 4 JAN 2016 23:27:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5240 MHz

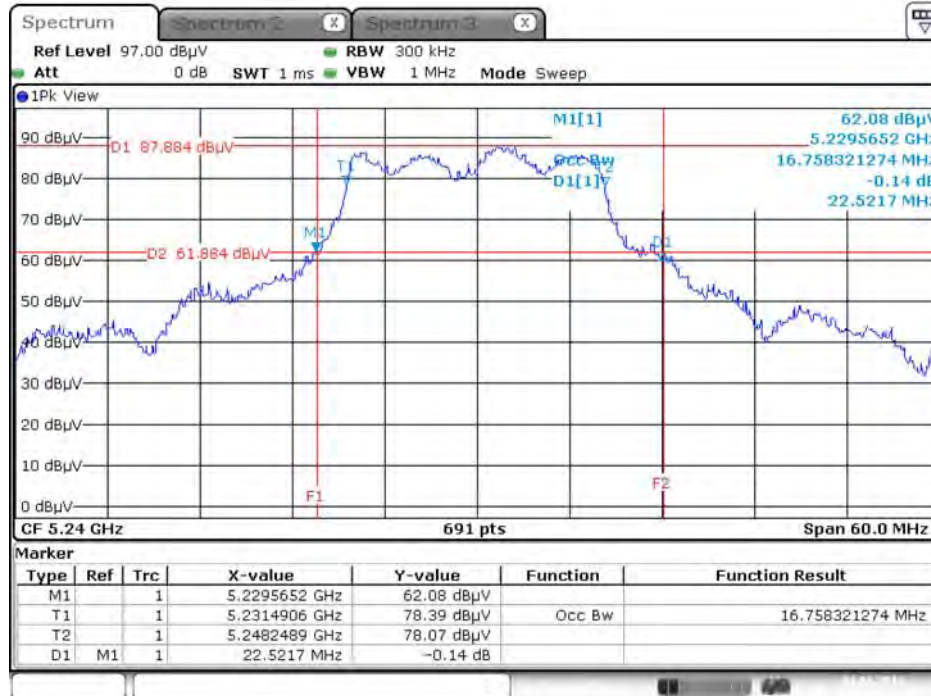


Date: 4 JAN 2016 23:27:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5745 MHz

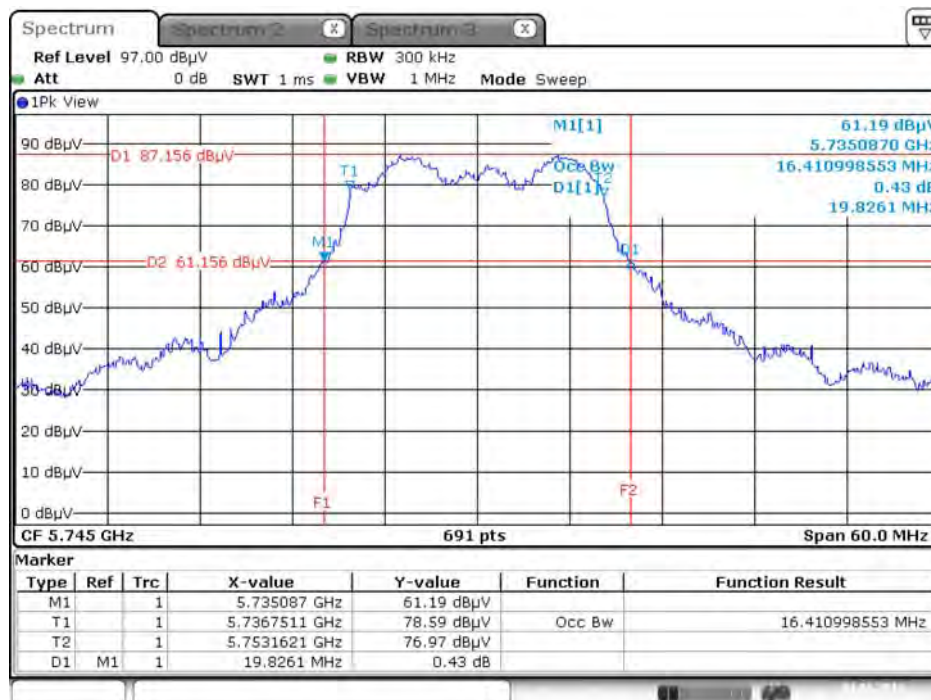


Date: 4 JAN 2016 23:29:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

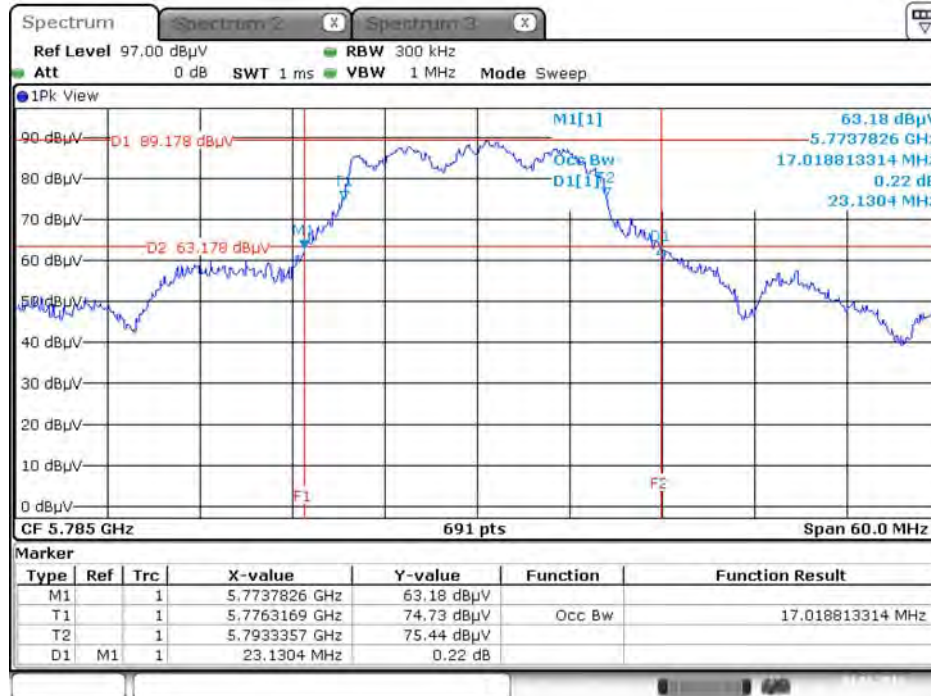


Date: 4 JAN 2016 23:30:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5825 MHz

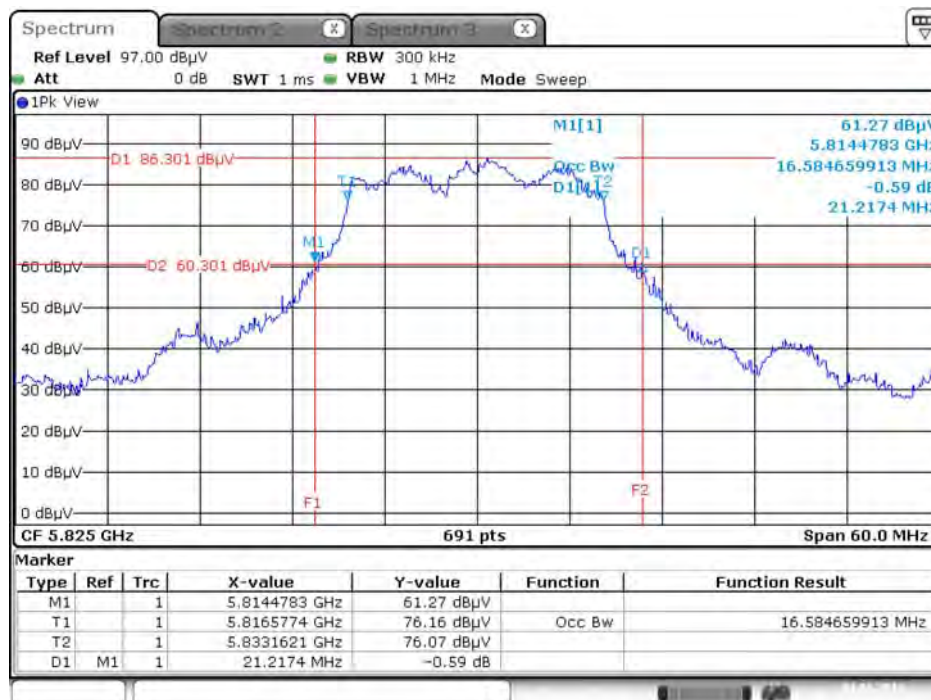


Date: 4 JAN 2016 23:30:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5180 MHz

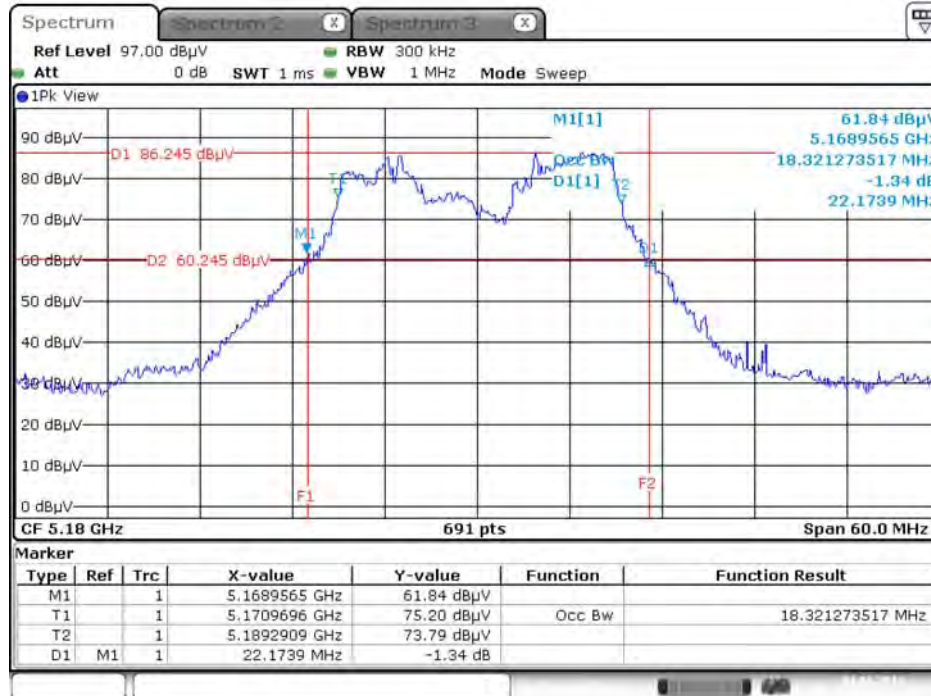


Date: 4 JAN.2016 23:35:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5200 MHz

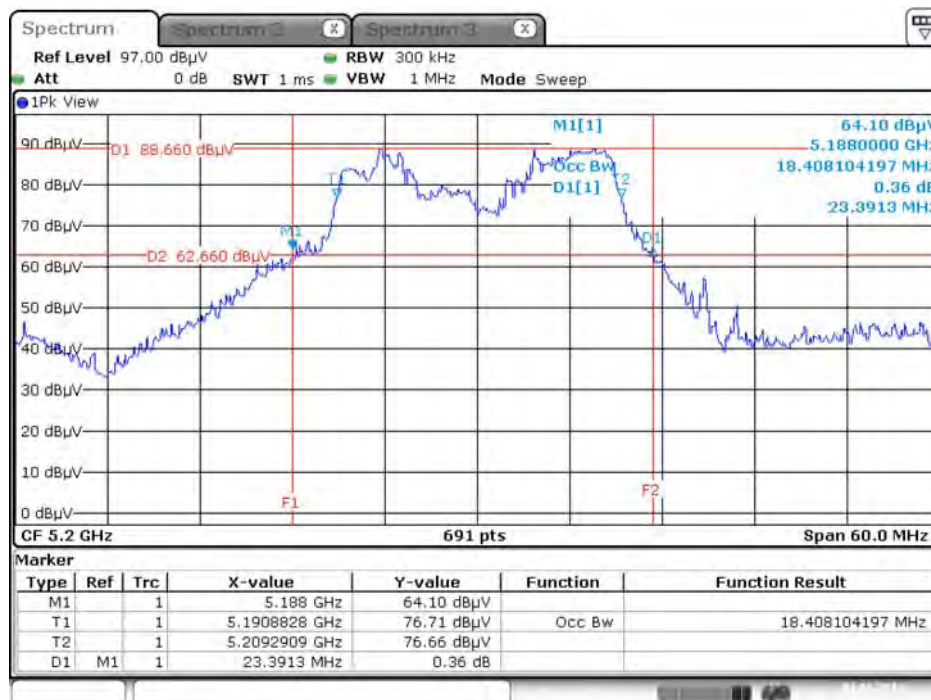


Date: 4 JAN.2016 23:36:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5240 MHz

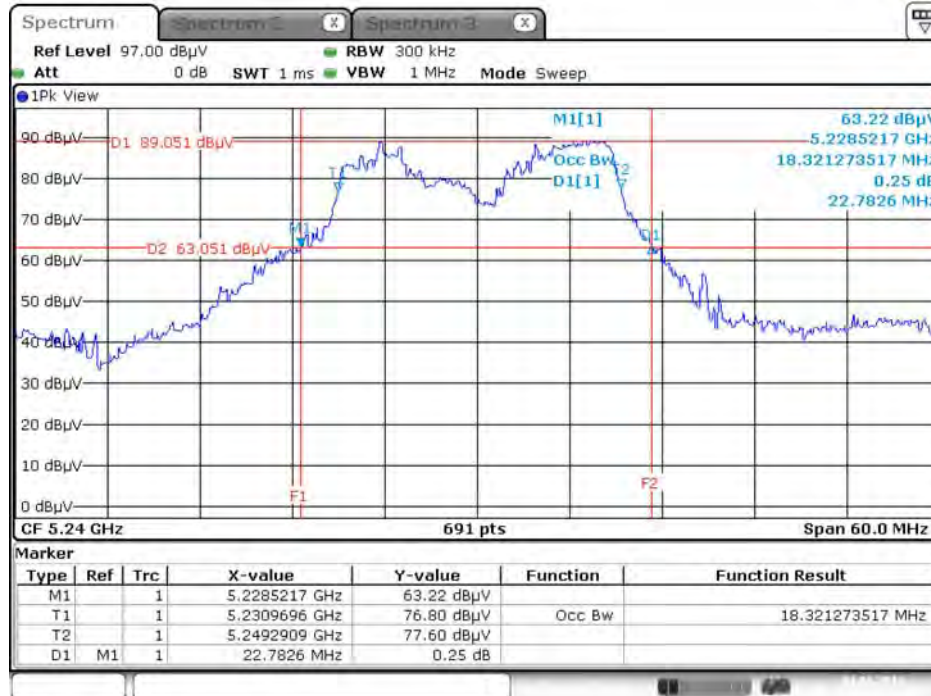


Date: 4 JAN 2016 23:36:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5745 MHz

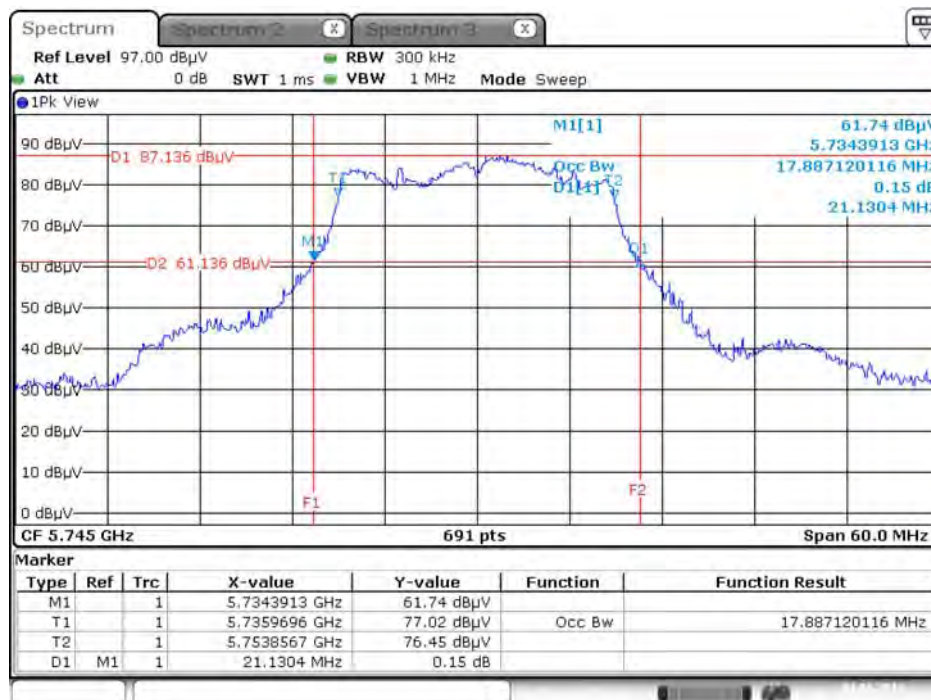


Date: 4 JAN 2016 23:35:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

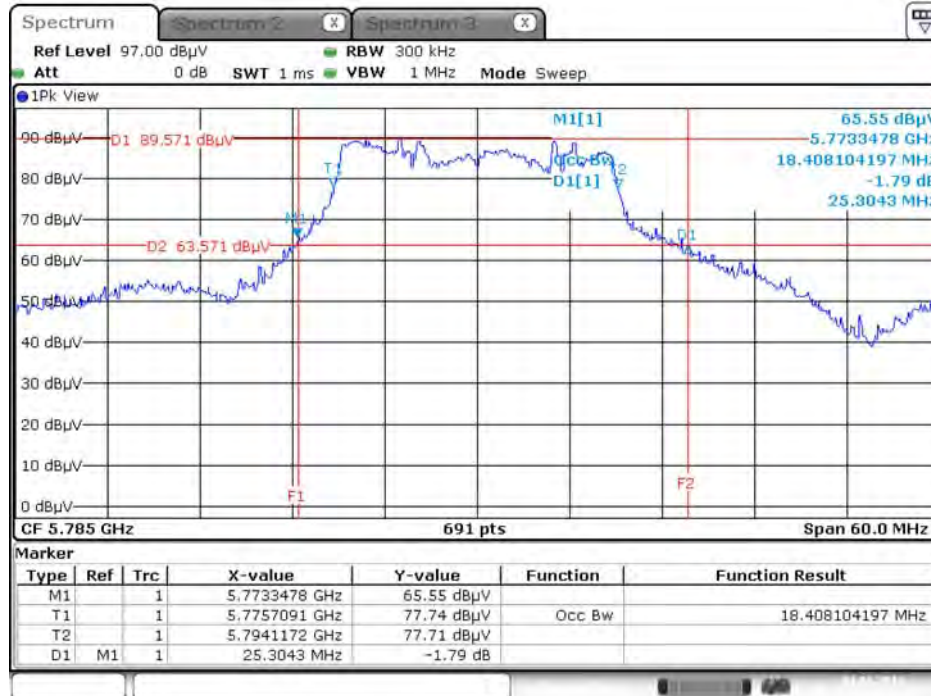


Date: 4 JAN 2016 23:34:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5825 MHz

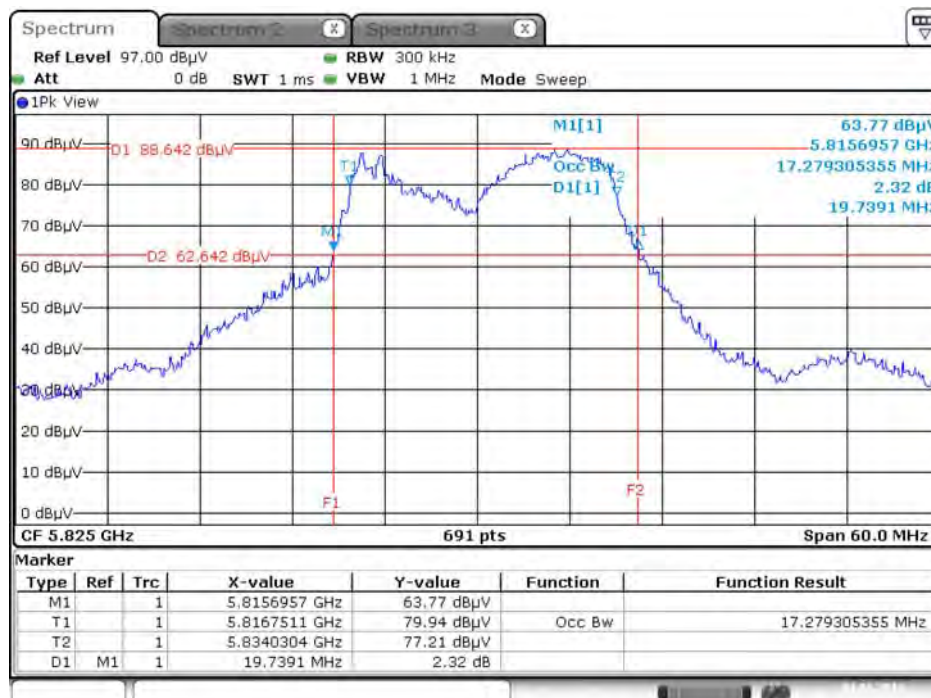


Date: 4 JAN 2016 23:34:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5190 MHz

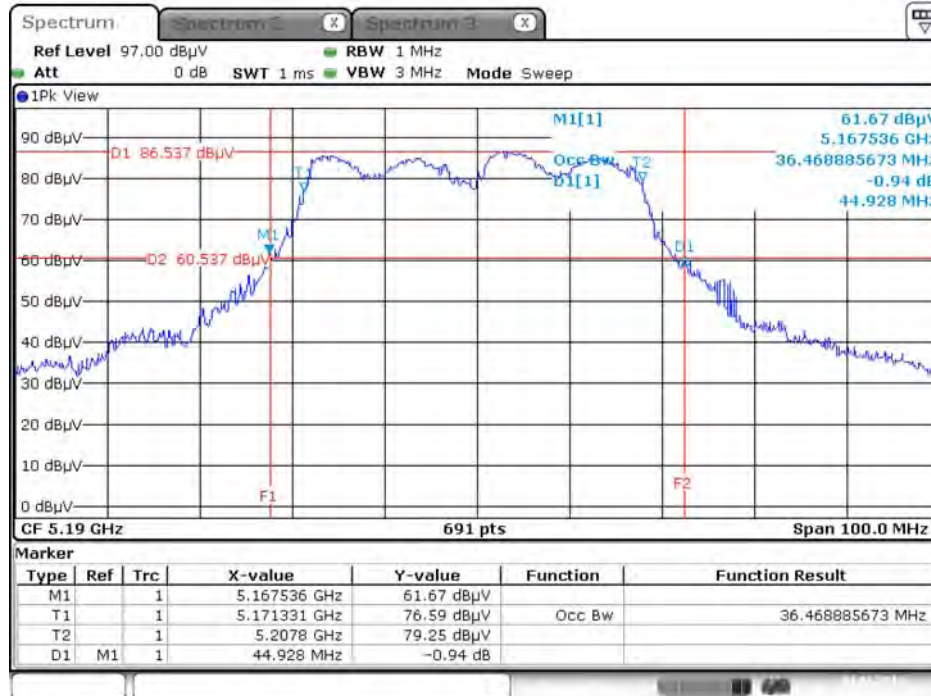


Date: 4.JAN.2016 23:38:35

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5230 MHz

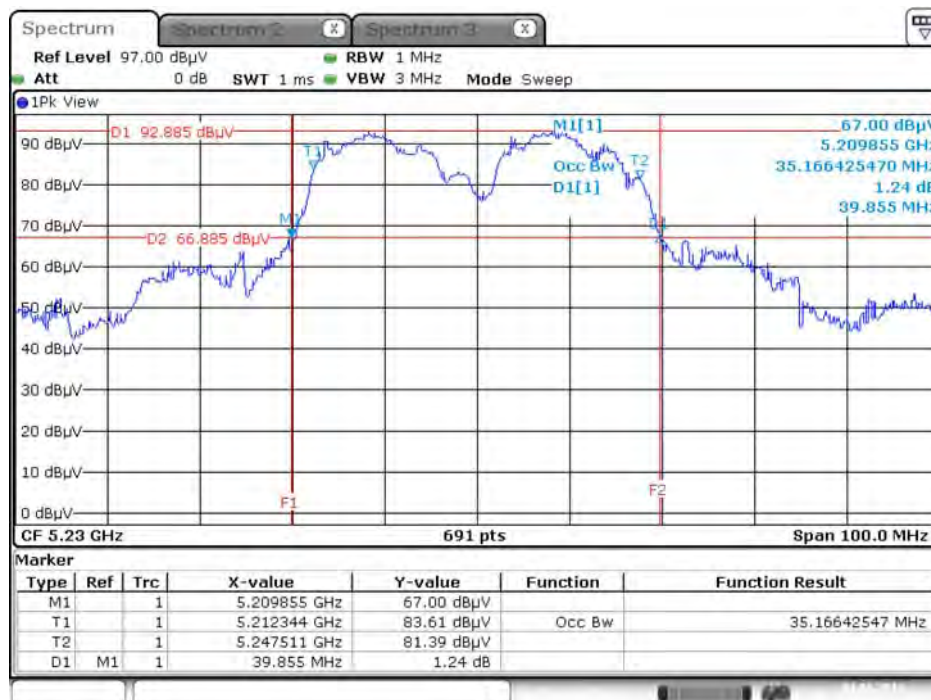


Date: 4.JAN.2016 23:39:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5755 MHz

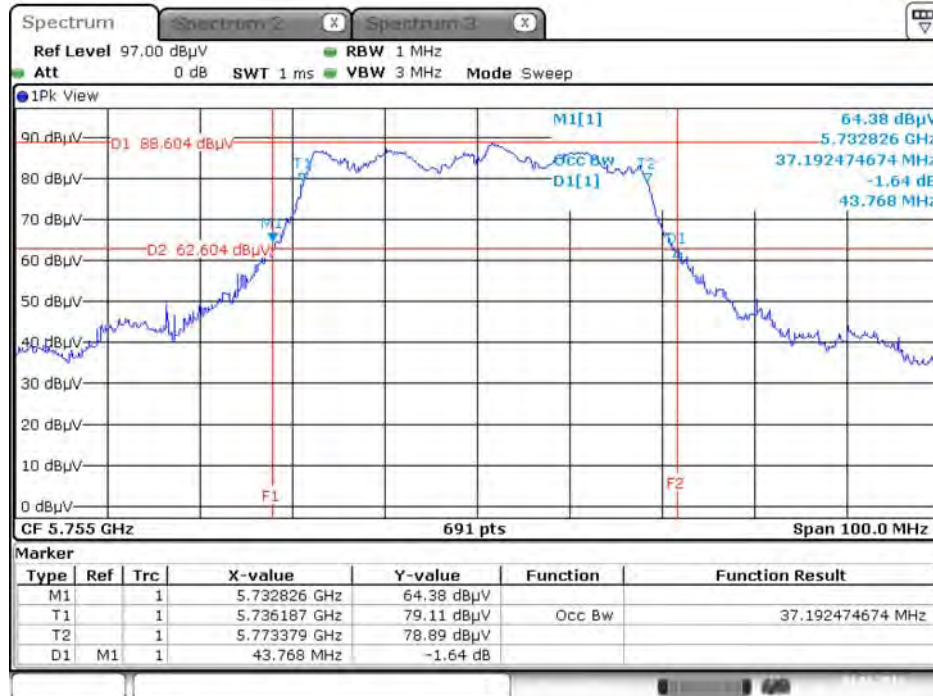


Date: 4 JAN 2016 23:39:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5795 MHz

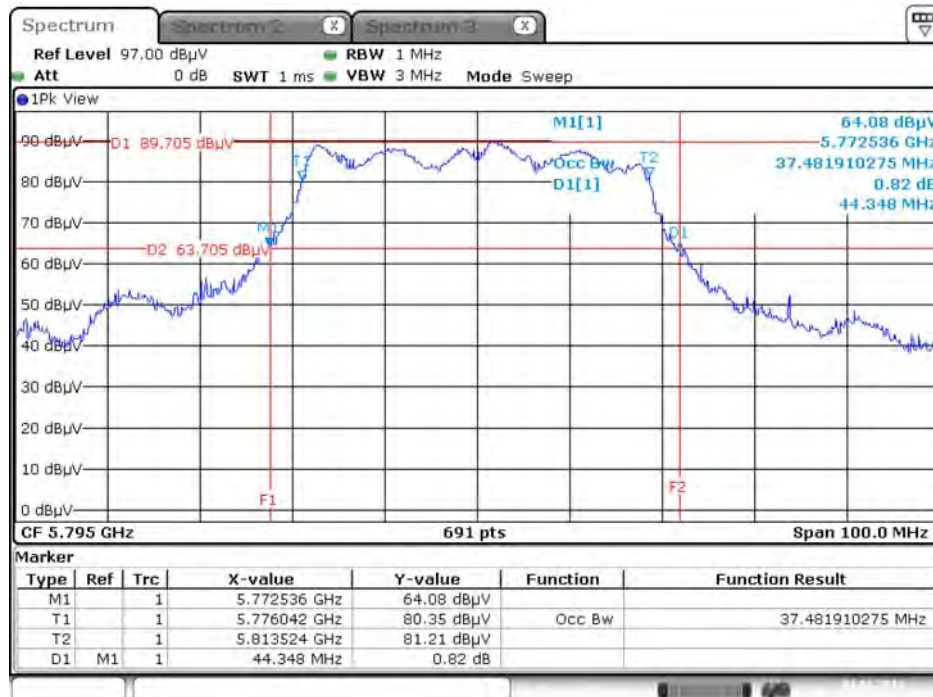


Date: 4 JAN 2016 23:40:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4 / 5210 MHz

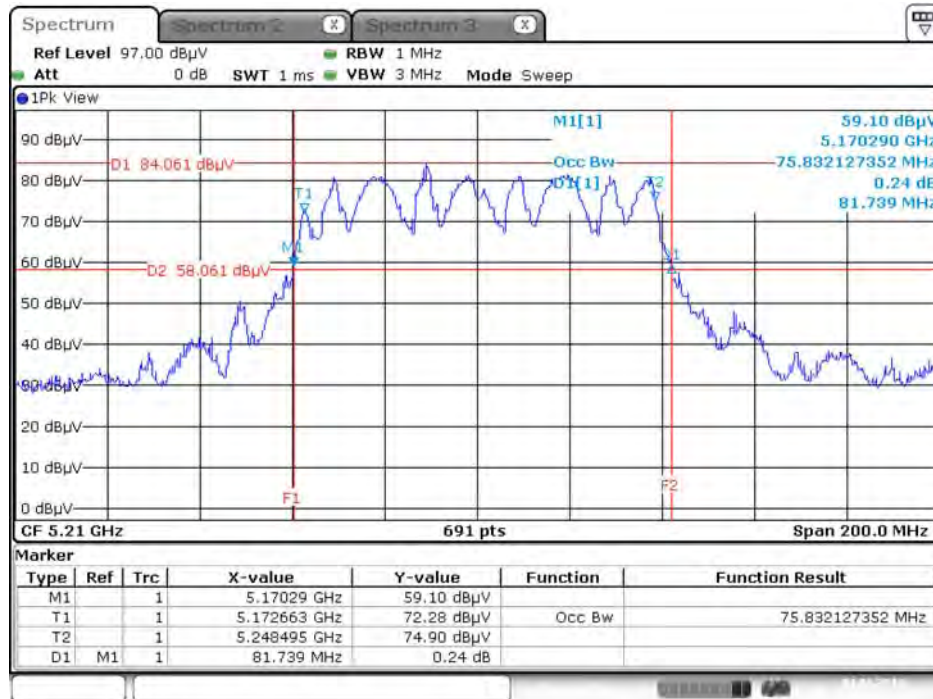

Date: 4 JAN 2016 23:42:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4 / 5775 MHz

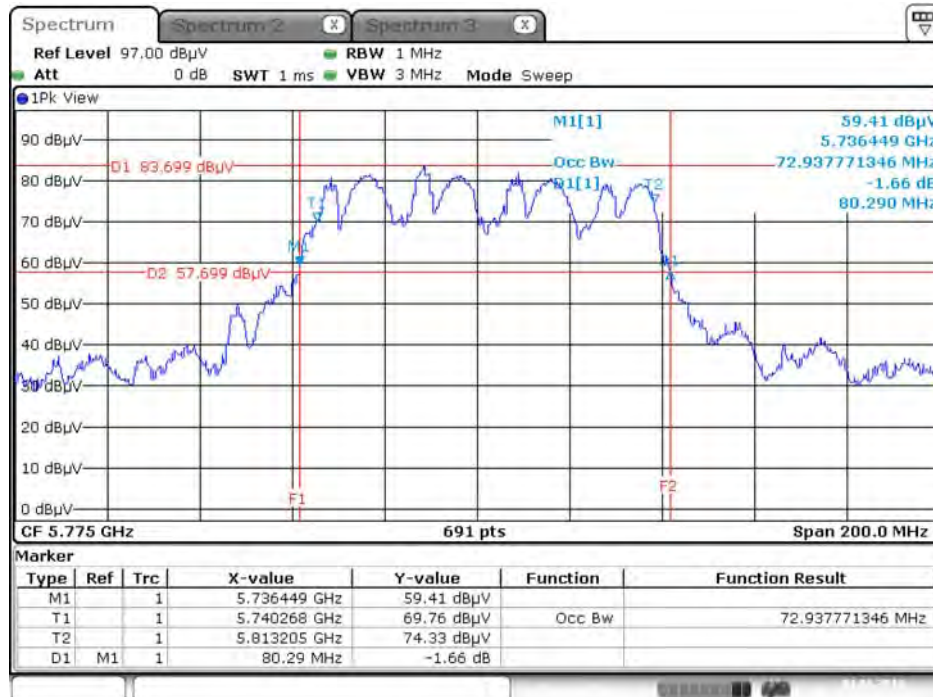

Date: 4 JAN 2016 23:43:10

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth


Temperature	23°C	Humidity	61%
Test Engineer	Wen Chao		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	13.28	500	Complies
	5785 MHz	11.94	500	Complies
	5825 MHz	14.49	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.68	500	Complies
	5785 MHz	12.93	500	Complies
	5825 MHz	16.87	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	34.55	500	Complies
	5795 MHz	31.54	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	70.15	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

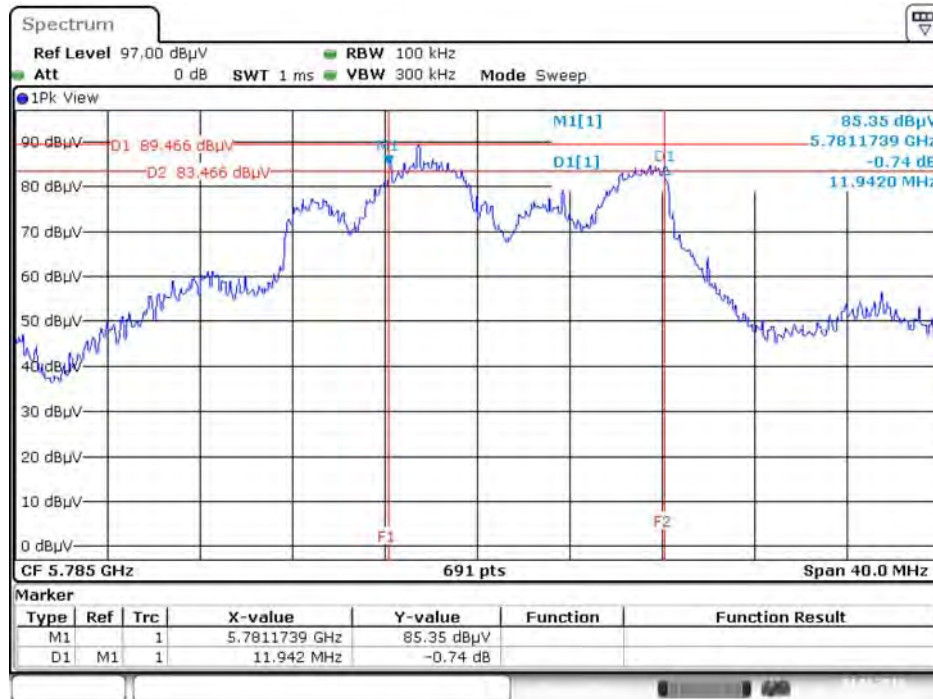


Date: 4 JAN 2016 23:52:14

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

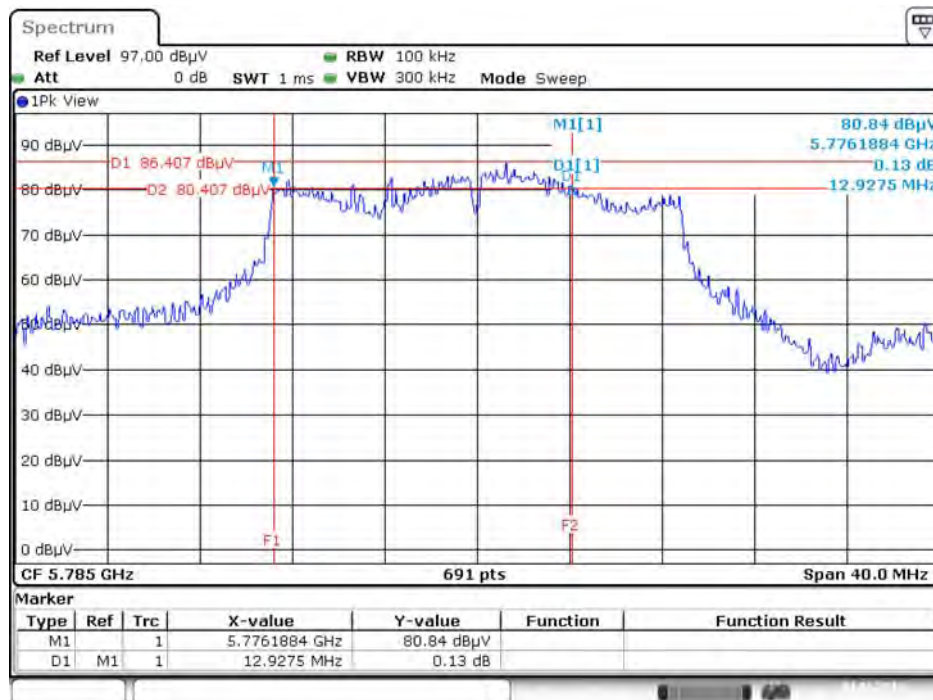


Date: 4 JAN 2016 23:50:16

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5795MHz

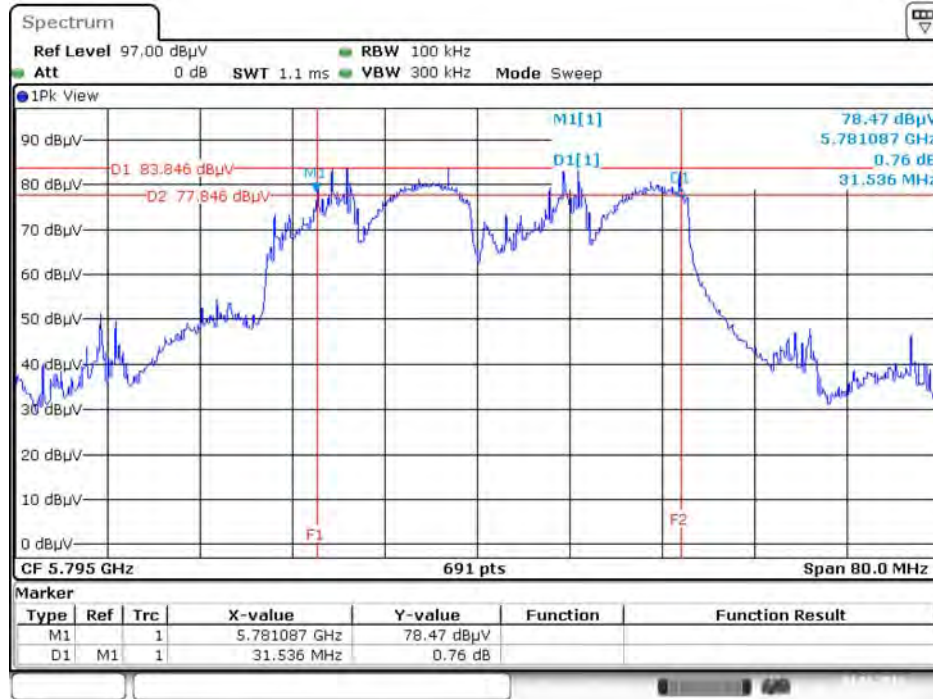

Date: 4 JAN 2016 23:47:58

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4 / 5775 MHz

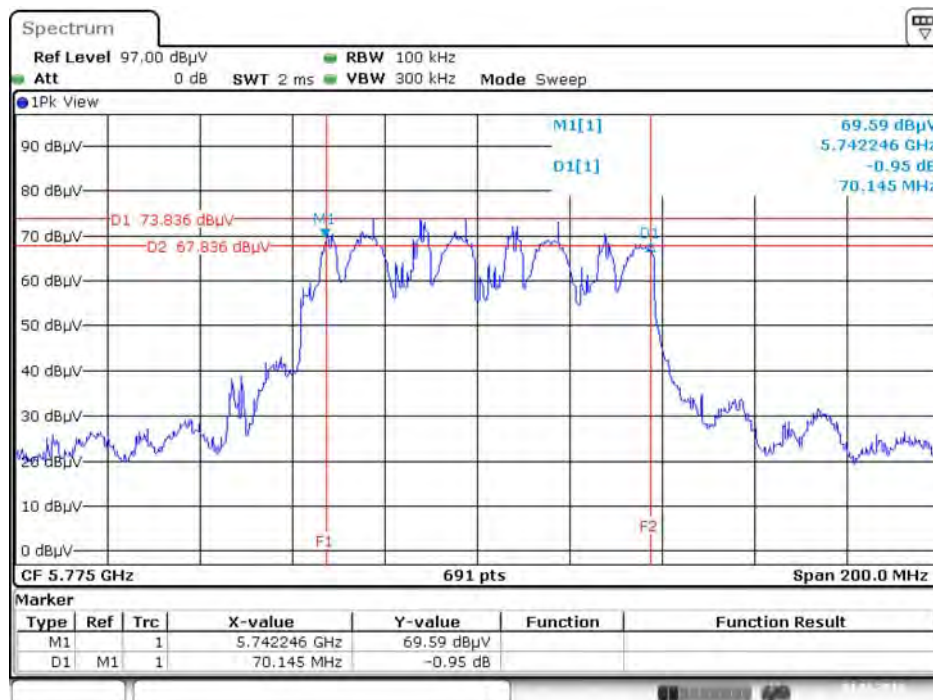

Date: 4 JAN 2016 23:46:56

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Test Date	Jan. 04, 2016

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 2	Ant. 3	Ant. 4	Total		
802.11a	5180 MHz	21.25	21.41	20.57	25.86	30.00	Complies
	5200 MHz	23.12	23.44	22.53	27.82	30.00	Complies
	5240 MHz	23.29	23.31	22.68	27.87	30.00	Complies
	5745 MHz	22.03	22.18	21.73	26.76	30.00	Complies
	5785 MHz	24.89	25.01	24.85	29.69	30.00	Complies
	5825 MHz	22.21	22.02	21.86	26.80	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.28	21.36	20.93	25.97	30.00	Complies
	5200 MHz	23.08	23.31	22.36	27.71	30.00	Complies
	5240 MHz	23.05	23.18	22.70	27.75	30.00	Complies
	5745 MHz	21.98	22.13	21.32	26.60	30.00	Complies
	5785 MHz	24.81	25.24	24.52	29.64	30.00	Complies
	5825 MHz	22.39	22.23	21.18	26.74	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	19.50	19.45	18.57	23.97	30.00	Complies
	5230 MHz	23.22	23.24	22.73	27.84	30.00	Complies
	5755 MHz	20.84	20.60	19.76	25.20	30.00	Complies
	5795 MHz	22.76	22.56	21.85	27.18	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	15.76	15.64	14.63	20.14	30.00	Complies
	5775 MHz	14.94	14.88	14.11	19.43	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

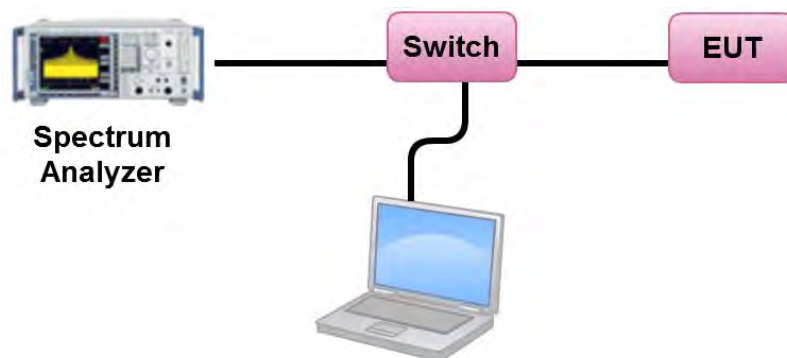

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Test Date	Jan. 04, 2016

Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.82	15.23	Complies
40	5200 MHz	14.85	15.23	Complies
48	5240 MHz	14.90	15.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = $17-(7.77-6) = 15.23\text{ dBm/MHz}$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	13.80	-3.01	10.79	28.23	Complies
157	5785 MHz	16.61	-3.01	13.60	28.23	Complies
165	5825 MHz	13.76	-3.01	10.75	28.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = $30-(7.77-6) = 28.23\text{ dBm/500kHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.85	15.23	Complies
40	5200 MHz	14.42	15.23	Complies
48	5240 MHz	14.35	15.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = 17-(7.77-6) = 15.23 dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	13.52	-3.01	10.51	28.23	Complies
157	5785 MHz	16.64	-3.01	13.63	28.23	Complies
165	5825 MHz	13.79	-3.01	10.78	28.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = 30-(7.77-6) = 28.23 dBm/500kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	7.86	15.23	Complies
46	5230 MHz	11.80	15.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = 17-(7.77-6) = 15.23 dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	8.87	-3.01	5.86	28.23	Complies
159	5795 MHz	10.77	-3.01	7.76	28.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = 30-(7.77-6) = 28.23 dBm/500kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.52	15.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = $17-(7.77-6) = 15.23\text{ dBm/MHz}$


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-0.22	-3.01	-3.23	28.23	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 7.77\text{dBi}$, so limit = $30-(7.77-6) = 28.23\text{ dBm/500kHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5240 MHz

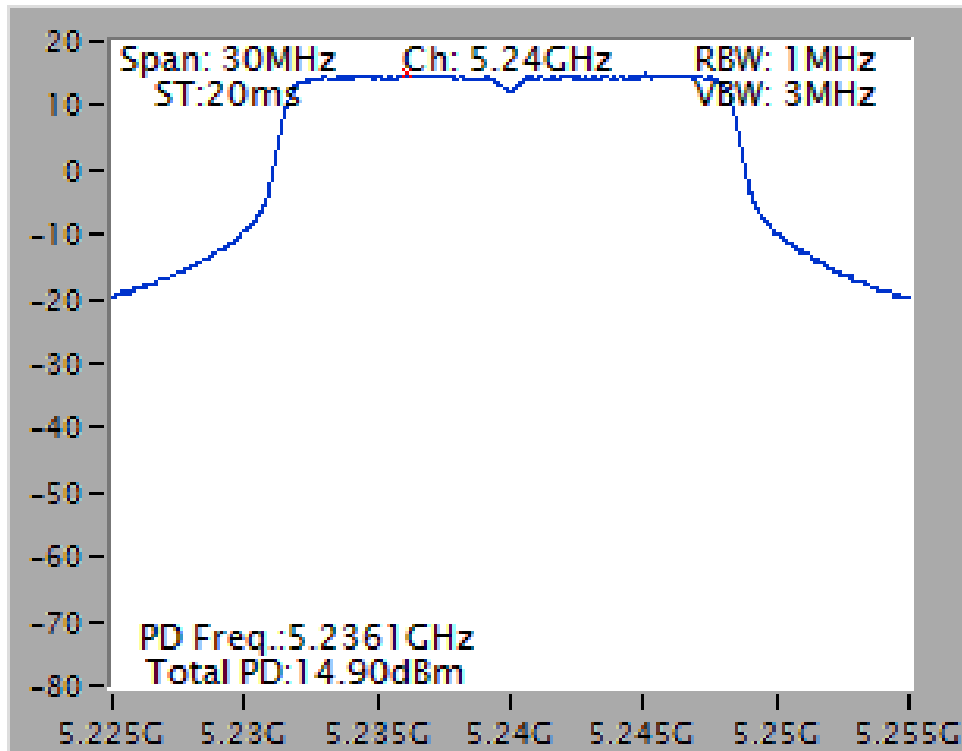


Power Density Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

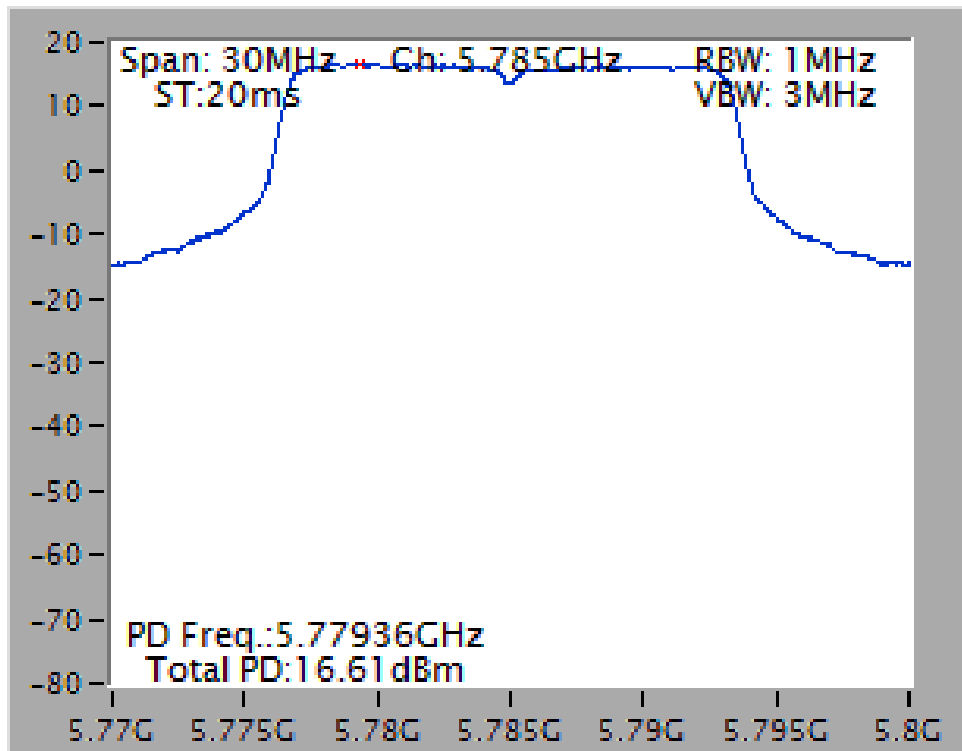


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5200 MHz

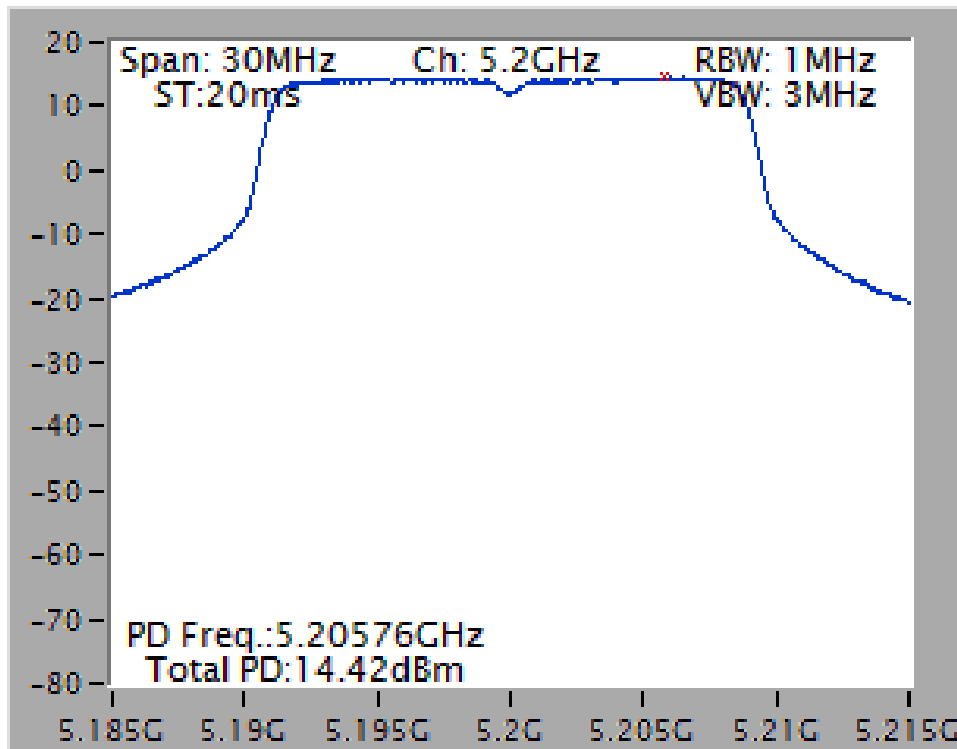


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 2 + Ant. 3 + Ant. 4 / 5785 MHz

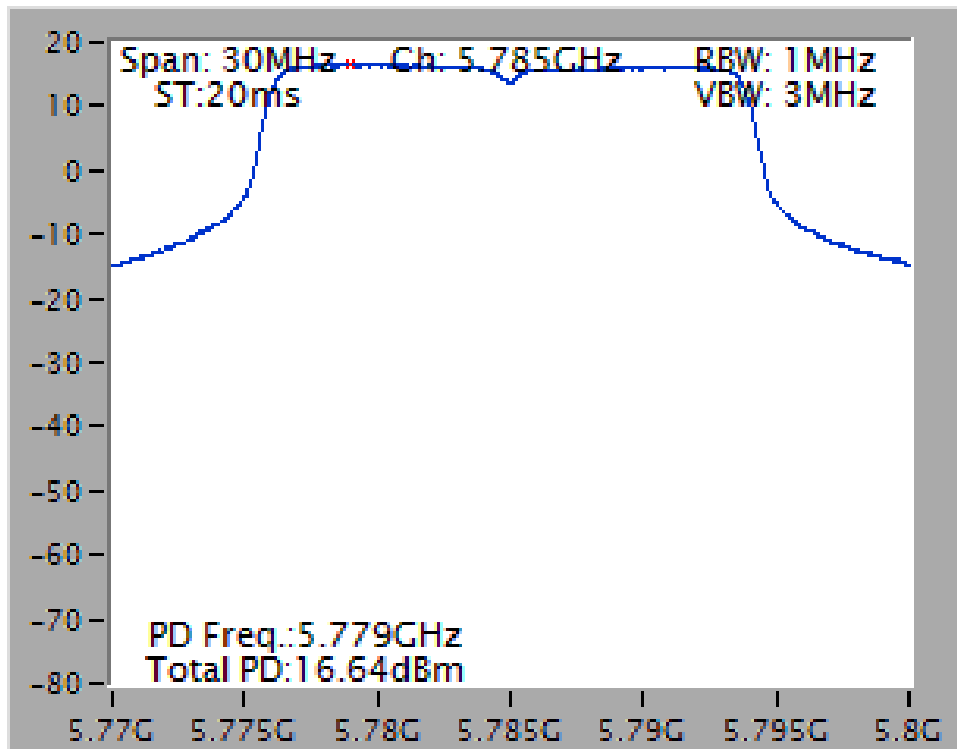


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5230 MHz

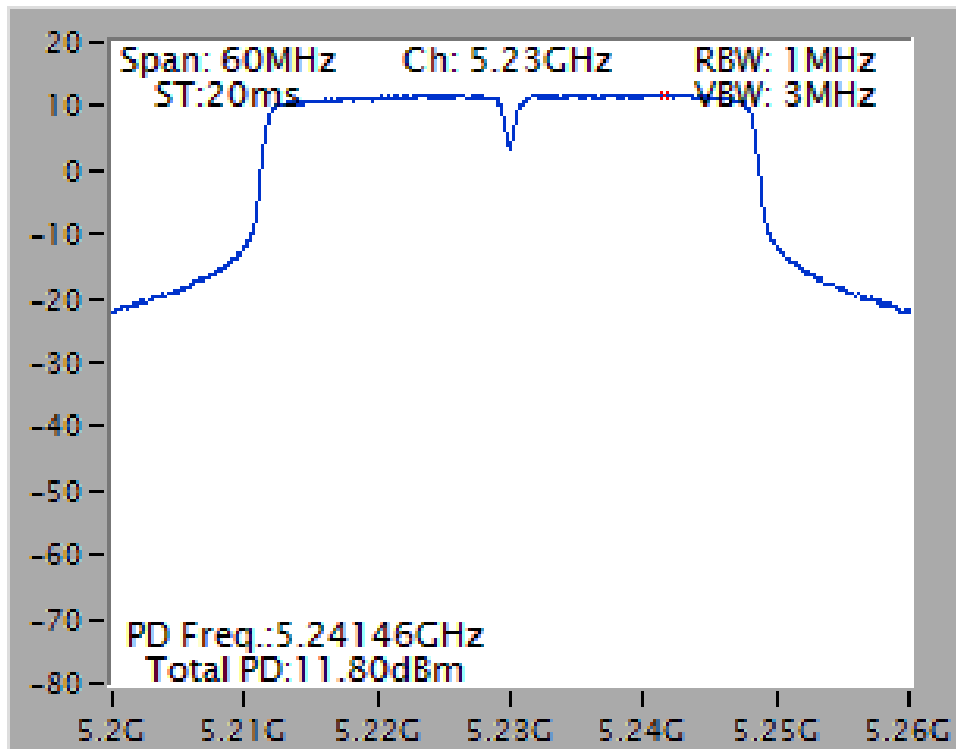


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 2 + Ant. 3 + Ant. 4 / 5795 MHz

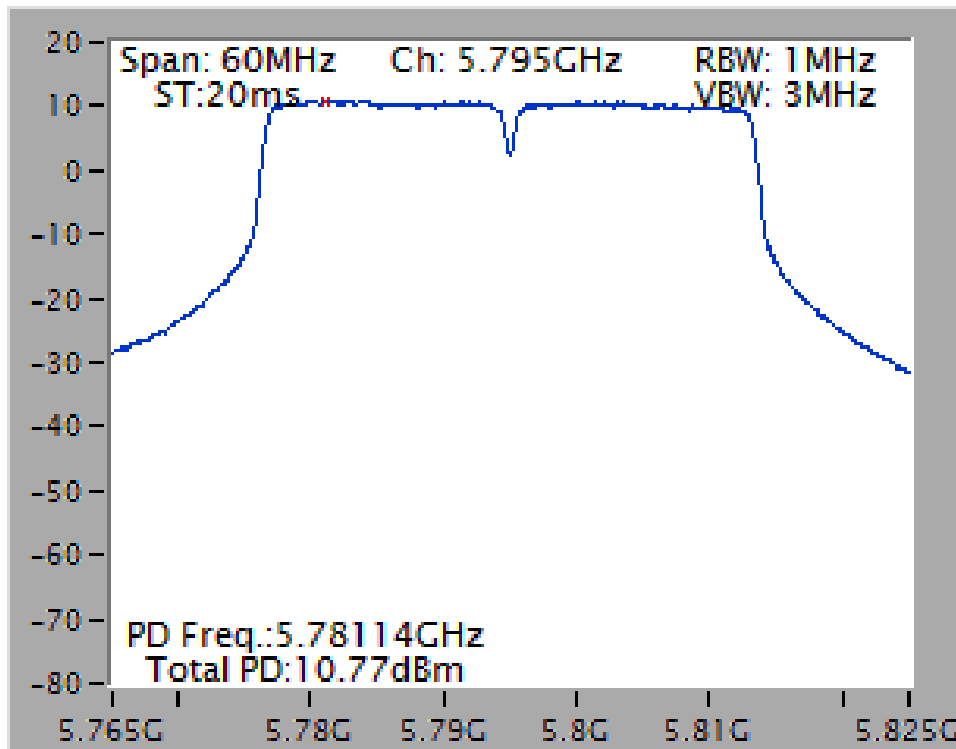

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4 / 5210 MHz

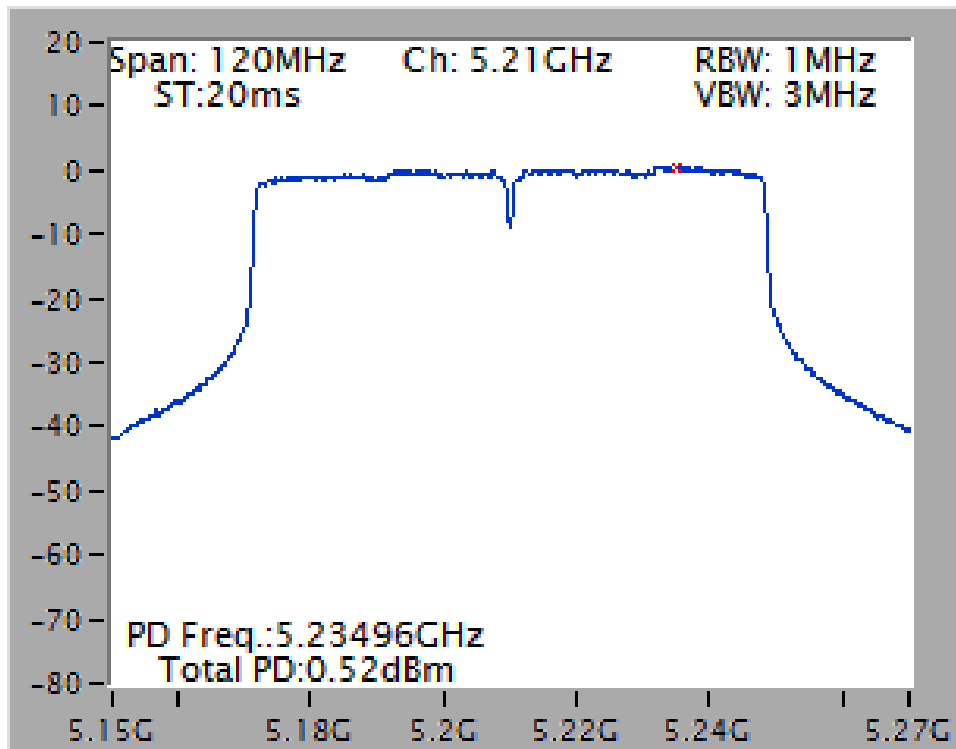

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 2 + Ant. 3 + Ant. 4 / 5775 MHz

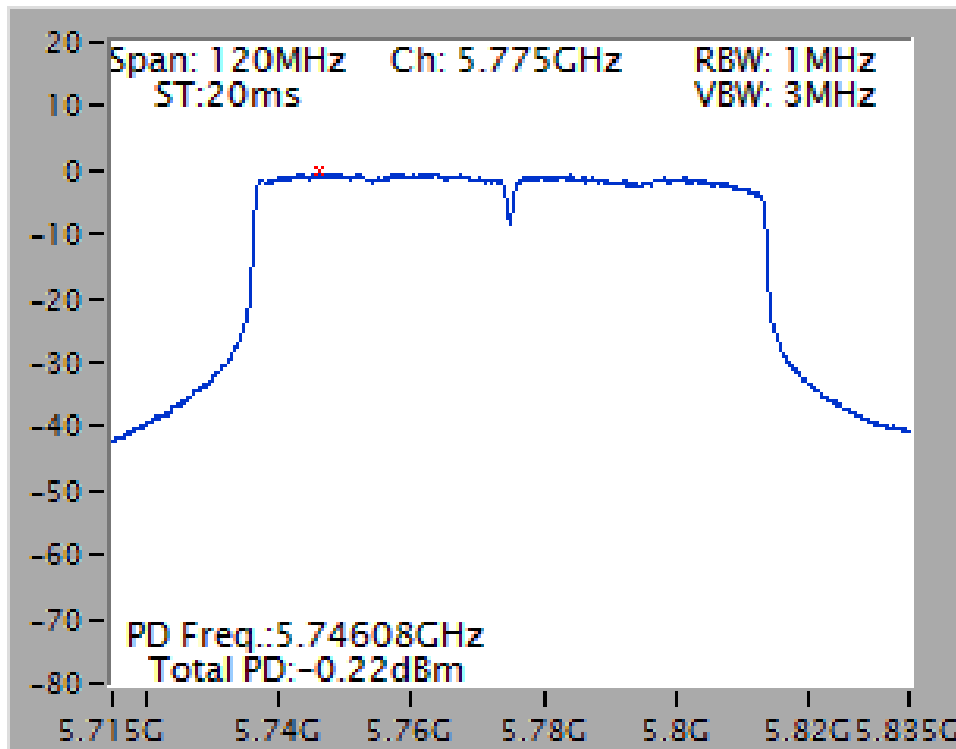

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

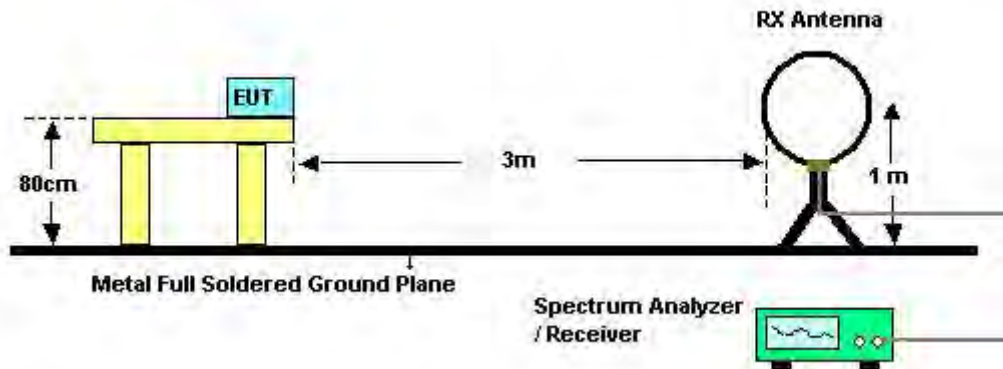

For Radiated Emissions: 30MHz~1GHz

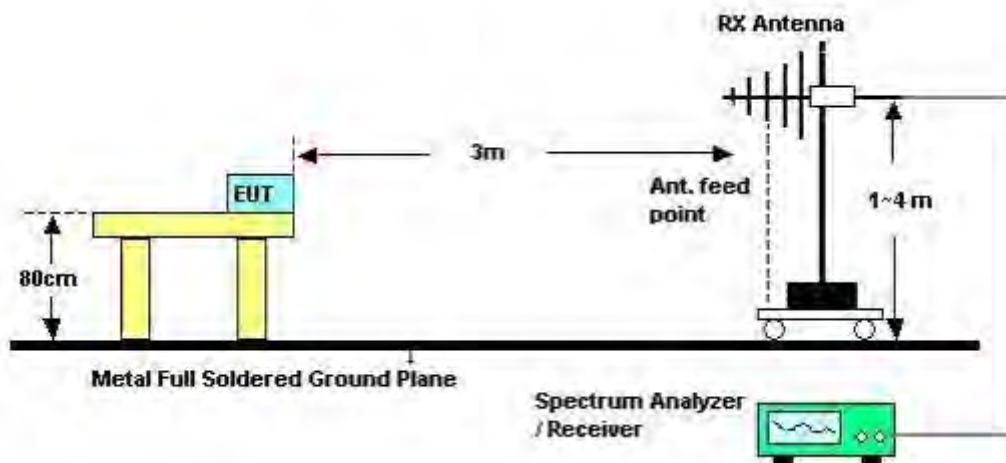

For Radiated Emissions: Above 1GHz

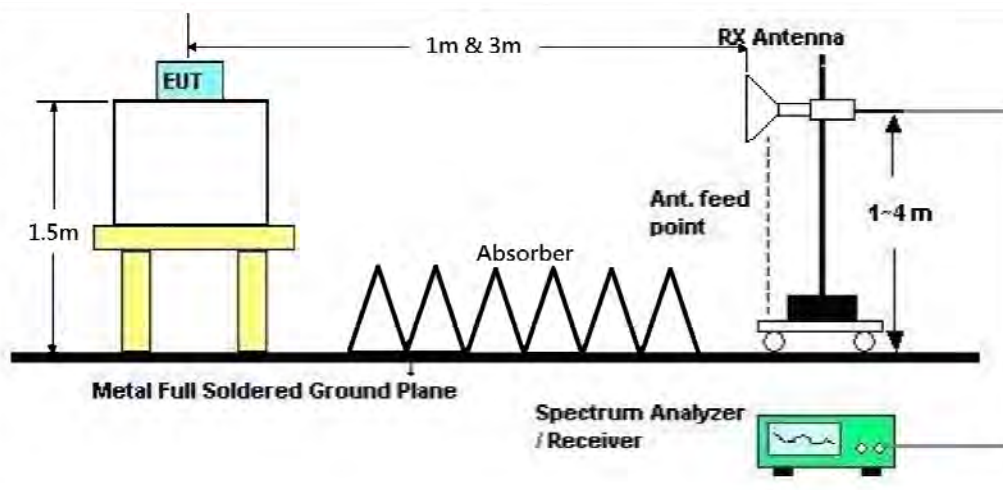

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Normal Link
Test Date	Dec. 17, 2015	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

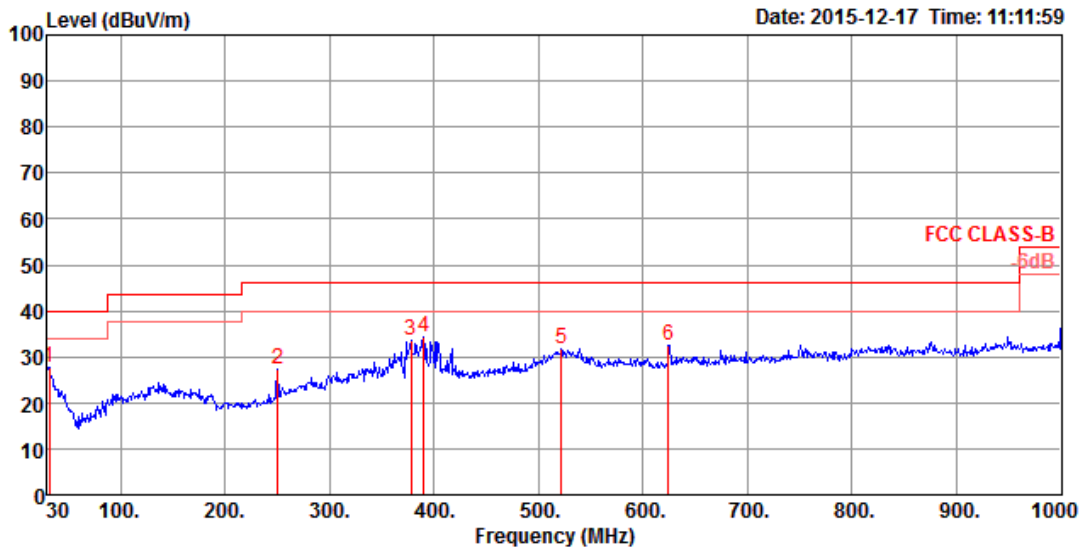

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Po1/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	27.77	40.00	-12.23	40.80	0.50	18.87	32.40	125	253 Peak	HORIZONTAL
2	250.19	27.25	46.00	-18.75	45.21	1.34	13.00	32.30	200	267 Peak	HORIZONTAL
3	378.23	33.63	46.00	-12.37	48.16	1.68	16.11	32.32	300	4 Peak	HORIZONTAL
4	389.87	34.33	46.00	-11.67	48.55	1.70	16.41	32.33	300	146 Peak	HORIZONTAL
5	521.79	31.65	46.00	-14.35	43.63	1.98	18.40	32.36	175	194 Peak	HORIZONTAL
6	624.61	32.62	46.00	-13.38	43.45	2.16	19.41	32.40	150	231 Peak	HORIZONTAL

Vertical

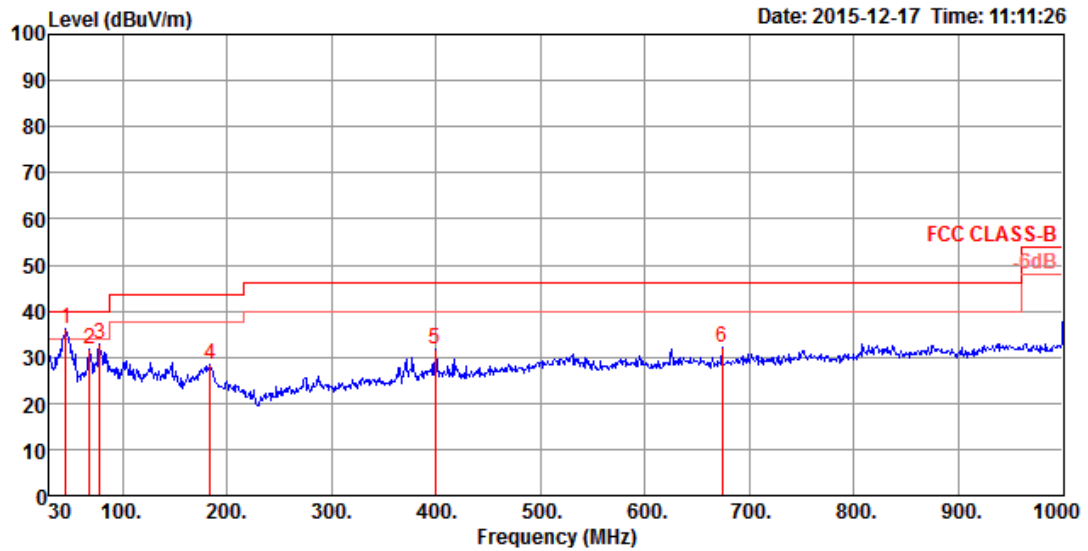

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	45.52	36.06	40.00	-3.94	56.79	0.60	11.08	32.41	100	251 Peak	VERTICAL
2	68.80	31.64	40.00	-8.36	56.61	0.72	6.71	32.40	200	305 Peak	VERTICAL
3	78.50	33.03	40.00	-6.97	57.20	0.77	7.46	32.40	100	193 Peak	VERTICAL
4	184.23	28.53	43.50	-14.97	49.90	1.17	9.80	32.34	100	360 Peak	VERTICAL
5	399.57	31.70	46.00	-14.30	45.64	1.73	16.66	32.33	175	171 Peak	VERTICAL
6	674.08	32.07	46.00	-13.93	42.50	2.24	19.70	32.37	150	203 Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11a CH 36 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.38	45.65	54.00	-8.35	30.09	12.53	38.24	35.21	Average	100	360	HORIZONTAL
2	15541.97	58.94	74.00	-15.06	43.38	12.53	38.24	35.21	Peak	100	360	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.21	59.18	74.00	-14.82	43.62	12.53	38.24	35.21	Peak	100	29	VERTICAL
2	15541.79	45.67	54.00	-8.33	30.11	12.53	38.24	35.21	Average	100	29	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11a CH 40 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15602.30	50.38	54.00	-3.62	34.97	12.53	38.11	35.23	Average	185	312	HORIZONTAL
2	15602.40	65.60	74.00	-8.40	50.19	12.53	38.11	35.23	Peak	185	312	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15602.00	69.89	74.00	-4.11	54.48	12.53	38.11	35.23	Peak	186	307	VERTICAL
2	15602.40	53.62	54.00	-0.38	38.21	12.53	38.11	35.23	Average	186	307	VERTICAL

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11a CH 48 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15722.20	50.17	54.00	-3.83	34.95	12.54	37.98	35.30	Average	184	312	HORIZONTAL
2	15722.80	63.77	74.00	-10.23	48.55	12.54	37.98	35.30	Peak	184	312	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15721.90	53.57	54.00	-0.43	38.35	12.54	37.98	35.30	Average	182	305	VERTICAL
2	15721.90	68.96	74.00	-5.04	53.74	12.54	37.98	35.30	Peak	182	305	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Ted Chiu	Configurations	IEEE 802.11a CH 149 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11487.70	44.01	54.00	-9.99	29.53	10.18	39.10	34.80	Average	209	291	HORIZONTAL
2	11488.00	56.60	74.00	-17.40	42.12	10.18	39.10	34.80	Peak	209	291	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11486.80	49.95	54.00	-4.05	35.47	10.18	39.10	34.80	Average	300	71	VERTICAL
2	11495.60	63.37	74.00	-10.63	48.89	10.18	39.10	34.80	Peak	300	71	VERTICAL

Temperature	25°C	Humidity	61%
Test Engineer	Ted Chiu	Configurations	IEEE 802.11a CH 157 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11566.20	58.85	74.00	-15.15	44.38	10.15	39.14	34.82	Peak	201	296	HORIZONTAL
2	11566.50	46.32	54.00	-7.68	31.85	10.15	39.14	34.82	Average	201	296	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11566.60	65.47	74.00	-8.53	51.00	10.15	39.14	34.82	Peak	265	80	VERTICAL
2	11566.90	52.07	54.00	-1.93	37.60	10.15	39.14	34.82	Average	265	80	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Ted Chiu	Configurations	IEEE 802.11a CH 165 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11646.60	56.26	74.00	-17.74	41.79	10.13	39.18	34.84	Peak	208	26	HORIZONTAL
2	11648.30	44.96	54.00	-9.04	30.49	10.13	39.18	34.84	Average	208	26	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11648.20	46.35	54.00	-7.65	31.88	10.13	39.18	34.84	Average	198	315	VERTICAL
2	11649.60	58.73	74.00	-15.27	44.26	10.13	39.18	34.84	Peak	198	315	VERTICAL

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15526.70	45.42	54.00	-8.58	29.86	12.53	38.24	35.21	Average	203	351	HORIZONTAL
2	15558.40	58.19	74.00	-15.81	42.70	12.53	38.17	35.21	Peak	203	351	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15528.60	45.82	54.00	-8.18	30.26	12.53	38.24	35.21	Average	198	303	VERTICAL
2	15529.40	58.99	74.00	-15.01	43.43	12.53	38.24	35.21	Peak	198	303	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15594.30	49.88	54.00	-4.12	34.41	12.53	38.17	35.23	Average	200	349	HORIZONTAL
2	15613.90	62.50	74.00	-11.50	47.12	12.53	38.11	35.26	Peak	200	349	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15595.30	53.60	54.00	-0.40	38.13	12.53	38.17	35.23	Average	202	31	VERTICAL
2	15596.50	68.32	74.00	-5.68	52.85	12.53	38.17	35.23	Peak	202	31	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15724.10	62.43	74.00	-11.57	47.21	12.54	37.98	35.30	Peak	187	347	HORIZONTAL
2	15725.10	49.73	54.00	-4.27	34.51	12.54	37.98	35.30	Average	187	347	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15722.90	53.73	54.00	-0.27	38.51	12.54	37.98	35.30	Average	197	33	VERTICAL
2	15723.20	68.44	74.00	-5.56	53.22	12.54	37.98	35.30	Peak	197	33	VERTICAL

Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11481.40	58.05	74.00	-15.95	43.60	10.19	39.06	34.80	Peak	194	299	HORIZONTAL
2	11482.30	45.65	54.00	-8.35	31.20	10.19	39.06	34.80	Average	194	299	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11481.10	63.76	74.00	-10.24	49.31	10.19	39.06	34.80	Peak	256	81	VERTICAL
2	11484.30	50.79	54.00	-3.21	36.31	10.18	39.10	34.80	Average	256	81	VERTICAL



Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11562.70	46.73	54.00	-7.27	32.26	10.15	39.14	34.82	Average	206	297	HORIZONTAL
2	11562.90	59.86	74.00	-14.14	45.39	10.15	39.14	34.82	Peak	206	297	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11563.00	65.31	74.00	-8.69	50.84	10.15	39.14	34.82	Peak	220	81	VERTICAL
2	11563.40	51.32	54.00	-2.68	36.85	10.15	39.14	34.82	Average	220	81	VERTICAL

Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11646.80	57.43	74.00	-16.57	42.96	10.13	39.18	34.84	Peak	201	27	HORIZONTAL
2	11647.00	44.89	54.00	-9.11	30.42	10.13	39.18	34.84	Average	201	27	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11646.90	59.05	74.00	-14.95	44.58	10.13	39.18	34.84	Peak	202	312	VERTICAL
2	11647.50	46.66	54.00	-7.34	32.19	10.13	39.18	34.84	Average	202	312	VERTICAL

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15560.10	58.06	74.00	-15.94	42.59	12.53	38.17	35.23	Peak	203	347	HORIZONTAL
2	15589.70	45.04	54.00	-8.96	29.57	12.53	38.17	35.23	Average	203	347	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15545.50	45.58	54.00	-8.42	30.02	12.53	38.24	35.21	Average	198	308	VERTICAL
2	15584.10	58.16	74.00	-15.84	42.69	12.53	38.17	35.23	Peak	198	308	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15703.70	61.84	74.00	-12.16	46.60	12.54	37.98	35.28	Peak	190	347	HORIZONTAL
2	15705.00	48.32	54.00	-5.68	33.08	12.54	37.98	35.28	Average	190	347	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15684.30	50.64	54.00	-3.36	35.33	12.54	38.05	35.28	Average	228	32	VERTICAL
2	15684.60	64.94	74.00	-9.06	49.63	12.54	38.05	35.28	Peak	228	32	VERTICAL



Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11503.00	43.68	54.00	-10.32	29.20	10.18	39.10	34.80	Average	205	299	HORIZONTAL
2	11506.20	55.78	74.00	-18.22	41.30	10.18	39.10	34.80	Peak	205	299	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11503.50	46.68	54.00	-7.32	32.20	10.18	39.10	34.80	Average	273	78	VERTICAL
2	11506.30	60.08	74.00	-13.92	45.60	10.18	39.10	34.80	Peak	273	78	VERTICAL



Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11581.40	56.85	74.00	-17.15	42.38	10.15	39.14	34.82	Peak	221	73	HORIZONTAL
2	11600.80	43.79	54.00	-10.21	29.32	10.14	39.16	34.83	Average	221	73	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11582.50	59.20	74.00	-14.80	44.73	10.15	39.14	34.82	Peak	222	78	VERTICAL
2	11582.60	47.02	54.00	-6.98	32.55	10.15	39.14	34.82	Average	222	78	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15615.80	45.35	54.00	-8.65	29.97	12.53	38.11	35.26	Average	203	142	HORIZONTAL
2	15625.90	58.72	74.00	-15.28	43.34	12.53	38.11	35.26	Peak	203	142	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15612.70	57.89	74.00	-16.11	42.51	12.53	38.11	35.26	Peak	202	115	VERTICAL
2	15617.30	45.43	54.00	-8.57	30.05	12.53	38.11	35.26	Average	202	115	VERTICAL



Temperature	24°C	Humidity	56%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11566.00	54.81	74.00	-19.19	40.34	10.15	39.14	34.82	Peak	193	220	HORIZONTAL
2	11566.90	42.24	54.00	-11.76	27.77	10.15	39.14	34.82	Average	193	220	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11530.50	54.93	74.00	-19.07	40.46	10.16	39.12	34.81	Peak	196	170	VERTICAL
2	11570.00	42.22	54.00	-11.78	27.75	10.15	39.14	34.82	Average	196	170	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.73	54.00	-0.27	47.49	7.20	34.04	35.00	Average	225	310	VERTICAL
2	5150.00	67.52	74.00	-6.48	61.28	7.20	34.04	35.00	Peak	225	310	VERTICAL
3	5181.20	109.04			102.74	7.21	34.09	35.00	Average	225	310	VERTICAL
4	5181.20	118.55			112.25	7.21	34.09	35.00	Peak	225	310	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.20	65.09	74.00	-8.91	58.85	7.20	34.04	35.00	Peak	208	313	VERTICAL
2	5150.00	51.02	54.00	-2.98	44.78	7.20	34.04	35.00	Average	208	313	VERTICAL
3	5200.40	110.55			104.22	7.21	34.12	35.00	Average	208	313	VERTICAL
4	5200.80	120.78			114.45	7.21	34.12	35.00	Peak	208	313	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5103.80	59.87	74.00	-14.13	53.72	7.19	33.97	35.01	Peak	228	179	VERTICAL
2	5108.60	46.90	54.00	-7.10	40.75	7.19	33.97	35.01	Average	228	179	VERTICAL
3	5238.80	110.34			103.93	7.22	34.19	35.00	Average	228	179	VERTICAL
4	5238.80	120.30			113.89	7.22	34.19	35.00	Peak	228	179	VERTICAL
5	5367.20	48.74	54.00	-5.26	42.09	7.26	34.38	34.99	Average	228	179	VERTICAL
6	5373.80	61.46	74.00	-12.54	54.78	7.26	34.41	34.99	Peak	228	179	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5714.40	53.04	54.00	-0.96	46.16	7.27	34.64	35.03	205	189	VERTICAL
2	5714.60	67.33	74.00	-6.67	60.45	7.27	34.64	35.03	205	189	VERTICAL
3	5724.20	77.88	78.20	-0.32	70.99	7.27	34.65	35.03	205	189	VERTICAL
4	5743.80	109.29			102.41	7.27	34.65	35.04	205	189	VERTICAL
5	5744.00	119.84			112.96	7.27	34.65	35.04	205	189	VERTICAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5713.00	51.03	54.00	-2.97	44.15	7.27	34.64	35.03	195	188	VERTICAL
2	5713.00	68.09	74.00	-5.91	61.21	7.27	34.64	35.03	195	188	VERTICAL
3	5723.80	69.63	78.20	-8.57	62.74	7.27	34.65	35.03	195	188	VERTICAL
4	5782.60	124.50			117.62	7.27	34.66	35.05	195	188	VERTICAL
5	5783.40	113.70			106.82	7.27	34.66	35.05	195	188	VERTICAL
6	5853.40	72.05	78.20	-6.15	65.18	7.26	34.67	35.06	195	188	VERTICAL
7	5863.00	50.50	54.00	-3.50	43.63	7.26	34.67	35.06	195	188	VERTICAL
8	5863.80	68.03	74.00	-5.97	61.16	7.26	34.67	35.06	195	188	VERTICAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5820.80	120.49			113.61	7.27	34.66	35.05	243	7	VERTICAL
2	5830.80	109.49			102.62	7.26	34.67	35.06	243	7	VERTICAL
3	5850.80	74.49	78.20	-3.71	67.62	7.26	34.67	35.06	243	7	VERTICAL
4	5860.00	52.97	54.00	-1.03	46.10	7.26	34.67	35.06	243	7	VERTICAL
5	5860.20	68.44	74.00	-5.56	61.57	7.26	34.67	35.06	243	7	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.60	67.50	74.00	-6.50	61.26	7.20	34.04	35.00	Peak	212	314	VERTICAL
2	5149.80	53.22	54.00	-0.78	46.98	7.20	34.04	35.00	Average	212	314	VERTICAL
3	5171.80	107.24			100.94	7.21	34.09	35.00	Average	212	314	VERTICAL
4	5185.20	118.22			111.92	7.21	34.09	35.00	Peak	212	314	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.60	66.60	74.00	-7.40	60.36	7.20	34.04	35.00	Peak	221	314	VERTICAL
2	5150.00	51.94	54.00	-2.06	45.70	7.20	34.04	35.00	Average	221	314	VERTICAL
3	5192.00	109.59			103.26	7.21	34.12	35.00	Average	221	314	VERTICAL
4	5205.20	121.22			114.86	7.22	34.14	35.00	Peak	221	314	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	48.96	54.00	-5.04	42.72	7.20	34.04	35.00	Average	258	50	HORIZONTAL
2	5150.00	61.41	74.00	-12.59	55.17	7.20	34.04	35.00	Peak	258	50	HORIZONTAL
3	5192.80	106.33			100.00	7.21	34.12	35.00	Average	258	50	HORIZONTAL
4	5193.20	116.49			110.16	7.21	34.12	35.00	Peak	258	50	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5711.80	68.03	74.00	-5.97	61.15	7.27	34.64	35.03	Peak	213	169	VERTICAL
2	5712.20	53.83	54.00	-0.17	46.95	7.27	34.64	35.03	Average	213	169	VERTICAL
3	5725.00	70.88	78.20	-7.32	63.99	7.27	34.65	35.03	Peak	213	169	VERTICAL
4	5749.40	119.95			113.07	7.27	34.65	35.04	Peak	213	169	VERTICAL
5	5751.00	109.86			102.98	7.27	34.65	35.04	Average	213	169	VERTICAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5705.20	65.37	74.00	-8.63	58.49	7.27	34.64	35.03	Peak	212	170	VERTICAL
2	5712.40	50.77	54.00	-3.23	43.89	7.27	34.64	35.03	Average	212	170	VERTICAL
3	5722.00	68.58	78.20	-9.62	61.70	7.27	34.64	35.03	Peak	212	170	VERTICAL
4	5780.20	123.76			116.88	7.27	34.66	35.05	Peak	212	170	VERTICAL
5	5780.80	113.41			106.53	7.27	34.66	35.05	Average	212	170	VERTICAL
6	5857.60	70.00	78.20	-8.20	63.13	7.26	34.67	35.06	Peak	212	170	VERTICAL
7	5860.00	52.08	54.00	-1.92	45.21	7.26	34.67	35.06	Average	212	170	VERTICAL
8	5860.00	68.80	74.00	-5.20	61.93	7.26	34.67	35.06	Peak	212	170	VERTICAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5705.80	59.99	74.00	-14.01	53.11	7.27	34.64	35.03	Peak	233	153	HORIZONTAL
2	5715.00	48.05	54.00	-5.95	41.17	7.27	34.64	35.03	Average	233	153	HORIZONTAL
3	5724.40	64.24	78.20	-13.96	57.35	7.27	34.65	35.03	Peak	233	153	HORIZONTAL
4	5779.60	107.64			100.76	7.27	34.66	35.05	Average	233	153	HORIZONTAL
5	5780.80	118.23			111.35	7.27	34.66	35.05	Peak	233	153	HORIZONTAL
6	5850.40	64.59	78.20	-13.61	57.72	7.26	34.67	35.06	Peak	233	153	HORIZONTAL
7	5863.60	48.09	54.00	-5.91	41.22	7.26	34.67	35.06	Average	233	153	HORIZONTAL
8	5864.20	62.67	74.00	-11.33	55.80	7.26	34.67	35.06	Peak	233	153	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5825 MHz.

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.60	53.63	54.00	-0.37	47.39	7.20	34.04	35.00	Average	240	196	VERTICAL
2	5148.40	67.14	74.00	-6.86	60.90	7.20	34.04	35.00	Peak	240	196	VERTICAL
3	5185.60	103.33			97.03	7.21	34.09	35.00	Average	240	196	VERTICAL
4	5206.00	113.39			107.03	7.22	34.14	35.00	Peak	240	196	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5149.20	65.61	74.00	-8.39	59.37	7.20	34.04	35.00	Peak	230	200	VERTICAL
2	5150.00	51.71	54.00	-2.29	45.47	7.20	34.04	35.00	Average	230	200	VERTICAL
3	5228.00	114.53			108.15	7.22	34.16	35.00	Peak	230	200	VERTICAL
4	5228.80	104.93			98.55	7.22	34.16	35.00	Average	230	200	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 151

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5708.60	68.02	74.00	-5.98	61.14	7.27	34.64	35.03	Peak	211	170	VERTICAL
2	5715.00	53.94	54.00	-0.06	47.06	7.27	34.64	35.03	Average	211	170	VERTICAL
3	5725.00	75.08	78.20	-3.12	68.19	7.27	34.65	35.03	Peak	211	170	VERTICAL
4	5745.80	103.42			96.54	7.27	34.65	35.04	Average	211	170	VERTICAL
5	5747.40	113.08			106.20	7.27	34.65	35.04	Peak	211	170	VERTICAL

Item 4, 5 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5687.60	59.56	74.00	-14.44	52.67	7.28	34.64	35.03	Peak	258	7	VERTICAL
2	5703.20	47.71	54.00	-6.29	40.83	7.27	34.64	35.03	Average	258	7	VERTICAL
3	5725.00	63.59	78.20	-14.61	56.70	7.27	34.65	35.03	Peak	258	7	VERTICAL
4	5783.00	115.74			108.86	7.27	34.66	35.05	Peak	258	7	VERTICAL
5	5802.20	104.44			97.56	7.27	34.66	35.05	Average	258	7	VERTICAL
6	5851.40	70.20	78.20	-8.00	63.33	7.26	34.67	35.06	Peak	258	7	VERTICAL
7	5860.00	69.17	74.00	-4.83	62.30	7.26	34.67	35.06	Peak	258	7	VERTICAL
8	5860.40	53.82	54.00	-0.18	46.95	7.26	34.67	35.06	Average	258	7	VERTICAL

Item 4, 5 are the fundamental frequency at 5795 MHz.

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant. 2 + Ant. 3 + Ant. 4
Test Date	Dec. 19, 2015		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.00	53.52	54.00	-0.48	47.28	7.20	34.04	35.00	Average	227	177	VERTICAL
2	5150.00	69.19	74.00	-4.81	62.95	7.20	34.04	35.00	Peak	227	177	VERTICAL
3	5199.00	108.41			102.08	7.21	34.12	35.00	Peak	227	177	VERTICAL
4	5248.00	96.88			90.45	7.22	34.21	35.00	Average	227	177	VERTICAL
5	5350.00	47.75	54.00	-6.25	41.14	7.25	34.36	35.00	Average	227	177	VERTICAL
6	5363.00	60.54	74.00	-13.46	53.90	7.26	34.38	35.00	Peak	227	177	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5710.00	51.72	54.00	-2.28	44.84	7.27	34.64	35.03	Average	279	10	VERTICAL
2	5711.00	64.54	74.00	-9.46	57.66	7.27	34.64	35.03	Peak	279	10	VERTICAL
3	5725.00	73.20	78.20	-5.00	66.31	7.27	34.65	35.03	Peak	279	10	VERTICAL
4	5780.00	106.33			99.45	7.27	34.66	35.05	Peak	279	10	VERTICAL
5	5787.00	95.83			88.95	7.27	34.66	35.05	Average	279	10	VERTICAL
6	5851.00	65.63	78.20	-12.57	58.76	7.26	34.67	35.06	Peak	279	10	VERTICAL
7	5864.00	67.94	74.00	-6.06	61.07	7.26	34.67	35.06	Peak	279	10	VERTICAL
8	5865.00	53.58	54.00	-0.42	46.71	7.26	34.67	35.06	Average	279	10	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.8.4. Test Setup Layout

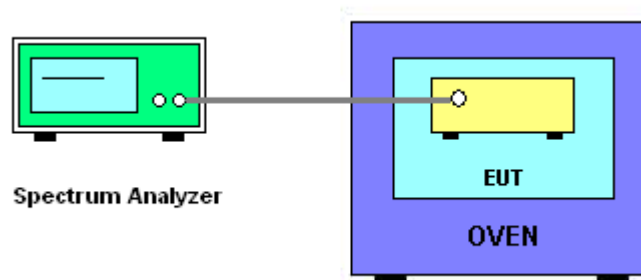

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	24°C	Humidity	60%
Test Engineer	Wen Chao	Test Date	Jan. 04, 2016

Mode: 20 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9922	5199.9919	5199.9918	5199.9912
110.00	5199.9913	5199.9909	5199.9904	5199.9900
93.50	5199.9911	5199.9910	5199.9904	5199.9899
Max. Deviation (MHz)	0.0089	0.0091	0.0096	0.0101
Max. Deviation (ppm)	1.71	1.75	1.85	1.94
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5199.9933	5199.9930	5199.9921	5199.9914
10	5199.9926	5199.9916	5199.9910	5199.9903
20	5199.9913	5199.9903	5199.9898	5199.9888
30	5199.9761	5199.9759	5199.9752	5199.9744
40	5199.9742	5199.9736	5199.9727	5199.9722
Max. Deviation (MHz)	0.0258	0.0264	0.0273	0.0278
Max. Deviation (ppm)	4.96	5.08	5.25	5.35
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9915	5784.9912	5784.9903	5784.9898
110.00	5784.9913	5784.9910	5784.9903	5784.9898
93.50	5784.9911	5784.9902	5784.9892	5784.9882
Max. Deviation (MHz)	0.0089	0.0098	0.0108	0.0118
Max. Deviation (ppm)	1.54	1.69	1.87	2.04
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5784.9925	5784.9922	5784.9913	5784.9907
10	5784.9916	5784.9915	5784.9906	5784.9900
20	5784.9913	5784.9907	5784.9902	5784.9901
30	5784.9761	5784.9753	5784.9743	5784.9736
40	5784.9742	5784.9739	5784.9737	5784.9736
Max. Deviation (MHz)	0.0258	0.0261	0.0263	0.0264
Max. Deviation (ppm)	4.46	4.51	4.55	4.56
Result	Complies			

Mode: 40 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9919	5189.9911	5189.9910	5189.9906
110.00	5189.9913	5189.9904	5189.9902	5189.9898
93.50	5189.9909	5189.9905	5189.9901	5189.9893
Max. Deviation (MHz)	0.0091	0.0096	0.0099	0.0107
Max. Deviation (ppm)	1.75	1.85	1.91	2.06
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5189.9946	5189.9936	5189.9929	5189.9923
10	5189.9928	5189.9919	5189.9909	5189.9908
20	5189.9913	5189.9903	5189.9897	5189.9896
30	5189.9761	5189.9755	5189.9747	5189.9737
40	5189.9743	5189.9734	5189.9731	5189.9730
Max. Deviation (MHz)	0.0257	0.0266	0.0269	0.0270
Max. Deviation (ppm)	4.95	5.13	5.18	5.20
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9919	5754.9909	5754.9900	5754.9897
110.00	5754.9913	5754.9909	5754.9905	5754.9899
93.50	5754.9905	5754.9899	5754.9893	5754.9883
Max. Deviation (MHz)	0.0095	0.0101	0.0107	0.0117
Max. Deviation (ppm)	1.65	1.75	1.86	2.03
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5754.9942	5754.9934	5754.9928	5754.9921
10	5754.9925	5754.9921	5754.9911	5754.9909
20	5754.9913	5754.9910	5754.9903	5754.9893
30	5754.9761	5754.9752	5754.9751	5754.9741
40	5754.9744	5754.9740	5754.9736	5754.9728
Max. Deviation (MHz)	0.0256	0.0260	0.0264	0.0272
Max. Deviation (ppm)	4.45	4.52	4.59	4.73
Result	Complies			

Mode: 80 MHz / Ant. 4

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9914	5209.9912	5209.9911	5209.9901
110.00	5209.9913	5209.9906	5209.9902	5209.9901
93.50	5209.9910	5209.9905	5209.9899	5209.9891
Max. Deviation (MHz)	0.0090	0.0095	0.0101	0.0109
Max. Deviation (ppm)	1.73	1.82	1.94	2.09
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5209.9942	5209.9940	5209.9935	5209.9930
10	5209.9927	5209.9917	5209.9908	5209.9904
20	5209.9913	5209.9912	5209.9904	5209.9895
30	5209.9761	5209.9757	5209.9748	5209.9746
40	5209.9757	5209.9748	5209.9738	5209.9728
Max. Deviation (MHz)	0.0243	0.0252	0.0262	0.0272
Max. Deviation (ppm)	4.66	4.84	5.03	5.22
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9919	5774.9911	5774.9909	5774.9902
110.00	5774.9913	5774.9907	5774.9898	5774.9888
93.50	5774.9908	5774.9898	5774.9895	5774.9886
Max. Deviation (MHz)	0.0092	0.0102	0.0105	0.0114
Max. Deviation (ppm)	1.59	1.77	1.82	1.97
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5774.9921	5774.9919	5774.9918	5774.9914
10	5774.9915	5774.9907	5774.9901	5774.9898
20	5774.9913	5774.9906	5774.9900	5774.9892
30	5774.9761	5774.9757	5774.9751	5774.9745
40	5774.9753	5774.9747	5774.9743	5774.9738
Max. Deviation (MHz)	0.0247	0.0253	0.0257	0.0262
Max. Deviation (ppm)	4.28	4.38	4.45	4.54
Result	Complies			

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%