



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

|                     |  |
|---------------------|--|
| Applicant's company | D-Link Corporation   |
| Applicant Address   | No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C. |
| FCC ID              | KA2IR880LA1  |

|                   |  |
|-------------------|--|
| Product Name      | Wireless AC1900 Dual Band Gigabit Cloud Router |
| Brand Name        | D-Link   |
| Model No.         | DIR-880L, DIR-880LW                            |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart E § 15.407          |
| Test Freq. Range  | 5150 ~ 5250MHz                                 |
| Received Date     | Nov. 09, 2013                                  |
| Final Test Date   | Jan. 27, 2014                                  |
| Submission Type   | Original Equipment                             |

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|   |                |
|---|----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                       | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                      | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                             | <b>3</b>       |
| 3.1. Product Details.....                                       | 3              |
| 3.2. Accessories.....   | 5              |
| 3.3. Table for Filed Antenna.....                               | 6              |
| 3.4. Table for Carrier Frequencies .....                        | 7              |
| 3.5. Table for Product Information .....                        | 7              |
| 3.6. Table for Test Modes .....                                 | 8              |
| 3.7. Table for Testing Locations.....                           | 9              |
| 3.8. Table for Multiple List.....                               | 9              |
| 3.9. Table for Supporting Units .....                           | 10             |
| 3.10. Table for Parameters of Test Software Setting .....       | 11             |
| 3.11. EUT Operation during Test .....                           | 12             |
| 3.12. Duty Cycle .....  | 13             |
| 3.13. Test Configurations .....                                 | 15             |
| <b>4. TEST RESULT .....</b>                                     | <b>19</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....         | 19             |
| 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement..... | 23             |
| 4.3. Maximum Conducted Output Power Measurement.....            | 35             |
| 4.4. Power Spectral Density Measurement .....                   | 39             |
| 4.5. Peak Excursion Measurement .....                           | 48             |
| 4.6. Radiated Emissions Measurement .....                       | 56             |
| 4.7. Band Edge Emissions Measurement .....                      | 77             |
| 4.8. Frequency Stability Measurement .....                      | 85             |
| 4.9. Antenna Requirements .....                                 | 87             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                    | <b>88</b>      |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                          | <b>90</b>      |
| <b>APPENDIX A. TEST PHOTOS .....</b>                            | <b>A1 ~ A5</b> |
| <b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>           | <b>B1 ~ B3</b> |
| <b>APPENDIX C. CO-LOCATION REPORT.....</b>                      | <b>C1 ~ C3</b> |



## History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR410860AB | Rev. 01 | Initial issue of report | Feb. 14, 2014 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless AC1900 Dual Band Gigabit Cloud Router  
Brand Name : D-Link  
Model No. : DIR-880L, DIR-880LW  
Applicant : D-Link Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 09, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart E |              |  |          |             |
|--|--------------|--|----------|-------------|
| Part   | Rule Section | Description of Test                                | Result   | Under Limit |
| 4.1  | 15.207       | AC Power Line Conducted Emissions                  | Complies | 16.70 dB    |
| 4.2  | 15.407(a)    | 26dB Spectrum Bandwidth and 99% Occupied Bandwidth | Complies | -           |
| 4.3  | 15.407(a)    | Maximum Conducted Output Power                     | Complies | 0.02 dB     |
| 4.4  | 15.407(a)    | Power Spectral Density                             | Complies | 0.04 dB     |
| 4.5  | 15.407(a)    | Peak Excursion                                     | Complies | 2.70 dB     |
| 4.6  | 15.407(b)    | Radiated Emissions                                 | Complies | 0.04 dB     |
| 4.7  | 15.407(b)    | Band Edge Emissions                                | Complies | 0.18 dB     |
| 4.8  | 15.407(g)    | Frequency Stability                                | Complies | -           |
| 4.9  | 15.203       | Antenna Requirements                               | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

| Items                          | Description  |
|--------------------------------|--|
| Product Type                   | WLAN (3TX, 3RX)  |
| Radio Type                     | Intentional Transceiver  |
| Power Type                     | From power adapter   |
| Modulation                     | see the below table for IEEE 802.11n/ac  |
| Data Modulation                | For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)   |
| Data Rate (Mbps)               | see the below table for IEEE 802.11n/ac  |
| Frequency Range                | 5150 ~ 5250MHz   |
| Channel Number                 | 4 for 20MHz bandwidth ; 2 for 40MHz bandwidth<br>1 for 80MHz bandwidth   |
| Channel Band Width (99%)       | <u>For non-beamforming function:</u><br>802.11ac MCS0, Nss1 (20MHz): 17.76 MHz ;<br>802.11ac MCS0, Nss1 (40MHz): 36.80 MHz ;<br>802.11ac MCS0, Nss1 (80MHz): 76.32 MHz<br><u>For beamforming function:</u><br>802.11ac MCS0, Nss1 (20MHz): 17.92 MHz ;<br>802.11ac MCS0, Nss1 (40MHz): 37.12 MHz ;<br>802.11ac MCS0, Nss1 (80MHz): 76.32 MHz |
| Maximum Conducted Output Power | <u>For non-beamforming function:</u><br>802.11ac MCS0, Nss1 (20MHz): 16.03 dBm ;<br>802.11ac MCS0, Nss1 (40MHz): 16.98 dBm ;<br>802.11ac MCS0, Nss1 (80MHz): 16.02 dBm<br><u>For beamforming function:</u><br>802.11ac MCS0, Nss1 (20MHz): 15.21 dBm ;<br>802.11ac MCS0, Nss1 (40MHz): 15.19 dBm ;<br>802.11ac MCS0, Nss1 (80MHz): 15.13 dBm |
| Carrier Frequencies            | Please refer to section 3.4  |
| Antenna                        | Please refer to section 3.3  |

**IEEE 802.11a**

| Items                          | Description                        |
|--------------------------------|------------------------------------|
| Product Type                   | WLAN (3TX, 3RX)                    |
| Radio Type                     | Intentional Transceiver            |
| Power Type                     | From power adapter                 |
| Modulation                     | OFDM for IEEE 802.11a              |
| Data Modulation                | OFDM (BPSK / QPSK / 16QAM / 64QAM) |
| Data Rate (Mbps)               | OFDM (6/9/12/18/24/36/48/54)       |
| Frequency Range                | 5150 ~ 5250MHz                     |
| Channel Number                 | 4                                  |
| Channel Band Width (99%)       | 16.96 MHz                          |
| Maximum Conducted Output Power | 16.03 dBm                          |
| Carrier Frequencies            | Please refer to section 3.4        |
| Antenna                        | Please refer to section 3.3        |

**Antenna and Bandwidth**

| Antenna       | Three (TX) |        |        |
|---------------|------------|--------|--------|
|               | 20 MHz     | 40 MHz | 80 MHz |
| IEEE 802.11a  | V          | X      | X      |
| IEEE 802.11n  | V          | V      | X      |
| IEEE 802.11ac | V          | V      | V      |

Note : The product has beamforming function for 802.11n/ac.

**IEEE 11n/ac Spec.**

| Protocol         | Number of Transmit Chains (NTX) | Data Rate / MCS |
|------------------|---------------------------------|-----------------|
| 802.11n (HT20)   | 3                               | MCS 0-23        |
| 802.11n (HT40)   | 3                               | MCS 0-23        |
| 802.11ac (VHT20) | 3                               | MCS 0-9, Nss1-3 |
| 802.11ac (VHT40) | 3                               | MCS 0-9, Nss1-3 |
| 802.11ac (VHT80) | 3                               | MCS 0-9, Nss1-3 |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

**3.2. Accessories**

| Power        | Brand | Model No. | Rating   |
|--------------|-------|-----------|--|
| Adapter      | APD   | WA-36C12R | Input: 100-240Vac, 50-60Hz, 1A Max.<br>Output: 12Vdc, 3A |
| <b>Other</b> |       |           |  |
| Plug*1       |       |           |  |


### 3.3. Table for Filed Antenna

| Ant. | Brand  | Model No.     | Type   | Connector | Gain (dBi) |      | Cable loss |      | True Gain (dBi) |      |
|------|--------|---------------|--------|-----------|------------|------|------------|------|-----------------|------|
|      |        |               |        |           | 2.4GHz     | 5GHz | 2.4GHz     | 5GHz | 2.4GHz          | 5GHz |
| 1    | WHA YU | C037-510901-A | Dipole | SMA       | 2.7        | 4.15 | 0.7        | 1.15 | 2               | 3    |
| 2    | WHA YU | C037-511311-A | Dipole | SMA       | 2.7        | 4.15 | 0.7        | 1.15 | 2               | 3    |
| 3    | WHA YU | C037-511313-A | Dipole | SMA       | 2.7        | 4.15 | 0.7        | 1.15 | 2               | 3    |

Note: 1. The total antennas amounted to three sets.

Ant. 1, Ant. 2 and Ant. 3 are identical except for the appearance of case, only the "Ant. 1" was tested and recorded in the report.

2. Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

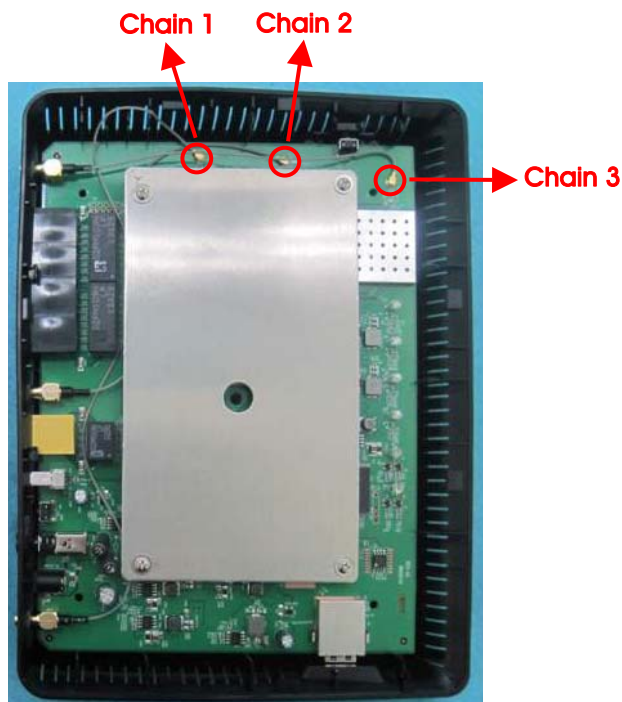

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5150~5250 MHz<br>Band 1 | 36          | 5180 MHz  | 44          | 5220 MHz  |
|                         | 38          | 5190 MHz  | 46          | 5230 MHz  |
|                         | 40          | 5200 MHz  | 48          | 5240 MHz  |
|                         | 42          | 5210 MHz  | -           | -         |

### 3.5. Table for Product Information

| Items                                | Description   |   |
|--------------------------------------|---|---|
| Communication Mode                   | <input checked="" type="checkbox"/> IP Based (Load Based) | <input type="checkbox"/> Frame Based                    |
| For 802.11a: Beamforming Function    | <input type="checkbox"/> With beamforming                 | <input checked="" type="checkbox"/> Without beamforming |
| For 802.11n/ac: Beamforming Function | <input checked="" type="checkbox"/> With beamforming      | <input type="checkbox"/> Without beamforming            |

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items   | Mode          |        | Data Rate  | Channel  | Chain |
|--|---------------|--------|------------|----------|-------|
| AC Power Conducted Emission                                      | Normal Link   |        | -          | -        | -     |
| Max. Conducted Output Power                                      | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36/40/48 | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38/46    | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36/40/48 | 1+2+3 |
| Power Spectral Density   | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36/40/48 | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38/46    | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36/40/48 | 1+2+3 |
| 26dB Spectrum Bandwidth<br>99% Occupied Bandwidth<br>Measurement | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36/40/48 | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38/46    | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36/40/48 | 1+2+3 |
| Peak Excursion<br><u>For non-beamforming function:</u>           | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36       | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38       | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36       | 1+2+3 |
| Peak Excursion<br><u>For beamforming function:</u>               | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36       | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 46       | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
| Radiated Emission Below 1GHz                                     | Normal Link   |        | -          | -        | -     |
| Radiated Emission Above 1GHz                                     | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36/40/48 | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38/46    | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36/40/48 | 1+2+3 |
| Band Edge Emission   | 11ac 20MHz    | Band 1 | MCS0, Nss1 | 36/40/48 | 1+2+3 |
|  | 11ac 40MHz    | Band 1 | MCS0, Nss1 | 38/46    | 1+2+3 |
|  | 11ac 80MHz    | Band 1 | MCS0, Nss1 | 42       | 1+2+3 |
|  | 11a/BPSK      | Band 1 | 6Mbps      | 36/40/48 | 1+2+3 |
| Frequency Stability  | Un-modulation |        | -          | 40       | 1+2+3 |

The following test modes were performed for all tests:

**For Radiated Emission below 1GHz test:**

Mode 1. Laying of EUT

Mode 2. Stand of EUT

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission above 1GHz test:**

There are two modes of EUT, one is Laying of EUT, and the other is Stand of EUT.

After evaluating, Laying of EUT has been evaluated to be the worst case.

Consequently, measurement for Radiated Emission above 1GHz test will follow this same test mode.

**For Co-location test:**

The mode "Laying of EUT" has been evaluated to be the worst case for Radiated emission test.

Consequently, measurement for Co-location test will follow this same test mode.

**For MPE and Co-location test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.7. Table for Testing Locations

| Test Site Location |  |          |              |             |              |
|--------------------|--|----------|--------------|-------------|--------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |              |
| TEL:               | 886-3-656-9065   |          |              |             |              |
| FAX:               | 886-3-656-9085   |          |              |             |              |
| Test Site No.      | Site Category  | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
| 03CH01-CB          | SAC  | Hsin Chu | 262045       | IC 4086D    | -            |
| CO02-CB            | Conduction   | Hsin Chu | 262045       | IC 4086D    | -            |
| TH01-CB            | OVEN Room  | Hsin Chu | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.8. Table for Multiple List

The EUT has two model numbers which are identical to each other in all aspects except for the following table:

| Model No. | Color of housing | Description   |
|-----------|------------------|---|
| DIR-880L  | Black            | Matched with Ant. 1(C037-510901-A) or Ant. 2 (C037-511311-A). |
| DIR-880LW | White            | Matched with Ant. 3 (C037-511313-A)                           |

From the above models, model: DIR-880L was selected as representative model for the test and its data was recorded in this report.

### 3.9. Table for Supporting Units

#### AC Power Line Conducted Emissions test:

| Support Unit | Brand   | Model         | FCC ID |
|--------------|---------|---------------|--------|
| Flash Disk   | Silicon | I-Series      | DoC    |
| HDD3.0       | WD      | WDBACY5000AWT | DoC    |
| NB           | DELL    | E6430         | DoC    |
| NB           | DELL    | E6430         | DoC    |
| NB           | DELL    | E6430         | DoC    |
| NB           | DELL    | E6430         | DoC    |

#### Radiated Emissions below 1GHz test:

| Support Unit | Brand   | Model         | FCC ID |
|--------------|---------|---------------|--------|
| Flash Disk   | Silicon | D33B03        | DoC    |
| HDD3.0       | WD      | WDBACY5000AWT | DoC    |
| NB           | DELL    | M1330         | DoC    |
| NB           | DELL    | M1340         | DoC    |
| NB           | DELL    | E6430         | DoC    |
| NB           | DELL    | D420          | DoC    |

#### Radiated Emissions above 1GHz test:

##### For non-beamforming function:

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

##### For Beamforming function:

| Support Unit     | Brand   | Model | FCC ID      |
|------------------|---------|-------|-------------|
| NB               | DELL    | E6430 | DoC         |
| NB               | DELL    | D420  | DoC         |
| WiFi USB Adapter | NETGEAR | A6200 | PY312200200 |

#### For Others test:

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

### 3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming function:

#### Power Parameters of IEEE 802.11ac MCS0, Nss1 20MHz

| Test Software Version | Munual Tool Version 2.0.1.0 |          |          |
|-----------------------|-----------------------------|----------|----------|
| Frequency             | 5180 MHz                    | 5200 MHz | 5240 MHz |
| MCS0, Nss1 20MHz      | 44                          | 43       | 42       |

#### Power Parameters of IEEE 802.11ac MCS0, Nss1 40MHz

| Test Software Version | Munual Tool Version 2.0.1.0 |          |
|-----------------------|-----------------------------|----------|
| Frequency             | 5190 MHz                    | 5230 MHz |
| MCS0, Nss1 40MHz      | 48                          | 47       |

#### Power Parameters of IEEE 802.11ac MCS0, Nss1 80MHz

| Test Software Version | Munual Tool Version 2.0.1.0 |
|-----------------------|-----------------------------|
| Frequency             | 5210 MHz                    |
| MCS0, Nss1 80MHz      | 43                          |

#### Power Parameters of IEEE 802.11a

| Test Software Version | Munual Tool Version 2.0.1.0 |          |          |
|-----------------------|-----------------------------|----------|----------|
| Frequency             | 5180 MHz                    | 5200 MHz | 5240 MHz |
| IEEE 802.11a          | 44                          | 42       | 41       |

For beamforming function:

**Power Parameters of IEEE 802.11ac MCS0, Nss1 20MHz**

| Test Software Version | Munual Tool Version 2.0.1.0 |          |          |
|-----------------------|-----------------------------|----------|----------|
| Frequency             | 5180 MHz                    | 5200 MHz | 5240 MHz |
| MCS0, Nss1 20MHz      | 41                          | 40       | 40       |

**Power Parameters of IEEE 802.11ac MCS0, Nss1 40MHz**

| Test Software Version | Munual Tool Version 2.0.1.0 |          |
|-----------------------|-----------------------------|----------|
| Frequency             | 5190 MHz                    | 5230 MHz |
| MCS0, Nss1 40MHz      | 40                          | 40       |

**Power Parameters of IEEE 802.11ac MCS0, Nss1 80MHz**

| Test Software Version | Munual Tool Version 2.0.1.0 |
|-----------------------|-----------------------------|
| Frequency             | 5210 MHz                    |
| MCS0, Nss1 80MHz      | 41                          |

### 3.11. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:


During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WiFi USB Adapter and transmit duty cycle no less 98%


### 3.12. Duty Cycle

#### IEEE 802.11ac MCS0, Nss1 20MHz

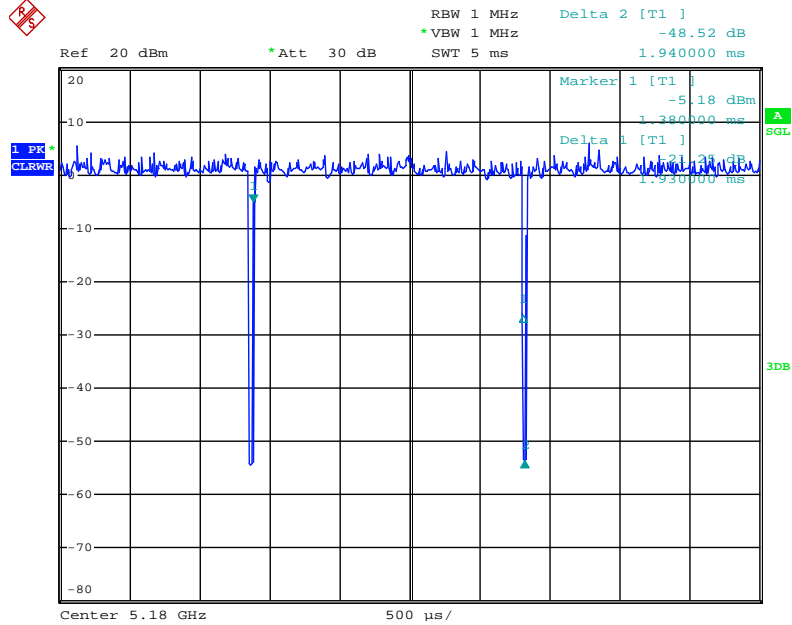


Date: 12.JAN.2014 16:24:29

#### IEEE 802.11ac MCS0, Nss1 40MHz

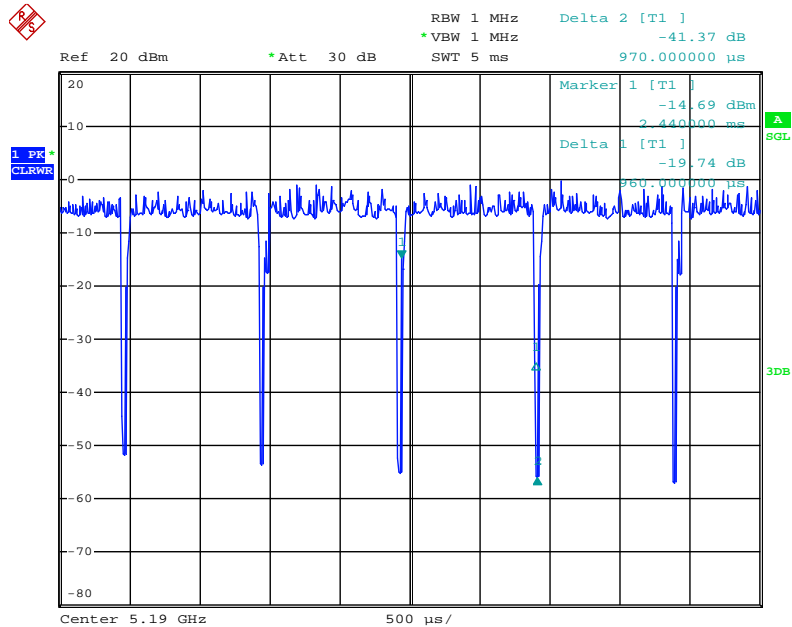


Date: 12.JAN.2014 16:26:05

IEEE 802.11ac MCS0, Nss1 80MHz

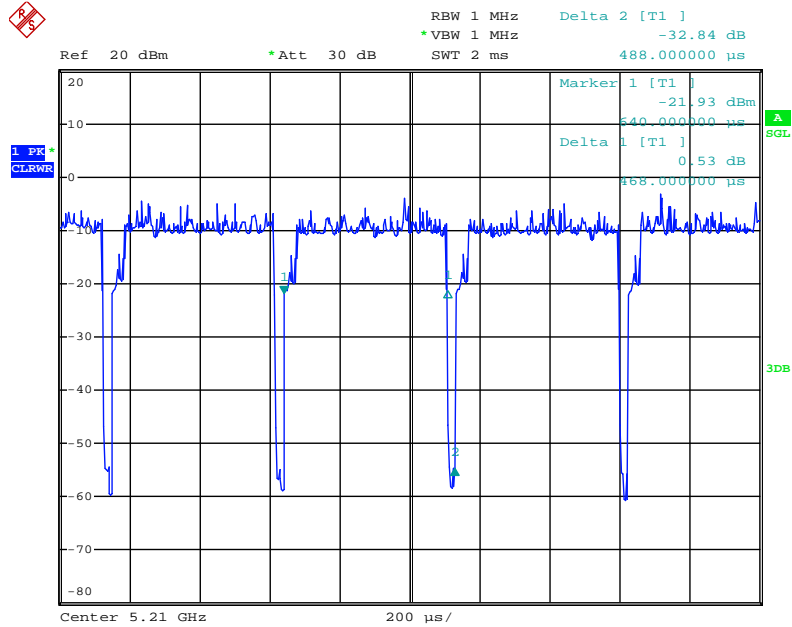

Date: 12.JAN.2014 16:27:04


IEEE 802.11a

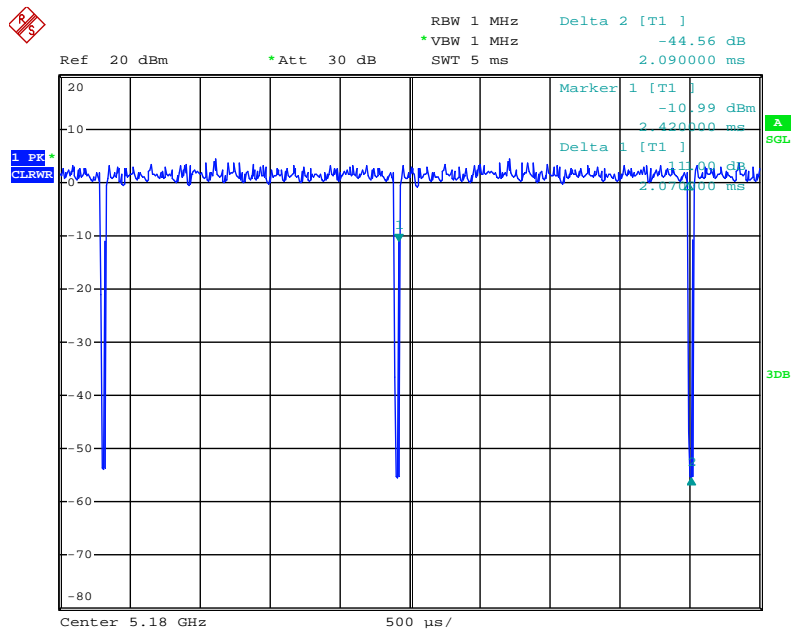

Date: 12.JAN.2014 16:25:14

### 3.13. Test Configurations


#### 3.13.1. AC Power Line Conduction Emissions Test Configuration

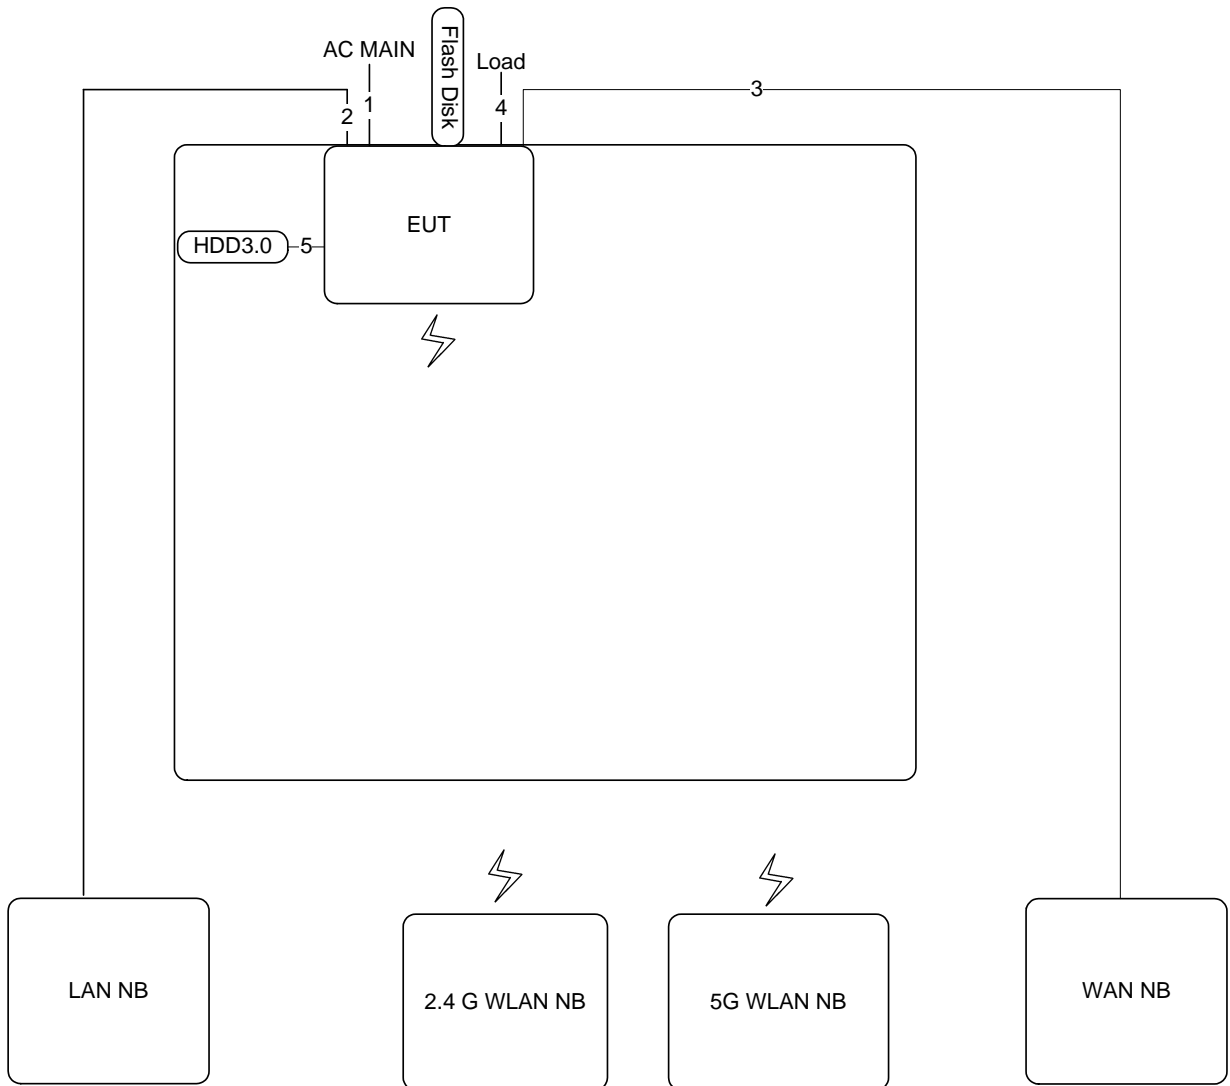

| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | Power cable   | No       | 1.5m   |
| 2    | RJ-45 cable   | No       | 10m    |
| 3    | RJ-45 cable   | No       | 10m    |
| 4    | RJ-45 cable*3 | No       | 3m     |
| 5    | USB cable     | Yes      | 0.5m   |


### 3.13.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

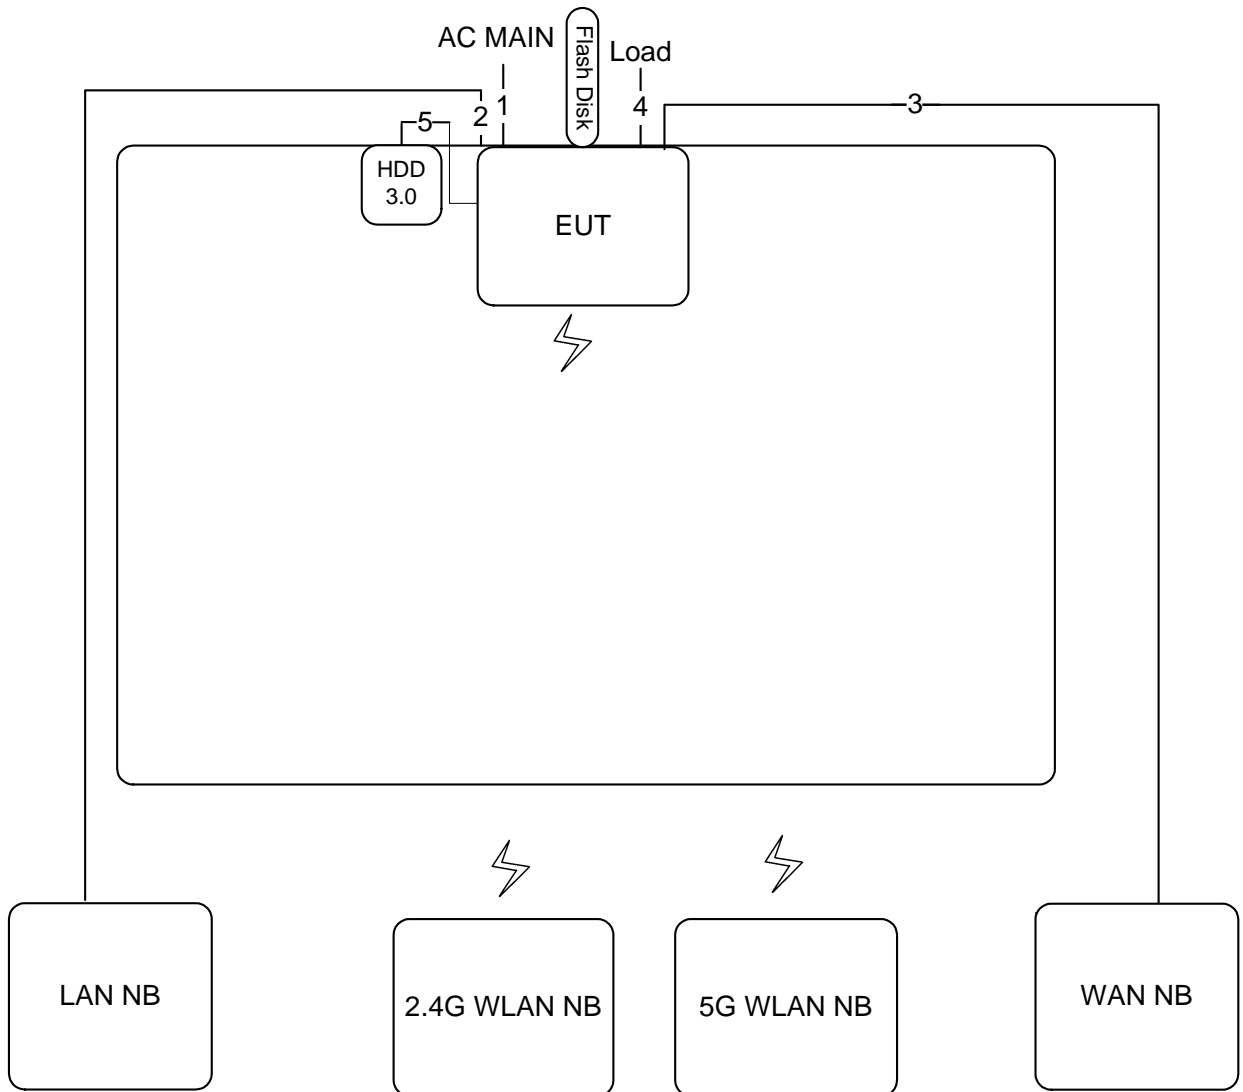


| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | Power cable   | No       | 1.5m   |
| 2    | RJ-45 cable   | No       | 10m    |
| 3    | RJ-45 cable   | No       | 10m    |
| 4    | RJ-45 cable*3 | No       | 3m     |
| 5    | USB cable     | No       | 0.2m   |

Test Configuration: above 1GHz / For non-beamforming function:

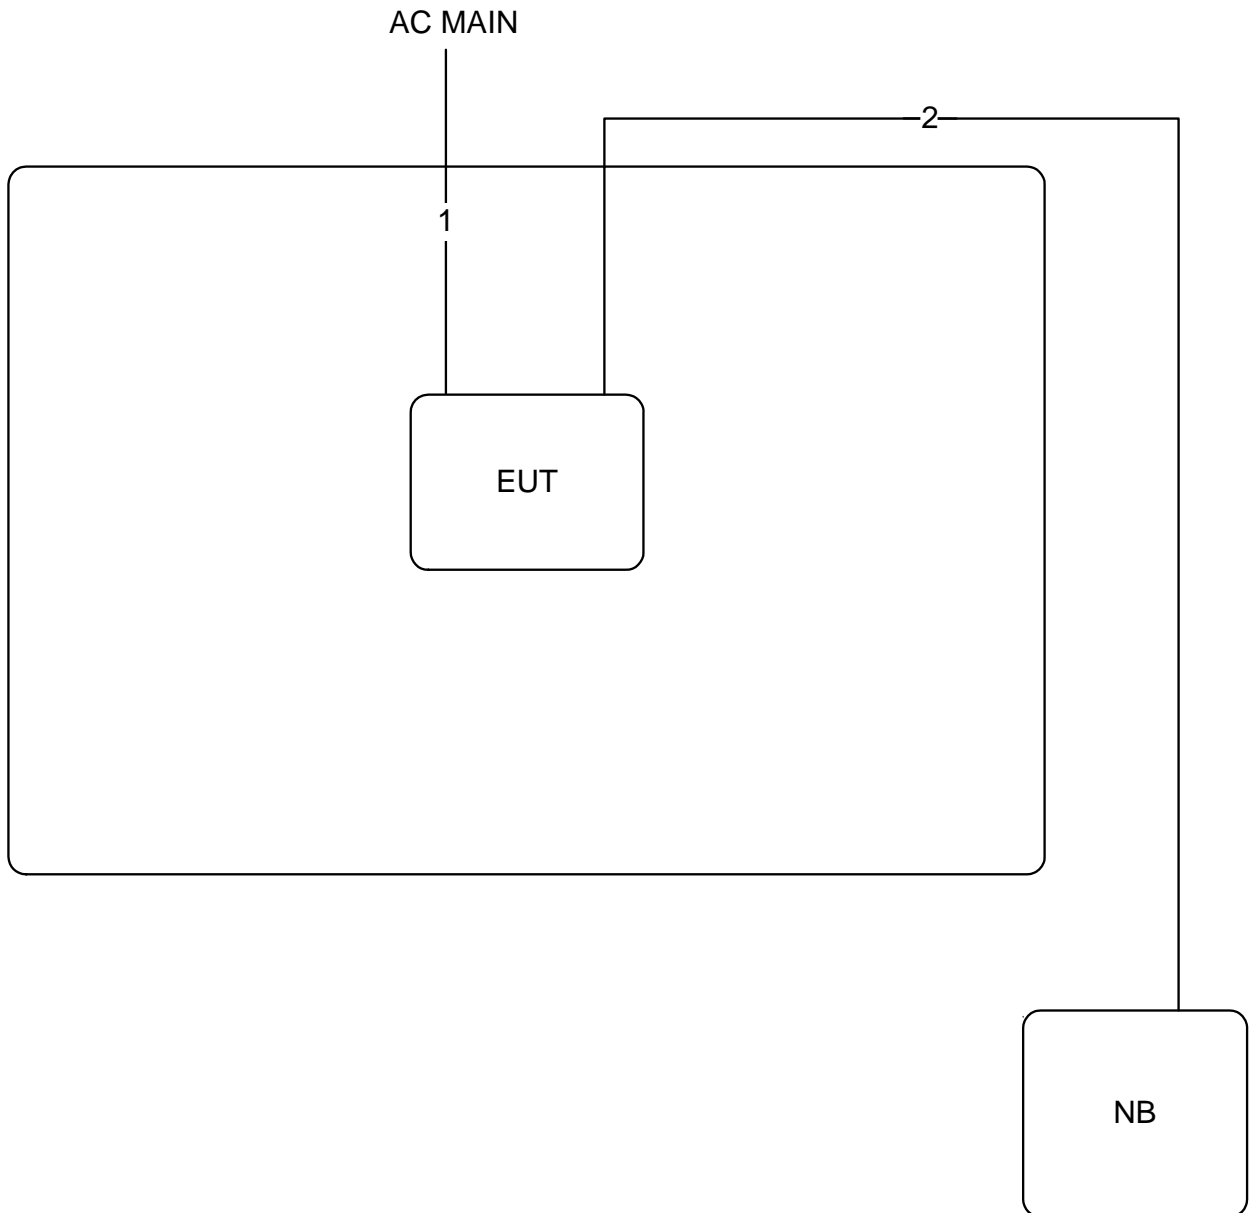

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 1.5m   |
| 2    | RJ-45 cable | No       | 10m    |

For beamforming function:

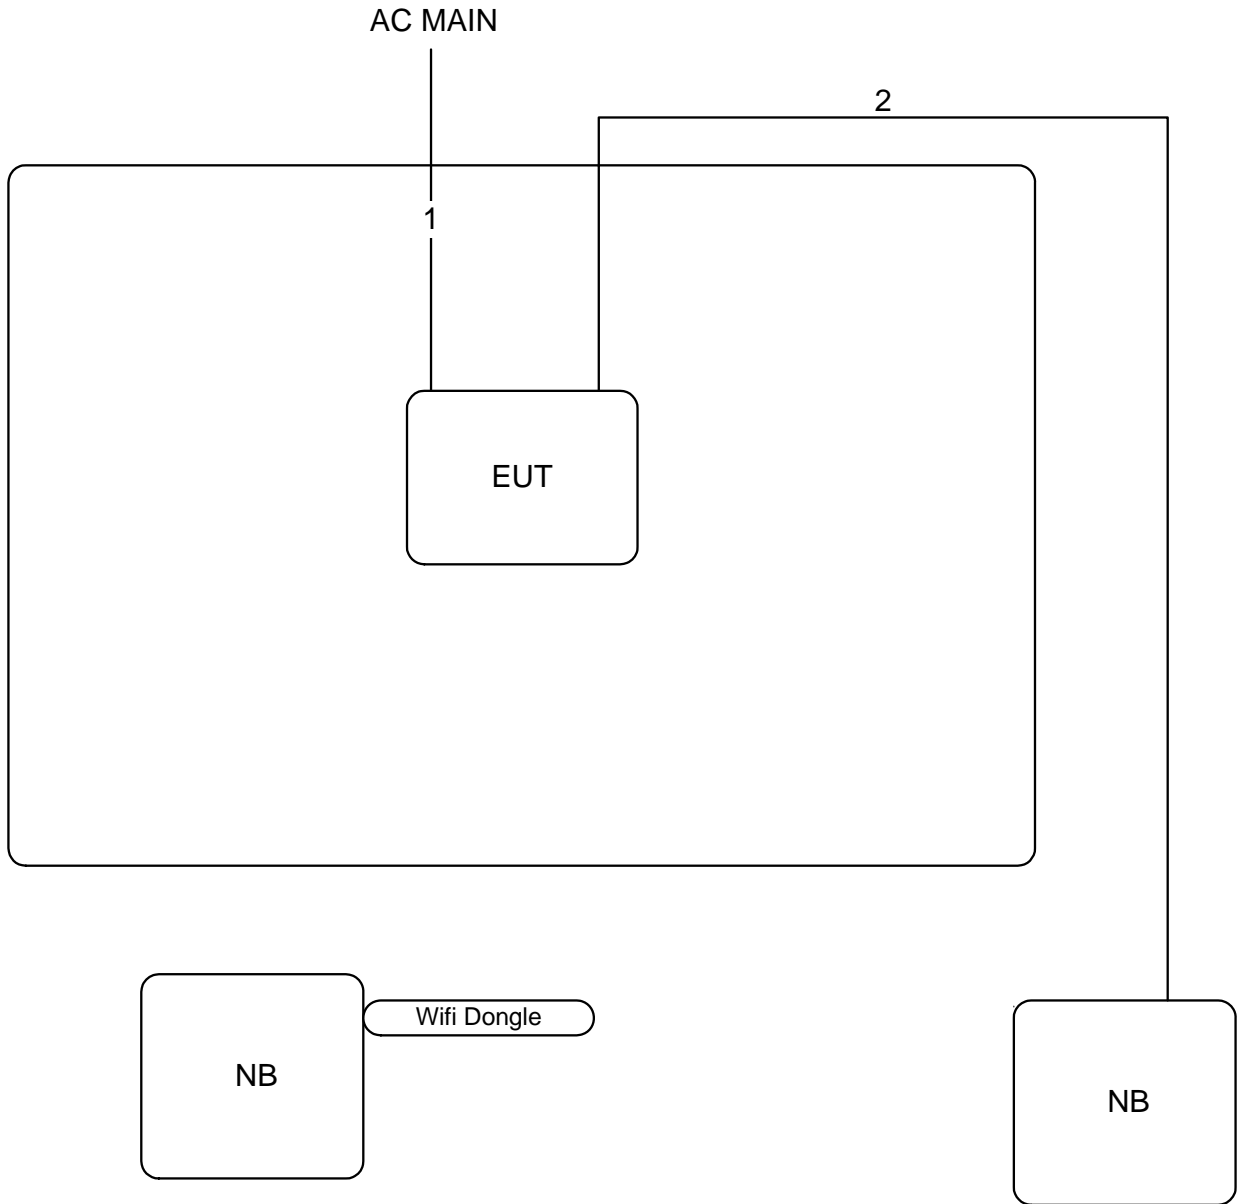

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 1.5m   |
| 2    | RJ-45 cable | No       | 10m    |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

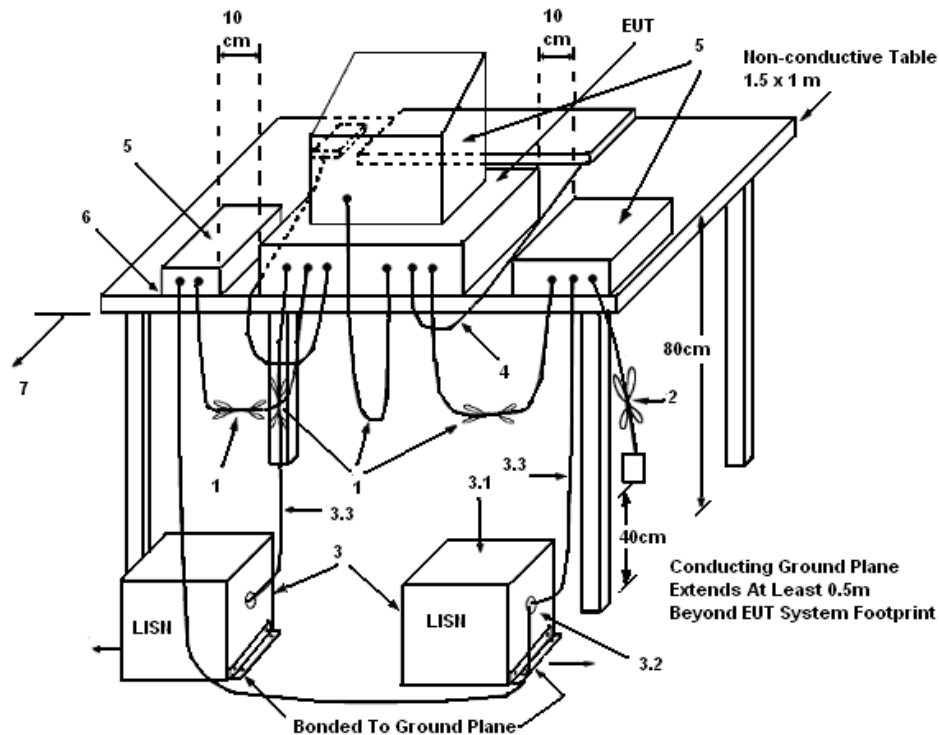

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |             |          |      |
|---------------|-------------|----------|------|
| Temperature   | 23°C        | Humidity | 51%  |
| Test Engineer | Kane Liu    | Phase    | Line |
| Configuration | Normal Link |          |      |

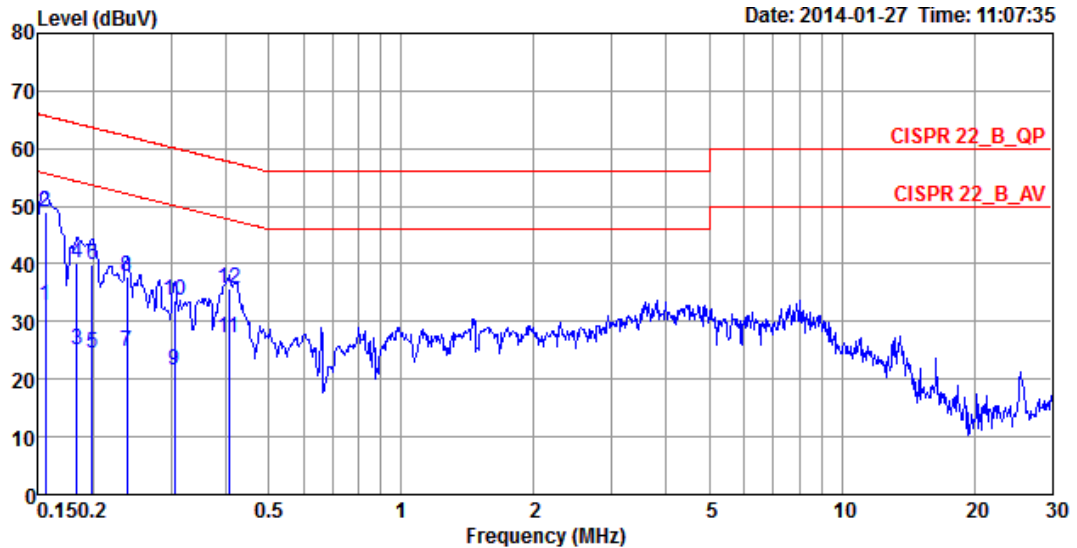

|      | Freq   | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  | Pol/Phase |
|------|--------|-------|------------|------------|------------|-------------|------------|---------|-----------|
|      | MHz    | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |           |
| 1    | 0.1557 | 32.72 | -22.97     | 55.69      | 32.45      | 0.22        | 0.05       | Average | LINE      |
| 2 q  | 0.1557 | 48.99 | -16.70     | 65.69      | 48.72      | 0.22        | 0.05       | QP      | LINE      |
| 3    | 0.1835 | 25.16 | -29.17     | 54.33      | 24.88      | 0.21        | 0.07       | Average | LINE      |
| 4    | 0.1835 | 40.20 | -24.13     | 64.33      | 39.92      | 0.21        | 0.07       | QP      | LINE      |
| 5    | 0.1986 | 24.39 | -29.28     | 53.67      | 24.11      | 0.21        | 0.07       | Average | LINE      |
| 6    | 0.1986 | 39.73 | -23.94     | 63.67      | 39.45      | 0.21        | 0.07       | QP      | LINE      |
| 7    | 0.2378 | 24.93 | -27.24     | 52.17      | 24.66      | 0.21        | 0.06       | Average | LINE      |
| 8    | 0.2378 | 37.73 | -24.44     | 62.17      | 37.46      | 0.21        | 0.06       | QP      | LINE      |
| 9    | 0.3051 | 21.54 | -28.56     | 50.10      | 21.26      | 0.22        | 0.06       | Average | LINE      |
| 10   | 0.3051 | 33.56 | -26.54     | 60.10      | 33.28      | 0.22        | 0.06       | QP      | LINE      |
| 11 a | 0.4061 | 27.11 | -20.62     | 47.73      | 26.84      | 0.22        | 0.05       | Average | LINE      |
| 12   | 0.4061 | 35.87 | -21.86     | 57.73      | 35.60      | 0.22        | 0.05       | QP      | LINE      |

|               |             |          |         |
|---------------|-------------|----------|---------|
| Temperature   | 23°C        | Humidity | 51%     |
| Test Engineer | Kane Liu    | Phase    | Neutral |
| Configuration | Normal Link |          |         |

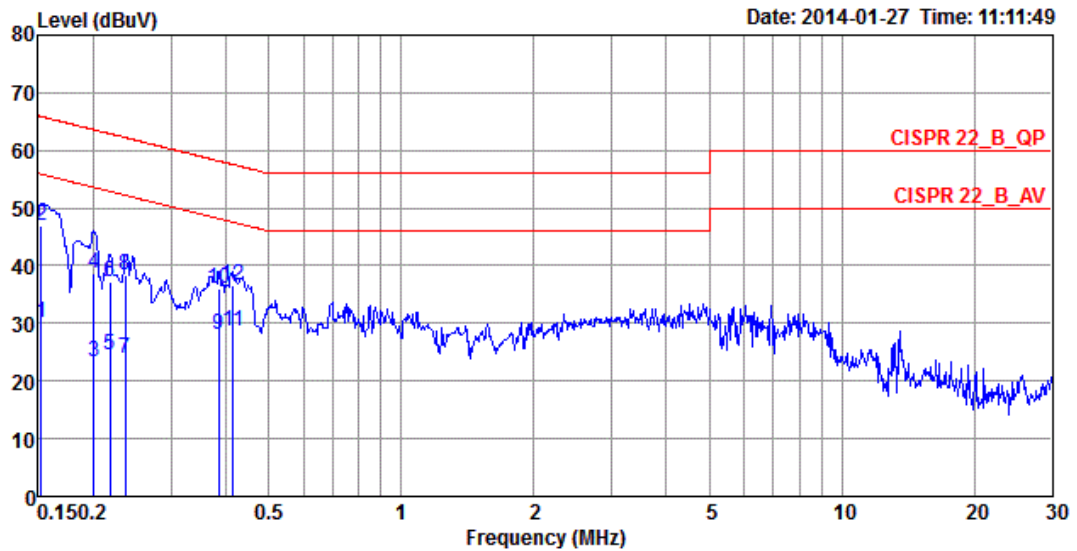

|    | Freq   | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  | Pol/Phase |
|----|--------|-------|------------|------------|------------|-------------|------------|---------|-----------|
|    | MHz    | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |           |
| 1  | 0.1524 | 30.06 | -25.81     | 55.87      | 29.92      | 0.09        | 0.05       | Average | NEUTRAL   |
| 2  | 0.1524 | 46.82 | -19.05     | 65.87      | 46.68      | 0.09        | 0.05       | QP      | NEUTRAL   |
| 3  | 0.2007 | 23.47 | -30.11     | 53.58      | 23.33      | 0.07        | 0.07       | Average | NEUTRAL   |
| 4  | 0.2007 | 38.54 | -25.04     | 63.58      | 38.40      | 0.07        | 0.07       | QP      | NEUTRAL   |
| 5  | 0.2185 | 24.42 | -28.46     | 52.88      | 24.28      | 0.07        | 0.07       | Average | NEUTRAL   |
| 6  | 0.2185 | 37.08 | -25.80     | 62.88      | 36.94      | 0.07        | 0.07       | QP      | NEUTRAL   |
| 7  | 0.2366 | 24.04 | -28.18     | 52.22      | 23.91      | 0.07        | 0.06       | Average | NEUTRAL   |
| 8  | 0.2366 | 38.49 | -23.73     | 62.22      | 38.36      | 0.07        | 0.06       | QP      | NEUTRAL   |
| 9  | 0.3852 | 27.92 | -20.25     | 48.17      | 27.79      | 0.08        | 0.05       | Average | NEUTRAL   |
| 10 | 0.3852 | 35.94 | -22.23     | 58.17      | 35.81      | 0.08        | 0.05       | QP      | NEUTRAL   |
| 11 | 0.4148 | 28.56 | -18.99     | 47.55      | 28.43      | 0.08        | 0.05       | Average | NEUTRAL   |
| 12 | 0.4148 | 36.69 | -20.86     | 57.55      | 36.56      | 0.08        | 0.05       | QP      | NEUTRAL   |

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| 26dB Bandwidth         |  |
|------------------------|--|
| Spectrum Parameters    | Setting                                    |
| Attenuation            | Auto                                       |
| Span Frequency         | > 26dB Bandwidth                           |
| RBW                    | Approximately 1% of the emission bandwidth |
| VBW                    | VBW > RBW                                  |
| Detector               | Peak                                       |
| Trace                  | Max Hold                                   |
| Sweep Time             | Auto                                       |
| 99% Occupied Bandwidth |  |
| Spectrum Parameters    | Setting                                    |
| Span                   | 1.5 times to 5.0 times the OBW             |
| RBW                    | 1 % to 5 % of the OBW                      |
| VBW                    | $\geq 3 \times \text{RBW}$                 |
| Detector               | Peak                                       |
| Trace                  | Max Hold                                   |

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

|               |              |                |               |
|---------------|--------------|----------------|---------------|
| Temperature   | 17°C         | Humidity       | 62%           |
| Test Engineer | Satoshi Yang | Configurations | IEEE 802.11ac |

For non-beamforming function:

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 20.16                | 17.76                        |
| 40      | 5200 MHz  | 20.16                | 17.76                        |
| 48      | 5240 MHz  | 20.00                | 17.60                        |

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 38      | 5190 MHz  | 40.32                | 36.80                        |
| 46      | 5230 MHz  | 40.32                | 36.48                        |

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 42      | 5210 MHz  | 82.08                | 76.32                        |

For beamforming function:

**Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 20.32                | 17.92                        |
| 40      | 5200 MHz  | 20.48                | 17.92                        |
| 48      | 5240 MHz  | 20.48                | 17.92                        |

**Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 38      | 5190 MHz  | 40.64                | 37.12                        |
| 46      | 5230 MHz  | 40.64                | 36.80                        |

**Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 42      | 5210 MHz  | 80.64                | 76.32                        |


|                      |              |                       |              |
|----------------------|--------------|-----------------------|--------------|
| <b>Temperature</b>   | 17°C         | <b>Humidity</b>       | 62%          |
| <b>Test Engineer</b> | Satoshi Yang | <b>Configurations</b> | IEEE 802.11a |

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**

| <b>Channel</b> | <b>Frequency</b> | <b>26dB Bandwidth (MHz)</b> | <b>99% Occupied Bandwidth (MHz)</b> |
|----------------|------------------|-----------------------------|-------------------------------------|
| 36             | 5180 MHz         | 19.68                       | 16.96                               |
| 40             | 5200 MHz         | 19.36                       | 16.80                               |
| 48             | 5240 MHz         | 19.52                       | 16.48                               |


For non-beamforming function:

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5180 MHz**

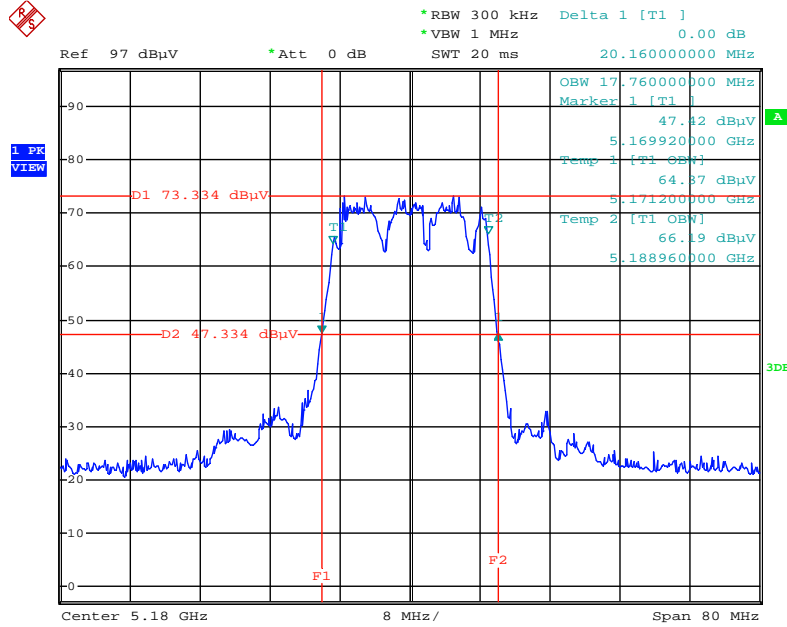


Date: 12.JAN.2014 14:43:10

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5200 MHz**

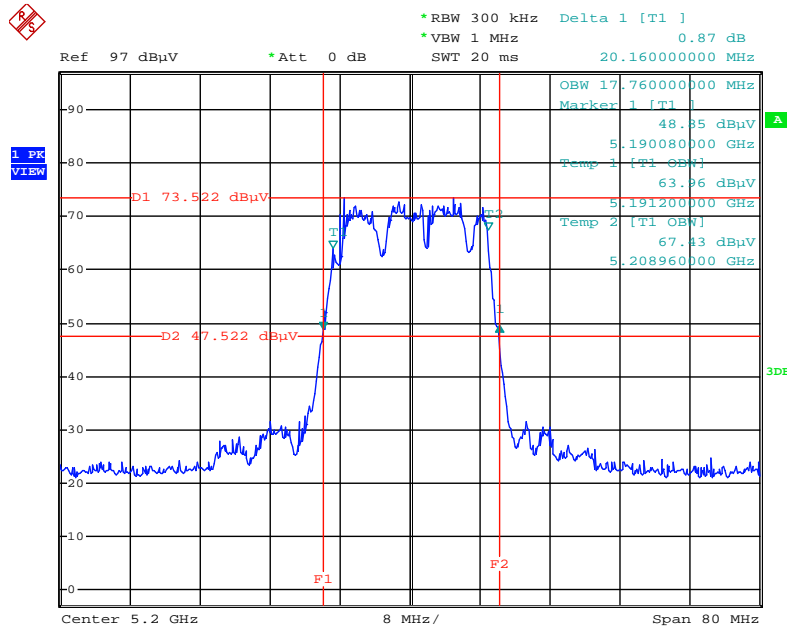


Date: 12.JAN.2014 14:42:19

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5240 MHz**

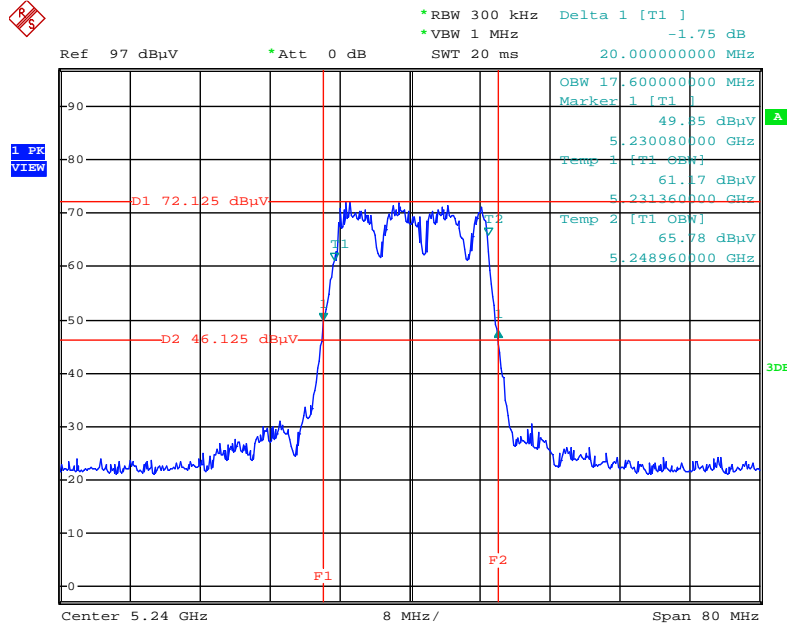


Date: 12.JAN.2014 14:41:49

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5190 MHz**

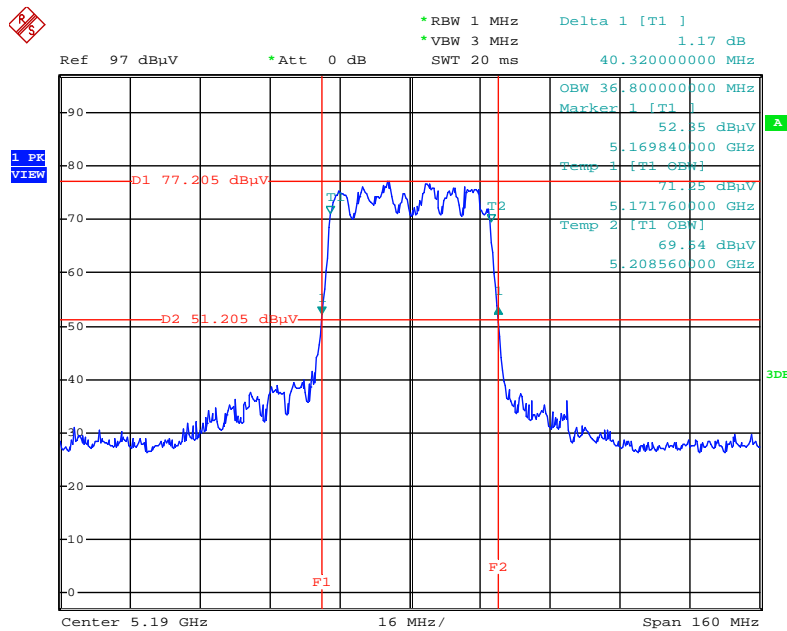


Date: 12.JAN.2014 14:43:53

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5230 MHz**

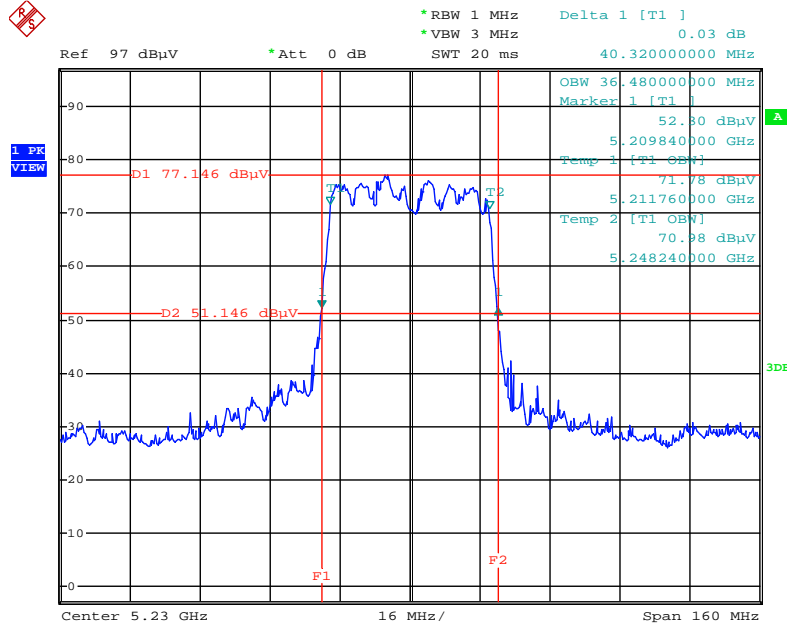


Date: 12.JAN.2014 14:44:23

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3 / 5210 MHz**

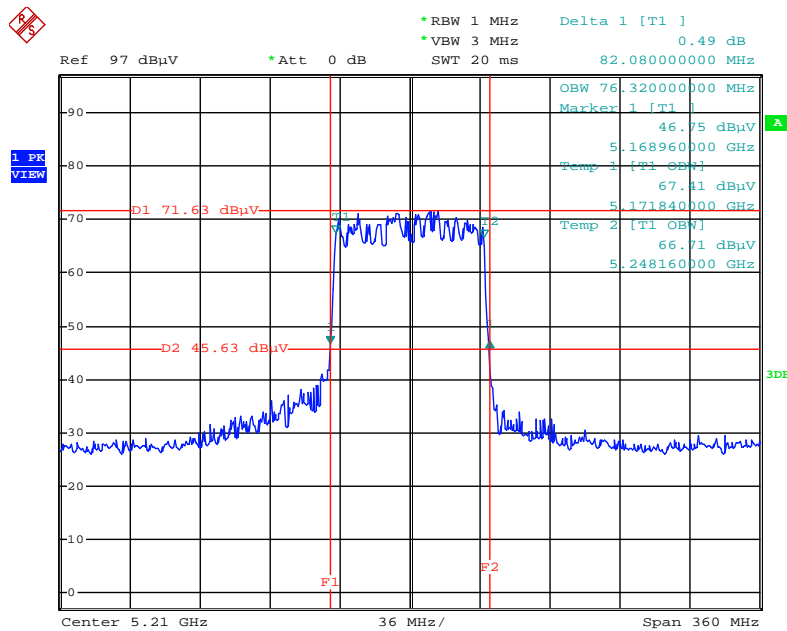


Date: 12.JAN.2014 14:49:30

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5180 MHz**

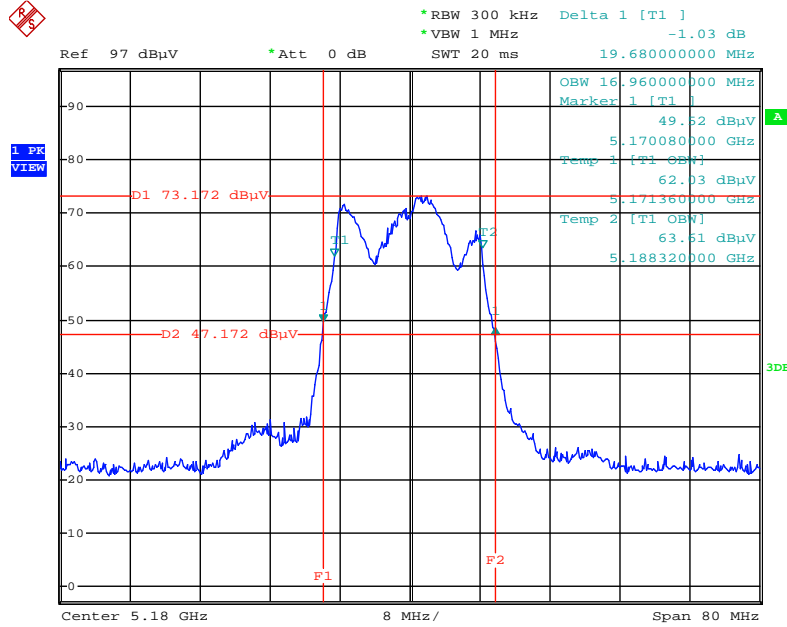


Date: 12.JAN.2014 14:16:21

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz**

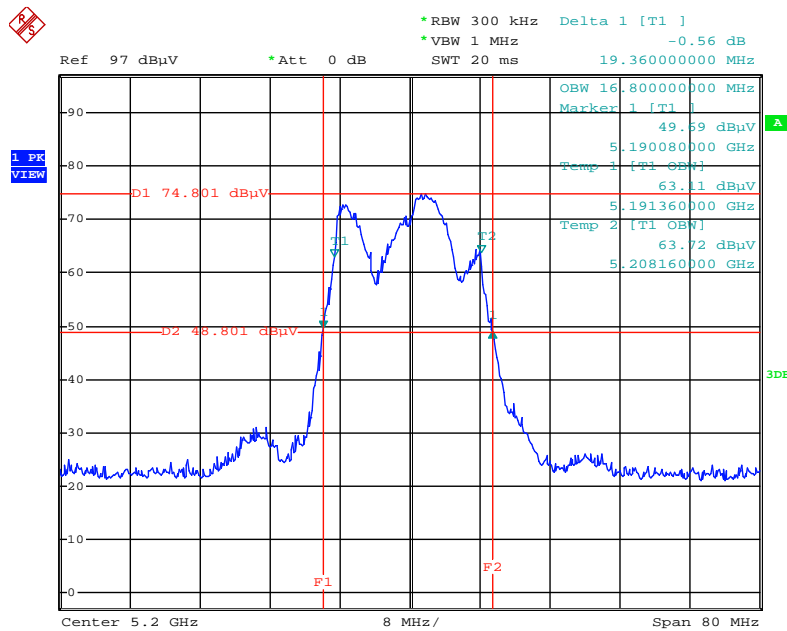

Date: 12.JAN.2014 14:28:51


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5240 MHz**

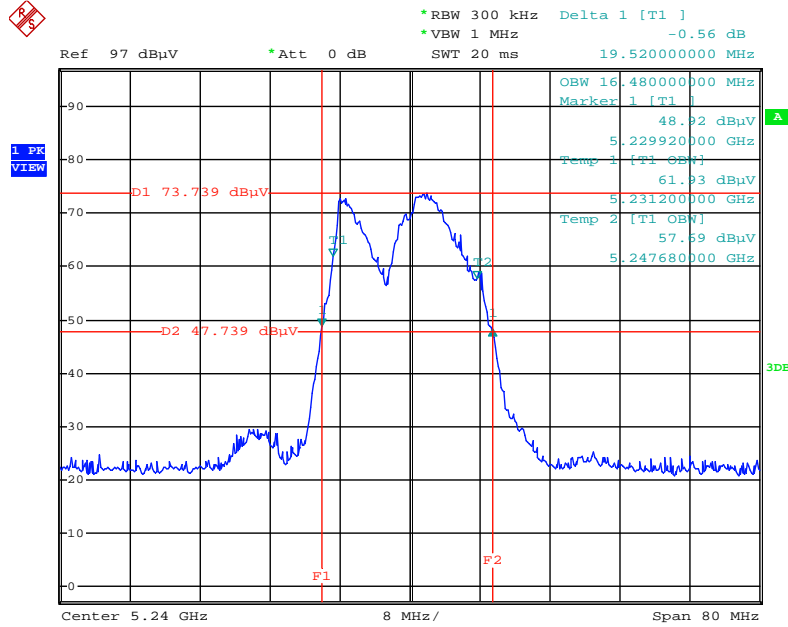

Date: 12.JAN.2014 14:29:48


For beamforming function:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

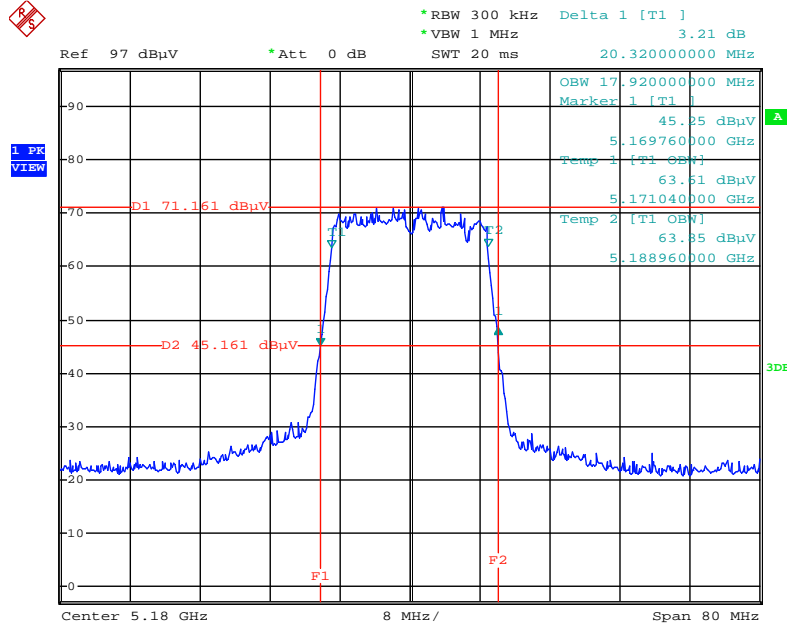


Date: 12.JAN.2014 15:41:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

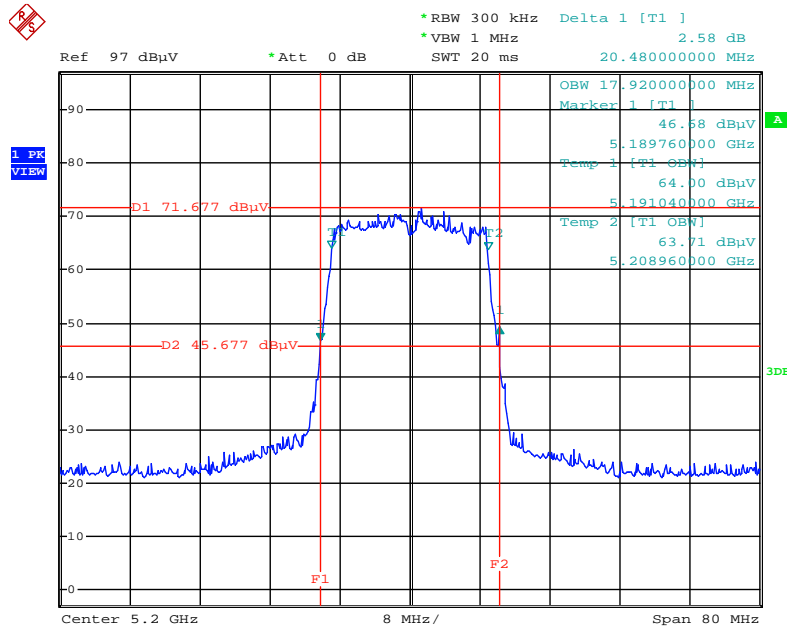


Date: 12.JAN.2014 15:45:18

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5240 MHz**

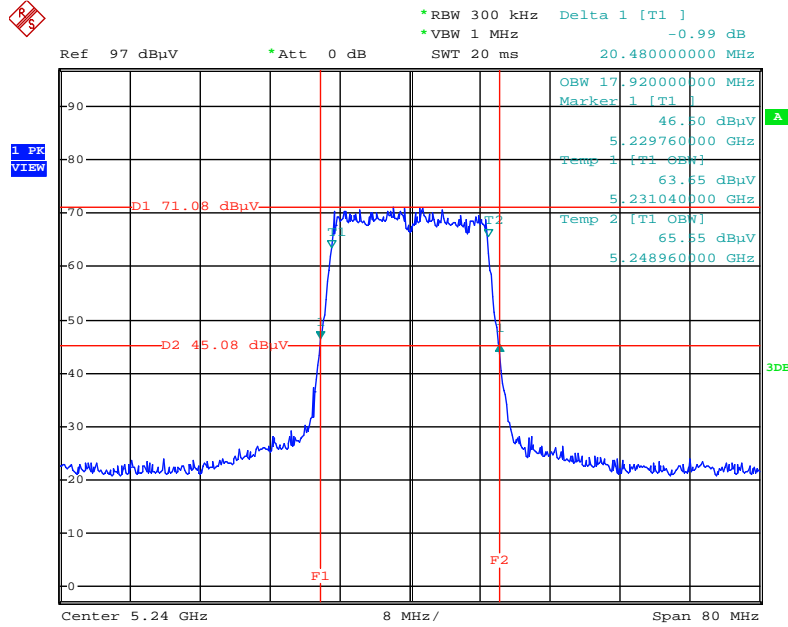


Date: 12.JAN.2014 15:45:50

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5190 MHz**

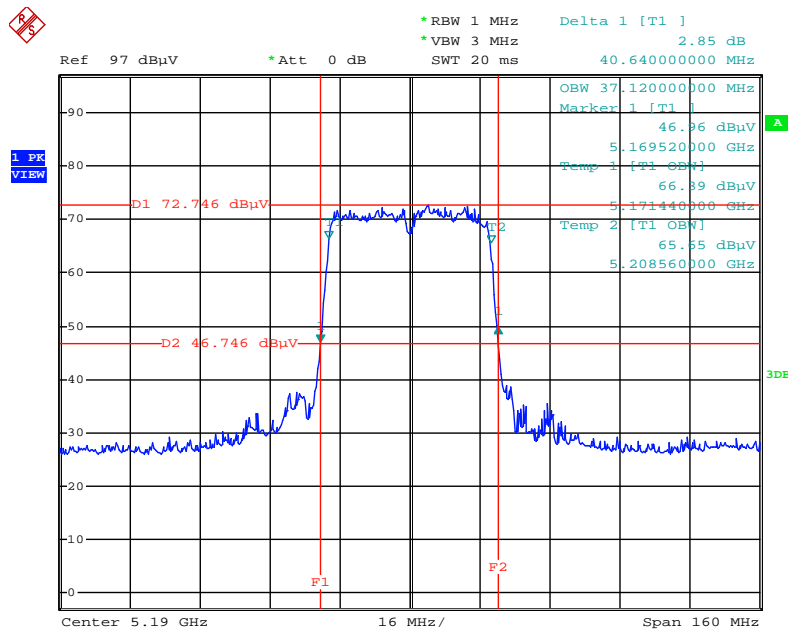


Date: 12.JAN.2014 15:50:59

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5230 MHz**

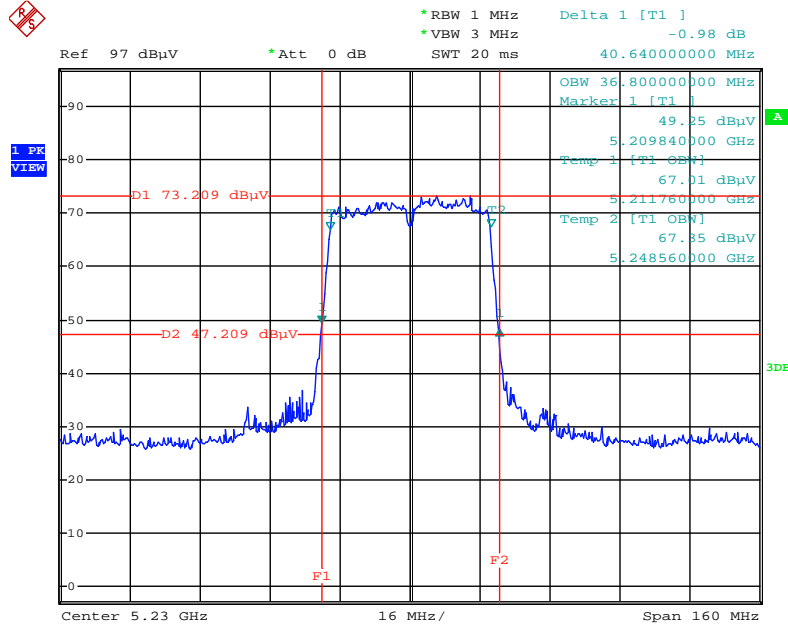

Date: 12.JAN.2014 15:51:29

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3 / 5210 MHz**

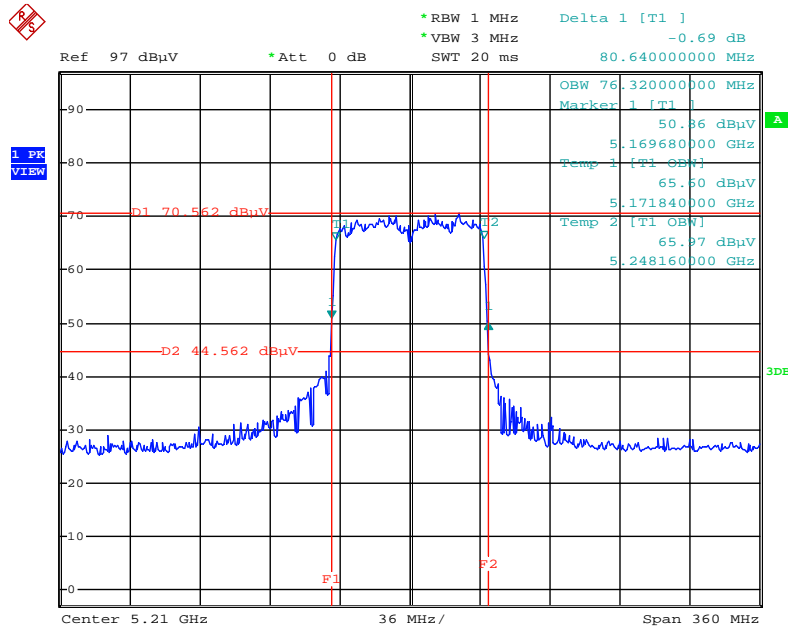

Date: 12.JAN.2014 15:39:10

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10 \log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector              | AVERAGE |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

|               |               |                |               |
|---------------|---------------|----------------|---------------|
| Temperature   | 17°C          | Humidity       | 62%           |
| Test Engineer | Satoshi Yang  | Configurations | IEEE 802.11ac |
| Test Date     | Jan. 11, 2014 |                |               |

For non-beamforming function:

Configuration IEEE 802.11ac MCS0, Nss1 20MHz

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 36      | 5180 MHz  | 11.21                 | 11.12   | 11.43   | 16.03 | 17.00            | Complies |
| 40      | 5200 MHz  | 11.23                 | 10.78   | 11.22   | 15.85 | 17.00            | Complies |
| 48      | 5240 MHz  | 10.97                 | 10.57   | 10.86   | 15.57 | 17.00            | Complies |

Configuration IEEE 802.11ac MCS0, Nss1 40MHz

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 38      | 5190 MHz  | 12.11                 | 12.22   | 12.29   | 16.98 | 17.00            | Complies |
| 46      | 5230 MHz  | 11.95                 | 12.08   | 12.11   | 16.82 | 17.00            | Complies |

Configuration IEEE 802.11ac MCS0, Nss1 80MHz

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 42      | 5210 MHz  | 11.02                 | 11.28   | 11.43   | 16.02 | 17.00            | Complies |

For beamforming function:

**Configuration IEEE 802.11ac MCS0, Nss1 20MHz**

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 36      | 5180 MHz  | 10.66                 | 10.51   | 10.13   | 15.21 | 15.23            | Complies |
| 40      | 5200 MHz  | 10.29                 | 10.19   | 10.22   | 15.00 | 15.23            | Complies |
| 48      | 5240 MHz  | 10.37                 | 10.35   | 10.29   | 15.11 | 15.23            | Complies |

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$ , so limit =  $17 - (7.77 - 6) = 15.23\text{dBm}$ .

**Configuration IEEE 802.11ac MCS0, Nss1 40MHz**

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 38      | 5190 MHz  | 10.22                 | 10.41   | 10.55   | 15.17 | 15.23            | Complies |
| 46      | 5230 MHz  | 10.27                 | 10.51   | 10.48   | 15.19 | 15.23            | Complies |

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$ , so limit =  $17 - (7.77 - 6) = 15.23\text{dBm}$ .

**Configuration IEEE 802.11ac MCS0, Nss1 80MHz**

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|---------|---------|-------|------------------|----------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |          |
| 42      | 5210 MHz  | 10.09                 | 10.43   | 10.55   | 15.13 | 15.23            | Complies |

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 7.77\text{dBi} > 6\text{dBi}$ , so limit =  $17 - (7.77 - 6) = 15.23\text{dBm}$ .

|                      |               |                       |              |
|----------------------|---------------|-----------------------|--------------|
| <b>Temperature</b>   | 17°C          | <b>Humidity</b>       | 62%          |
| <b>Test Engineer</b> | Satoshi Yang  | <b>Configurations</b> | IEEE 802.11a |
| <b>Test Date</b>     | Jan. 11, 2014 |                       |              |

**Configuration IEEE 802.11a**

| Channel | Frequency | Conducted Power (dBm) |         |         |       | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|---------|---------|-------|------------------|-----------------|
|         |           | Chain 1               | Chain 2 | Chain 3 | Total |                  |                 |
| 36      | 5180 MHz  | 11.12                 | 11.24   | 11.41   | 16.03 | 16.94            | <b>Complies</b> |
| 40      | 5200 MHz  | 10.68                 | 10.65   | 10.83   | 15.49 | 16.87            | <b>Complies</b> |
| 48      | 5240 MHz  | 10.38                 | 10.25   | 10.46   | 15.14 | 16.90            | <b>Complies</b> |

Note: Ch 36 power Limit=4+10\*log(B) or 17dBm;4+10\*log(19.68)=16.94dBm<17dBm, so limit=16.94dBm.

Ch 40 power Limit=4+10\*log(B) or 17dBm;4+10\*log(19.36)=16.87dBm<17dBm, so limit=16.87dBm.

Ch 48 power Limit=4+10\*log(B) or 17dBm;4+10\*log(19.52)=16.90dBm<17dBm, so limit=16.90dBm.

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

| Frequency Range | Power Spectral Density limit (dBm/MHz) |
|-----------------|--|
| 5.15~5.25 GHz   | 4                                      |

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                | 1000 kHz   |
| VBW                | 3000 kHz   |
| Detector           | RMS  |
| Trace              | AVERAGE  |
| Sweep Time         | Auto   |
| Trace Average      | 100 times  |

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

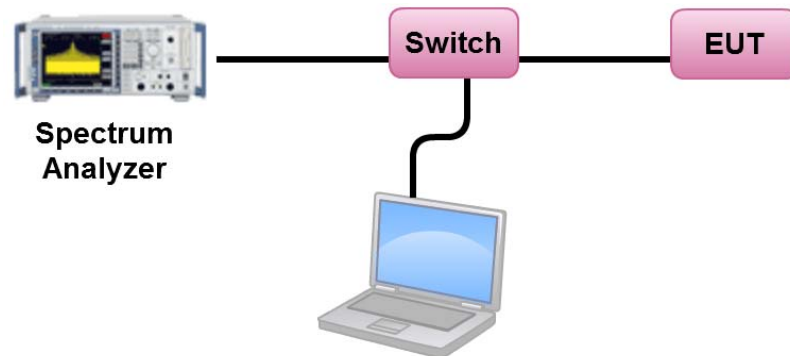

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

|               |               |                |               |
|---------------|---------------|----------------|---------------|
| Temperature   | 17°C          | Humidity       | 62%           |
| Test Engineer | Satoshi Yang  | Configurations | IEEE 802.11ac |
| Test Date     | Jan. 11, 2014 |                |               |

For non-beamforming function:

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 36      | 5180 MHz  | 2.03                          | 2.23                 | Complies |
| 40      | 5200 MHz  | 2.12                          | 2.23                 | Complies |
| 48      | 5240 MHz  | 2.14                          | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 38      | 5190 MHz  | 0.72                          | 2.23                 | Complies |
| 46      | 5230 MHz  | 0.56                          | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 42      | 5210 MHz  | -3.95                         | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

For beamforming function:

**Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 36      | 5180 MHz  | 2.05                          | 2.23                 | Complies |
| 40      | 5200 MHz  | 1.83                          | 2.23                 | Complies |
| 48      | 5240 MHz  | 1.95                          | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 38      | 5190 MHz  | -3.13                         | 2.23                 | Complies |
| 46      | 5230 MHz  | -2.71                         | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result   |
|---------|-----------|-------------------------------|----------------------|----------|
| 42      | 5210 MHz  | -5.69                         | 2.23                 | Complies |

Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{ss}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

|                      |               |                       |              |
|----------------------|---------------|-----------------------|--------------|
| <b>Temperature</b>   | 17°C          | <b>Humidity</b>       | 62%          |
| <b>Test Engineer</b> | Satoshi Yang  | <b>Configurations</b> | IEEE 802.11a |
| <b>Test Date</b>     | Jan. 11, 2014 |                       |              |

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**

| Channel | Frequency | Total Power Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result          |
|---------|-----------|-------------------------------|----------------------|-----------------|
| 36      | 5180 MHz  | 2.18                          | 2.23                 | <b>Complies</b> |
| 40      | 5200 MHz  | 2.19                          | 2.23                 | <b>Complies</b> |
| 48      | 5240 MHz  | 2.09                          | 2.23                 | <b>Complies</b> |


Note: Directional gain =  $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 7.77 \text{ dBi} > 6 \text{ dBi}$ , so limit =  $4 - (7.77 - 6) = 2.23 \text{ dBm/MHz}$ .

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.



Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

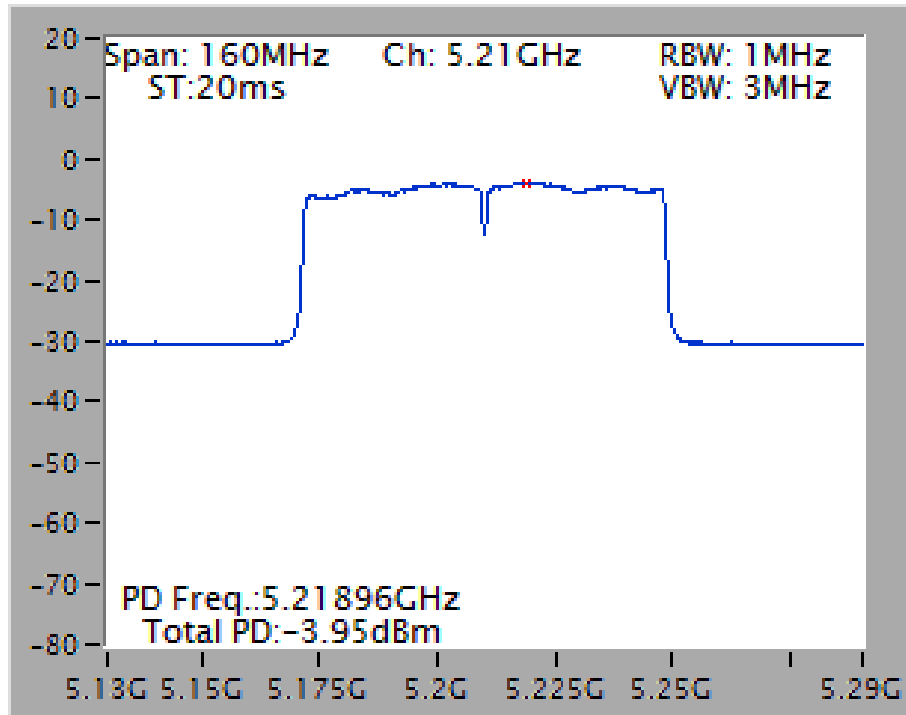


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

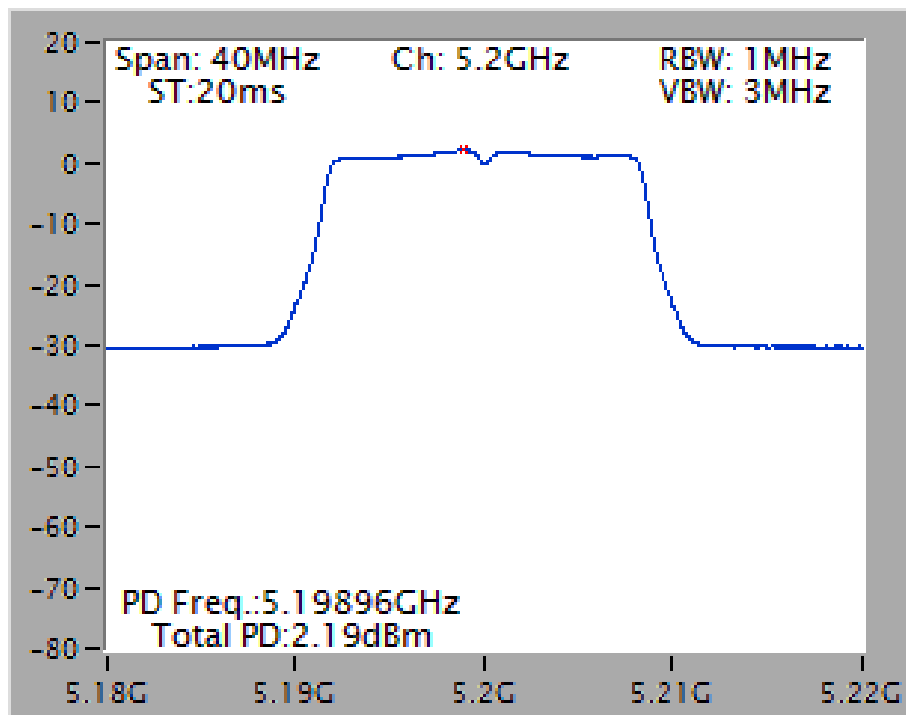


For beamforming function

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

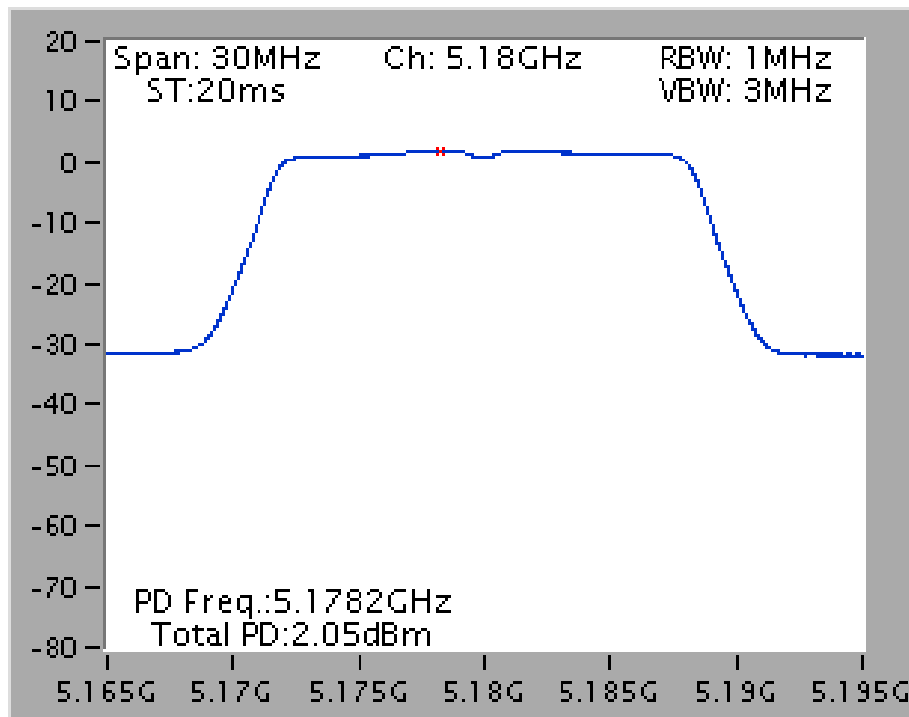

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

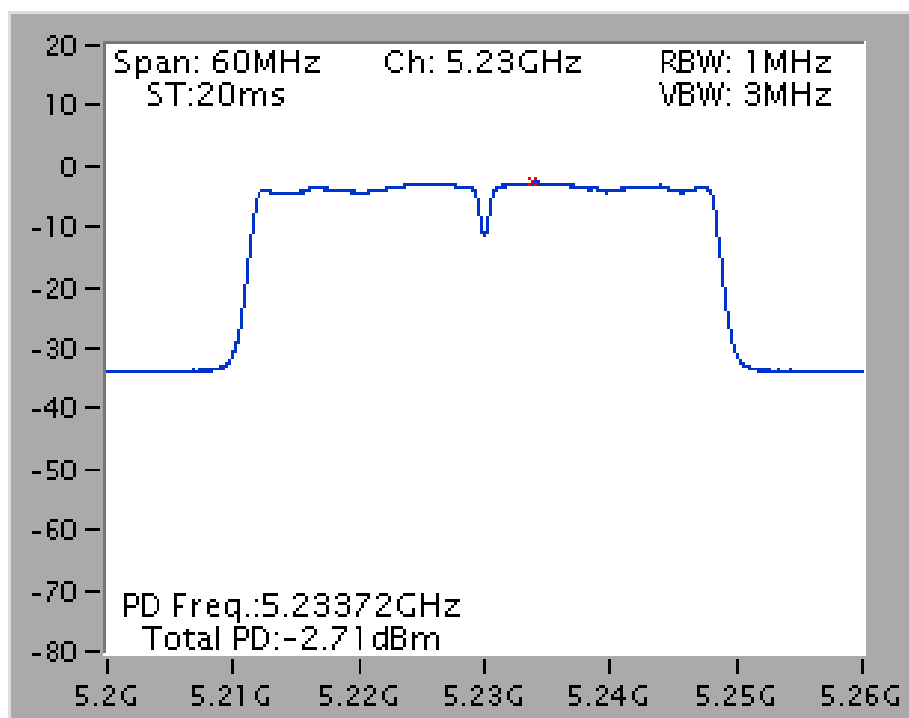



## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting   |
|--------------------|---|
| Attenuation        | Auto  |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal                    |
| RBW                | 1 MHz (Peak Trace) / 1 MHz (Average Trace)                                      |
| VBW                | ≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)                                  |
| Detector           | Peak (Peak Trace) / RMS (Average Trace)   |
| Trace              | Trace: Max hold (Peak Trace) /<br>Trace Average Sweep Count 100 (Average Trace) |
| Sweep Time         | AUTO  |

### 4.5.3. Test Procedures

- Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port.  
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

|                      |              |                       |               |
|----------------------|--------------|-----------------------|---------------|
| <b>Temperature</b>   | 17°C         | <b>Humidity</b>       | 62%           |
| <b>Test Engineer</b> | Satoshi Yang | <b>Configurations</b> | IEEE 802.11ac |

For non-beamforming function:

##### Configuration IEEE 802.11ac 20MHz / Chain 1 + Chain 2 + Chain 3

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5180 MHz  | 8.94                | 13              | Complies |
| QPSK (MCS1)   | 5180 MHz  | 9.16                | 13              | Complies |
| 16QAM (MCS3)  | 5180 MHz  | 8.98                | 13              | Complies |
| 64QAM (MCS5)  | 5180 MHz  | 9.25                | 13              | Complies |
| 256QAM (MCS8) | 5180 MHz  | 9.93                | 13              | Complies |

##### Configuration IEEE 802.11ac 40MHz / Chain 1 + Chain 2 + Chain 3

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5190 MHz  | 10.02               | 13              | Complies |
| QPSK (MCS1)   | 5190 MHz  | 8.92                | 13              | Complies |
| 16QAM (MCS3)  | 5190 MHz  | 9.28                | 13              | Complies |
| 64QAM (MCS5)  | 5190 MHz  | 9.85                | 13              | Complies |
| 256QAM (MCS8) | 5190 MHz  | 9.67                | 13              | Complies |

##### Configuration IEEE 802.11ac 80MHz / Chain 1 + Chain 2 + Chain 3

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5210 MHz  | 10.12               | 13              | Complies |
| QPSK (MCS1)   | 5210 MHz  | 10.05               | 13              | Complies |
| 16QAM (MCS3)  | 5210 MHz  | 9.83                | 13              | Complies |
| 64QAM (MCS5)  | 5210 MHz  | 9.63                | 13              | Complies |
| 256QAM (MCS8) | 5210 MHz  | 10.30               | 13              | Complies |

For beamforming function:

**Configuration IEEE 802.11ac 20MHz / Chain 1 + Chain 2 + Chain 3**

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5180 MHz  | 9.78                | 13              | Complies |
| QPSK (MCS1)   | 5180 MHz  | 8.90                | 13              | Complies |
| 16QAM (MCS3)  | 5180 MHz  | 9.24                | 13              | Complies |
| 64QAM (MCS5)  | 5180 MHz  | 9.63                | 13              | Complies |
| 256QAM (MCS8) | 5180 MHz  | 9.59                | 13              | Complies |

**Configuration IEEE 802.11ac 40MHz / Chain 1 + Chain 2 + Chain 3**

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5230 MHz  | 9.15                | 13              | Complies |
| QPSK (MCS1)   | 5230 MHz  | 10.04               | 13              | Complies |
| 16QAM (MCS3)  | 5230 MHz  | 9.85                | 13              | Complies |
| 64QAM (MCS5)  | 5230 MHz  | 9.73                | 13              | Complies |
| 256QAM (MCS8) | 5230 MHz  | 10.12               | 13              | Complies |

**Configuration IEEE 802.11ac 80MHz / Chain 1 + Chain 2 + Chain 3**

| Modulation    | Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result   |
|---------------|-----------|---------------------|-----------------|----------|
| BPSK (MCS0)   | 5210 MHz  | 9.39                | 13              | Complies |
| QPSK (MCS1)   | 5210 MHz  | 9.50                | 13              | Complies |
| 16QAM (MCS3)  | 5210 MHz  | 9.56                | 13              | Complies |
| 64QAM (MCS5)  | 5210 MHz  | 9.70                | 13              | Complies |
| 256QAM (MCS8) | 5210 MHz  | 9.63                | 13              | Complies |

|                      |              |                       |              |
|----------------------|--------------|-----------------------|--------------|
| <b>Temperature</b>   | 17°C         | <b>Humidity</b>       | 62%          |
| <b>Test Engineer</b> | Satoshi Yang | <b>Configurations</b> | IEEE 802.11a |

**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3**


| <b>Modulation</b> | <b>Frequency</b> | <b>Peak Excursion (dB)</b> | <b>Max. Limit (dB)</b> | <b>Result</b>   |
|-------------------|------------------|----------------------------|------------------------|-----------------|
| BPSK (6Mbps)      | 5180 MHz         | 9.00                       | 13                     | <b>Complies</b> |
| QPSK (12Mbps)     | 5180 MHz         | 8.39                       | 13                     | <b>Complies</b> |
| 16QAM (24Mbps)    | 5180 MHz         | 8.76                       | 13                     | <b>Complies</b> |
| 64QAM (48Mbps)    | 5180 MHz         | 8.72                       | 13                     | <b>Complies</b> |

Note: All the test values were listed in the report.

For plots, only the modulation with worse result was shown.


For non-beamforming function:

**Peak Excursion Plot on Configuration IEEE 802.11ac 20MHz / Chain 1 + Chain 2 + Chain 3 / 256QAM (MCS8) / 5180 MHz**

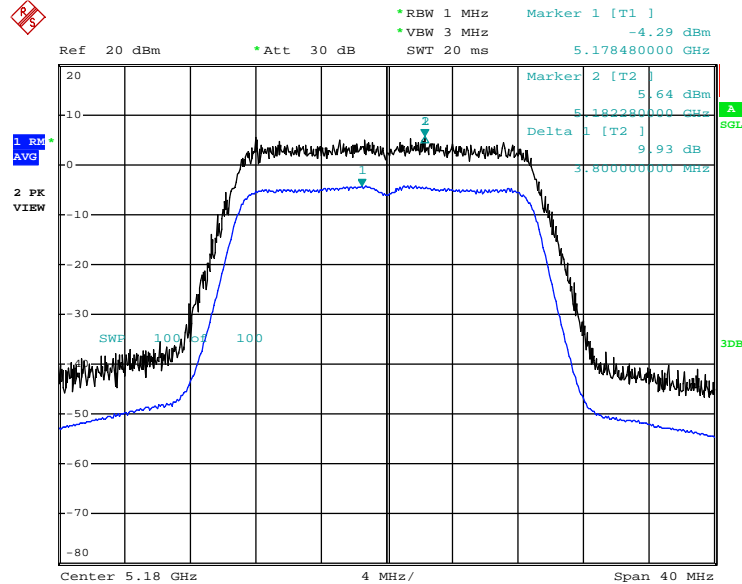


Date: 13.JAN.2014 11:36:09

**Peak Excursion Plot on Configuration IEEE 802.11ac 40MHz / Chain 1 + Chain 2 + Chain 3 / BPSK (MCS0) / 5190 MHz**

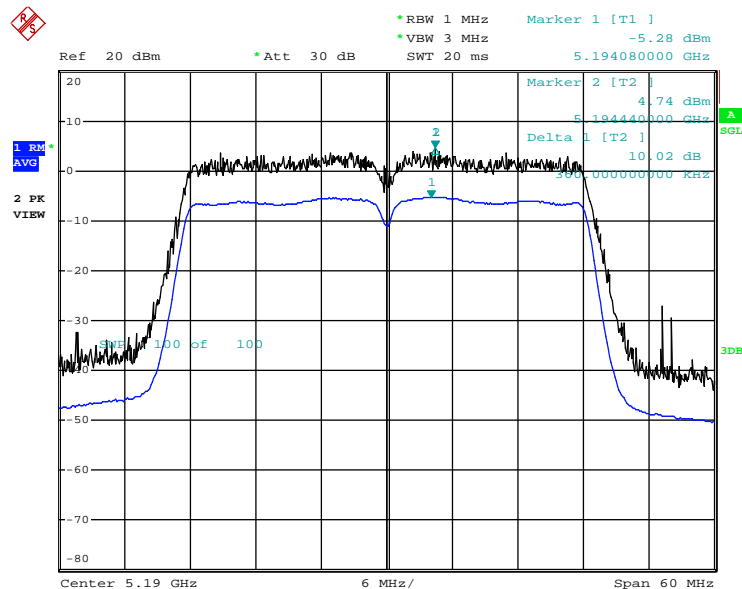


Date: 13.JAN.2014 11:41:07

**Peak Excursion Plot on Configuration IEEE 802.11ac 80MHz / Chain 1 + Chain 2 + Chain 3 / 256QAM (MCS8) / 5210 MHz**

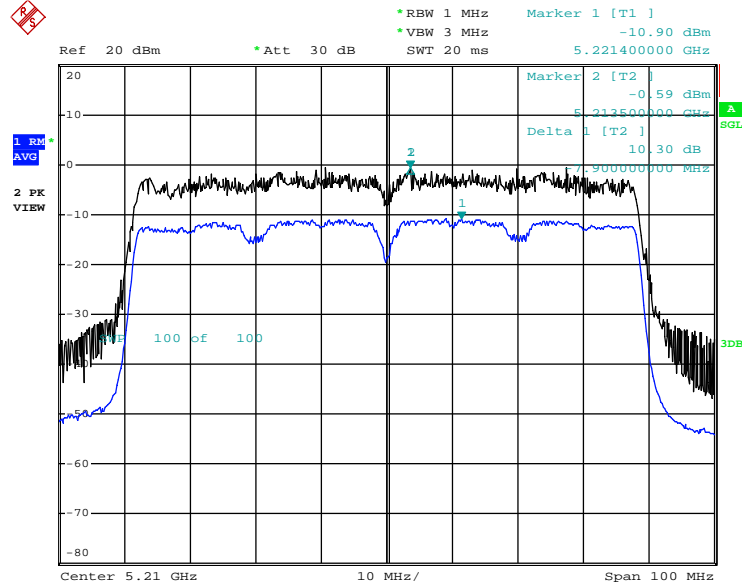

Date: 13.JAN.2014 11:52:52


**Peak Excursion Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / BPSK (6Mbps) / 5180 MHz**

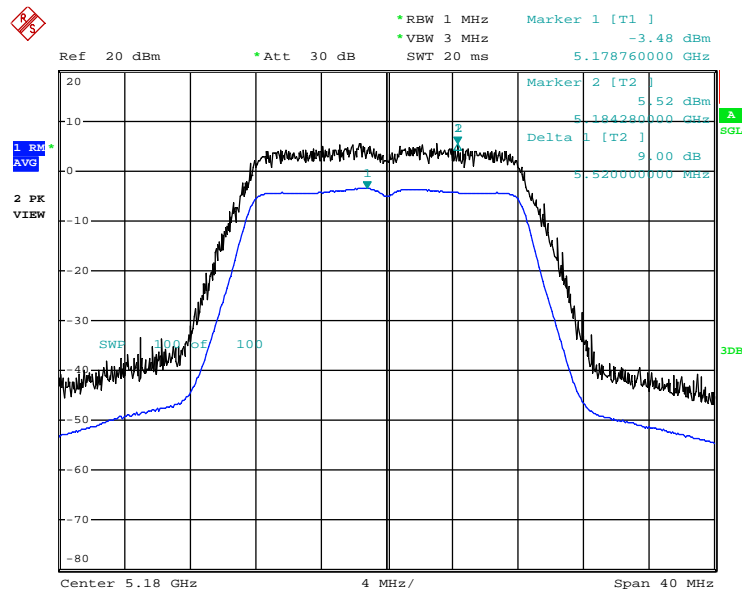

Date: 13.JAN.2014 11:00:53


For beamforming function:

**Peak Excursion Plot on Configuration IEEE 802.11ac 20MHz / Chain 1 + Chain 2 + Chain 3 / BPSK (MCS0) / 5180 MHz**

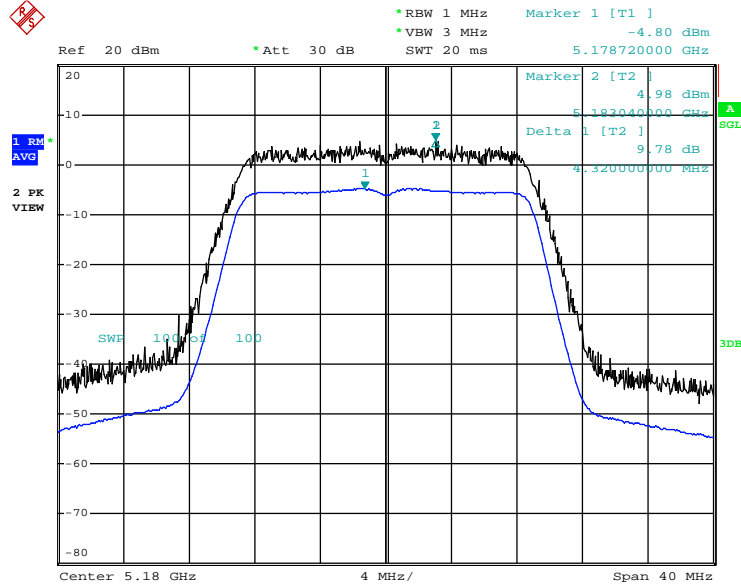


Date: 13.JAN.2014 12:10:34

**Peak Excursion Plot on Configuration IEEE 802.11ac 40MHz / Chain 1 + Chain 2 + Chain 3 / 256QAM (MCS8) / 5230 MHz**

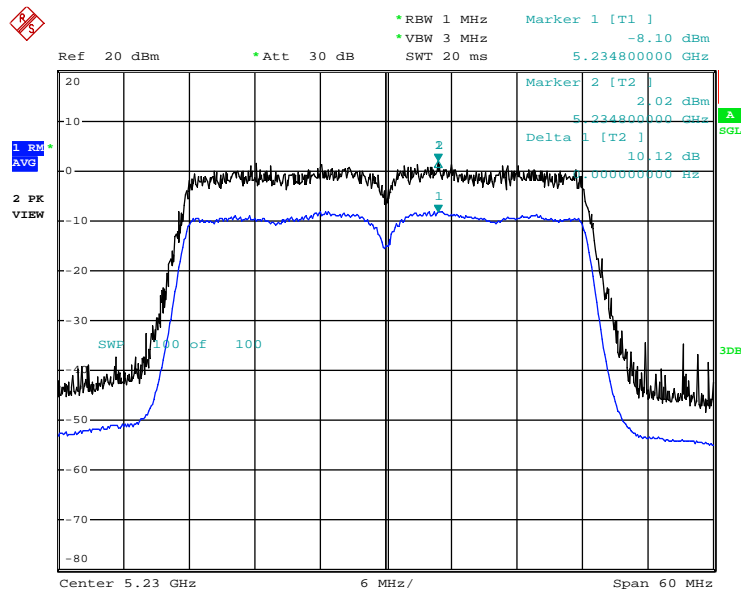

Date: 13.JAN.2014 12:20:15

Peak Excursion Plot on Configuration IEEE 802.11ac 80MHz / Chain 1 + Chain 2 + Chain 3 / 64QAM (MCS5) / 5210 MHz

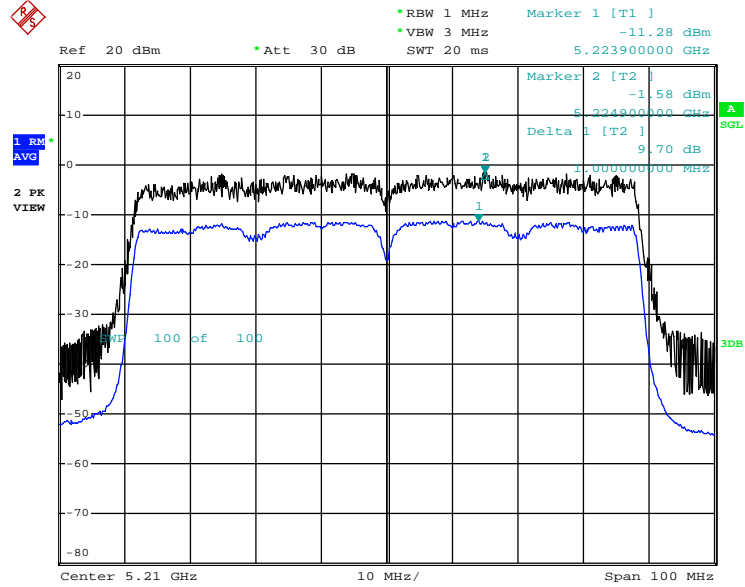

Date: 13.JAN.2014 12:25:45

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(kHz)                       | 300                           |
| 0.490~1.705       | 24000/F(kHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                       |
|---|---|
| Attenuation                                 | Auto  |
| Start Frequency                             | 1000 MHz                                      |
| Stop Frequency                              | 40 GHz  |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak, 1MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 1MHz / 3MHz for peak                          |


| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RBW 120kHz for QP |

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

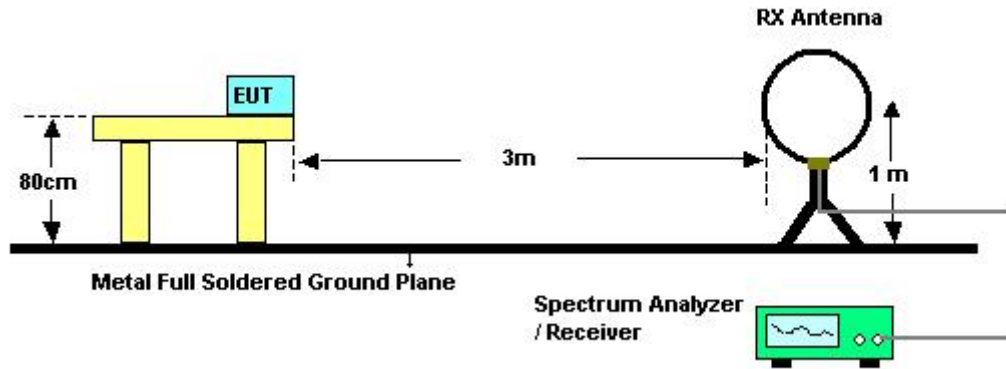

For Radiated Emissions: 30MHz~1GHz

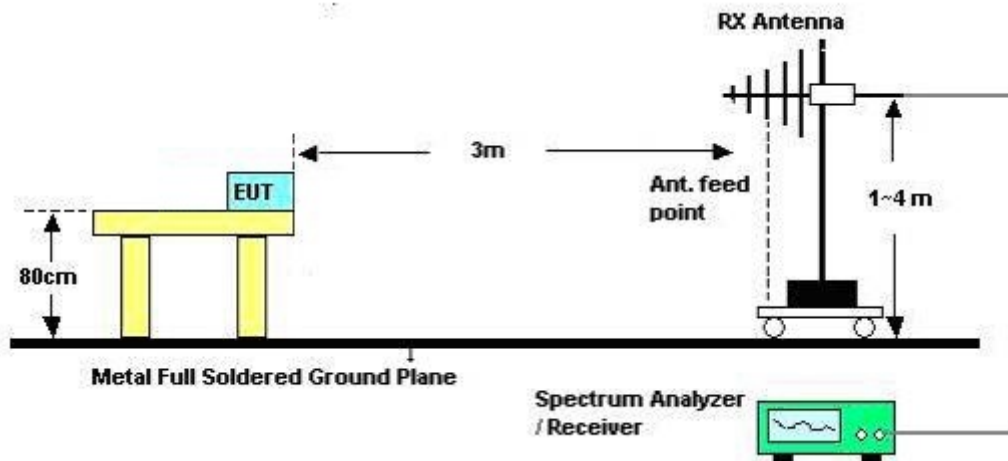

For Radiated Emissions: Above 1GHz

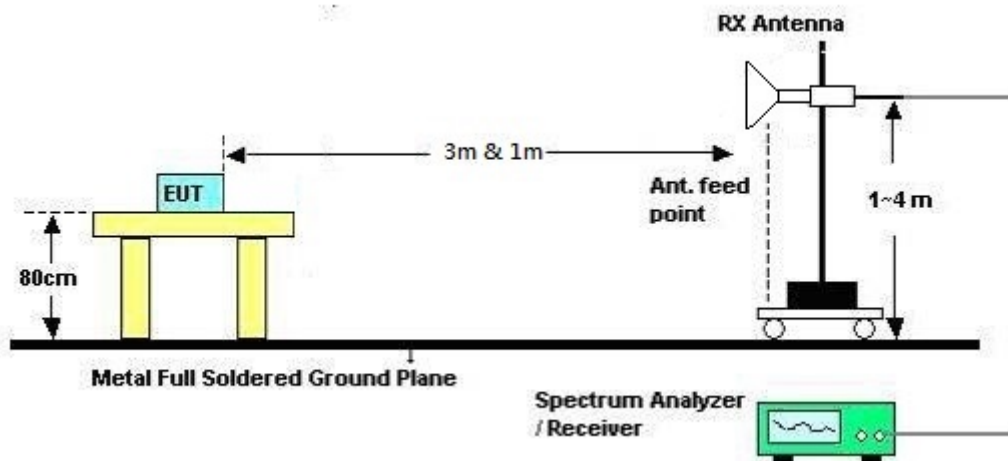

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

|                      |               |                       |             |
|----------------------|---------------|-----------------------|-------------|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%         |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | Normal Link |
| <b>Test Date</b>     | Jan. 15, 2014 | <b>Test Mode</b>      | Mode 1      |

| <b>Freq.<br/>(MHz)</b> | <b>Level<br/>(dBuV)</b> | <b>Over Limit<br/>(dB)</b> | <b>Limit Line<br/>(dBuV)</b> | <b>Remark</b> |
|------------------------|-------------------------|----------------------------|------------------------------|---------------|
| -                      | -                       | -                          | -                            | See Note      |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


|               |           |                |             |
|---------------|-----------|----------------|-------------|
| Temperature   | 21°C      | Humidity       | 53%         |
| Test Engineer | Nick Peng | Configurations | Normal Link |
| Test Mode     | Mode 1    |                |             |

Horizontal

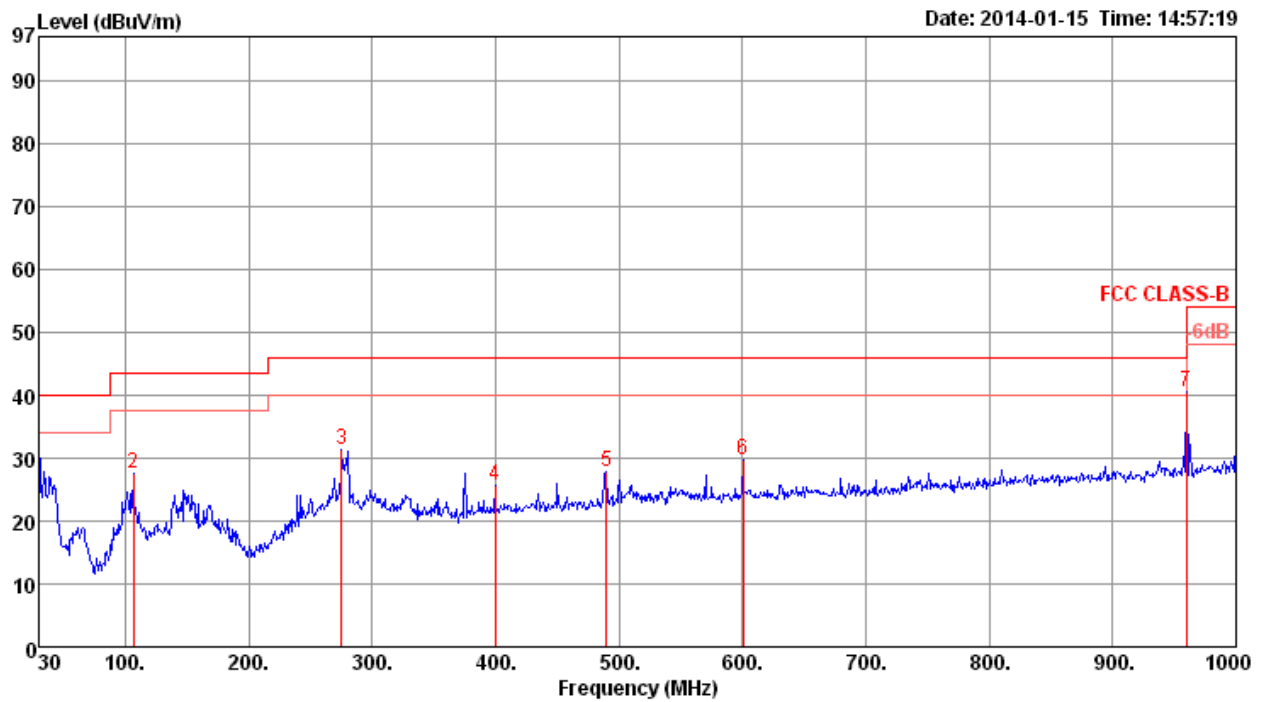

|   | Freq   | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase  |
|---|--------|--------|--------|--------|-------|--------------|--------|--------|-------|-------|------------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB     | cm    | deg   |            |
| 1 | 30.00  | 30.46  | 40.00  | -9.54  | 38.89 | 0.61         | 18.76  | 27.80  | 100   | 0     | HORIZONTAL |
| 2 | 106.63 | 27.49  | 43.50  | -16.01 | 42.35 | 1.21         | 11.50  | 27.57  | 100   | 0     | HORIZONTAL |
| 3 | 275.41 | 31.26  | 46.00  | -14.74 | 43.23 | 1.91         | 13.07  | 26.95  | 100   | 0     | HORIZONTAL |
| 4 | 399.57 | 25.63  | 46.00  | -20.37 | 34.87 | 2.30         | 16.06  | 27.60  | 100   | 0     | HORIZONTAL |
| 5 | 489.78 | 27.93  | 46.00  | -18.07 | 35.89 | 2.63         | 17.46  | 28.05  | 100   | 0     | HORIZONTAL |
| 6 | 600.36 | 29.76  | 46.00  | -16.24 | 36.28 | 2.81         | 18.77  | 28.10  | 100   | 0     | HORIZONTAL |
| 7 | 960.00 | 40.53  | 46.00  | -5.47  | 43.14 | 3.56         | 20.99  | 27.16  | 100   | 0     | HORIZONTAL |

**Vertical**

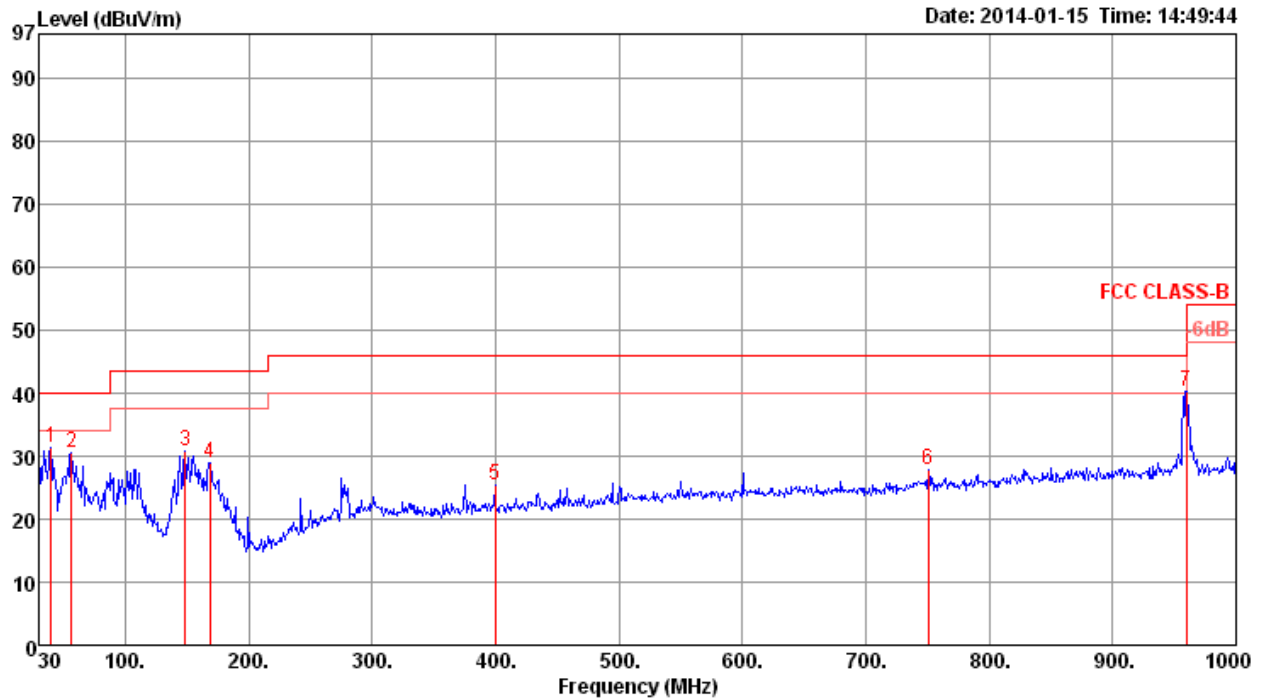

Date: 2014-01-15 Time: 14:49:44

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|-------|---------|--------|--------|-------|-------|-----------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |        | cm    | deg   |           |
| 1 | 39.70  | 31.39  | 40.00  | -8.61  | 45.42 | 0.66  | 13.11   | 27.80  | Peak   | 400   | 0     | VERTICAL  |
| 2 | 56.19  | 30.60  | 40.00  | -9.40  | 50.06 | 0.85  | 7.47    | 27.78  | Peak   | 400   | 0     | VERTICAL  |
| 3 | 148.34 | 30.80  | 43.50  | -12.70 | 44.80 | 1.42  | 11.94   | 27.36  | Peak   | 400   | 0     | VERTICAL  |
| 4 | 168.71 | 28.89  | 43.50  | -14.61 | 41.99 | 1.47  | 12.68   | 27.25  | Peak   | 400   | 0     | VERTICAL  |
| 5 | 399.57 | 25.34  | 46.00  | -20.66 | 34.58 | 2.30  | 16.06   | 27.60  | Peak   | 400   | 0     | VERTICAL  |
| 6 | 750.71 | 27.73  | 46.00  | -18.27 | 32.90 | 3.20  | 19.43   | 27.80  | Peak   | 400   | 0     | VERTICAL  |
| 7 | 960.00 | 40.39  | 46.00  | -5.61  | 43.00 | 3.56  | 20.99   | 27.16  | Peak   | 400   | 0     | VERTICAL  |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming function:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 36 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

##### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 5018.84  | 58.47  | 74.00      | -15.53     | 56.66      | 3.40              | 33.42          | 35.01         | Peak    | 125   | 186   | HORIZONTAL |
| 2 | 5018.92  | 46.70  | 54.00      | -7.30      | 44.89      | 3.40              | 33.42          | 35.01         | Average | 125   | 186   | HORIZONTAL |
| 3 | 15540.14 | 40.55  | 54.00      | -13.45     | 32.08      | 6.13              | 37.65          | 35.31         | Average | 100   | 136   | HORIZONTAL |
| 4 | 15541.18 | 54.53  | 74.00      | -19.47     | 46.06      | 6.13              | 37.65          | 35.31         | Peak    | 100   | 136   | HORIZONTAL |

##### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5019.04  | 53.64  | 54.00      | -0.36      | 51.82      | 3.40              | 33.43          | 35.01         | Average | 100   | 18    | VERTICAL  |
| 2 | 5019.04  | 63.56  | 74.00      | -10.44     | 61.74      | 3.40              | 33.43          | 35.01         | Peak    | 100   | 18    | VERTICAL  |
| 3 | 15531.72 | 41.04  | 54.00      | -12.96     | 32.47      | 6.13              | 37.73          | 35.29         | Average | 100   | 211   | VERTICAL  |
| 4 | 15540.16 | 53.54  | 74.00      | -20.46     | 45.03      | 6.13              | 37.69          | 35.31         | Peak    | 100   | 211   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 40 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 5356.28  | 43.59  | 54.00      | -10.41     | 41.14      | 3.49       | 34.03          | 35.07         | Average | 106   | 178   | HORIZONTAL |
| 2 | 5356.56  | 54.35  | 74.00      | -19.65     | 51.90      | 3.49       | 34.03          | 35.07         | Peak    | 106   | 178   | HORIZONTAL |
| 3 | 15597.67 | 53.15  | 74.00      | -20.85     | 44.76      | 6.13       | 37.60          | 35.34         | Peak    | 100   | 191   | HORIZONTAL |
| 4 | 15599.91 | 40.15  | 54.00      | -13.85     | 31.76      | 6.13       | 37.60          | 35.34         | Average | 100   | 191   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5358.52  | 53.83  | 54.00      | -0.17      | 51.38      | 3.49       | 34.03          | 35.07         | Average | 121   | 205   | VERTICAL  |
| 2 | 5363.68  | 64.05  | 74.00      | -9.95      | 61.60      | 3.49       | 34.03          | 35.07         | Peak    | 121   | 205   | VERTICAL  |
| 3 | 15599.68 | 53.62  | 74.00      | -20.38     | 45.23      | 6.13       | 37.60          | 35.34         | Peak    | 100   | 143   | VERTICAL  |
| 4 | 15600.04 | 40.06  | 54.00      | -13.94     | 31.67      | 6.13       | 37.60          | 35.34         | Average | 100   | 143   | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 48 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 5401.28  | 57.88  | 74.00      | -16.12     | 55.33      | 3.51       | 34.12          | 35.08         | Peak    | 123   | 179   | HORIZONTAL |
| 2 | 5401.36  | 46.94  | 54.00      | -7.06      | 44.39      | 3.51       | 34.12          | 35.08         | Average | 123   | 179   | HORIZONTAL |
| 3 | 15717.53 | 53.33  | 74.00      | -20.67     | 45.10      | 6.14       | 37.48          | 35.39         | Peak    | 100   | 198   | HORIZONTAL |
| 4 | 15721.27 | 39.37  | 54.00      | -14.63     | 31.14      | 6.14       | 37.48          | 35.39         | Average | 100   | 198   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5401.48  | 53.43  | 54.00      | -0.57      | 50.88      | 3.51       | 34.12          | 35.08         | Average | 102   | 212   | VERTICAL  |
| 2 | 5401.60  | 63.88  | 74.00      | -10.12     | 61.33      | 3.51       | 34.12          | 35.08         | Peak    | 102   | 212   | VERTICAL  |
| 3 | 15720.08 | 52.59  | 74.00      | -21.41     | 44.36      | 6.14       | 37.48          | 35.39         | Peak    | 100   | 239   | VERTICAL  |
| 4 | 15721.76 | 39.48  | 54.00      | -14.52     | 31.25      | 6.14       | 37.48          | 35.39         | Average | 100   | 239   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 38 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 5353.38  | 44.03  | 54.00      | -9.97      | 41.58      | 3.49              | 34.03          | 35.07         | Average | 119   | 199   | HORIZONTAL |
| 2 | 5353.69  | 54.25  | 74.00      | -19.75     | 51.80      | 3.49              | 34.03          | 35.07         | Peak    | 119   | 199   | HORIZONTAL |
| 3 | 15569.65 | 53.96  | 74.00      | -20.04     | 45.53      | 6.13              | 37.63          | 35.33         | Peak    | 100   | 101   | HORIZONTAL |
| 4 | 15570.52 | 40.21  | 54.00      | -13.79     | 31.78      | 6.13              | 37.63          | 35.33         | Average | 100   | 101   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5354.90  | 51.43  | 54.00      | -2.57      | 48.98      | 3.49              | 34.03          | 35.07         | Average | 100   | 219   | VERTICAL  |
| 2 | 5355.09  | 62.75  | 74.00      | -11.25     | 60.30      | 3.49              | 34.03          | 35.07         | Peak    | 100   | 219   | VERTICAL  |
| 3 | 15569.53 | 53.22  | 74.00      | -20.78     | 44.79      | 6.13              | 37.63          | 35.33         | Peak    | 100   | 57    | VERTICAL  |
| 4 | 15569.95 | 40.23  | 54.00      | -13.77     | 31.80      | 6.13              | 37.63          | 35.33         | Average | 100   | 57    | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 46 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1 | 5396.20  | 56.08  | 74.00  | -17.92 | 53.57 | 3.50  | 34.09   | 35.08  | Peak    | 124   | 179   | HORIZONTAL |
| 2 | 5396.36  | 46.08  | 54.00  | -7.92  | 43.57 | 3.50  | 34.09   | 35.08  | Average | 124   | 179   | HORIZONTAL |
| 3 | 15687.52 | 53.38  | 74.00  | -20.62 | 45.10 | 6.14  | 37.51   | 35.37  | Peak    | 100   | 177   | HORIZONTAL |
| 4 | 15688.60 | 39.96  | 54.00  | -14.04 | 31.68 | 6.14  | 37.51   | 35.37  | Average | 100   | 177   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 5383.16  | 53.12  | 54.00  | -0.88  | 50.61 | 3.50  | 34.09   | 35.08  | Average | 134   | 202   | VERTICAL  |
| 2 | 5383.48  | 64.62  | 74.00  | -9.38  | 62.11 | 3.50  | 34.09   | 35.08  | Peak    | 134   | 202   | VERTICAL  |
| 3 | 15688.14 | 53.98  | 74.00  | -20.02 | 45.70 | 6.14  | 37.51   | 35.37  | Peak    | 100   | 234   | VERTICAL  |
| 4 | 15688.70 | 40.18  | 54.00  | -13.82 | 31.90 | 6.14  | 37.51   | 35.37  | Average | 100   | 234   | VERTICAL  |



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 80MHz CH 42 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 15629.87 | 53.00  | 74.00      | -21.00     | 44.65      | 6.14       | 37.56          | 35.35         | Peak    | 100   | 186   | HORIZONTAL |
| 2 | 15630.89 | 40.15  | 54.00      | -13.85     | 31.80      | 6.14       | 37.56          | 35.35         | Average | 100   | 186   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 15631.11 | 39.93  | 54.00      | -14.07     | 31.58      | 6.14       | 37.56          | 35.35         | Average | 100   | 119   | VERTICAL  |
| 2 | 15631.21 | 53.73  | 74.00      | -20.27     | 45.38      | 6.14       | 37.56          | 35.35         | Peak    | 100   | 119   | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%   |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11a CH 36 /<br>Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |            |
| 1 | 5021.96  | 46.24  | 54.00         | -7.76         | 44.43         | 3.40          | 33.42             | 35.01            | Average | 100   | 194   | HORIZONTAL |
| 2 | 5021.96  | 57.53  | 74.00         | -16.47        | 55.72         | 3.40          | 33.42             | 35.01            | Peak    | 100   | 194   | HORIZONTAL |
| 3 | 15539.37 | 40.67  | 54.00         | -13.33        | 32.20         | 6.13          | 37.65             | 35.31            | Average | 100   | 207   | HORIZONTAL |
| 4 | 15539.91 | 52.16  | 74.00         | -21.84        | 43.69         | 6.13          | 37.65             | 35.31            | Peak    | 100   | 207   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               |         | cm    | deg   |           |
| 1 | 5021.12  | 53.45  | 54.00         | -0.55         | 51.63         | 3.40          | 33.43             | 35.01            | Average | 100   | 173   | VERTICAL  |
| 2 | 5021.20  | 64.27  | 74.00         | -9.73         | 62.45         | 3.40          | 33.43             | 35.01            | Peak    | 100   | 173   | VERTICAL  |
| 3 | 15539.29 | 40.64  | 54.00         | -13.36        | 32.13         | 6.13          | 37.69             | 35.31            | Average | 100   | 286   | VERTICAL  |
| 4 | 15541.73 | 53.64  | 74.00         | -20.36        | 45.13         | 6.13          | 37.69             | 35.31            | Peak    | 100   | 286   | VERTICAL  |

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%   |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11a CH 40 /<br>Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |   |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                   | dB/m              | dB               |         | cm    | deg   |            |
| 1 | 5359.12  | 43.62  | 54.00         | -10.38        | 41.17         | 3.49                 | 34.03             | 35.07            | Average | 100   | 187   | HORIZONTAL |
| 2 | 5359.28  | 54.21  | 74.00         | -19.79        | 51.76         | 3.49                 | 34.03             | 35.07            | Peak    | 100   | 187   | HORIZONTAL |
| 3 | 15599.88 | 39.23  | 54.00         | -14.77        | 30.84         | 6.13                 | 37.60             | 35.34            | Average | 100   | 286   | HORIZONTAL |
| 4 | 15600.04 | 53.20  | 74.00         | -20.80        | 44.81         | 6.13                 | 37.60             | 35.34            | Peak    | 100   | 286   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss | Antenna<br>Factor | Preamp<br>Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|----------------------|-------------------|------------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                   | dB/m              | dB               |         | cm    | deg   |           |
| 1 | 5358.12  | 64.72  | 74.00         | -9.28         | 62.27         | 3.49                 | 34.03             | 35.07            | Peak    | 129   | 218   | VERTICAL  |
| 2 | 5358.36  | 53.83  | 54.00         | -0.17         | 51.38         | 3.49                 | 34.03             | 35.07            | Average | 129   | 218   | VERTICAL  |
| 3 | 15599.78 | 53.31  | 74.00         | -20.69        | 44.92         | 6.13                 | 37.60             | 35.34            | Peak    | 100   | 238   | VERTICAL  |
| 4 | 15600.24 | 40.15  | 54.00         | -13.85        | 31.76         | 6.13                 | 37.60             | 35.34            | Average | 100   | 238   | VERTICAL  |



|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%   |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11a CH 48 /<br>Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |   |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |            |
| 1 | 5396.44  | 56.38  | 74.00      | -17.62     | 53.87      | 3.50       | 34.09          | 35.08         | Peak    | 121   | 180   | HORIZONTAL |
| 2 | 5396.64  | 45.69  | 54.00      | -8.31      | 43.18      | 3.50       | 34.09          | 35.08         | Average | 121   | 180   | HORIZONTAL |
| 3 | 15719.97 | 39.54  | 54.00      | -14.46     | 31.31      | 6.14       | 37.48          | 35.39         | Average | 100   | 289   | HORIZONTAL |
| 4 | 15720.34 | 52.92  | 74.00      | -21.08     | 44.69      | 6.14       | 37.48          | 35.39         | Peak    | 100   | 289   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5402.92  | 53.96  | 54.00      | -0.04      | 51.41      | 3.51       | 34.12          | 35.08         | Average | 105   | 202   | VERTICAL  |
| 2 | 5403.68  | 64.67  | 74.00      | -9.33      | 62.12      | 3.51       | 34.12          | 35.08         | Peak    | 105   | 202   | VERTICAL  |
| 3 | 15720.25 | 52.72  | 74.00      | -21.28     | 44.49      | 6.14       | 37.48          | 35.39         | Peak    | 100   | 333   | VERTICAL  |
| 4 | 15720.32 | 39.48  | 54.00      | -14.52     | 31.25      | 6.14       | 37.48          | 35.39         | Average | 100   | 333   | VERTICAL  |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## For beamforming function:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 36 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m   |         | deg   | cm    |            |
| 1 | 5026.16  | 40.01  | 54.00  | -13.99 | 37.42 | 4.26  | 34.62  | 2.59   | Average | 63    | 100   | HORIZONTAL |
| 2 | 5026.98  | 47.25  | 74.00  | -26.75 | 44.66 | 4.26  | 34.62  | 2.59   | Peak    | 63    | 100   | HORIZONTAL |
| 3 | 15532.96 | 43.68  | 54.00  | -10.32 | 32.13 | 7.85  | 34.79  | 11.55  | Average | 293   | 101   | HORIZONTAL |
| 4 | 15545.52 | 56.54  | 74.00  | -17.46 | 44.98 | 7.86  | 34.79  | 11.56  | Peak    | 293   | 101   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |         | deg   | cm    |           |
| 1 | 5027.04  | 53.94  | 54.00  | -0.06  | 51.35 | 4.26  | 34.62  | 32.95   | Average | 147   | 113   | VERTICAL  |
| 2 | 5027.16  | 65.91  | 74.00  | -8.09  | 63.32 | 4.26  | 34.62  | 32.95   | Peak    | 147   | 113   | VERTICAL  |
| 3 | 15538.26 | 50.08  | 74.00  | -23.92 | 38.53 | 7.85  | 34.79  | 38.49   | Peak    | 10    | 100   | VERTICAL  |
| 4 | 15538.26 | 39.46  | 54.00  | -14.54 | 27.91 | 7.85  | 34.79  | 38.49   | Average | 10    | 100   | VERTICAL  |

|                      |                               |                       |  |
|----------------------|-------------------------------|-----------------------|--|
| <b>Temperature</b>   | 21°C                          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng                     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 40 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 & Nov. 30, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |            |
| 1 | 5363.89  | 51.30  | 74.00      | -22.70     | 47.95      | 4.48       | 34.62         | 3.35           | Peak    | 276   | 184   | HORIZONTAL |
| 2 | 5365.71  | 42.48  | 54.00      | -11.52     | 39.13      | 4.48       | 34.62         | 3.35           | Average | 276   | 184   | HORIZONTAL |
| 3 | 15599.04 | 56.16  | 74.00      | -17.84     | 44.66      | 7.88       | 34.86         | 11.50          | Peak    | 252   | 101   | HORIZONTAL |
| 4 | 15604.22 | 42.45  | 54.00      | -11.55     | 30.95      | 7.88       | 34.86         | 11.50          | Average | 252   | 101   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5362.24  | 53.84  | 54.00      | -0.16      | 50.49      | 4.48       | 34.62         | 33.49          | Average | 265   | 128   | VERTICAL  |
| 2 | 5362.24  | 64.14  | 54.00      | 10.14      | 60.79      | 4.48       | 34.62         | 33.49          | Average | 265   | 128   | VERTICAL  |
| 3 | 15600.38 | 50.91  | 74.00      | -23.09     | 39.41      | 7.88       | 34.86         | 38.48          | Peak    | 20    | 100   | VERTICAL  |
| 4 | 15600.90 | 38.53  | 54.00      | -15.47     | 27.03      | 7.88       | 34.86         | 38.48          | Average | 20    | 100   | VERTICAL  |



|                      |                               |                       |  |
|----------------------|-------------------------------|-----------------------|--|
| <b>Temperature</b>   | 21°C                          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng                     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 48 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 & Nov. 30, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |            |
| 1 | 5390.15  | 50.17  | 74.00      | -23.83     | 46.79      | 4.49       | 34.62         | 3.38           | Peak    | 345   | 100   | HORIZONTAL |
| 2 | 5390.59  | 42.90  | 54.00      | -11.10     | 39.52      | 4.49       | 34.62         | 3.38           | Average | 345   | 100   | HORIZONTAL |
| 3 | 15716.04 | 55.30  | 74.00      | -18.70     | 43.86      | 7.92       | 34.94         | 11.44          | Peak    | 142   | 101   | HORIZONTAL |
| 4 | 15724.32 | 42.55  | 54.00      | -11.45     | 31.11      | 7.92       | 34.94         | 11.44          | Average | 142   | 101   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5392.12  | 53.62  | 54.00      | -0.38      | 50.24      | 4.49       | 34.62         | 33.51          | Average | 274   | 112   | VERTICAL  |
| 2 | 5397.40  | 65.04  | 74.00      | -8.96      | 61.62      | 4.50       | 34.62         | 33.54          | Peak    | 274   | 112   | VERTICAL  |
| 3 | 15720.40 | 39.18  | 54.00      | -14.82     | 27.74      | 7.92       | 34.94         | 38.46          | Average | 43    | 100   | VERTICAL  |
| 4 | 15722.38 | 51.35  | 74.00      | -22.65     | 39.91      | 7.92       | 34.94         | 38.46          | Peak    | 43    | 100   | VERTICAL  |



|                      |                               |                       |  |
|----------------------|-------------------------------|-----------------------|--|
| <b>Temperature</b>   | 21°C                          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng                     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 38 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 & Nov. 30, 2013 |                       |  |

**Horizontal**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |            |
| 1 | 5345.91  | 40.91  | 54.00      | -13.09     | 37.60      | 4.47       | 34.62         | 3.31           | Average | 246   | 100   | HORIZONTAL |
| 2 | 5349.62  | 47.17  | 74.00      | -26.83     | 43.86      | 4.47       | 34.62         | 3.31           | Peak    | 246   | 100   | HORIZONTAL |
| 3 | 15571.62 | 43.01  | 54.00      | -10.99     | 31.47      | 7.86       | 34.81         | 11.54          | Average | 166   | 101   | HORIZONTAL |
| 4 | 15571.76 | 56.29  | 74.00      | -17.71     | 44.75      | 7.86       | 34.81         | 11.54          | Peak    | 166   | 101   | HORIZONTAL |

**Vertical**

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5347.12  | 63.85  | 74.00      | -10.15     | 60.54      | 4.47       | 34.62         | 33.46          | Peak    | 274   | 115   | VERTICAL  |
| 2 | 5348.52  | 52.53  | 54.00      | -1.47      | 49.22      | 4.47       | 34.62         | 33.46          | Average | 274   | 115   | VERTICAL  |
| 3 | 15566.12 | 51.86  | 74.00      | -22.14     | 40.32      | 7.86       | 34.81         | 38.49          | Peak    | 74    | 100   | VERTICAL  |
| 4 | 15573.00 | 38.92  | 54.00      | -15.08     | 27.38      | 7.86       | 34.81         | 38.49          | Average | 74    | 100   | VERTICAL  |

|                      |                               |                       |  |
|----------------------|-------------------------------|-----------------------|--|
| <b>Temperature</b>   | 21°C                          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng                     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 46 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 & Nov. 30, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Factor | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|--------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m   |         | deg   | cm    |            |
| 1 | 5402.56  | 41.99  | 54.00  | -12.01 | 38.57 | 4.50  | 34.62  | 3.42   | Average | 96    | 101   | HORIZONTAL |
| 2 | 5404.25  | 49.40  | 74.00  | -24.60 | 45.98 | 4.50  | 34.62  | 3.42   | Peak    | 96    | 101   | HORIZONTAL |
| 3 | 15694.28 | 56.23  | 74.00  | -17.77 | 44.79 | 7.90  | 34.92  | 11.44  | Peak    | 180   | 100   | HORIZONTAL |
| 4 | 15694.86 | 42.38  | 54.00  | -11.62 | 30.94 | 7.90  | 34.92  | 11.44  | Average | 180   | 100   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |         | deg   | cm    |           |
| 1 | 5403.60  | 53.17  | 54.00  | -0.83  | 49.75 | 4.50  | 34.62  | 33.54   | Average | 267   | 126   | VERTICAL  |
| 2 | 5404.64  | 64.95  | 74.00  | -9.05  | 61.53 | 4.50  | 34.62  | 33.54   | Peak    | 267   | 126   | VERTICAL  |
| 3 | 15685.76 | 51.93  | 74.00  | -22.07 | 40.49 | 7.90  | 34.92  | 38.46   | Peak    | 74    | 100   | VERTICAL  |
| 4 | 15688.94 | 38.39  | 54.00  | -15.61 | 26.95 | 7.90  | 34.92  | 38.46   | Average | 74    | 100   | VERTICAL  |

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 80MHz CH 42 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 30, 2013 |                       |  |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Remark  | T/Pos | A/Pos | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|--------|---------|---------|-------|-------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |         | deg   | cm    |            |
| 1 | 15625.02 | 42.69  | 54.00  | -11.31 | 31.21 | 7.88  | 34.88  | 38.48   | Average | 30    | 100   | HORIZONTAL |
| 2 | 15625.38 | 54.89  | 74.00  | -19.11 | 43.41 | 7.88  | 34.88  | 38.48   | Peak    | 30    | 100   | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Preamp | Antenna | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|--------|---------|---------|-------|-------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB     | dB/m    |         | deg   | cm    |           |
| 1 | 15633.84 | 42.22  | 54.00  | -11.78 | 30.74 | 7.89  | 34.88  | 38.47   | Average | 67    | 100   | VERTICAL  |
| 2 | 15634.38 | 55.14  | 74.00  | -18.86 | 43.66 | 7.89  | 34.88  | 38.47   | Peak    | 67    | 100   | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microrvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|---------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                           | 300                              |
| 0.490~1.705          | 24000/F(KHz)                          | 30                               |
| 1.705~30.0           | 30                                    | 30                               |
| 30~88                | 100                                   | 3                                |
| 88~216               | 150                                   | 3                                |
| 216~960              | 200                                   | 3                                |
| Above 960            | 500                                   | 3                                |

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                          | Setting   |
|---|---|
| Attenuation                                 | Auto  |
| Span Frequency                              | 100 MHz   |
| RBW / VBW (Emission in restricted band)     | 1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average |
| RBW / VBW (Emission in non-restricted band) | 1 MHz / 3MHz for Peak                           |

### 4.7.3. Test Procedures

The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

For non-beamforming function:

The EUT was programmed to be in continuously transmitting mode.

For beamforming function:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming function:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

##### Channel 36

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5103.60 | 52.04  | 54.00      | -1.96      | 15.04      | 3.42              | 33.58          | 0.00          | Average | 101   | 79    | VERTICAL  |
| 2 | 5149.20 | 69.52  | 74.00      | -4.48      | 32.42      | 3.43              | 33.67          | 0.00          | Peak    | 101   | 79    | VERTICAL  |
| 3 | 5178.40 | 108.77 |            |            | 71.60      | 3.44              | 33.73          | 0.00          | Average | 101   | 79    | VERTICAL  |
| 4 | 5178.40 | 118.79 |            |            | 81.62      | 3.44              | 33.73          | 0.00          | Peak    | 101   | 79    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5114.80 | 60.20  | 74.00      | -13.80     | 23.17      | 3.42              | 33.61          | 0.00          | Peak    | 110   | 112   | VERTICAL  |
| 2 | 5119.20 | 49.32  | 54.00      | -4.68      | 12.28      | 3.43              | 33.61          | 0.00          | Average | 110   | 112   | VERTICAL  |
| 3 | 5198.80 | 104.95 |            |            | 67.74      | 3.45              | 33.76          | 0.00          | Average | 110   | 112   | VERTICAL  |
| 4 | 5198.80 | 116.05 |            |            | 78.84      | 3.45              | 33.76          | 0.00          | Peak    | 110   | 112   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5123.00 | 54.84  | 74.00      | -19.16     | 17.80      | 3.43              | 33.61          | 0.00          | Peak    | 112   | 202   | VERTICAL  |
| 2 | 5128.40 | 42.99  | 54.00      | -11.01     | 5.92       | 3.43              | 33.64          | 0.00          | Average | 112   | 202   | VERTICAL  |
| 3 | 5238.20 | 106.70 |            |            | 69.42      | 3.46              | 33.82          | 0.00          | Average | 112   | 202   | VERTICAL  |
| 4 | 5238.20 | 116.83 |            |            | 79.55      | 3.46              | 33.82          | 0.00          | Peak    | 112   | 202   | VERTICAL  |
| 5 | 5359.00 | 46.22  | 54.00      | -7.78      | 8.70       | 3.49              | 34.03          | 0.00          | Average | 112   | 202   | VERTICAL  |
| 6 | 5359.00 | 57.35  | 74.00      | -16.65     | 19.83      | 3.49              | 34.03          | 0.00          | Peak    | 112   | 202   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5240 MHz.

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 38, 46 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

### Channel 38

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5149.20 | 53.70  | 54.00      | -0.30      | 16.60      | 3.43              | 33.67          | 0.00          | Average | 112   | 17    | VERTICAL  |
| 2 | 5149.20 | 70.15  | 74.00      | -3.85      | 33.05      | 3.43              | 33.67          | 0.00          | Peak    | 112   | 17    | VERTICAL  |
| 3 | 5193.60 | 100.19 |            |            | 63.02      | 3.44              | 33.73          | 0.00          | Average | 112   | 17    | VERTICAL  |
| 4 | 5193.60 | 112.40 |            |            | 75.23      | 3.44              | 33.73          | 0.00          | Peak    | 112   | 17    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            |         | cm    | deg   |           |
| 1 | 5143.60 | 50.63  | 54.00      | -3.37      | 13.53      | 3.43              | 33.67          | 0.00          | Average | 112   | 205   | VERTICAL  |
| 2 | 5143.60 | 61.44  | 74.00      | -12.56     | 24.34      | 3.43              | 33.67          | 0.00          | Peak    | 112   | 205   | VERTICAL  |
| 3 | 5233.60 | 103.92 |            |            | 66.64      | 3.46              | 33.82          | 0.00          | Average | 112   | 205   | VERTICAL  |
| 4 | 5233.60 | 114.97 |            |            | 77.69      | 3.46              | 33.82          | 0.00          | Peak    | 112   | 205   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5230 MHz.



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 80MHz CH 42 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |  |

**Channel 42**

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos | Pol/Phase |          |
|---|---------|--------|--------|-------|-------|--------------|--------|--------|---------|-------|-----------|----------|
|   | MHz     | dBuV/m | Line   | Limit | Level | Loss         | Factor | Factor | Remark  | cm    | deg       |          |
|   |         |        | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB     |         |       |           |          |
| 1 | 5149.00 | 53.82  | 54.00  | -0.18 | 16.72 | 3.43         | 33.67  | 0.00   | Average | 109   | 112       | VERTICAL |
| 2 | 5150.00 | 67.78  | 74.00  | -6.22 | 30.68 | 3.43         | 33.67  | 0.00   | Peak    | 109   | 112       | VERTICAL |
| 3 | 5219.00 | 94.11  |        |       | 56.87 | 3.45         | 33.79  | 0.00   | Average | 109   | 112       | VERTICAL |
| 4 | 5219.00 | 107.72 |        |       | 70.48 | 3.45         | 33.79  | 0.00   | Peak    | 109   | 112       | VERTICAL |

Item 3, 4 are the fundamental frequency at 5210 MHz.

|                      |               |                       |   |
|----------------------|---------------|-----------------------|---|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%   |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11a CH 36, 40, 48 /<br>Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Dec. 06, 2013 |                       |   |

### Channel 36

|   | Freq    | Level  | Limit  | Over  | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|-------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 5098.00 | 51.13  | 54.00  | -2.87 | 14.13 | 3.42  | 33.58   | 0.00   | Average | 100   | 250   | VERTICAL  |
| 2 | 5149.60 | 67.24  | 74.00  | -6.76 | 30.14 | 3.43  | 33.67   | 0.00   | Peak    | 100   | 250   | VERTICAL  |
| 3 | 5177.20 | 107.96 |        |       | 70.82 | 3.44  | 33.70   | 0.00   | Average | 100   | 250   | VERTICAL  |
| 4 | 5177.20 | 118.02 |        |       | 80.88 | 3.44  | 33.70   | 0.00   | Peak    | 100   | 250   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 5122.00 | 52.32  | 54.00  | -1.68  | 15.28 | 3.43  | 33.61   | 0.00   | Average | 100   | 324   | VERTICAL  |
| 2 | 5122.80 | 61.99  | 74.00  | -12.01 | 24.95 | 3.43  | 33.61   | 0.00   | Peak    | 100   | 324   | VERTICAL  |
| 3 | 5202.00 | 104.77 |        |        | 67.56 | 3.45  | 33.76   | 0.00   | Average | 100   | 324   | VERTICAL  |
| 4 | 5202.00 | 114.97 |        |        | 77.76 | 3.45  | 33.76   | 0.00   | Peak    | 100   | 324   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1 | 5121.80 | 41.77  | 54.00  | -12.23 | 4.73  | 3.43  | 33.61   | 0.00   | Average | 108   | 22    | VERTICAL  |
| 2 | 5121.80 | 54.86  | 74.00  | -19.14 | 17.82 | 3.43  | 33.61   | 0.00   | Peak    | 108   | 22    | VERTICAL  |
| 3 | 5241.20 | 105.53 |        |        | 68.25 | 3.46  | 33.82   | 0.00   | Average | 108   | 22    | VERTICAL  |
| 4 | 5241.20 | 116.08 |        |        | 78.80 | 3.46  | 33.82   | 0.00   | Peak    | 108   | 22    | VERTICAL  |
| 5 | 5361.40 | 44.65  | 54.00  | -9.35  | 7.13  | 3.49  | 34.03   | 0.00   | Average | 108   | 22    | VERTICAL  |
| 6 | 5361.40 | 56.33  | 74.00  | -17.67 | 18.81 | 3.49  | 34.03   | 0.00   | Peak    | 108   | 22    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

For beamforming function:

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 20MHz CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 |                       |  |

#### Channel 36

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5148.40 | 71.97  | 74.00      | -2.03      | 34.49      | 4.34       | 0.00          | 33.14          | Peak    | 28    | 110   | VERTICAL  |
| 2 | 5150.00 | 53.43  | 54.00      | -0.57      | 15.95      | 4.34       | 0.00          | 33.14          | Average | 28    | 110   | VERTICAL  |
| 3 | 5178.40 | 118.70 |            |            | 81.15      | 4.36       | 0.00          | 33.19          | Peak    | 28    | 110   | VERTICAL  |
| 4 | 5178.80 | 105.64 |            |            | 68.09      | 4.36       | 0.00          | 33.19          | Average | 28    | 110   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5180 MHz.

#### Channel 40

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5120.80 | 61.95  | 74.00      | -12.05     | 24.54      | 4.32       | 0.00          | 33.09          | Peak    | 152   | 110   | VERTICAL  |
| 2 | 5121.60 | 50.01  | 54.00      | -3.99      | 12.60      | 4.32       | 0.00          | 33.09          | Average | 152   | 110   | VERTICAL  |
| 3 | 5197.60 | 114.28 |            |            | 76.69      | 4.37       | 0.00          | 33.22          | Peak    | 152   | 110   | VERTICAL  |
| 4 | 5198.80 | 100.60 |            |            | 63.01      | 4.37       | 0.00          | 33.22          | Average | 152   | 110   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5200 MHz.

#### Channel 48

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5123.60 | 52.75  | 74.00      | -21.25     | 15.31      | 4.33       | 0.00          | 33.11          | Peak    | 197   | 130   | VERTICAL  |
| 2 | 5126.60 | 40.92  | 54.00      | -13.08     | 3.48       | 4.33       | 0.00          | 33.11          | Average | 197   | 130   | VERTICAL  |
| 3 | 5247.80 | 101.41 |            |            | 63.71      | 4.40       | 0.00          | 33.30          | Average | 197   | 130   | VERTICAL  |
| 4 | 5248.40 | 114.07 |            |            | 76.37      | 4.40       | 0.00          | 33.30          | Peak    | 197   | 130   | VERTICAL  |
| 5 | 5366.20 | 55.94  | 74.00      | -18.06     | 17.97      | 4.48       | 0.00          | 33.49          | Peak    | 197   | 130   | VERTICAL  |
| 6 | 5366.20 | 45.40  | 54.00      | -8.60      | 7.43       | 4.48       | 0.00          | 33.49          | Average | 197   | 130   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5240 MHz.

|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 40MHz CH 38, 46 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 |                       |  |

**Channel 38**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5150.00 | 68.35  | 74.00      | -5.65      | 30.87      | 4.34       | 0.00          | 33.14          | Peak    | 183   | 121   | VERTICAL  |
| 2 | 5150.00 | 53.81  | 54.00      | -0.19      | 16.33      | 4.34       | 0.00          | 33.14          | Average | 183   | 121   | VERTICAL  |
| 3 | 5197.20 | 96.99  |            |            | 59.40      | 4.37       | 0.00          | 33.22          | Average | 183   | 121   | VERTICAL  |
| 4 | 5200.80 | 110.34 |            |            | 72.75      | 4.37       | 0.00          | 33.22          | Peak    | 183   | 121   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5141.20 | 59.07  | 74.00      | -14.93     | 21.59      | 4.34       | 0.00          | 33.14          | Peak    | 332   | 127   | VERTICAL  |
| 2 | 5148.00 | 47.20  | 54.00      | -6.80      | 9.72       | 4.34       | 0.00          | 33.14          | Average | 332   | 127   | VERTICAL  |
| 3 | 5223.20 | 98.17  |            |            | 60.54      | 4.38       | 0.00          | 33.25          | Average | 332   | 127   | VERTICAL  |
| 4 | 5226.80 | 111.78 |            |            | 74.12      | 4.39       | 0.00          | 33.27          | Peak    | 332   | 127   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5230 MHz.



|                      |               |                       |  |
|----------------------|---------------|-----------------------|--|
| <b>Temperature</b>   | 21°C          | <b>Humidity</b>       | 53%  |
| <b>Test Engineer</b> | Nick Peng     | <b>Configurations</b> | IEEE 802.11ac MCS0, Nss1 80MHz CH 42 / Chain 1 + Chain 2 + Chain 3 |
| <b>Test Date</b>     | Nov. 28, 2013 |                       |  |

**Channel 42**

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Remark  | T/Pos | A/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|---------|-------|-------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |         | deg   | cm    |           |
| 1 | 5145.00 | 67.00  | 74.00      | -7.00      | 29.52      | 4.34       | 0.00          | 33.14          | Peak    | 35    | 110   | VERTICAL  |
| 2 | 5150.00 | 53.74  | 54.00      | -0.26      | 16.26      | 4.34       | 0.00          | 33.14          | Average | 35    | 110   | VERTICAL  |
| 3 | 5214.00 | 105.30 |            |            | 67.67      | 4.38       | 0.00          | 33.25          | Peak    | 35    | 110   | VERTICAL  |
| 4 | 5221.00 | 93.56  |            |            | 55.93      | 4.38       | 0.00          | 33.25          | Average | 35    | 110   | VERTICAL  |

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Entire absence of modulation emissions bandwidth |
| RBW                | 10 kHz   |
| VBW                | 10 kHz   |
| Sweep Time         | Auto   |

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

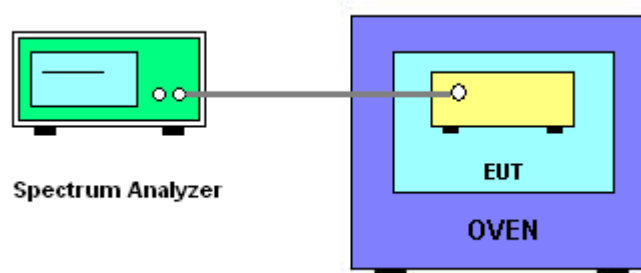

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

|                      |              |                  |               |
|----------------------|--------------|------------------|---------------|
| <b>Temperature</b>   | 17°C         | <b>Humidity</b>  | 62%           |
| <b>Test Engineer</b> | Satoshi Yang | <b>Test Date</b> | Jan. 11, 2014 |

#### Voltage vs. Frequency Stability

| Voltage              | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (V)                  | 5200 MHz                    |
| 126.50               | 5199.9821                   |
| 110.00               | 5199.9820                   |
| 93.50                | 5199.9511                   |
| Max. Deviation (MHz) | 0.048900                    |
| Max. Deviation (ppm) | 9.40                        |

#### Temperature vs. Frequency Stability

| Temperature          | Measurement Frequency (MHz) |
|----------------------|-----------------------------|
| (°C)                 | 5200 MHz                    |
| 0                    | 5199.9811                   |
| 10                   | 5199.9817                   |
| 20                   | 5199.9820                   |
| 30                   | 5199.9825                   |
| 40                   | 5199.9831                   |
| Max. Deviation (MHz) | 0.018900                    |
| Max. Deviation (ppm) | 3.63                        |

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer  | Model No.     | Serial No.  | Characteristics  | Calibration Date | Remark                |
|----------------------------|---------------|---------------|-------------|------------------|------------------|-----------------------|
| Artificial Mains Network   | Schwarzbeck   | NSLK 8127     | 8127478     | 9kHz ~ 30MHz     | Nov. 11, 2013    | Conduction (CO02-CB)  |
| Artificial Mains Network   | Schwarzbeck   | NSLK 8127     | 8127650     | 9kHz ~ 30MHz     | Nov. 11, 2013    | Conduction (CO02-CB)  |
| EMI Test Receiver          | Agilent       | N9038A        | MY52260123  | 9KHz ~ 8GHz      | Dec. 12, 2013    | Conduction (CO02-CB)  |
| COND Cable                 | Woken         | Cable         | 01          | 0.15MHz~30MHz    | Dec. 04, 2013    | Conduction (CO02-CB)  |
| Software                   | Audix         | E3            | 5.410e      | -                | -                | Conduction (CO02-CB)  |
| BILOG ANTENNA              | Schaffner     | CBL6112D      | 22021       | 20MHz ~ 2GHz     | Apr. 16, 2013    | Radiation (O3CH01-CB) |
| Loop Antenna               | Teseq         | HLA 6120      | 24155       | 9 kHz - 30 MHz   | Nov. 05, 2012*   | Radiation (O3CH01-CB) |
| Horn Antenna               | EMCO          | 3115          | 00075790    | 750MHz~18GHz     | Nov. 01, 2013    | Radiation (O3CH01-CB) |
| Horn Antenna               | SCHWARZBECK   | BBHA 9170     | 9170-507    | 15GHz ~ 40GHz    | Jan. 14, 2013    | Radiation (O3CH01-CB) |
| Horn Antenna               | SCHWARZBEAK   | BBHA 9170     | BBHA9170252 | 15GHz ~ 40GHz    | Dec. 17, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | Agilent       | 8447D         | 2944A10991  | 0.1MHz ~ 1.3GHz  | Nov. 12, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | Agilent       | 8449B         | 3008A02310  | 1GHz ~ 26.5GHz   | Dec. 16, 2013    | Radiation (O3CH01-CB) |
| Pre-Amplifier              | WM            | TF-130N-R1    | 923365      | 26GHz ~ 40GHz    | Oct. 23, 2013    | Radiation (O3CH01-CB) |
| Spectrum analyzer          | Rohde&Schwarz | FSV30         | 101026      | 9kHz ~ 30GHz     | Nov. 15, 2013    | Radiation (O3CH01-CB) |
| Spectrum analyzer          | R&S           | FSP40         | 100019      | 9kHz~40GHz       | Dec. 02, 2013    | Radiation (O3CH01-CB) |
| EMI Test Receiver          | R&S           | ESCS 30       | 100355      | 9kHz ~ 2.75GHz   | Apr. 12, 2013    | Radiation (O3CH01-CB) |
| EMI Test Receiver          | Agilent       | N9038A        | MY52260123  | 9kHz ~ 8GHz      | Dec. 12, 2013    | Radiation (O3CH01-CB) |
| Turn Table                 | INN CO        | CO 2000       | N/A         | 0 ~ 360 degree   | N.C.R            | Radiation (O3CH01-CB) |
| Antenna Mast               | INN CO        | CO2000        | N/A         | 1 m - 4 m        | N.C.R            | Radiation (O3CH01-CB) |
| RF Cable-low               | Woken         | Low Cable-1   | N/A         | 30 MHz - 1 GHz   | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken         | High Cable-1  | N/A         | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken         | High Cable-2  | N/A         | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken         | High Cable-3  | N/A         | 1 GHz - 40 GHz   | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| RF Cable-high              | Woken         | High Cable-4  | N/A         | 1 GHz - 40 GHz   | Nov. 17, 2013    | Radiation (O3CH01-CB) |
| Signal analyzer            | R&S           | FSV40         | 100979      | 9kHz~40GHz       | Nov. 29, 2013    | Conducted (TH01-CB)   |
| Temp. and Humidity Chamber | Ten Billion   | TTH-D3SP      | TBN-931011  | -30~100 degree   | Jun. 04, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken         | High Cable-7  | -           | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken         | High Cable-8  | -           | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken         | High Cable-9  | -           | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken         | High Cable-10 | -           | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken         | High Cable-11 | -           | 1 GHz - 26.5 GHz | Nov. 17, 2013    | Conducted (TH01-CB)   |
| Power Sensor               | Anritsu       | MA2411B       | 0917223     | 300MHz~40GHz     | Sep. 18, 2013    | Conducted (TH01-CB)   |



---

| Instrument  | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark              |
|-------------|--------------|-----------|------------|-----------------|------------------|---------------------|
| Power Meter | Anritsu      | ML2495A   | 1035008    | 300MHz~40GHz    | Sep. 18, 2013    | Conducted (TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | 0.026                | dB   | normal(k=2)                   | 0.013    |
| Cable loss   | 0.002                | dB   | normal(k=2)                   | 0.001    |
| AMN/LISN specification   | 1.200                | dB   | normal(k=2)                   | 0.600    |
| Mismatch<br>Receiver VSWR 1=<br>AMN/LISN VSWR 2=                   | -0.080               | dB   | U-shaped                      | 0.060    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.2      |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 2.4      |

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

| Contribution   | Uncertainty of $x_i$ |      |                               | $u(x_i)$ |
|--|----------------------|------|-------------------------------|----------|
|  | Value                | Unit | Probability Distribution<br>k |          |
| Receiver reading   | $\pm 0.173$          | dB   | K=1                           | 0.086    |
| Cable loss   | $\pm 0.174$          | dB   | K=2                           | 0.087    |
| Antenna gain   | $\pm 0.169$          | dB   | K=2                           | 0.084    |
| Site imperfection  | $\pm 0.433$          | dB   | Triangular                    | 0.214    |
| Pre-amplifier gain   | $\pm 0.366$          | dB   | K=2                           | 0.183    |
| Transmitter antenna  | $\pm 1.200$          | dB   | Rectangular                   | 0.600    |
| Signal generator   | $\pm 0.461$          | dB   | Rectangular                   | 0.231    |
| Mismatch   | $\pm 0.080$          | dB   | U-shape                       | 0.040    |
| Spectrum analyzer  | $\pm 0.500$          | dB   | Rectangular                   | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                               | 1.778    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                               | 3.555    |

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.191               | dB   | K=1                        | 0.095    |
| Cable loss   | ±0.169               | dB   | K=2                        | 0.084    |
| Antenna gain   | ±0.191               | dB   | K=2                        | 0.096    |
| Site imperfection  | ±0.582               | dB   | Triangular                 | 0.291    |
| Pre-amplifier gain   | ±0.304               | dB   | K=2                        | 0.152    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.839    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.678    |

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Receiver reading   | ±0.186               | dB   | K=1                        | 0.093    |
| Cable loss   | ±0.167               | dB   | K=2                        | 0.083    |
| Antenna gain   | ±0.190               | dB   | K=2                        | 0.095    |
| Site imperfection  | ±0.488               | dB   | Triangular                 | 0.244    |
| Pre-amplifier gain   | ±0.269               | dB   | K=2                        | 0.134    |
| Transmitter antenna  | ±1.200               | dB   | Rectangular                | 0.600    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 1.771    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 3.541    |

### Uncertainty of Conducted Emission Measurement

| Contribution   | Uncertainty of $x_i$ |      |                            | $u(x_i)$ |
|--|----------------------|------|----------------------------|----------|
|  | Value                | Unit | Probability Distribution k |          |
| Cable loss   | ±0.038               | dB   | K=2                        | 0.019    |
| Attenuator   | ±0.047               | dB   | K=2                        | 0.024    |
| Power Meter specification  | ±0.300               | dB   | Triangular                 | 0.150    |
| Power Sensor specification   | ±0.300               | dB   | Rectangular                | 0.150    |
| Signal generator   | ±0.461               | dB   | Rectangular                | 0.231    |
| Mismatch   | ±0.080               | dB   | U-shape                    | 0.040    |
| Spectrum analyzer  | ±0.500               | dB   | Rectangular                | 0.250    |
| Combined standard uncertainty $U_c(y)$                             |                      |      |                            | 0.863    |
| Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$ |                      |      |                            | 1.726    |