

Report No.: RF181022E01

FCC ID: KA2IRX6060A1

Test Model: DIR-X6060

Received Date: Oct. 22, 2018

Test Date: Dec. 15, 2018 to Mar. 16, 2019

Issued Date: May 08, 2019

Applicant: D-Link Corporation

Address: No.289, Xinhu 3rd Rd., Neihu District, Tapei City 11494, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal.....	13
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	14
3.5 General Description of Applied Standards.....	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	16
4.1.2 Test Instruments.....	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard.....	20
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results.....	22
4.2 Conducted Emission Measurement.....	36
4.2.1 Limits of Conducted Emission Measurement.....	36
4.2.2 Test Instruments.....	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard.....	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results.....	38
4.3 6dB Bandwidth Measurement.....	40
4.3.1 Limits of 6dB Bandwidth Measurement.....	40
4.3.2 Test Setup.....	40
4.3.3 Test Instruments.....	40
4.3.4 Test Procedure.....	40
4.3.5 Deviation from Test Standard.....	40
4.3.6 EUT Operating Conditions.....	40
4.3.7 Test Result.....	41
4.4 Occupied Bandwidth Measurement.....	43
4.4.1 Test Setup.....	43
4.4.2 Test Instruments.....	43
4.4.3 Test Procedure.....	43
4.4.4 Deviation from Test Standard.....	43
4.4.5 EUT Operating Conditions.....	43
4.4.6 Test Results.....	44
4.5 Conducted Output Power Measurement.....	46
4.5.1 Limits of Conducted Output Power Measurement.....	46
4.5.2 Test Setup.....	46
4.5.3 Test Instruments.....	46
4.5.4 Test Procedures.....	46
4.5.5 Deviation from Test Standard.....	46
4.5.6 EUT Operating Conditions.....	46
4.5.7 Test Results.....	47

4.6	Power Spectral Density Measurement.....	51
4.6.1	Limits of Power Spectral Density Measurement	51
4.6.2	Test Setup.....	51
4.6.3	Test Instruments	51
4.6.4	Test Procedure	51
4.6.5	Deviation from Test Standard	51
4.6.6	EUT Operating Condition	51
4.6.7	Test Results	52
4.7	Conducted Out of Band Emission Measurement.....	55
4.7.1	Limits of Conducted Out of Band Emission Measurement	55
4.7.2	Test Setup.....	55
4.7.3	Test Instruments	55
4.7.4	Test Procedure	55
4.7.5	Deviation from Test Standard	55
4.7.6	EUT Operating Condition	55
4.7.7	Test Results	55
5	Pictures of Test Arrangements.....	72
	Appendix – Information of the Testing Laboratories	73

Release Control Record

Issue No.	Description	Date Issued
RF181022E01	Original release.	May 08, 2019

1 Certificate of Conformity

Product: AX6000 Wi-Fi 6 Router

Brand: D-Link

Test Model: DIR-X6060

Sample Status: ENGINEERING SAMPLE

Applicant: D-Link Corporation

Test Date: Dec. 15, 2018 to Mar. 16, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang , **Date:** May 08, 2019
Phoenix Huang / Specialist

Approved by : May Chen , **Date:** May 08, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.28dB at 0.44297MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 2487.80MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX6000 Wi-Fi 6 Router
Brand	D-Link
Test Model	DIR-X6060
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 3466.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5 ~ 5.72GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2
Output Power	Non-Beamforming Mode: 2.4GHz: 941.67mW 5.18 ~ 5.24GHz: 653.582mW 5.26 ~ 5.32GHz: 240.802mW 5.5 ~ 5.72GHz: 248.712mW 5.745 ~ 5.825GHz: 965.86mW Beamforming Mode: 2.4GHz: 508.849mW 5.18 ~ 5.24GHz: 653.582mW 5.26 ~ 5.32GHz: 169.025mW 5.5 ~ 5.72GHz: 169.439mW 5.745 ~ 5.825GHz: 674.209mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN (2.4GHz)	WLAN (5GHz)	Bluetooth

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz)	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied a power adapter as following table:

Brand	Model No.	Spec.
Asian Power Devices Inc.	WA-36A12R	Input: 100-240Vac, 0.9A Max, 50-60Hz Output: 12V, 3A DC Output cable: Unshielded, 1.2m

4. The antennas provided to the EUT, please refer to the following table:

WLAN			
Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Connector Type
2.4~2.4835	6.628229	Dipole	R-SMA
5.15~5.85	7.698165		

Bluetooth			
Frequency Range (GHz)	Antenna Net Gain (dBi)	Antenna Type	Connector Type
2.4~2.4835	2.97	Printed	NA

Note: More detailed information, please refer to operating description.

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ac (VHT160)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz, 160MHz) and 802.11ax mode for 20MHz (40MHz, 80MHz, 160MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)
6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	11	DSSS	DBPSK	1Mb/s

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	11	DSSS	DBPSK	1Mb/s

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (Output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	22deg. C, 62%RH	120Vac, 60Hz	Rey Chen
RE $<$ 1G	25deg. C, 68%RH	120Vac, 60Hz	Andy Ho
PLC	24deg. C, 76%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = $12.449/12.506 = 0.995$


802.11g: Duty cycle = $1.471/1.502 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

VHT20: Duty cycle = $1.471/1.512 = 0.973$, Duty factor = $10 * \log(1/0.973) = 0.12$

VHT40: Duty cycle = $1.459/1.491 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

802.11ax (HE20): Duty cycle = $1.1461/1.183 = 0.969$, Duty factor = $10 * \log(1/0.969) = 0.14$

802.11ax (HE40): Duty cycle = $1.183/1.221 = 0.969$, Duty factor = $10 * \log(1/0.969) = 0.14$

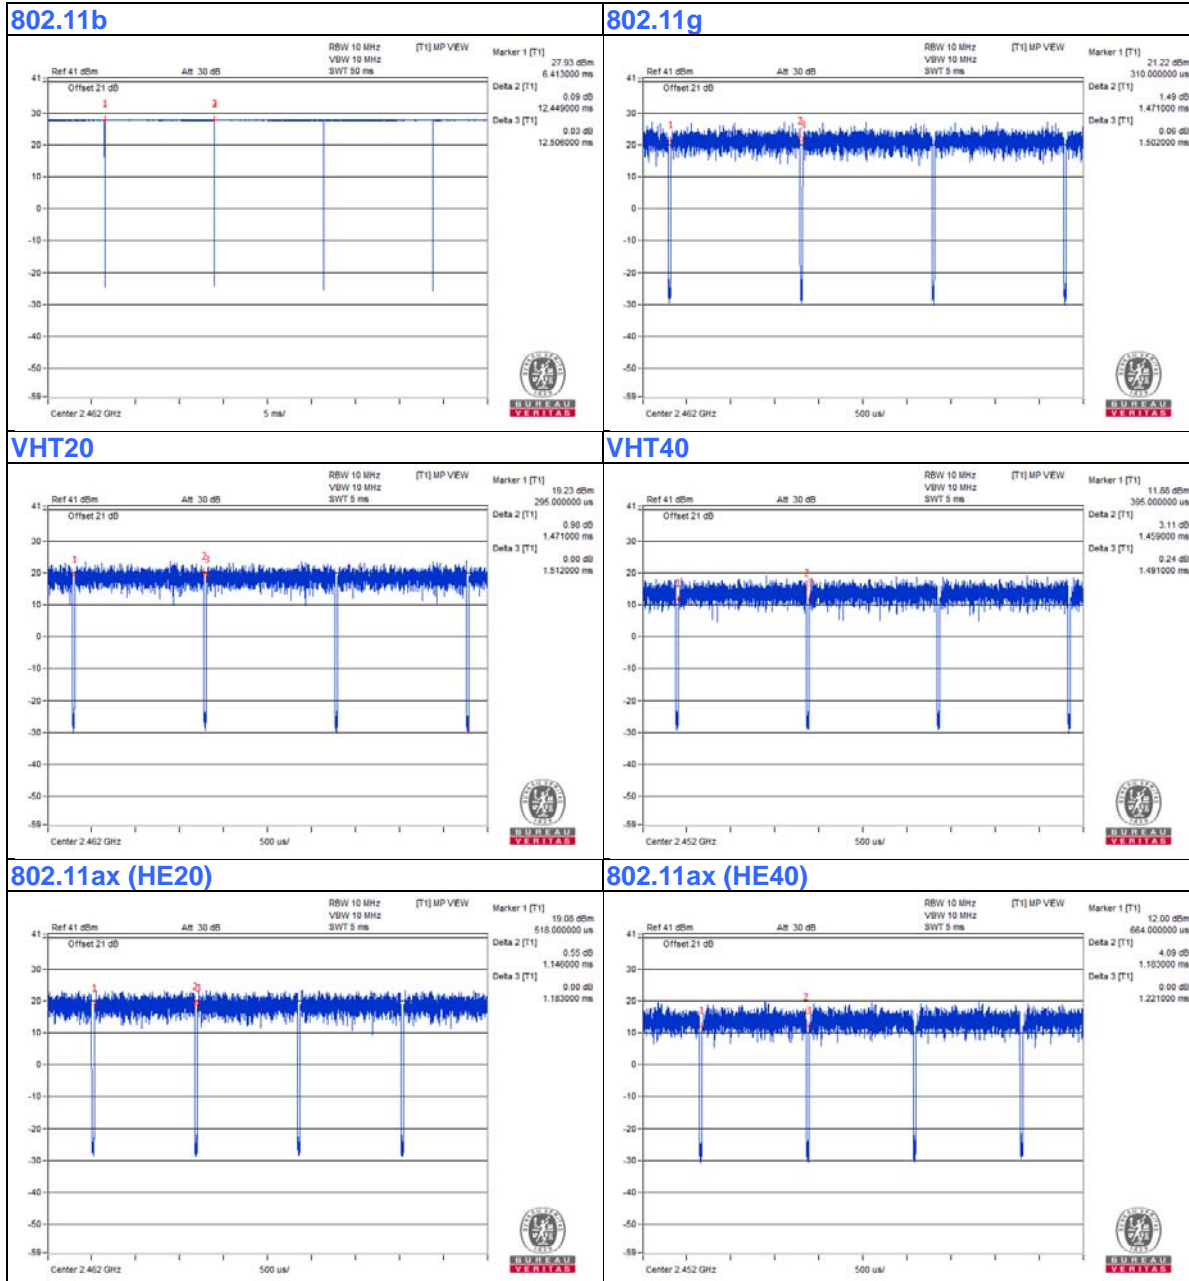

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	HP	TPN-Q186	5CD8212YYG	FCC DoC	Provided by Lab
C.	USB 3.0 Disk	Transcend	16GB	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.2	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test

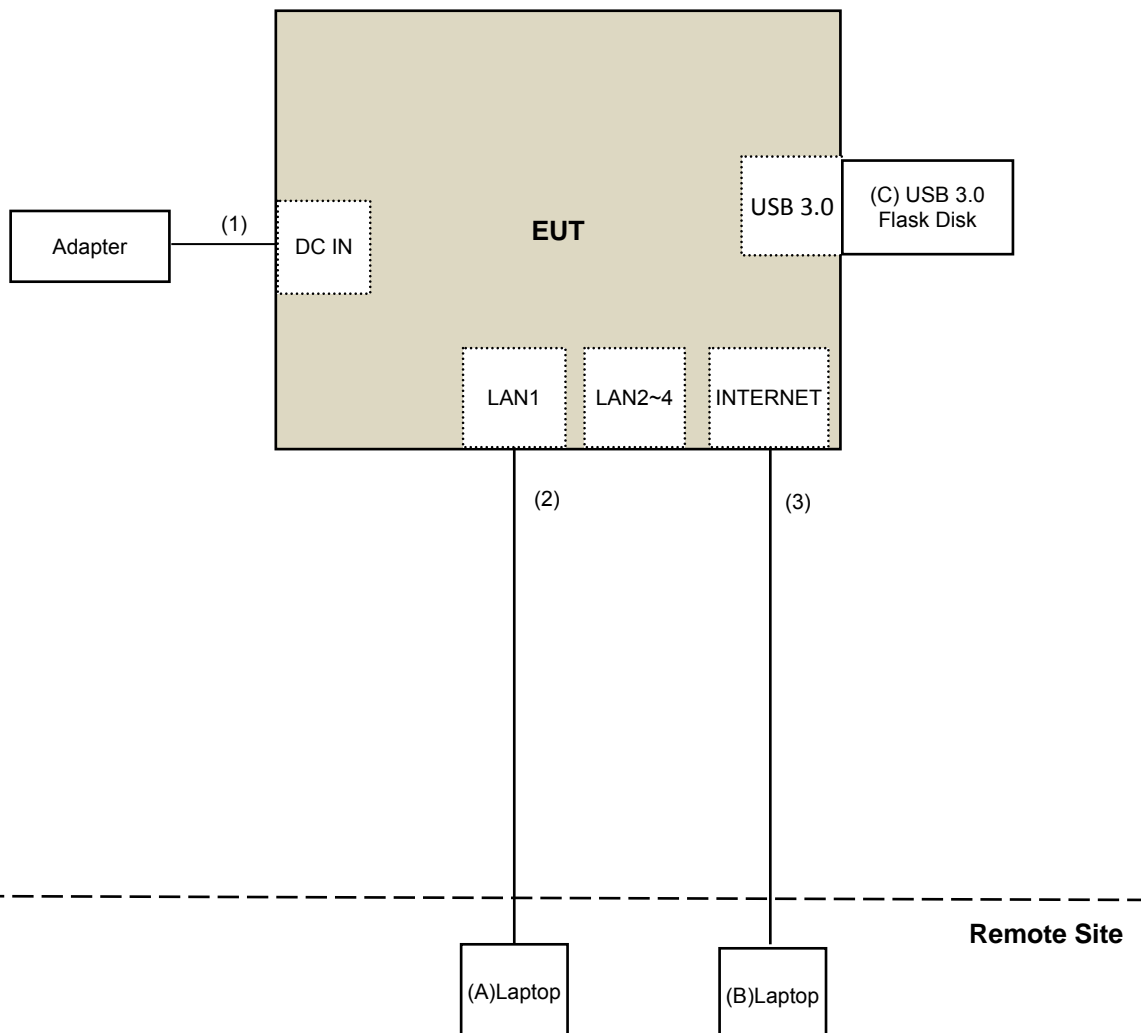

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r01
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 15, 2018	Jan. 14, 2019
RF Cable	NA	LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Dec. 15, 2018

For Above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 07, 2018	May 06, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Mar. 11 to 16, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

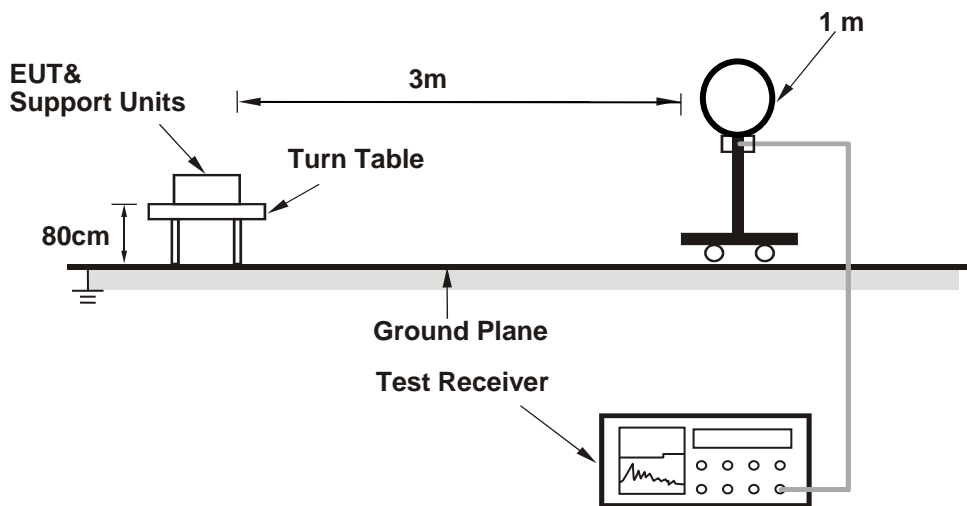

For Radiated emission 30MHz to 1GHz

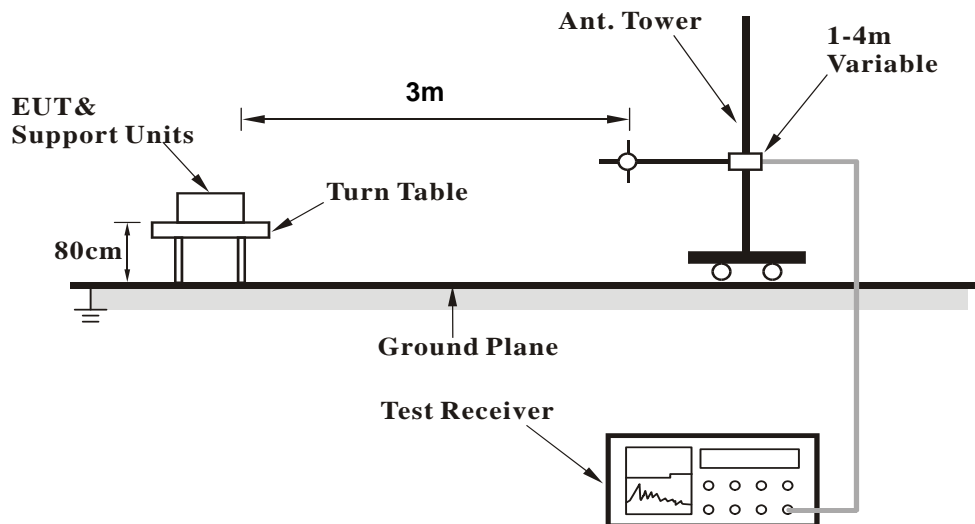

For Radiated emission above 1GHz

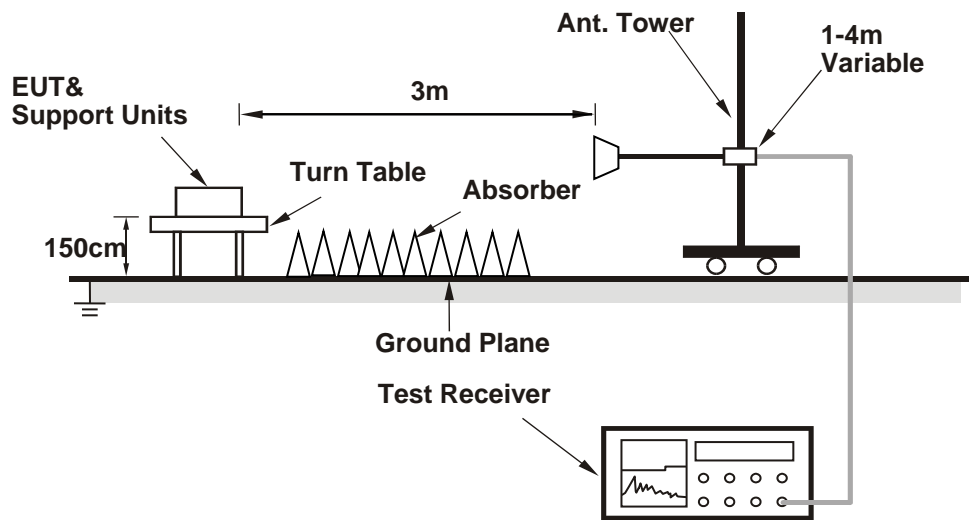

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (Access Manual Tool 3.0.0.6) has been activated to set the EUT under transmission/receiving condition continuously.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.2 PK	74.0	-24.8	1.06 H	235	51.4	-2.2
2	2390.00	38.1 AV	54.0	-15.9	1.06 H	235	40.3	-2.2
3	*2412.00	105.6 PK			1.06 H	235	107.9	-2.3
4	*2412.00	103.4 AV			1.06 H	235	105.7	-2.3
5	4824.00	49.7 PK	74.0	-24.3	2.30 H	285	48.0	1.7
6	4824.00	47.9 AV	54.0	-6.1	2.30 H	285	46.2	1.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.98 V	228	67.7	-2.2
2	2390.00	53.5 AV	54.0	-0.5	1.98 V	228	55.7	-2.2
3	*2412.00	123.2 PK			1.98 V	228	125.5	-2.3
4	*2412.00	120.8 AV			1.98 V	228	123.1	-2.3
5	4824.00	53.4 PK	74.0	-20.6	1.04 V	63	51.7	1.7
6	4824.00	52.7 AV	54.0	-1.3	1.04 V	63	51.0	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.7 PK	74.0	-25.3	1.08 H	233	50.9	-2.2
2	2390.00	37.6 AV	54.0	-16.4	1.08 H	233	39.8	-2.2
3	*2437.00	106.0 PK			1.08 H	233	108.4	-2.4
4	*2437.00	103.8 AV			1.08 H	233	106.2	-2.4
5	2483.50	49.2 PK	74.0	-24.8	1.08 H	233	51.5	-2.3
6	2483.50	38.1 AV	54.0	-15.9	1.08 H	233	40.4	-2.3
7	4874.00	49.7 PK	74.0	-24.3	2.29 H	261	48.0	1.7
8	4874.00	48.0 AV	54.0	-6.0	2.29 H	261	46.3	1.7
9	7311.00	42.6 PK	74.0	-31.4	1.31 H	3	34.4	8.2
10	7311.00	31.7 AV	54.0	-22.3	1.31 H	3	23.5	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.30	62.8 PK	74.0	-11.2	1.67 V	278	65.0	-2.2
2	2386.30	52.7 AV	54.0	-1.3	1.67 V	278	54.9	-2.2
3	2390.00	62.5 PK	74.0	-11.5	1.67 V	278	64.7	-2.2
4	2390.00	49.6 AV	54.0	-4.4	1.67 V	278	51.8	-2.2
5	*2437.00	120.3 PK			1.67 V	278	122.7	-2.4
6	*2437.00	118.1 AV			1.67 V	278	120.5	-2.4
7	2483.50	64.1 PK	74.0	-9.9	1.67 V	278	66.4	-2.3
8	2483.50	50.3 AV	54.0	-3.7	1.67 V	278	52.6	-2.3
9	2487.80	64.3 PK	74.0	-9.7	1.67 V	278	66.6	-2.3
10	2487.80	53.9 AV	54.0	-0.1	1.67 V	278	56.2	-2.3
11	4874.00	53.6 PK	74.0	-20.4	1.09 V	68	51.9	1.7
12	4874.00	52.8 AV	54.0	-1.2	1.09 V	68	51.1	1.7
13	7311.00	44.9 PK	74.0	-29.1	1.20 V	37	36.7	8.2
14	7311.00	35.5 AV	54.0	-18.5	1.20 V	37	27.3	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.0 PK			1.04 H	221	108.4	-2.4
2	*2462.00	103.7 AV			1.04 H	221	106.1	-2.4
3	2483.50	55.2 PK	74.0	-18.8	1.04 H	221	57.5	-2.3
4	2483.50	42.4 AV	54.0	-11.6	1.04 H	221	44.7	-2.3
5	4924.00	49.2 PK	74.0	-24.8	2.35 H	275	47.4	1.8
6	4924.00	47.6 AV	54.0	-6.4	2.35 H	275	45.8	1.8
7	7386.00	42.7 PK	74.0	-31.3	1.31 H	17	34.4	8.3
8	7386.00	31.8 AV	54.0	-22.2	1.31 H	17	23.5	8.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	123.4 PK			1.84 V	140	125.8	-2.4
2	*2462.00	121.3 AV			1.84 V	140	123.7	-2.4
3	2483.50	63.8 PK	74.0	-10.2	1.84 V	140	66.1	-2.3
4	2483.50	51.6 AV	54.0	-2.4	1.84 V	140	53.9	-2.3
5	4924.00	53.8 PK	74.0	-20.2	1.07 V	57	52.0	1.8
6	4924.00	52.7 AV	54.0	-1.3	1.07 V	57	50.9	1.8
7	7386.00	44.2 PK	74.0	-29.8	1.25 V	44	35.9	8.3
8	7386.00	35.1 AV	54.0	-18.9	1.25 V	44	26.8	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.1 PK	74.0	-24.9	1.03 H	249	51.3	-2.2
2	2390.00	38.2 AV	54.0	-15.8	1.03 H	249	40.4	-2.2
3	*2412.00	105.2 PK			1.03 H	249	107.5	-2.3
4	*2412.00	94.3 AV			1.03 H	249	96.6	-2.3
5	4824.00	40.7 PK	74.0	-33.3	2.32 H	264	39.0	1.7
6	4824.00	29.9 AV	54.0	-24.1	2.32 H	264	28.2	1.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.33 V	224	74.4	-2.2
2	2390.00	53.9 AV	54.0	-0.1	1.33 V	224	56.1	-2.2
3	*2412.00	120.1 PK			1.33 V	224	122.4	-2.3
4	*2412.00	109.9 AV			1.33 V	224	112.2	-2.3
5	4824.00	52.1 PK	74.0	-21.9	1.11 V	61	50.4	1.7
6	4824.00	40.3 AV	54.0	-13.7	1.11 V	61	38.6	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.7 PK	74.0	-25.3	1.01 H	237	50.9	-2.2
2	2390.00	37.7 AV	54.0	-16.3	1.01 H	237	39.9	-2.2
3	*2437.00	105.7 PK			1.01 H	237	108.1	-2.4
4	*2437.00	94.7 AV			1.01 H	237	97.1	-2.4
5	2483.50	49.2 PK	74.0	-24.8	1.01 H	237	51.5	-2.3
6	2483.50	38.0 AV	54.0	-16.0	1.01 H	237	40.3	-2.3
7	4874.00	40.9 PK	74.0	-33.1	2.35 H	260	39.2	1.7
8	4874.00	29.8 AV	54.0	-24.2	2.35 H	260	28.1	1.7
9	7311.00	42.9 PK	74.0	-31.1	1.27 H	5	34.7	8.2
10	7311.00	31.9 AV	54.0	-22.1	1.27 H	5	23.7	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.20	63.1 PK	74.0	-10.9	1.15 V	224	65.3	-2.2
2	2386.20	53.5 AV	54.0	-0.5	1.15 V	224	55.7	-2.2
3	2390.00	62.3 PK	74.0	-11.7	1.15 V	224	64.5	-2.2
4	2390.00	48.8 AV	54.0	-5.2	1.15 V	224	51.0	-2.2
5	*2437.00	119.9 PK			1.15 V	224	122.3	-2.4
6	*2437.00	110.4 AV			1.15 V	224	112.8	-2.4
7	2483.50	59.6 PK	74.0	-14.4	1.15 V	224	61.9	-2.3
8	2483.50	47.3 AV	54.0	-6.7	1.15 V	224	49.6	-2.3
9	2487.70	60.1 PK	74.0	-13.9	1.15 V	224	62.4	-2.3
10	2487.70	50.1 AV	54.0	-3.9	1.15 V	224	52.4	-2.3
11	4874.00	55.6 PK	74.0	-18.4	1.05 V	70	53.9	1.7
12	4874.00	43.2 AV	54.0	-10.8	1.05 V	70	41.5	1.7
13	7311.00	43.3 PK	74.0	-30.7	1.23 V	37	35.1	8.2
14	7311.00	32.2 AV	54.0	-21.8	1.23 V	37	24.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.2 PK			1.04 H	229	107.6	-2.4
2	*2462.00	94.3 AV			1.04 H	229	96.7	-2.4
3	2483.50	49.0 PK	74.0	-25.0	1.04 H	229	51.3	-2.3
4	2483.50	37.6 AV	54.0	-16.4	1.04 H	229	39.9	-2.3
5	4924.00	40.5 PK	74.0	-33.5	2.39 H	281	38.7	1.8
6	4924.00	29.6 AV	54.0	-24.4	2.39 H	281	27.8	1.8
7	7386.00	43.3 PK	74.0	-30.7	1.28 H	26	35.0	8.3
8	7386.00	32.3 AV	54.0	-21.7	1.28 H	26	24.0	8.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.4 PK			1.57 V	222	122.8	-2.4
2	*2462.00	110.7 AV			1.57 V	222	113.1	-2.4
3	2483.50	73.8 PK	74.0	-0.2	1.57 V	222	76.1	-2.3
4	2483.50	53.4 AV	54.0	-0.6	1.57 V	222	55.7	-2.3
5	4924.00	52.1 PK	74.0	-21.9	1.01 V	47	50.3	1.8
6	4924.00	40.2 AV	54.0	-13.8	1.01 V	47	38.4	1.8
7	7386.00	43.8 PK	74.0	-30.2	1.29 V	33	35.5	8.3
8	7386.00	32.8 AV	54.0	-21.2	1.29 V	33	24.5	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.9 PK	74.0	-25.1	1.01 H	221	51.1	-2.2
2	2390.00	38.0 AV	54.0	-16.0	1.01 H	221	40.2	-2.2
3	*2412.00	106.7 PK			1.01 H	221	109.0	-2.3
4	*2412.00	93.1 AV			1.01 H	221	95.4	-2.3
5	4824.00	40.4 PK	74.0	-33.6	2.39 H	264	38.7	1.7
6	4824.00	29.5 AV	54.0	-24.5	2.39 H	264	27.8	1.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	1.56 V	218	72.2	-2.2
2	2390.00	53.8 AV	54.0	-0.2	1.56 V	218	56.0	-2.2
3	*2412.00	121.7 PK			1.56 V	218	124.0	-2.3
4	*2412.00	108.2 AV			1.56 V	218	110.5	-2.3
5	4824.00	52.0 PK	74.0	-22.0	1.12 V	46	50.3	1.7
6	4824.00	40.3 AV	54.0	-13.7	1.12 V	46	38.6	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.7 PK	74.0	-25.3	1.01 H	221	50.9	-2.2
2	2390.00	37.4 AV	54.0	-16.6	1.01 H	221	39.6	-2.2
3	*2437.00	105.5 PK			1.07 H	221	107.9	-2.4
4	*2437.00	94.7 AV			1.07 H	221	97.1	-2.4
5	2483.50	49.6 PK	74.0	-24.4	1.07 H	221	51.9	-2.3
6	2483.50	38.3 AV	54.0	-15.7	1.07 H	221	40.6	-2.3
7	4874.00	40.3 PK	74.0	-33.7	2.33 H	264	38.6	1.7
8	4874.00	29.3 AV	54.0	-24.7	2.33 H	264	27.6	1.7
9	7311.00	42.7 PK	74.0	-31.3	1.26 H	26	34.5	8.2
10	7311.00	31.9 AV	54.0	-22.1	1.26 H	26	23.7	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.10	60.0 PK	74.0	-14.0	1.62 V	53	62.2	-2.2
2	2386.10	53.8 AV	54.0	-0.2	1.62 V	53	56.0	-2.2
3	2390.00	58.7 PK	74.0	-15.3	1.62 V	53	60.9	-2.2
4	2390.00	48.9 AV	54.0	-5.1	1.62 V	53	51.1	-2.2
5	*2437.00	123.9 PK			1.62 V	53	126.3	-2.4
6	*2437.00	110.2 AV			1.62 V	53	112.6	-2.4
7	2483.50	59.3 PK	74.0	-14.7	1.62 V	53	61.6	-2.3
8	2483.50	47.9 AV	54.0	-6.1	1.62 V	53	50.2	-2.3
9	2487.60	61.5 PK	74.0	-12.5	1.62 V	53	63.8	-2.3
10	2487.60	49.9 AV	54.0	-4.1	1.62 V	53	52.2	-2.3
11	4874.00	55.6 PK	74.0	-18.4	1.06 V	66	53.9	1.7
12	4874.00	43.1 AV	54.0	-10.9	1.06 V	66	41.4	1.7
13	7311.00	43.0 PK	74.0	-31.0	1.31 V	53	34.8	8.2
14	7311.00	31.9 AV	54.0	-22.1	1.31 V	53	23.7	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.4 PK			1.08 H	246	104.8	-2.4
2	*2462.00	91.4 AV			1.08 H	246	93.8	-2.4
3	2483.50	50.0 PK	74.0	-24.0	1.08 H	246	52.3	-2.3
4	2483.50	38.6 AV	54.0	-15.4	1.08 H	246	40.9	-2.3
5	4924.00	40.3 PK	74.0	-33.7	2.37 H	269	38.5	1.8
6	4924.00	29.7 AV	54.0	-24.3	2.37 H	269	27.9	1.8
7	7386.00	43.8 PK	74.0	-30.2	1.31 H	9	35.5	8.3
8	7386.00	32.6 AV	54.0	-21.4	1.31 H	9	24.3	8.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.1 PK			1.99 V	43	119.5	-2.4
2	*2462.00	106.6 AV			1.99 V	43	109.0	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.99 V	43	74.3	-2.3
4	2483.50	53.7 AV	54.0	-0.3	1.99 V	43	56.0	-2.3
5	4924.00	51.9 PK	74.0	-22.1	1.13 V	55	50.1	1.8
6	4924.00	40.3 AV	54.0	-13.7	1.13 V	55	38.5	1.8
7	7386.00	43.5 PK	74.0	-30.5	1.22 V	54	35.2	8.3
8	7386.00	32.7 AV	54.0	-21.3	1.22 V	54	24.4	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.0 PK	74.0	-25.0	1.05 H	243	51.2	-2.2
2	2390.00	38.1 AV	54.0	-15.9	1.05 H	243	40.3	-2.2
3	*2422.00	100.2 PK			1.05 H	243	102.5	-2.3
4	*2422.00	89.2 AV			1.05 H	243	91.5	-2.3
5	4844.00	40.8 PK	74.0	-33.2	2.31 H	282	39.2	1.6
6	4844.00	29.8 AV	54.0	-24.2	2.31 H	282	28.2	1.6
7	7266.00	42.7 PK	74.0	-31.3	1.37 H	17	34.5	8.2
8	7266.00	31.8 AV	54.0	-22.2	1.37 H	17	23.6	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.60	65.2 PK	74.0	-8.8	1.71 V	45	67.4	-2.2
2	2388.60	53.8 AV	54.0	-0.2	1.71 V	45	56.0	-2.2
3	2390.00	57.2 PK	74.0	-16.8	1.71 V	45	59.4	-2.2
4	2390.00	48.1 AV	54.0	-5.9	1.71 V	45	50.3	-2.2
5	*2422.00	115.9 PK			1.71 V	45	118.2	-2.3
6	*2422.00	104.6 AV			1.71 V	45	106.9	-2.3
7	4844.00	40.5 PK	74.0	-33.5	1.04 V	72	38.9	1.6
8	4844.00	29.7 AV	54.0	-24.3	1.04 V	72	28.1	1.6
9	7266.00	43.4 PK	74.0	-30.6	1.28 V	45	35.2	8.2
10	7266.00	32.2 AV	54.0	-21.8	1.28 V	45	24.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.0 PK	74.0	-25.0	1.11 H	244	51.2	-2.2
2	2390.00	37.8 AV	54.0	-16.2	1.11 H	244	40.0	-2.2
3	*2437.00	102.6 PK			1.11 H	244	105.0	-2.4
4	*2437.00	92.9 AV			1.11 H	244	95.3	-2.4
5	2483.50	49.3 PK	74.0	-24.7	1.11 H	244	51.6	-2.3
6	2483.50	38.3 AV	54.0	-15.7	1.11 H	244	40.6	-2.3
7	4874.00	40.6 PK	74.0	-33.4	2.39 H	286	38.9	1.7
8	4874.00	29.7 AV	54.0	-24.3	2.39 H	286	28.0	1.7
9	7311.00	42.9 PK	74.0	-31.1	1.30 H	12	34.7	8.2
10	7311.00	31.8 AV	54.0	-22.2	1.30 H	12	23.6	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.87 V	224	69.5	-2.2
2	2390.00	53.7 AV	54.0	-0.3	1.87 V	224	55.9	-2.2
3	*2437.00	117.7 PK			1.87 V	224	120.1	-2.4
4	*2437.00	108.4 AV			1.87 V	224	110.8	-2.4
5	2483.50	63.3 PK	74.0	-10.7	1.87 V	224	65.6	-2.3
6	2483.50	52.1 AV	54.0	-1.9	1.87 V	224	54.4	-2.3
7	4874.00	40.9 PK	74.0	-33.1	1.05 V	58	39.2	1.7
8	4874.00	30.1 AV	54.0	-23.9	1.05 V	58	28.4	1.7
9	7311.00	43.1 PK	74.0	-30.9	1.21 V	51	34.9	8.2
10	7311.00	32.2 AV	54.0	-21.8	1.21 V	51	24.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.4 PK			1.05 H	250	102.8	-2.4
2	*2452.00	89.5 AV			1.05 H	250	91.9	-2.4
3	2483.50	49.5 PK	74.0	-24.5	1.05 H	250	51.8	-2.3
4	2483.50	38.4 AV	54.0	-15.6	1.05 H	250	40.7	-2.3
5	4904.00	40.9 PK	74.0	-33.1	2.30 H	262	39.1	1.8
6	4904.00	29.8 AV	54.0	-24.2	2.30 H	262	28.0	1.8
7	7356.00	43.0 PK	74.0	-31.0	1.25 H	21	34.8	8.2
8	7356.00	32.0 AV	54.0	-22.0	1.25 H	21	23.8	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	115.7 PK			1.56 V	218	118.1	-2.4
2	*2452.00	104.3 AV			1.56 V	218	106.7	-2.4
3	2483.50	58.9 PK	74.0	-15.1	1.56 V	218	61.2	-2.3
4	2483.50	52.3 AV	54.0	-1.7	1.56 V	218	54.6	-2.3
5	2484.00	64.8 PK	74.0	-9.2	1.56 V	218	67.1	-2.3
6	2484.00	53.7 AV	54.0	-0.3	1.56 V	218	56.0	-2.3
7	4904.00	41.4 PK	74.0	-32.6	1.02 V	46	39.6	1.8
8	4904.00	30.1 AV	54.0	-23.9	1.02 V	46	28.3	1.8
9	7356.00	42.6 PK	74.0	-31.4	1.29 V	37	34.4	8.2
10	7356.00	31.8 AV	54.0	-22.2	1.29 V	37	23.6	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11b


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.02	32.9 QP	43.5	-10.6	1.00 H	114	45.8	-12.9
2	148.34	30.5 QP	43.5	-13.0	2.00 H	302	38.4	-7.9
3	239.52	30.7 QP	46.0	-15.3	1.50 H	206	39.8	-9.1
4	404.42	30.9 QP	46.0	-15.1	1.00 H	274	35.2	-4.3
5	559.62	31.8 QP	46.0	-14.2	2.00 H	302	32.7	-0.9
6	794.36	34.2 QP	46.0	-11.8	1.00 H	311	30.3	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

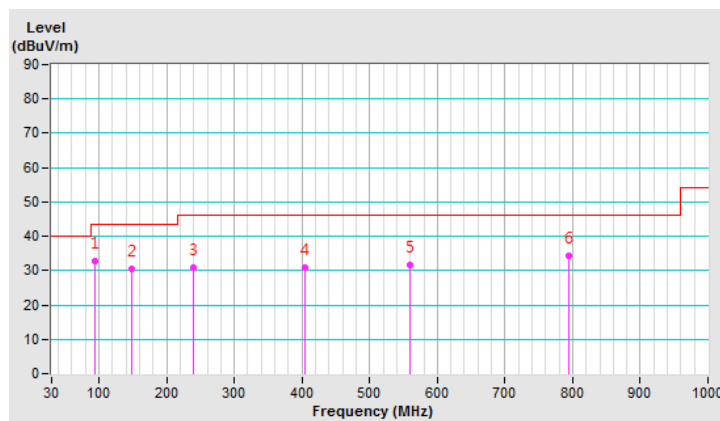


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.64	36.6 QP	40.0	-3.4	1.01 V	219	45.3	-8.7
2	95.96	32.1 QP	43.5	-11.4	1.00 V	149	44.6	-12.5
3	125.00	39.7 QP	43.5	-3.8	1.00 V	311	49.1	-9.4
4	212.36	29.2 QP	43.5	-14.3	1.00 V	302	39.6	-10.4
5	249.22	29.4 QP	46.0	-16.6	1.50 V	178	38.1	-8.7
6	419.94	31.9 QP	46.0	-14.1	1.50 V	226	35.6	-3.7
7	563.50	36.2 QP	46.0	-9.8	2.00 V	308	37.0	-0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

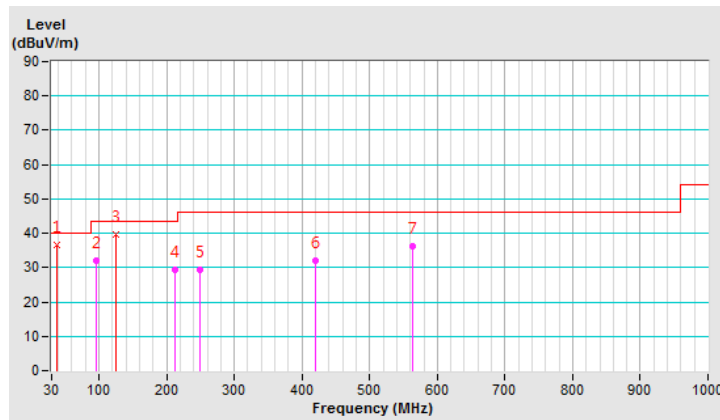

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Dec. 18, 2018

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

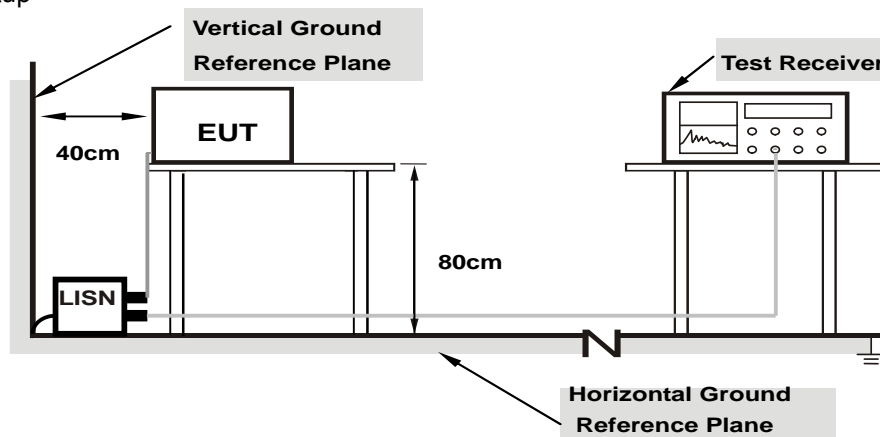

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.03	32.11	18.61	42.14	28.64	66.00	56.00	-23.86	-27.36
2	0.16562	10.04	28.95	13.80	38.99	23.84	65.18	55.18	-26.19	-31.34
3	0.24766	10.06	19.52	10.30	29.58	20.36	61.84	51.84	-32.26	-31.48
4	0.44297	10.08	23.80	20.65	33.88	30.73	57.01	47.01	-23.13	-16.28
5	3.47656	10.29	19.38	9.25	29.67	19.54	56.00	46.00	-26.33	-26.46
6	19.10156	11.30	18.85	13.55	30.15	24.85	60.00	50.00	-29.85	-25.15

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

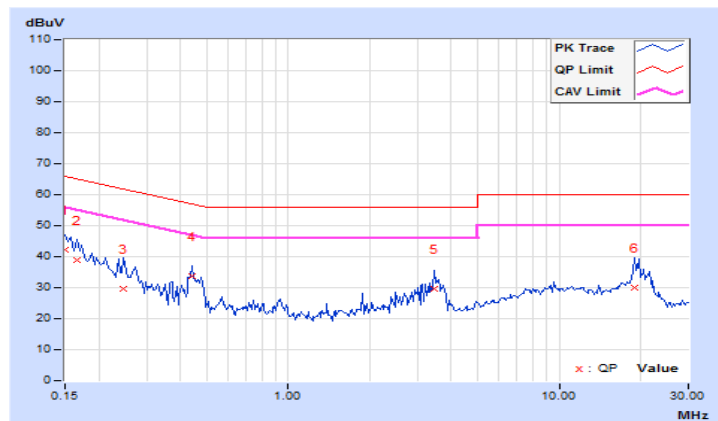


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	9.94	31.88	16.83	41.82	26.77	66.00	56.00	-24.18	-29.23
2	0.19297	9.95	23.94	10.03	33.89	19.98	63.91	53.91	-30.02	-33.93
3	0.27109	9.96	16.85	8.35	26.81	18.31	61.08	51.08	-34.27	-32.77
4	0.44297	9.98	22.44	19.87	32.42	29.85	57.01	47.01	-24.59	-17.16
5	3.50000	10.14	18.53	8.72	28.67	18.86	56.00	46.00	-27.33	-27.14
6	19.46094	11.11	18.54	12.72	29.65	23.83	60.00	50.00	-30.35	-26.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

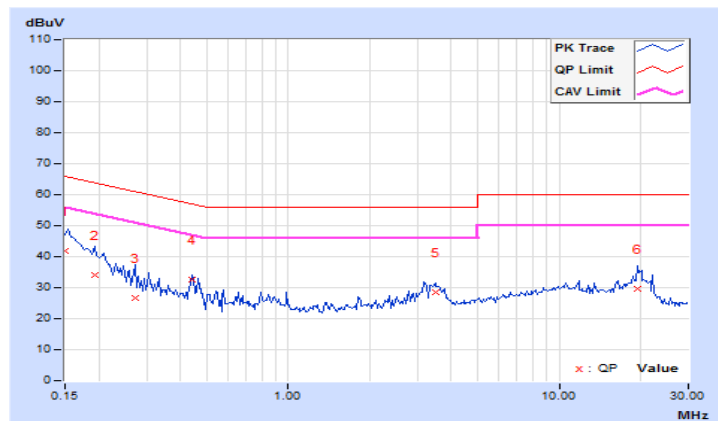


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.08	7.10	7.12	7.11	0.5	Pass
6	2437	7.10	7.09	7.11	7.10	0.5	Pass
11	2462	7.10	7.11	7.09	7.07	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.45	16.43	16.44	16.45	0.5	Pass
6	2437	16.39	16.43	16.44	16.38	0.5	Pass
11	2462	16.43	16.37	16.37	16.42	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	19.05	19.03	19.07	19.06	0.5	Pass
6	2437	18.99	19.04	19.02	19.01	0.5	Pass
11	2462	19.07	18.57	18.77	19.07	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	37.70	38.03	37.98	37.03	0.5	Pass
6	2437	37.04	37.93	37.86	37.45	0.5	Pass
9	2452	37.98	36.59	36.66	37.99	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 3 : CH11

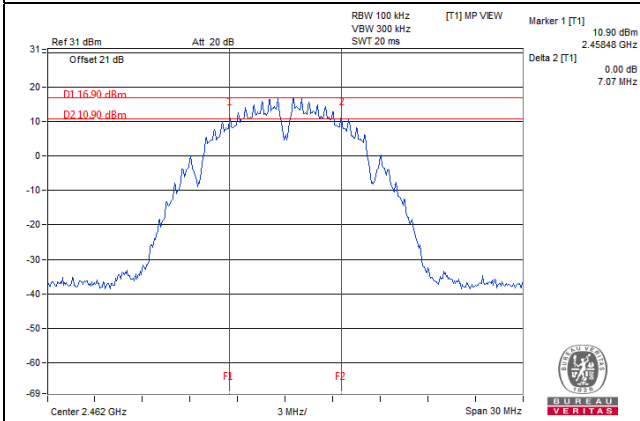


802.11g / Chain 1 : CH11

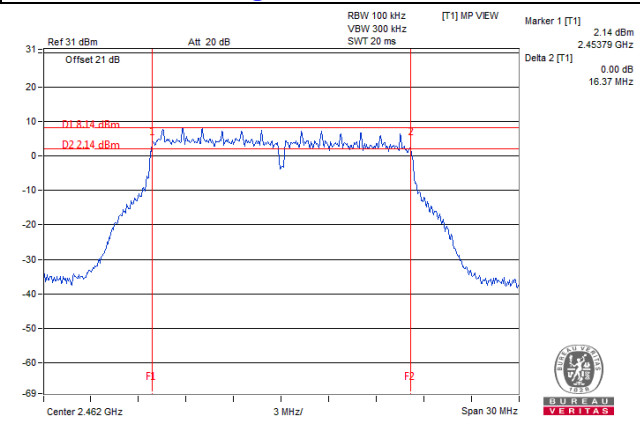

802.11ax (HE20) / Chain 1 : CH11

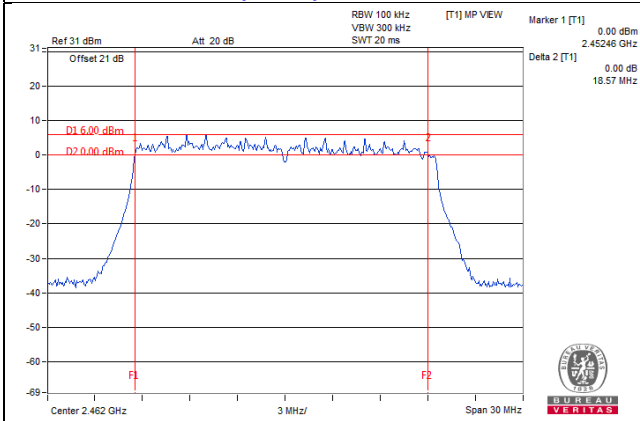


802.11ax (HE40) / Chain 1 : CH9

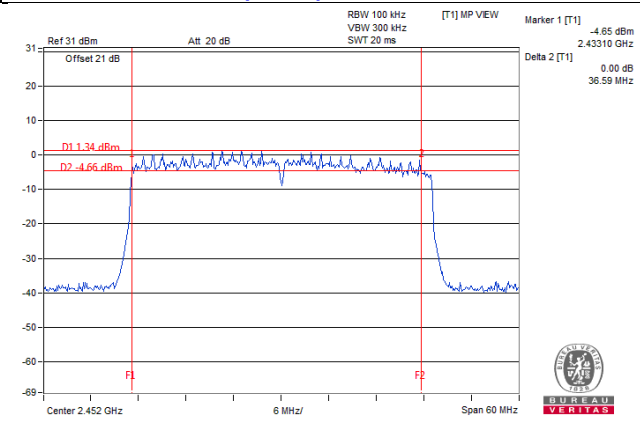

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

Same as Item 4.3.6

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	2412	10.68	10.56	10.56	10.68
6	2437	10.56	10.80	10.68	10.68
11	2462	10.68	10.68	10.68	10.56

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	2412	17.04	17.04	16.92	17.04
6	2437	16.92	17.04	16.92	16.92
11	2462	16.92	17.04	17.04	16.92

802.11ax (HE20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
1	2412	19.20	19.20	19.08	19.20
6	2437	19.08	19.20	19.20	19.32
11	2462	19.20	19.08	19.20	19.20

802.11ax (HE40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
3	2422	37.92	37.92	37.92	37.44
6	2437	37.68	37.92	37.92	37.68
9	2452	37.92	37.68	37.68	38.16

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH6

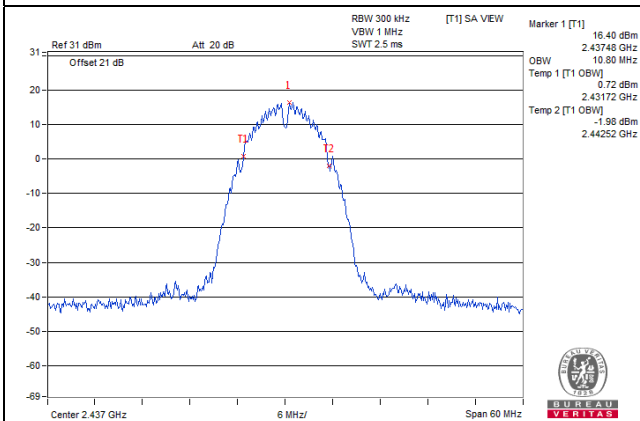


802.11g / Chain 0 : CH1

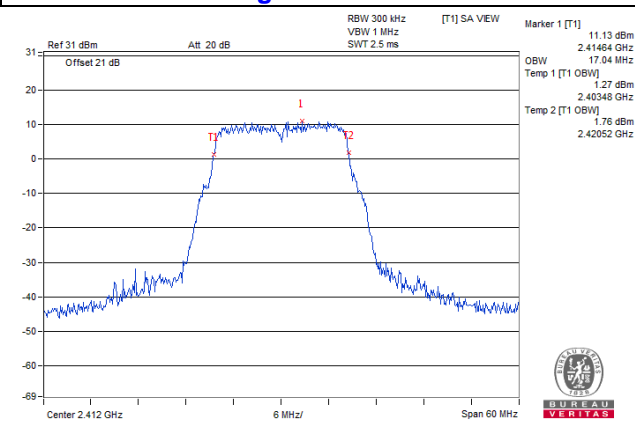

802.11ax (HE20) / Chain 3 : CH6

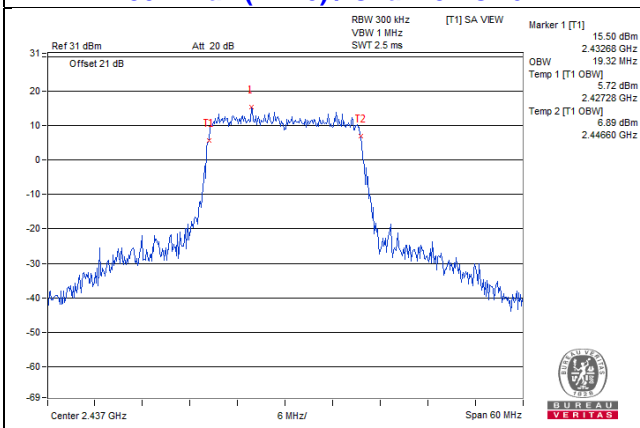

802.11ax (HE40) / Chain 3 : CH9

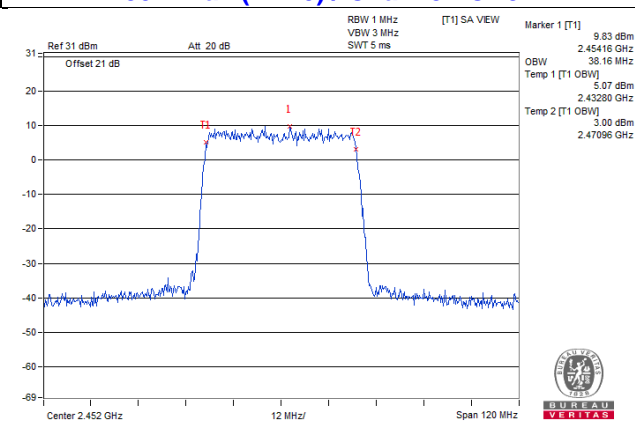

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

Non-Beamforming Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	24.68	23.42	22.20	23.81	919.946	29.64	30.00	Pass
6	2437	23.01	21.67	21.66	21.95	650.109	28.13	30.00	Pass
11	2462	24.67	23.44	23.05	23.54	941.67	29.74	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.54	18.29	18.16	18.63	295.813	24.71	30.00	Pass
6	2437	20.48	19.19	19.46	19.45	371.084	25.69	30.00	Pass
11	2462	20.13	19.04	18.68	18.85	333.733	25.23	30.00	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.25	16.25	16.15	16.11	177.3	22.49	30.00	Pass
6	2437	21.85	20.60	20.53	20.68	497.854	26.97	30.00	Pass
11	2462	18.76	17.71	17.78	18.03	257.694	24.11	30.00	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.73	16.18	15.88	15.82	165.513	22.19	30.00	Pass
6	2437	19.29	18.19	18.02	18.25	281.056	24.49	30.00	Pass
9	2452	15.54	14.64	14.54	14.44	121.159	20.83	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.32	16.34	16.39	16.23	182.531	22.61	30.00	Pass
6	2437	21.91	20.71	20.62	20.81	508.849	27.07	30.00	Pass
11	2462	18.88	17.85	17.96	18.11	265.453	24.24	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.82	16.23	16.00	15.91	168.865	22.28	30.00	Pass
6	2437	19.29	18.36	18.09	18.43	287.547	24.59	30.00	Pass
9	2452	15.66	14.74	14.66	14.53	124.219	20.94	30.00	Pass

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.25	16.25	16.15	16.11	177.3	22.49	29.37	Pass
6	2437	21.85	20.60	20.53	20.68	497.854	26.97	29.37	Pass
11	2462	18.76	17.71	17.78	18.03	257.694	24.11	29.37	Pass

Note: 1. The directional gain = 6.63dBi > 6dBi , so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.73	16.18	15.88	15.82	165.513	22.19	29.37	Pass
6	2437	19.29	18.19	18.02	18.25	281.056	24.49	29.37	Pass
9	2452	15.54	14.64	14.54	14.44	121.159	20.83	29.37	Pass

Note: 1. The directional gain = 6.63dBi > 6dBi , so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.32	16.34	16.39	16.23	182.531	22.61	29.37	Pass
6	2437	21.91	20.71	20.62	20.81	508.849	27.07	29.37	Pass
11	2462	18.88	17.85	17.96	18.11	265.453	24.24	29.37	Pass

Note: 1. The directional gain = 6.63dBi > 6dBi , so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.82	16.23	16.00	15.91	168.865	22.28	29.37	Pass
6	2437	19.29	18.36	18.09	18.43	287.547	24.59	29.37	Pass
9	2452	15.66	14.74	14.66	14.53	124.219	20.94	29.37	Pass


Note: 1. The directional gain = 6.63dBi > 6dBi , so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

For 802.11b

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.

For other modulation mode

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-4.75	6.02	1.27	7.37	Pass
	6	2437	-4.99	6.02	1.03	7.37	Pass
	11	2462	-5.16	6.02	0.86	7.37	Pass
1	1	2412	-6.49	6.02	-0.47	7.37	Pass
	6	2437	-6.57	6.02	-0.55	7.37	Pass
	11	2462	-6.22	6.02	-0.20	7.37	Pass
2	1	2412	-6.18	6.02	-0.16	7.37	Pass
	6	2437	-6.32	6.02	-0.30	7.37	Pass
	11	2462	-6.61	6.02	-0.59	7.37	Pass
3	1	2412	-5.90	6.02	0.12	7.37	Pass
	6	2437	-6.13	6.02	-0.11	7.37	Pass
	11	2462	-6.15	6.02	-0.13	7.37	Pass

Note: 1. The directional gain = 6.63dBi > 6dBi , so the power density limit shall be reduced to $8-(6.63-6) = 7.37$ dBm

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.25	6.02	0.09	-5.14	7.37	Pass
	6	2437	-8.44	6.02	0.09	-2.33	7.37	Pass
	11	2462	-10.68	6.02	0.09	-4.57	7.37	Pass
1	1	2412	-12.48	6.02	0.09	-6.37	7.37	Pass
	6	2437	-8.87	6.02	0.09	-2.76	7.37	Pass
	11	2462	-11.53	6.02	0.09	-5.42	7.37	Pass
2	1	2412	-12.99	6.02	0.09	-6.88	7.37	Pass
	6	2437	-9.60	6.02	0.09	-3.49	7.37	Pass
	11	2462	-12.44	6.02	0.09	-6.33	7.37	Pass
3	1	2412	-12.18	6.02	0.09	-6.07	7.37	Pass
	6	2437	-10.15	6.02	0.09	-4.04	7.37	Pass
	11	2462	-11.27	6.02	0.09	-5.16	7.37	Pass

Note: 1. The directional gain = 6.63dBi > 6dBi , so the power density limit shall be reduced to $8-(6.63-6) = 7.37$ dBm

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-14.47	6.02	0.14	-8.31	7.37	Pass
	6	2437	-7.15	6.02	0.14	-0.99	7.37	Pass
	11	2462	-13.70	6.02	0.14	-7.54	7.37	Pass
1	1	2412	-15.25	6.02	0.14	-9.09	7.37	Pass
	6	2437	-10.35	6.02	0.14	-4.19	7.37	Pass
	11	2462	-15.18	6.02	0.14	-9.02	7.37	Pass
2	1	2412	-15.64	6.02	0.14	-9.48	7.37	Pass
	6	2437	-10.79	6.02	0.14	-4.63	7.37	Pass
	11	2462	-14.97	6.02	0.14	-8.81	7.37	Pass
3	1	2412	-15.30	6.02	0.14	-9.14	7.37	Pass
	6	2437	-9.80	6.02	0.14	-3.64	7.37	Pass
	11	2462	-15.26	6.02	0.14	-9.10	7.37	Pass

- Note:** 1. The directional gain = 6.63dBi > 6dBi , so the power density limit shall be reduced to $8-(6.63-6) = 7.37\text{dBm}$
2. Refer to section 3.3 for duty cycle spectrum plot.


802.11ax (HE40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=4) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-18.16	6.02	0.14	-12.00	7.37	Pass
	6	2437	-16.29	6.02	0.14	-10.13	7.37	Pass
	9	2452	-19.57	6.02	0.14	-13.41	7.37	Pass
1	3	2422	-20.29	6.02	0.14	-14.13	7.37	Pass
	6	2437	-17.24	6.02	0.14	-11.08	7.37	Pass
	9	2452	-20.51	6.02	0.14	-14.35	7.37	Pass
2	3	2422	-20.86	6.02	0.14	-14.70	7.37	Pass
	6	2437	-17.26	6.02	0.14	-11.10	7.37	Pass
	9	2452	-20.82	6.02	0.14	-14.66	7.37	Pass
3	3	2422	-19.52	6.02	0.14	-13.36	7.37	Pass
	6	2437	-16.21	6.02	0.14	-10.05	7.37	Pass
	9	2452	-20.03	6.02	0.14	-13.87	7.37	Pass


- Note:** 1. The directional gain = 6.63dBi > 6dBi , so the power density limit shall be reduced to $8-(6.63-6) = 7.37\text{dBm}$
2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

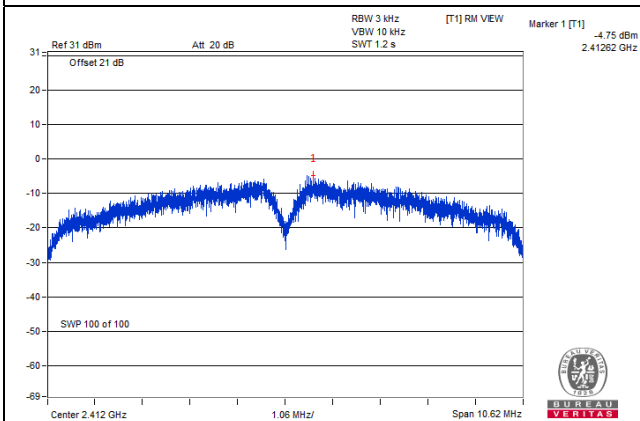


802.11g / Chain 0 : CH6

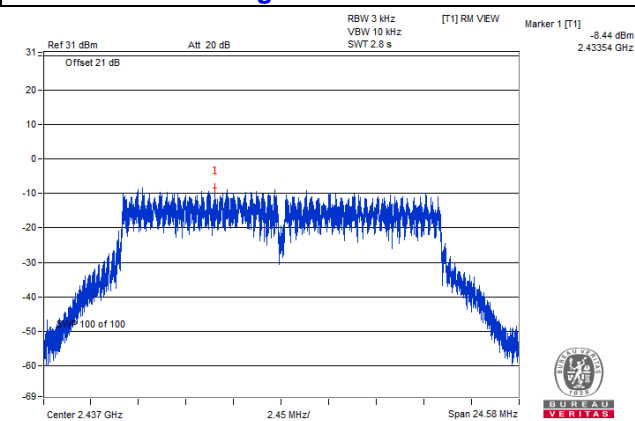

802.11ax (HE20) / Chain 0 : CH6

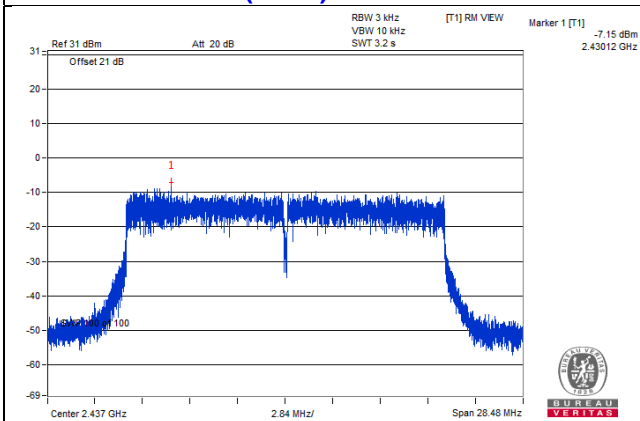

802.11ax (HE40) / Chain 3 : CH6

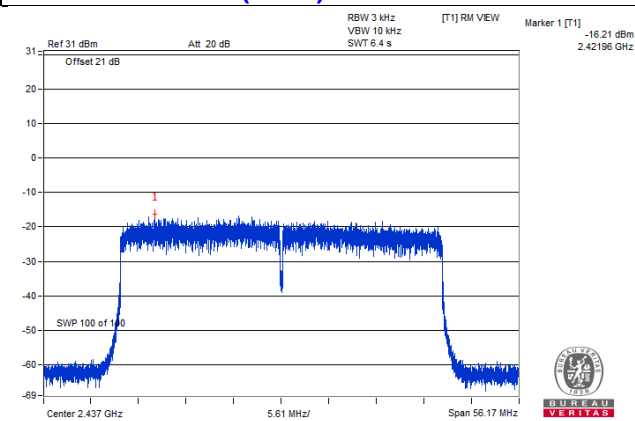


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


Same as Item 4.3.6

4.7.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with


802.11b

Maximum REF

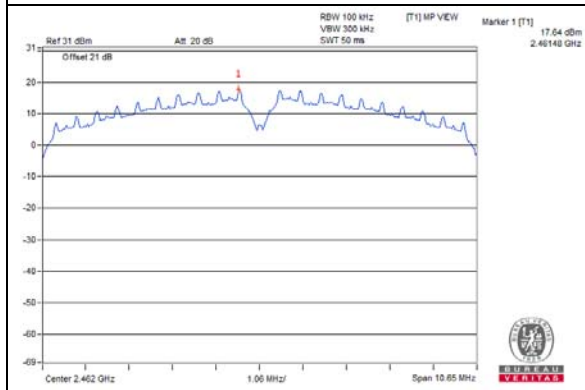


Chain 0


CH 1

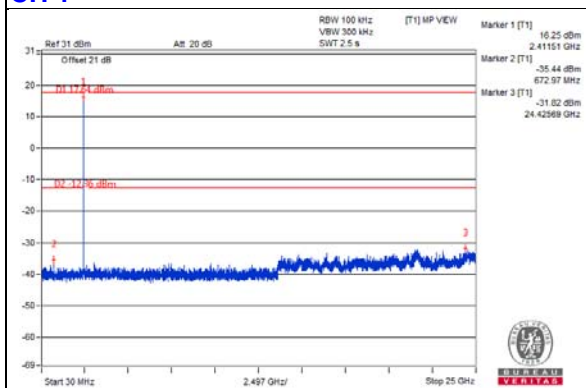


CH 6

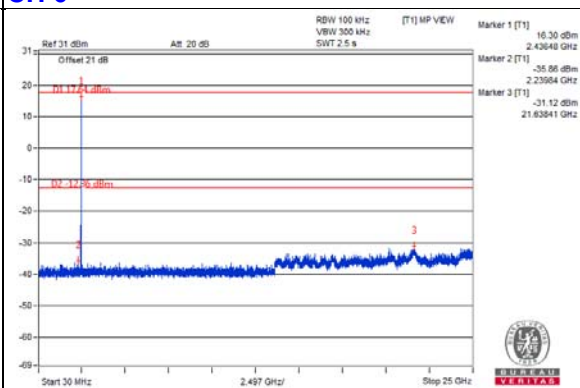


CH 11

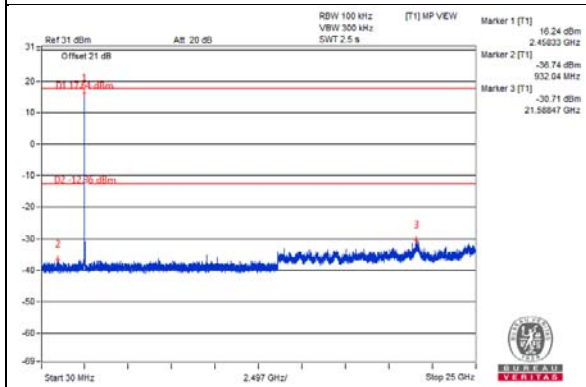

CH 1 Band edge

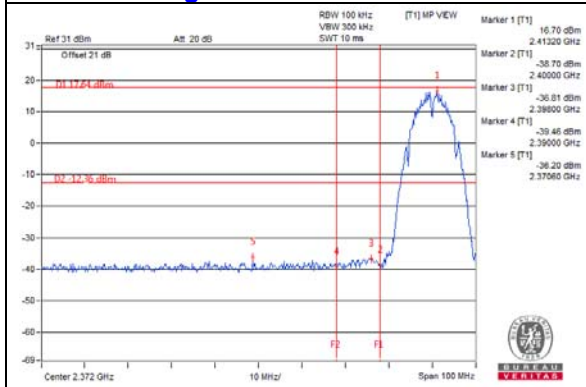


CH 11 Band edge

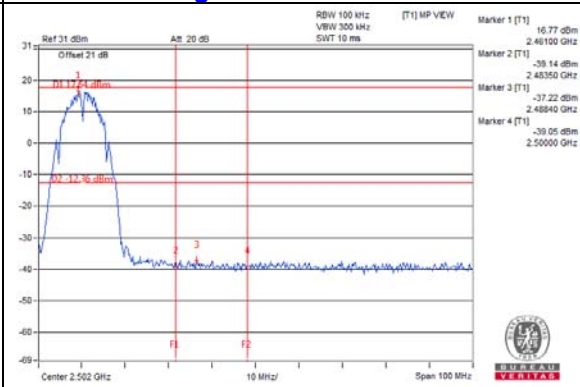


Chain 1


CH 1

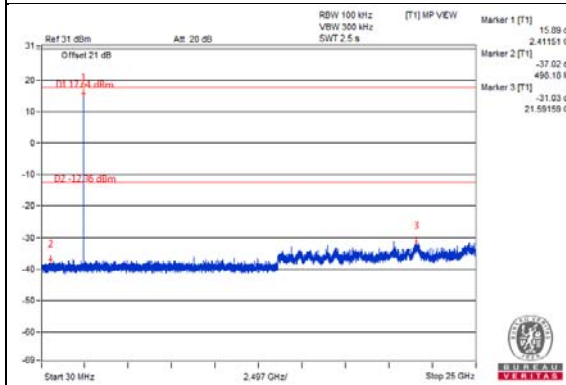


CH 6

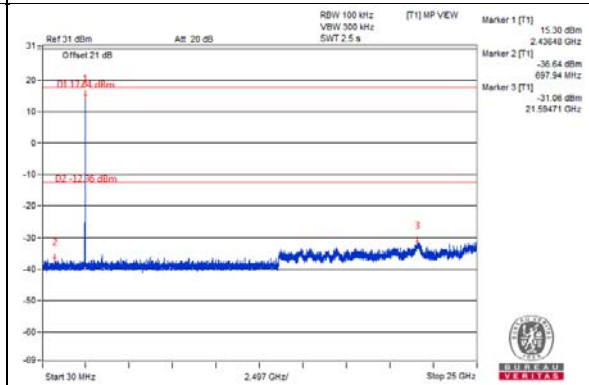


CH 11

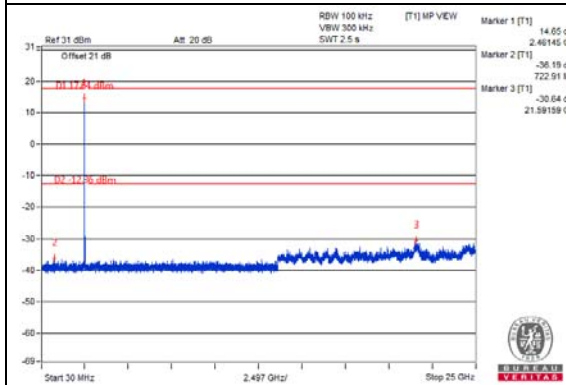

CH 1 Band edge

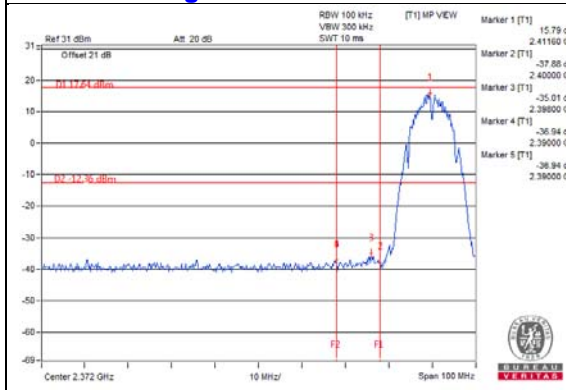


CH 11 Band edge

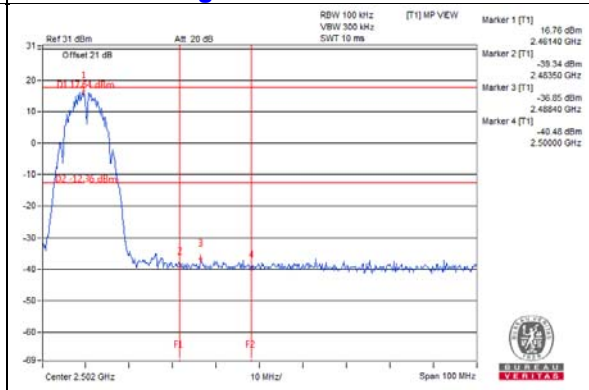


Chain 2



CH 1

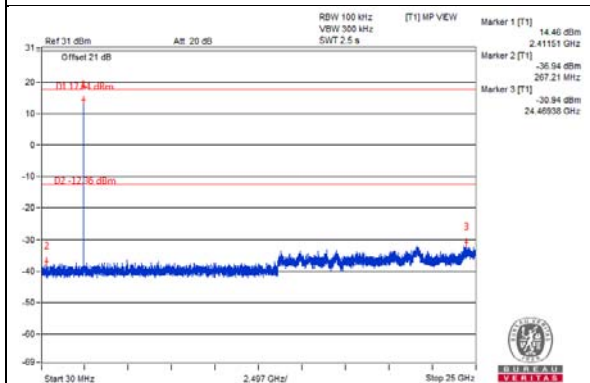


CH 6

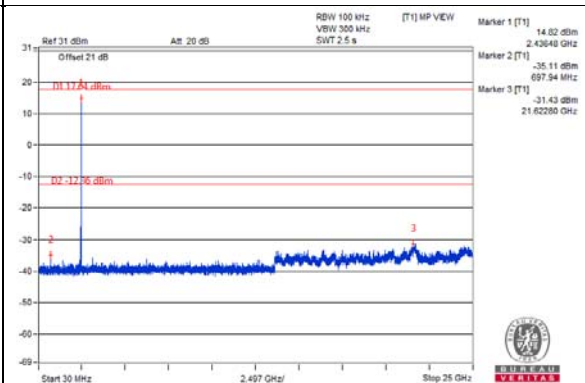


CH 11

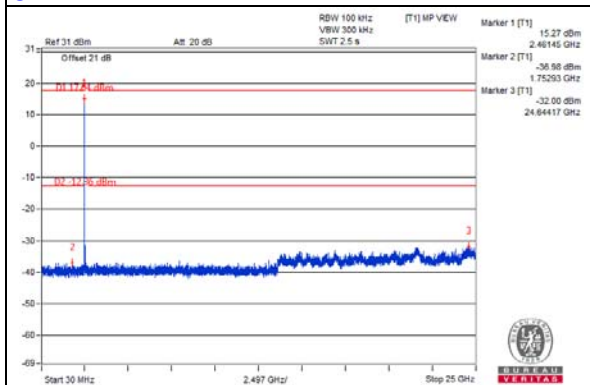

CH 1 Band edge

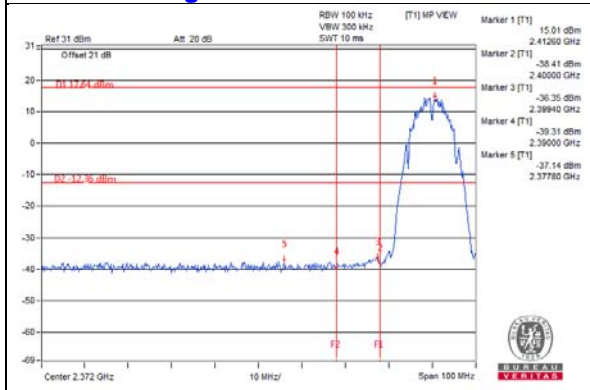


CH 11 Band edge

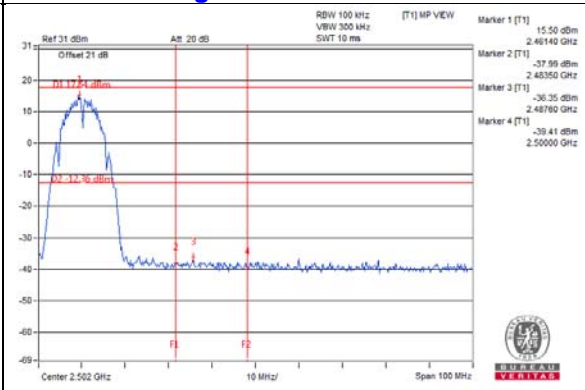


Chain 3


CH 1

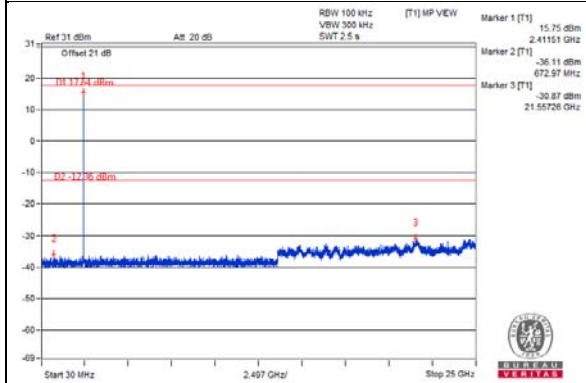


CH 6

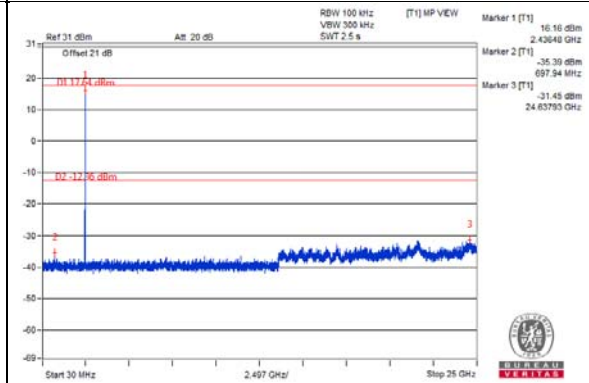


CH 11

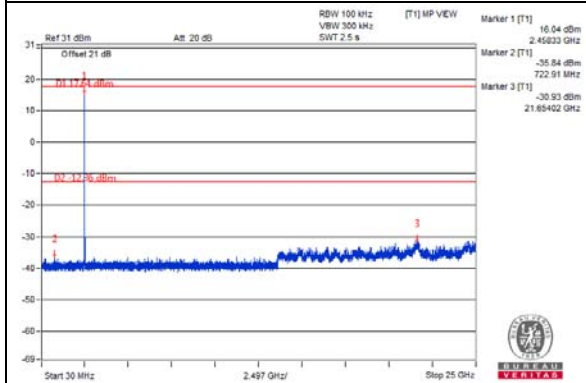

CH 1 Band edge

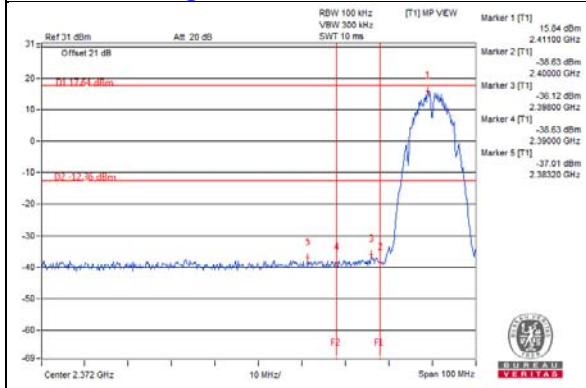


CH 11 Band edge

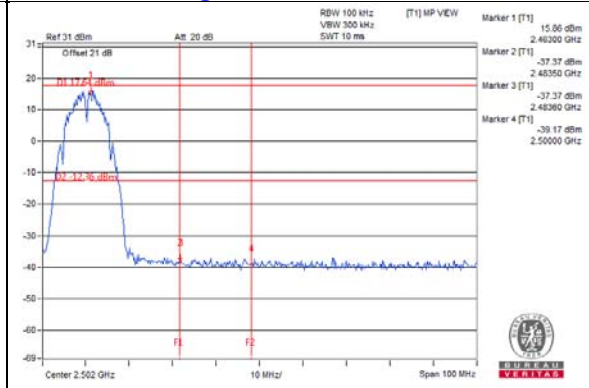


802.11g

Maximum REF

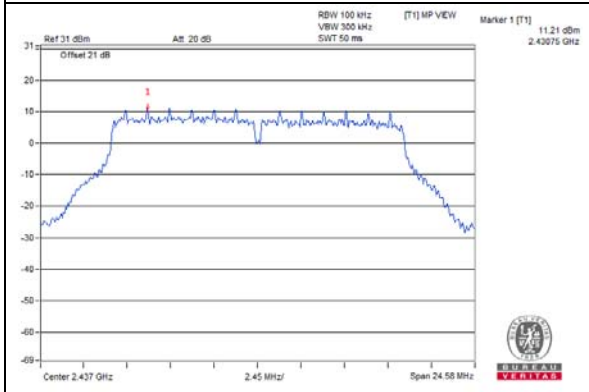


Chain 0


CH 1

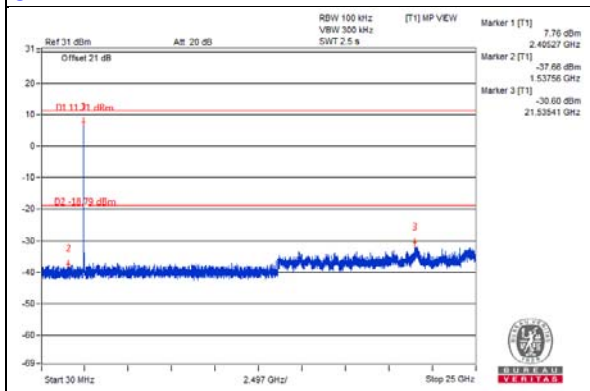


CH 6

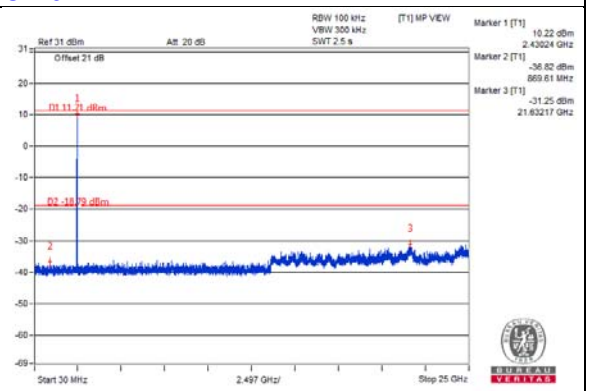


CH 11

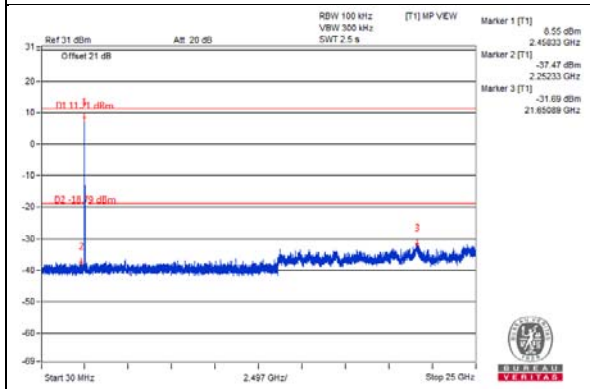

CH 1 Band edge

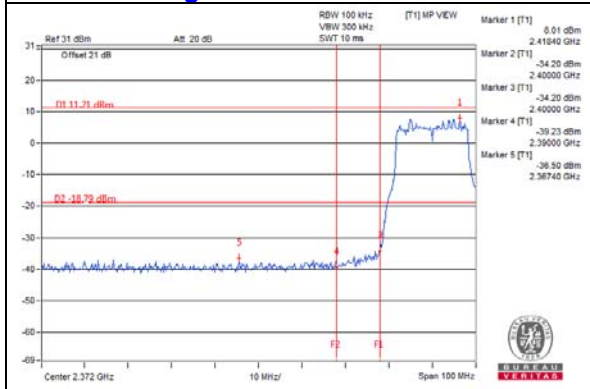


CH 11 Band edge

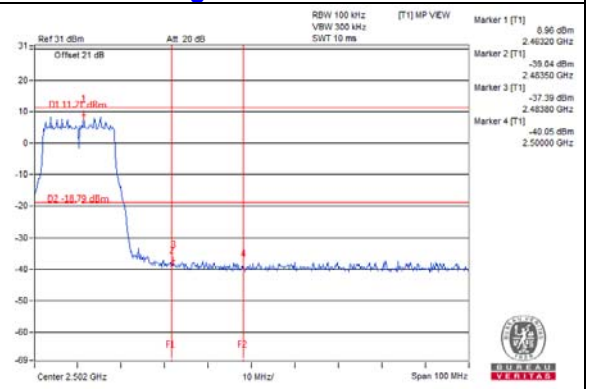


Chain 1



CH 1

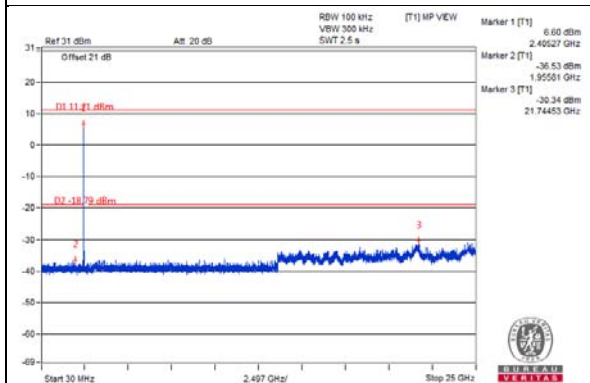


CH 6

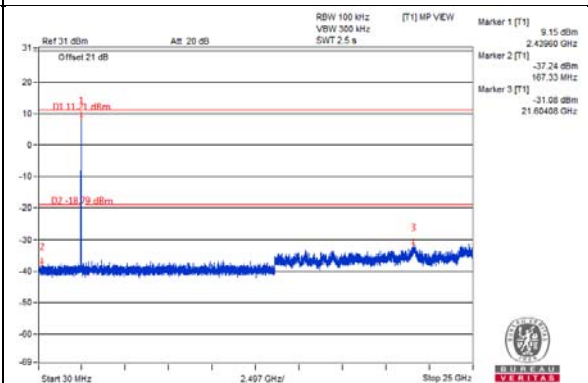


CH 11

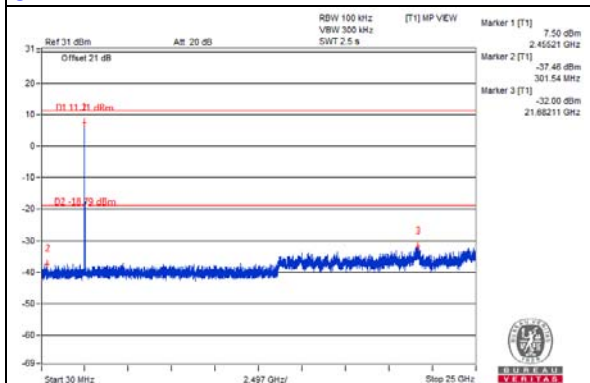

CH 1 Band edge

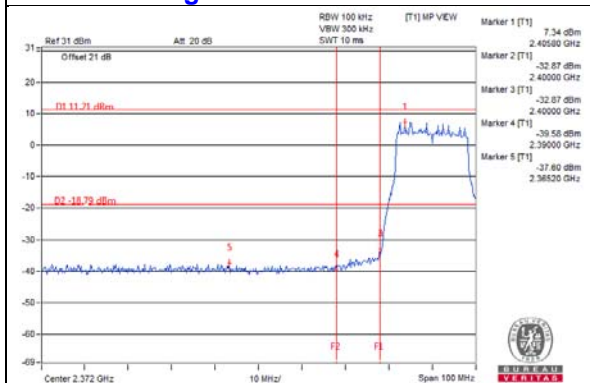


CH 11 Band edge

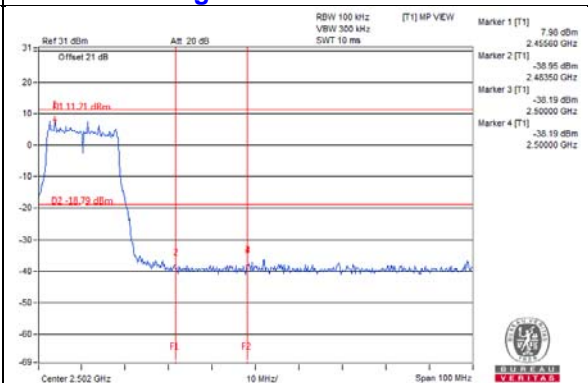


Chain 2



CH 1

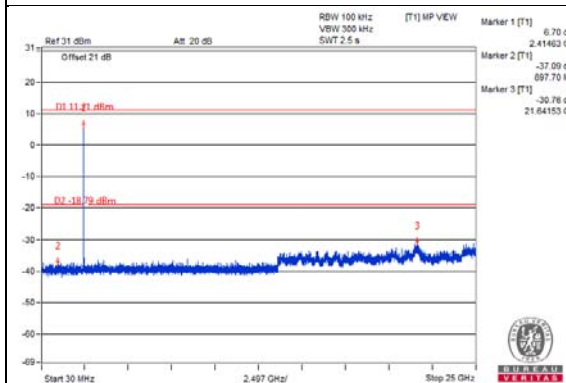


CH 6

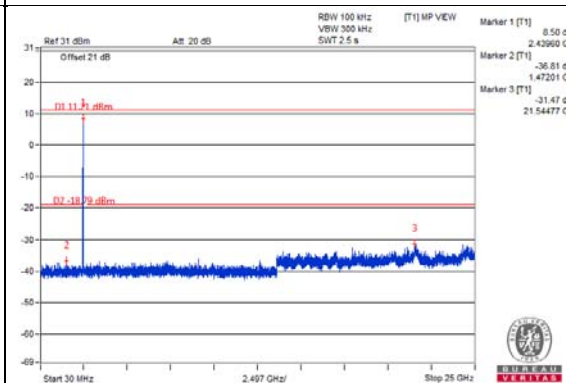


CH 11

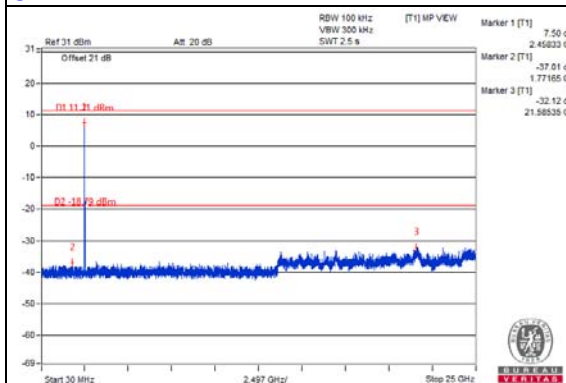

CH 1 Band edge

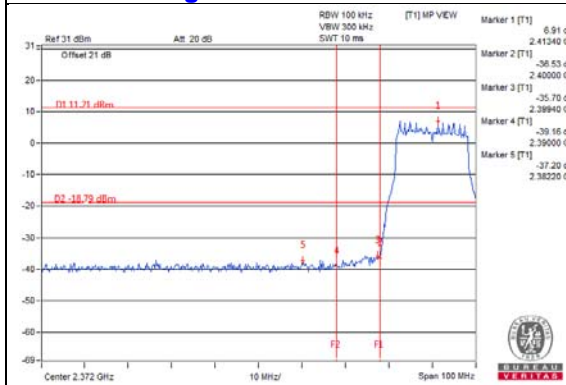


CH 11 Band edge

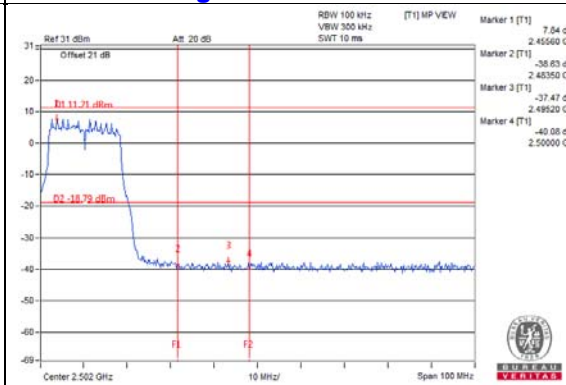


Chain 3



CH 1

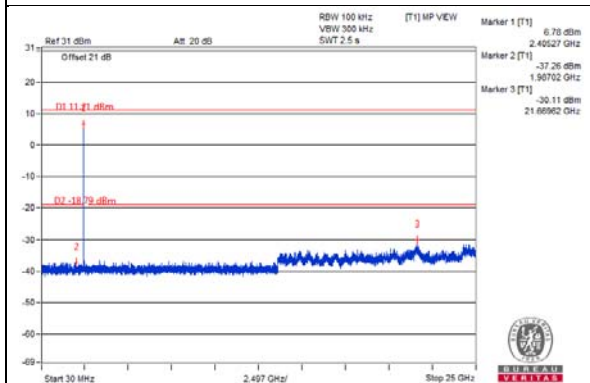


CH 6

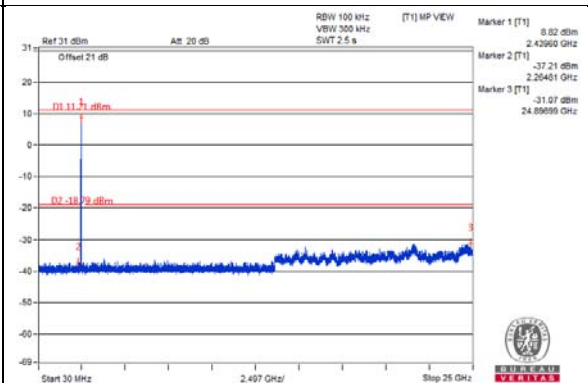


CH 11

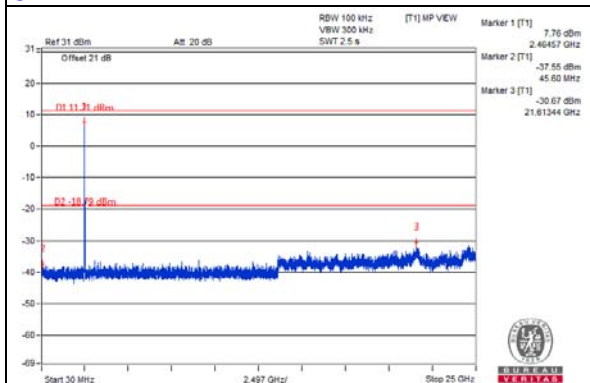

CH 1 Band edge

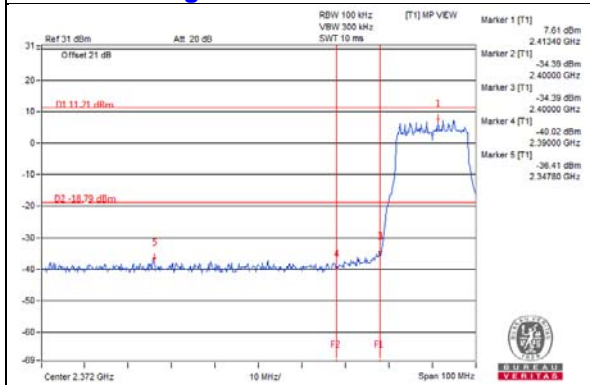


CH 11 Band edge

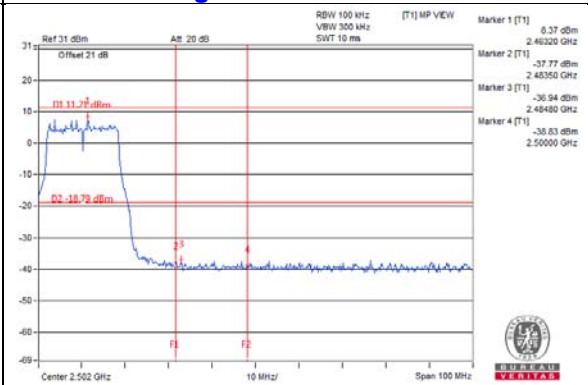


802.11ax (HE20)

Maximum REF

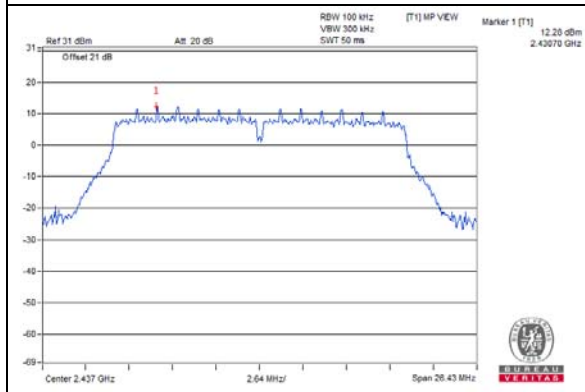


Chain 0


CH 1

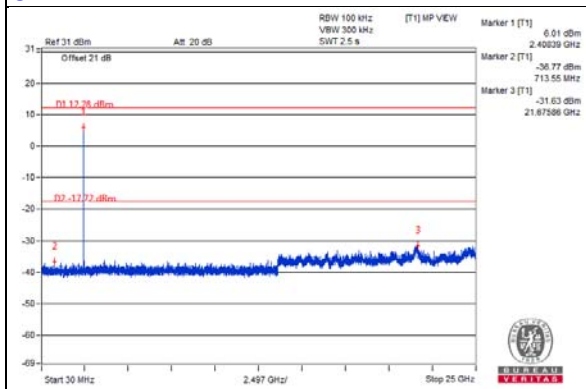


CH 6

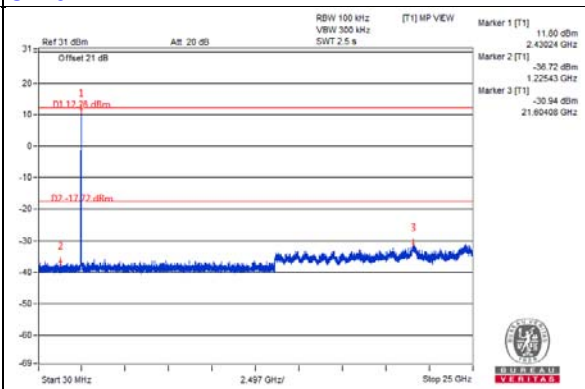


CH 11

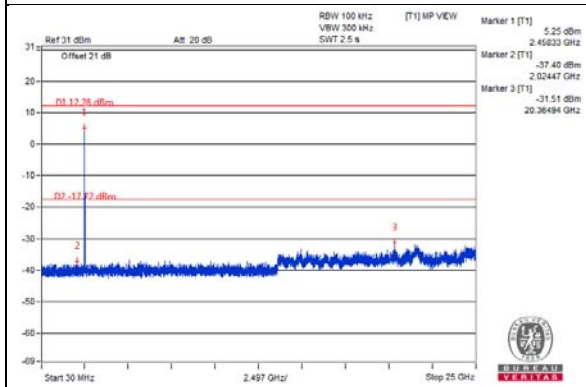

CH 1 Band edge

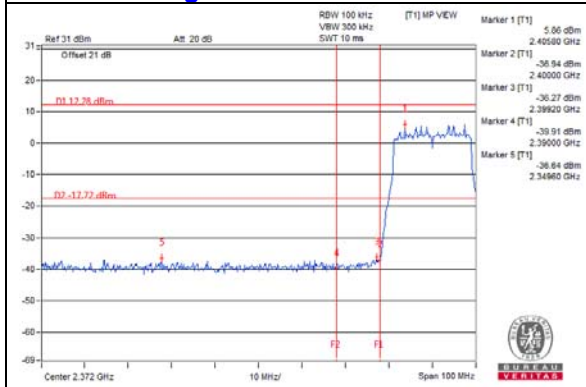


CH 11 Band edge

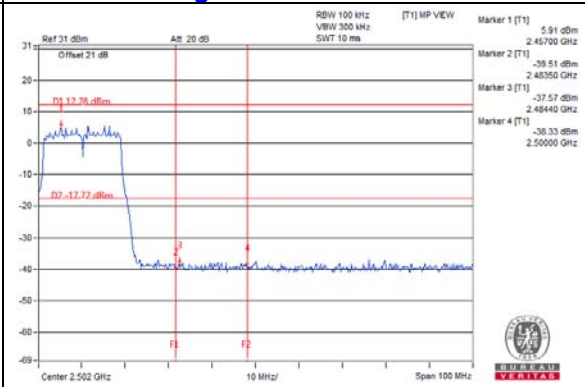


Chain 1


CH 1

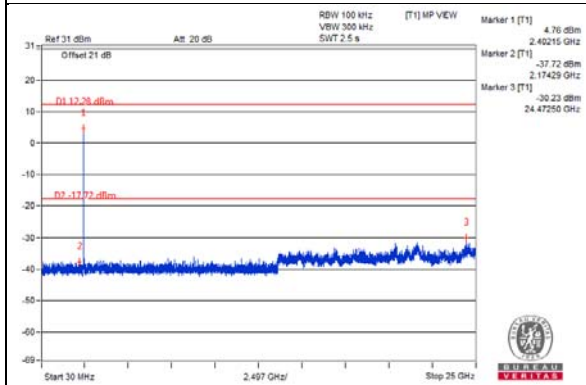


CH 6

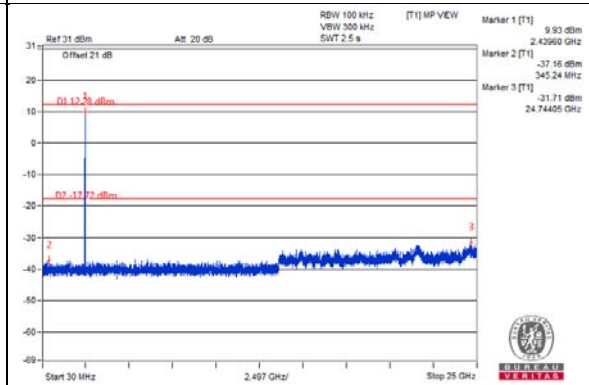


CH 11

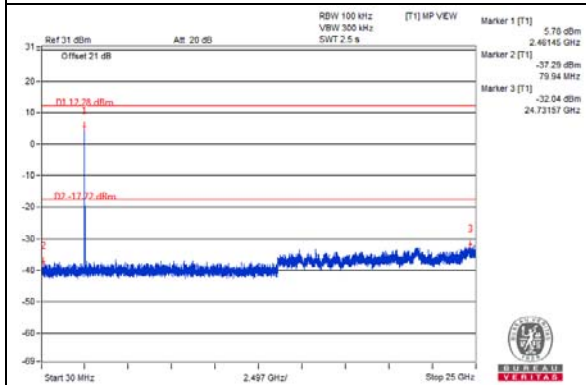

CH 1 Band edge

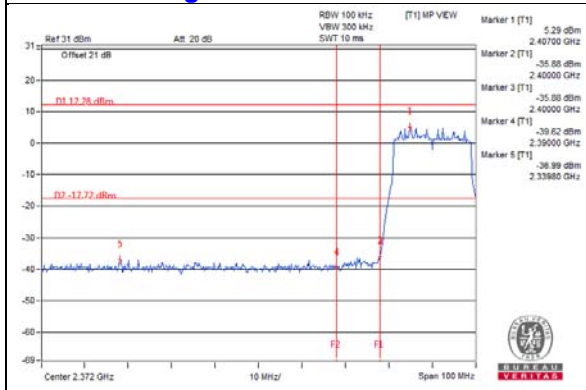


CH 11 Band edge

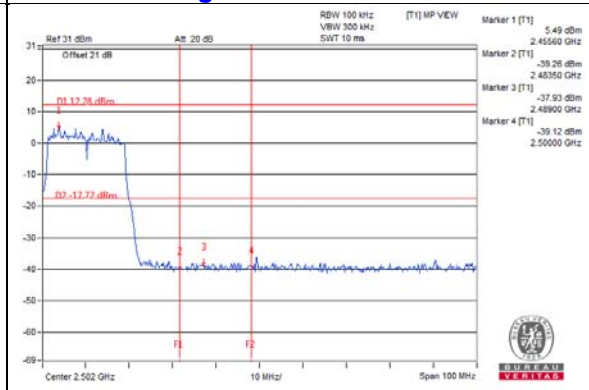


Chain 2


CH 1

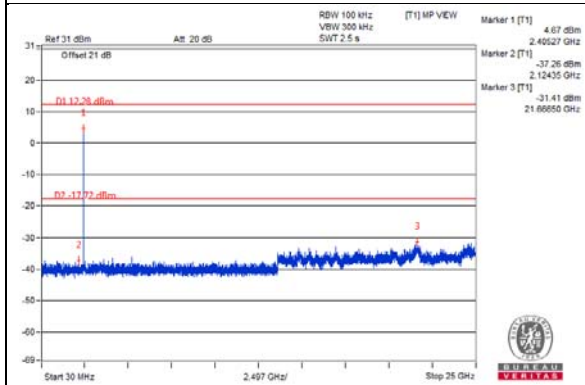


CH 6

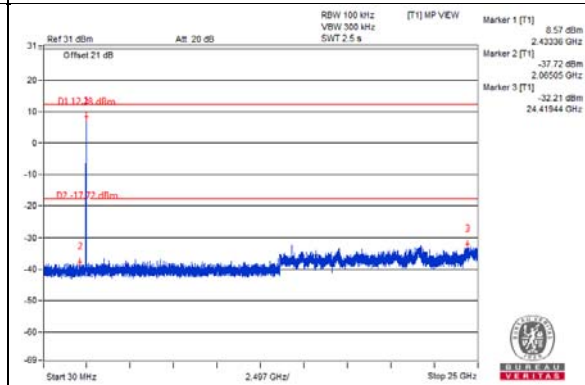


CH 11

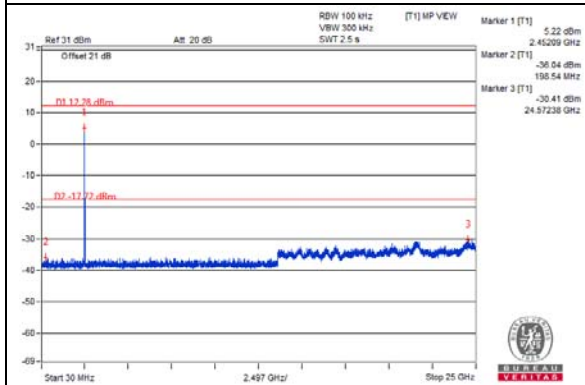

CH 1 Band edge

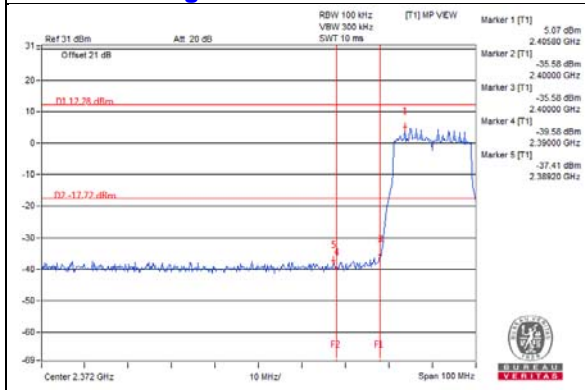


CH 11 Band edge

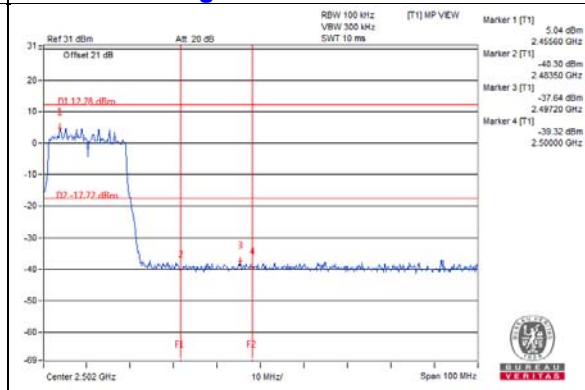


Chain 3



CH 1

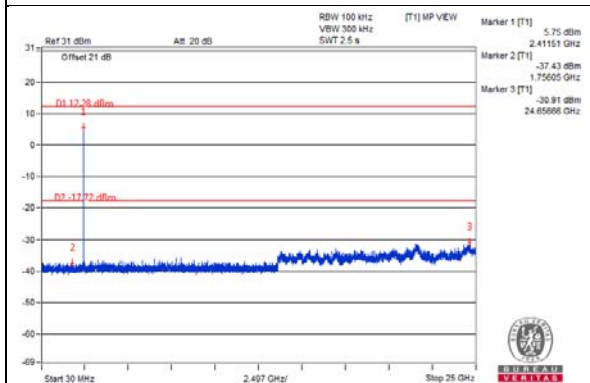


CH 6

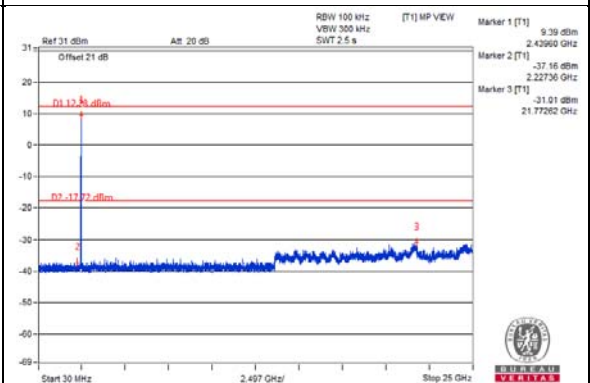


CH 11

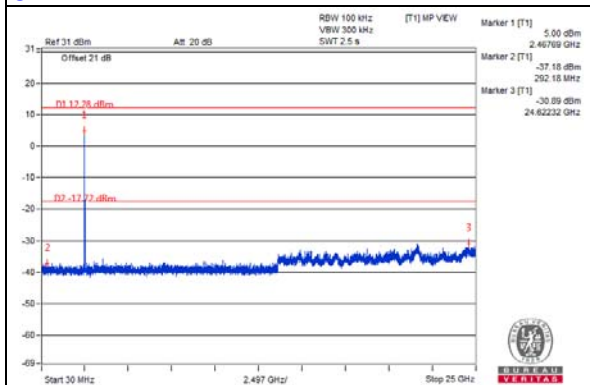

CH 1 Band edge

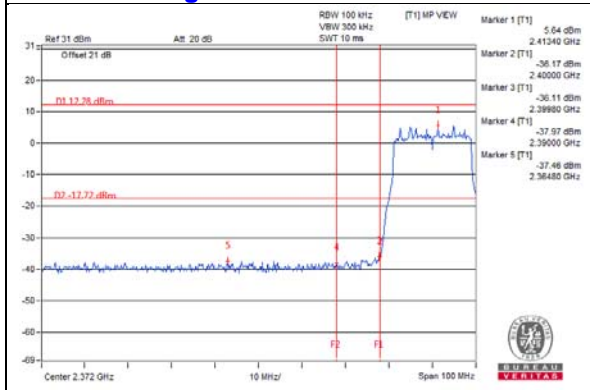


CH 11 Band edge

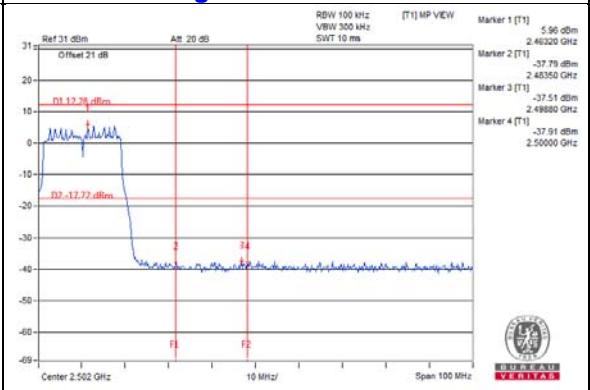


802.11ax (HE40)

Maximum REF

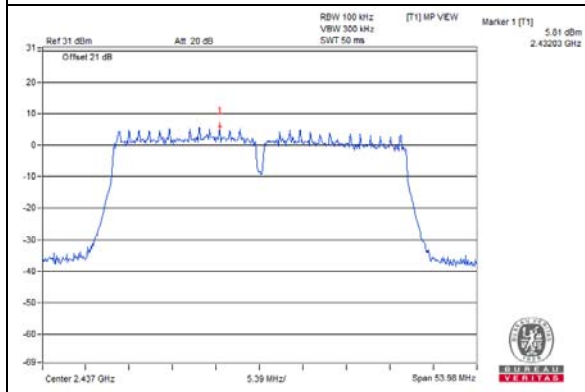


Chain 0


CH 3

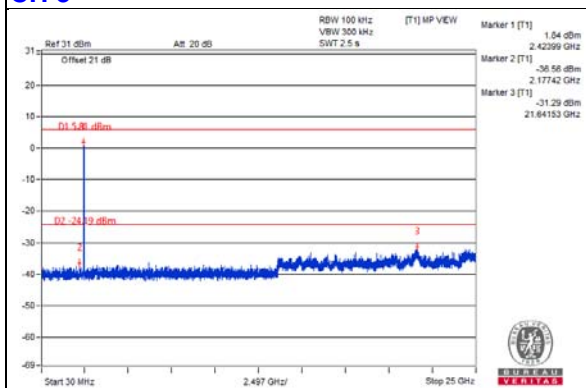


CH 6

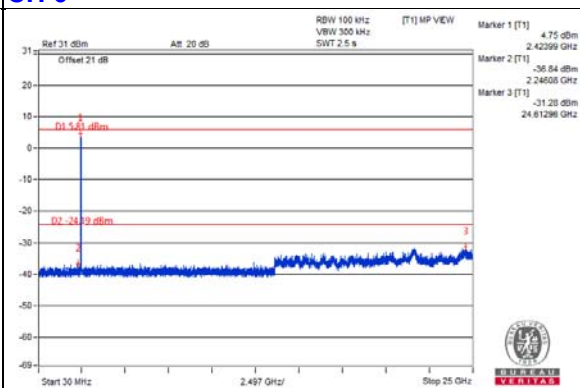


CH 9

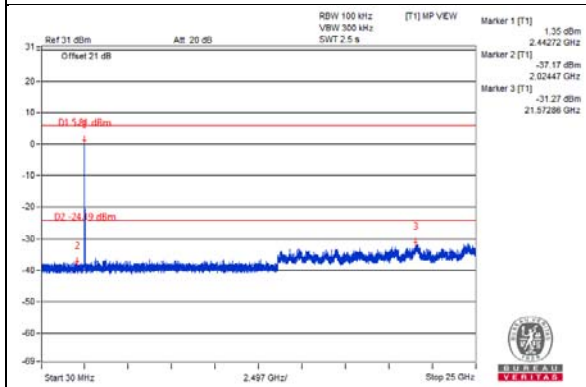

CH 3 Band edge

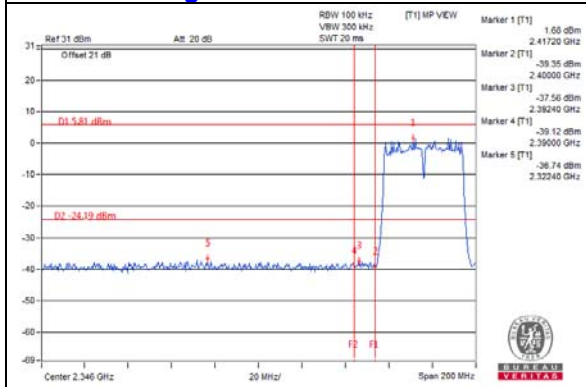


CH 9 Band edge

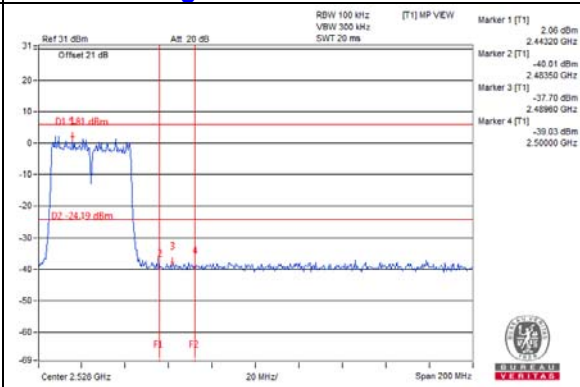


Chain 1



CH 3

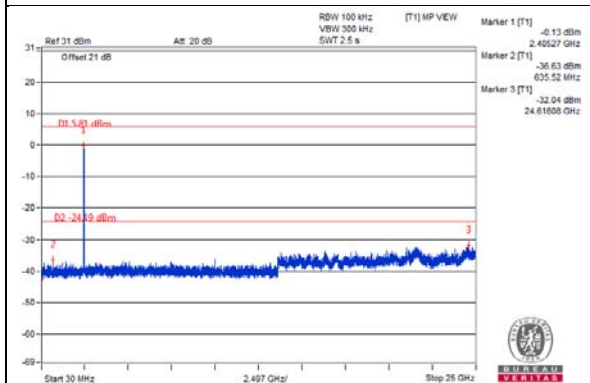


CH 6

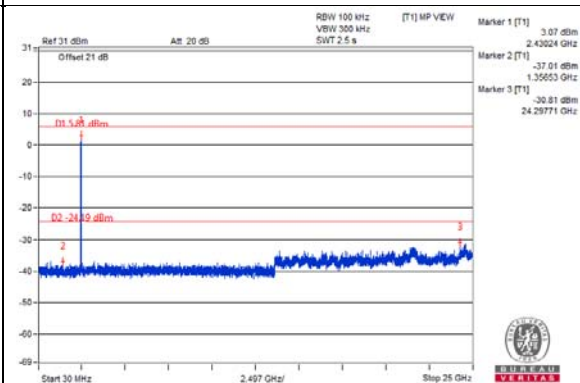


CH 9

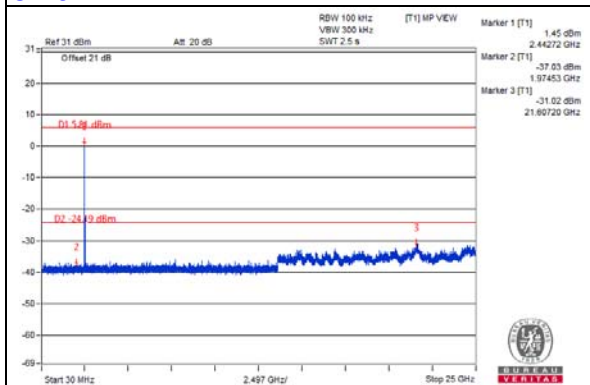

CH 3 Band edge

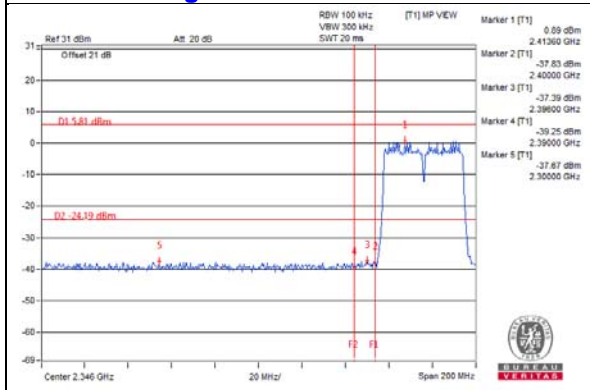


CH 9 Band edge

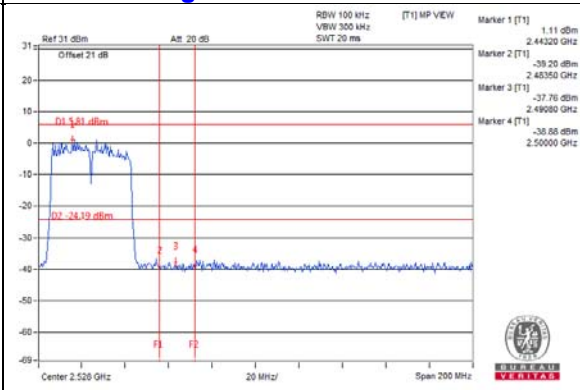


Chain 2


CH 3

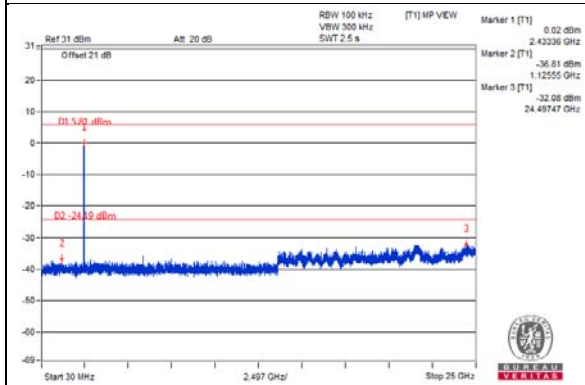


CH 6

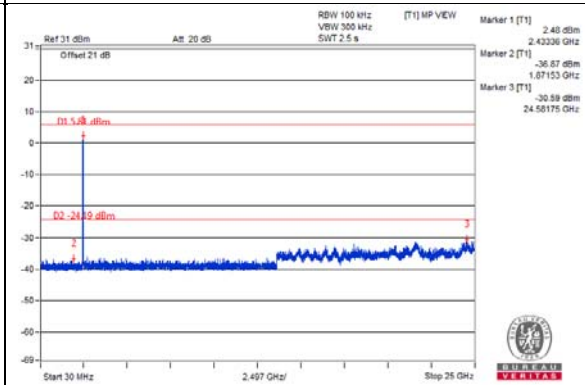


CH 9

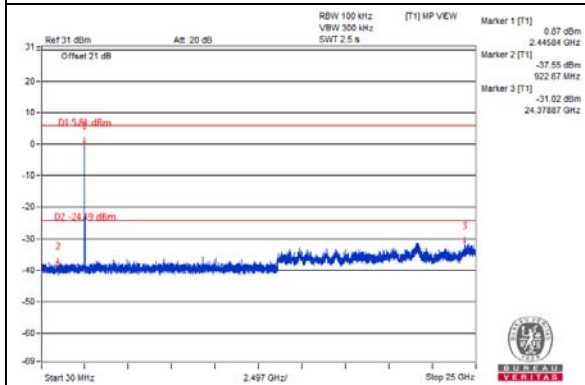

CH 3 Band edge

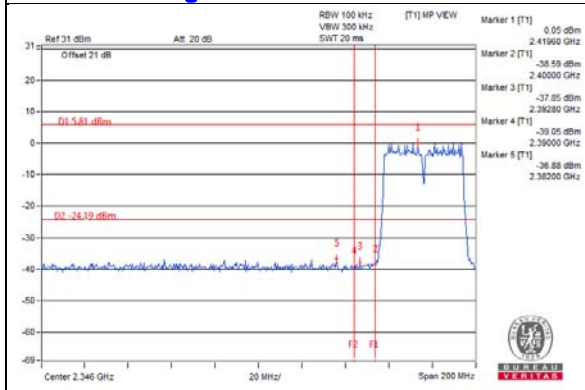


CH 9 Band edge

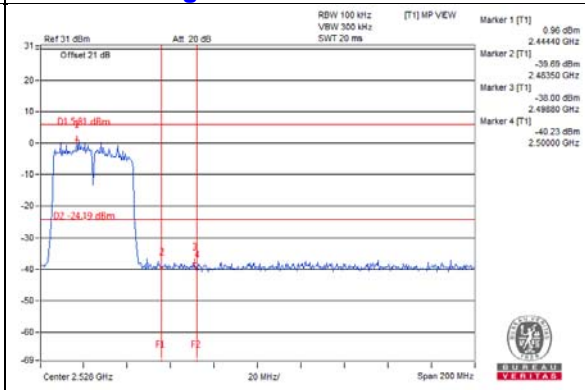


Chain 3



CH 3

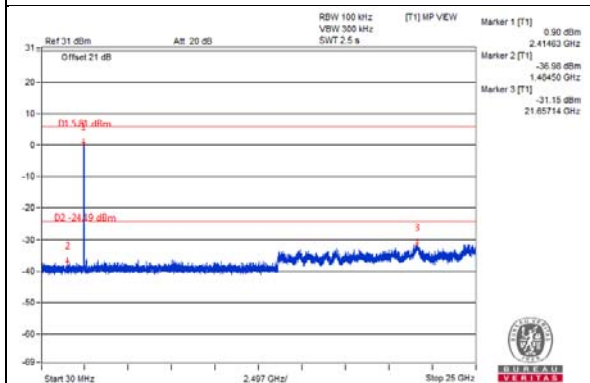


CH 6

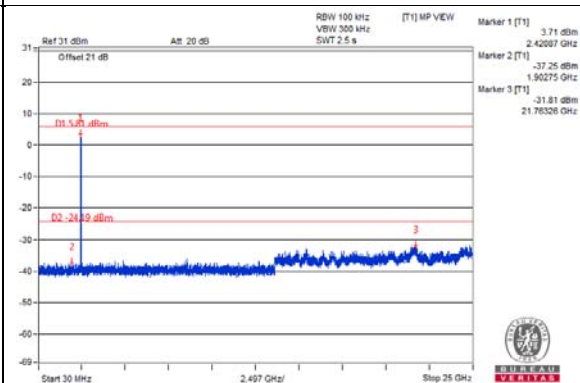


CH 9

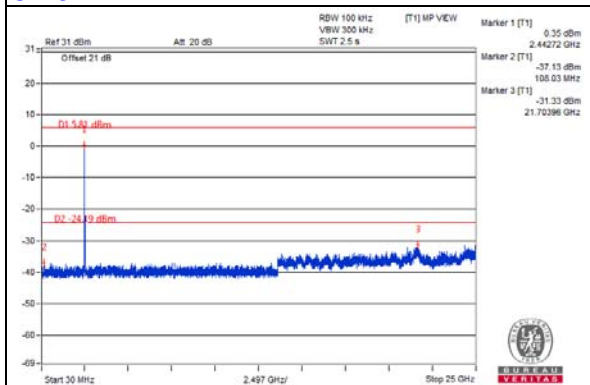

CH 3 Band edge

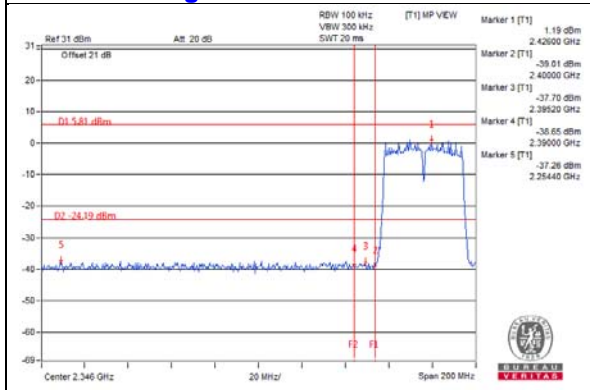

CH 9 Band edge

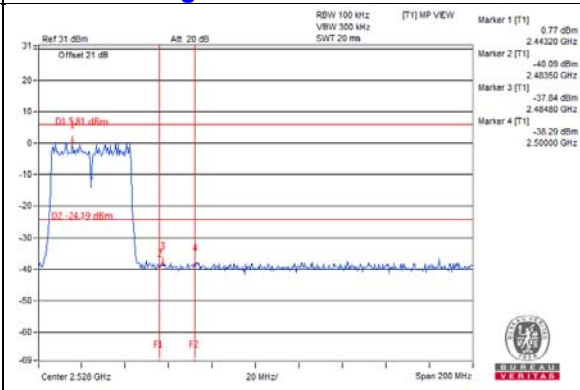

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---