



FCC RADIO TEST REPORT

Applicant : D-Link Corporation

Address : 14420 Myford Road Suite 100 Irvine California
United States 92606

Equipment : BE3600 Wi-Fi 7 Smart Mesh Router,
Wi-Fi 7 BE3600 Mesh Router

Model No. : M36

Trade Name : D-Link

FCC ID : KA2M36B1

I HEREBY CERTIFY THAT :

The sample was received on Dec. 24, 2024 and the testing was completed on May. 05, 2025 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory



**CONTENTS**

1.	Summary of Test Procedure and Test Results	5
1.1.	Applicable Standards	5
2.	Test Configuration of Equipment under Test	6
2.1.	Feature of Equipment under Test	6
2.2.	Carrier Frequency of Channels	7
2.3.	Test Mode and Test Software	9
2.4.	Description of Test System	11
2.5.	General Information of Test	12
2.6.	Measurement Uncertainty	13
3.	Test Equipment and Ancillaries Used for Tests	14
4.	Antenna Requirements	18
4.1.	Standard Applicable	18
4.2.	Antenna Construction and Directional Gain	19
5.	Test of AC Power Line Conducted Emission	20
5.1.	Test Limit	20
5.2.	Test Procedures	20
5.3.	Typical Test Setup	21
5.4.	Test Result and Data	22
5.5.	Test Photographs	24
6.	Test of Spurious Emission (Radiated)	25
6.1.	Test Limit	25
6.2.	Test Procedures	26
6.3.	Typical Test Setup	27
6.4.	Test Result and Data (9kHz ~ 30MHz)	28
6.5.	Test Result and Data (30MHz ~ 1GHz)	28
6.6.	Test Result and Data (1GHz ~ 40GHz)	30
6.7.	Restricted Bands of Operation	118
6.8.	Test Photographs (30MHz ~ 1GHz)	119
6.9.	Test Photographs (1GHz ~ 40GHz)	120
7.	On Time, Duty Cycle and Measurement methods	122
7.1.	Test Limit	122
7.2.	Test Procedure	122
7.3.	Test Setup Layout	122
7.4.	Test Result and Data	123
7.5.	Measurement Methods	123
8.	6dB Bandwidth & 99% Occupied Bandwidth	127
8.1.	Test Limit	127
8.2.	Test Procedure	127
8.3.	Test Setup Layout	127
8.4.	Test Result and Data	128
9.	26dB Bandwidth & 99% Occupied Bandwidth	141
9.1.	Test Limit	141



9.2.	Test Procedure	141
9.3.	Test Setup Layout	141
9.4.	Test Result and Data	142
10.	Average Power.....	186
10.1.	Test Limit	186
10.2.	Test Procedure	187
10.3.	Test Setup Layout	187
10.4.	Test Result and Data	188
11.	Power Spectral Density.....	220
11.1.	Test Limit	220
11.2.	Test Procedure	220
11.3.	Test Setup Layout	220
11.4.	Test Result and Data	221



History of this test report

Report No.	Issued Date	Description
24090397-TRFCC02	May. 07, 2025	Original



1. Summary of Test Procedure and Test Results

1.1. Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart E §15.407

KDB 789033

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207(a)	AC Power Line Conducted Emission	PASS
15.407(b) 15.209	Radiated Spurious Emission	PASS
15.407(a)	26 dB & Occupied Bandwidth	PASS
15.407	6 dB Bandwidth	PASS
15.407 (a) & (a)(3)	Average Power	PASS
15.407(a)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Operation Frequency Range	802.11b/g/n(Turbo QAM)/ax/be : 2400-2483.5MHz 802.11a/n/ac/ax/be: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz
Center Frequency Range	802.11b/g/n(Turbo QAM)/ax/be : 2412-2462MHz 802.11a/n/ac/ax/be: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz, 5745-5825MHz
Modulation Type	2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 256QAM(TurboQAM) 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 802.11be: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 802.11be: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM
Modulation Technology	DSSS, OEDM, OFDMA
Data Rate	2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15,HT20/40 MCS0 – MCS9, VHT20/40(TurboQAM) 802.11ax: MCS0 – MCS11,HE20/40 802.11be: MCS0 – MCS13,EHT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11,HE20/40/80/160 802.11be: MCS0 – MCS13,EHT20/40/80/160
Antenna Type	Dipole Antenna
Antenna Gain	2412-2484MHz: ANT B:1.57dBi, ANT C: 1.58dBi 5180-5260MHz: ANT A 1.68dBi, ANT D: 1.82dBi 5260-5320MHz: ANT A 1.63dBi, ANT D: 1.89dBi 5500-5700MHz: ANT A 1.72dBi, ANT D: 2.01dBi 5745-5875MHz: ANT A 1.73dBi, ANT D: 1.97dBi
Adapter	1. Brand: AMIGO Model: AMS200-1201500FU 2. Brand: AMIGO Model: AMS200-1201500F
RJ45 Cable	Brand: Nienyi /Model: NYS6200

Note:

1. EUT support TPC Function.
2. EUT support AP Mode (Master)
3. EUT support Bridge/Extender/Mesh Mode(Master/Client).
4. EUT Only Support Full RU
5. WLAN 2.4GHz 802.11ax/be support beamforming Function.
6. WLAN 5GHz 802.11ax/be support beamforming Function.
7. For more details, please refer to the User's manual of the EUT.



2.2. Carrier Frequency of Channels

Band: 5150MHz-5250MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20, 802.11be EHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*36	5180	44	5220
*40	5200	*48	5240

802.11n HT40, 802.11ac VHT40, 802.11ax HE40, 802.11be EHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*38	5190	*46	5230

802.11ac VHT80, 802.11ax HE80, 802.11be EHT80

Channel	Frequency(MHz)
*42	5210

Band: 5250MHz-5350MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20, 802.11be EHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*52	5260	*60	5300
56	5280	*64	5320

802.11n HT40, 802.11ac VHT40, 802.11ax HE40, 802.11be EHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*54	5270	*62	5310

802.11ac VHT80, 802.11ax HE80, 802.11be EHT80

Channel	Frequency(MHz)
*58	5290

Band: 5150MHz-5350MHz Straddle Channel

802.11ac VHT160, 802.11ax HE160

Channel	Frequency(MHz)
*50	5250

Band: 5470MHz-5725MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20, 802.11be EHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	*140	5700
*120	5600		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40, 802.11be EHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*102	5510	126	5630
110	5550	*134	5670
*118	5590		

802.11ac VHT80, 802.11ax HE80, 802.11be EHT80

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*106	5530	*122	5610

802.11ac VHT160, 802.11ax HE160

Channel	Frequency(MHz)
*114	5570



Band 3: Straddle Channel

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20, 802.11be EHT20

Channel	Frequency(MHz)
*144	5720

802.11n HT40, 802.11ac VHT40, 802.11ax HE40, 802.11be EHT40

Channel	Frequency(MHz)
*142	5710

802.11ac VHT80, 802.11ax HE80, 802.11be EHT80

Channel	Frequency(MHz)
*138	5690

Band: 5725MHz-5850MHz

802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20, 802.11be EHT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*149	5745	161	5805
153	5765	*165	5825
*157	5785		

802.11n HT40, 802.11ac VHT40, 802.11ax HE40, 802.11be EHT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*151	5755	*159	5795

802.11ac VHT80, 802.11ax HE80, 802.11be EHT80

Channel	Frequency(MHz)
*155	5775

Note: Channels remarked * are selected to perform test.



2.3. Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- An executive program, "QSPR ver.6.00.00164.3" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	TX Mode, 802.11a
2	TX Mode, 802.11be EHT20
3	TX Mode, 802.11be EHT40
4	TX Mode, 802.11be EHT80
5	TX Mode, 802.11be EHT160
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	TX Mode, 802.11a
2	TX Mode, 802.11be EHT20
3	TX Mode, 802.11be EHT40
4	TX Mode, 802.11be EHT80
5	TX Mode, 802.11be EHT160
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 40GHz)	
Test Mode	Operating Description
1	TX Mode, 802.11a
2	TX Mode, 802.11be EHT20
3	TX Mode, 802.11be EHT40
4	TX Mode, 802.11be EHT80
5	TX Mode, 802.11be EHT160
caused "Test Mode 1~5" generated the worst case, it was reported as the final data.	

Note:

- Non-Beamforming was the worst case, so it was used for the test result.
- There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz. worst case (V)

Test Item /test voltage	AC 120V / 60Hz	AC 240V / 60Hz.
AC Power Line Conducted Emission:	V	
Radiation Emissions (Below 1GHz)	V	

3.The EUT has Two types of Adapters. After engineering evaluation,
For AC Power Line Conducted Emission, AMS200-1202000F is worst case.
For Radiated Spurious Emission(Below 1GHz), AMS200-1202000FU is worst case.
For Radiated Spurious Emission(Above 1GHz), AMS200-1202000FU is worst case.,
hence, are used at test report



The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11a	2TX
802.11n HT20	2TX
802.11n HT40	2TX
802.11ac VHT20	2TX
802.11ac VHT40	2TX
802.11ac VHT80	2TX
802.11ac VHT160	2TX
802.11ax HE20	2TX
802.11ax HE40	2TX
802.11ax HE80	2TX
802.11ax HE160	2TX
802.11be EHT20	2TX
802.11be EHT40	2TX
802.11be EHT80	2TX
802.11be EHT160	2TX



2.4. Description of Test System

Non-Beamforming:

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude 7490	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude 7490	N/A	Adapter / 1.8m / NS
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude 7490	N/A	Adapter / 1.8m / NS

Beamforming:

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude 7490	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A



2.5. General Information of Test

Organization	Cerpass Technology Corp.		
☒ Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	IC	4934E-1, 4934E-2	
	Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Non-Beamforming:

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2025/01/02	21.2℃ / 51%	Leon Huang
RF Conducted	RFCON01-NK	2025/01/03	20.9℃ / 54%	Leon Huang
RF Conducted	RFCON01-NK	2025/01/06	23.9℃ / 47%	Leon Huang
RF Conducted	RFCON01-NK	2025/01/07	24.9℃ / 49%	Leon Huang
RF Conducted	RFCON01-NK	2025/01/09	22.4℃ / 46%	Leon Huang
RF Conducted	RFCON01-NK	2025/03/08	22.2℃ / 49%	Leon Huang
Radiated Emissions	3M02-NK	2024/12/27	19.1℃ / 53%	Park Chen
Radiated Emissions	3M02-NK	2024/12/30	19.1℃ / 47%	Park Chen
Radiated Emissions	3M02-NK	2025/03/20	20.3℃ / 56%	Park Chen
AC Power Line Conducted Emission	CON02-NK	2025/03/20	17.1℃ / 55%	Park Chen

Beamforming:

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2025/01/11	22.4℃ / 47%	Leon Huang
RF Conducted	RFCON01-NK	2025/01/13	22.6℃ / 46%	Leon Huang
RF Conducted	RFCON01-NK	2025/05/05	24.7℃ / 51%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2025/02/24	17.1℃ / 55%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2025/02/24	17.1℃ / 55%	Leon Huang



2.6. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.2dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
6dB Bandwidth	±5.4%
26dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%
Frequency Stability	±0.23KHz



3. Test Equipment and Ancillaries Used for Tests

Non-Beamforming:

Test Item	Radiated Emissions(2024/12/27-2024/12/30)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2024/02/19	2025/02/18
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31589	2024/02/26	2025/02/25
Horn Antenna	EMCO	3116	31970	2024/02/23	2025/02/22
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2024/07/16	2025/07/15
Preamplifier	Agilent	8449B	3008A01954	2024/03/01	2025/02/28
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2024/10/15	2025/10/14
Preamplifier	EM Electronics corp.	EM330	60659	2024/12/16	2025/12/15
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2024/02/23	2025/02/22
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2024/03/05	2025/03/04
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2024/03/05	2025/03/04
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2024/03/05	2025/03/04
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2024/10/14	2025/10/13
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2024/10/14	2025/10/13
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2024/10/15	2025/10/14
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2024/03/11	2025/03/10
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2024/03/11	2025/03/10



Test Item	Radiated Emissions(2025/3/20)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2025/02/17	2026/02/16
Active Loop Antenna	EMCO	6507	00040855	2024/05/02	2025/05/01
Horn Antenna	EMCO	3115	31589	2025/02/14	2026/02/13
Horn Antenna	EMCO	3116	31970	2025/02/20	2026/02/19
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2024/07/16	2025/07/15
Preamplifier	Agilent	8449B	3008A01954	2025/02/12	2026/02/11
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2024/10/15	2025/10/14
Preamplifier	EM Electronics corp.	EM330	60659	2024/12/16	2025/12/15
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2025/02/21	2026/02/20
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2025/02/26	2026/02/25
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2025/02/26	2026/02/25
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2025/02/26	2026/02/25
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2024/10/14	2025/10/13
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2024/10/14	2025/10/13
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2024/10/15	2025/10/14
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2025/02/21	2026/02/20
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2025/02/21	2026/02/20

Test Item	RF Conducted(2025/01/02-2025/01/09)				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2024/03/01	2025/02/28
Attenuator	KEYSIGHT	8491B	MY39250703	2024/02/20	2025/02/19
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2024/5/13	2025/05/12
Power Meter	Anritsu	ML2495A	1224005	2024/02/17	2025/02/16
Power Sensor	Anritsu	MA2411B	1207295	2024/02/17	2025/02/16
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	RF Conducted(2025/03/08)				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2024/5/13	2025/05/12
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2024/08/27	2025/08/26
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127740	2024/08/27	2025/08/26
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA

Beamforming:

Test Item	RF Conducted(2025/01/11~2025/01/13)				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2024/03/01	2025/02/28
Attenuator	KEYSIGHT	8491B	MY39250703	2024/02/20	2025/02/19
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2024/5/13	2025/05/12
Power Meter	Anritsu	ML2495A	1224005	2024/02/17	2025/02/16
Power Sensor	Anritsu	MA2411B	1207295	2024/02/17	2025/02/16
Switch Box	Theda	1-4	TW5451159	NA	NA

Test Item	RF Conducted(2025/05/05)				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m(1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2024/5/13	2025/05/12
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127740	2024/08/27	2025/08/26
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2024/08/27	2025/08/26
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



4.2. Antenna Construction and Directional Gain

Antenna Type	FPCB Antenna
Antenna Gain	5180-5260MHz: ANT A 1.68dBi, ANT D: 1.82dBi 5260-5320MHz: ANT A 1.63dBi, ANT D: 1.89dBi 5500-5700MHz: ANT A 1.72dBi, ANT D: 2.01dBi 5745-5875MHz: ANT A 1.73dBi, ANT D: 1.97dBi

(Non-Beamforming)

5180-5260MHz
For Power directional gain= $G_{ant} = 1.82$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 4.76 (dBi)
5260-5320MHz
For Power directional gain= $G_{ant} = 1.89$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 4.77 (dBi)
5500-5700MHz
For Power directional gain= $G_{ant} = 2.01$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 4.88 (dBi)
5745-5825MHz
For Power directional gain= $G_{ant} = 1.97$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ = 4.86 (dBi)

*MIMO type: Cyclic Delay Diversity (CDD) mode.

(Beamforming)

5180-5260MHz
For Power directional gain= $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.76$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.76$ (dBi)
5260-5320MHz
For Power directional gain= $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.77$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.77$ (dBi)
5500-5700MHz
For Power directional gain= $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.88$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.88$ (dBi)
5745-5875MHz
For Power directional gain= $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.86$ dBi For PSD directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 4.86$ (dBi)



5. Test of AC Power Line Conducted Emission

5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3. Typical Test Setup

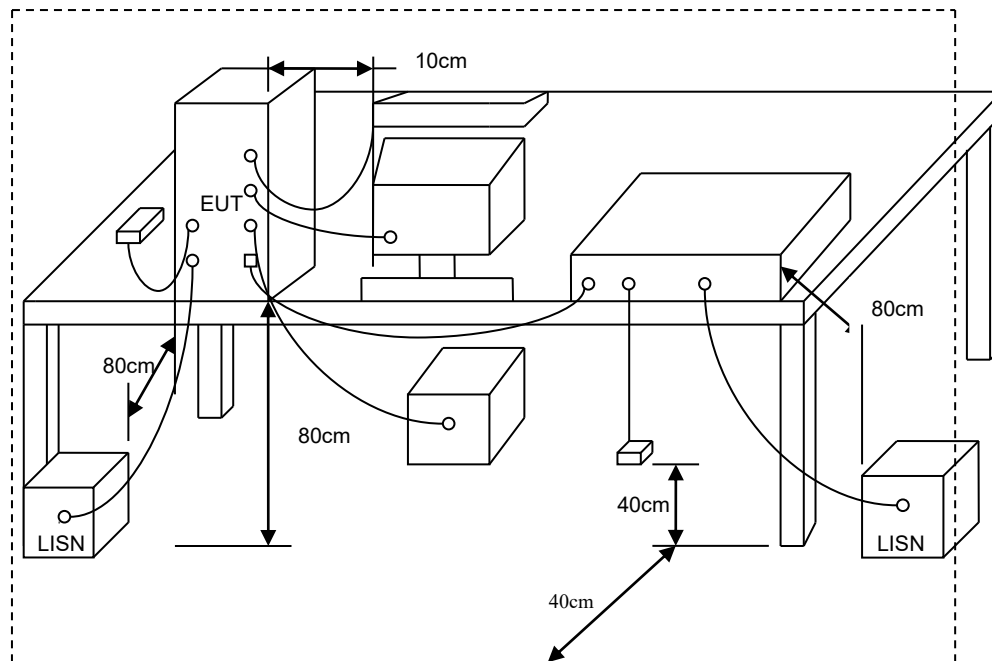




5.4. Test Result and Data

Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 23

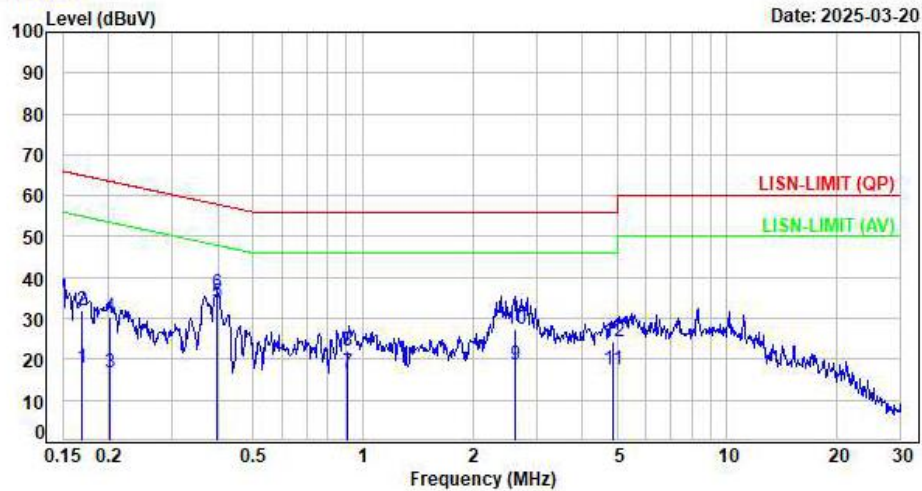

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1699	9.63	8.10	17.73	54.97	-37.24	Average	P
2	0.1699	9.63	22.37	32.00	64.97	-32.97	QP	P
3	0.2009	9.63	7.07	16.70	53.57	-36.87	Average	P
4	0.2009	9.63	20.76	30.39	63.57	-33.18	QP	P
5	0.3989	9.65	24.09	33.74	47.88	-14.14	Average	P
6	0.3989	9.65	26.39	36.04	57.88	-21.84	QP	P
7	0.9103	9.66	7.12	16.78	46.00	-29.22	Average	P
8	0.9103	9.66	12.42	22.08	56.00	-33.92	QP	P
9	2.6262	9.71	9.07	18.78	46.00	-27.22	Average	P
10	2.6262	9.71	17.83	27.54	56.00	-28.46	QP	P
11	4.8646	9.76	7.63	17.39	46.00	-28.61	Average	P
12	4.8646	9.76	14.58	24.34	56.00	-31.66	QP	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 24

Date: 2025-03-20

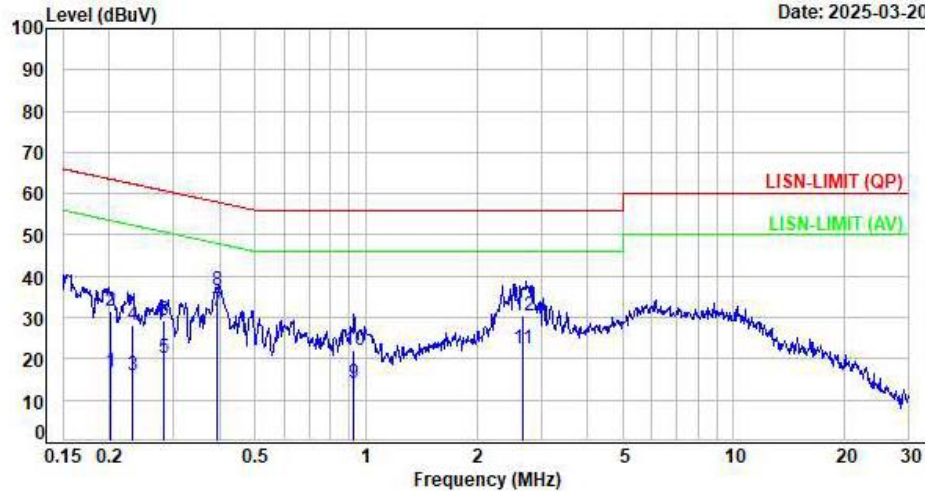

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2021	9.61	6.96	16.57	53.53	-36.96	Average	P
2	0.2021	9.61	22.00	31.61	63.53	-31.92	QP	P
3	0.2318	9.61	6.36	15.97	52.38	-36.41	Average	P
4	0.2318	9.61	18.70	28.31	62.38	-34.07	QP	P
5	0.2816	9.61	10.43	20.04	50.77	-30.73	Average	P
6	0.2816	9.61	19.67	29.28	60.77	-31.49	QP	P
7	0.3947	9.62	21.84	31.46	47.96	-16.50	Average	P
8	0.3947	9.62	26.69	36.31	57.96	-21.65	QP	P
9	0.9288	9.65	4.29	13.94	46.00	-32.06	Average	P
10	0.9288	9.65	12.53	22.18	56.00	-33.82	QP	P
11	2.6648	9.69	12.66	22.35	46.00	-23.65	Average	P
12	2.6648	9.69	20.84	30.53	56.00	-25.47	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1. Test Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.



6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m). There's no corresponding limitation in the actual test item.




6.3. Typical Test Setup


Below 30MHz test setup

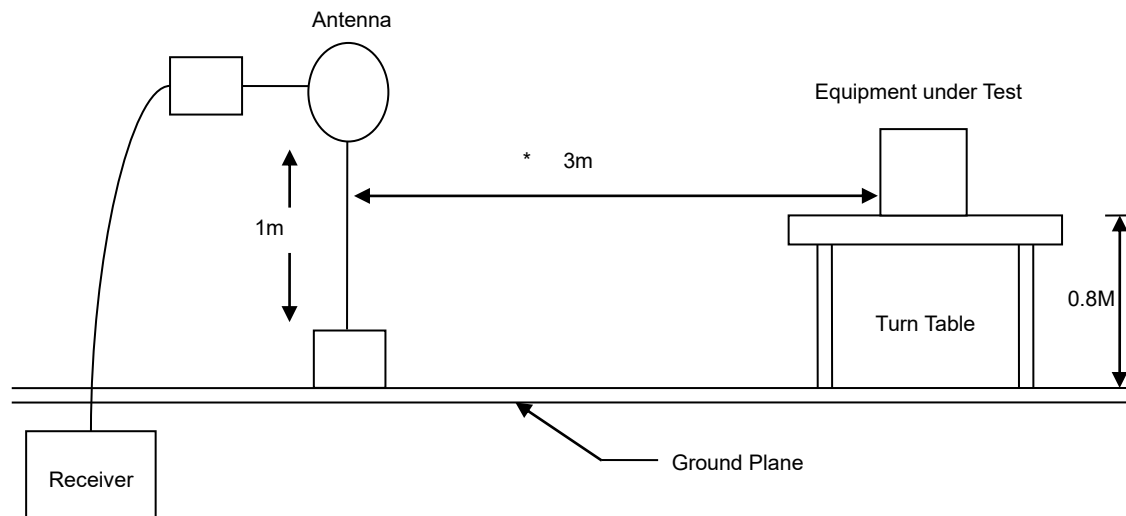

30MHz- 1GHz Test Setup

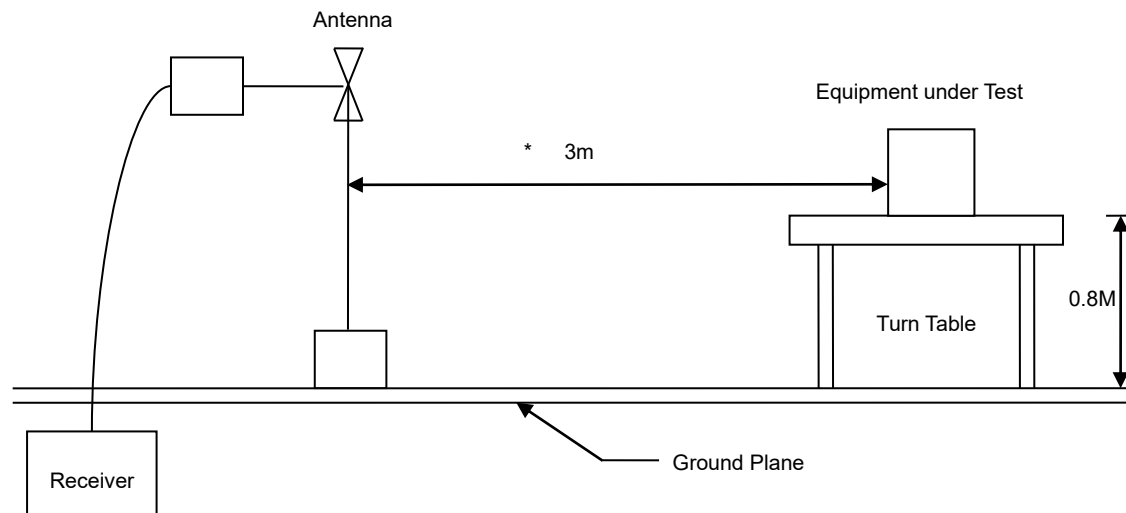

Above 1GHz Test Setup

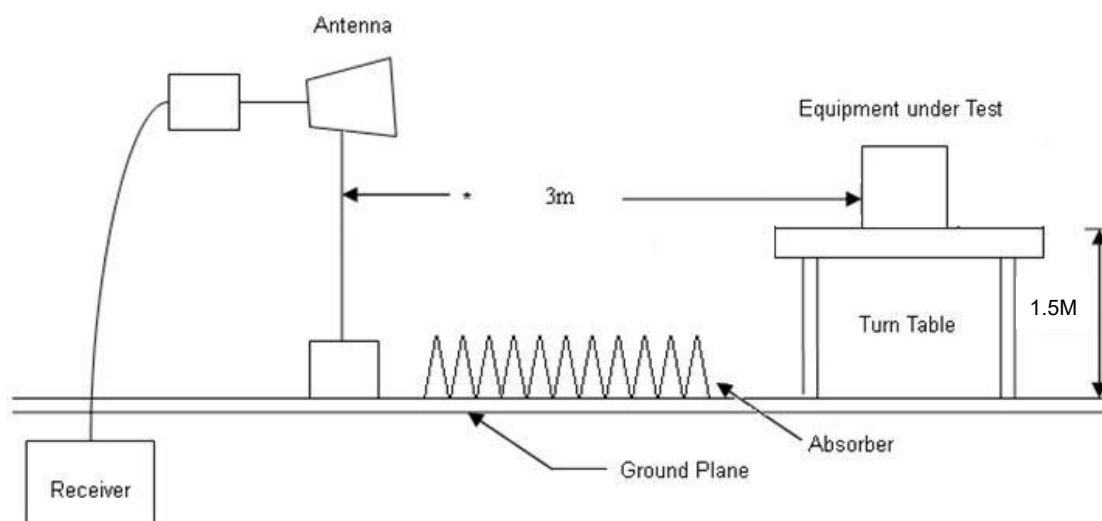




6.4. Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5. Test Result and Data (30MHz ~ 1GHz)

Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

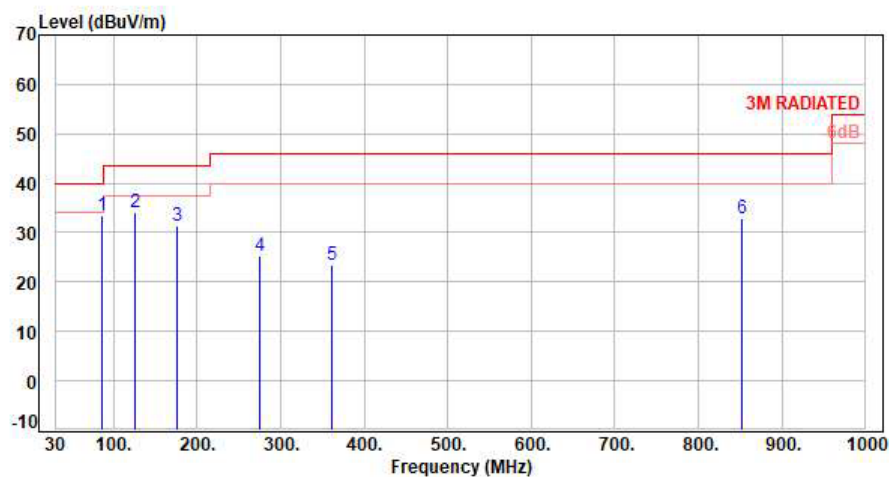

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	86.26	-15.73	49.34	33.61	40.00	-6.39	Peak	400	360	P
2	125.06	-12.02	46.27	34.25	43.50	-9.25	Peak	400	360	P
3	175.50	-10.30	41.82	31.52	43.50	-11.98	Peak	400	360	P
4	274.44	-9.59	34.83	25.24	46.00	-20.76	Peak	400	360	P
5	361.74	-6.06	29.63	23.57	46.00	-22.43	Peak	400	360	P
6	852.56	4.01	29.00	33.01	46.00	-12.99	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

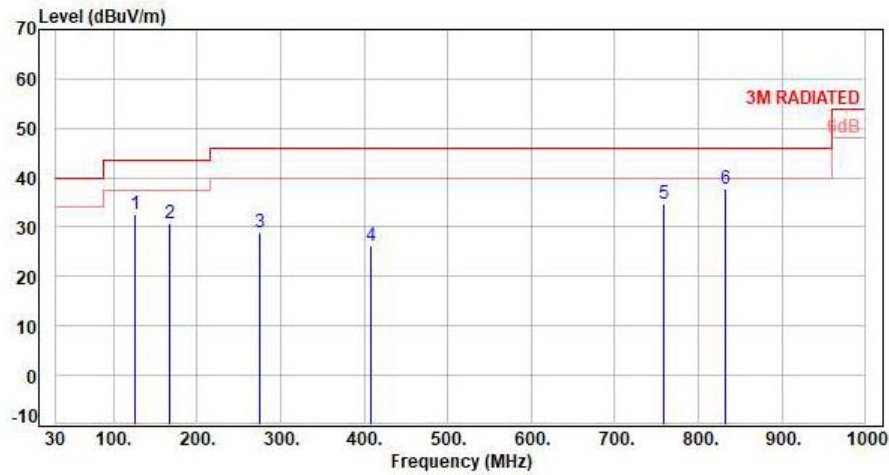

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	125.06	-12.02	44.57	32.55	43.50	-10.95	Peak	400	0	P
2	167.74	-9.68	40.48	30.80	43.50	-12.70	Peak	400	0	P
3	274.44	-9.59	38.41	28.82	46.00	-17.18	Peak	400	0	P
4	408.30	-4.92	31.06	26.14	46.00	-19.86	Peak	400	0	P
5	759.44	2.72	31.86	34.58	46.00	-11.42	Peak	400	0	P
6	833.16	3.48	34.32	37.80	46.00	-8.20	Peak	400	0	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



6.6. Test Result and Data (1GHz ~ 40GHz)

B1

Test Mode : 2TX 11a CH36 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

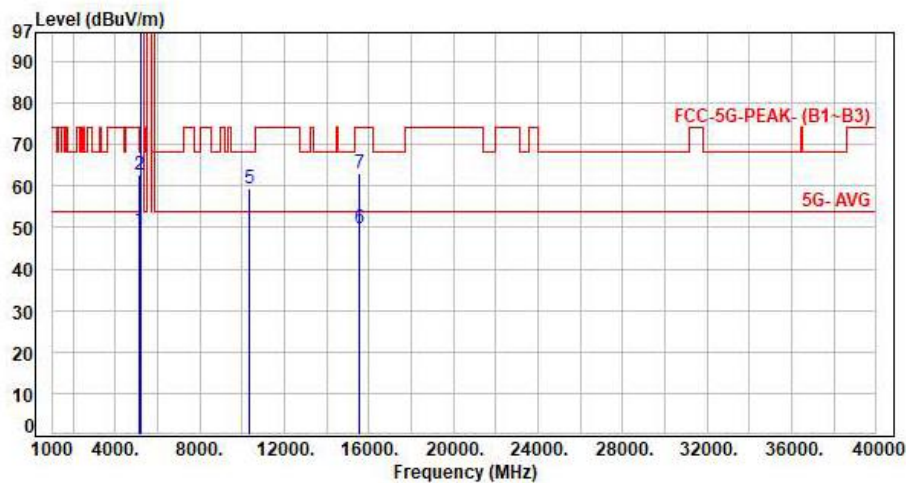

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.70	49.39	54.00	-4.61	Average	100	289	P
2	5150.00	6.69	56.06	62.75	74.00	-11.25	Peak	100	289	P
3	5180.00	6.79	98.70	105.49	200.00	-94.51	Average	100	289	P
4	5180.00	6.79	108.76	115.55	200.00	-84.45	Peak	100	289	P
5	10360.00	16.31	43.15	59.46	68.20	-8.74	Peak	100	112	P
6	15540.00	20.54	29.39	49.93	54.00	-4.07	Average	100	332	P
7	15540.00	20.54	42.49	63.03	74.00	-10.97	Peak	100	332	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH36 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

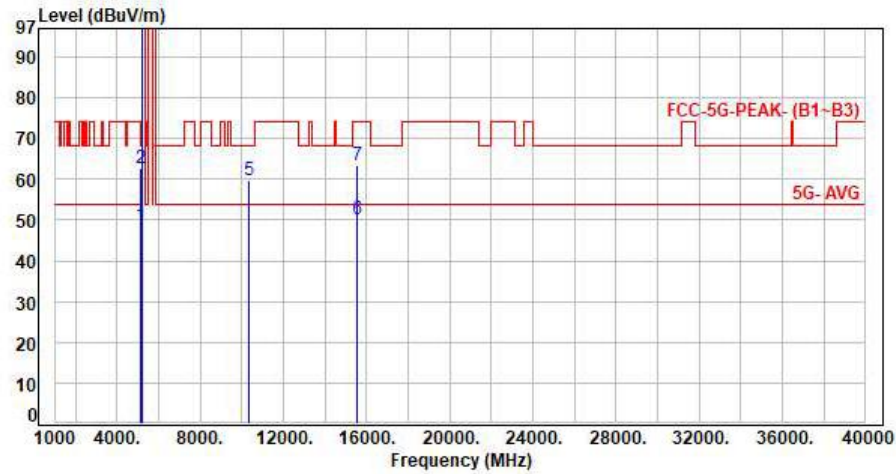


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.95	48.64	54.00	-5.36	Average	103	54	P
2	5150.00	6.69	55.97	62.66	74.00	-11.34	Peak	103	54	P
3	5180.00	6.79	94.62	101.41	200.00	-98.59	Average	103	54	P
4	5180.00	6.79	104.78	111.57	200.00	-88.43	Peak	103	54	P
5	10360.00	16.31	43.28	59.59	68.20	-8.61	Peak	100	157	P
6	15540.00	20.54	29.59	50.13	54.00	-3.87	Average	100	182	P
7	15540.00	20.54	42.85	63.39	74.00	-10.61	Peak	100	182	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH40 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

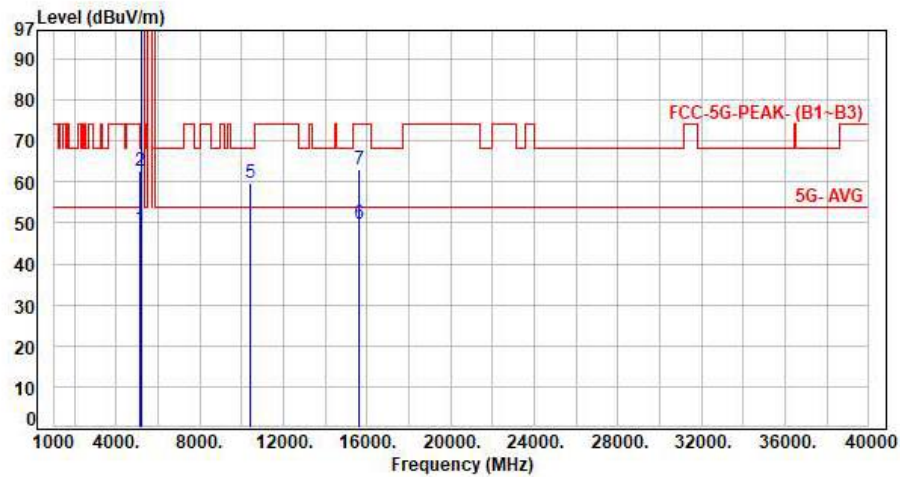


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.94	48.63	54.00	-5.37	Average	108	292	P
2	5150.00	6.69	55.91	62.60	74.00	-11.40	Peak	108	292	P
3	5200.00	6.86	98.02	104.88	200.00	-95.12	Average	108	292	P
4	5200.00	6.86	108.35	115.21	200.00	-84.79	Peak	108	292	P
5	10400.00	16.35	43.51	59.86	68.20	-8.34	Peak	100	115	P
6	15600.00	20.35	29.46	49.81	54.00	-4.19	Average	100	334	P
7	15600.00	20.35	42.56	62.91	74.00	-11.09	Peak	100	334	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH40 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

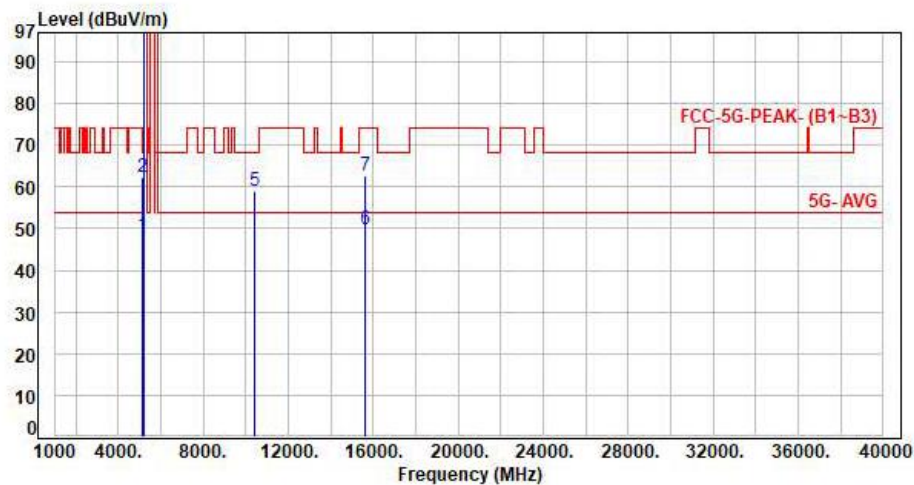

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.79	48.48	54.00	-5.52	Average	100	54	P
2	5150.00	6.69	55.72	62.41	74.00	-11.59	Peak	100	54	P
3	5200.00	6.86	93.95	100.81	200.00	-99.19	Average	100	54	P
4	5200.00	6.86	104.10	110.96	200.00	-89.04	Peak	100	54	P
5	10400.00	16.35	42.84	59.19	68.20	-9.01	Peak	100	153	P
6	15600.00	20.35	29.39	49.74	54.00	-4.26	Average	100	189	P
7	15600.00	20.35	42.48	62.83	74.00	-11.17	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

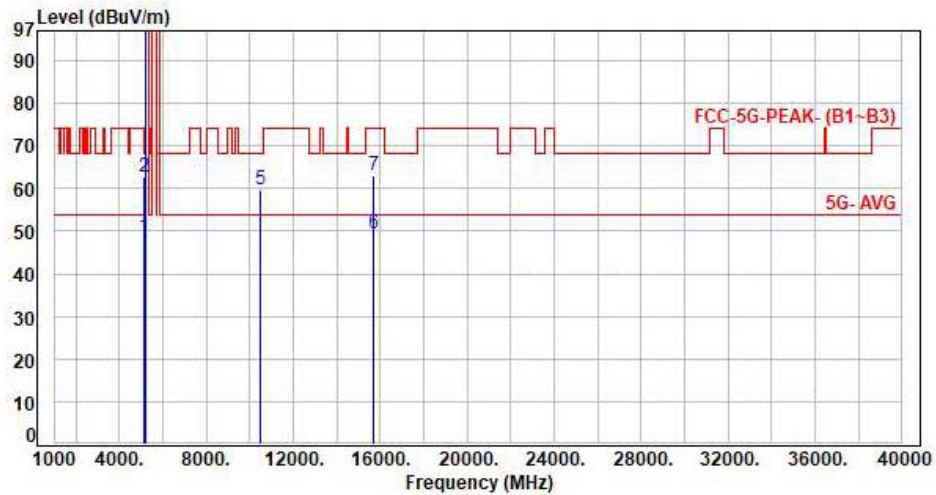

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.84	48.53	54.00	-5.47	Average	100	291	P
2	5150.00	6.69	56.16	62.85	74.00	-11.15	Peak	100	291	P
3	5240.00	6.91	97.02	103.93	200.00	-96.07	Average	100	291	P
4	5240.00	6.91	106.96	113.87	200.00	-86.13	Peak	100	291	P
5	10480.00	16.43	43.38	59.81	68.20	-8.39	Peak	100	115	P
6	15720.00	19.84	29.75	49.59	54.00	-4.41	Average	100	331	P
7	15720.00	19.84	43.15	62.99	74.00	-11.01	Peak	100	331	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH48 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

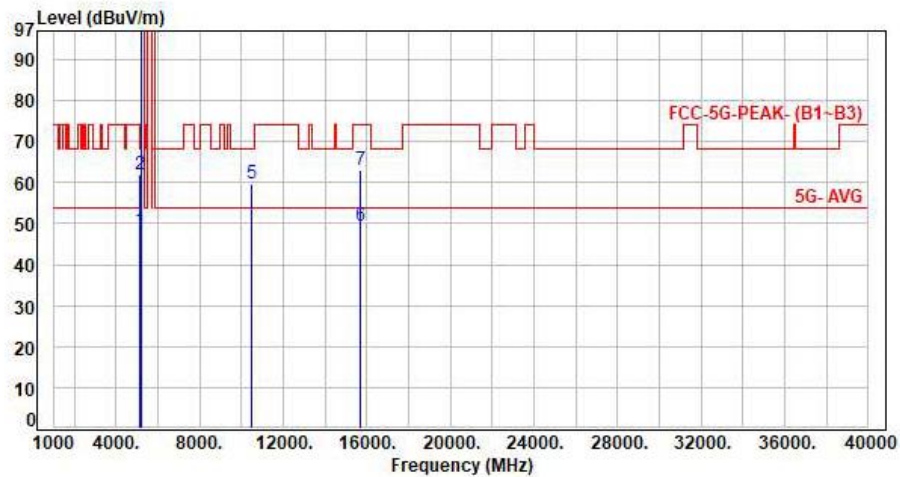


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	41.75	48.44	54.00	-5.56	Average	100	56	P
2	5150.00	6.69	55.35	62.04	74.00	-11.96	Peak	100	56	P
3	5240.00	6.91	94.18	101.09	200.00	-98.91	Average	100	56	P
4	5240.00	6.91	104.43	111.34	200.00	-88.66	Peak	100	56	P
5	10480.00	16.43	43.18	59.61	68.20	-8.59	Peak	100	157	P
6	15720.00	19.84	29.49	49.33	54.00	-4.67	Average	100	182	P
7	15720.00	19.84	43.36	63.20	74.00	-10.80	Peak	100	182	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

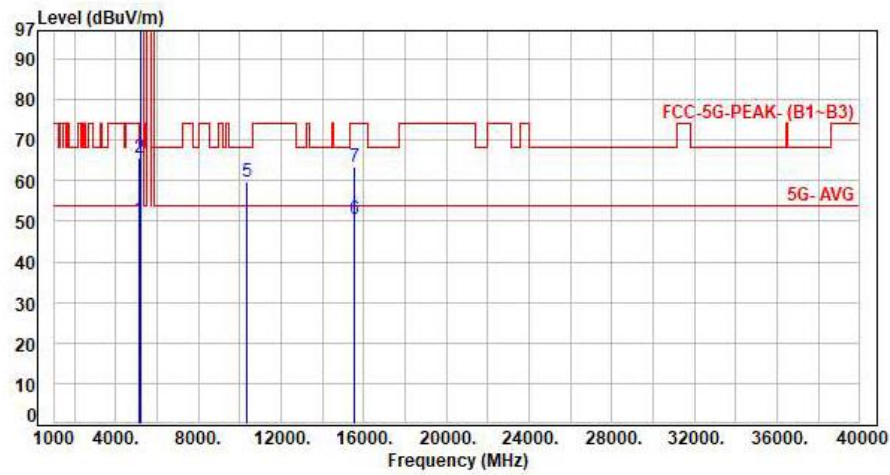

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.86	50.55	54.00	-3.45	Average	100	293	P
2	5150.00	6.69	58.93	65.62	74.00	-8.38	Peak	100	293	P
3	5180.00	6.79	98.52	105.31	200.00	-94.69	Average	100	293	P
4	5180.00	6.79	110.63	117.42	200.00	-82.58	Peak	100	293	P
5	10360.00	16.31	43.52	59.83	68.20	-8.37	Peak	100	108	P
6	15540.00	20.54	29.96	50.50	54.00	-3.50	Average	100	335	P
7	15540.00	20.54	42.76	63.30	74.00	-10.70	Peak	100	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH36 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

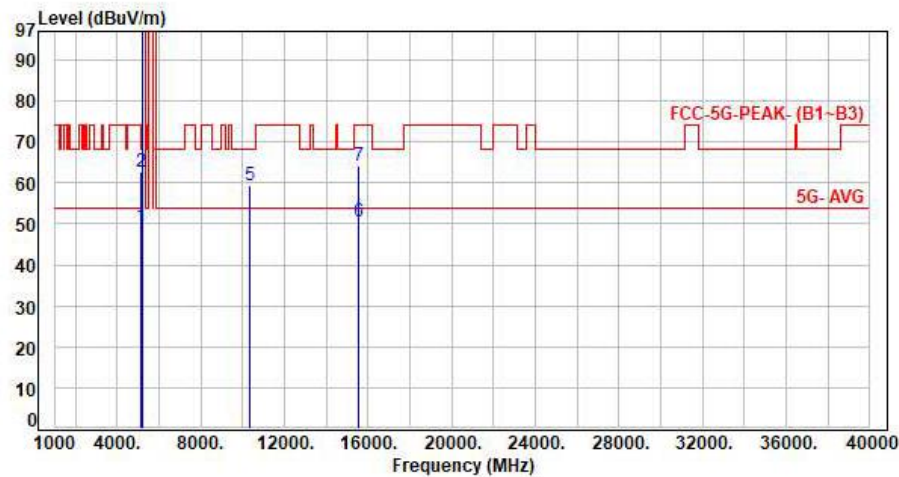

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.73	49.42	54.00	-4.58	Average	103	49	P
2	5150.00	6.69	56.10	62.79	74.00	-11.21	Peak	103	49	P
3	5180.00	6.79	93.98	100.77	200.00	-99.23	Average	103	49	P
4	5180.00	6.79	105.90	112.69	200.00	-87.31	Peak	103	49	P
5	10360.00	16.31	43.08	59.39	68.20	-8.81	Peak	100	160	P
6	15540.00	20.54	29.87	50.41	54.00	-3.59	Average	100	189	P
7	15540.00	20.54	43.55	64.09	74.00	-9.91	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

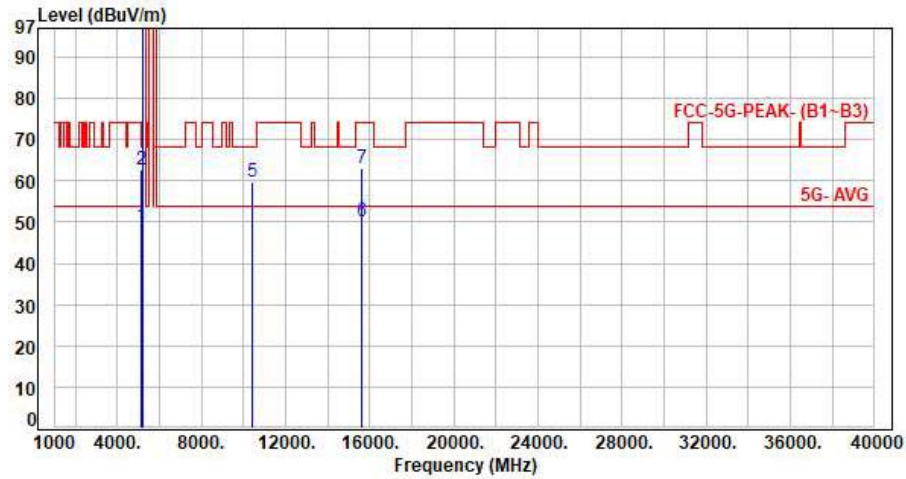

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.31	49.00	54.00	-5.00	Average	106	288	P
2	5150.00	6.69	55.95	62.64	74.00	-11.36	Peak	106	288	P
3	5200.00	6.86	97.79	104.65	200.00	-95.35	Average	106	288	P
4	5200.00	6.86	111.15	118.01	200.00	-81.99	Peak	106	288	P
5	10400.00	16.35	43.48	59.83	68.20	-8.37	Peak	100	114	P
6	15600.00	20.35	29.69	50.04	54.00	-3.96	Average	100	336	P
7	15600.00	20.35	42.88	63.23	74.00	-10.77	Peak	100	336	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

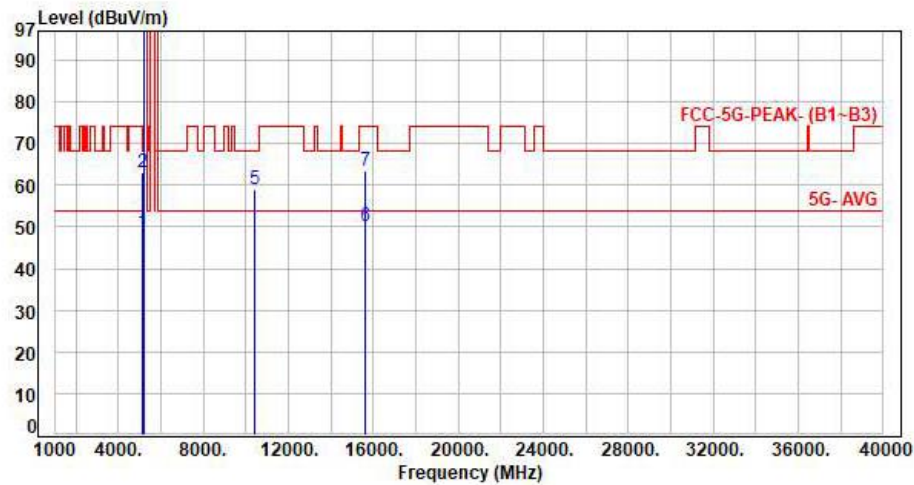

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.16	48.85	54.00	-5.15	Average	100	50	P
2	5150.00	6.69	56.30	62.99	74.00	-11.01	Peak	100	50	P
3	5200.00	6.86	93.98	100.84	200.00	-99.16	Average	100	50	P
4	5200.00	6.86	106.27	113.13	200.00	-86.87	Peak	100	50	P
5	10400.00	16.35	42.84	59.19	68.20	-9.01	Peak	100	159	P
6	15600.00	20.35	29.79	50.14	54.00	-3.86	Average	100	183	P
7	15600.00	20.35	43.26	63.61	74.00	-10.39	Peak	100	183	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

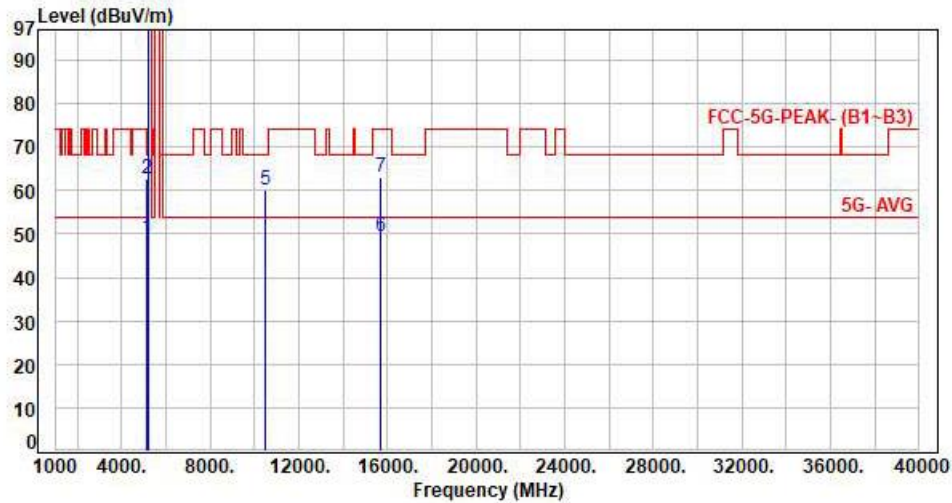

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.26	48.95	54.00	-5.05	Average	124	293	P
2	5150.00	6.69	55.88	62.57	74.00	-11.43	Peak	124	293	P
3	5240.00	6.91	98.23	105.14	200.00	-94.86	Average	124	293	P
4	5240.00	6.91	110.15	117.06	200.00	-82.94	Peak	124	293	P
5	10480.00	16.43	43.55	59.98	68.20	-8.22	Peak	100	115	P
6	15720.00	19.84	29.68	49.52	54.00	-4.48	Average	100	335	P
7	15720.00	19.84	43.24	63.08	74.00	-10.92	Peak	100	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

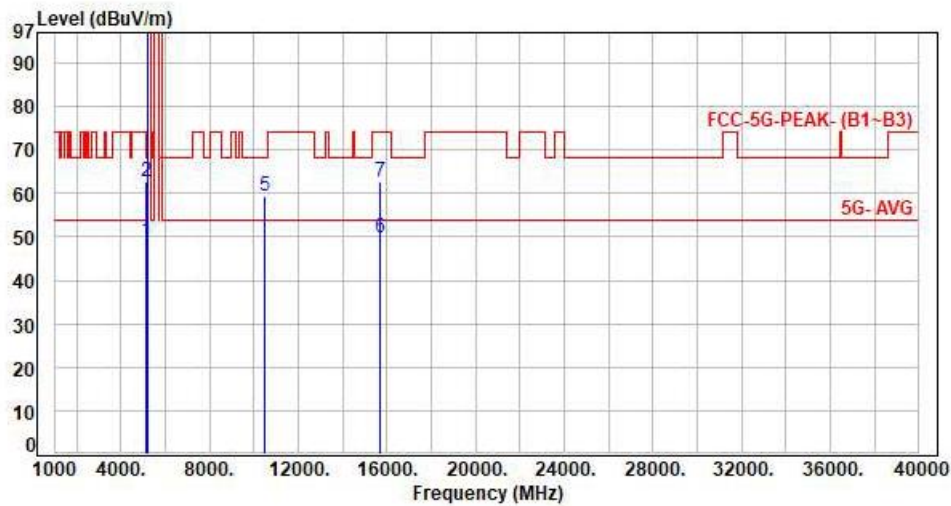

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.33	49.02	54.00	-4.98	Average	100	55	P
2	5150.00	6.69	55.94	62.63	74.00	-11.37	Peak	100	55	P
3	5240.00	6.91	93.22	100.13	200.00	-99.87	Average	100	55	P
4	5240.00	6.91	105.26	112.17	200.00	-87.83	Peak	100	55	P
5	10480.00	16.43	42.84	59.27	68.20	-8.93	Peak	100	165	P
6	15720.00	19.84	29.79	49.63	54.00	-4.37	Average	100	182	P
7	15720.00	19.84	43.02	62.86	74.00	-11.14	Peak	100	182	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor