




Test Mode : 2TX 11be EHT40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

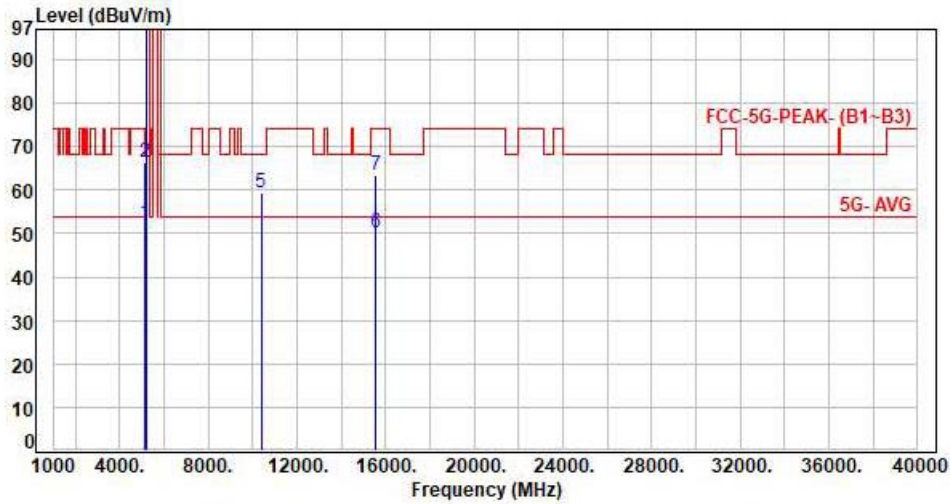


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.66	52.35	54.00	-1.65	Average	117	292	P
2	5150.00	6.69	59.71	66.40	74.00	-7.60	Peak	117	292	P
3	5190.00	6.82	94.44	101.26	200.00	-98.74	Average	117	292	P
4	5190.00	6.82	107.27	114.09	200.00	-85.91	Peak	117	292	P
5	10380.00	16.33	42.92	59.25	68.20	-8.95	Peak	100	114	P
6	15570.00	20.45	29.85	50.30	54.00	-3.70	Average	100	330	P
7	15570.00	20.45	43.10	63.55	74.00	-10.45	Peak	100	330	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

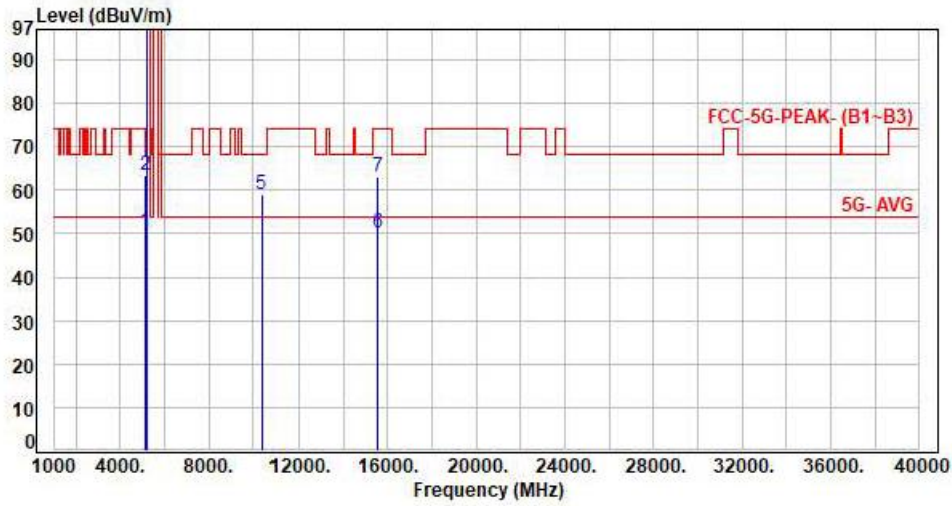


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.82	50.51	54.00	-3.49	Average	109	50	P
2	5150.00	6.69	56.62	63.31	74.00	-10.69	Peak	109	50	P
3	5190.00	6.82	90.15	96.97	200.00	-103.03	Average	109	50	P
4	5190.00	6.82	102.12	108.94	200.00	-91.06	Peak	109	50	P
5	10380.00	16.33	42.69	59.02	68.20	-9.18	Peak	100	158	P
6	15570.00	20.45	29.72	50.17	54.00	-3.83	Average	100	184	P
7	15570.00	20.45	42.69	63.14	74.00	-10.86	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

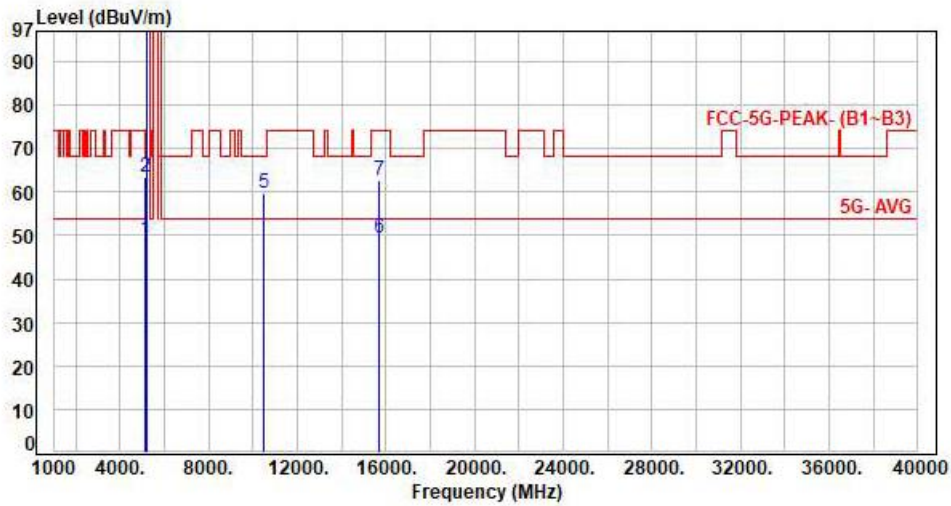


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.28	48.97	54.00	-5.03	Average	106	291	P
2	5150.00	6.69	56.67	63.36	74.00	-10.64	Peak	106	291	P
3	5230.00	6.90	95.06	101.96	200.00	-98.04	Average	106	291	P
4	5230.00	6.90	107.01	113.91	200.00	-86.09	Peak	106	291	P
5	10460.00	16.38	43.49	59.87	68.20	-8.33	Peak	100	115	P
6	15690.00	19.94	29.52	49.46	54.00	-4.54	Average	100	341	P
7	15690.00	19.94	42.84	62.78	74.00	-11.22	Peak	100	341	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

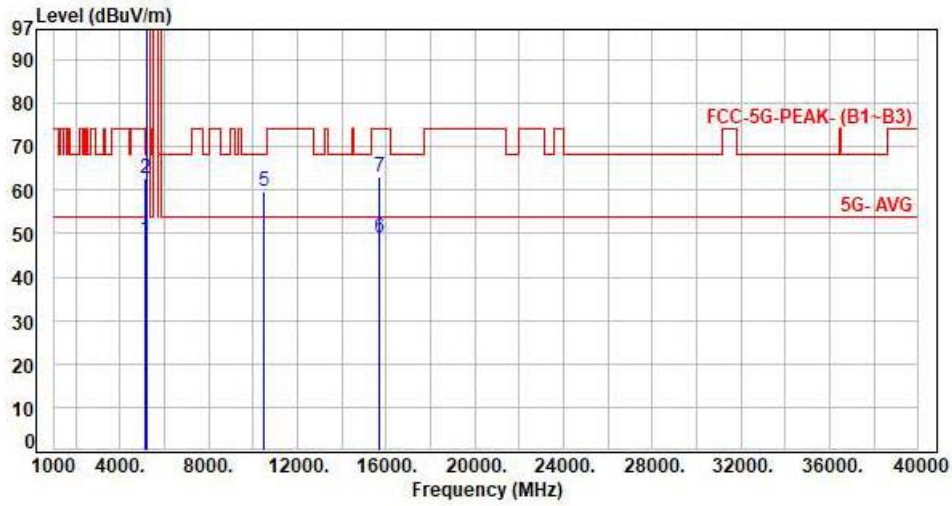


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.16	48.85	54.00	-5.15	Average	100	54	P
2	5150.00	6.69	55.99	62.68	74.00	-11.32	Peak	100	54	P
3	5230.00	6.90	89.90	96.80	200.00	-103.20	Average	100	54	P
4	5230.00	6.90	102.43	109.33	200.00	-90.67	Peak	100	54	P
5	10460.00	16.38	43.46	59.84	68.20	-8.36	Peak	100	152	P
6	15690.00	19.94	29.25	49.19	54.00	-4.81	Average	100	189	P
7	15690.00	19.94	43.27	63.21	74.00	-10.79	Peak	100	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

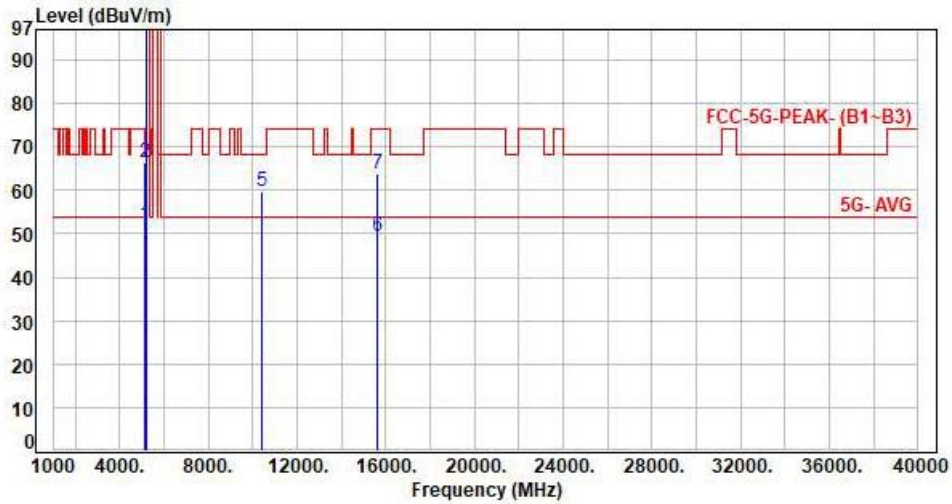


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.47	52.16	54.00	-1.84	Average	122	290	P
2	5150.00	6.69	59.80	66.49	74.00	-7.51	Peak	122	290	P
3	5210.00	6.87	91.07	97.94	200.00	-102.06	Average	122	290	P
4	5210.00	6.87	103.50	110.37	200.00	-89.63	Peak	122	290	P
5	10420.00	16.35	43.47	59.82	68.20	-8.38	Peak	100	114	P
6	15630.00	20.18	29.36	49.54	54.00	-4.46	Average	100	332	P
7	15630.00	20.18	43.61	63.79	74.00	-10.21	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

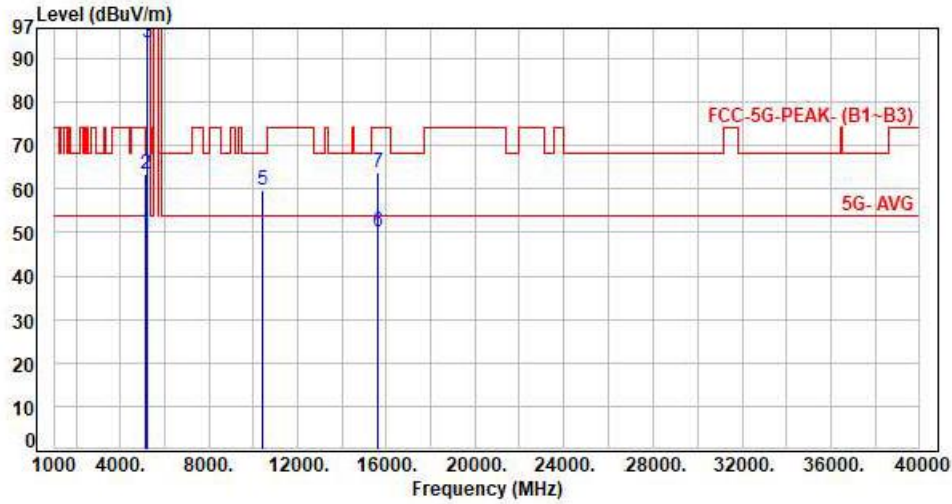


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.62	50.31	54.00	-3.69	Average	103	56	P
2	5150.00	6.69	56.93	63.62	74.00	-10.38	Peak	103	56	P
3	5210.00	6.87	86.89	93.76	200.00	-106.24	Average	103	56	P
4	5210.00	6.87	99.21	106.08	200.00	-93.92	Peak	103	56	P
5	10420.00	16.35	43.32	59.67	68.20	-8.53	Peak	100	158	P
6	15630.00	20.18	29.87	50.05	54.00	-3.95	Average	100	188	P
7	15630.00	20.18	43.51	63.69	74.00	-10.31	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



B2

Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

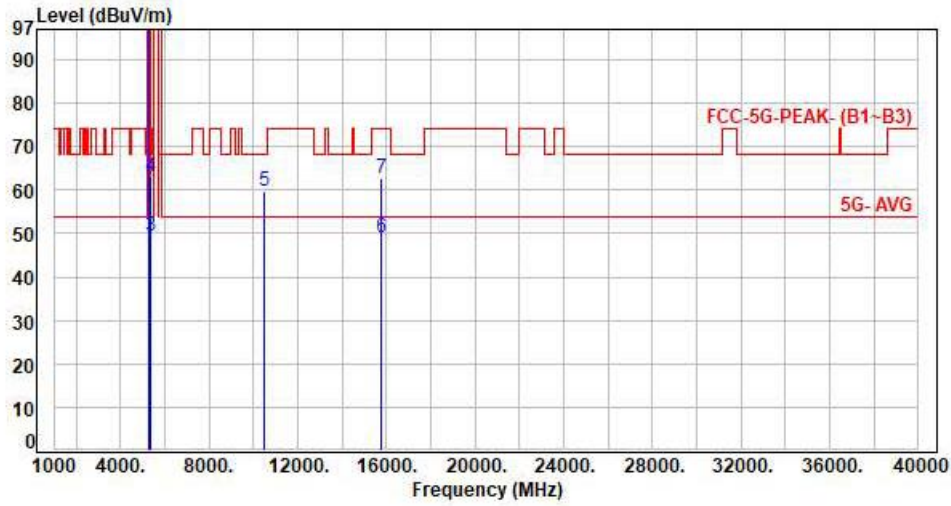


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	96.91	103.90	200.00	-96.10	Average	135	293	P
2	5260.00	6.99	106.93	113.92	200.00	-86.08	Peak	135	293	P
3	5350.00	7.27	42.02	49.29	54.00	-4.71	Average	135	293	P
4	5350.00	7.27	55.95	63.22	74.00	-10.78	Peak	135	293	P
5	10520.00	16.55	43.16	59.71	68.20	-8.49	Peak	100	117	P
6	15780.00	19.61	29.58	49.19	54.00	-4.81	Average	100	332	P
7	15780.00	19.61	42.93	62.54	74.00	-11.46	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

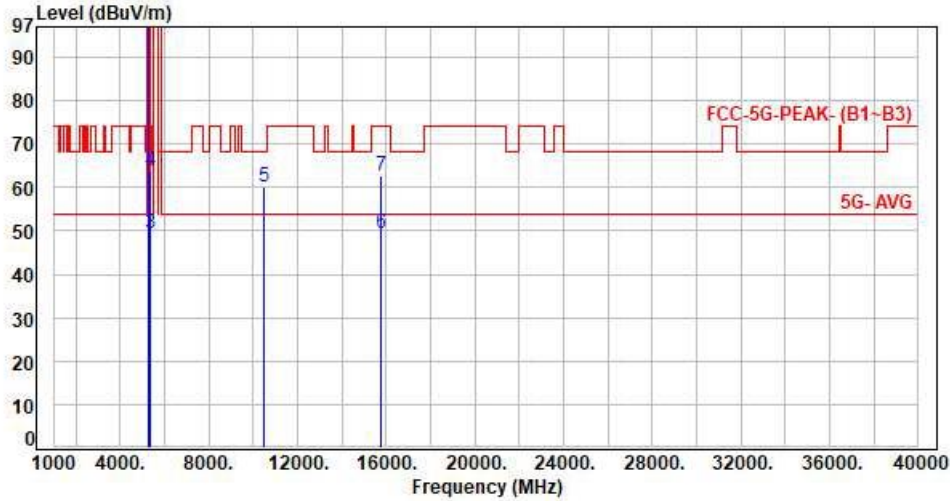


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	93.54	100.53	200.00	-99.47	Average	100	56	P
2	5260.00	6.99	103.42	110.41	200.00	-89.59	Peak	100	56	P
3	5350.00	7.27	41.99	49.26	54.00	-4.74	Average	100	56	P
4	5350.00	7.27	56.45	63.72	74.00	-10.28	Peak	100	56	P
5	10520.00	16.55	43.66	60.21	68.20	-7.99	Peak	100	152	P
6	15780.00	19.61	29.64	49.25	54.00	-4.75	Average	100	191	P
7	15780.00	19.61	43.16	62.77	74.00	-11.23	Peak	100	191	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

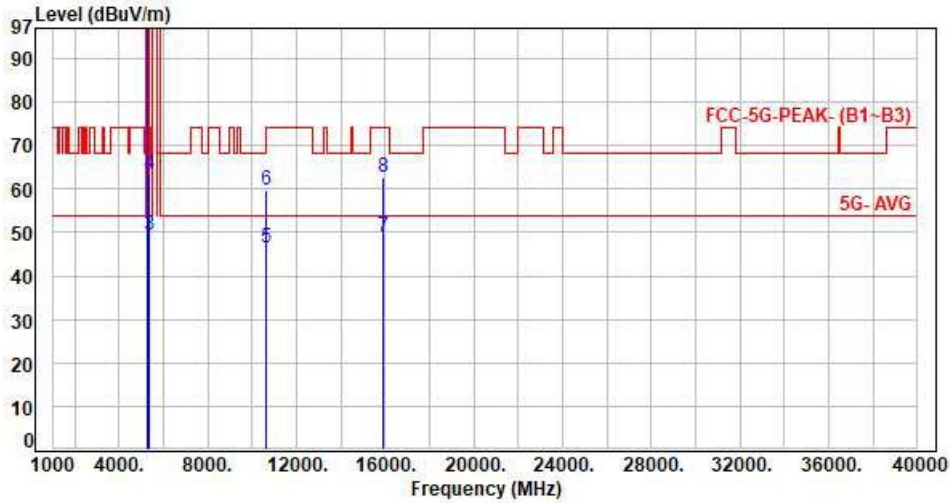


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	97.23	104.43	200.00	-95.57	Average	124	290	P
2	5300.00	7.20	107.72	114.92	200.00	-85.08	Peak	124	290	P
3	5350.00	7.27	42.07	49.34	54.00	-4.66	Average	124	290	P
4	5350.00	7.27	56.34	63.61	74.00	-10.39	Peak	124	290	P
5	10600.00	16.78	29.64	46.42	54.00	-7.58	Average	100	112	P
6	10600.00	16.78	42.85	59.63	74.00	-14.37	Peak	100	112	P
7	15900.00	19.54	29.63	49.17	54.00	-4.83	Average	100	335	P
8	15900.00	19.54	43.21	62.75	74.00	-11.25	Peak	100	335	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

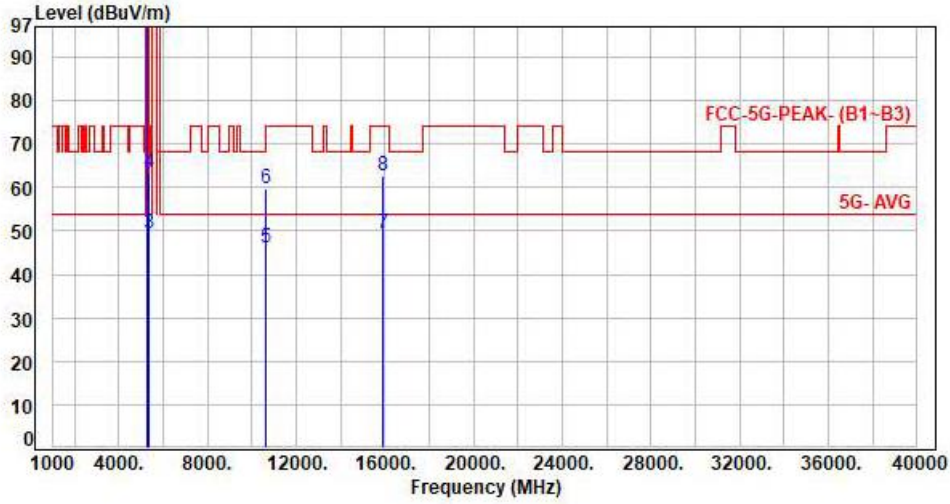


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	93.45	100.65	200.00	-99.35	Average	102	56	P
2	5300.00	7.20	103.51	110.71	200.00	-89.29	Peak	102	56	P
3	5350.00	7.27	42.01	49.28	54.00	-4.72	Average	102	56	P
4	5350.00	7.27	56.10	63.37	74.00	-10.63	Peak	102	56	P
5	10600.00	16.78	29.50	46.28	54.00	-7.72	Average	100	155	P
6	10600.00	16.78	43.10	59.88	74.00	-14.12	Peak	100	155	P
7	15900.00	19.54	29.87	49.41	54.00	-4.59	Average	100	189	P
8	15900.00	19.54	43.26	62.80	74.00	-11.20	Peak	100	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

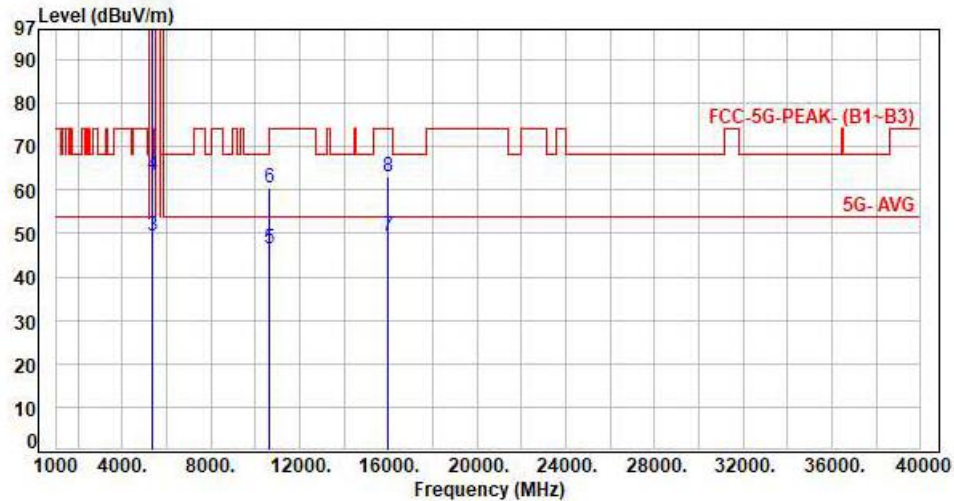


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	96.32	103.55	200.00	-96.45	Average	129	292	P
2	5320.00	7.23	106.52	113.75	200.00	-86.25	Peak	129	292	P
3	5350.00	7.27	42.23	49.50	54.00	-4.50	Average	129	292	P
4	5350.00	7.27	56.10	63.37	74.00	-10.63	Peak	129	292	P
5	10640.00	16.96	29.68	46.64	54.00	-7.36	Average	100	110	P
6	10640.00	16.96	43.36	60.32	74.00	-13.68	Peak	100	110	P
7	15960.00	19.50	29.85	49.35	54.00	-4.65	Average	100	329	P
8	15960.00	19.50	43.51	63.01	74.00	-10.99	Peak	100	329	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

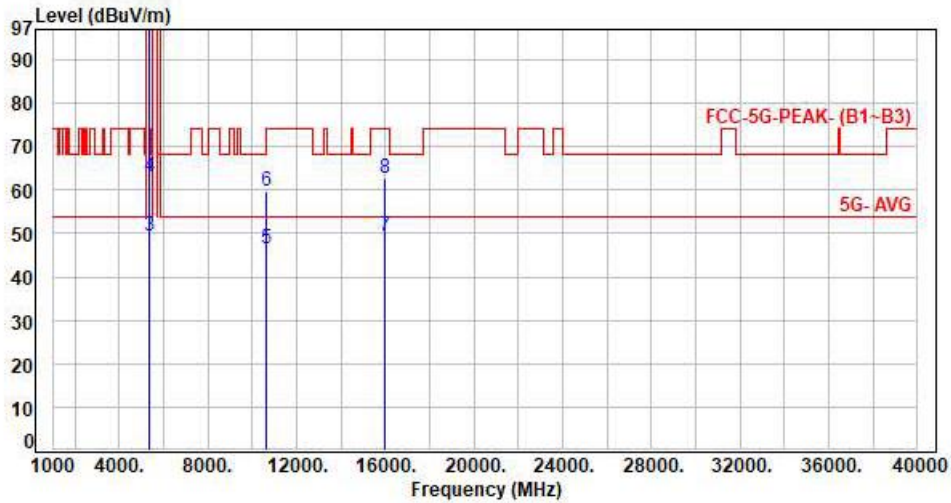


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	92.99	100.22	200.00	-99.78	Average	104	47	P
2	5320.00	7.23	103.16	110.39	200.00	-89.61	Peak	104	47	P
3	5350.00	7.27	42.05	49.32	54.00	-4.68	Average	104	47	P
4	5350.00	7.27	55.79	63.06	74.00	-10.94	Peak	104	47	P
5	10640.00	16.96	29.49	46.45	54.00	-7.55	Average	100	153	P
6	10640.00	16.96	42.89	59.85	74.00	-14.15	Peak	100	153	P
7	15960.00	19.50	29.98	49.48	54.00	-4.52	Average	100	194	P
8	15960.00	19.50	43.10	62.60	74.00	-11.40	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

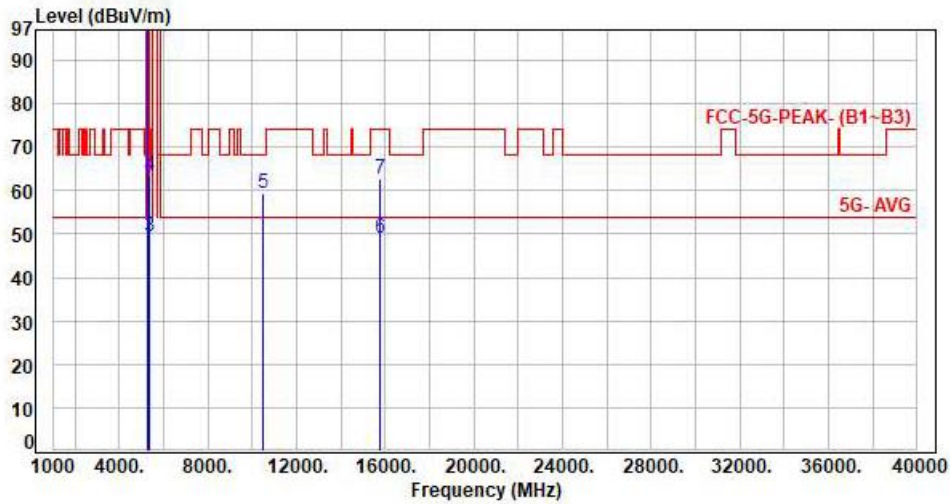


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	97.75	104.74	200.00	-95.26	Average	134	292	P
2	5260.00	6.99	109.85	116.84	200.00	-83.16	Peak	134	292	P
3	5350.00	7.27	42.31	49.58	54.00	-4.42	Average	134	292	P
4	5350.00	7.27	56.06	63.33	74.00	-10.67	Peak	134	292	P
5	10520.00	16.55	42.77	59.32	68.20	-8.88	Peak	100	112	P
6	15780.00	19.61	29.42	49.03	54.00	-4.97	Average	100	332	P
7	15780.00	19.61	43.06	62.67	74.00	-11.33	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

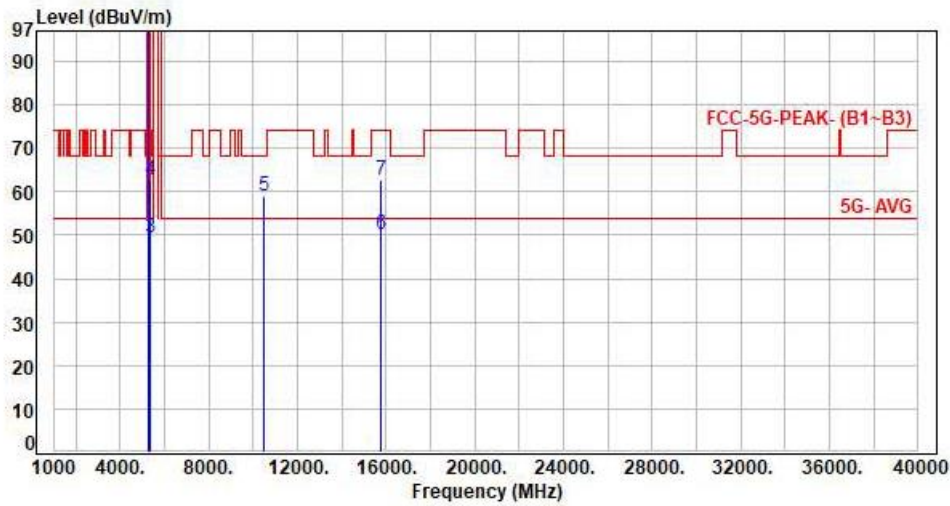


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	92.88	99.87	200.00	-100.13	Average	111	51	P
2	5260.00	6.99	105.48	112.47	200.00	-87.53	Peak	111	51	P
3	5350.00	7.27	42.32	49.59	54.00	-4.41	Average	111	51	P
4	5350.00	7.27	55.53	62.80	74.00	-11.20	Peak	111	51	P
5	10520.00	16.55	42.56	59.11	68.20	-9.09	Peak	100	156	P
6	15780.00	19.61	30.55	50.16	54.00	-3.84	Average	100	184	P
7	15780.00	19.61	42.95	62.56	74.00	-11.44	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

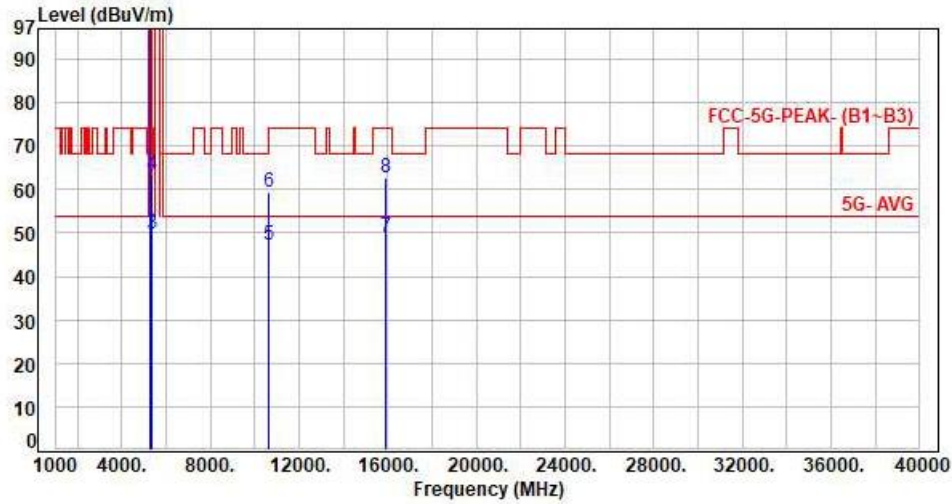


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	98.17	105.37	200.00	-94.63	Average	124	293	P
2	5300.00	7.20	110.44	117.64	200.00	-82.36	Peak	124	293	P
3	5350.00	7.27	42.57	49.84	54.00	-4.16	Average	124	293	P
4	5350.00	7.27	56.31	63.58	74.00	-10.42	Peak	124	293	P
5	10600.00	16.78	30.57	47.35	54.00	-6.65	Average	100	114	P
6	10600.00	16.78	42.48	59.26	74.00	-14.74	Peak	100	114	P
7	15900.00	19.54	29.53	49.07	54.00	-4.93	Average	100	335	P
8	15900.00	19.54	43.16	62.70	74.00	-11.30	Peak	100	335	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

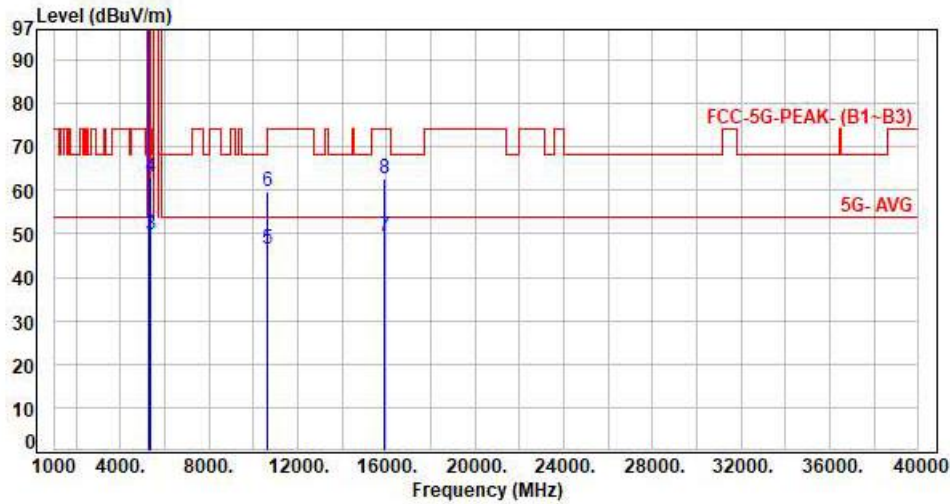


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	93.66	100.86	200.00	-99.14	Average	103	52	P
2	5300.00	7.20	105.71	112.91	200.00	-87.09	Peak	103	52	P
3	5350.00	7.27	42.52	49.79	54.00	-4.21	Average	103	52	P
4	5350.00	7.27	55.62	62.89	74.00	-11.11	Peak	103	52	P
5	10600.00	16.78	29.74	46.52	54.00	-7.48	Average	100	157	P
6	10600.00	16.78	43.01	59.79	74.00	-14.21	Peak	100	157	P
7	15900.00	19.54	29.85	49.39	54.00	-4.61	Average	100	190	P
8	15900.00	19.54	43.21	62.75	74.00	-11.25	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

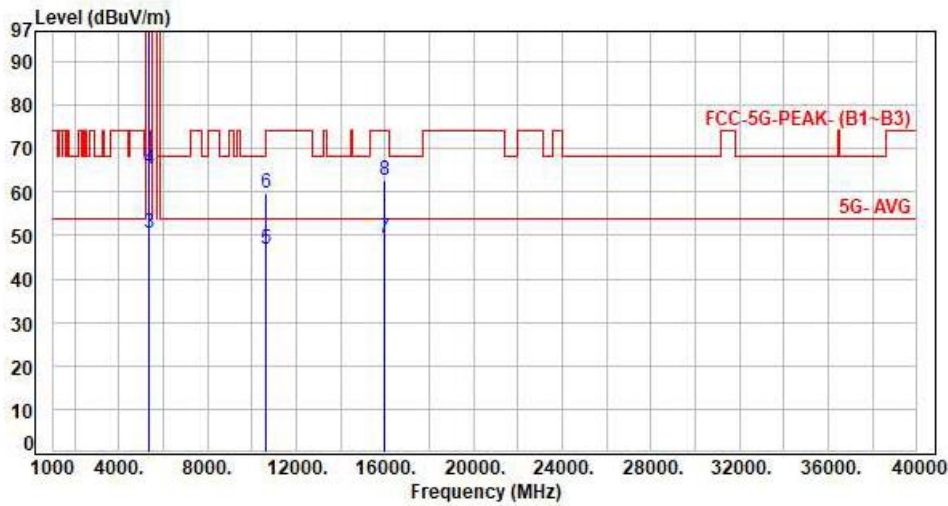


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	98.00	105.23	200.00	-94.77	Average	107	293	P
2	5320.00	7.23	110.26	117.49	200.00	-82.51	Peak	107	293	P
3	5350.00	7.27	43.42	50.69	54.00	-3.31	Average	107	293	P
4	5350.00	7.27	57.93	65.20	74.00	-8.80	Peak	107	293	P
5	10640.00	16.96	29.83	46.79	54.00	-7.21	Average	100	108	P
6	10640.00	16.96	42.97	59.93	74.00	-14.07	Peak	100	108	P
7	15960.00	19.50	29.88	49.38	54.00	-4.62	Average	100	325	P
8	15960.00	19.50	43.10	62.60	74.00	-11.40	Peak	100	325	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

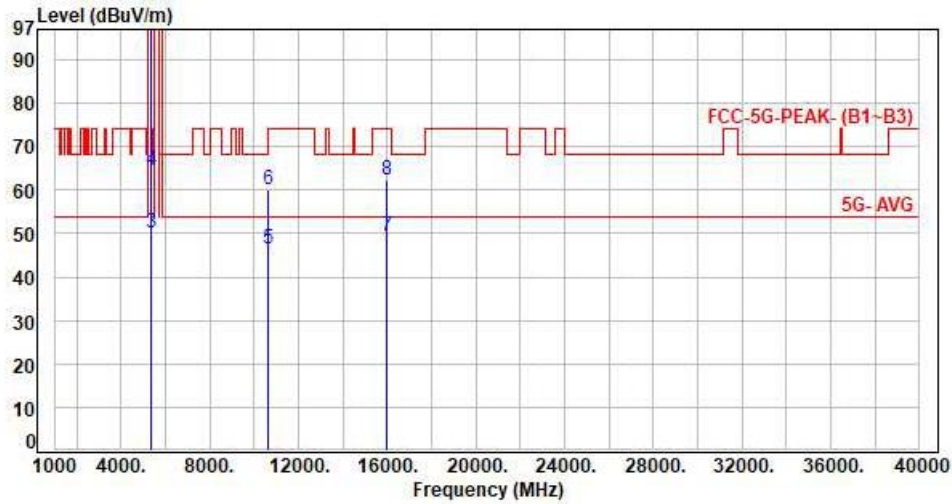


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	94.25	101.48	200.00	-98.52	Average	100	53	P
2	5320.00	7.23	106.51	113.74	200.00	-86.26	Peak	100	53	P
3	5350.00	7.27	42.84	50.11	54.00	-3.89	Average	100	53	P
4	5350.00	7.27	57.21	64.48	74.00	-9.52	Peak	100	53	P
5	10640.00	16.96	29.62	46.58	54.00	-7.42	Average	100	156	P
6	10640.00	16.96	43.09	60.05	74.00	-13.95	Peak	100	156	P
7	15960.00	19.50	29.84	49.34	54.00	-4.66	Average	100	185	P
8	15960.00	19.50	42.88	62.38	74.00	-11.62	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

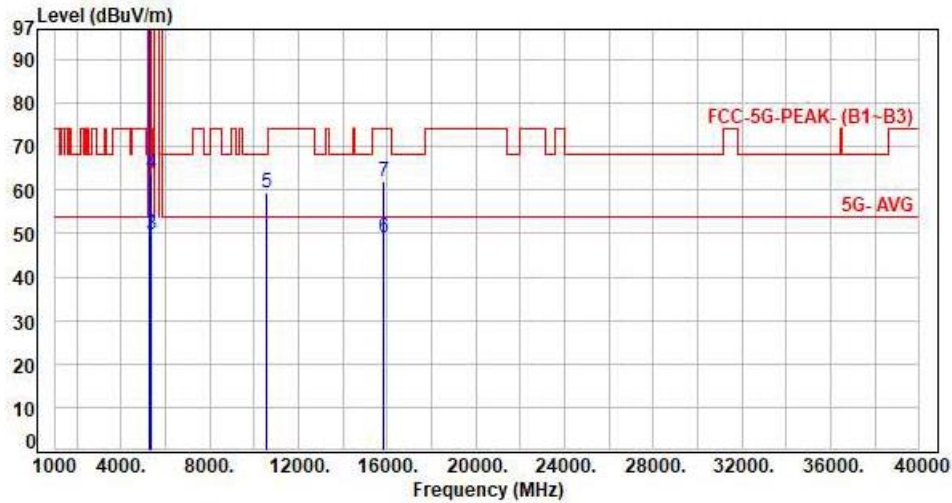


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	94.69	101.73	200.00	-98.27	Average	126	293	P
2	5270.00	7.04	106.75	113.79	200.00	-86.21	Peak	126	293	P
3	5350.00	7.27	42.44	49.71	54.00	-4.29	Average	126	293	P
4	5350.00	7.27	56.70	63.97	74.00	-10.03	Peak	126	293	P
5	10540.00	16.65	42.81	59.46	68.20	-8.74	Peak	100	111	P
6	15810.00	19.51	29.65	49.16	54.00	-4.84	Average	100	325	P
7	15810.00	19.51	42.41	61.92	74.00	-12.08	Peak	100	325	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

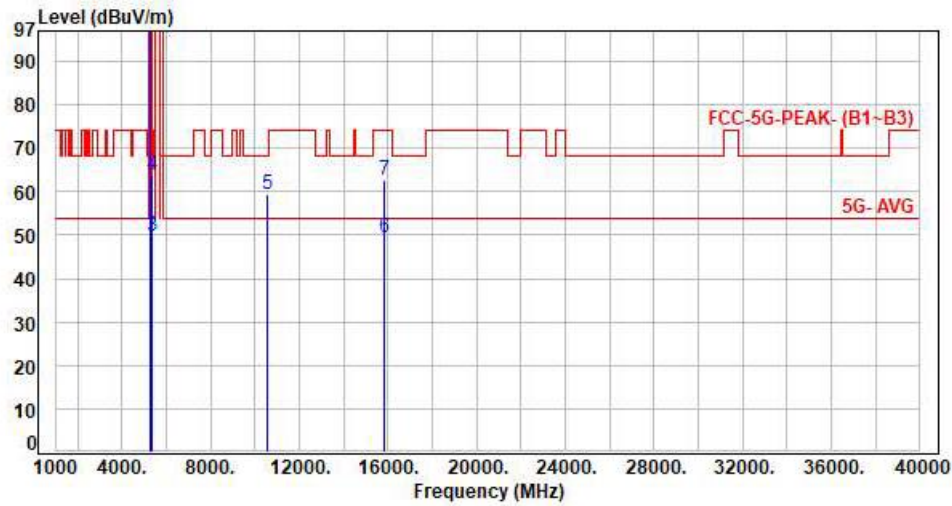


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	90.05	97.09	200.00	-102.91	Average	100	46	P
2	5270.00	7.04	102.62	109.66	200.00	-90.34	Peak	100	46	P
3	5350.00	7.27	42.36	49.63	54.00	-4.37	Average	100	46	P
4	5350.00	7.27	56.64	63.91	74.00	-10.09	Peak	100	46	P
5	10540.00	16.65	42.55	59.20	68.20	-9.00	Peak	100	159	P
6	15810.00	19.51	29.73	49.24	54.00	-4.76	Average	100	190	P
7	15810.00	19.51	43.05	62.56	74.00	-11.44	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

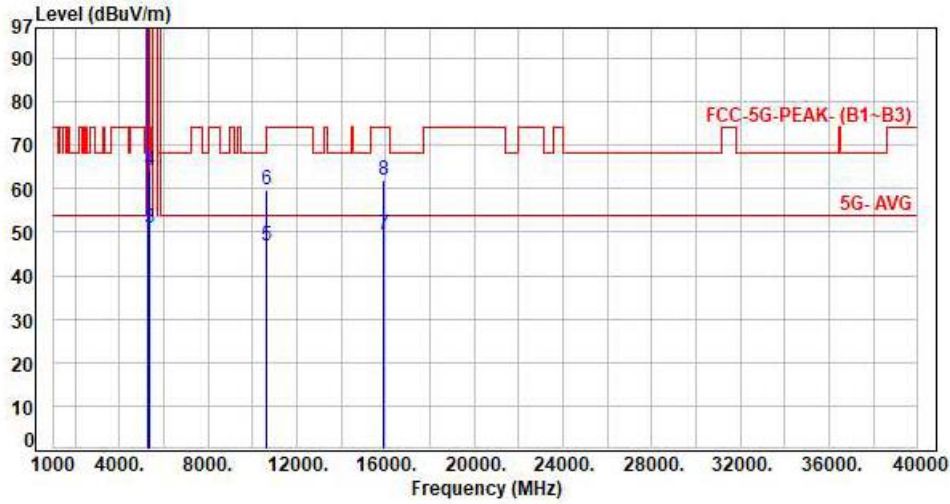


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	95.33	102.55	200.00	-97.45	Average	115	291	P
2	5310.00	7.22	108.00	115.22	200.00	-84.78	Peak	115	291	P
3	5350.00	7.27	43.78	51.05	54.00	-2.95	Average	115	291	P
4	5350.00	7.27	57.05	64.32	74.00	-9.68	Peak	115	291	P
5	10620.00	16.87	29.96	46.83	54.00	-7.17	Average	100	114	P
6	10620.00	16.87	42.76	59.63	74.00	-14.37	Peak	100	114	P
7	15930.00	19.51	29.87	49.38	54.00	-4.62	Average	100	336	P
8	15930.00	19.51	42.60	62.11	74.00	-11.89	Peak	100	336	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH62 NSS1 MCS0
 Voltage : From Adapter(AC120V/60Hz)
 Pol : Horizontal

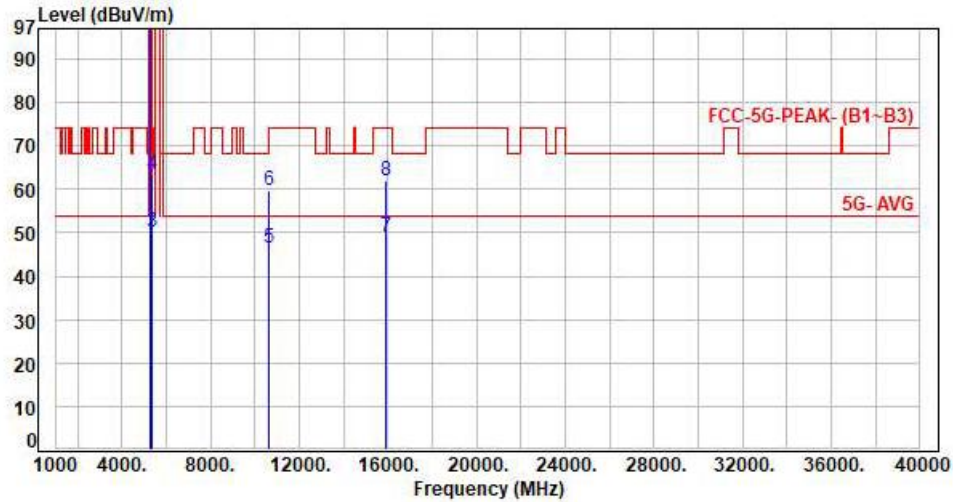


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	90.71	97.93	200.00	-102.07	Average	121	46	P
2	5310.00	7.22	103.39	110.61	200.00	-89.39	Peak	121	46	P
3	5350.00	7.27	42.97	50.24	54.00	-3.76	Average	121	46	P
4	5350.00	7.27	56.01	63.28	74.00	-10.72	Peak	121	46	P
5	10620.00	16.87	29.67	46.54	54.00	-7.46	Average	100	156	P
6	10620.00	16.87	42.87	59.74	74.00	-14.26	Peak	100	156	P
7	15930.00	19.51	29.65	49.16	54.00	-4.84	Average	100	186	P
8	15930.00	19.51	42.57	62.08	74.00	-11.92	Peak	100	186	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

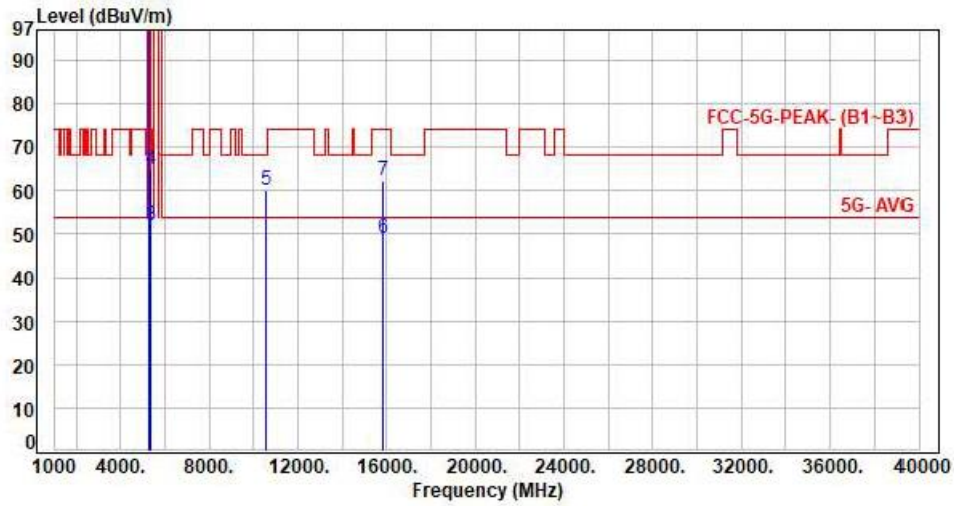


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	92.19	99.34	200.00	-100.66	Average	100	293	P
2	5290.00	7.15	104.46	111.61	200.00	-88.39	Peak	100	293	P
3	5350.00	7.27	44.74	52.01	54.00	-1.99	Average	100	293	P
4	5350.00	7.27	57.54	64.81	74.00	-9.19	Peak	100	293	P
5	10580.00	16.74	43.51	60.25	68.20	-7.95	Peak	100	114	P
6	15870.00	19.54	29.44	48.98	54.00	-5.02	Average	100	333	P
7	15870.00	19.54	42.72	62.26	74.00	-11.74	Peak	100	333	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

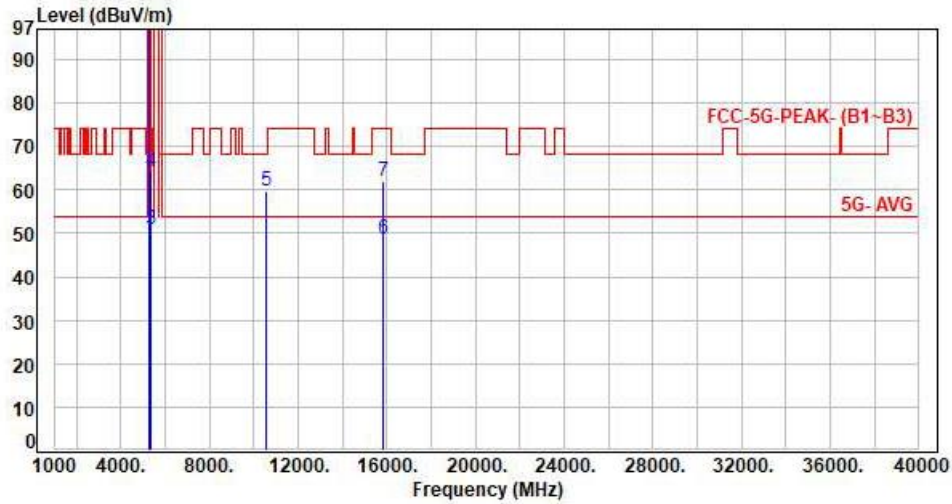

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	88.38	95.53	200.00	-104.47	Average	100	45	P
2	5290.00	7.15	100.49	107.64	200.00	-92.36	Peak	100	45	P
3	5350.00	7.27	43.59	50.86	54.00	-3.14	Average	100	45	P
4	5350.00	7.27	56.89	64.16	74.00	-9.84	Peak	100	45	P
5	10580.00	16.74	43.02	59.76	68.20	-8.44	Peak	100	158	P
6	15870.00	19.54	29.20	48.74	54.00	-5.26	Average	100	189	P
7	15870.00	19.54	42.40	61.94	74.00	-12.06	Peak	100	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



B3

Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical


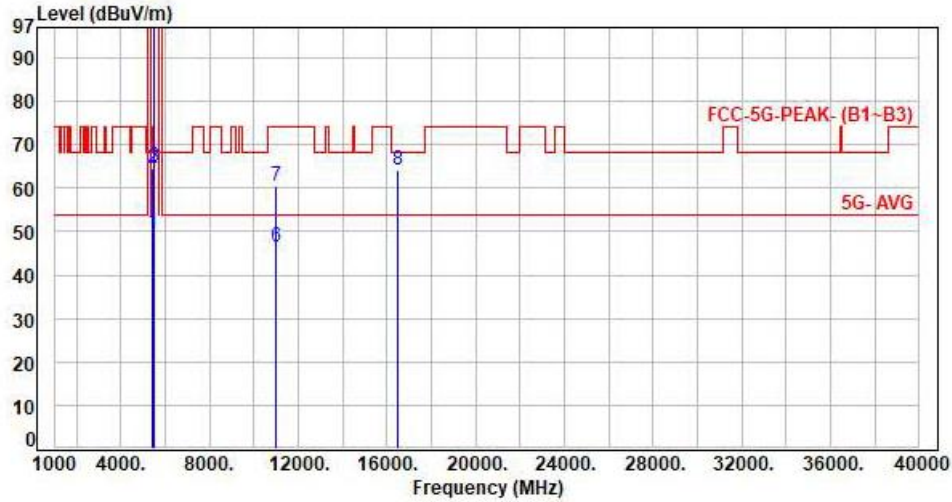


Table with 11 columns: No., Frequency (MHz), Factor (dB), Reading (dBuV), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Detector, Height (cm), Azimuth (deg), P/F. Contains 8 rows of test data.

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

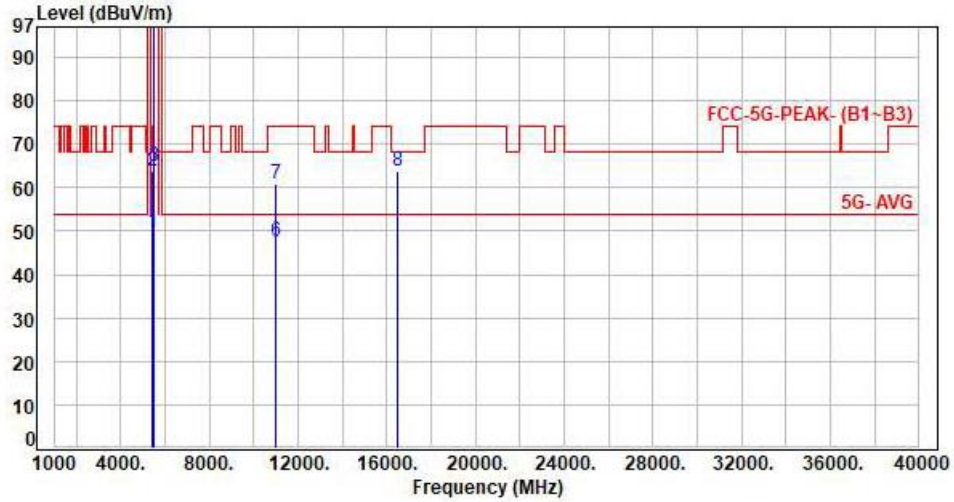


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.16	49.71	54.00	-4.29	Average	105	56	P
2	5460.00	7.55	56.40	63.95	74.00	-10.05	Peak	105	56	P
3	5470.00	7.58	57.27	64.85	68.20	-3.35	Peak	105	56	P
4	5500.00	7.68	94.33	102.01	200.00	-97.99	Average	105	56	P
5	5500.00	7.68	104.03	111.71	200.00	-88.29	Peak	105	56	P
6	11000.00	17.78	29.86	47.64	54.00	-6.36	Average	100	158	P
7	11000.00	17.78	42.96	60.74	74.00	-13.26	Peak	100	158	P
8	16500.00	20.78	43.13	63.91	68.20	-4.29	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

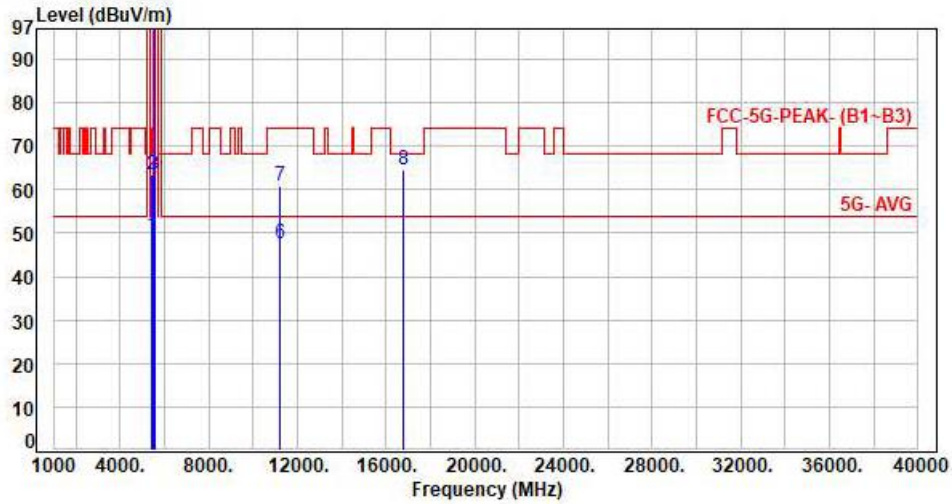


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.03	49.58	54.00	-4.42	Average	340	290	P
2	5460.00	7.55	55.81	63.36	74.00	-10.64	Peak	340	290	P
3	5470.00	7.58	55.99	63.57	68.20	-4.63	Peak	340	290	P
4	5600.00	7.51	95.55	103.06	200.00	-96.94	Average	340	290	P
5	5600.00	7.51	105.68	113.19	200.00	-86.81	Peak	340	290	P
6	11200.00	17.89	29.66	47.55	54.00	-6.45	Average	100	112	P
7	11200.00	17.89	43.14	61.03	74.00	-12.97	Peak	100	112	P
8	16800.00	22.29	42.37	64.66	68.20	-3.54	Peak	100	328	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

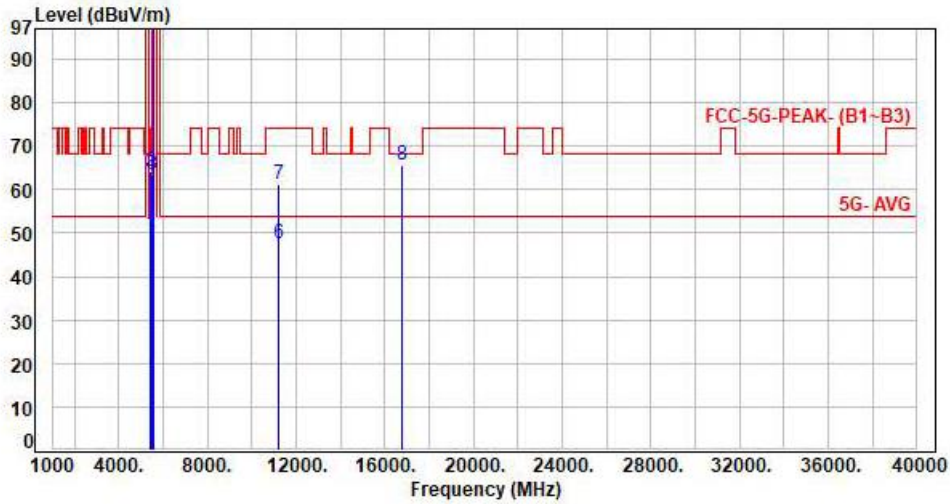

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.06	49.61	54.00	-4.39	Average	109	61	P
2	5460.00	7.55	56.57	64.12	74.00	-9.88	Peak	109	61	P
3	5470.00	7.58	55.83	63.41	68.20	-4.79	Peak	109	61	P
4	5600.00	7.51	94.11	101.62	200.00	-98.38	Average	109	61	P
5	5600.00	7.51	104.03	111.54	200.00	-88.46	Peak	109	61	P
6	11200.00	17.89	29.81	47.70	54.00	-6.30	Average	100	156	P
7	11200.00	17.89	43.45	61.34	74.00	-12.66	Peak	100	156	P
8	16800.00	22.29	43.48	65.77	68.20	-2.43	Peak	100	185	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

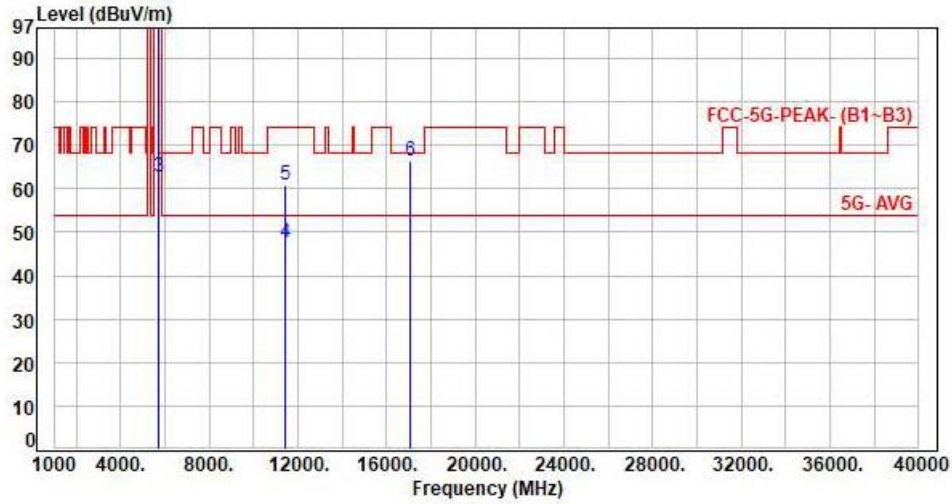


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	95.67	103.10	200.00	-96.90	Average	123	291	P
2	5700.00	7.43	105.79	113.22	200.00	-86.78	Peak	123	291	P
3	5725.00	7.43	55.40	62.83	68.20	-5.37	Peak	123	291	P
4	11400.00	18.08	29.65	47.73	54.00	-6.27	Average	100	110	P
5	11400.00	18.08	42.75	60.83	74.00	-13.17	Peak	100	110	P
6	17100.00	24.04	42.25	66.29	68.20	-1.91	Peak	100	333	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

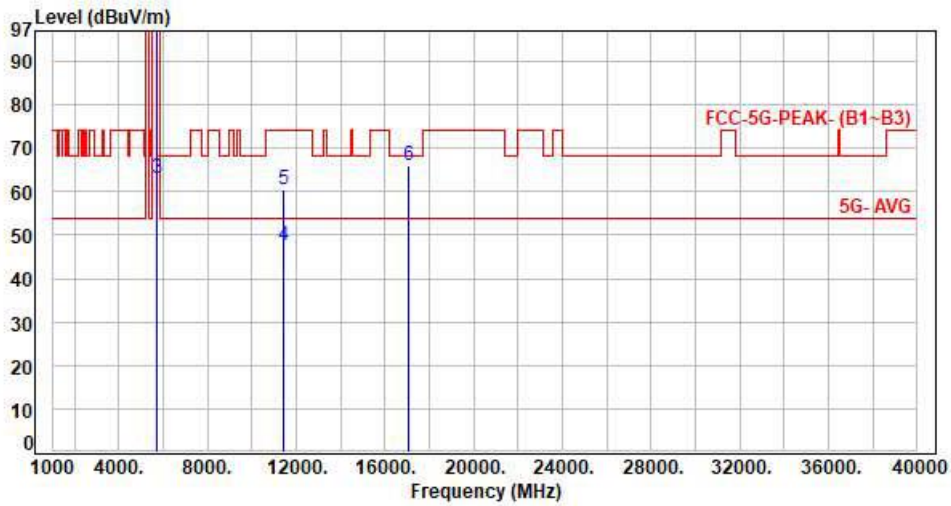


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	94.25	101.68	200.00	-98.32	Average	113	59	P
2	5700.00	7.43	104.18	111.61	200.00	-88.39	Peak	113	59	P
3	5725.00	7.43	55.74	63.17	68.20	-5.03	Peak	113	59	P
4	11400.00	18.08	29.40	47.48	54.00	-6.52	Average	100	158	P
5	11400.00	18.08	42.57	60.65	74.00	-13.35	Peak	100	158	P
6	17100.00	24.04	42.08	66.12	68.20	-2.08	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

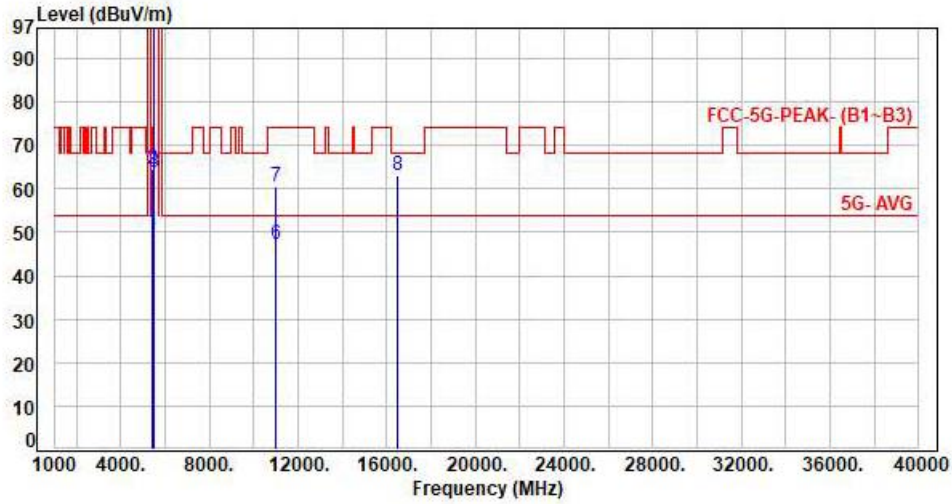


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.72	50.27	54.00	-3.73	Average	100	293	P
2	5460.00	7.55	57.14	64.69	74.00	-9.31	Peak	100	293	P
3	5470.00	7.58	56.37	63.95	68.20	-4.25	Peak	100	293	P
4	5500.00	7.68	93.70	101.38	200.00	-98.62	Average	100	293	P
5	5500.00	7.68	105.78	113.46	200.00	-86.54	Peak	100	293	P
6	11000.00	17.78	29.42	47.20	54.00	-6.80	Average	100	112	P
7	11000.00	17.78	42.85	60.63	74.00	-13.37	Peak	100	112	P
8	16500.00	20.78	42.24	63.02	68.20	-5.18	Peak	100	327	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

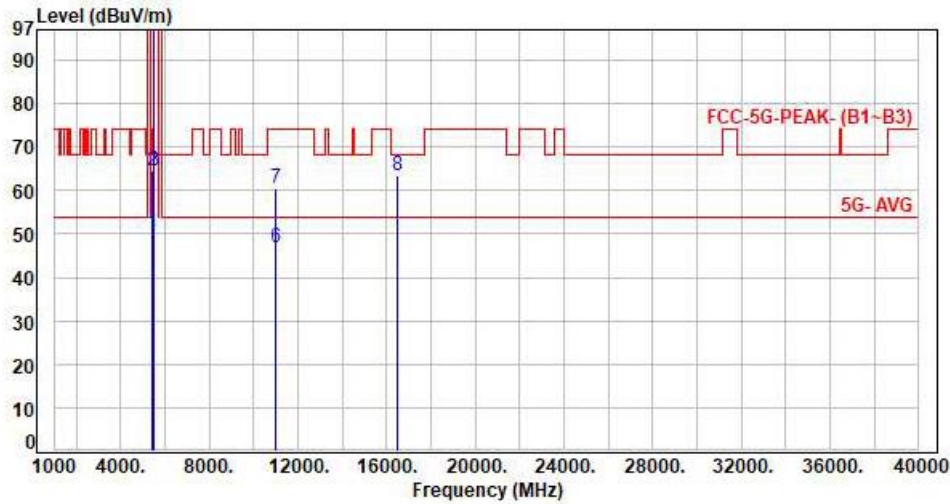


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.58	50.13	54.00	-3.87	Average	107	55	P
2	5460.00	7.55	56.85	64.40	74.00	-9.60	Peak	107	55	P
3	5470.00	7.58	56.79	64.37	68.20	-3.83	Peak	107	55	P
4	5500.00	7.68	94.57	102.25	200.00	-97.75	Average	107	55	P
5	5500.00	7.68	106.84	114.52	200.00	-85.48	Peak	107	55	P
6	11000.00	17.78	29.05	46.83	54.00	-7.17	Average	100	159	P
7	11000.00	17.78	42.75	60.53	74.00	-13.47	Peak	100	159	P
8	16500.00	20.78	42.69	63.47	68.20	-4.73	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

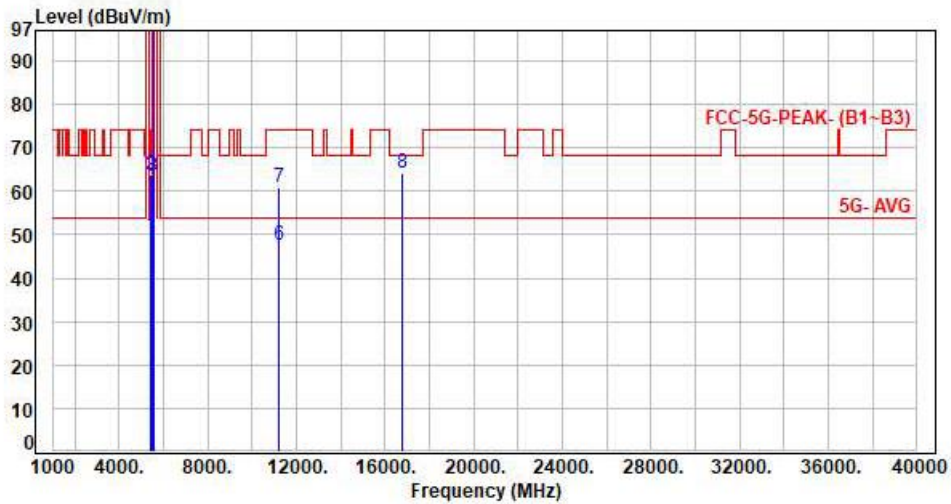


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.37	49.92	54.00	-4.08	Average	356	293	P
2	5460.00	7.55	56.08	63.63	74.00	-10.37	Peak	356	293	P
3	5470.00	7.58	55.82	63.40	68.20	-4.80	Peak	356	293	P
4	5600.00	7.51	94.39	101.90	200.00	-98.10	Average	356	293	P
5	5600.00	7.51	106.60	114.11	200.00	-85.89	Peak	356	293	P
6	11200.00	17.89	29.60	47.49	54.00	-6.51	Average	100	111	P
7	11200.00	17.89	42.85	60.74	74.00	-13.26	Peak	100	111	P
8	16800.00	22.29	41.97	64.26	68.20	-3.94	Peak	100	336	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH120 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

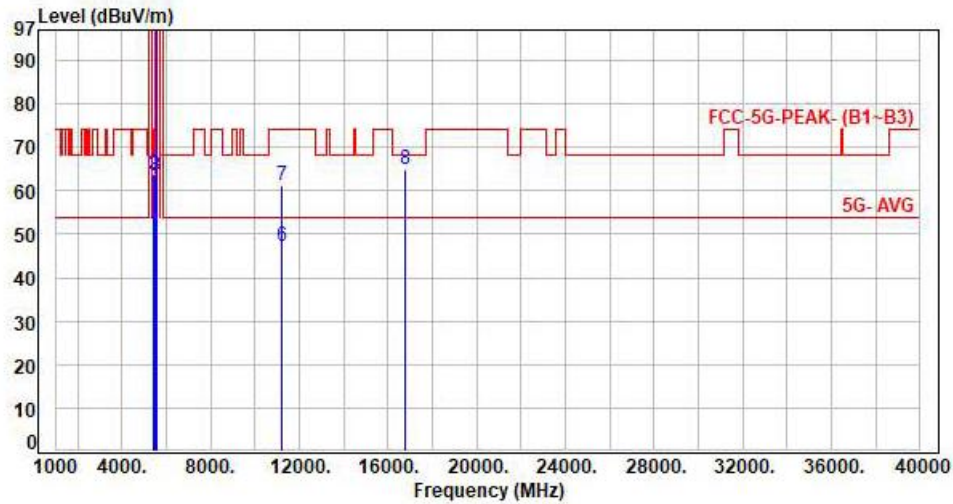


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.44	49.99	54.00	-4.01	Average	109	58	P
2	5460.00	7.55	56.09	63.64	74.00	-10.36	Peak	109	58	P
3	5470.00	7.58	56.01	63.59	68.20	-4.61	Peak	109	58	P
4	5600.00	7.51	93.92	101.43	200.00	-98.57	Average	109	58	P
5	5600.00	7.51	105.91	113.42	200.00	-86.58	Peak	109	58	P
6	11200.00	17.89	29.40	47.29	54.00	-6.71	Average	100	154	P
7	11200.00	17.89	43.21	61.10	74.00	-12.90	Peak	100	154	P
8	16800.00	22.29	42.71	65.00	68.20	-3.20	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

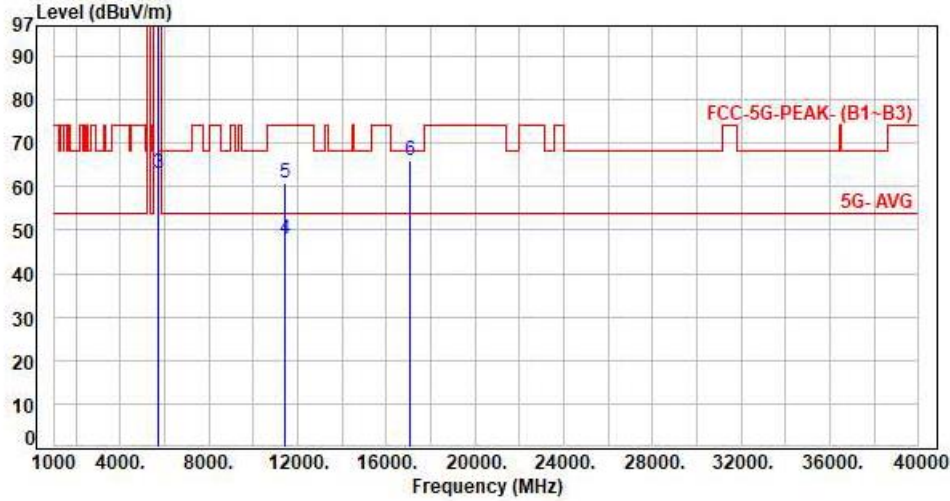


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	94.96	102.39	200.00	-97.61	Average	329	292	P
2	5700.00	7.43	107.44	114.87	200.00	-85.13	Peak	329	292	P
3	5725.00	7.43	55.77	63.20	68.20	-5.00	Peak	329	292	P
4	11400.00	18.08	29.75	47.83	54.00	-6.17	Average	100	114	P
5	11400.00	18.08	42.75	60.83	74.00	-13.17	Peak	100	114	P
6	17100.00	24.04	41.86	65.90	68.20	-2.30	Peak	100	332	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH140 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

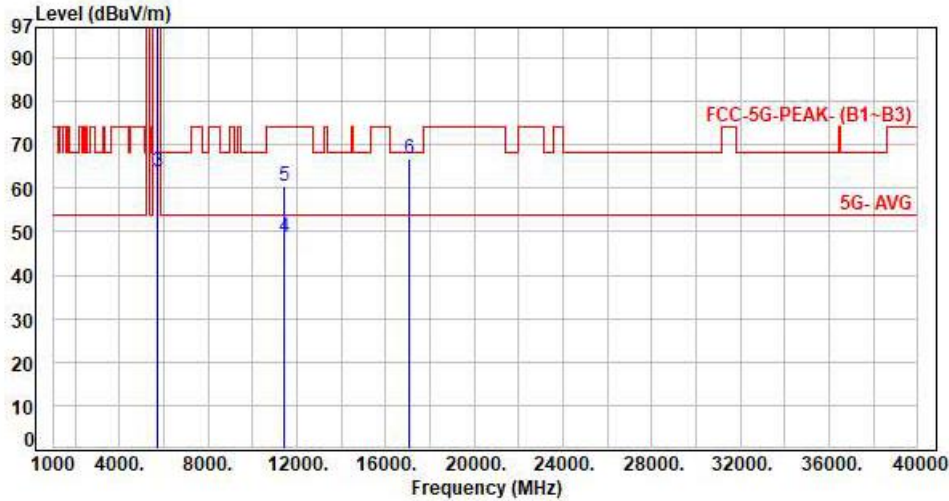


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	94.18	101.61	200.00	-98.39	Average	100	59	P
2	5700.00	7.43	106.91	114.34	200.00	-85.66	Peak	100	59	P
3	5725.00	7.43	56.41	63.84	68.20	-4.36	Peak	100	59	P
4	11400.00	18.08	30.62	48.70	54.00	-5.30	Average	100	152	P
5	11400.00	18.08	42.34	60.42	74.00	-13.58	Peak	100	152	P
6	17100.00	24.04	42.57	66.61	68.20	-1.59	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

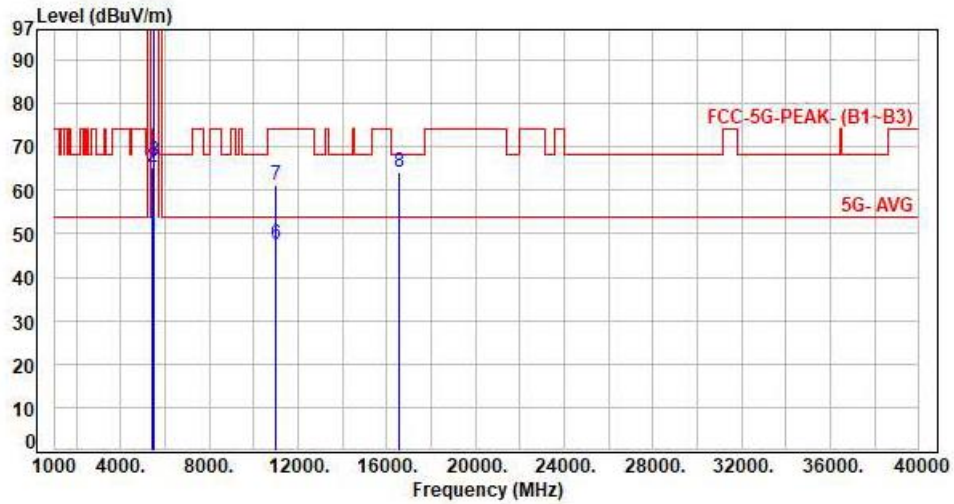


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.64	50.19	54.00	-3.81	Average	101	295	P
2	5460.00	7.55	57.61	65.16	74.00	-8.84	Peak	101	295	P
3	5470.00	7.58	59.16	66.74	68.20	-1.46	Peak	101	295	P
4	5510.00	7.66	90.47	98.13	200.00	-101.87	Average	101	295	P
5	5510.00	7.66	103.19	110.85	200.00	-89.15	Peak	101	295	P
6	11020.00	17.81	29.87	47.68	54.00	-6.32	Average	100	115	P
7	11020.00	17.81	43.43	61.24	74.00	-12.76	Peak	100	115	P
8	16530.00	21.02	43.29	64.31	68.20	-3.89	Peak	100	336	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH102 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

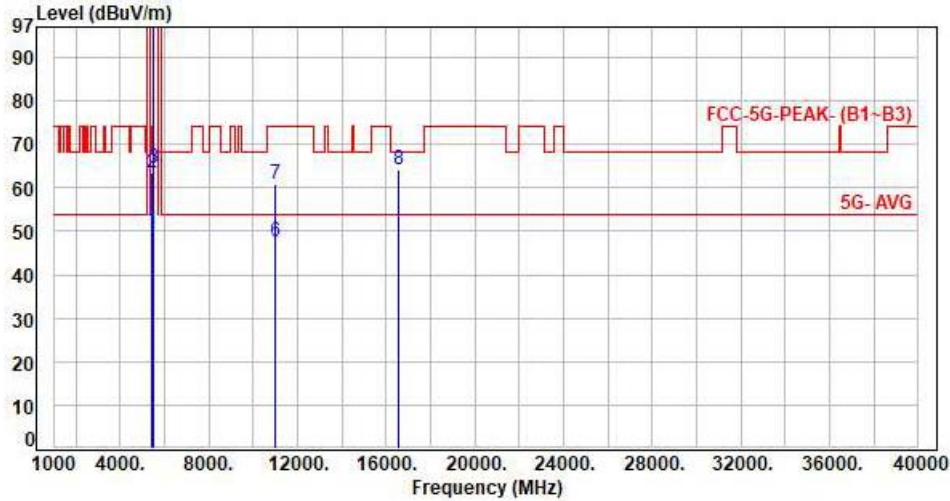


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.58	50.13	54.00	-3.87	Average	100	56	P
2	5460.00	7.55	55.88	63.43	74.00	-10.57	Peak	100	56	P
3	5470.00	7.58	57.05	64.63	68.20	-3.57	Peak	100	56	P
4	5510.00	7.66	91.11	98.77	200.00	-101.23	Average	100	56	P
5	5510.00	7.66	104.55	112.21	200.00	-87.79	Peak	100	56	P
6	11020.00	17.81	29.59	47.40	54.00	-6.60	Average	100	157	P
7	11020.00	17.81	43.09	60.90	74.00	-13.10	Peak	100	157	P
8	16530.00	21.02	43.15	64.17	68.20	-4.03	Peak	100	188	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

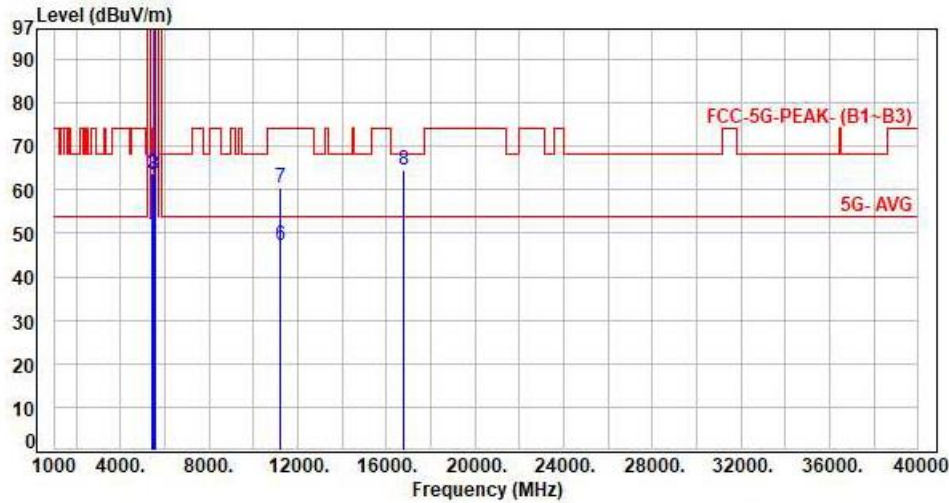


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.35	49.90	54.00	-4.10	Average	400	293	P
2	5460.00	7.55	56.21	63.76	74.00	-10.24	Peak	400	293	P
3	5470.00	7.58	55.88	63.46	68.20	-4.74	Peak	400	293	P
4	5590.00	7.53	91.85	99.38	200.00	-100.62	Average	400	293	P
5	5590.00	7.53	104.58	112.11	200.00	-87.89	Peak	400	293	P
6	11180.00	17.87	29.47	47.34	54.00	-6.66	Average	100	115	P
7	11180.00	17.87	42.64	60.51	74.00	-13.49	Peak	100	115	P
8	16770.00	22.21	42.48	64.69	68.20	-3.51	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH118 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

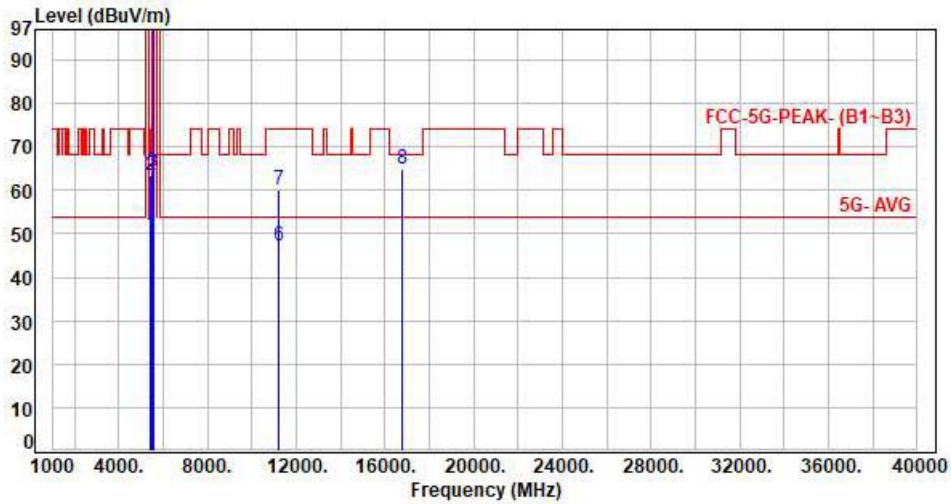

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.42	49.97	54.00	-4.03	Average	106	57	P
2	5460.00	7.55	55.98	63.53	74.00	-10.47	Peak	106	57	P
3	5470.00	7.58	56.43	64.01	68.20	-4.19	Peak	106	57	P
4	5590.00	7.53	91.78	99.31	200.00	-100.69	Average	106	57	P
5	5590.00	7.53	104.01	111.54	200.00	-88.46	Peak	106	57	P
6	11180.00	17.87	29.28	47.15	54.00	-6.85	Average	100	155	P
7	11180.00	17.87	42.43	60.30	74.00	-13.70	Peak	100	155	P
8	16770.00	22.21	42.58	64.79	68.20	-3.41	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor