




Test Mode : 2TX 11be EHT40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

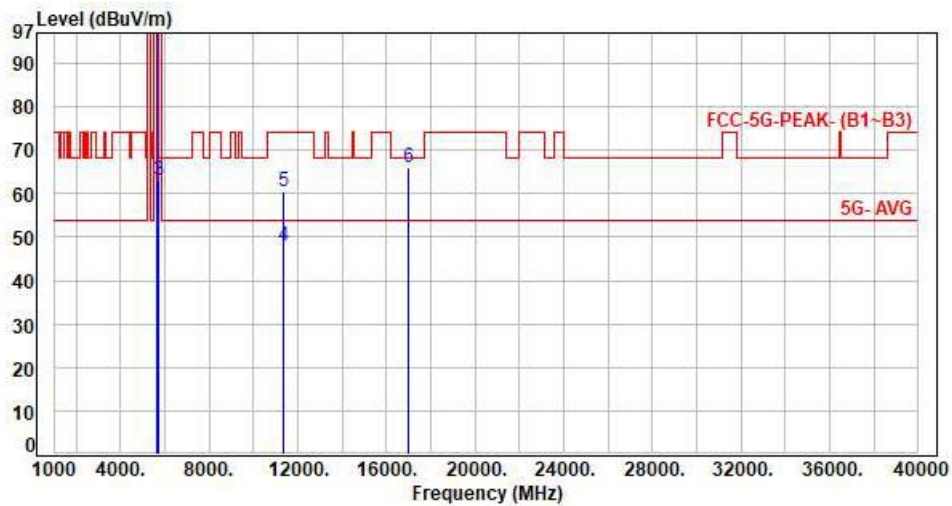

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	93.18	100.66	200.00	-99.34	Average	100	226	P
2	5670.00	7.48	106.01	113.49	200.00	-86.51	Peak	100	226	P
3	5725.00	7.43	55.72	63.15	68.20	-5.05	Peak	100	226	P
4	11340.00	17.96	29.80	47.76	54.00	-6.24	Average	100	107	P
5	11340.00	17.96	42.46	60.42	74.00	-13.58	Peak	100	107	P
6	17010.00	23.47	42.51	65.98	68.20	-2.22	Peak	100	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH134 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

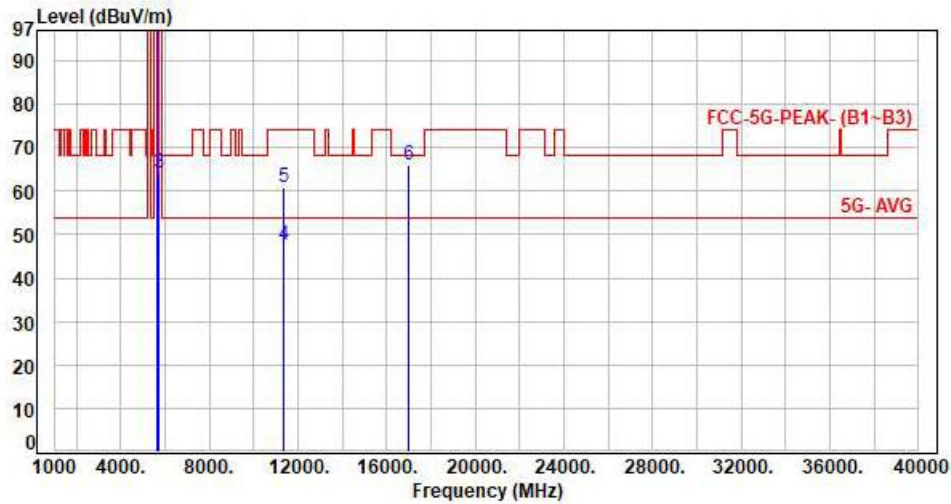

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	91.39	98.87	200.00	-101.13	Average	100	57	P
2	5670.00	7.48	103.69	111.17	200.00	-88.83	Peak	100	57	P
3	5725.00	7.43	56.82	64.25	68.20	-3.95	Peak	100	57	P
4	11340.00	17.96	29.50	47.46	54.00	-6.54	Average	100	158	P
5	11340.00	17.96	42.72	60.68	74.00	-13.32	Peak	100	158	P
6	17010.00	23.47	42.48	65.95	68.20	-2.25	Peak	100	186	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

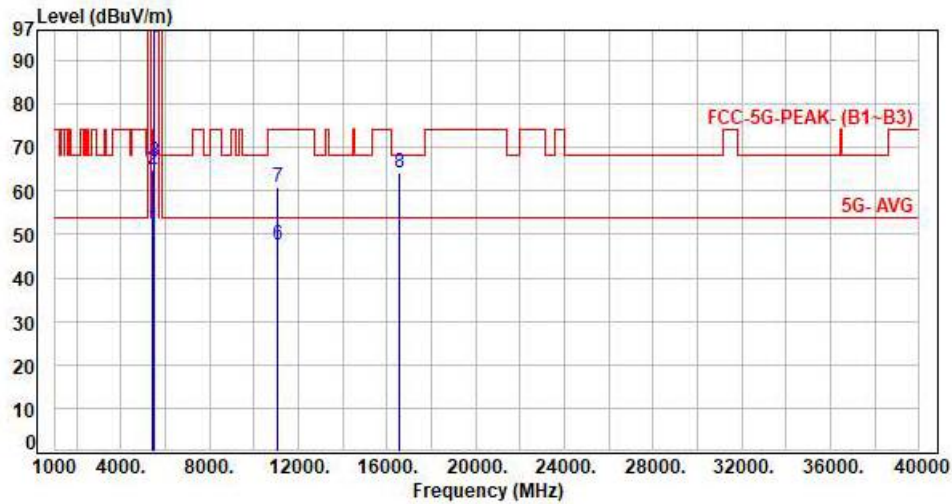

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.02	51.57	54.00	-2.43	Average	100	284	P
2	5460.00	7.55	57.42	64.97	74.00	-9.03	Peak	100	284	P
3	5470.00	7.58	59.26	66.84	68.20	-1.36	Peak	100	284	P
4	5530.00	7.63	87.57	95.20	200.00	-104.80	Average	100	284	P
5	5530.00	7.63	99.81	107.44	200.00	-92.56	Peak	100	284	P
6	11060.00	17.87	29.63	47.50	54.00	-6.50	Average	100	115	P
7	11060.00	17.87	42.98	60.85	74.00	-13.15	Peak	100	115	P
8	16590.00	21.59	42.56	64.15	68.20	-4.05	Peak	100	327	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

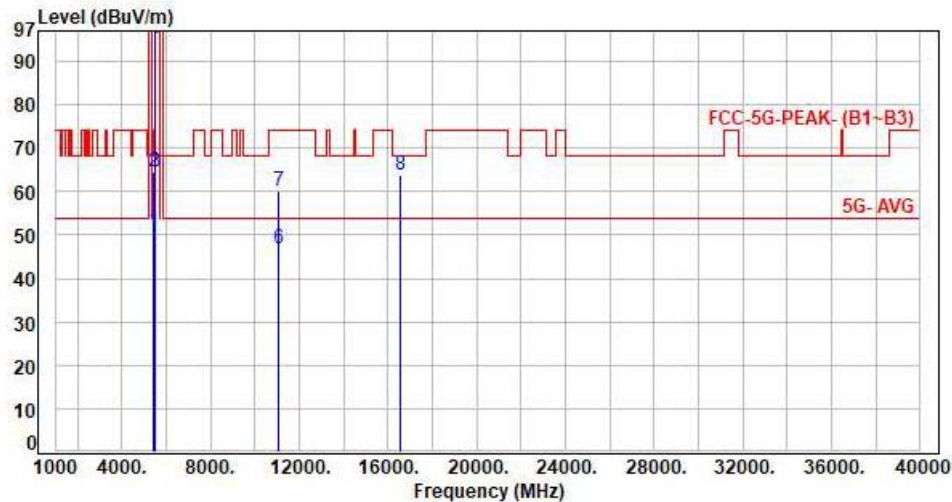

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.41	50.96	54.00	-3.04	Average	109	58	P
2	5460.00	7.55	57.09	64.64	74.00	-9.36	Peak	109	58	P
3	5470.00	7.58	57.11	64.69	68.20	-3.51	Peak	109	58	P
4	5530.00	7.63	87.63	95.26	200.00	-104.74	Average	109	58	P
5	5530.00	7.63	100.73	108.36	200.00	-91.64	Peak	109	58	P
6	11060.00	17.87	29.13	47.00	54.00	-7.00	Average	100	155	P
7	11060.00	17.87	42.39	60.26	74.00	-13.74	Peak	100	155	P
8	16590.00	21.59	42.10	63.69	68.20	-4.51	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

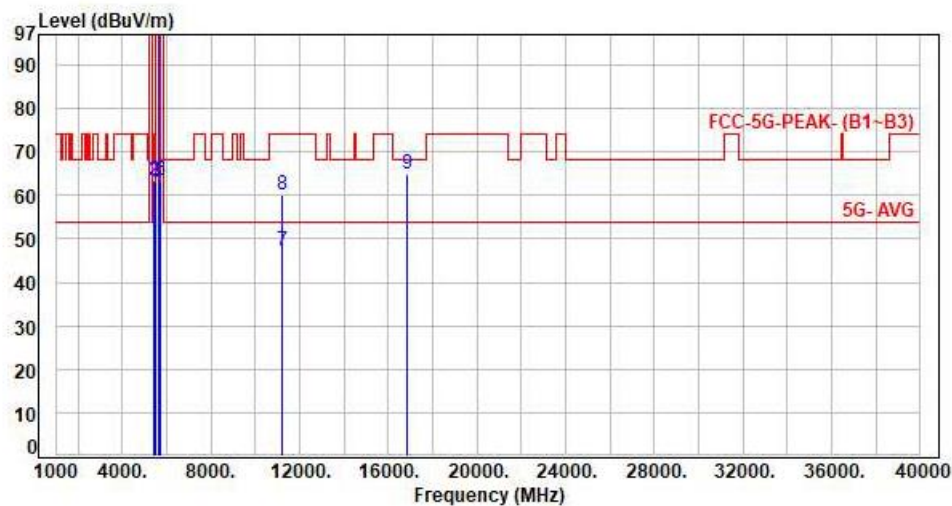

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.48	50.03	54.00	-3.97	Average	100	226	P
2	5460.00	7.55	55.95	63.50	74.00	-10.50	Peak	100	226	P
3	5470.00	7.58	55.49	63.07	68.20	-5.13	Peak	100	226	P
4	5610.00	7.51	89.52	97.03	200.00	-102.97	Average	100	226	P
5	5610.00	7.51	102.50	110.01	200.00	-89.99	Peak	100	226	P
6	5725.00	7.43	56.11	63.54	68.20	-4.66	Peak	100	226	P
7	11220.00	17.88	29.35	47.23	54.00	-6.77	Average	100	104	P
8	11220.00	17.88	42.38	60.26	74.00	-13.74	Peak	100	104	P
9	16830.00	22.58	42.44	65.02	68.20	-3.18	Peak	100	329	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

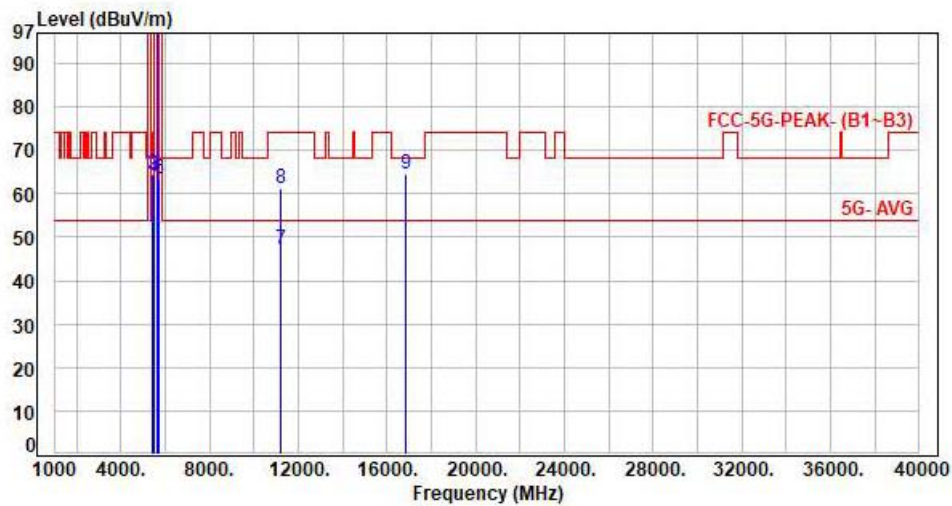

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.50	50.05	54.00	-3.95	Average	120	57	P
2	5460.00	7.55	56.97	64.52	74.00	-9.48	Peak	120	57	P
3	5470.00	7.58	56.61	64.19	68.20	-4.01	Peak	120	57	P
4	5610.00	7.51	88.88	96.39	200.00	-103.61	Average	120	57	P
5	5610.00	7.51	101.66	109.17	200.00	-90.83	Peak	120	57	P
6	5725.00	7.43	56.16	63.59	68.20	-4.61	Peak	120	57	P
7	11220.00	17.88	29.17	47.05	54.00	-6.95	Average	100	152	P
8	11220.00	17.88	43.20	61.08	74.00	-12.92	Peak	100	152	P
9	16830.00	22.58	42.06	64.64	68.20	-3.56	Peak	100	186	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

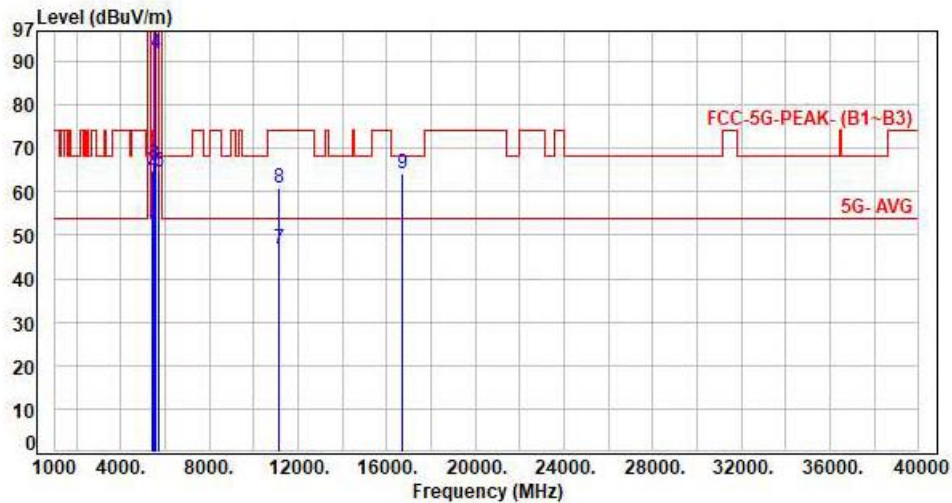

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.50	51.05	54.00	-2.95	Average	342	291	P
2	5460.00	7.55	57.22	64.77	74.00	-9.23	Peak	342	291	P
3	5470.00	7.58	58.71	66.29	68.20	-1.91	Peak	342	291	P
4	5570.00	7.56	84.29	91.85	200.00	-108.15	Average	342	291	P
5	5570.00	7.56	97.31	104.87	200.00	-95.13	Peak	342	291	P
6	5725.00	7.43	57.20	64.63	68.20	-3.57	Peak	342	291	P
7	11140.00	17.88	28.92	46.80	54.00	-7.20	Average	100	116	P
8	11140.00	17.88	42.83	60.71	74.00	-13.29	Peak	100	116	P
9	16710.00	22.17	42.16	64.33	68.20	-3.87	Peak	100	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

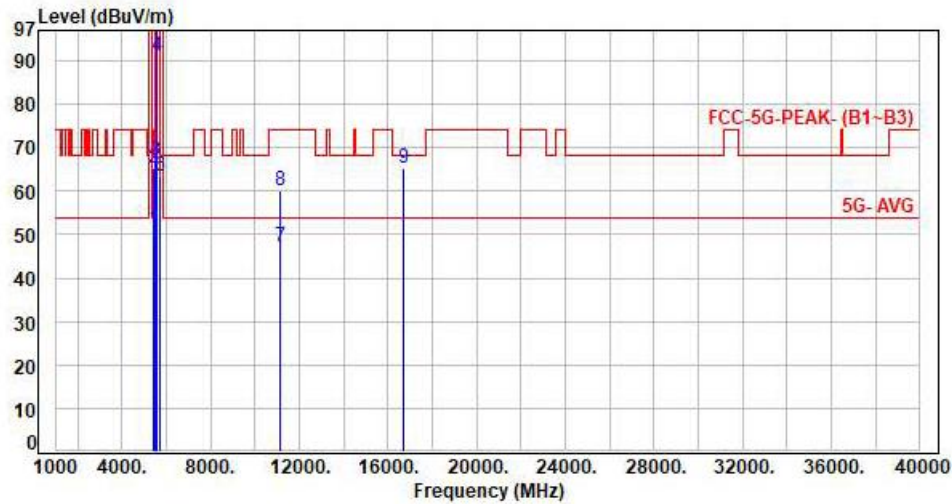

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.55	51.10	54.00	-2.90	Average	100	56	P
2	5460.00	7.55	57.68	65.23	74.00	-8.77	Peak	100	56	P
3	5470.00	7.58	59.50	67.08	68.20	-1.12	Peak	100	56	P
4	5570.00	7.56	83.46	91.02	200.00	-108.98	Average	100	56	P
5	5570.00	7.56	95.22	102.78	200.00	-97.22	Peak	100	56	P
6	5725.00	7.43	55.89	63.32	68.20	-4.88	Peak	100	56	P
7	11140.00	17.88	29.51	47.39	54.00	-6.61	Average	100	153	P
8	11140.00	17.88	42.28	60.16	74.00	-13.84	Peak	100	153	P
9	16710.00	22.17	42.98	65.15	68.20	-3.05	Peak	100	187	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



B4

Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

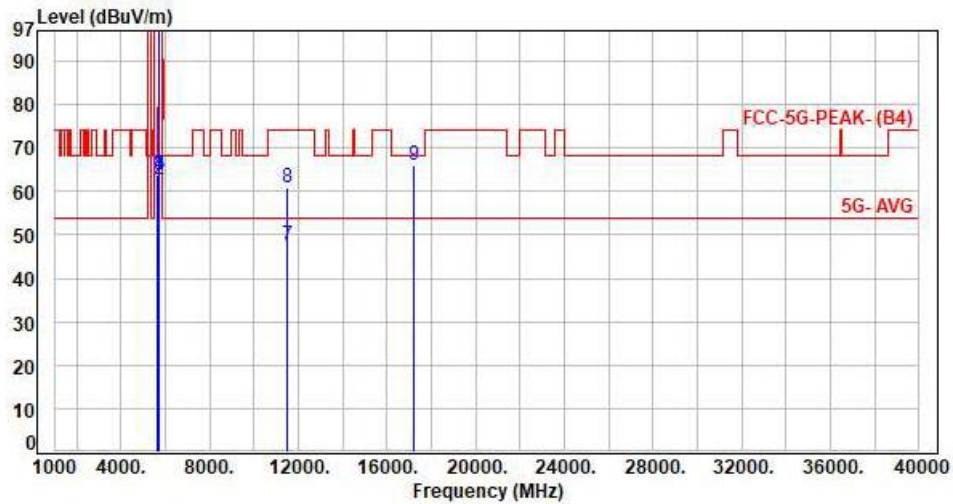

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.31	63.82	68.20	-4.38	Peak	100	289	P
2	5700.00	7.43	55.19	62.62	105.20	-42.58	Peak	100	289	P
3	5720.00	7.43	56.25	63.68	110.80	-47.12	Peak	100	289	P
4	5725.00	7.43	56.41	63.84	122.20	-58.36	Peak	100	289	P
5	5745.00	7.44	96.38	103.82	200.00	-96.18	Average	100	289	P
6	5745.00	7.44	106.61	114.05	200.00	-85.95	Peak	100	289	P
7	11490.00	18.33	29.17	47.50	54.00	-6.50	Average	100	114	P
8	11490.00	18.33	42.68	61.01	74.00	-12.99	Peak	100	114	P
9	17235.00	24.37	41.60	65.97	68.20	-2.23	Peak	100	334	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

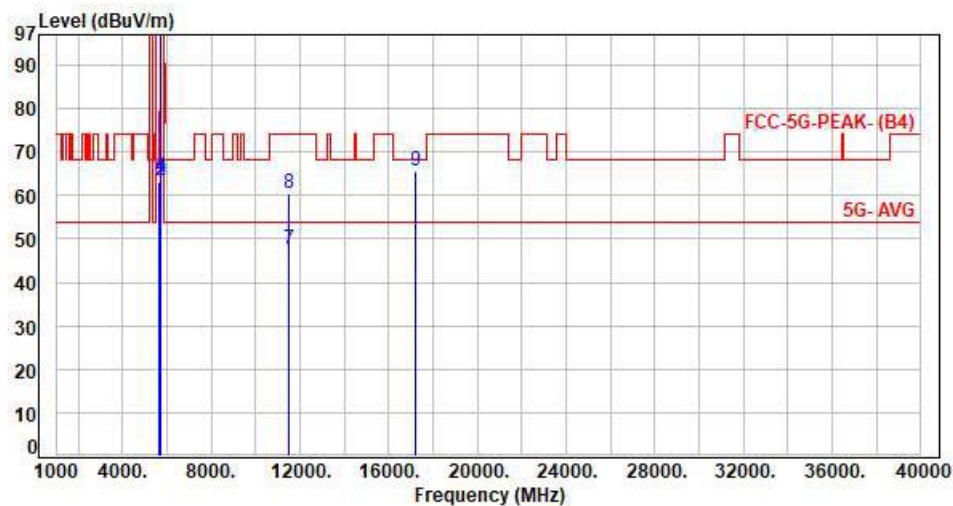

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.62	63.13	68.20	-5.07	Peak	115	59	P
2	5700.00	7.43	55.94	63.37	105.20	-41.83	Peak	115	59	P
3	5720.00	7.43	56.14	63.57	110.80	-47.23	Peak	115	59	P
4	5725.00	7.43	56.65	64.08	122.20	-58.12	Peak	115	59	P
5	5745.00	7.44	95.20	102.64	200.00	-97.36	Average	115	59	P
6	5745.00	7.44	105.11	112.55	200.00	-87.45	Peak	115	59	P
7	11490.00	18.33	29.30	47.63	54.00	-6.37	Average	100	158	P
8	11490.00	18.33	42.17	60.50	74.00	-13.50	Peak	100	158	P
9	17235.00	24.37	41.22	65.59	68.20	-2.61	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

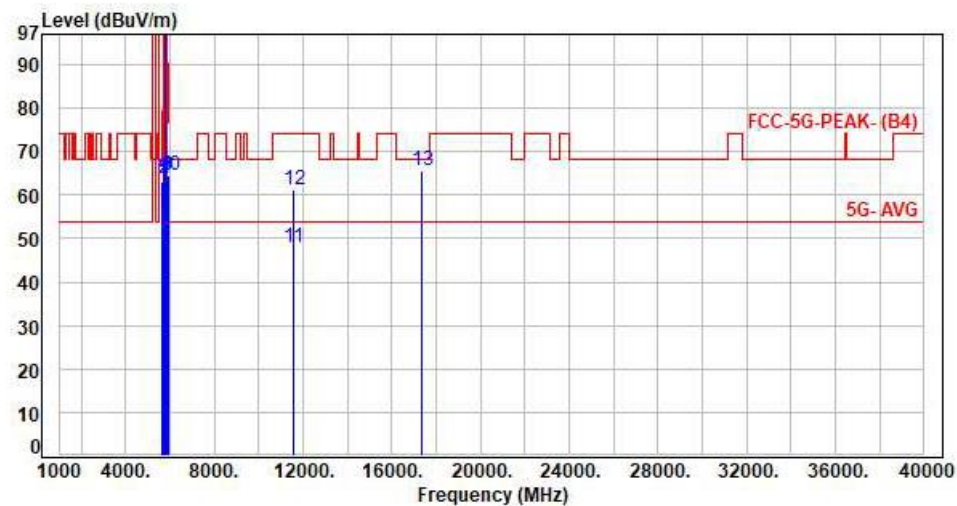


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.63	63.14	68.20	-5.06	Peak	100	295	P
2	5700.00	7.43	56.34	63.77	105.20	-41.43	Peak	100	295	P
3	5720.00	7.43	56.48	63.91	110.80	-46.89	Peak	100	295	P
4	5725.00	7.43	57.04	64.47	122.20	-57.73	Peak	100	295	P
5	5785.00	7.45	96.89	104.34	200.00	-95.66	Average	100	295	P
6	5785.00	7.45	106.84	114.29	200.00	-85.71	Peak	100	295	P
7	5850.00	7.47	56.59	64.06	122.20	-58.14	Peak	100	295	P
8	5855.00	7.49	57.08	64.57	110.80	-46.23	Peak	100	295	P
9	5875.00	7.57	56.98	64.55	105.20	-40.65	Peak	100	295	P
10	5925.00	7.73	56.94	64.67	68.20	-3.53	Peak	100	295	P
11	11570.00	18.58	29.36	47.94	54.00	-6.06	Average	100	110	P
12	11570.00	18.58	42.69	61.27	74.00	-12.73	Peak	100	110	P
13	17355.00	25.24	40.26	65.50	68.20	-2.70	Peak	100	328	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

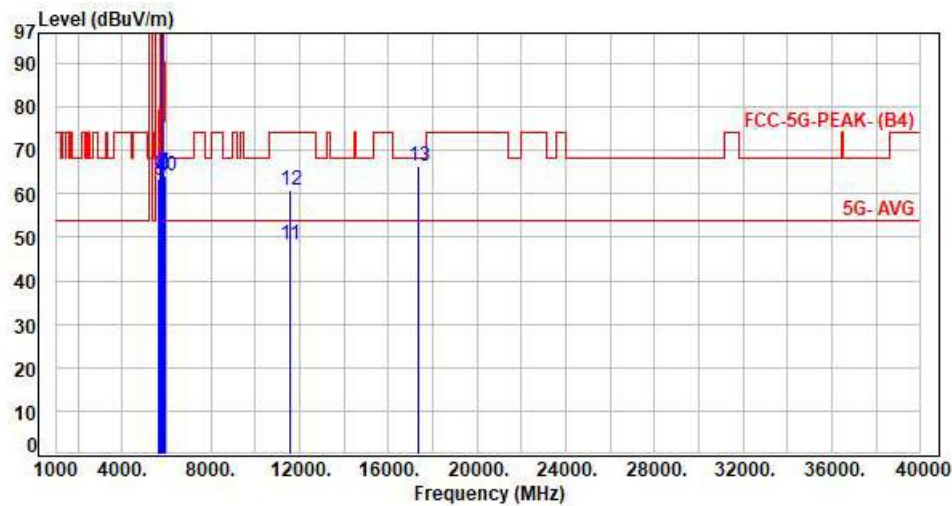

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.86	63.37	68.20	-4.83	Peak	125	60	P
2	5700.00	7.43	57.29	64.72	105.20	-40.48	Peak	125	60	P
3	5720.00	7.43	55.81	63.24	110.80	-47.56	Peak	125	60	P
4	5725.00	7.43	56.58	64.01	122.20	-58.19	Peak	125	60	P
5	5785.00	7.45	94.83	102.28	200.00	-97.72	Average	125	60	P
6	5785.00	7.45	104.81	112.26	200.00	-87.74	Peak	125	60	P
7	5850.00	7.47	57.52	64.99	122.20	-57.21	Peak	125	60	P
8	5855.00	7.49	56.56	64.05	110.80	-46.75	Peak	125	60	P
9	5875.00	7.57	56.91	64.48	105.20	-40.72	Peak	125	60	P
10	5925.00	7.73	56.35	64.08	68.20	-4.12	Peak	125	60	P
11	11570.00	18.58	29.65	48.23	54.00	-5.77	Average	100	152	P
12	11570.00	18.58	42.44	61.02	74.00	-12.98	Peak	100	152	P
13	17355.00	25.24	40.97	66.21	68.20	-1.99	Peak	100	186	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

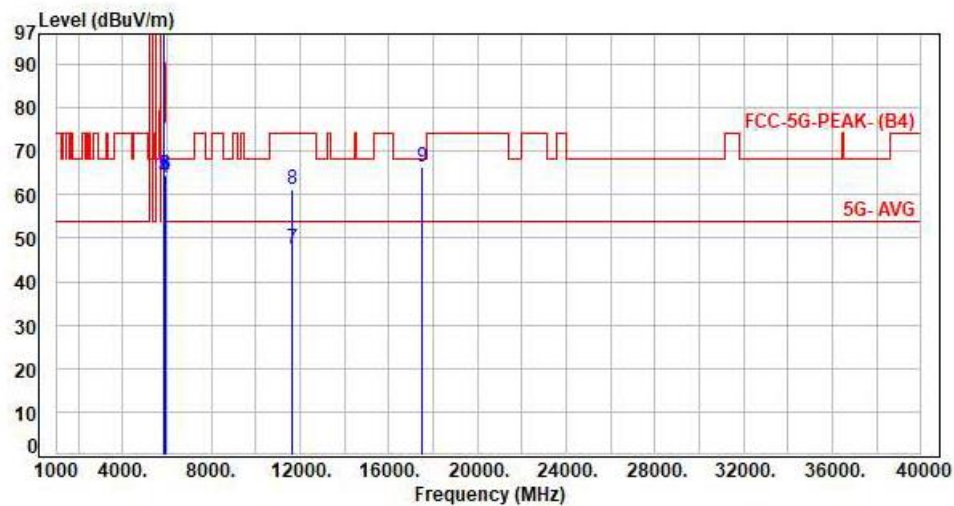

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	97.32	104.78	200.00	-95.22	Average	106	138	P
2	5825.00	7.46	107.45	114.91	200.00	-85.09	Peak	106	138	P
3	5850.00	7.47	56.92	64.39	122.20	-57.81	Peak	106	138	P
4	5855.00	7.49	56.30	63.79	110.80	-47.01	Peak	106	138	P
5	5875.00	7.57	56.99	64.56	105.20	-40.64	Peak	106	138	P
6	5925.00	7.73	56.81	64.54	68.20	-3.66	Peak	106	138	P
7	11650.00	18.67	28.84	47.51	54.00	-6.49	Average	100	118	P
8	11650.00	18.67	42.68	61.35	74.00	-12.65	Peak	100	118	P
9	17475.00	25.92	40.56	66.48	68.20	-1.72	Peak	100	340	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

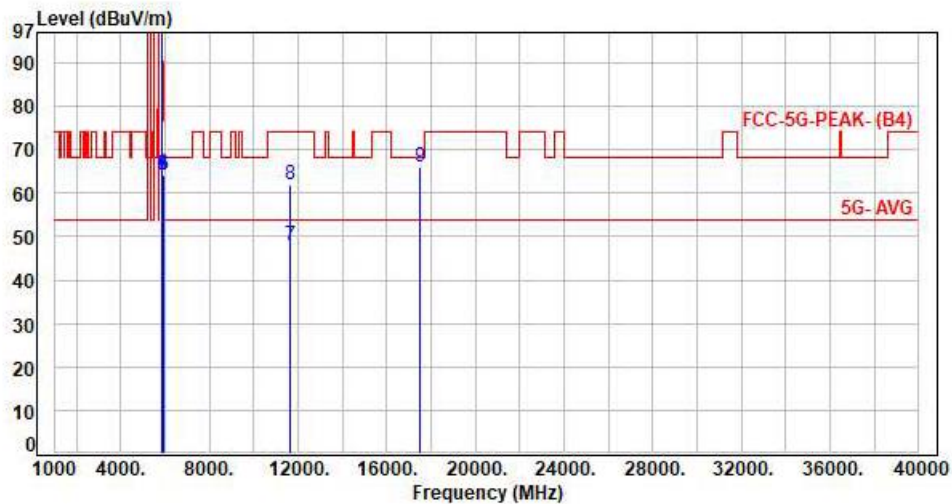

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	93.96	101.42	200.00	-98.58	Average	104	173	P
2	5825.00	7.46	104.21	111.67	200.00	-88.33	Peak	104	173	P
3	5850.00	7.47	56.65	64.12	122.20	-58.08	Peak	104	173	P
4	5855.00	7.49	57.05	64.54	110.80	-46.26	Peak	104	173	P
5	5875.00	7.57	56.74	64.31	105.20	-40.89	Peak	104	173	P
6	5925.00	7.73	56.47	64.20	68.20	-4.00	Peak	104	173	P
7	11650.00	18.67	29.16	47.83	54.00	-6.17	Average	100	157	P
8	11650.00	18.67	43.20	61.87	74.00	-12.13	Peak	100	157	P
9	17475.00	25.92	40.26	66.18	68.20	-2.02	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

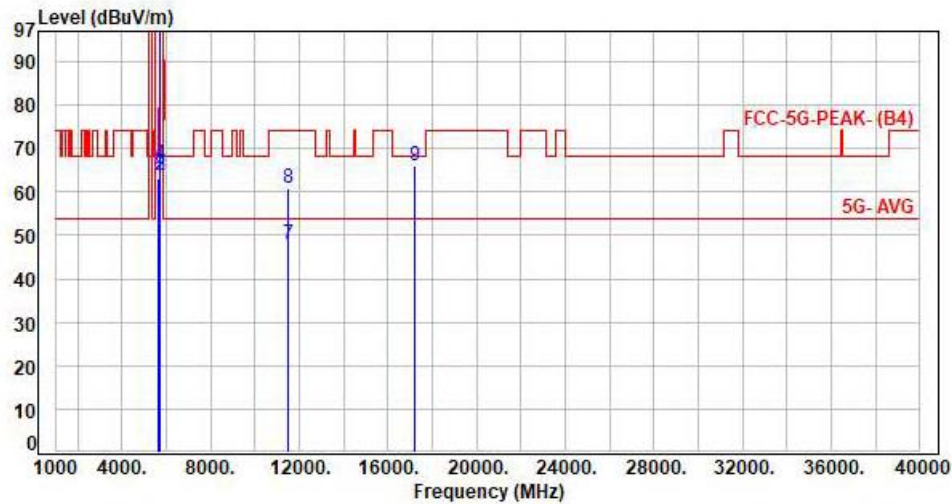

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.63	63.14	68.20	-5.06	Peak	102	226	P
2	5700.00	7.43	56.30	63.73	105.20	-41.47	Peak	102	226	P
3	5720.00	7.43	56.48	63.91	110.80	-46.89	Peak	102	226	P
4	5725.00	7.43	58.94	66.37	122.20	-55.83	Peak	102	226	P
5	5745.00	7.44	97.46	104.90	200.00	-95.10	Average	102	226	P
6	5745.00	7.44	110.01	117.45	200.00	-82.55	Peak	102	226	P
7	11490.00	18.33	29.49	47.82	54.00	-6.18	Average	100	115	P
8	11490.00	18.33	42.47	60.80	74.00	-13.20	Peak	100	115	P
9	17235.00	24.37	41.57	65.94	68.20	-2.26	Peak	100	338	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

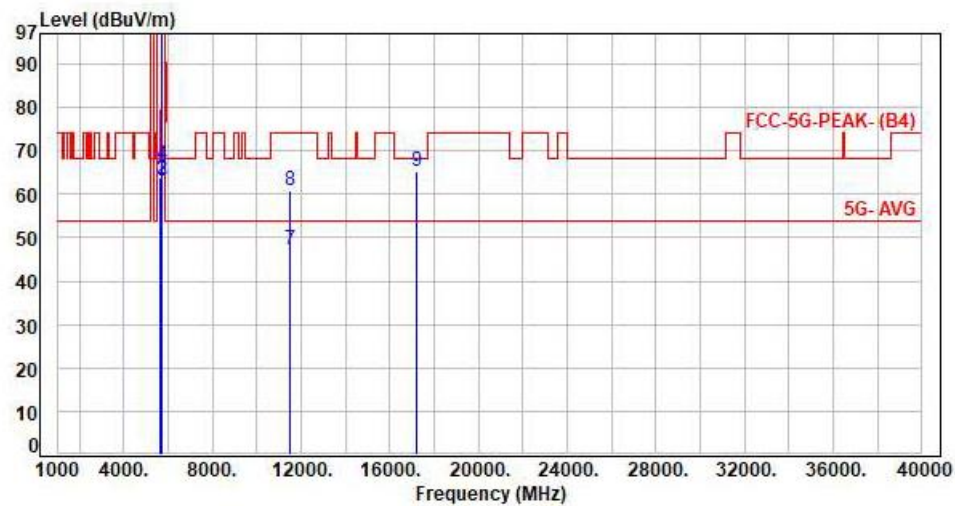

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.47	63.98	68.20	-4.22	Peak	124	59	P
2	5700.00	7.43	55.97	63.40	105.20	-41.80	Peak	124	59	P
3	5720.00	7.43	55.81	63.24	110.80	-47.56	Peak	124	59	P
4	5725.00	7.43	59.19	66.62	122.20	-55.58	Peak	124	59	P
5	5745.00	7.44	95.18	102.62	200.00	-97.38	Average	124	59	P
6	5745.00	7.44	107.69	115.13	200.00	-84.87	Peak	124	59	P
7	11490.00	18.33	29.03	47.36	54.00	-6.64	Average	100	155	P
8	11490.00	18.33	42.40	60.73	74.00	-13.27	Peak	100	155	P
9	17235.00	24.37	41.02	65.39	68.20	-2.81	Peak	100	183	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

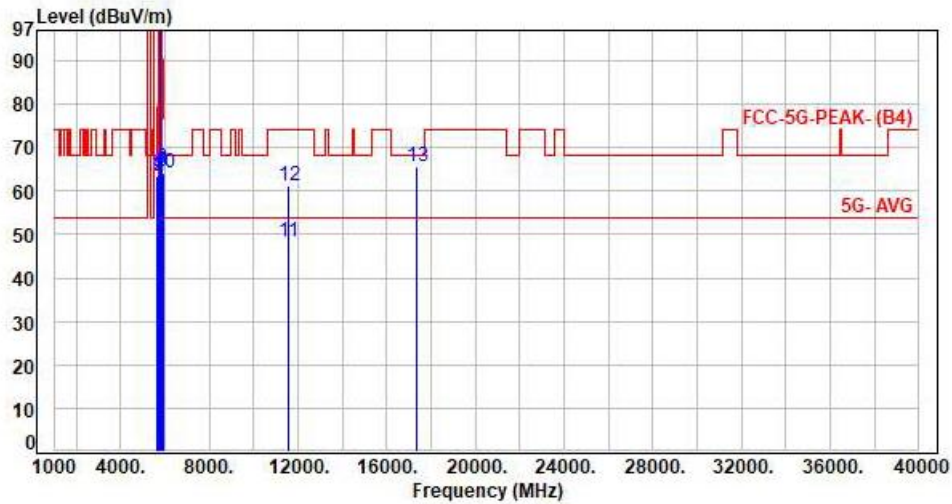

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.04	63.55	68.20	-4.65	Peak	100	227	P
2	5700.00	7.43	55.83	63.26	105.20	-41.94	Peak	100	227	P
3	5720.00	7.43	56.18	63.61	110.80	-47.19	Peak	100	227	P
4	5725.00	7.43	56.27	63.70	122.20	-58.50	Peak	100	227	P
5	5785.00	7.45	97.24	104.69	200.00	-95.31	Average	100	227	P
6	5785.00	7.45	109.69	117.14	200.00	-82.86	Peak	100	227	P
7	5850.00	7.47	56.65	64.12	122.20	-58.08	Peak	100	227	P
8	5855.00	7.49	57.18	64.67	110.80	-46.13	Peak	100	227	P
9	5875.00	7.57	57.63	65.20	105.20	-40.00	Peak	100	227	P
10	5925.00	7.73	56.58	64.31	68.20	-3.89	Peak	100	227	P
11	11570.00	18.58	29.59	48.17	54.00	-5.83	Average	100	107	P
12	11570.00	18.58	42.75	61.33	74.00	-12.67	Peak	100	107	P
13	17355.00	25.24	40.50	65.74	68.20	-2.46	Peak	100	328	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

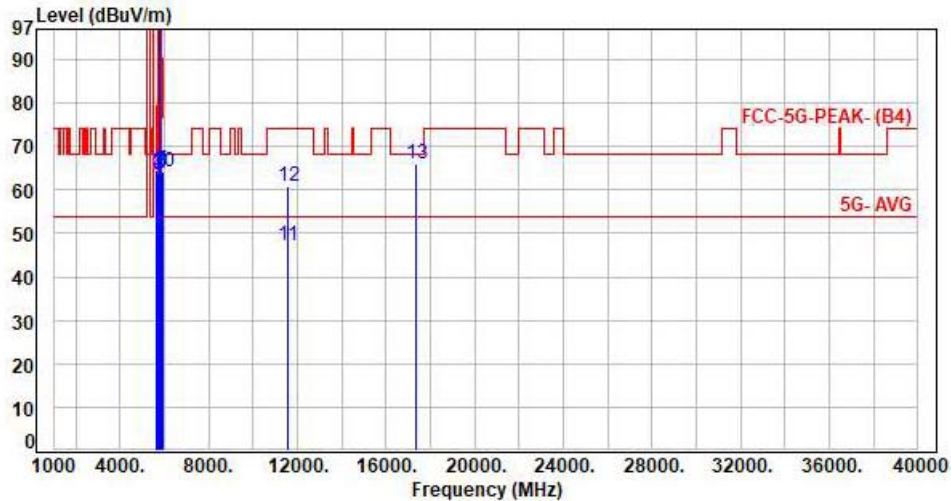

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.87	64.38	68.20	-3.82	Peak	100	174	P
2	5700.00	7.43	56.53	63.96	105.20	-41.24	Peak	100	174	P
3	5720.00	7.43	56.06	63.49	110.80	-47.31	Peak	100	174	P
4	5725.00	7.43	56.46	63.89	122.20	-58.31	Peak	100	174	P
5	5785.00	7.45	93.91	101.36	200.00	-98.64	Average	100	174	P
6	5785.00	7.45	106.28	113.73	200.00	-86.27	Peak	100	174	P
7	5850.00	7.47	56.98	64.45	122.20	-57.75	Peak	100	174	P
8	5855.00	7.49	56.76	64.25	110.80	-46.55	Peak	100	174	P
9	5875.00	7.57	56.39	63.96	105.20	-41.24	Peak	100	174	P
10	5925.00	7.73	56.45	64.18	68.20	-4.02	Peak	100	174	P
11	11570.00	18.58	28.47	47.05	54.00	-6.95	Average	100	157	P
12	11570.00	18.58	42.39	60.97	74.00	-13.03	Peak	100	157	P
13	17355.00	25.24	40.65	65.89	68.20	-2.31	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

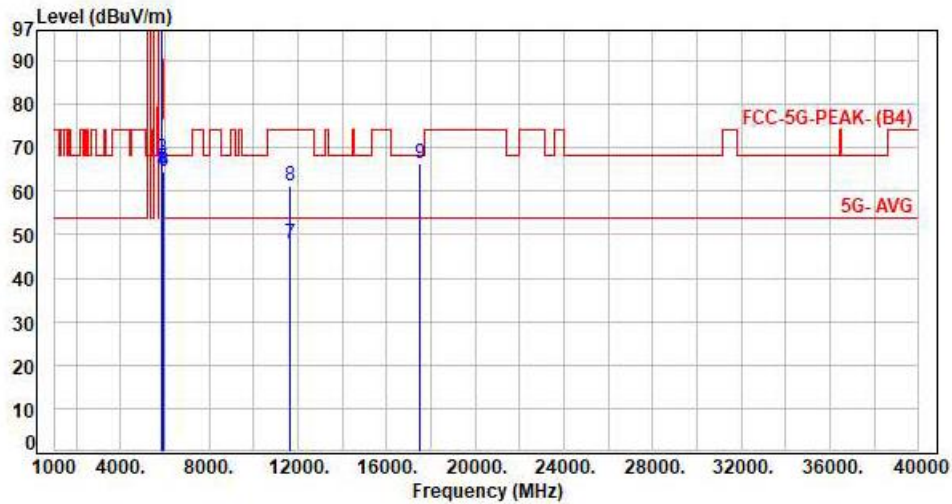


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	97.89	105.35	200.00	-94.65	Average	104	138	P
2	5825.00	7.46	110.18	117.64	200.00	-82.36	Peak	104	138	P
3	5850.00	7.47	60.18	67.65	122.20	-54.55	Peak	104	138	P
4	5855.00	7.49	57.19	64.68	110.80	-46.12	Peak	104	138	P
5	5875.00	7.57	57.53	65.10	105.20	-40.10	Peak	104	138	P
6	5925.00	7.73	56.91	64.64	68.20	-3.56	Peak	104	138	P
7	11650.00	18.67	29.11	47.78	54.00	-6.22	Average	100	111	P
8	11650.00	18.67	42.45	61.12	74.00	-12.88	Peak	100	111	P
9	17475.00	25.92	40.61	66.53	68.20	-1.67	Peak	100	337	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

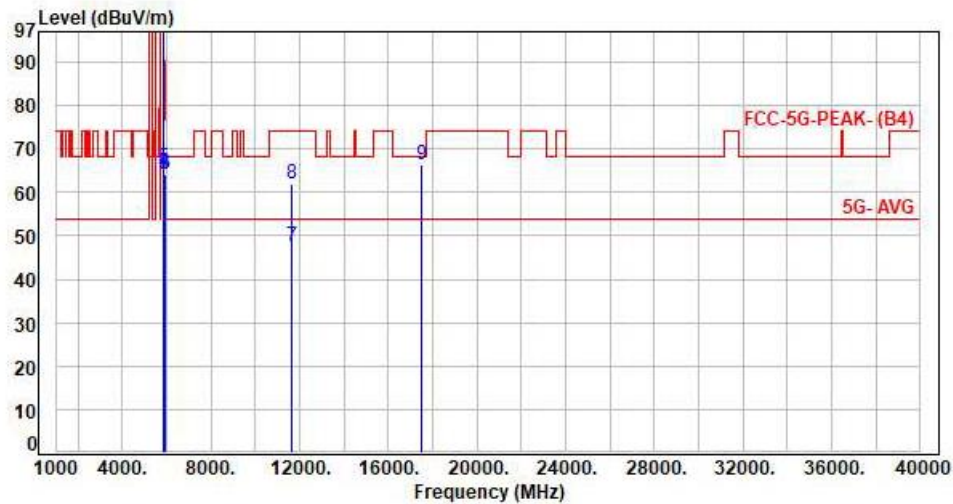


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	94.27	101.73	200.00	-98.27	Average	106	174	P
2	5825.00	7.46	106.86	114.32	200.00	-85.68	Peak	106	174	P
3	5850.00	7.47	56.65	64.12	122.20	-58.08	Peak	106	174	P
4	5855.00	7.49	56.94	64.43	110.80	-46.37	Peak	106	174	P
5	5875.00	7.57	58.18	65.75	105.20	-39.45	Peak	106	174	P
6	5925.00	7.73	56.47	64.20	68.20	-4.00	Peak	106	174	P
7	11650.00	18.67	28.90	47.57	54.00	-6.43	Average	100	153	P
8	11650.00	18.67	43.13	61.80	74.00	-12.20	Peak	100	153	P
9	17475.00	25.92	40.43	66.35	68.20	-1.85	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

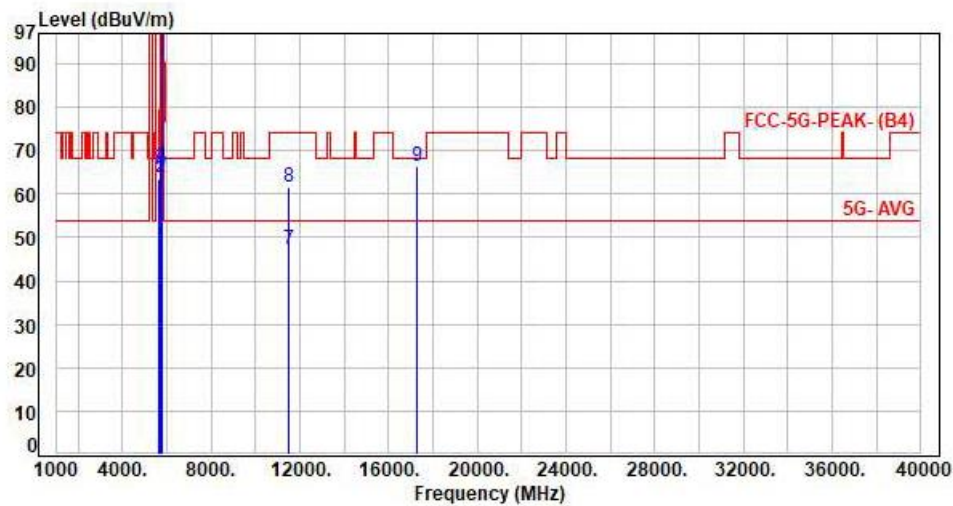


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.89	63.40	68.20	-4.80	Peak	103	229	P
2	5700.00	7.43	56.22	63.65	105.20	-41.55	Peak	103	229	P
3	5720.00	7.43	58.65	66.08	110.80	-44.72	Peak	103	229	P
4	5725.00	7.43	58.80	66.23	122.20	-55.97	Peak	103	229	P
5	5755.00	7.44	94.63	102.07	200.00	-97.93	Average	103	229	P
6	5755.00	7.44	108.48	115.92	200.00	-84.08	Peak	103	229	P
7	11510.00	18.39	29.00	47.39	54.00	-6.61	Average	100	110	P
8	11510.00	18.39	43.19	61.58	74.00	-12.42	Peak	100	110	P
9	17265.00	24.63	41.74	66.37	68.20	-1.83	Peak	100	335	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

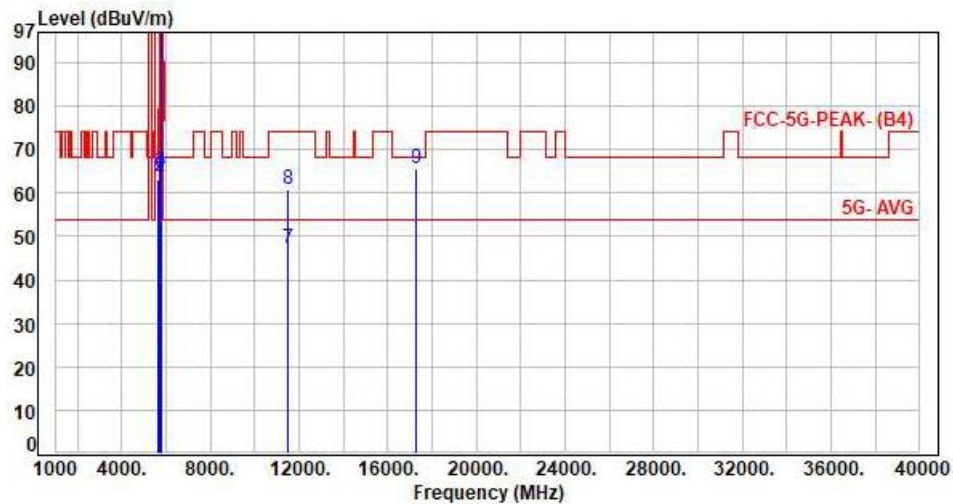

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.47	62.98	68.20	-5.22	Peak	142	58	P
2	5700.00	7.43	56.25	63.68	105.20	-41.52	Peak	142	58	P
3	5720.00	7.43	57.61	65.04	110.80	-45.76	Peak	142	58	P
4	5725.00	7.43	57.33	64.76	122.20	-57.44	Peak	142	58	P
5	5755.00	7.44	91.86	99.30	200.00	-100.70	Average	142	58	P
6	5755.00	7.44	104.52	111.96	200.00	-88.04	Peak	142	58	P
7	11510.00	18.39	28.95	47.34	54.00	-6.66	Average	100	152	P
8	11510.00	18.39	42.47	60.86	74.00	-13.14	Peak	100	152	P
9	17265.00	24.63	41.07	65.70	68.20	-2.50	Peak	100	192	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

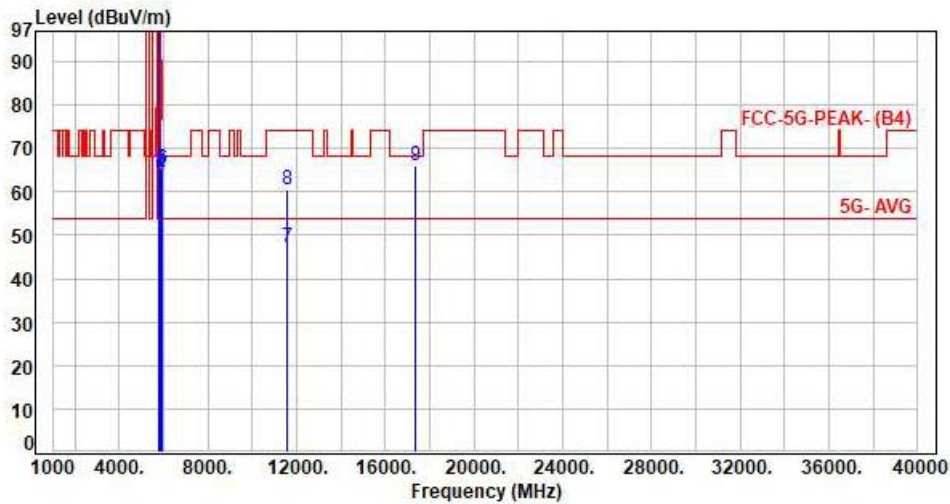


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	94.73	102.18	200.00	-97.82	Average	100	227	P
2	5795.00	7.45	106.70	114.15	200.00	-85.85	Peak	100	227	P
3	5850.00	7.47	57.32	64.79	122.20	-57.41	Peak	100	227	P
4	5855.00	7.49	56.36	63.85	110.80	-46.95	Peak	100	227	P
5	5875.00	7.57	57.80	65.37	105.20	-39.83	Peak	100	227	P
6	5925.00	7.73	57.59	65.32	68.20	-2.88	Peak	100	227	P
7	11590.00	18.62	28.57	47.19	54.00	-6.81	Average	100	108	P
8	11590.00	18.62	41.92	60.54	74.00	-13.46	Peak	100	108	P
9	17385.00	25.34	40.52	65.86	68.20	-2.34	Peak	100	337	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

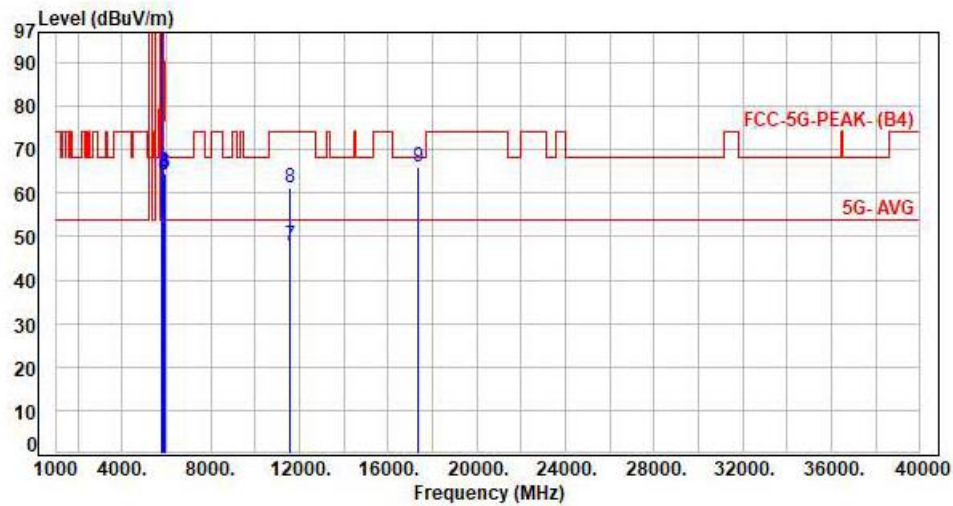

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.45	91.39	98.84	200.00	-101.16	Average	144	60	P
2	5795.00	7.45	103.57	111.02	200.00	-88.98	Peak	144	60	P
3	5850.00	7.47	57.29	64.76	122.20	-57.44	Peak	144	60	P
4	5855.00	7.49	56.76	64.25	110.80	-46.55	Peak	144	60	P
5	5875.00	7.57	56.52	64.09	105.20	-41.11	Peak	144	60	P
6	5925.00	7.73	56.69	64.42	68.20	-3.78	Peak	144	60	P
7	11590.00	18.62	29.26	47.88	54.00	-6.12	Average	100	158	P
8	11590.00	18.62	42.79	61.41	74.00	-12.59	Peak	100	158	P
9	17385.00	25.34	40.55	65.89	68.20	-2.31	Peak	100	182	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

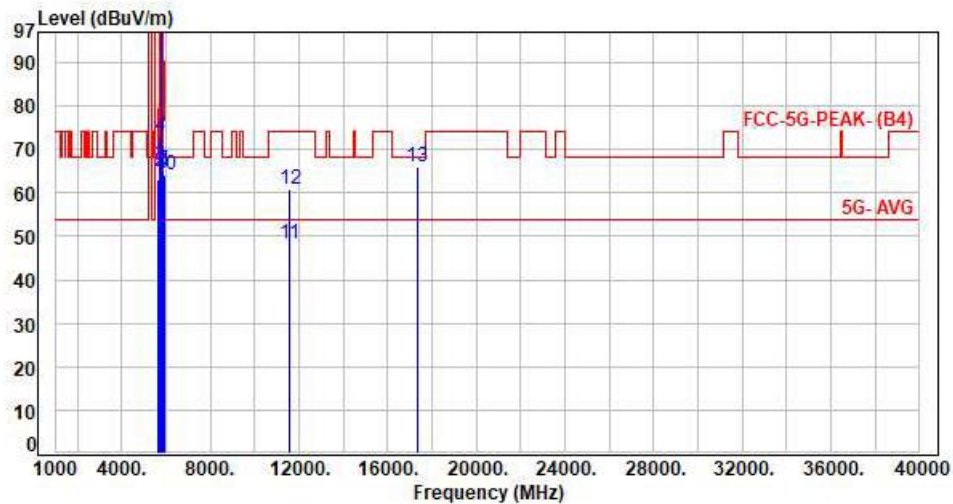

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.61	63.12	68.20	-5.08	Peak	100	226	P
2	5700.00	7.43	57.64	65.07	105.20	-40.13	Peak	100	226	P
3	5720.00	7.43	58.81	66.24	110.80	-44.56	Peak	100	226	P
4	5725.00	7.43	65.72	73.15	122.20	-49.05	Peak	100	226	P
5	5775.00	7.45	92.09	99.54	200.00	-100.46	Average	100	226	P
6	5775.00	7.45	104.10	111.55	200.00	-88.45	Peak	100	226	P
7	5850.00	7.47	57.74	65.21	122.20	-56.99	Peak	100	226	P
8	5855.00	7.49	57.92	65.41	110.80	-45.39	Peak	100	226	P
9	5875.00	7.57	56.87	64.44	105.20	-40.76	Peak	100	226	P
10	5925.00	7.73	56.56	64.29	68.20	-3.91	Peak	100	226	P
11	11550.00	18.54	29.62	48.16	54.00	-5.84	Average	100	115	P
12	11550.00	18.54	42.47	61.01	74.00	-12.99	Peak	100	115	P
13	17325.00	25.10	40.94	66.04	68.20	-2.16	Peak	100	326	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

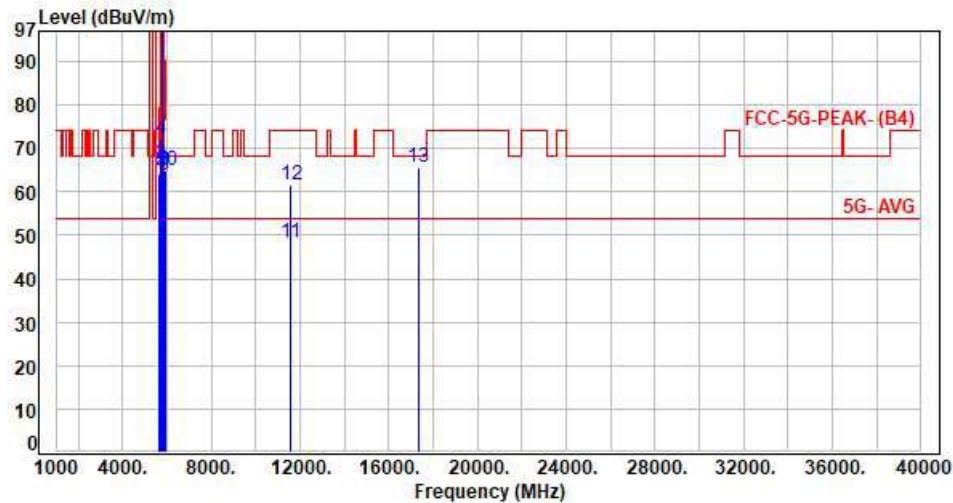

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.54	64.05	68.20	-4.15	Peak	114	58	P
2	5700.00	7.43	57.54	64.97	105.20	-40.23	Peak	114	58	P
3	5720.00	7.43	58.97	66.40	110.80	-44.40	Peak	114	58	P
4	5725.00	7.43	65.02	72.45	122.20	-49.75	Peak	114	58	P
5	5775.00	7.45	89.80	97.25	200.00	-102.75	Average	114	58	P
6	5775.00	7.45	101.28	108.73	200.00	-91.27	Peak	114	58	P
7	5850.00	7.47	56.97	64.44	122.20	-57.76	Peak	114	58	P
8	5855.00	7.49	56.35	63.84	110.80	-46.96	Peak	114	58	P
9	5875.00	7.57	57.26	64.83	105.20	-40.37	Peak	114	58	P
10	5925.00	7.73	57.24	64.97	68.20	-3.23	Peak	114	58	P
11	11550.00	18.54	29.66	48.20	54.00	-5.80	Average	100	153	P
12	11550.00	18.54	43.02	61.56	74.00	-12.44	Peak	100	153	P
13	17325.00	25.10	40.54	65.64	68.20	-2.56	Peak	100	189	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

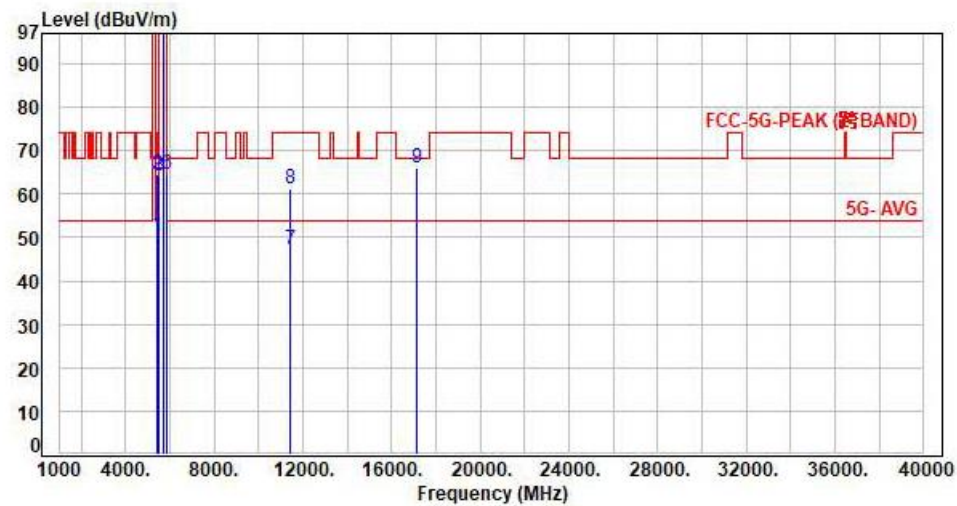


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.82	50.37	54.00	-3.63	Average	110	289	P
2	5460.00	7.55	57.15	64.70	74.00	-9.30	Peak	110	289	P
3	5470.00	7.58	56.66	64.24	68.20	-3.96	Peak	110	289	P
4	5720.00	7.43	96.73	104.16	200.00	-95.84	Average	110	289	P
5	5720.00	7.43	106.47	113.90	200.00	-86.10	Peak	110	289	P
6	5850.00	7.47	57.13	64.60	68.20	-3.60	Peak	110	289	P
7	11440.00	18.20	29.03	47.23	54.00	-6.77	Average	100	117	P
8	11440.00	18.20	43.14	61.34	74.00	-12.66	Peak	100	117	P
9	17160.00	24.13	41.84	65.97	68.20	-2.23	Peak	100	328	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

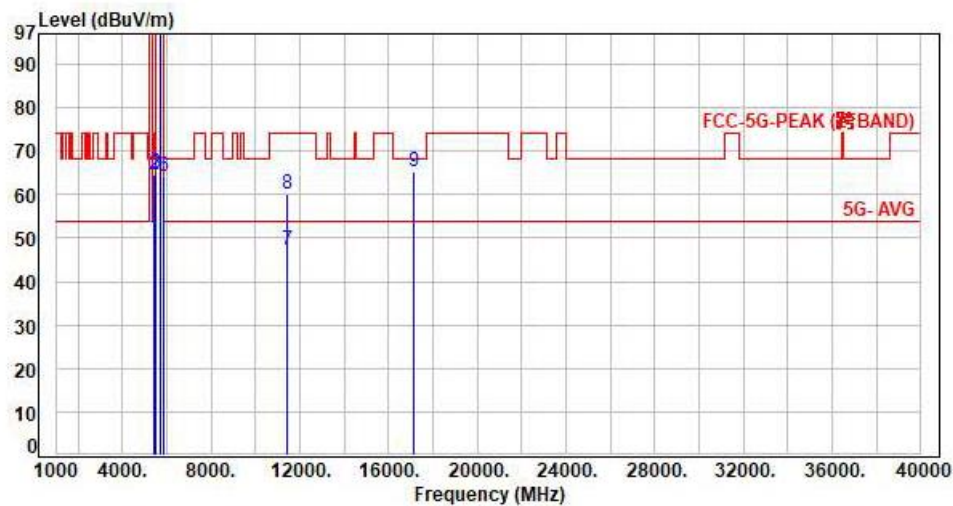

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.79	50.34	54.00	-3.66	Average	100	60	P
2	5460.00	7.55	57.06	64.61	74.00	-9.39	Peak	100	60	P
3	5470.00	7.58	57.17	64.75	68.20	-3.45	Peak	100	60	P
4	5720.00	7.43	94.74	102.17	200.00	-97.83	Average	100	60	P
5	5720.00	7.43	104.67	112.10	200.00	-87.90	Peak	100	60	P
6	5850.00	7.47	56.80	64.27	68.20	-3.93	Peak	100	60	P
7	11440.00	18.20	29.06	47.26	54.00	-6.74	Average	100	157	P
8	11440.00	18.20	42.10	60.30	74.00	-13.70	Peak	100	157	P
9	17160.00	24.13	41.04	65.17	68.20	-3.03	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

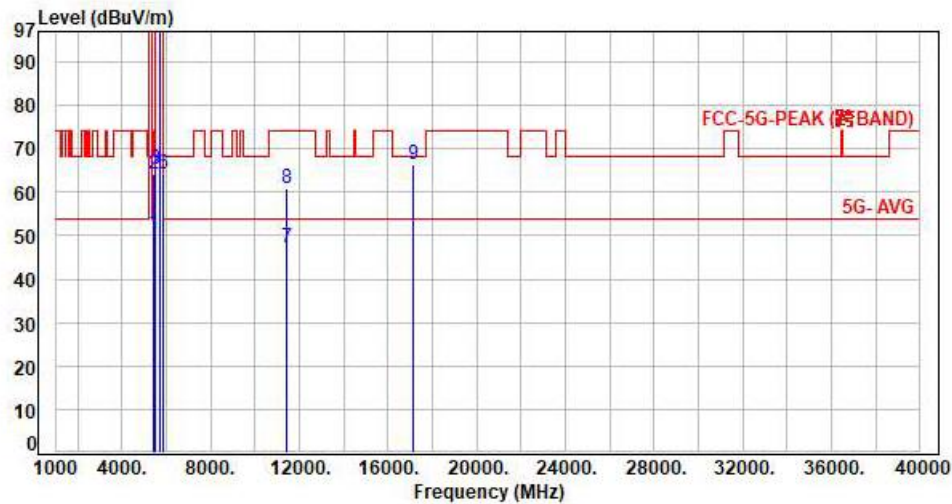

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.14	50.69	54.00	-3.31	Average	105	226	P
2	5460.00	7.55	56.80	64.35	74.00	-9.65	Peak	105	226	P
3	5470.00	7.58	57.53	65.11	68.20	-3.09	Peak	105	226	P
4	5720.00	7.43	97.23	104.66	200.00	-95.34	Average	105	226	P
5	5720.00	7.43	109.47	116.90	200.00	-83.10	Peak	105	226	P
6	5850.00	7.47	56.60	64.07	68.20	-4.13	Peak	105	226	P
7	11440.00	18.20	29.03	47.23	54.00	-6.77	Average	100	110	P
8	11440.00	18.20	42.49	60.69	74.00	-13.31	Peak	100	110	P
9	17160.00	24.13	42.42	66.55	68.20	-1.65	Peak	100	336	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

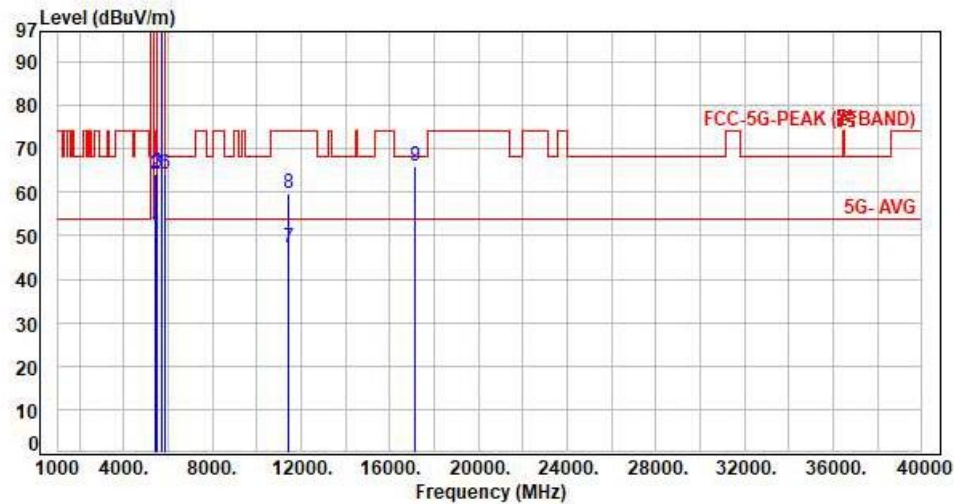

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.08	50.63	54.00	-3.37	Average	100	60	P
2	5460.00	7.55	56.61	64.16	74.00	-9.84	Peak	100	60	P
3	5470.00	7.58	56.95	64.53	68.20	-3.67	Peak	100	60	P
4	5720.00	7.43	94.83	102.26	200.00	-97.74	Average	100	60	P
5	5720.00	7.43	106.85	114.28	200.00	-85.72	Peak	100	60	P
6	5850.00	7.47	56.88	64.35	68.20	-3.85	Peak	100	60	P
7	11440.00	18.20	29.04	47.24	54.00	-6.76	Average	100	158	P
8	11440.00	18.20	41.58	59.78	74.00	-14.22	Peak	100	158	P
9	17160.00	24.13	41.85	65.98	68.20	-2.22	Peak	100	183	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

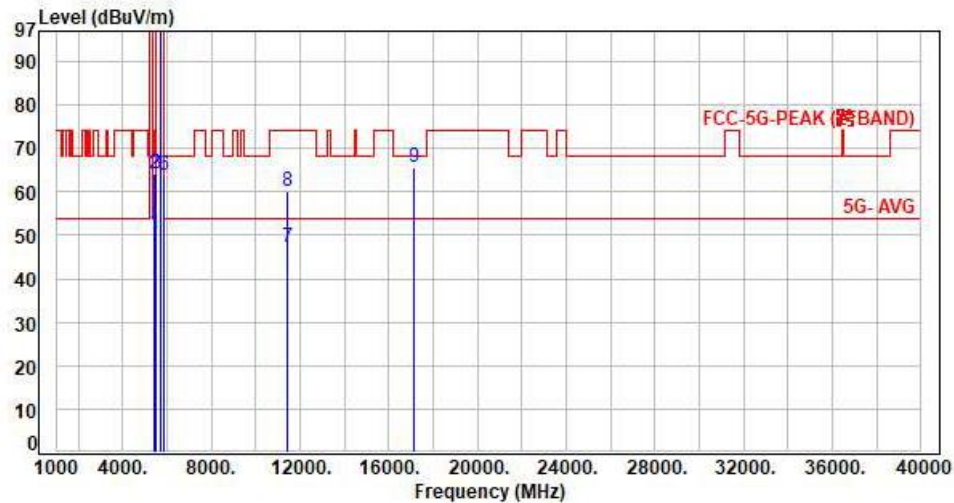

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.14	50.69	54.00	-3.31	Average	100	227	P
2	5460.00	7.55	56.78	64.33	74.00	-9.67	Peak	100	227	P
3	5470.00	7.58	56.51	64.09	68.20	-4.11	Peak	100	227	P
4	5710.00	7.43	94.22	101.65	200.00	-98.35	Average	100	227	P
5	5710.00	7.43	106.39	113.82	200.00	-86.18	Peak	100	227	P
6	5850.00	7.47	56.20	63.67	68.20	-4.53	Peak	100	227	P
7	11420.00	18.14	28.94	47.08	54.00	-6.92	Average	100	109	P
8	11420.00	18.14	41.95	60.09	74.00	-13.91	Peak	100	109	P
9	17130.00	24.09	41.55	65.64	68.20	-2.56	Peak	100	341	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

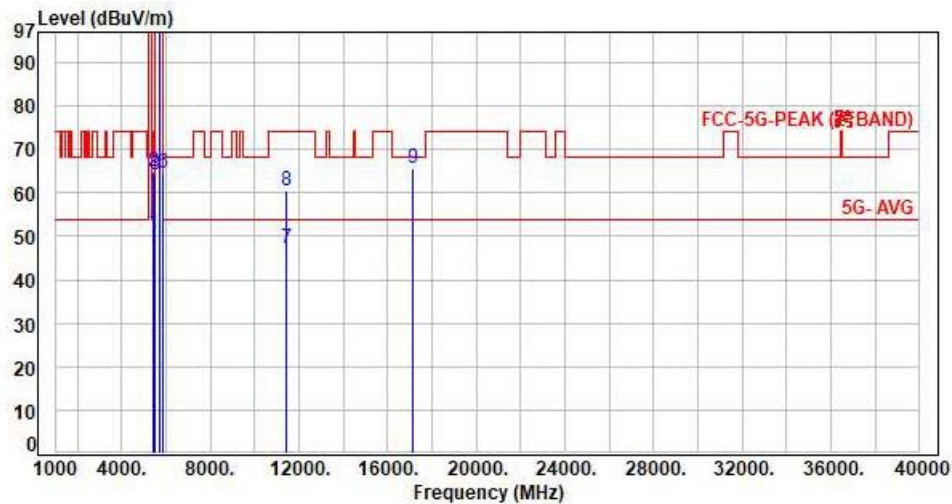

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.17	50.72	54.00	-3.28	Average	100	60	P
2	5460.00	7.55	57.52	65.07	74.00	-8.93	Peak	100	60	P
3	5470.00	7.58	56.66	64.24	68.20	-3.96	Peak	100	60	P
4	5710.00	7.43	91.25	98.68	200.00	-101.32	Average	100	60	P
5	5710.00	7.43	104.93	112.36	200.00	-87.64	Peak	100	60	P
6	5850.00	7.47	57.02	64.49	68.20	-3.71	Peak	100	60	P
7	11420.00	18.14	29.01	47.15	54.00	-6.85	Average	100	159	P
8	11420.00	18.14	42.45	60.59	74.00	-13.41	Peak	100	159	P
9	17130.00	24.09	41.49	65.58	68.20	-2.62	Peak	100	187	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

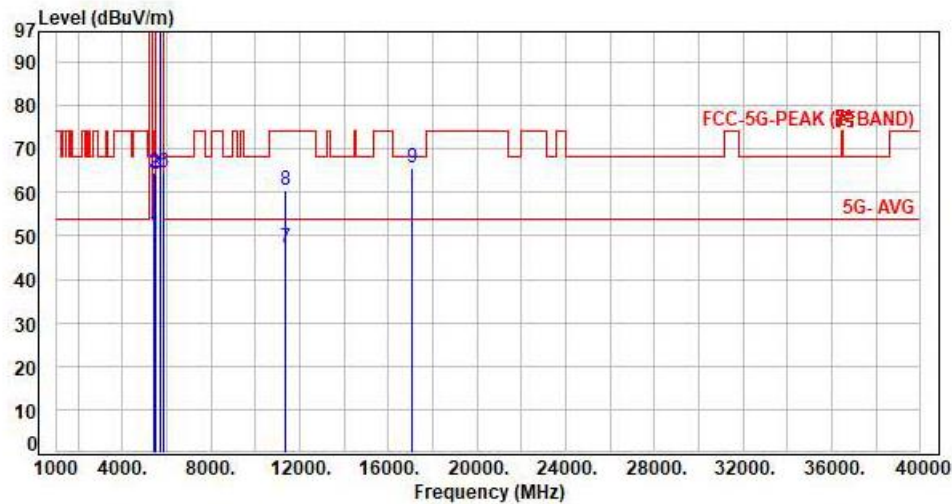

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.10	50.65	54.00	-3.35	Average	105	226	P
2	5460.00	7.55	56.99	64.54	74.00	-9.46	Peak	105	226	P
3	5470.00	7.58	56.47	64.05	68.20	-4.15	Peak	105	226	P
4	5690.00	7.44	91.41	98.85	200.00	-101.15	Average	105	226	P
5	5690.00	7.44	103.99	111.43	200.00	-88.57	Peak	105	226	P
6	5850.00	7.47	57.23	64.70	68.20	-3.50	Peak	105	226	P
7	11380.00	18.06	29.15	47.21	54.00	-6.79	Average	100	105	P
8	11380.00	18.06	42.45	60.51	74.00	-13.49	Peak	100	105	P
9	17070.00	23.85	41.85	65.70	68.20	-2.50	Peak	100	330	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

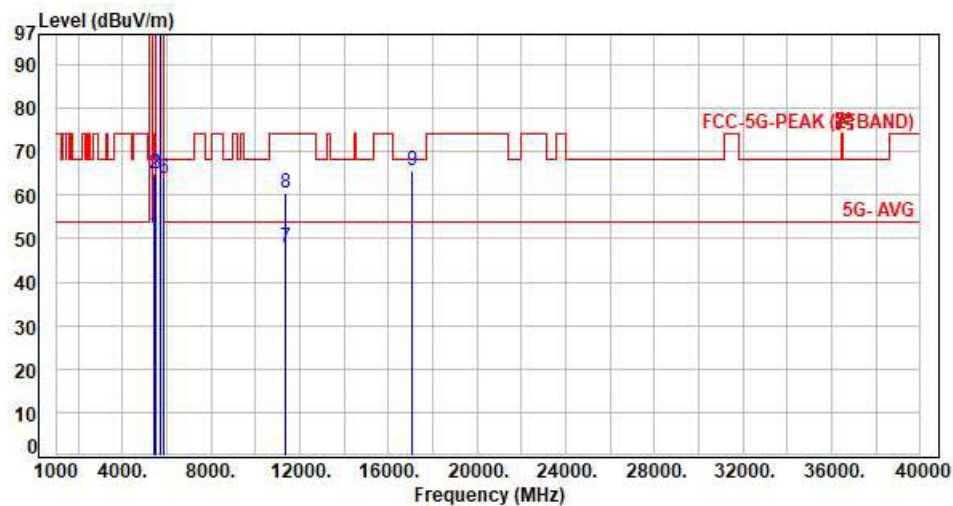

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.18	50.73	54.00	-3.27	Average	131	58	P
2	5460.00	7.55	57.51	65.06	74.00	-8.94	Peak	131	58	P
3	5470.00	7.58	57.18	64.76	68.20	-3.44	Peak	131	58	P
4	5690.00	7.44	89.86	97.30	200.00	-102.70	Average	131	58	P
5	5690.00	7.44	101.58	109.02	200.00	-90.98	Peak	131	58	P
6	5850.00	7.47	56.29	63.76	68.20	-4.44	Peak	131	58	P
7	11380.00	18.06	29.94	48.00	54.00	-6.00	Average	100	155	P
8	11380.00	18.06	42.58	60.64	74.00	-13.36	Peak	100	155	P
9	17070.00	23.85	41.66	65.51	68.20	-2.69	Peak	100	184	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

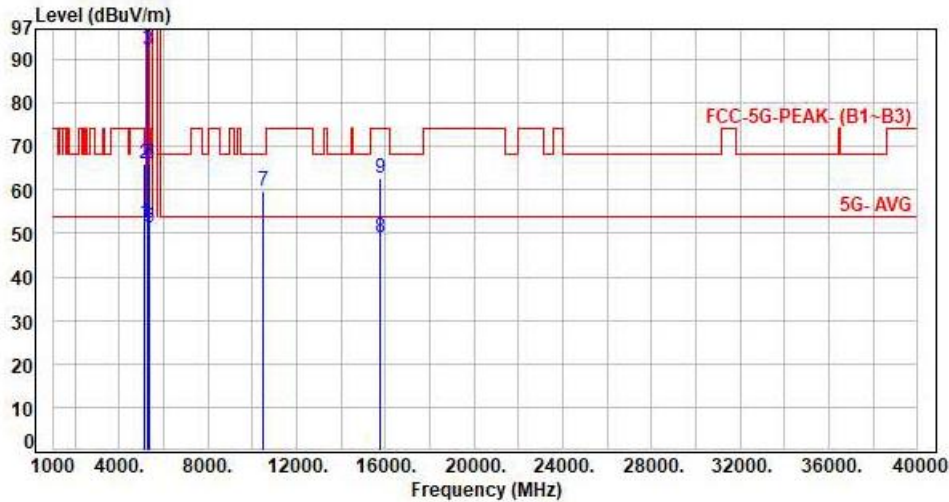

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.53	52.22	54.00	-1.78	Average	141	288	P
2	5150.00	6.69	59.30	65.99	74.00	-8.01	Peak	141	288	P
3	5250.00	6.92	85.24	92.16	200.00	-107.84	Average	141	288	P
4	5250.00	6.92	98.51	105.43	200.00	-94.57	Peak	141	288	P
5	5350.00	7.27	44.12	51.39	54.00	-2.61	Average	141	288	P
6	5350.00	7.27	58.68	65.95	74.00	-8.05	Peak	141	288	P
7	10500.00	16.48	43.17	59.65	68.20	-8.55	Peak	100	109	P
8	15750.00	19.75	29.43	49.18	54.00	-4.82	Average	100	109	P
9	15750.00	19.75	42.89	62.64	74.00	-11.36	Peak	100	333	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

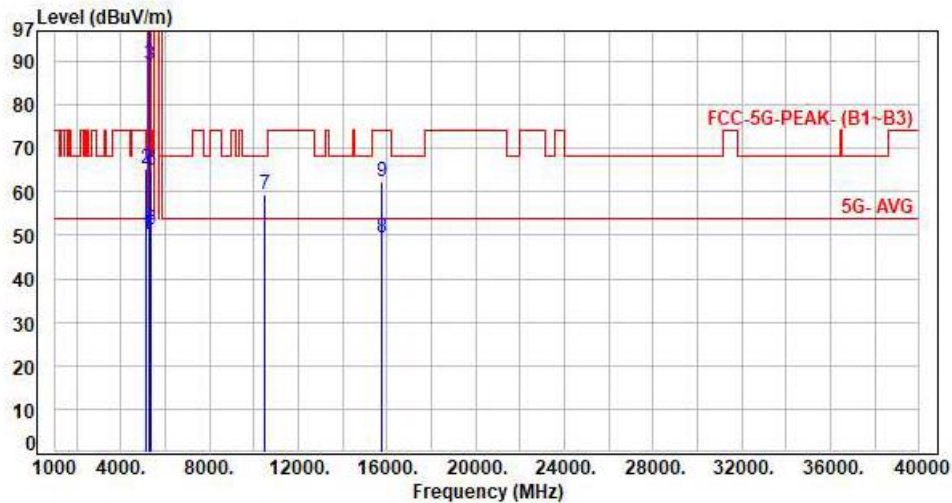

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.37	50.06	54.00	-3.94	Average	100	55	P
2	5150.00	6.69	58.73	65.42	74.00	-8.58	Peak	100	55	P
3	5250.00	6.92	82.21	89.13	200.00	-110.87	Average	100	55	P
4	5250.00	6.92	93.06	99.98	200.00	-100.02	Peak	100	55	P
5	5350.00	7.27	43.97	51.24	54.00	-2.76	Average	100	55	P
6	5350.00	7.27	57.70	64.97	74.00	-9.03	Peak	100	55	P
7	10500.00	16.48	42.74	59.22	68.20	-8.98	Peak	100	157	P
8	15750.00	19.75	29.63	49.38	54.00	-4.62	Average	100	183	P
9	15750.00	19.75	42.59	62.34	74.00	-11.66	Peak	100	183	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**6.7. Restricted Bands of Operation**

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

Non-Beamforming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	1.98	2.00	99.20%
802.11be EHT20	5.46	5.60	97.50%
802.11be EHT40	5.46	5.62	97.15%
802.11be EHT80	5.46	5.64	96.81%
802.11be EHT160	5.46	5.60	97.50%

Beamforming

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	5.46	5.60	97.50%
802.11ax HE40	5.44	5.62	96.80%
802.11ax HE80	5.44	5.62	96.80%
802.11ax HE160	5.44	5.60	97.14%
802.11be EHT20	5.46	5.60	97.50%
802.11be EHT40	5.46	5.62	97.15%
802.11be EHT80	5.46	5.64	96.81%
802.11be EHT160	5.46	5.60	97.50%


7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




Non-Beamforming


Modulation Type: 802.11a (6Mbps)

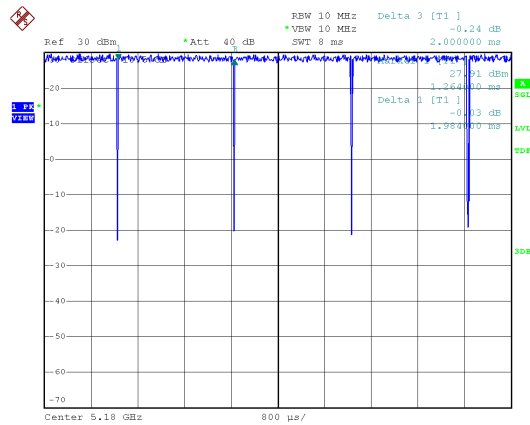


Modulation Type: 802.11be EHT80 (30.6Mbps)

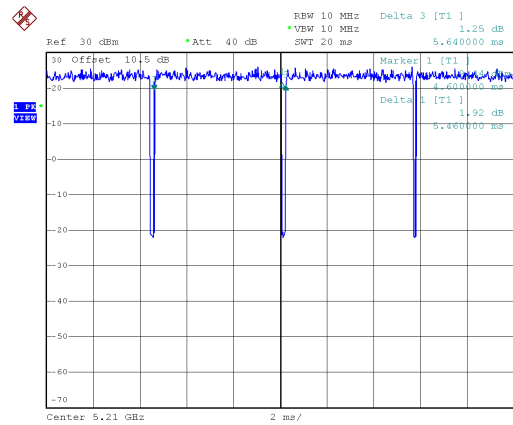

Modulation Type: 802.11be EHT20 (7.3Mbps)

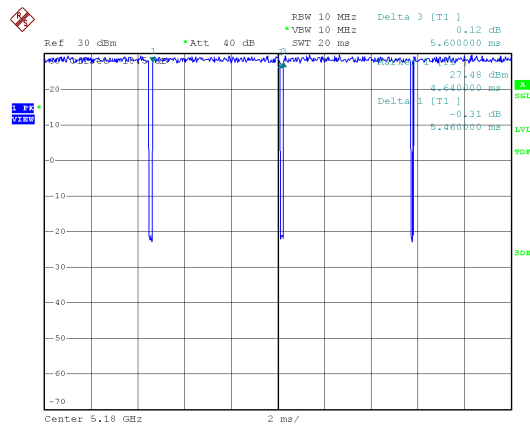

Modulation Type: 802.11be EHT160 (61.3Mbps)

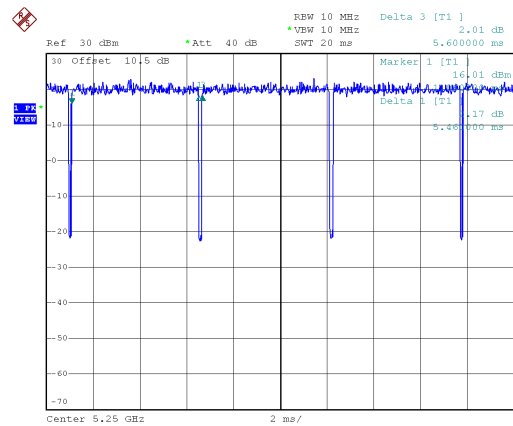

Modulation Type: 802.11be EHT40 (14.6Mbps)

