




Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

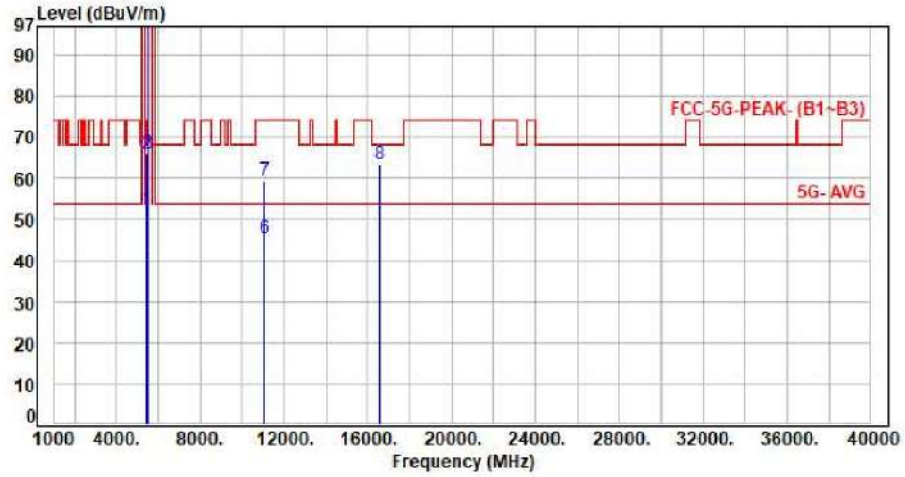


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 44.51          | 52.23          | 54.00          | -1.77       | Average  | 105         | 55            | P   |
| 2   | 5460.00         | 7.72        | 58.40          | 66.12          | 74.00          | -7.88       | Peak     | 105         | 55            | P   |
| 3   | 5470.00         | 7.72        | 58.29          | 66.01          | 68.20          | -2.19       | Peak     | 105         | 55            | P   |
| 4   | 5530.00         | 7.65        | 96.55          | 104.20         | 200.00         | -95.80      | Average  | 105         | 55            | P   |
| 5   | 5530.00         | 7.65        | 108.58         | 116.23         | 200.00         | -83.77      | Peak     | 105         | 55            | P   |
| 6   | 11060.00        | 15.92       | 29.58          | 45.50          | 54.00          | -8.50       | Average  | 100         | 152           | P   |
| 7   | 11060.00        | 15.92       | 43.43          | 59.35          | 74.00          | -14.65      | Peak     | 100         | 152           | P   |
| 8   | 16590.00        | 21.06       | 42.39          | 63.45          | 68.20          | -4.75       | Peak     | 100         | 224           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

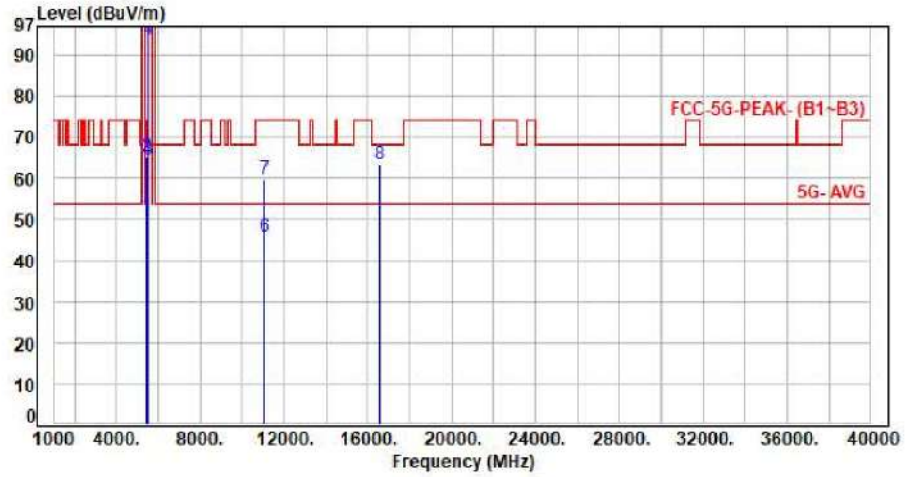


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 43.19          | 50.91          | 54.00          | -3.09       | Average  | 111         | 42            | P   |
| 2   | 5460.00         | 7.72        | 57.46          | 65.18          | 74.00          | -8.82       | Peak     | 111         | 42            | P   |
| 3   | 5470.00         | 7.72        | 56.73          | 64.45          | 68.20          | -3.75       | Peak     | 111         | 42            | P   |
| 4   | 5530.00         | 7.65        | 85.90          | 93.55          | 200.00         | -106.45     | Average  | 111         | 42            | P   |
| 5   | 5530.00         | 7.65        | 99.01          | 106.66         | 200.00         | -93.34      | Peak     | 111         | 42            | P   |
| 6   | 11060.00        | 15.92       | 29.73          | 45.65          | 54.00          | -8.35       | Average  | 100         | 27            | P   |
| 7   | 11060.00        | 15.92       | 43.71          | 59.63          | 74.00          | -14.37      | Peak     | 100         | 27            | P   |
| 8   | 16590.00        | 21.06       | 42.38          | 63.44          | 68.20          | -4.76       | Peak     | 100         | 143           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

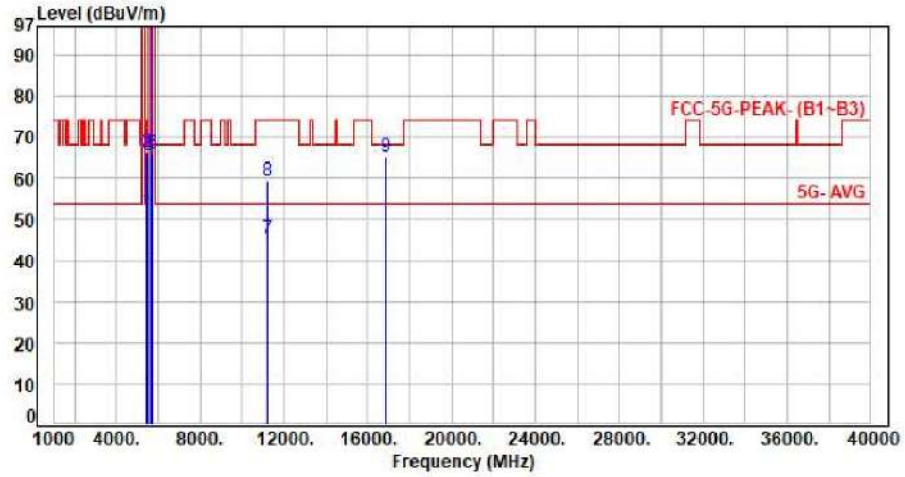


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 44.18          | 51.90          | 54.00          | -2.10       | Average  | 109         | 53            | P   |
| 2   | 5460.00         | 7.72        | 58.69          | 66.41          | 74.00          | -7.59       | Peak     | 109         | 53            | P   |
| 3   | 5470.00         | 7.72        | 57.99          | 65.71          | 68.20          | -2.49       | Peak     | 109         | 53            | P   |
| 4   | 5610.00         | 7.48        | 97.87          | 105.35         | 200.00         | -94.65      | Average  | 109         | 53            | P   |
| 5   | 5610.00         | 7.48        | 110.11         | 117.59         | 200.00         | -82.41      | Peak     | 109         | 53            | P   |
| 6   | 5725.00         | 7.39        | 58.70          | 66.09          | 68.20          | -2.11       | Peak     | 109         | 53            | P   |
| 7   | 11220.00        | 16.19       | 29.29          | 45.48          | 54.00          | -8.52       | Average  | 100         | 158           | P   |
| 8   | 11220.00        | 16.19       | 43.30          | 59.49          | 74.00          | -14.51      | Peak     | 100         | 158           | P   |
| 9   | 16830.00        | 22.77       | 42.43          | 65.20          | 68.20          | -3.00       | Peak     | 100         | 226           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Horizontal

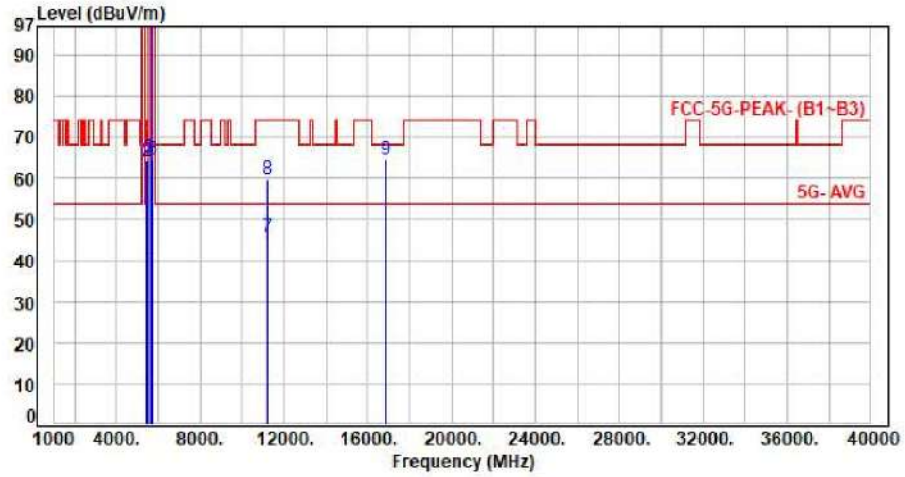


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 43.19          | 50.91          | 54.00          | -3.09       | Average  | 100         | 24            | P   |
| 2   | 5460.00         | 7.72        | 56.56          | 64.28          | 74.00          | -9.72       | Peak     | 100         | 24            | P   |
| 3   | 5470.00         | 7.72        | 57.06          | 64.78          | 68.20          | -3.42       | Peak     | 100         | 24            | P   |
| 4   | 5610.00         | 7.48        | 87.80          | 95.28          | 200.00         | -104.72     | Average  | 100         | 24            | P   |
| 5   | 5610.00         | 7.48        | 99.92          | 107.40         | 200.00         | -92.60      | Peak     | 100         | 24            | P   |
| 6   | 5725.00         | 7.39        | 57.10          | 64.49          | 68.20          | -3.71       | Peak     | 100         | 24            | P   |
| 7   | 11220.00        | 16.19       | 29.48          | 45.67          | 54.00          | -8.33       | Average  | 100         | 29            | P   |
| 8   | 11220.00        | 16.19       | 43.47          | 59.66          | 74.00          | -14.34      | Peak     | 100         | 29            | P   |
| 9   | 16830.00        | 22.77       | 41.94          | 64.71          | 68.20          | -3.49       | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

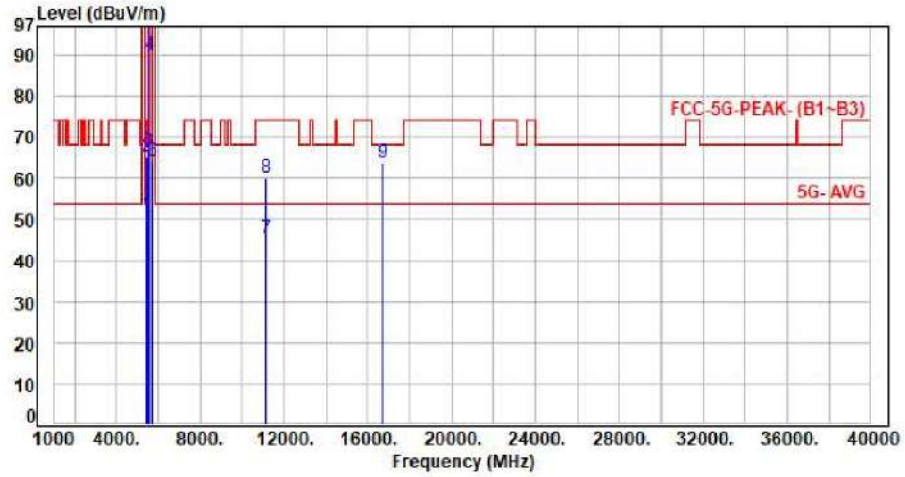


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 43.46          | 51.18          | 54.00          | -2.82       | Average  | 117         | 53            | P   |
| 2   | 5460.00         | 7.72        | 57.47          | 65.19          | 74.00          | -8.81       | Peak     | 117         | 53            | P   |
| 3   | 5470.00         | 7.72        | 59.00          | 66.72          | 68.20          | -1.48       | Peak     | 117         | 53            | P   |
| 4   | 5570.00         | 7.55        | 82.51          | 90.06          | 200.00         | -109.94     | Average  | 117         | 53            | P   |
| 5   | 5570.00         | 7.55        | 94.12          | 101.67         | 200.00         | -98.33      | Peak     | 117         | 53            | P   |
| 6   | 5725.00         | 7.39        | 56.91          | 64.30          | 68.20          | -3.90       | Peak     | 117         | 53            | P   |
| 7   | 11140.00        | 16.04       | 29.36          | 45.40          | 54.00          | -8.60       | Average  | 100         | 154           | P   |
| 8   | 11140.00        | 16.04       | 43.92          | 59.96          | 74.00          | -14.04      | Peak     | 100         | 154           | P   |
| 9   | 16710.00        | 21.94       | 41.87          | 63.81          | 68.20          | -4.39       | Peak     | 100         | 227           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

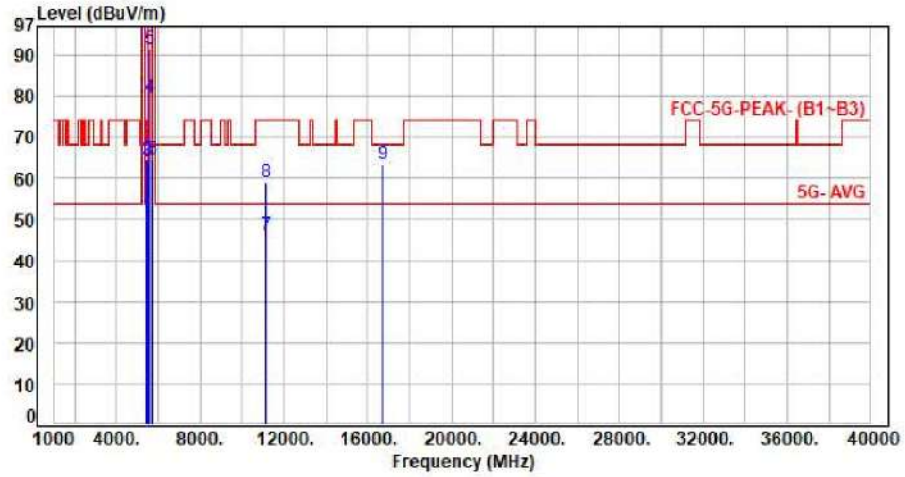


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 43.17          | 50.89          | 54.00          | -3.11       | Average  | 119         | 47            | P   |
| 2   | 5460.00         | 7.72        | 56.79          | 64.51          | 74.00          | -9.49       | Peak     | 119         | 47            | P   |
| 3   | 5470.00         | 7.72        | 56.53          | 64.25          | 68.20          | -3.95       | Peak     | 119         | 47            | P   |
| 4   | 5570.00         | 7.55        | 71.97          | 79.52          | 200.00         | -120.48     | Average  | 119         | 47            | P   |
| 5   | 5570.00         | 7.55        | 83.77          | 91.32          | 200.00         | -108.68     | Peak     | 119         | 47            | P   |
| 6   | 5725.00         | 7.39        | 57.21          | 64.60          | 68.20          | -3.60       | Peak     | 119         | 47            | P   |
| 7   | 11140.00        | 16.04       | 29.96          | 46.00          | 54.00          | -8.00       | Average  | 100         | 29            | P   |
| 8   | 11140.00        | 16.04       | 42.87          | 58.91          | 74.00          | -15.09      | Peak     | 100         | 29            | P   |
| 9   | 16710.00        | 21.94       | 41.54          | 63.48          | 68.20          | -4.72       | Peak     | 100         | 150           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

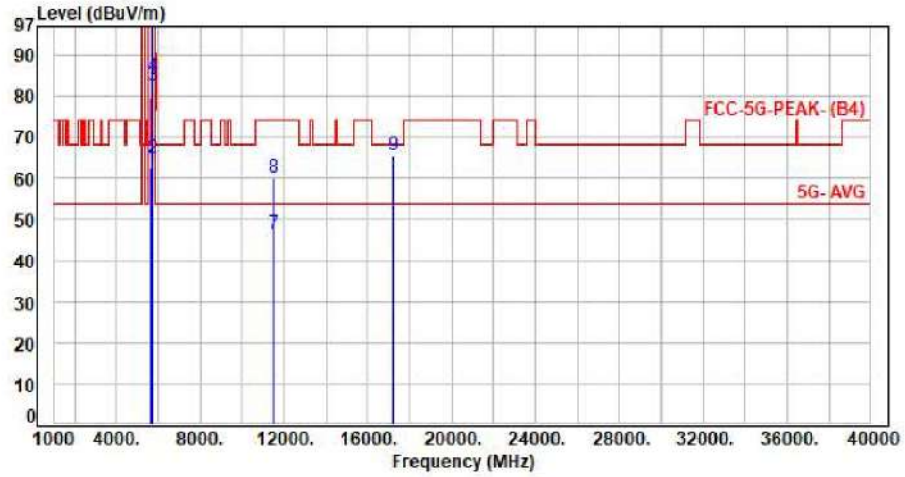


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 55.18          | 62.72          | 68.20          | -5.48       | Peak     | 100         | 50            | P   |
| 2   | 5700.00         | 7.41        | 57.36          | 64.77          | 105.20         | -40.43      | Peak     | 100         | 50            | P   |
| 3   | 5720.00         | 7.39        | 75.37          | 82.76          | 110.80         | -28.04      | Peak     | 100         | 50            | P   |
| 4   | 5725.00         | 7.39        | 77.32          | 84.71          | 122.20         | -37.49      | Peak     | 100         | 50            | P   |
| 5   | 5745.00         | 7.38        | 105.67         | 113.05         | 200.00         | -86.95      | Average  | 100         | 50            | P   |
| 6   | 5745.00         | 7.38        | 115.45         | 122.83         | 200.00         | -77.17      | Peak     | 100         | 50            | P   |
| 7   | 11490.00        | 16.75       | 29.65          | 46.40          | 54.00          | -7.60       | Average  | 100         | 154           | P   |
| 8   | 11490.00        | 16.75       | 43.46          | 60.21          | 74.00          | -13.79      | Peak     | 100         | 154           | P   |
| 9   | 17235.00        | 24.83       | 40.88          | 65.71          | 68.20          | -2.49       | Peak     | 100         | 229           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

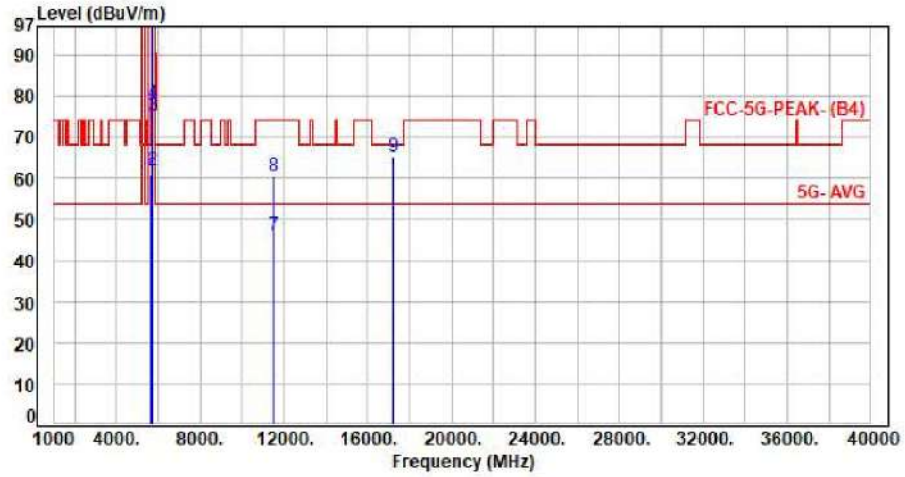


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 53.43          | 60.97          | 68.20          | -7.23       | Peak     | 100         | 20            | P   |
| 2   | 5700.00         | 7.41        | 54.54          | 61.95          | 105.20         | -43.25      | Peak     | 100         | 20            | P   |
| 3   | 5720.00         | 7.39        | 67.90          | 75.29          | 110.80         | -35.51      | Peak     | 100         | 20            | P   |
| 4   | 5725.00         | 7.39        | 70.78          | 78.17          | 122.20         | -44.03      | Peak     | 100         | 20            | P   |
| 5   | 5745.00         | 7.38        | 98.26          | 105.64         | 200.00         | -94.36      | Average  | 100         | 20            | P   |
| 6   | 5745.00         | 7.38        | 108.18         | 115.56         | 200.00         | -84.44      | Peak     | 100         | 20            | P   |
| 7   | 11490.00        | 16.75       | 29.29          | 46.04          | 54.00          | -7.96       | Average  | 100         | 29            | P   |
| 8   | 11490.00        | 16.75       | 43.75          | 60.50          | 74.00          | -13.50      | Peak     | 100         | 29            | P   |
| 9   | 17235.00        | 24.83       | 40.48          | 65.31          | 68.20          | -2.89       | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

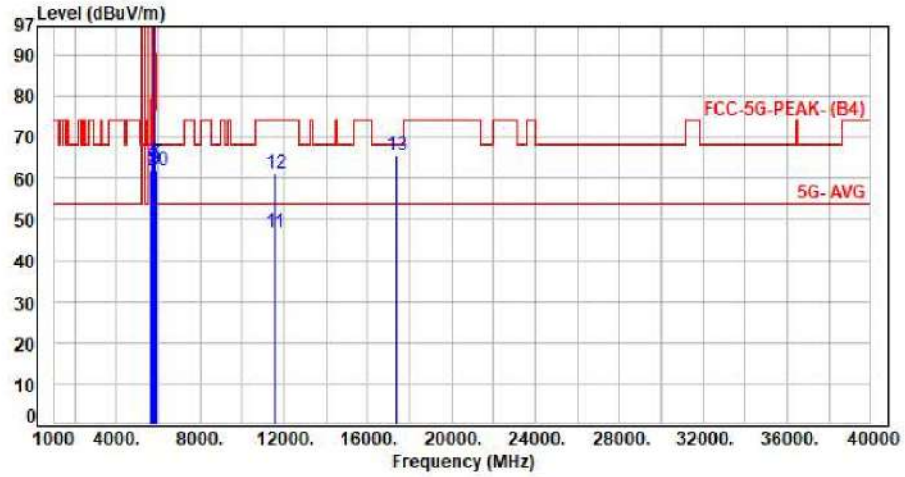


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 54.24          | 61.78          | 68.20          | -6.42       | Peak     | 100         | 51            | P   |
| 2   | 5700.00         | 7.41        | 54.38          | 61.79          | 105.20         | -43.41      | Peak     | 100         | 51            | P   |
| 3   | 5720.00         | 7.39        | 55.25          | 62.64          | 110.80         | -48.16      | Peak     | 100         | 51            | P   |
| 4   | 5725.00         | 7.39        | 56.63          | 64.02          | 122.20         | -58.18      | Peak     | 100         | 51            | P   |
| 5   | 5785.00         | 7.34        | 105.79         | 113.13         | 200.00         | -86.87      | Average  | 100         | 51            | P   |
| 6   | 5785.00         | 7.34        | 116.43         | 123.77         | 200.00         | -76.23      | Peak     | 100         | 51            | P   |
| 7   | 5850.00         | 7.30        | 56.63          | 63.93          | 122.20         | -58.27      | Peak     | 100         | 51            | P   |
| 8   | 5855.00         | 7.32        | 55.10          | 62.42          | 110.80         | -48.38      | Peak     | 100         | 51            | P   |
| 9   | 5875.00         | 7.39        | 54.77          | 62.16          | 105.20         | -43.04      | Peak     | 100         | 51            | P   |
| 10  | 5925.00         | 7.51        | 54.52          | 62.03          | 68.20          | -6.17       | Peak     | 100         | 51            | P   |
| 11  | 11570.00        | 17.65       | 29.28          | 46.93          | 54.00          | -7.07       | Average  | 100         | 152           | P   |
| 12  | 11570.00        | 17.65       | 43.41          | 61.06          | 74.00          | -12.94      | Peak     | 100         | 152           | P   |
| 13  | 17355.00        | 25.69       | 40.01          | 65.70          | 68.20          | -2.50       | Peak     | 100         | 230           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Horizontal

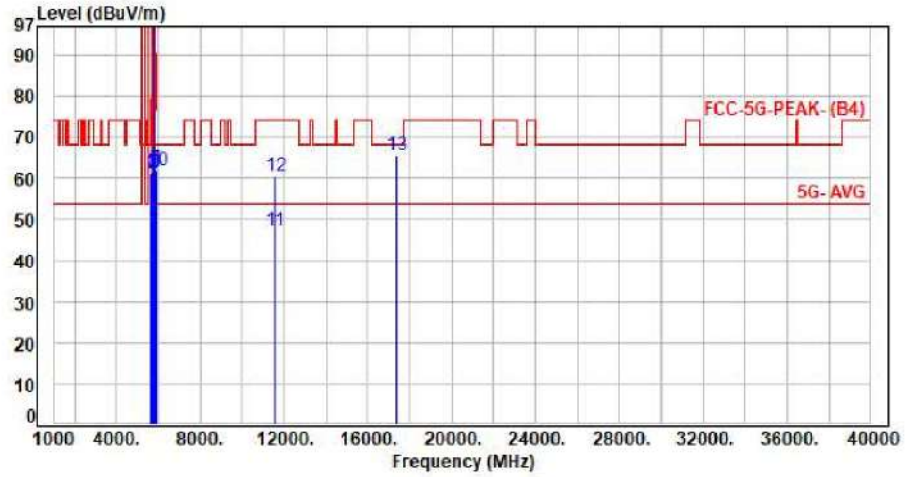


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 53.56          | 61.10          | 68.20          | -7.10       | Peak     | 100         | 48            | P   |
| 2   | 5700.00         | 7.41        | 53.82          | 61.23          | 105.20         | -43.97      | Peak     | 100         | 48            | P   |
| 3   | 5720.00         | 7.39        | 54.12          | 61.51          | 110.80         | -49.29      | Peak     | 100         | 48            | P   |
| 4   | 5725.00         | 7.39        | 53.74          | 61.13          | 122.20         | -61.07      | Peak     | 100         | 48            | P   |
| 5   | 5785.00         | 7.34        | 98.26          | 105.60         | 200.00         | -94.40      | Average  | 100         | 48            | P   |
| 6   | 5785.00         | 7.34        | 107.93         | 115.27         | 200.00         | -84.73      | Peak     | 100         | 48            | P   |
| 7   | 5850.00         | 7.30        | 55.21          | 62.51          | 122.20         | -59.69      | Peak     | 100         | 48            | P   |
| 8   | 5855.00         | 7.32        | 54.19          | 61.51          | 110.80         | -49.29      | Peak     | 100         | 48            | P   |
| 9   | 5875.00         | 7.39        | 53.90          | 61.29          | 105.20         | -43.91      | Peak     | 100         | 48            | P   |
| 10  | 5925.00         | 7.51        | 54.35          | 61.86          | 68.20          | -6.34       | Peak     | 100         | 48            | P   |
| 11  | 11570.00        | 17.65       | 29.64          | 47.29          | 54.00          | -6.71       | Average  | 100         | 25            | P   |
| 12  | 11570.00        | 17.65       | 42.94          | 60.59          | 74.00          | -13.41      | Peak     | 100         | 25            | P   |
| 13  | 17355.00        | 25.69       | 39.99          | 65.68          | 68.20          | -2.52       | Peak     | 100         | 144           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

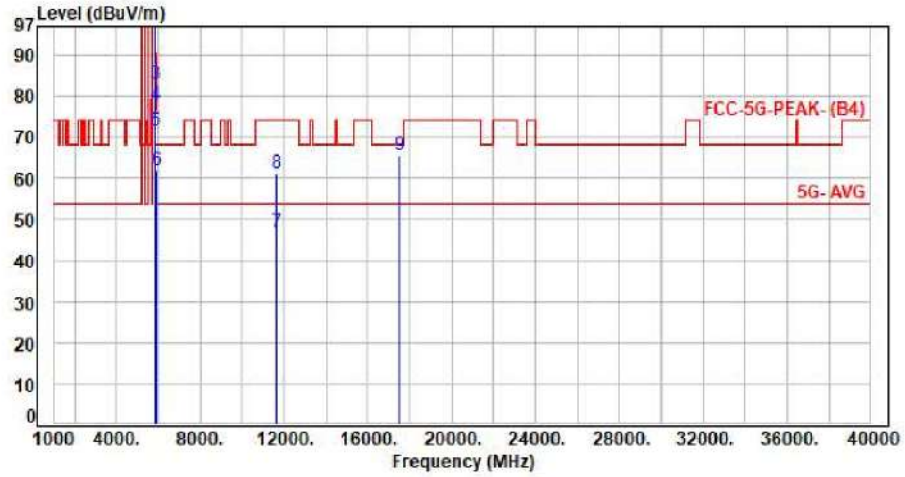


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.32        | 105.80         | 113.12         | 200.00         | -86.88      | Average  | 101         | 161           | P   |
| 2   | 5825.00         | 7.32        | 115.52         | 122.84         | 200.00         | -77.16      | Peak     | 101         | 161           | P   |
| 3   | 5850.00         | 7.30        | 75.54          | 82.84          | 122.20         | -39.36      | Peak     | 101         | 161           | P   |
| 4   | 5855.00         | 7.32        | 70.58          | 77.90          | 110.80         | -32.90      | Peak     | 101         | 161           | P   |
| 5   | 5875.00         | 7.39        | 64.03          | 71.42          | 105.20         | -33.78      | Peak     | 101         | 161           | P   |
| 6   | 5925.00         | 7.51        | 54.63          | 62.14          | 68.20          | -6.06       | Peak     | 101         | 161           | P   |
| 7   | 11650.00        | 17.74       | 29.26          | 47.00          | 54.00          | -7.00       | Average  | 100         | 158           | P   |
| 8   | 11650.00        | 17.74       | 43.46          | 61.20          | 74.00          | -12.80      | Peak     | 100         | 158           | P   |
| 9   | 17475.00        | 26.42       | 39.08          | 65.50          | 68.20          | -2.70       | Peak     | 100         | 225           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

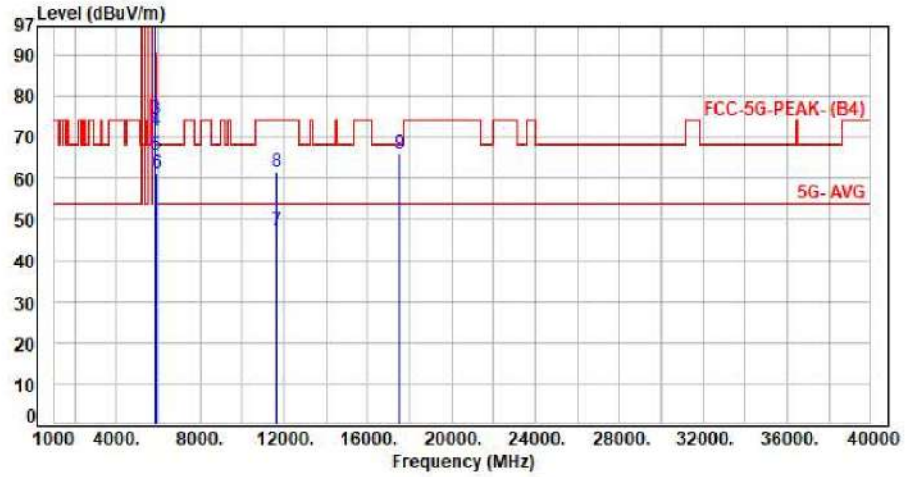


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.32        | 98.69          | 106.01         | 200.00         | -93.99      | Average  | 107         | 49            | P   |
| 2   | 5825.00         | 7.32        | 108.31         | 115.63         | 200.00         | -84.37      | Peak     | 107         | 49            | P   |
| 3   | 5850.00         | 7.30        | 67.07          | 74.37          | 122.20         | -47.83      | Peak     | 107         | 49            | P   |
| 4   | 5855.00         | 7.32        | 64.24          | 71.56          | 110.80         | -39.24      | Peak     | 107         | 49            | P   |
| 5   | 5875.00         | 7.39        | 58.12          | 65.51          | 105.20         | -39.69      | Peak     | 107         | 49            | P   |
| 6   | 5925.00         | 7.51        | 53.79          | 61.30          | 68.20          | -6.90       | Peak     | 107         | 49            | P   |
| 7   | 11650.00        | 17.74       | 29.48          | 47.22          | 54.00          | -6.78       | Average  | 100         | 26            | P   |
| 8   | 11650.00        | 17.74       | 43.74          | 61.48          | 74.00          | -12.52      | Peak     | 100         | 26            | P   |
| 9   | 17475.00        | 26.42       | 39.51          | 65.93          | 68.20          | -2.27       | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

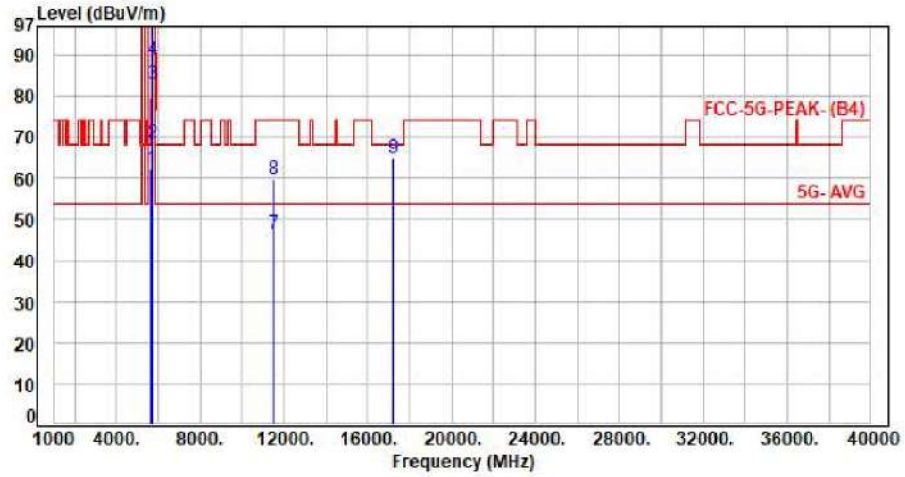


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 54.77          | 62.31          | 68.20          | -5.89       | Peak     | 100         | 52            | P   |
| 2   | 5700.00         | 7.41        | 61.32          | 68.73          | 105.20         | -36.47      | Peak     | 100         | 52            | P   |
| 3   | 5720.00         | 7.39        | 75.77          | 83.16          | 110.80         | -27.64      | Peak     | 100         | 52            | P   |
| 4   | 5725.00         | 7.39        | 81.36          | 88.75          | 122.20         | -33.45      | Peak     | 100         | 52            | P   |
| 5   | 5745.00         | 7.38        | 105.69         | 113.07         | 200.00         | -86.93      | Average  | 100         | 52            | P   |
| 6   | 5745.00         | 7.38        | 117.49         | 124.87         | 200.00         | -75.13      | Peak     | 100         | 52            | P   |
| 7   | 11490.00        | 16.75       | 29.66          | 46.41          | 54.00          | -7.59       | Average  | 100         | 164           | P   |
| 8   | 11490.00        | 16.75       | 43.10          | 59.85          | 74.00          | -14.15      | Peak     | 100         | 164           | P   |
| 9   | 17235.00        | 24.83       | 39.95          | 64.78          | 68.20          | -3.42       | Peak     | 100         | 228           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

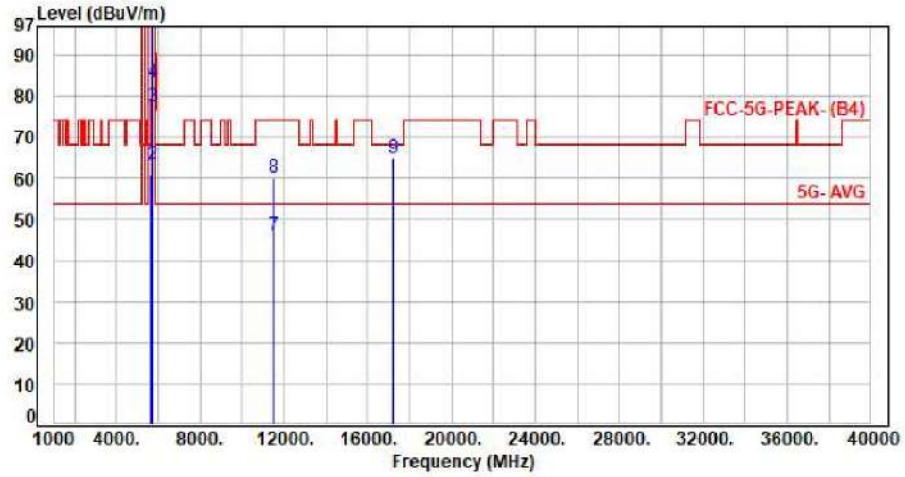


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 53.44          | 60.98          | 68.20          | -7.22       | Peak     | 105         | 48            | P   |
| 2   | 5700.00         | 7.41        | 56.01          | 63.42          | 105.20         | -41.78      | Peak     | 105         | 48            | P   |
| 3   | 5720.00         | 7.39        | 70.03          | 77.42          | 110.80         | -33.38      | Peak     | 105         | 48            | P   |
| 4   | 5725.00         | 7.39        | 76.09          | 83.48          | 122.20         | -38.72      | Peak     | 105         | 48            | P   |
| 5   | 5745.00         | 7.38        | 98.16          | 105.54         | 200.00         | -94.46      | Average  | 105         | 48            | P   |
| 6   | 5745.00         | 7.38        | 110.42         | 117.80         | 200.00         | -82.20      | Peak     | 105         | 48            | P   |
| 7   | 11490.00        | 16.75       | 29.32          | 46.07          | 54.00          | -7.93       | Average  | 100         | 27            | P   |
| 8   | 11490.00        | 16.75       | 43.42          | 60.17          | 74.00          | -13.83      | Peak     | 100         | 27            | P   |
| 9   | 17235.00        | 24.83       | 40.10          | 64.93          | 68.20          | -3.27       | Peak     | 100         | 141           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

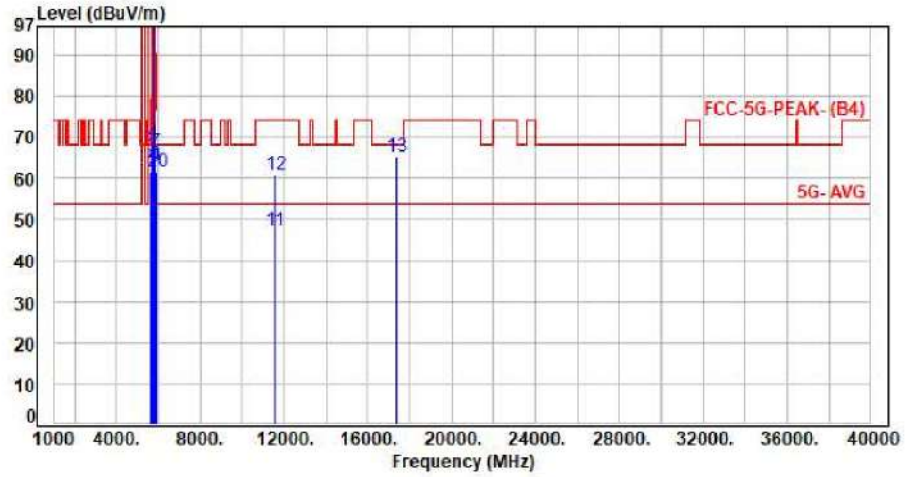


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 54.22          | 61.76          | 68.20          | -6.44       | Peak     | 100         | 51            | P   |
| 2   | 5700.00         | 7.41        | 54.16          | 61.57          | 105.20         | -43.63      | Peak     | 100         | 51            | P   |
| 3   | 5720.00         | 7.39        | 57.82          | 65.21          | 110.80         | -45.59      | Peak     | 100         | 51            | P   |
| 4   | 5725.00         | 7.39        | 61.22          | 68.61          | 122.20         | -53.59      | Peak     | 100         | 51            | P   |
| 5   | 5785.00         | 7.34        | 105.45         | 112.79         | 200.00         | -87.21      | Average  | 100         | 51            | P   |
| 6   | 5785.00         | 7.34        | 118.36         | 125.70         | 200.00         | -74.30      | Peak     | 100         | 51            | P   |
| 7   | 5850.00         | 7.30        | 59.21          | 66.51          | 122.20         | -55.69      | Peak     | 100         | 51            | P   |
| 8   | 5855.00         | 7.32        | 56.26          | 63.58          | 110.80         | -47.22      | Peak     | 100         | 51            | P   |
| 9   | 5875.00         | 7.39        | 55.14          | 62.53          | 105.20         | -42.67      | Peak     | 100         | 51            | P   |
| 10  | 5925.00         | 7.51        | 54.13          | 61.64          | 68.20          | -6.56       | Peak     | 100         | 51            | P   |
| 11  | 11570.00        | 17.65       | 29.63          | 47.28          | 54.00          | -6.72       | Average  | 100         | 153           | P   |
| 12  | 11570.00        | 17.65       | 43.18          | 60.83          | 74.00          | -13.17      | Peak     | 100         | 153           | P   |
| 13  | 17355.00        | 25.69       | 39.55          | 65.24          | 68.20          | -2.96       | Peak     | 100         | 227           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

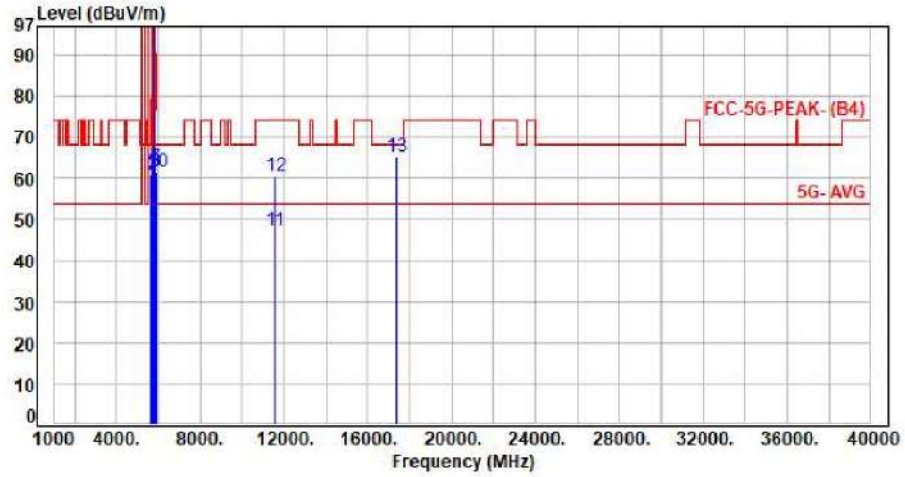


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 53.31          | 60.85          | 68.20          | -7.35       | Peak     | 103         | 49            | P   |
| 2   | 5700.00         | 7.41        | 53.54          | 60.95          | 105.20         | -44.25      | Peak     | 103         | 49            | P   |
| 3   | 5720.00         | 7.39        | 53.83          | 61.22          | 110.80         | -49.58      | Peak     | 103         | 49            | P   |
| 4   | 5725.00         | 7.39        | 55.33          | 62.72          | 122.20         | -59.48      | Peak     | 103         | 49            | P   |
| 5   | 5785.00         | 7.34        | 97.68          | 105.02         | 200.00         | -94.98      | Average  | 103         | 49            | P   |
| 6   | 5785.00         | 7.34        | 109.40         | 116.74         | 200.00         | -83.26      | Peak     | 103         | 49            | P   |
| 7   | 5850.00         | 7.30        | 55.29          | 62.59          | 122.20         | -59.61      | Peak     | 103         | 49            | P   |
| 8   | 5855.00         | 7.32        | 54.43          | 61.75          | 110.80         | -49.05      | Peak     | 103         | 49            | P   |
| 9   | 5875.00         | 7.39        | 54.07          | 61.46          | 105.20         | -43.74      | Peak     | 103         | 49            | P   |
| 10  | 5925.00         | 7.51        | 53.94          | 61.45          | 68.20          | -6.75       | Peak     | 103         | 49            | P   |
| 11  | 11570.00        | 17.65       | 29.64          | 47.29          | 54.00          | -6.71       | Average  | 100         | 28            | P   |
| 12  | 11570.00        | 17.65       | 42.82          | 60.47          | 74.00          | -13.53      | Peak     | 100         | 28            | P   |
| 13  | 17355.00        | 25.69       | 39.74          | 65.43          | 68.20          | -2.77       | Peak     | 100         | 145           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

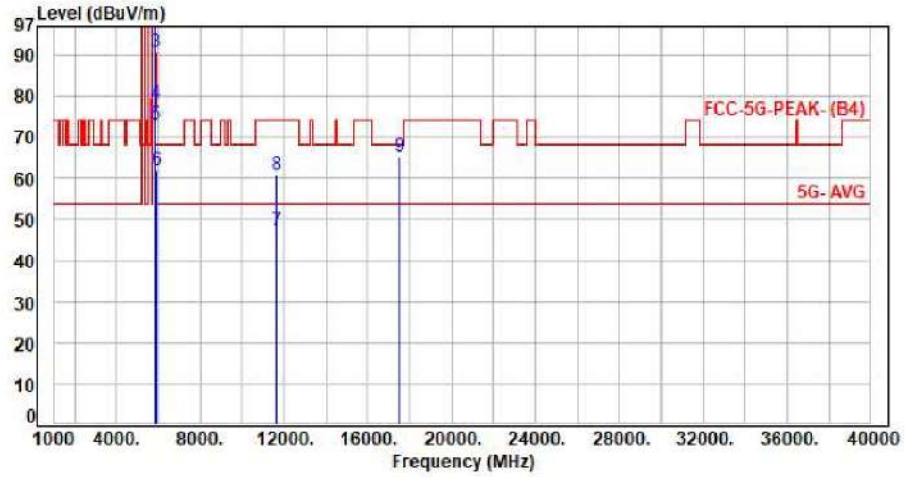


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.32        | 104.81         | 112.13         | 200.00         | -87.87      | Average  | 100         | 184           | P   |
| 2   | 5825.00         | 7.32        | 117.12         | 124.44         | 200.00         | -75.56      | Peak     | 100         | 184           | P   |
| 3   | 5850.00         | 7.30        | 83.54          | 90.84          | 122.20         | -31.36      | Peak     | 100         | 184           | P   |
| 4   | 5855.00         | 7.32        | 70.83          | 78.15          | 110.80         | -32.65      | Peak     | 100         | 184           | P   |
| 5   | 5875.00         | 7.39        | 65.66          | 73.05          | 105.20         | -32.15      | Peak     | 100         | 184           | P   |
| 6   | 5925.00         | 7.51        | 54.28          | 61.79          | 68.20          | -6.41       | Peak     | 100         | 184           | P   |
| 7   | 11650.00        | 17.74       | 29.44          | 47.18          | 54.00          | -6.82       | Average  | 100         | 154           | P   |
| 8   | 11650.00        | 17.74       | 43.29          | 61.03          | 74.00          | -12.97      | Peak     | 100         | 154           | P   |
| 9   | 17475.00        | 26.42       | 38.93          | 65.35          | 68.20          | -2.85       | Peak     | 100         | 227           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

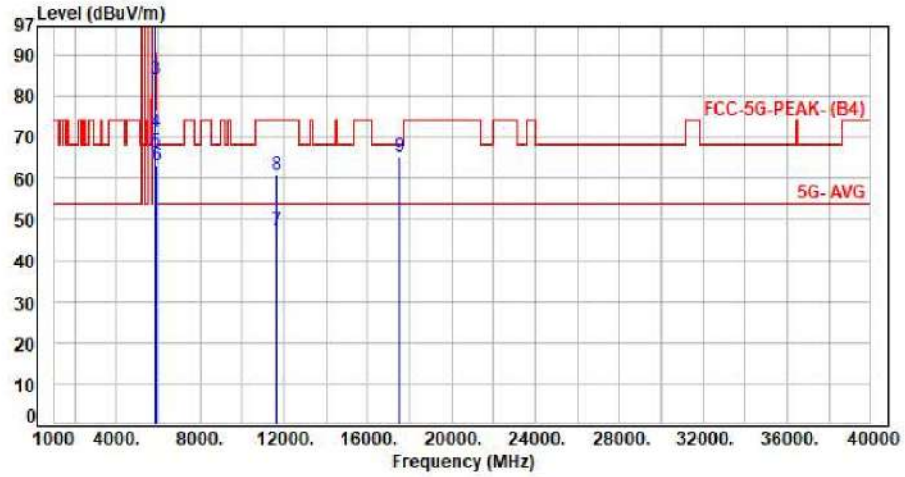


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.32        | 97.63          | 104.95         | 200.00         | -95.05      | Average  | 106         | 18            | P   |
| 2   | 5825.00         | 7.32        | 109.62         | 116.94         | 200.00         | -83.06      | Peak     | 106         | 18            | P   |
| 3   | 5850.00         | 7.30        | 76.77          | 84.07          | 122.20         | -38.13      | Peak     | 106         | 18            | P   |
| 4   | 5855.00         | 7.32        | 63.86          | 71.18          | 110.80         | -39.62      | Peak     | 106         | 18            | P   |
| 5   | 5875.00         | 7.39        | 58.86          | 66.25          | 105.20         | -38.95      | Peak     | 106         | 18            | P   |
| 6   | 5925.00         | 7.51        | 55.48          | 62.99          | 68.20          | -5.21       | Peak     | 106         | 18            | P   |
| 7   | 11650.00        | 17.74       | 29.38          | 47.12          | 54.00          | -6.88       | Average  | 100         | 27            | P   |
| 8   | 11650.00        | 17.74       | 43.26          | 61.00          | 74.00          | -13.00      | Peak     | 100         | 27            | P   |
| 9   | 17475.00        | 26.42       | 38.85          | 65.27          | 68.20          | -2.93       | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

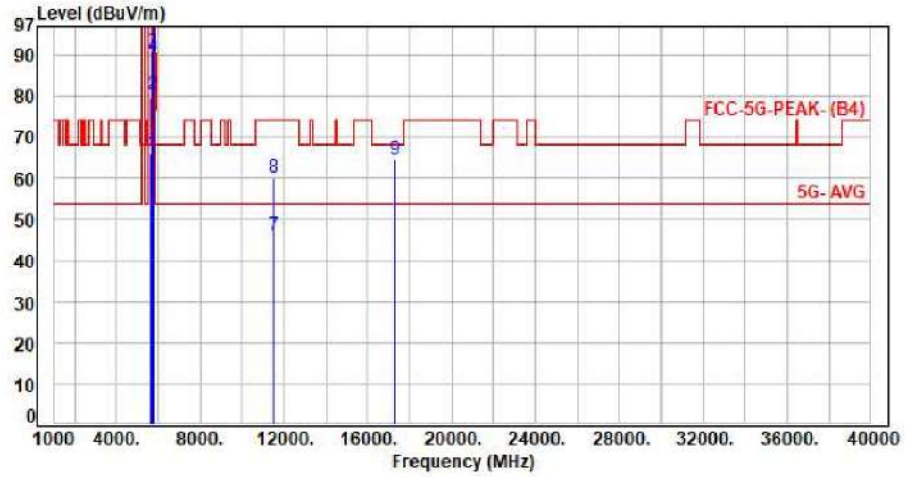


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 58.60          | 66.14          | 68.20          | -2.06       | Peak     | 100         | 50            | P   |
| 2   | 5700.00         | 7.41        | 73.12          | 80.53          | 105.20         | -24.67      | Peak     | 100         | 50            | P   |
| 3   | 5720.00         | 7.39        | 83.25          | 90.64          | 110.80         | -20.16      | Peak     | 100         | 50            | P   |
| 4   | 5725.00         | 7.39        | 82.42          | 89.81          | 122.20         | -32.39      | Peak     | 100         | 50            | P   |
| 5   | 5755.00         | 7.36        | 102.58         | 109.94         | 200.00         | -90.06      | Average  | 100         | 50            | P   |
| 6   | 5755.00         | 7.36        | 115.32         | 122.68         | 200.00         | -77.32      | Peak     | 100         | 50            | P   |
| 7   | 11510.00        | 16.90       | 29.06          | 45.96          | 54.00          | -8.04       | Average  | 100         | 156           | P   |
| 8   | 11510.00        | 16.90       | 43.18          | 60.08          | 74.00          | -13.92      | Peak     | 100         | 156           | P   |
| 9   | 17265.00        | 24.97       | 39.47          | 64.44          | 68.20          | -3.76       | Peak     | 100         | 223           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

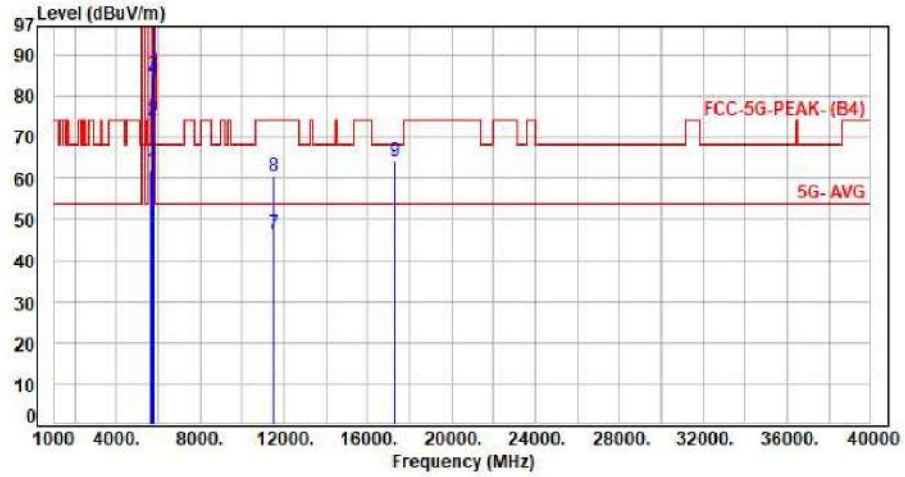


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 54.41          | 61.95          | 68.20          | -6.25       | Peak     | 104         | 17            | P   |
| 2   | 5700.00         | 7.41        | 66.72          | 74.13          | 105.20         | -31.07      | Peak     | 104         | 17            | P   |
| 3   | 5720.00         | 7.39        | 77.73          | 85.12          | 110.80         | -25.68      | Peak     | 104         | 17            | P   |
| 4   | 5725.00         | 7.39        | 76.66          | 84.05          | 122.20         | -38.15      | Peak     | 104         | 17            | P   |
| 5   | 5755.00         | 7.36        | 95.47          | 102.83         | 200.00         | -97.17      | Average  | 104         | 17            | P   |
| 6   | 5755.00         | 7.36        | 107.85         | 115.21         | 200.00         | -84.79      | Peak     | 104         | 17            | P   |
| 7   | 11510.00        | 16.90       | 29.55          | 46.45          | 54.00          | -7.55       | Average  | 100         | 29            | P   |
| 8   | 11510.00        | 16.90       | 43.69          | 60.59          | 74.00          | -13.41      | Peak     | 100         | 29            | P   |
| 9   | 17265.00        | 24.97       | 39.26          | 64.23          | 68.20          | -3.97       | Peak     | 100         | 142           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

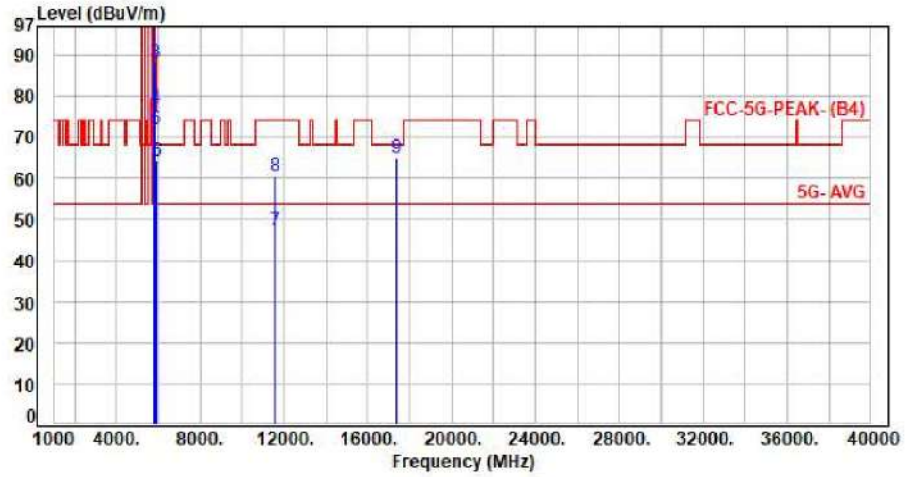


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5795.00         | 7.34        | 102.62         | 109.96         | 200.00         | -90.04      | Average  | 100         | 54            | P   |
| 2   | 5795.00         | 7.34        | 115.73         | 123.07         | 200.00         | -76.93      | Peak     | 100         | 54            | P   |
| 3   | 5850.00         | 7.30        | 80.78          | 88.08          | 122.20         | -34.12      | Peak     | 100         | 54            | P   |
| 4   | 5855.00         | 7.32        | 69.89          | 77.21          | 110.80         | -33.59      | Peak     | 100         | 54            | P   |
| 5   | 5875.00         | 7.39        | 64.55          | 71.94          | 105.20         | -33.26      | Peak     | 100         | 54            | P   |
| 6   | 5925.00         | 7.51        | 56.57          | 64.08          | 68.20          | -4.12       | Peak     | 100         | 54            | P   |
| 7   | 11590.00        | 17.90       | 29.34          | 47.24          | 54.00          | -6.76       | Average  | 100         | 155           | P   |
| 8   | 11590.00        | 17.90       | 42.75          | 60.65          | 74.00          | -13.35      | Peak     | 100         | 155           | P   |
| 9   | 17385.00        | 25.89       | 39.16          | 65.05          | 68.20          | -3.15       | Peak     | 100         | 226           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

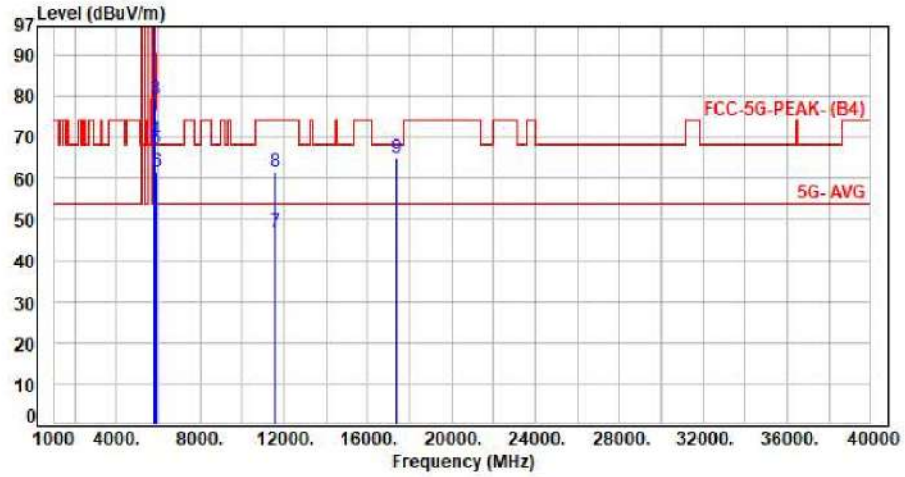


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5795.00         | 7.34        | 95.33          | 102.67         | 200.00         | -97.33      | Average  | 100         | 48            | P   |
| 2   | 5795.00         | 7.34        | 107.82         | 115.16         | 200.00         | -84.84      | Peak     | 100         | 48            | P   |
| 3   | 5850.00         | 7.30        | 72.02          | 79.32          | 122.20         | -42.88      | Peak     | 100         | 48            | P   |
| 4   | 5855.00         | 7.32        | 62.05          | 69.37          | 110.80         | -41.43      | Peak     | 100         | 48            | P   |
| 5   | 5875.00         | 7.39        | 59.74          | 67.13          | 105.20         | -38.07      | Peak     | 100         | 48            | P   |
| 6   | 5925.00         | 7.51        | 54.02          | 61.53          | 68.20          | -6.67       | Peak     | 100         | 48            | P   |
| 7   | 11590.00        | 17.90       | 29.11          | 47.01          | 54.00          | -6.99       | Average  | 100         | 27            | P   |
| 8   | 11590.00        | 17.90       | 43.62          | 61.52          | 74.00          | -12.48      | Peak     | 100         | 27            | P   |
| 9   | 17385.00        | 25.89       | 38.84          | 64.73          | 68.20          | -3.47       | Peak     | 100         | 139           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

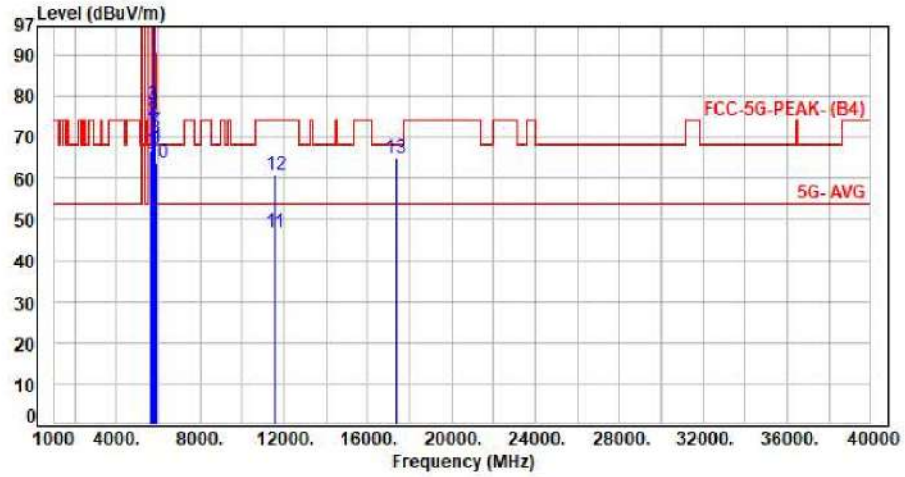


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 59.21          | 66.75          | 68.20          | -1.45       | Peak     | 100         | 50            | P   |
| 2   | 5700.00         | 7.41        | 66.90          | 74.31          | 105.20         | -30.89      | Peak     | 100         | 50            | P   |
| 3   | 5720.00         | 7.39        | 70.31          | 77.70          | 110.80         | -33.10      | Peak     | 100         | 50            | P   |
| 4   | 5725.00         | 7.39        | 70.08          | 77.47          | 122.20         | -44.73      | Peak     | 100         | 50            | P   |
| 5   | 5775.00         | 7.35        | 97.30          | 104.65         | 200.00         | -95.35      | Average  | 100         | 50            | P   |
| 6   | 5775.00         | 7.35        | 110.57         | 117.92         | 200.00         | -82.08      | Peak     | 100         | 50            | P   |
| 7   | 5850.00         | 7.30        | 64.26          | 71.56          | 122.20         | -50.64      | Peak     | 100         | 50            | P   |
| 8   | 5855.00         | 7.32        | 62.33          | 69.65          | 110.80         | -41.15      | Peak     | 100         | 50            | P   |
| 9   | 5875.00         | 7.39        | 59.62          | 67.01          | 105.20         | -38.19      | Peak     | 100         | 50            | P   |
| 10  | 5925.00         | 7.51        | 56.28          | 63.79          | 68.20          | -4.41       | Peak     | 100         | 50            | P   |
| 11  | 11550.00        | 17.40       | 29.60          | 47.00          | 54.00          | -7.00       | Average  | 100         | 153           | P   |
| 12  | 11550.00        | 17.40       | 43.34          | 60.74          | 74.00          | -13.26      | Peak     | 100         | 153           | P   |
| 13  | 17325.00        | 25.39       | 39.70          | 65.09          | 68.20          | -3.11       | Peak     | 100         | 229           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Horizontal

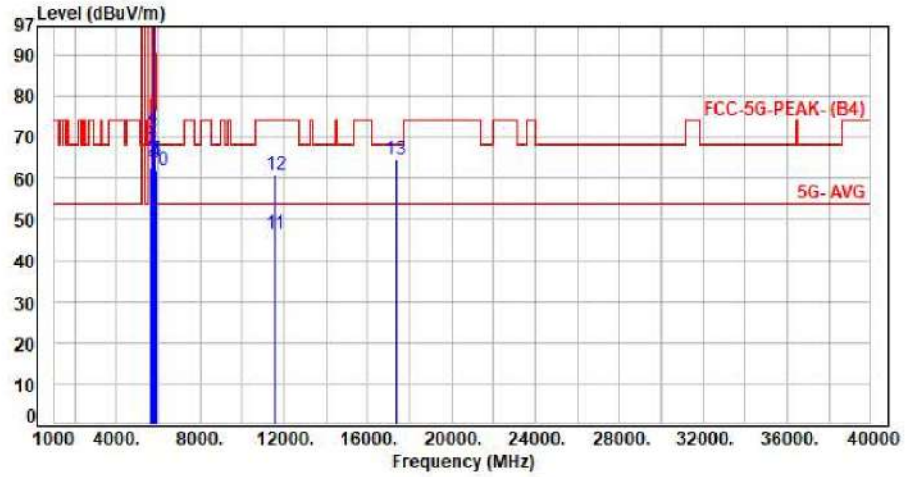


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5650.00         | 7.54        | 55.34          | 62.88          | 68.20          | -5.32       | Peak     | 100         | 19            | P   |
| 2   | 5700.00         | 7.41        | 59.68          | 67.09          | 105.20         | -38.11      | Peak     | 100         | 19            | P   |
| 3   | 5720.00         | 7.39        | 63.27          | 70.66          | 110.80         | -40.14      | Peak     | 100         | 19            | P   |
| 4   | 5725.00         | 7.39        | 64.90          | 72.29          | 122.20         | -49.91      | Peak     | 100         | 19            | P   |
| 5   | 5775.00         | 7.35        | 89.73          | 97.08          | 200.00         | -102.92     | Average  | 100         | 19            | P   |
| 6   | 5775.00         | 7.35        | 101.77         | 109.12         | 200.00         | -90.88      | Peak     | 100         | 19            | P   |
| 7   | 5850.00         | 7.30        | 57.34          | 64.64          | 122.20         | -57.56      | Peak     | 100         | 19            | P   |
| 8   | 5855.00         | 7.32        | 57.09          | 64.41          | 110.80         | -46.39      | Peak     | 100         | 19            | P   |
| 9   | 5875.00         | 7.39        | 56.36          | 63.75          | 105.20         | -41.45      | Peak     | 100         | 19            | P   |
| 10  | 5925.00         | 7.51        | 54.47          | 61.98          | 68.20          | -6.22       | Peak     | 100         | 19            | P   |
| 11  | 11550.00        | 17.40       | 29.06          | 46.46          | 54.00          | -7.54       | Average  | 100         | 26            | P   |
| 12  | 11550.00        | 17.40       | 43.62          | 61.02          | 74.00          | -12.98      | Peak     | 100         | 26            | P   |
| 13  | 17325.00        | 25.39       | 39.23          | 64.62          | 68.20          | -3.58       | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

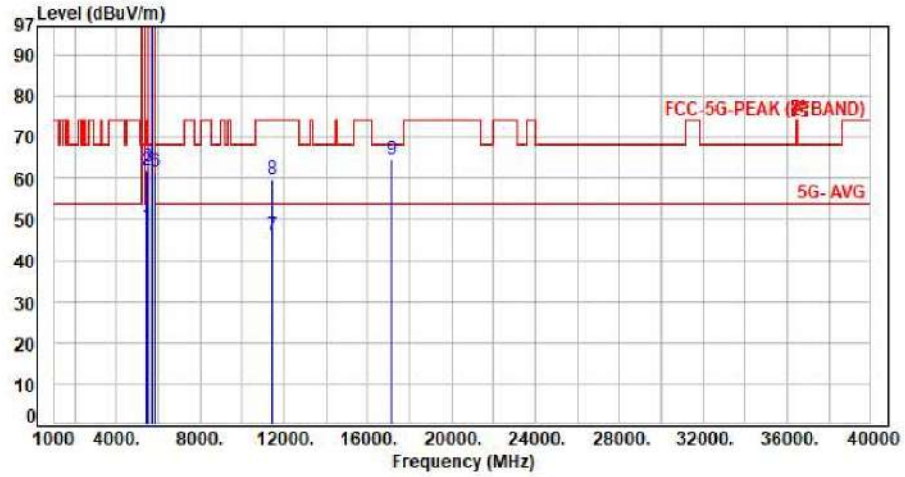


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.67          | 48.39          | 54.00          | -5.61       | Average  | 100         | 49            | P   |
| 2   | 5460.00         | 7.72        | 54.16          | 61.88          | 74.00          | -12.12      | Peak     | 100         | 49            | P   |
| 3   | 5470.00         | 7.72        | 54.87          | 62.59          | 68.20          | -5.61       | Peak     | 100         | 49            | P   |
| 4   | 5720.00         | 7.39        | 97.19          | 104.58         | 200.00         | -95.42      | Average  | 100         | 49            | P   |
| 5   | 5720.00         | 7.39        | 107.09         | 114.48         | 200.00         | -85.52      | Peak     | 100         | 49            | P   |
| 6   | 5850.00         | 7.30        | 54.32          | 61.62          | 68.20          | -6.58       | Peak     | 100         | 49            | P   |
| 7   | 11440.00        | 16.63       | 29.44          | 46.07          | 54.00          | -7.93       | Average  | 100         | 155           | P   |
| 8   | 11440.00        | 16.63       | 43.16          | 59.79          | 74.00          | -14.21      | Peak     | 100         | 155           | P   |
| 9   | 17160.00        | 24.42       | 40.11          | 64.53          | 68.20          | -3.67       | Peak     | 100         | 229           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

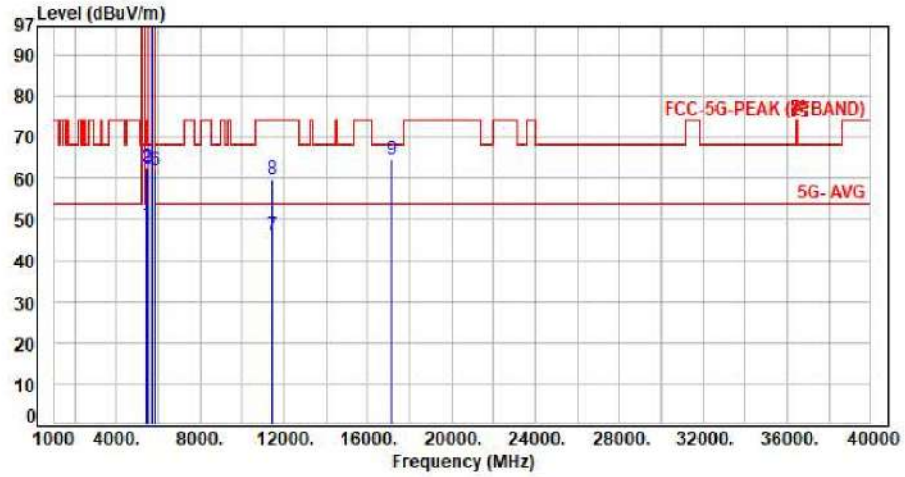


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.84          | 48.56          | 54.00          | -5.44       | Average  | 100         | 20            | P   |
| 2   | 5460.00         | 7.72        | 55.04          | 62.76          | 74.00          | -11.24      | Peak     | 100         | 20            | P   |
| 3   | 5470.00         | 7.72        | 54.65          | 62.37          | 68.20          | -5.83       | Peak     | 100         | 20            | P   |
| 4   | 5720.00         | 7.39        | 90.10          | 97.49          | 200.00         | -102.51     | Average  | 100         | 20            | P   |
| 5   | 5720.00         | 7.39        | 99.72          | 107.11         | 200.00         | -92.89      | Peak     | 100         | 20            | P   |
| 6   | 5850.00         | 7.30        | 54.77          | 62.07          | 68.20          | -6.13       | Peak     | 100         | 20            | P   |
| 7   | 11440.00        | 16.63       | 29.36          | 45.99          | 54.00          | -8.01       | Average  | 100         | 26            | P   |
| 8   | 11440.00        | 16.63       | 43.16          | 59.79          | 74.00          | -14.21      | Peak     | 100         | 26            | P   |
| 9   | 17160.00        | 24.42       | 40.04          | 64.46          | 68.20          | -3.74       | Peak     | 100         | 142           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

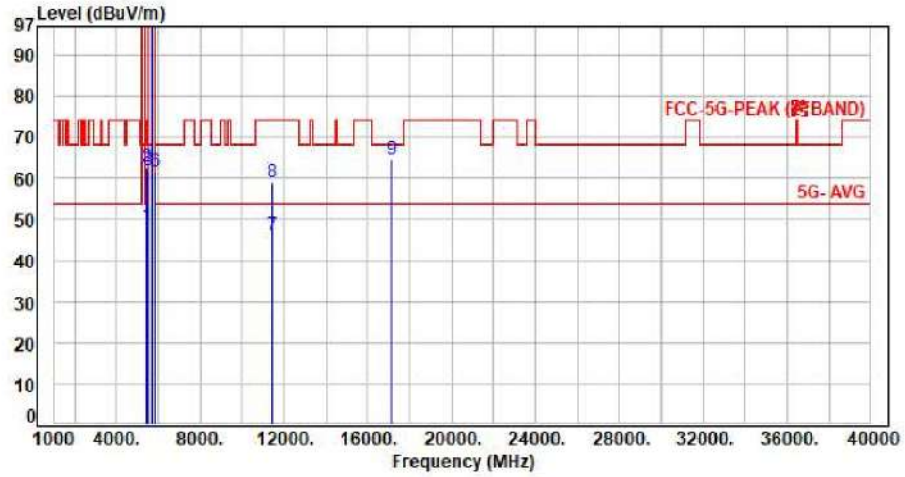


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.73          | 48.45          | 54.00          | -5.55       | Average  | 101         | 50            | P   |
| 2   | 5460.00         | 7.72        | 54.83          | 62.55          | 74.00          | -11.45      | Peak     | 101         | 50            | P   |
| 3   | 5470.00         | 7.72        | 54.29          | 62.01          | 68.20          | -6.19       | Peak     | 101         | 50            | P   |
| 4   | 5720.00         | 7.39        | 97.19          | 104.58         | 200.00         | -95.42      | Average  | 101         | 50            | P   |
| 5   | 5720.00         | 7.39        | 107.09         | 114.48         | 200.00         | -85.52      | Peak     | 101         | 50            | P   |
| 6   | 5850.00         | 7.30        | 54.48          | 61.78          | 68.20          | -6.42       | Peak     | 101         | 50            | P   |
| 7   | 11440.00        | 16.63       | 29.62          | 46.25          | 54.00          | -7.75       | Average  | 100         | 158           | P   |
| 8   | 11440.00        | 16.63       | 42.56          | 59.19          | 74.00          | -14.81      | Peak     | 100         | 158           | P   |
| 9   | 17160.00        | 24.42       | 40.16          | 64.58          | 68.20          | -3.62       | Peak     | 100         | 224           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

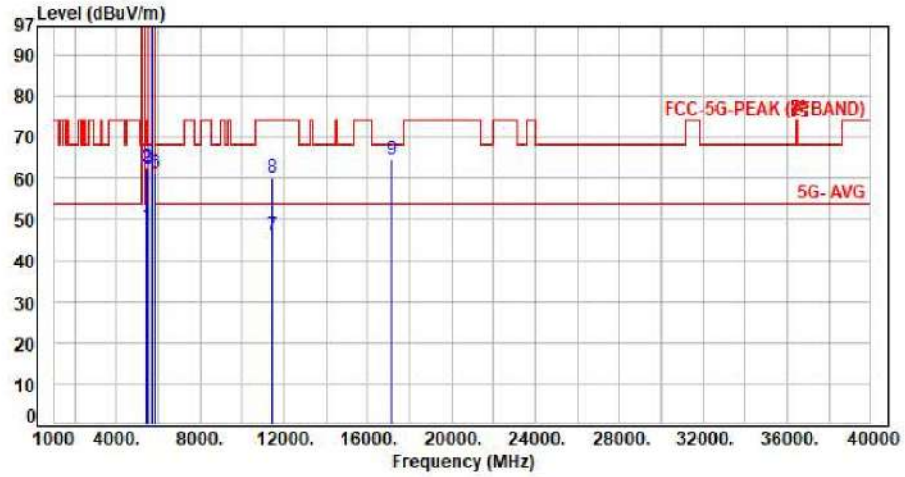


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.72          | 48.44          | 54.00          | -5.56       | Average  | 100         | 20            | P   |
| 2   | 5460.00         | 7.72        | 55.08          | 62.80          | 74.00          | -11.20      | Peak     | 100         | 20            | P   |
| 3   | 5470.00         | 7.72        | 54.62          | 62.34          | 68.20          | -5.86       | Peak     | 100         | 20            | P   |
| 4   | 5720.00         | 7.39        | 92.31          | 99.70          | 200.00         | -100.30     | Average  | 100         | 20            | P   |
| 5   | 5720.00         | 7.39        | 101.74         | 109.13         | 200.00         | -90.87      | Peak     | 100         | 20            | P   |
| 6   | 5850.00         | 7.30        | 53.92          | 61.22          | 68.20          | -6.98       | Peak     | 100         | 20            | P   |
| 7   | 11440.00        | 16.63       | 29.60          | 46.23          | 54.00          | -7.77       | Average  | 100         | 28            | P   |
| 8   | 11440.00        | 16.63       | 43.59          | 60.22          | 74.00          | -13.78      | Peak     | 100         | 28            | P   |
| 9   | 17160.00        | 24.42       | 40.29          | 64.71          | 68.20          | -3.49       | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

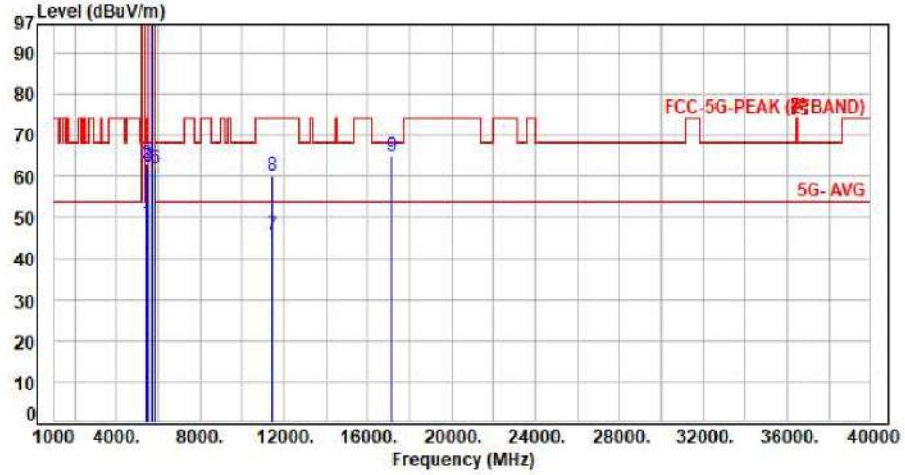


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 41.04          | 48.76          | 54.00          | -5.24       | Average  | 100         | 49            | P   |
| 2   | 5460.00         | 7.72        | 55.36          | 63.08          | 74.00          | -10.92      | Peak     | 100         | 49            | P   |
| 3   | 5470.00         | 7.72        | 54.74          | 62.46          | 68.20          | -5.74       | Peak     | 100         | 49            | P   |
| 4   | 5710.00         | 7.40        | 97.51          | 104.91         | 200.00         | -95.09      | Average  | 100         | 49            | P   |
| 5   | 5710.00         | 7.40        | 109.73         | 117.13         | 200.00         | -82.87      | Peak     | 100         | 49            | P   |
| 6   | 5850.00         | 7.30        | 54.77          | 62.07          | 68.20          | -6.13       | Peak     | 100         | 49            | P   |
| 7   | 11420.00        | 16.61       | 29.31          | 45.92          | 54.00          | -8.08       | Average  | 100         | 156           | P   |
| 8   | 11420.00        | 16.61       | 43.69          | 60.30          | 74.00          | -13.70      | Peak     | 100         | 156           | P   |
| 9   | 17130.00        | 24.21       | 40.74          | 64.95          | 68.20          | -3.25       | Peak     | 100         | 225           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Horizontal

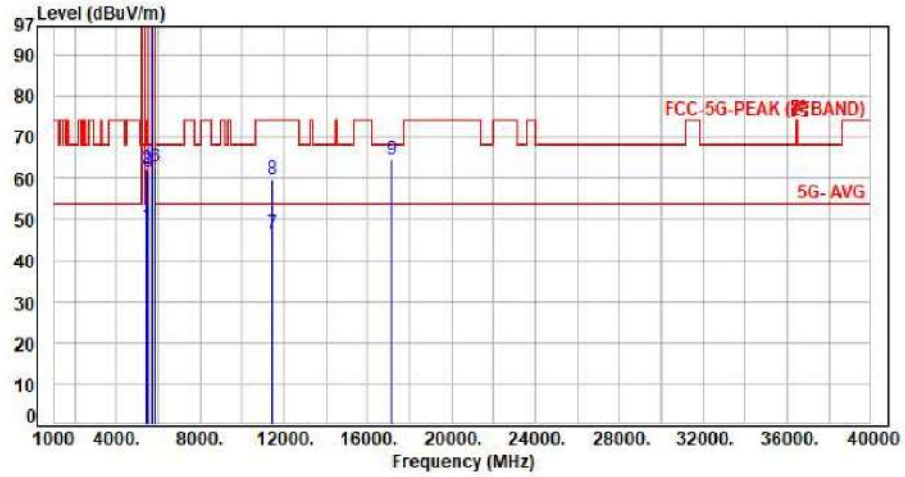


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.68          | 48.40          | 54.00          | -5.60       | Average  | 100         | 0             | P   |
| 2   | 5460.00         | 7.72        | 54.43          | 62.15          | 74.00          | -11.85      | Peak     | 100         | 0             | P   |
| 3   | 5470.00         | 7.72        | 54.00          | 61.72          | 68.20          | -6.48       | Peak     | 100         | 0             | P   |
| 4   | 5710.00         | 7.40        | 89.51          | 96.91          | 200.00         | -103.09     | Average  | 100         | 0             | P   |
| 5   | 5710.00         | 7.40        | 101.81         | 109.21         | 200.00         | -90.79      | Peak     | 100         | 0             | P   |
| 6   | 5850.00         | 7.30        | 55.43          | 62.73          | 68.20          | -5.47       | Peak     | 100         | 0             | P   |
| 7   | 11420.00        | 16.61       | 29.68          | 46.29          | 54.00          | -7.71       | Average  | 100         | 29            | P   |
| 8   | 11420.00        | 16.61       | 43.29          | 59.90          | 74.00          | -14.10      | Peak     | 100         | 29            | P   |
| 9   | 17130.00        | 24.21       | 40.41          | 64.62          | 68.20          | -3.58       | Peak     | 100         | 143           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

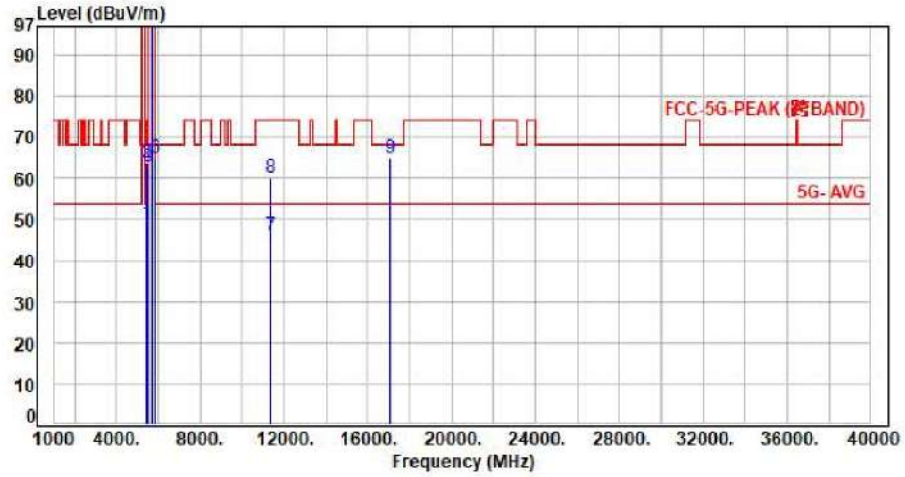


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 41.19          | 48.91          | 54.00          | -5.09       | Average  | 100         | 161           | P   |
| 2   | 5460.00         | 7.72        | 55.91          | 63.63          | 74.00          | -10.37      | Peak     | 100         | 161           | P   |
| 3   | 5470.00         | 7.72        | 55.08          | 62.80          | 68.20          | -5.40       | Peak     | 100         | 161           | P   |
| 4   | 5690.00         | 7.43        | 97.37          | 104.80         | 200.00         | -95.20      | Average  | 100         | 161           | P   |
| 5   | 5690.00         | 7.43        | 109.84         | 117.27         | 200.00         | -82.73      | Peak     | 100         | 161           | P   |
| 6   | 5850.00         | 7.30        | 57.78          | 65.08          | 68.20          | -3.12       | Peak     | 100         | 161           | P   |
| 7   | 11380.00        | 16.53       | 29.58          | 46.11          | 54.00          | -7.89       | Average  | 100         | 157           | P   |
| 8   | 11380.00        | 16.53       | 43.77          | 60.30          | 74.00          | -13.70      | Peak     | 100         | 157           | P   |
| 9   | 17070.00        | 23.92       | 41.10          | 65.02          | 68.20          | -3.18       | Peak     | 100         | 229           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

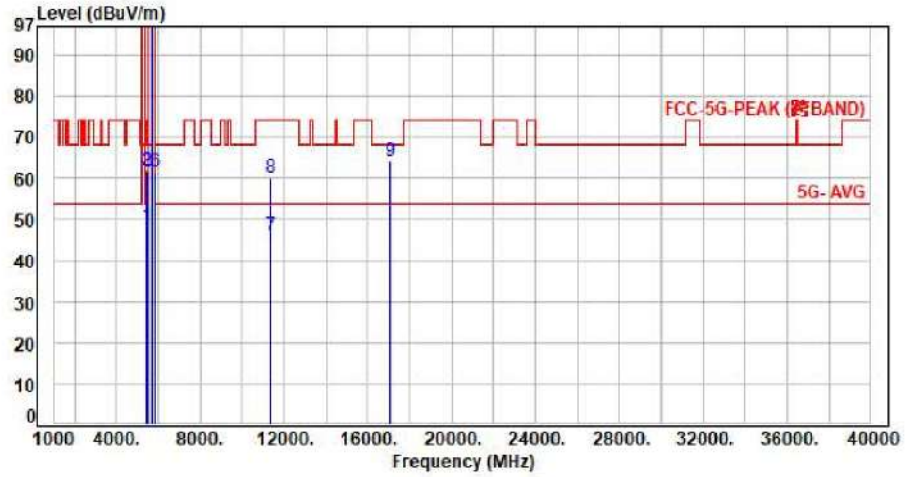


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5460.00         | 7.72        | 40.59          | 48.31          | 54.00          | -5.69       | Average  | 100         | 37            | P   |
| 2   | 5460.00         | 7.72        | 54.07          | 61.79          | 74.00          | -12.21      | Peak     | 100         | 37            | P   |
| 3   | 5470.00         | 7.72        | 54.06          | 61.78          | 68.20          | -6.42       | Peak     | 100         | 37            | P   |
| 4   | 5690.00         | 7.43        | 88.24          | 95.67          | 200.00         | -104.33     | Average  | 100         | 37            | P   |
| 5   | 5690.00         | 7.43        | 100.50         | 107.93         | 200.00         | -92.07      | Peak     | 100         | 37            | P   |
| 6   | 5850.00         | 7.30        | 54.42          | 61.72          | 68.20          | -6.48       | Peak     | 100         | 37            | P   |
| 7   | 11380.00        | 16.53       | 29.51          | 46.04          | 54.00          | -7.96       | Average  | 100         | 28            | P   |
| 8   | 11380.00        | 16.53       | 43.60          | 60.13          | 74.00          | -13.87      | Peak     | 100         | 28            | P   |
| 9   | 17070.00        | 23.92       | 40.28          | 64.20          | 68.20          | -4.00       | Peak     | 100         | 147           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0  
 Voltage : From Adapter(AC120V/60Hz)  
 Pol : Vertical

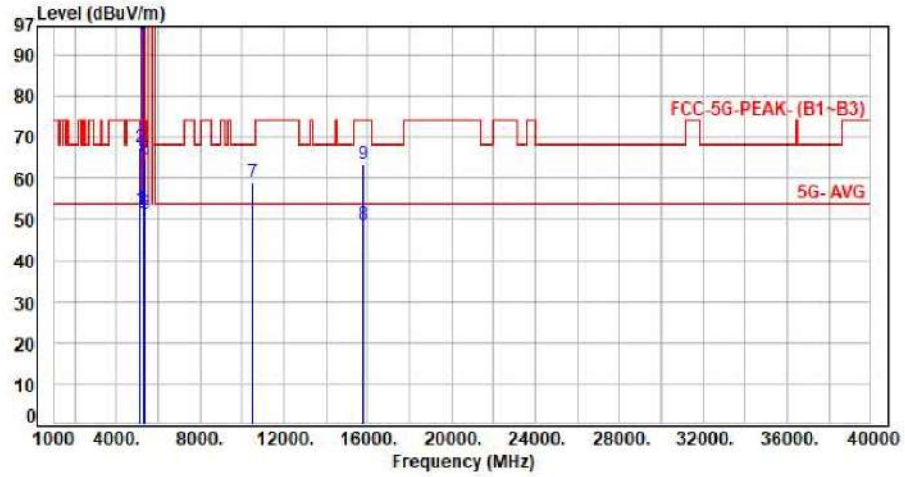


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 7.18        | 45.34          | 52.52          | 54.00          | -1.48       | Average  | 130         | 274           | P   |
| 2   | 5150.00         | 7.18        | 60.29          | 67.47          | 74.00          | -6.53       | Peak     | 130         | 274           | P   |
| 3   | 5250.00         | 7.32        | 87.89          | 95.21          | 200.00         | -104.79     | Average  | 130         | 274           | P   |
| 4   | 5250.00         | 7.32        | 99.16          | 106.48         | 200.00         | -93.52      | Peak     | 130         | 274           | P   |
| 5   | 5350.00         | 7.67        | 43.50          | 51.17          | 54.00          | -2.83       | Average  | 130         | 274           | P   |
| 6   | 5350.00         | 7.67        | 56.89          | 64.56          | 74.00          | -9.44       | Peak     | 130         | 274           | P   |
| 7   | 10500.00        | 15.56       | 43.56          | 59.12          | 68.20          | -9.08       | Peak     | 100         | 154           | P   |
| 8   | 15750.00        | 19.56       | 29.26          | 48.82          | 54.00          | -5.18       | Average  | 100         | 225           | P   |
| 9   | 15750.00        | 19.56       | 43.97          | 63.53          | 74.00          | -10.47      | Peak     | 100         | 225           | P   |

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

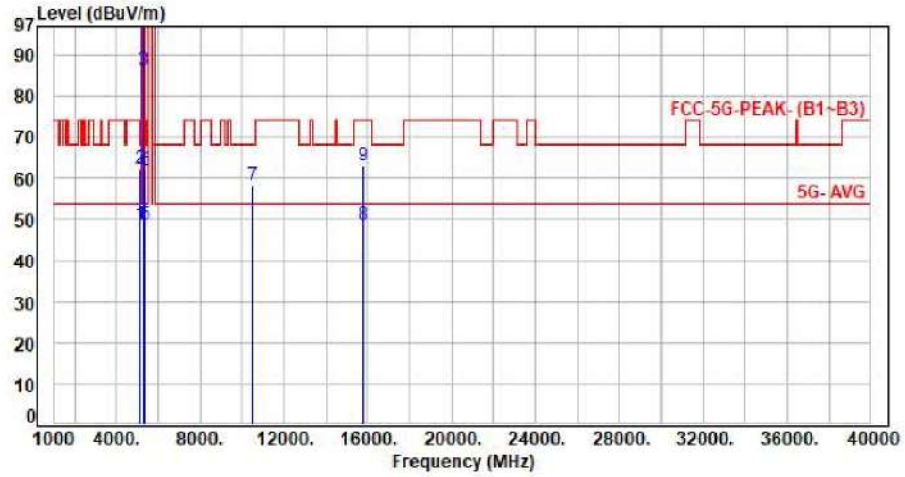

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | 7.18        | 41.38          | 48.56          | 54.00          | -5.44       | Average  | 131         | 26            | P   |
| 2   | 5150.00         | 7.18        | 55.17          | 62.35          | 74.00          | -11.65      | Peak     | 131         | 26            | P   |
| 3   | 5250.00         | 7.32        | 79.08          | 86.40          | 200.00         | -113.60     | Average  | 131         | 26            | P   |
| 4   | 5250.00         | 7.32        | 91.08          | 98.40          | 200.00         | -101.60     | Peak     | 131         | 26            | P   |
| 5   | 5350.00         | 7.67        | 41.07          | 48.74          | 54.00          | -5.26       | Average  | 131         | 26            | P   |
| 6   | 5350.00         | 7.67        | 54.28          | 61.95          | 74.00          | -12.05      | Peak     | 131         | 26            | P   |
| 7   | 10500.00        | 15.56       | 42.79          | 58.35          | 68.20          | -9.85       | Peak     | 100         | 27            | P   |
| 8   | 15750.00        | 19.56       | 29.26          | 48.82          | 54.00          | -5.18       | Average  | 100         | 149           | P   |
| 9   | 15750.00        | 19.56       | 43.55          | 63.11          | 74.00          | -10.89      | Peak     | 100         | 149           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz             |
|---------------------|-----------------------|-----------------|-----------------|
| 0.09000 – 0.11000   | 16.42000 – 16.42300   | 399.9 – 410.0   | 4.500 – 5.150   |
| 0.49500 – 0.505**   | 16.69475 – 16.69525   | 608.0 – 614.0   | 5.350 – 5.460   |
| 2.17350 – 2.19050   | 16.80425 – 16.80475   | 960.0 – 1240.0  | 7.250 – 7.750   |
| 4.12500 – 4.12800   | 25.50000 – 25.67000   | 1300.0 – 1427.0 | 8.025 – 8.500   |
| 4.17725 – 4.17775   | 37.50000 – 38.25000   | 1435.0 – 1626.5 | 9.000 – 9.200   |
| 4.20725 – 4.20775   | 73.00000 – 74.60000   | 1645.5 – 1646.5 | 9.300 – 9.500   |
| 6.21500 – 6.21800   | 74.80000 – 75.20000   | 1660.0 – 1710.0 | 10.600 – 12.700 |
| 6.26775 – 6.26825   | 108.00000 – 121.94000 | 1718.8 – 1722.2 | 13.250 – 13.400 |
| 6.31175 – 6.31225   | 123.00000 – 138.00000 | 2200.0 – 2300.0 | 14.470 – 14.500 |
| 8.29100 – 8.29400   | 149.90000 – 150.05000 | 2310.0 – 2390.0 | 15.350 – 16.200 |
| 8.36200 – 8.36600   | 156.52475 – 156.52525 | 2483.5 – 2500.0 | 17.700 – 21.400 |
| 8.37625 – 8.38675   | 156.70000 – 156.90000 | 2655.0 – 2900.0 | 22.010 – 23.120 |
| 8.41425 – 8.41475   | 162.01250 – 167.17000 | 3260.0 – 3267.0 | 23.600 – 24.000 |
| 12.29000 – 12.29300 | 167.72000 – 173.20000 | 3332.0 – 3339.0 | 31.200 – 31.800 |
| 12.51975 – 12.52025 | 240.00000 – 285.00000 | 3345.8 – 3358.0 | 36.430 – 36.500 |
| 12.57675 – 12.57725 | 322.00000 – 335.40000 | 3600.0 – 4400.0 | Above 38.6      |
| 13.36000 – 13.41000 |                       |                 |                 |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. On Time, Duty Cycle and Measurement methods


### 7.1. Test Limit

None; for reporting purposes only.

### 7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

### 7.3. Test Setup Layout





### 7.4. Test Result and Data

Non-Beamforming:

| Modulation Type | On Time (ms) | Period Time (ms) | Duty Cycle (%) |
|-----------------|--------------|------------------|----------------|
| 802.11a,6M      | 1.98         | 2.00             | 99.20%         |
| 802.11ax HE20   | 5.46         | 5.60             | 97.50%         |
| 802.11ax HE40   | 5.44         | 5.62             | 96.80%         |
| 802.11ax HE80   | 5.44         | 5.62             | 96.80%         |
| 802.11ax HE160  | 5.44         | 5.60             | 97.14%         |
| 802.11be EHT20  | 5.46         | 5.60             | 97.50%         |
| 802.11be EHT40  | 5.46         | 5.62             | 97.15%         |
| 802.11be EHT80  | 5.46         | 5.64             | 96.81%         |
| 802.11be EHT160 | 5.46         | 5.60             | 97.50%         |

Beamforming:

| Modulation Type | On Time (ms) | Period Time (ms) | Duty Cycle (%) |
|-----------------|--------------|------------------|----------------|
| 802.11ax HE20   | 5.46         | 5.60             | 97.50%         |
| 802.11ax HE40   | 5.46         | 5.58             | 97.85%         |
| 802.11ax HE80   | 5.44         | 5.60             | 97.14%         |
| 802.11ax HE160  | 5.46         | 5.58             | 97.85%         |
| 802.11be EHT20  | 5.46         | 5.58             | 97.85%         |
| 802.11be EHT40  | 5.42         | 5.58             | 97.13%         |
| 802.11be EHT80  | 5.46         | 5.58             | 97.85%         |
| 802.11be EHT160 | 5.46         | 5.58             | 97.85%         |


### 7.5. Measurement Methods

|  |  |
|--|--|
| 26 dB and 6dB Emission BW                  | KDB 789033 D02 v02r01, Section C                             |
| 99% Occupied BW                            | KDB 789033 D02 v02r01, Section D                             |
| Conducted Output Power                     | KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G) |
| Power Spectral Density                     | KDB 789033 D02 v02r01, Section F                             |
| Unwanted emissions in restricted bands     | KDB 789033 D02 v02r01, Sections G and H                      |
| Unwanted emissions in non-restricted bands | KDB 789033 D02 v02r01, Sections G and H                      |




Non-Beamforming:

Modulation Type: 802.11a

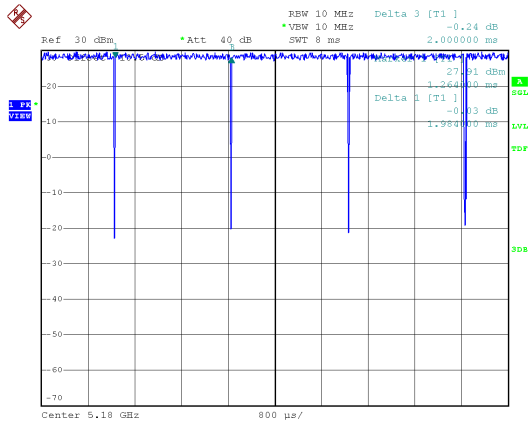


Date: 2.JAN.2025 17:38:49

Modulation Type: 802.11ax HE80

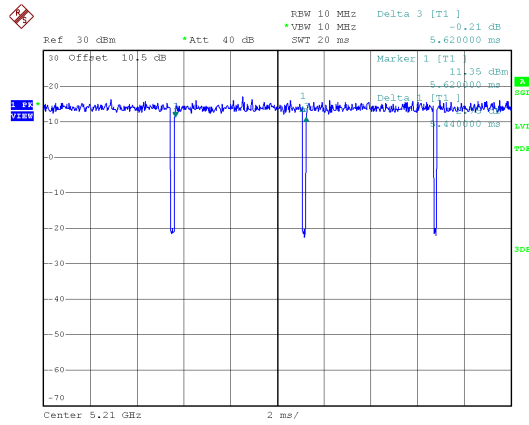


Date: 5.MAY.2025 11:18:51

Modulation Type: 802.11ax HE20

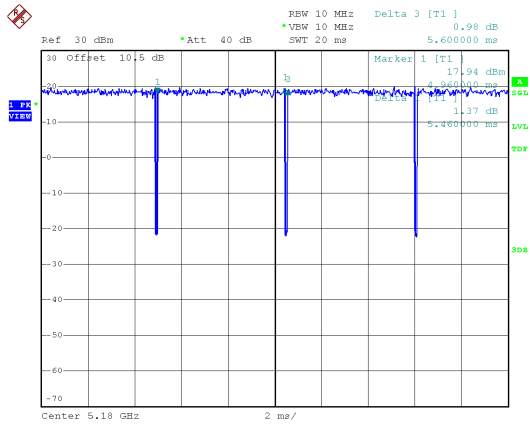


Date: 5.MAY.2025 10:47:40

Modulation Type: 802.11ax HE160

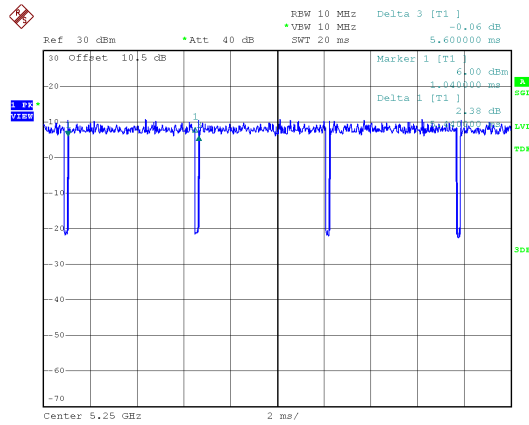


Date: 5.MAY.2025 11:31:41

Modulation Type: 802.11ax HE40

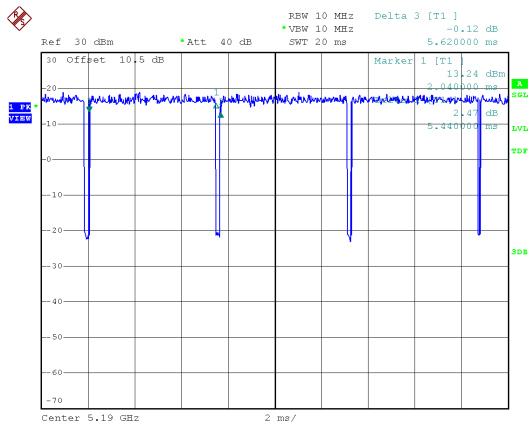

Date: 5.MAY.2025 11:14:16

Modulation Type: 802.11be EHT20

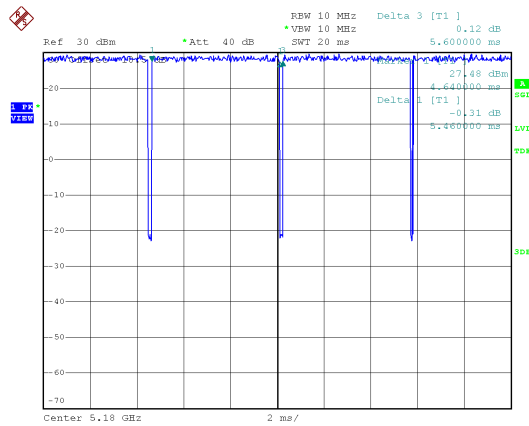


Date: 3.JAN.2025 15:46:15






Beamforming:

Modulation Type: 802.11ax HE20

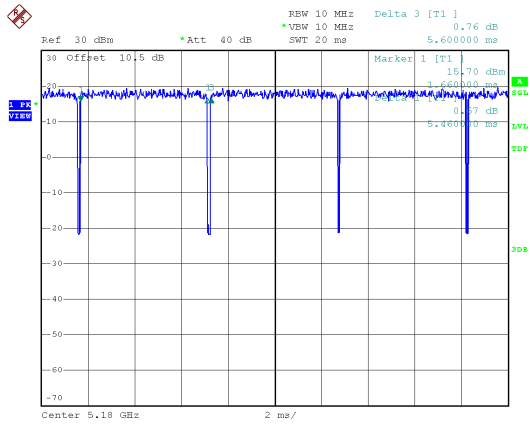


Date: 23.MAY.2025 18:07:00

Modulation Type: 802.11ax HE160

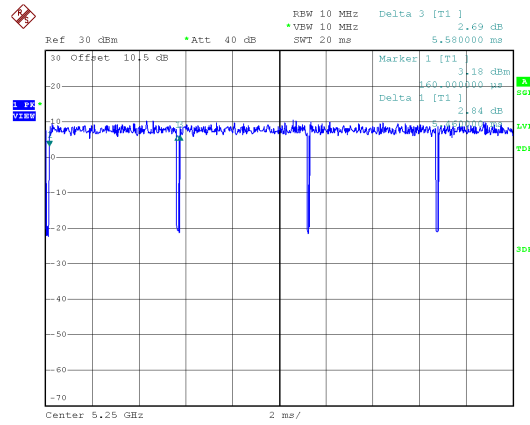


Date: 23.MAY.2025 18:13:39

Modulation Type: 802.11ax HE40

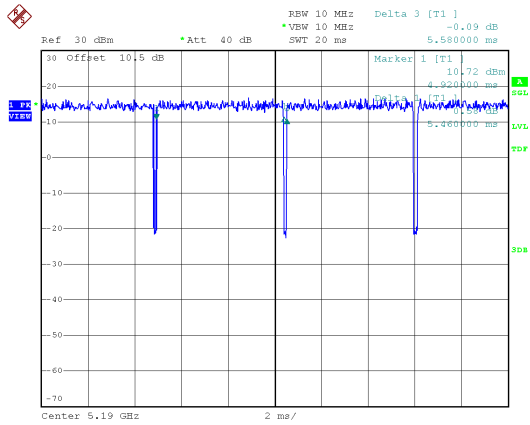


Date: 23.MAY.2025 18:08:59

Modulation Type: 802.11be EHT20

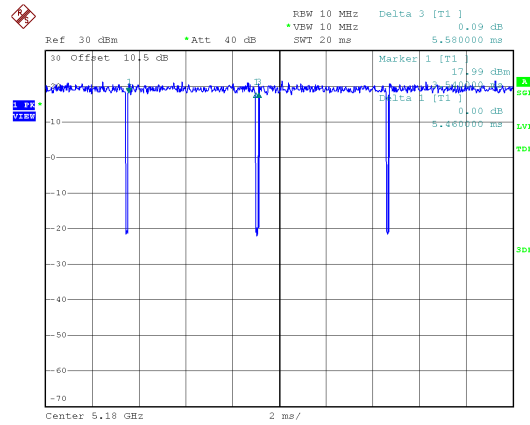


Date: 23.MAY.2025 18:16:57

Modulation Type: 802.11ax HE80

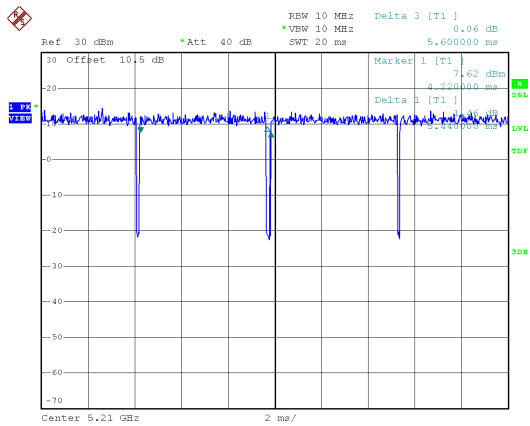

Date: 23.MAY.2025 18:11:28

Modulation Type: 802.11be EHT40

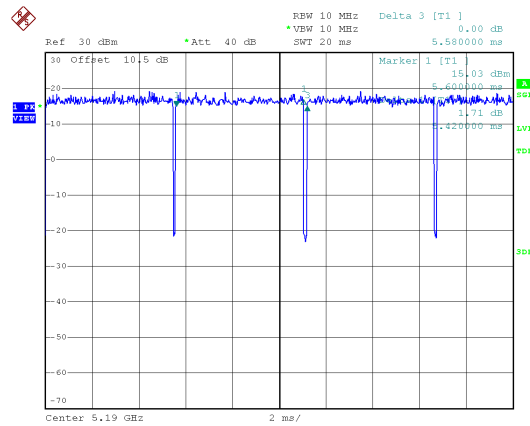


Date: 23.MAY.2025 18:18:44




Beamforming:

Modulation Type: 802.11be EHT80

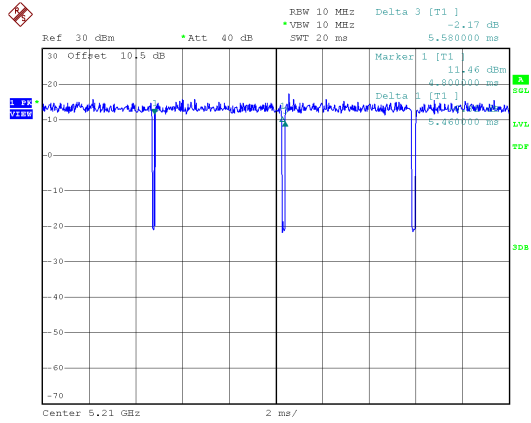

Date: 23.MAY.2025 18:20:50

Modulation Type: 802.11be EHT160

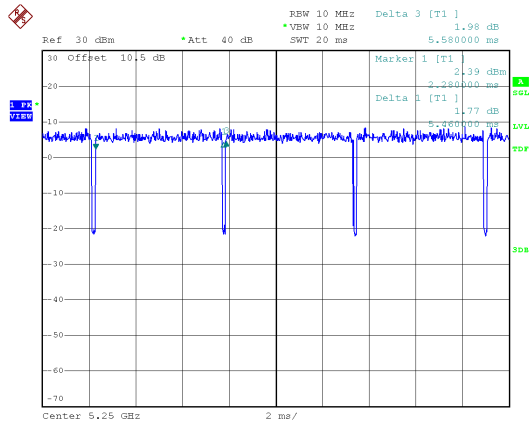

Date: 23.MAY.2025 18:22:40



## 8. 6dB Bandwidth & 99% Occupied Bandwidth

### 8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

### 8.3. Test Setup Layout





**8.4. Test Result and Data**

In the 5.8G Band

| Modulation Type | Channel | Frequency (MHz) | 6dB Bandwidth(MHz) |       | Minimum Limit (MHz) |
|-----------------|---------|-----------------|--------------------|-------|---------------------|
|                 |         |                 | ANT A              | ANT D |                     |
| 11a             | 149     | 5745            | 15.33              | 15.03 | 0.50                |
| 11a             | 157     | 5785            | 16.05              | 15.03 | 0.50                |
| 11a             | 165     | 5825            | 16.32              | 15.00 | 0.50                |
| 11be EHT20      | 149     | 5745            | 18.15              | 15.03 | 0.50                |
| 11be EHT20      | 157     | 5785            | 18.57              | 15.03 | 0.50                |
| 11be EHT20      | 165     | 5825            | 18.93              | 14.19 | 0.50                |
| 11be EHT40      | 151     | 5755            | 38.16              | 38.04 | 0.50                |
| 11be EHT40      | 159     | 5795            | 37.92              | 38.22 | 0.50                |
| 11be EHT80      | 155     | 5775            | 77.88              | 73.92 | 0.50                |

In the 5.8G Band

| Modulation Type | Channel | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|-----------------|---------|-----------------|--------------------|-------|
|                 |         |                 | ANT A              | ANT D |
| 11a             | 149     | 5745            | 16.98              | 17.01 |
| 11a             | 157     | 5785            | 17.04              | 17.16 |
| 11a             | 165     | 5825            | 17.10              | 17.22 |
| 11be EHT20      | 149     | 5745            | 19.11              | 18.81 |
| 11be EHT20      | 157     | 5785            | 19.14              | 18.78 |
| 11be EHT20      | 165     | 5825            | 19.17              | 18.84 |
| 11be EHT40      | 151     | 5755            | 38.40              | 38.76 |
| 11be EHT40      | 159     | 5795            | 38.40              | 38.88 |
| 11be EHT80      | 155     | 5775            | 77.64              | 78.24 |

UNII Emission Bandwidth Result (Extends across 5725MHz band)


| Modulation Type | Data Rate / MCS | Frequency (MHz) | 6dB Bandwidth(MHz) |       | 99% Bandwidth(MHz) |       |
|-----------------|-----------------|-----------------|--------------------|-------|--------------------|-------|
|                 |                 |                 | ANT A              | ANT D | ANT A              | ANT D |
| 11a             | 6 Mbps          | 5720            | 3.00               | 2.50  | 5.00               | 5.00  |
| 11be EHT20      | NSS1-MCS0       | 5720            | 4.50               | 3.63  | 4.88               | 4.75  |
| 11be EHT40      | NSS1-MCS0       | 5710            | 4.00               | 4.13  | 5.50               | 5.50  |
| 11be EHT80      | NSS1-MCS0       | 5690            | 4.13               | 4.00  | 6.63               | 6.63  |






6dB Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH151

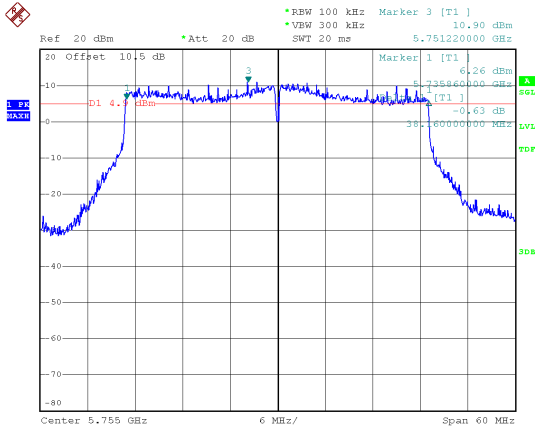


Date: 6.JAN.2025 14:39:36

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH155

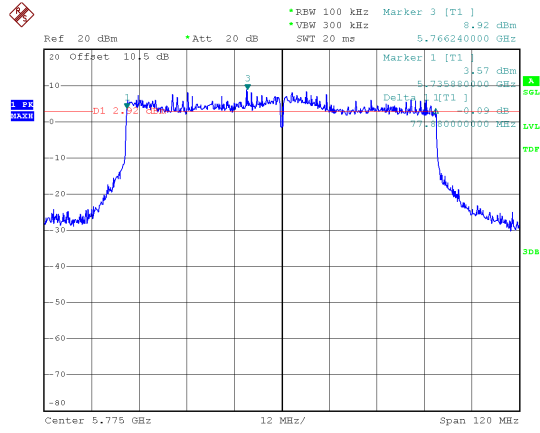

Date: 6.JAN.2025 16:06:55


CH159

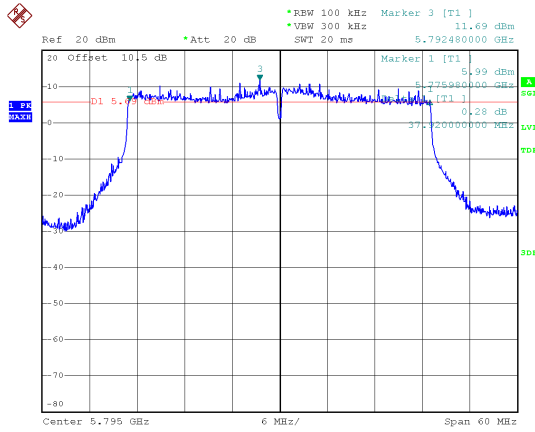

Date: 6.JAN.2025 14:43:47




6dB Bandwidth, ANT D  
Modulation Type: 802.11a (6Mbps)  
CH149

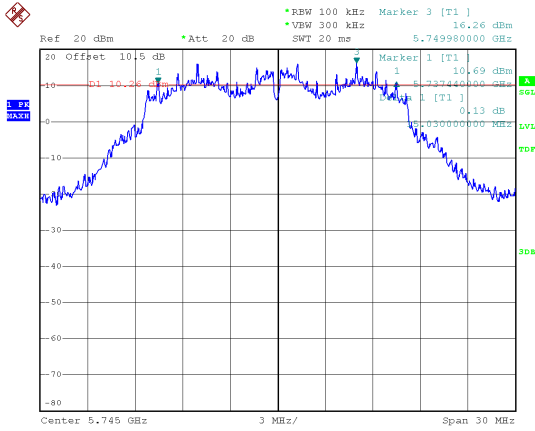


Date: 3.JAN.2025 13:26:15

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH149

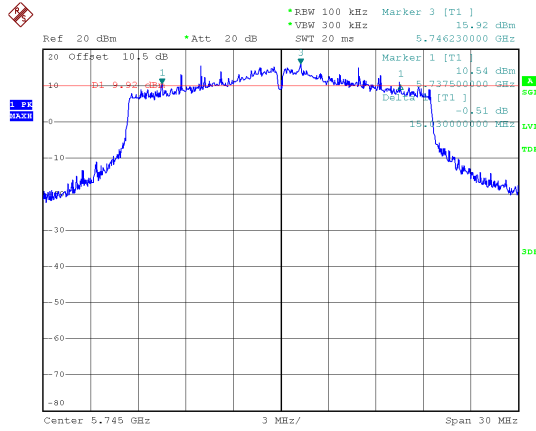


Date: 6.JAN.2025 11:14:00

CH157

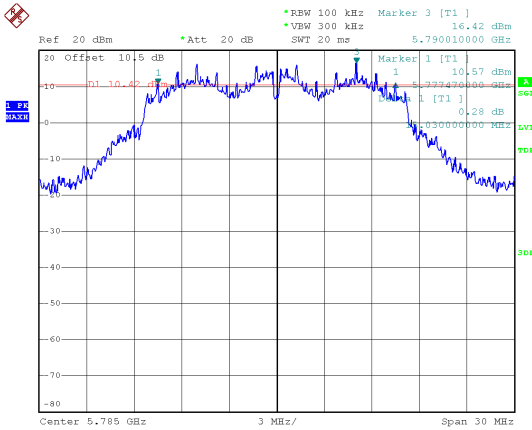


Date: 3.JAN.2025 13:29:39

CH157

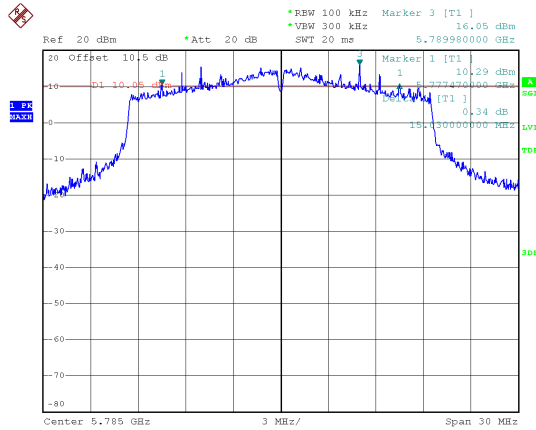


Date: 6.JAN.2025 11:37:03

CH165

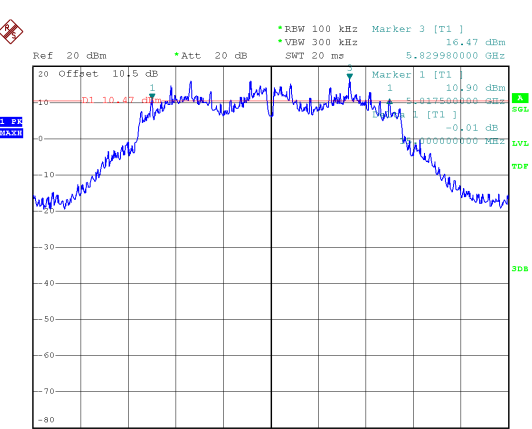

Date: 3.JAN.2025 13:34:34

CH165

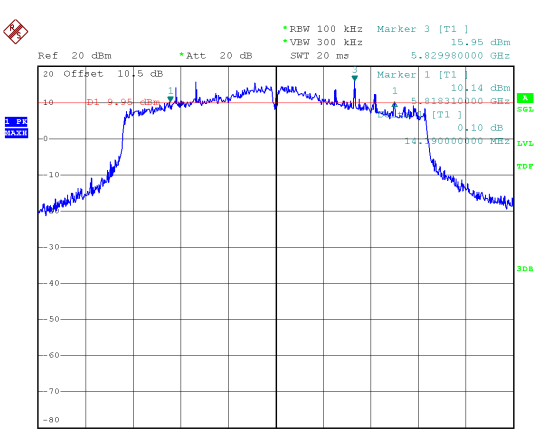


Date: 6.JAN.2025 11:41:06




6dB Bandwidth, ANT D

Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH151

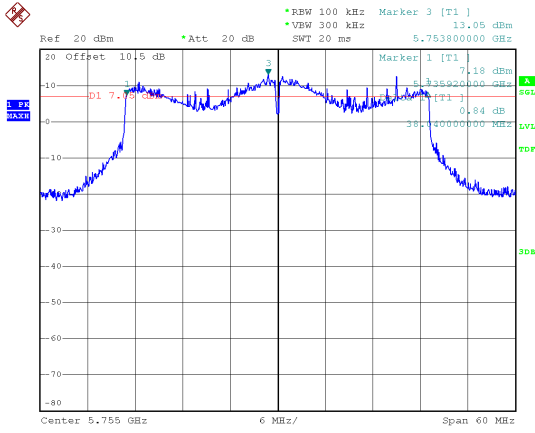


Date: 6.JAN.2025 14:41:10

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH155

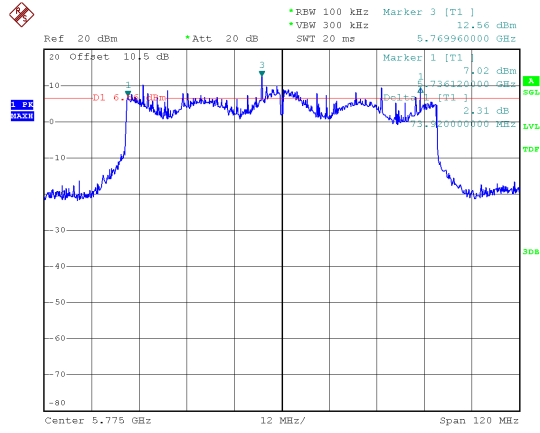

Date: 6.JAN.2025 16:08:29

CH159

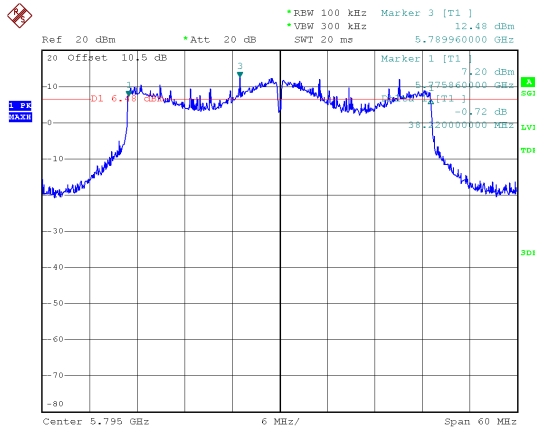


Date: 6.JAN.2025 14:45:21



6dB Bandwidth, ANT A


Extends across 5725MHz Band, Straddle Channel

Modulation Type: 802.11a (6Mbps)  
CH144

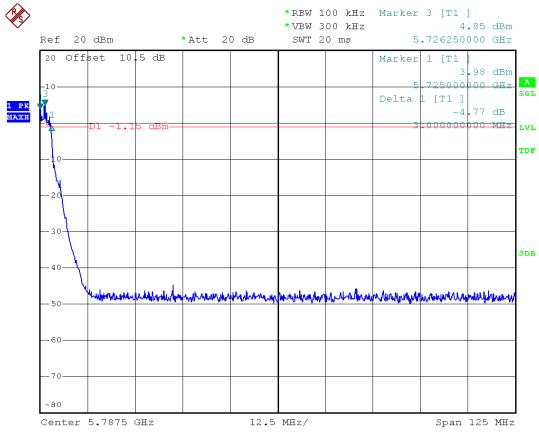


Date: 3.JAN.2025 11:50:43

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH138

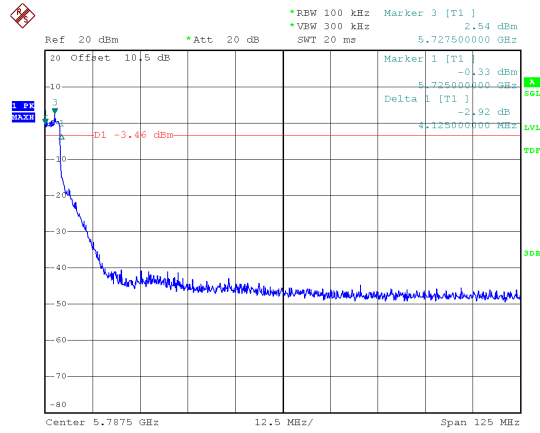


Date: 6.JAN.2025 15:59:15

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH144

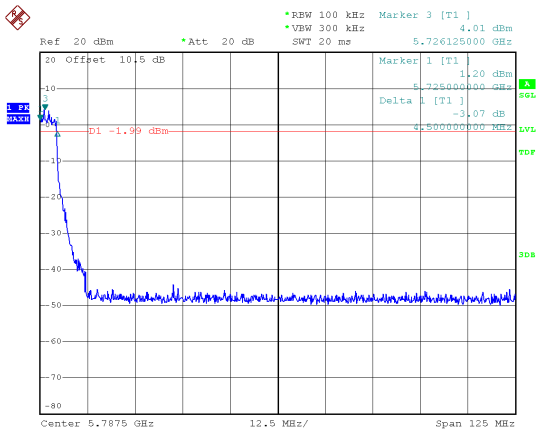

Date: 6.JAN.2025 10:28:47


Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH142

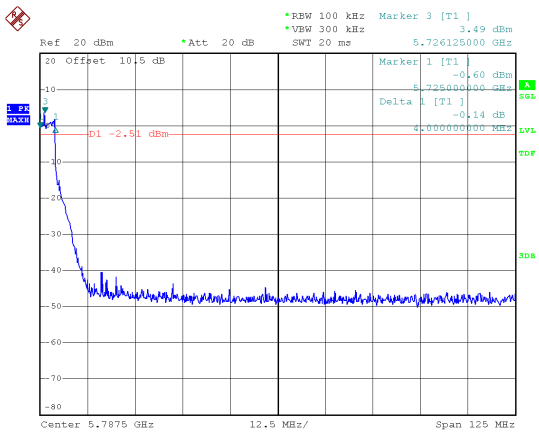

Date: 6.JAN.2025 14:35:57




6dB Bandwidth, ANT D  
 Extends across 5725MHz Band, Straddle Channel  
 Modulation Type: 802.11a (6Mbps)  
 CH144

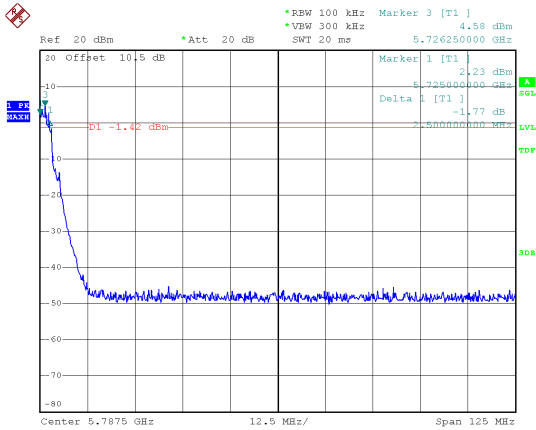


Date: 3.JAN.2025 11:53:28

Modulation Type: 802.11be EHT80 (30.6Mbps)  
 CH138

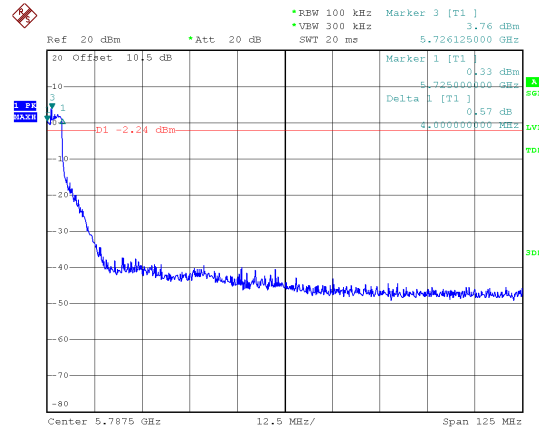


Date: 6.JAN.2025 16:00:47

Modulation Type: 802.11be EHT20 (7.3Mbps)  
 CH144

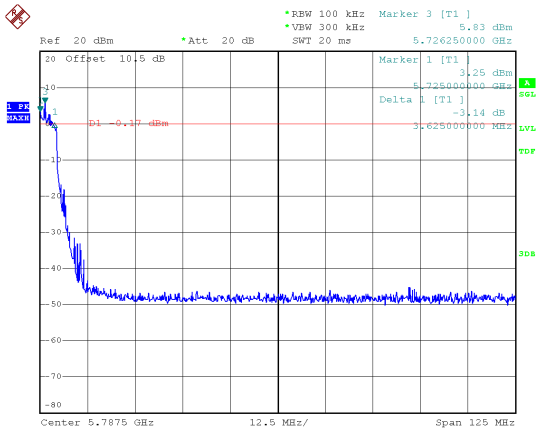

Date: 6.JAN.2025 10:33:15


Modulation Type: 802.11be EHT40 (14.6Mbps)  
 CH142

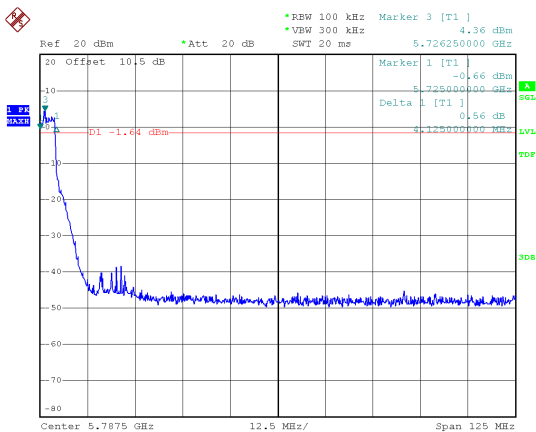

Date: 6.JAN.2025 14:37:28




99% Occupied Bandwidth, ANT A  
Modulation Type: 802.11a (6Mbps)  
CH149

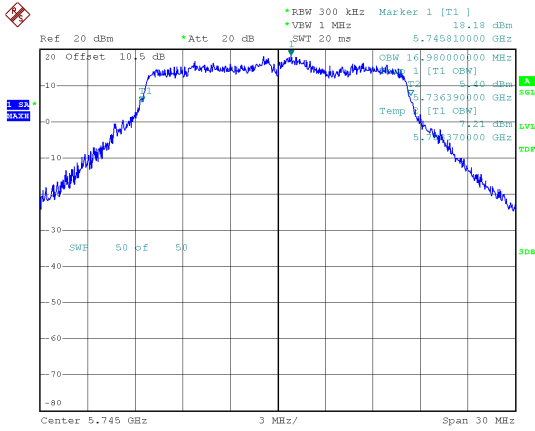


Date: 3.JAN.2025 13:24:41

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH149

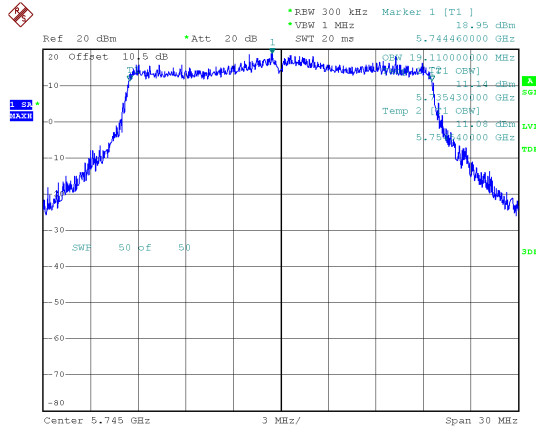


Date: 6.JAN.2025 11:12:04

CH157

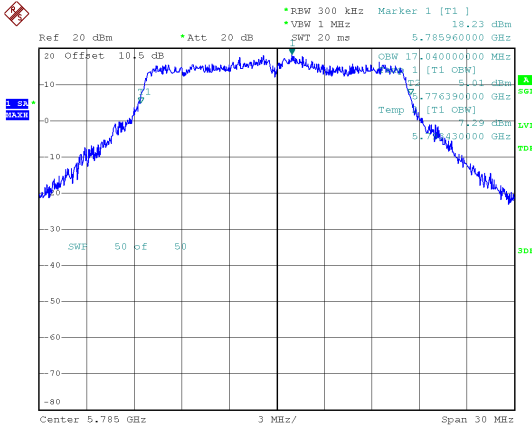


Date: 3.JAN.2025 13:28:06

CH157

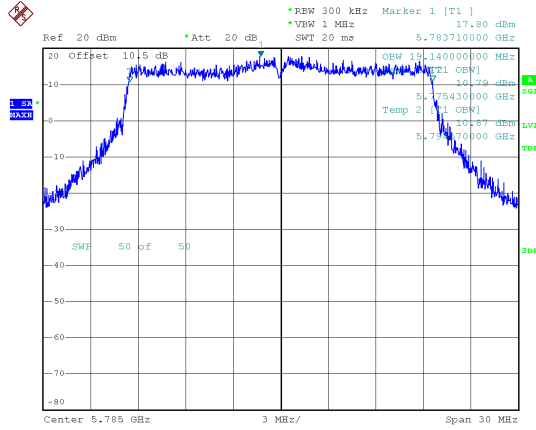


Date: 6.JAN.2025 11:35:07

CH165

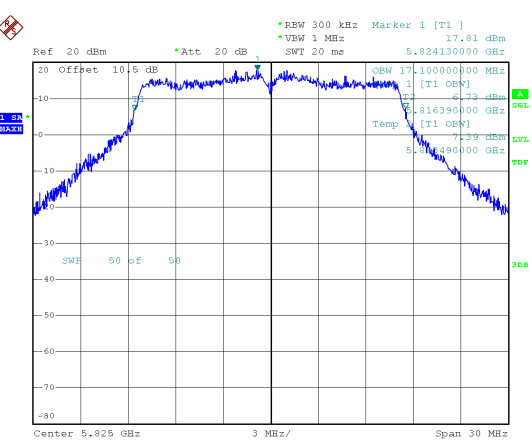

Date: 3.JAN.2025 13:33:02

CH165

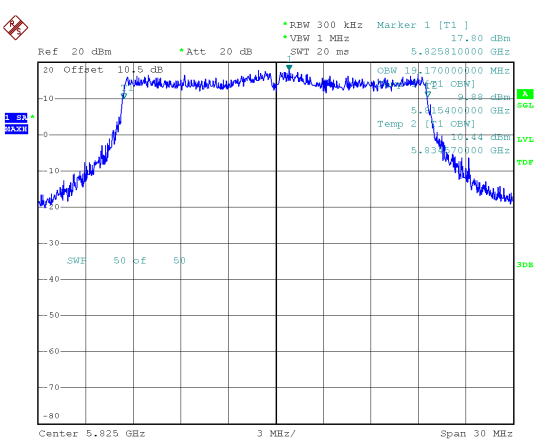


Date: 6.JAN.2025 11:39:09




99% Occupied Bandwidth, ANT A  
Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH151

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH155

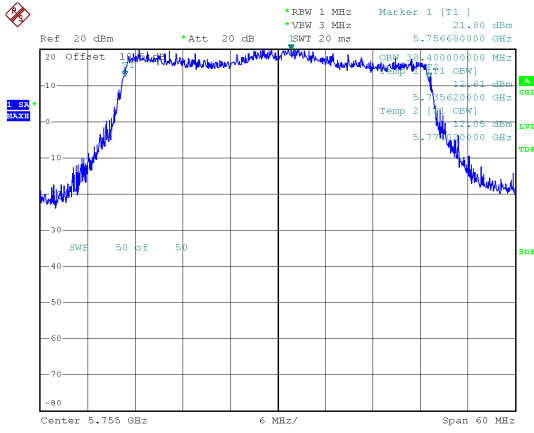


Date: 6.JAN.2025 14:39:12

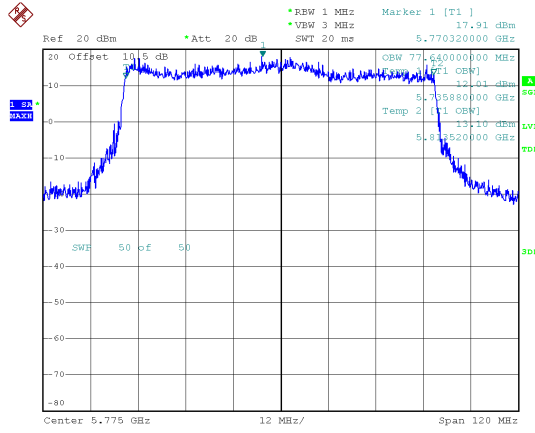

Date: 6.JAN.2025 16:06:31


CH159

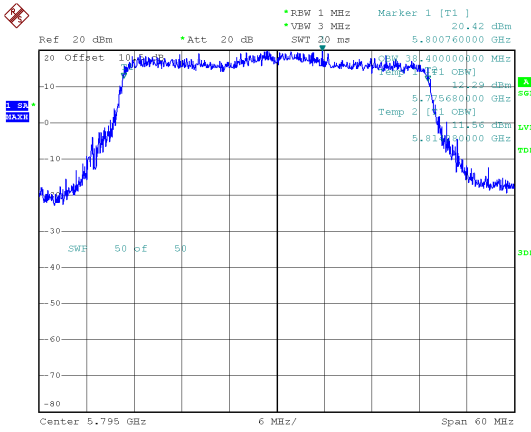

Date: 6.JAN.2025 14:43:23




99% Occupied Bandwidth, ANT D  
Modulation Type: 802.11a (6Mbps)  
CH149

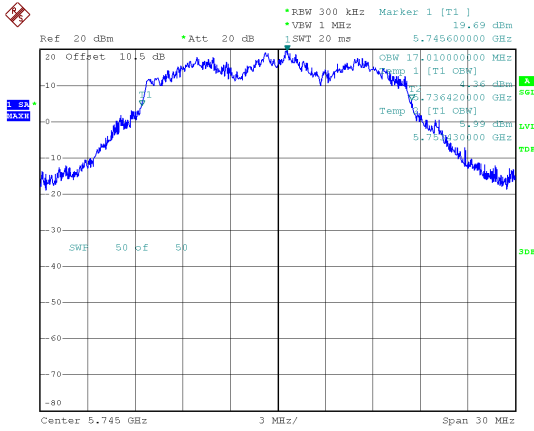


Date: 3.JAN.2025 13:25:51

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH149

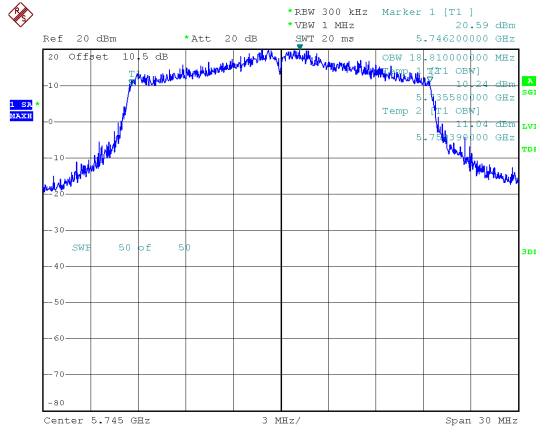


Date: 6.JAN.2025 11:13:36

CH157

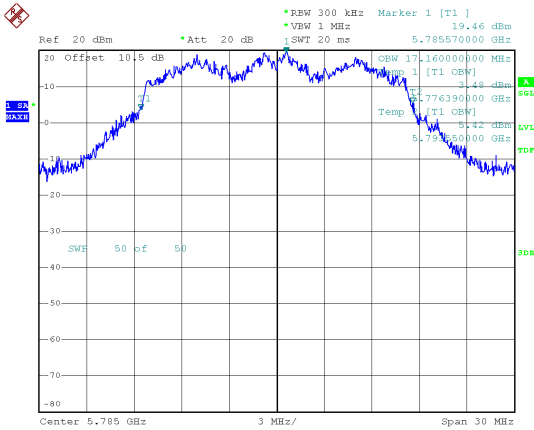


Date: 3.JAN.2025 13:29:15

CH157

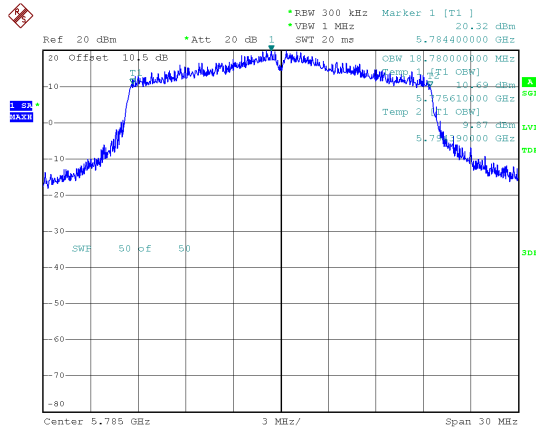


Date: 6.JAN.2025 11:36:39

CH165

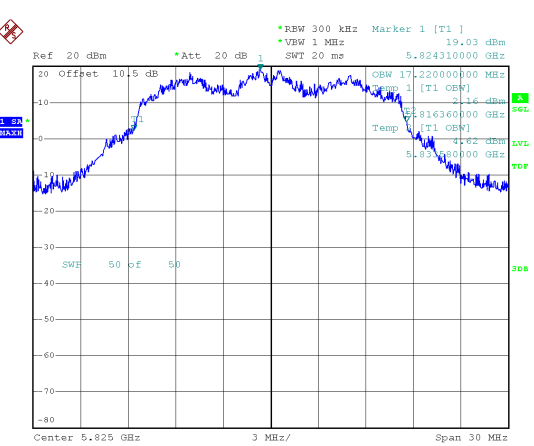

Date: 3.JAN.2025 13:34:10


CH165

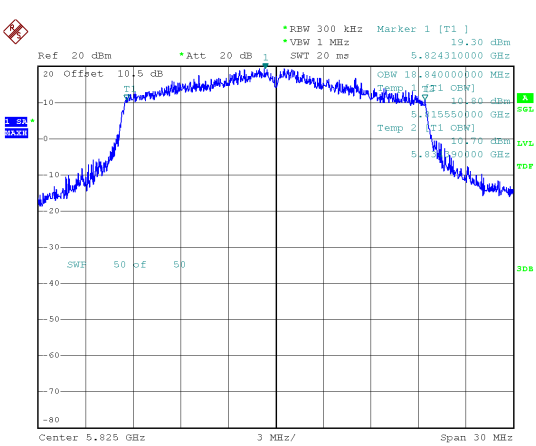

Date: 6.JAN.2025 11:40:42




99% Occupied Bandwidth, ANT D  
Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH151

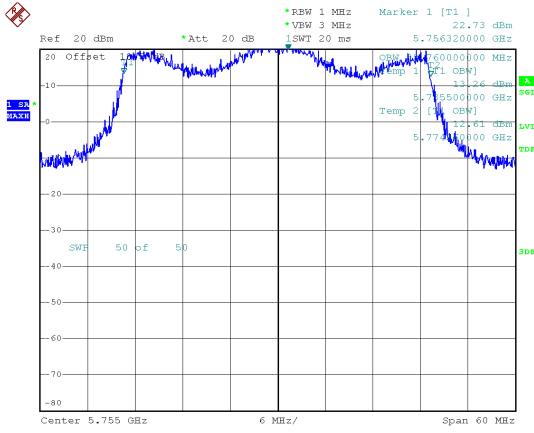


Date: 6.JAN.2025 14:40:46

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH155

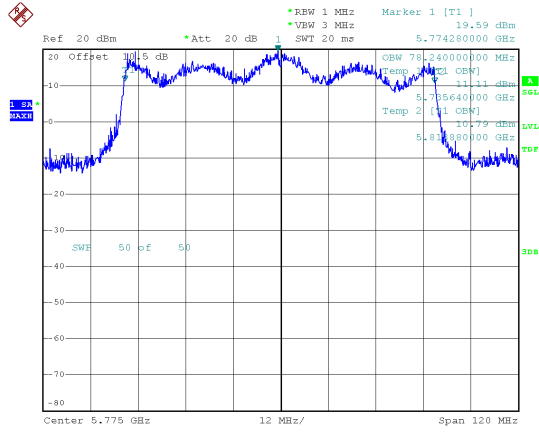

Date: 6.JAN.2025 16:08:05


CH159

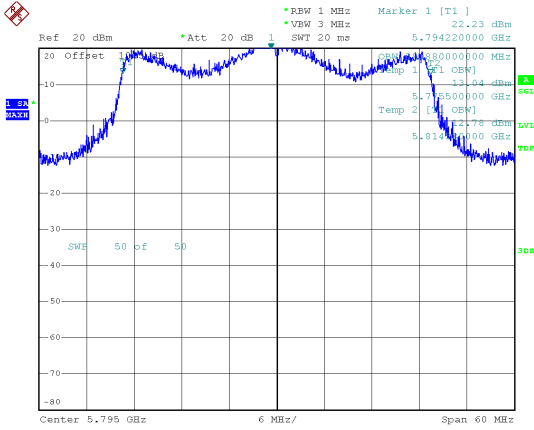




99% Occupied Bandwidth, ANT A  
Extends across 5725MHz Band, Straddle Channel

Modulation Type: 802.11a (6Mbps)  
CH144

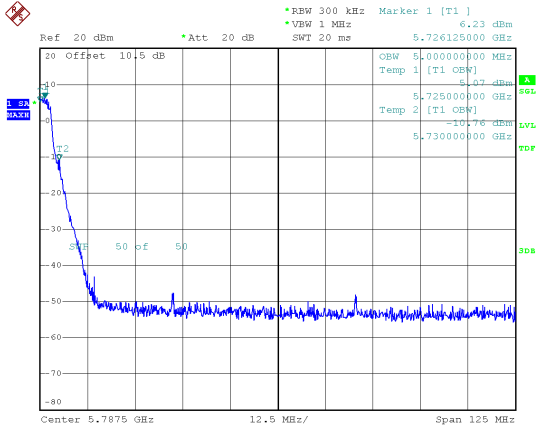


Date: 3.JAN.2025 11:49:54

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH138

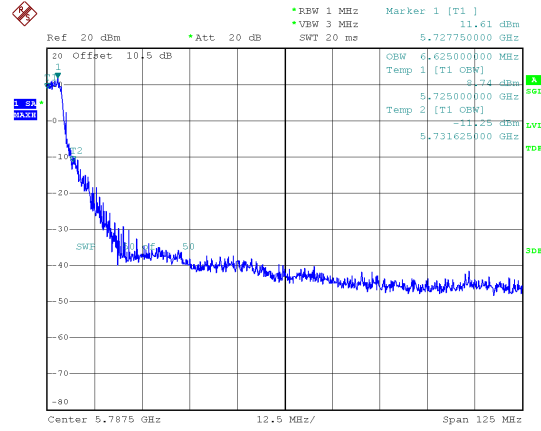


Date: 6.JAN.2025 15:58:26

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH144

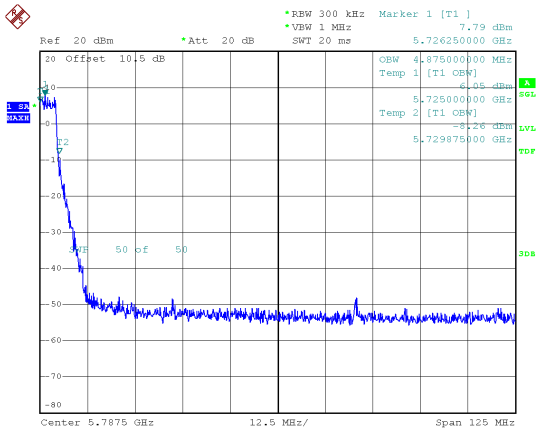

Date: 6.JAN.2025 10:27:58

Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH142

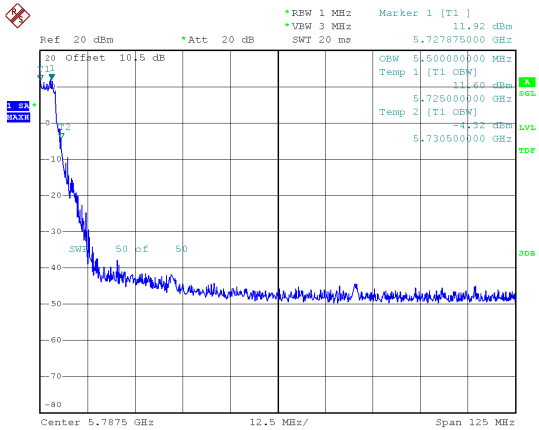


Date: 6.JAN.2025 14:35:08




99% Occupied Bandwidth, ANT D  
Extends across 5725MHz Band, Straddle Channel  
Modulation Type: 802.11a (6Mbps)  
CH144

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH138

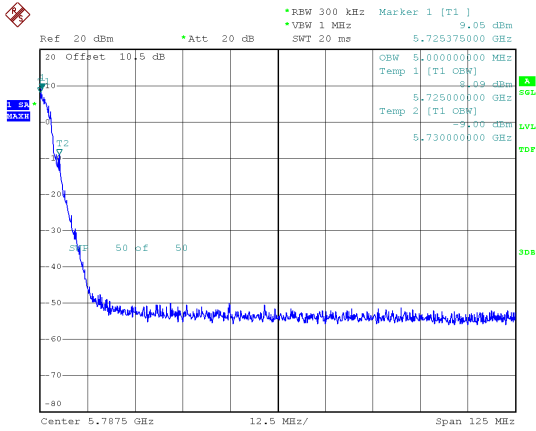


Date: 3.JAN.2025 11:52:39

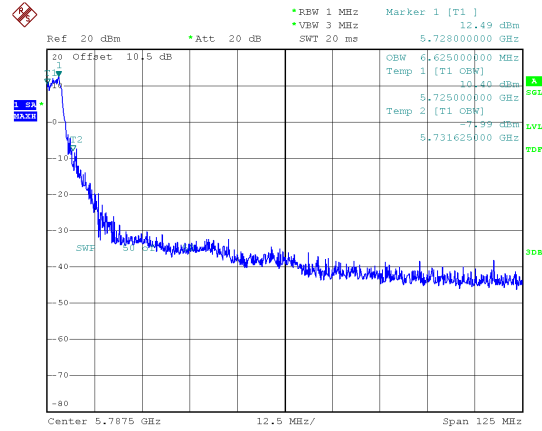


Date: 6.JAN.2025 15:59:57

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH144

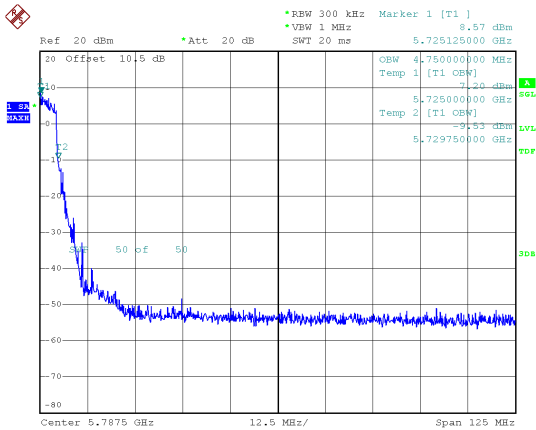

Date: 6.JAN.2025 10:32:26

Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH142

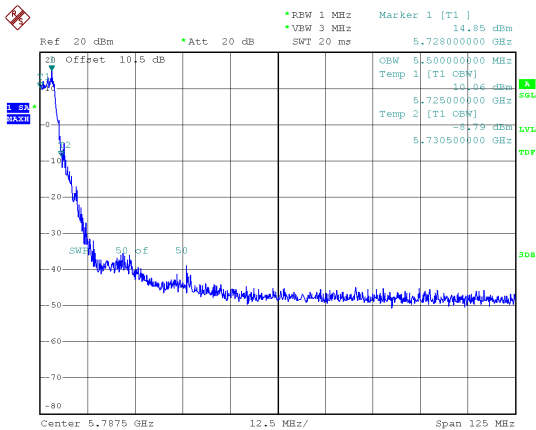

Date: 6.JAN.2025 14:36:39



## 9. 26dB Bandwidth & 99% Occupied Bandwidth


### 9.1. Test Limit

None; for reporting purposes only.

### 9.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

### 9.3. Test Setup Layout





**9.4. Test Result and Data**

In the 5.2G Band

| Mode       | Channel | Frequency (MHz) | 26dB Bandwidth(MHz) |       |
|------------|---------|-----------------|---------------------|-------|
|            |         |                 | ANT A               | ANT D |
| 11a        | 36      | 5180            | 22.9                | 22.75 |
| 11a        | 40      | 5200            | 22.65               | 22.6  |
| 11a        | 48      | 5240            | 22.25               | 22.3  |
| 11be EHT20 | 36      | 5180            | 23.35               | 22.9  |
| 11be EHT20 | 40      | 5200            | 24.15               | 23.2  |
| 11be EHT20 | 48      | 5240            | 23.85               | 23.15 |
| 11be EHT40 | 38      | 5190            | 44.8                | 45.4  |
| 11be EHT40 | 46      | 5230            | 45.1                | 44.6  |
| 11be EHT80 | 42      | 5210            | 85.6                | 86.72 |

In the 5.3G Band

| Mode       | Channel | Frequency (MHz) | 26dB Bandwidth(MHz) |       |
|------------|---------|-----------------|---------------------|-------|
|            |         |                 | ANT A               | ANT D |
| 11a        | 52      | 5260            | 22.1                | 22.45 |
| 11a        | 60      | 5300            | 22.15               | 22.55 |
| 11a        | 64      | 5320            | 22.2                | 22.6  |
| 11be EHT20 | 52      | 5260            | 23.8                | 22.8  |
| 11be EHT20 | 60      | 5300            | 23.25               | 23.05 |
| 11be EHT20 | 64      | 5320            | 23.3                | 23.3  |
| 11be EHT40 | 54      | 5270            | 44.8                | 45.2  |
| 11be EHT40 | 62      | 5310            | 44.8                | 44.7  |
| 11be EHT80 | 58      | 5290            | 86.08               | 87.52 |

In the 5.5G Band

| Mode        | Channel | Frequency (MHz) | 26dB Bandwidth(MHz) |        |
|-------------|---------|-----------------|---------------------|--------|
|             |         |                 | ANT A               | ANT D  |
| 11a         | 100     | 5500            | 21.9                | 22.05  |
| 11a         | 120     | 5600            | 22.5                | 21.95  |
| 11a         | 140     | 5700            | 22.4                | 21.7   |
| 11be EHT20  | 100     | 5500            | 22.25               | 23.05  |
| 11be EHT20  | 120     | 5600            | 21.65               | 22.45  |
| 11be EHT20  | 140     | 5700            | 22.4                | 21.5   |
| 11be EHT40  | 102     | 5510            | 44.6                | 45.2   |
| 11be EHT40  | 118     | 5590            | 45                  | 44.3   |
| 11be EHT40  | 134     | 5670            | 44.8                | 44.6   |
| 11be EHT80  | 106     | 5530            | 84.8                | 87.36  |
| 11be EHT80  | 122     | 5610            | 86.4                | 86.72  |
| 11be EHT160 | 114     | 5570            | 174.48              | 175.68 |



| UNII Emission Bandwidth Result (Within 5470-5725MHz band) |                 |                 |                     |       |
|---|-----------------|-----------------|---------------------|-------|
| Modulation Type   | Data Rate / MCS | Frequency (MHz) | 26dB Bandwidth(MHz) |       |
|   |                 |                 | ANT A               | ANT D |
| 11a   | 6 Mbps          | 5720            | 16.32               | 15.56 |
| 11be EHT20  | NSS1-MCS0       | 5720            | 16.58               | 16.06 |
| 11be EHT40  | NSS1-MCS0       | 5710            | 37.49               | 37.49 |
| 11be EHT80  | NSS1-MCS0       | 5690            | 78.80               | 78.29 |

| UNII Emission Bandwidth Result (Within 5150-5250MHz band) |                 |                 |                     |       |
|---|-----------------|-----------------|---------------------|-------|
| Modulation Type   | Data Rate / MCS | Frequency (MHz) | 26dB Bandwidth(MHz) |       |
|   |                 |                 | ANT A               | ANT D |
| 11be EHT160   | NSS1-MCS0       | 5250            | 88.10               | 89.80 |

| UNII Emission Bandwidth Result (Extends across 5250MHz band) |                 |                 |                     |       |
|--|-----------------|-----------------|---------------------|-------|
| Modulation Type  | Data Rate / MCS | Frequency (MHz) | 26dB Bandwidth(MHz) |       |
|  |                 |                 | ANT A               | ANT D |
| 11be EHT160  | NSS1-MCS0       | 5250            | 79.00               | 79.00 |



In the 5.2G Band

| Modulation Type | Channel | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|-----------------|---------|-----------------|--------------------|-------|
|                 |         |                 | ANT A              | ANT D |
| 11a             | 36      | 5180            | 17.10              | 16.98 |
| 11a             | 40      | 5200            | 17.13              | 16.98 |
| 11a             | 48      | 5240            | 17.04              | 16.89 |
| 11be EHT20      | 36      | 5180            | 19.32              | 19.08 |
| 11be EHT20      | 40      | 5200            | 19.32              | 19.11 |
| 11be EHT20      | 48      | 5240            | 19.29              | 19.14 |
| 11be EHT40      | 38      | 5190            | 38.04              | 38.52 |
| 11be EHT40      | 46      | 5230            | 38.04              | 38.28 |
| 11be EHT80      | 42      | 5210            | 77.16              | 77.76 |

In the 5.3G Band

| Modulation Type | Channel | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|-----------------|---------|-----------------|--------------------|-------|
|                 |         |                 | ANT A              | ANT D |
| 11a             | 52      | 5260            | 17.04              | 16.95 |
| 11a             | 60      | 5300            | 17.04              | 16.98 |
| 11a             | 64      | 5320            | 17.04              | 16.92 |
| 11be EHT20      | 52      | 5260            | 19.32              | 19.08 |
| 11be EHT20      | 60      | 5300            | 19.41              | 19.17 |
| 11be EHT20      | 64      | 5320            | 19.26              | 19.17 |
| 11be EHT40      | 54      | 5270            | 37.92              | 38.34 |
| 11be EHT40      | 62      | 5310            | 38.16              | 38.28 |
| 11be EHT80      | 58      | 5290            | 77.28              | 77.64 |

In the 5.5G Band

| Modulation Type | Channel | Frequency (MHz) | 99% Bandwidth(MHz) |        |
|-----------------|---------|-----------------|--------------------|--------|
|                 |         |                 | ANT A              | ANT D  |
| 11a             | 100     | 5500            | 16.95              | 16.95  |
| 11a             | 120     | 5600            | 17.01              | 16.92  |
| 11a             | 140     | 5700            | 16.98              | 16.86  |
| 11be EHT20      | 100     | 5500            | 18.96              | 19.14  |
| 11be EHT20      | 120     | 5600            | 18.90              | 19.05  |
| 11be EHT20      | 140     | 5700            | 19.02              | 18.87  |
| 11be EHT40      | 102     | 5510            | 38.52              | 38.40  |
| 11be EHT40      | 118     | 5590            | 38.64              | 38.46  |
| 11be EHT40      | 134     | 5670            | 38.52              | 38.64  |
| 11be EHT80      | 106     | 5530            | 78.00              | 77.76  |
| 11be EHT80      | 122     | 5610            | 78.00              | 77.76  |
| 11be EHT160     | 114     | 5570            | 158.16             | 158.16 |




| UNII Emission Bandwidth Result (Within 5470-5725MHz band) |                 |                 |                    |       |
|---|-----------------|-----------------|--------------------|-------|
| Modulation Type   | Data Rate / MCS | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|   |                 |                 | ANT A              | ANT D |
| 11a   | 6 Mbps          | 5720            | 13.52              | 13.52 |
| 11be EHT20  | NSS1-MCS0       | 5720            | 14.54              | 14.54 |
| 11be EHT40  | NSS1-MCS0       | 5710            | 34.43              | 34.17 |
| 11be EHT80  | NSS1-MCS0       | 5690            | 73.70              | 73.44 |

| UNII Emission Bandwidth Result (Within 5150-5250MHz band) |                 |                 |                    |       |
|---|-----------------|-----------------|--------------------|-------|
| Modulation Type   | Data Rate / MCS | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|   |                 |                 | ANT A              | ANT D |
| 11be EHT160   | NSS1-MCS0       | 5250            | 78.80              | 79.50 |

| UNII Emission Bandwidth Result (Extends across 5250MHz band) |                 |                 |                    |       |
|--|-----------------|-----------------|--------------------|-------|
| Modulation Type  | Data Rate / MCS | Frequency (MHz) | 99% Bandwidth(MHz) |       |
|  |                 |                 | ANT A              | ANT D |
| 11be EHT160  | NSS1-MCS0       | 5250            | 78.90              | 79.10 |




26dB Bandwidth, ANT A  
Modulation Type: 802.11a (6Mbps)  
CH36

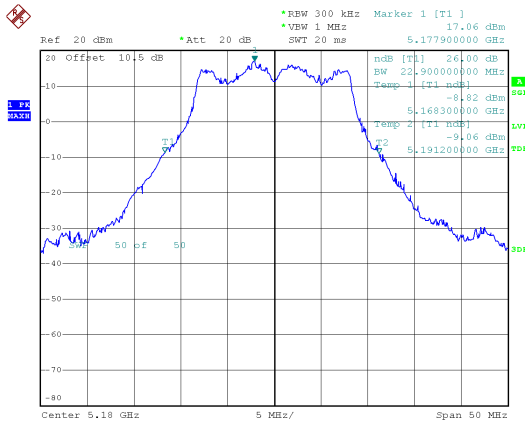


Date: 2.JAN.2025 17:45:07

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH36

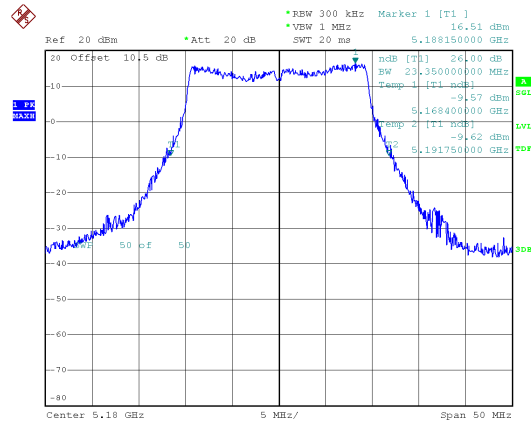


Date: 3.JAN.2025 14:27:55

CH40

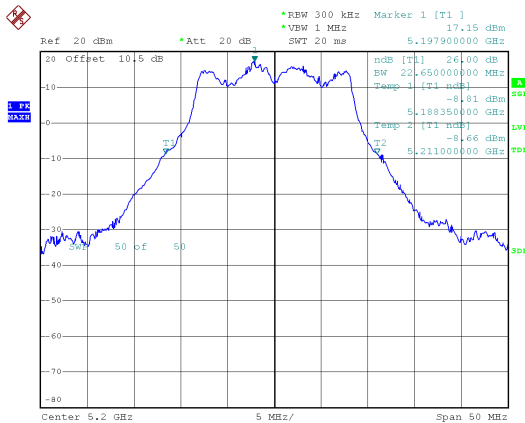


Date: 2.JAN.2025 17:52:12

CH40

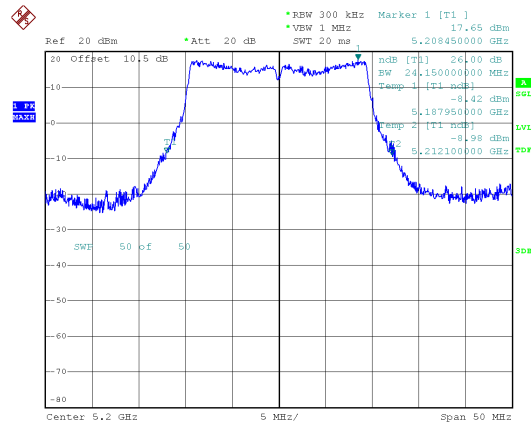


Date: 3.JAN.2025 14:38:43

CH48

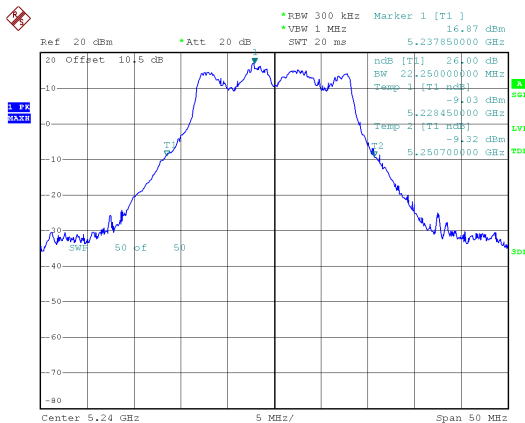

Date: 3.JAN.2025 10:33:11

CH48

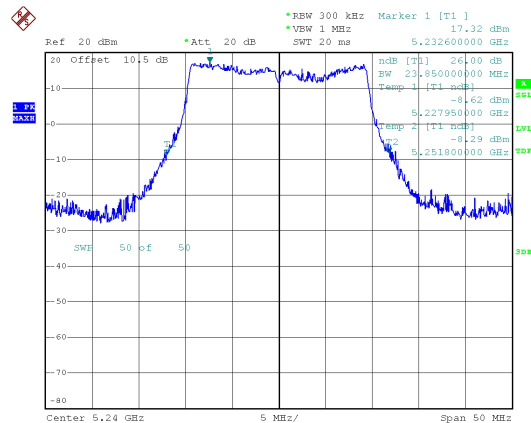


Date: 3.JAN.2025 14:57:05




26dB Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps) CH38

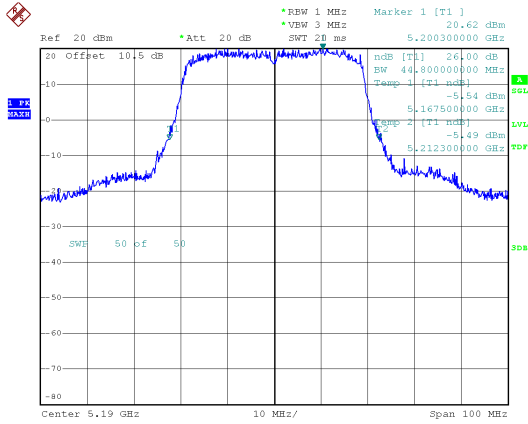


Date: 6.JAN.2025 11:47:24

Modulation Type: 802.11be EHT80 (30.6Mbps) CH42

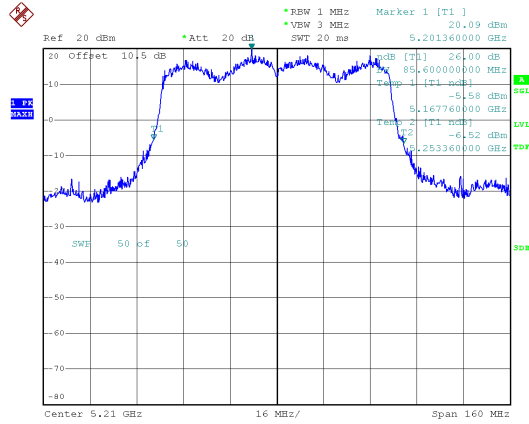

Date: 6.JAN.2025 14:55:00


CH46

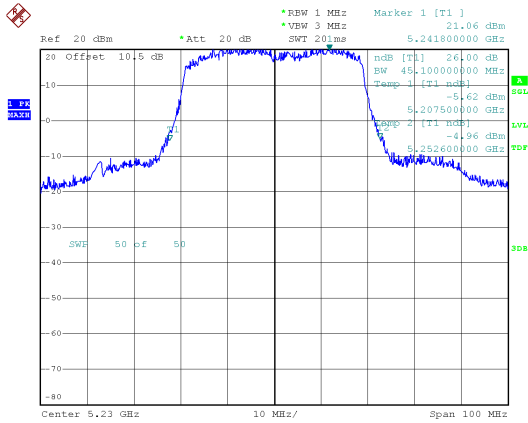

Date: 6.JAN.2025 11:53:02




26dB Bandwidth, ANT D  
Modulation Type: 802.11a (6Mbps)  
CH36

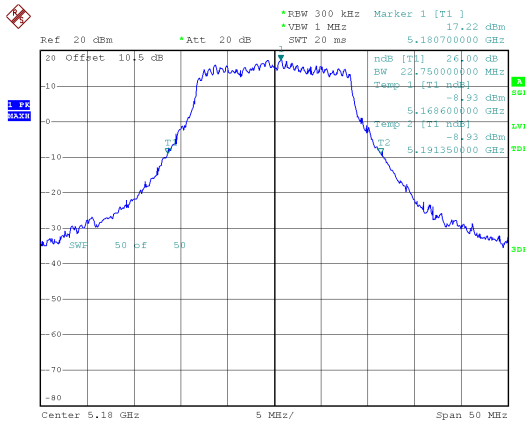


Date: 2.JAN.2025 17:46:14

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH36

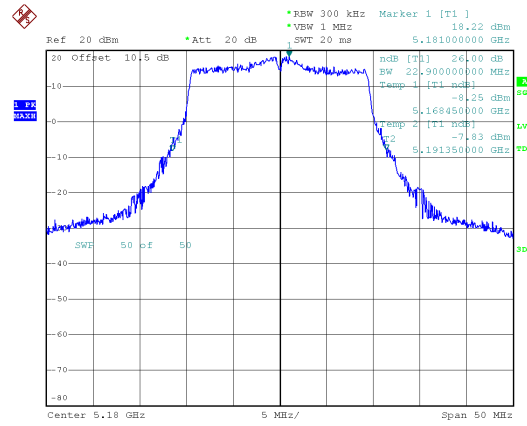


Date: 3.JAN.2025 14:29:03

CH40

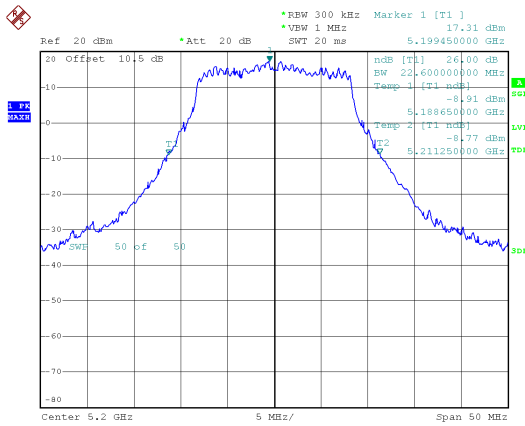


Date: 2.JAN.2025 17:53:00

CH40

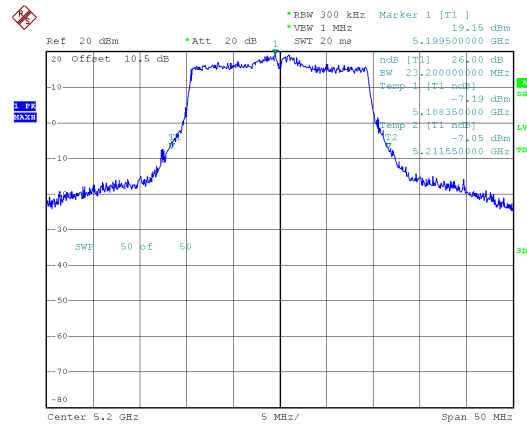


Date: 3.JAN.2025 14:39:51

CH48

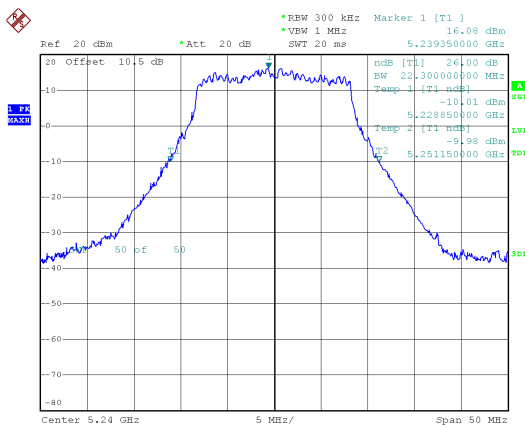

Date: 3.JAN.2025 10:35:06

CH48

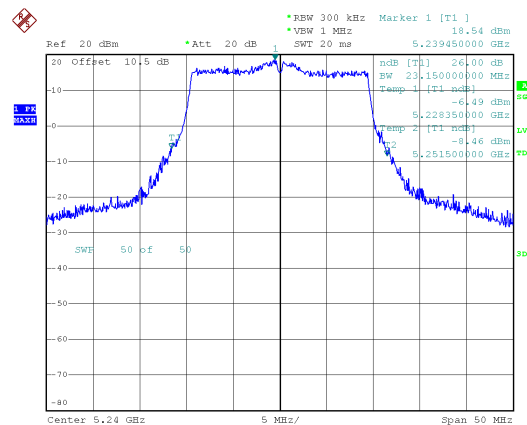


Date: 3.JAN.2025 14:58:20




26dB Bandwidth, ANT D

Modulation Type: 802.11be EHT40 (14.6Mbps) CH38

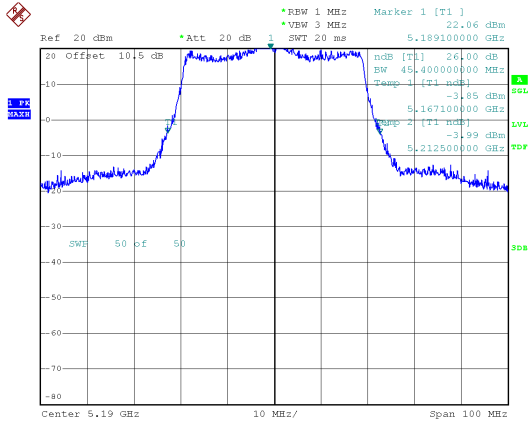


Date: 6.JAN.2025 11:48:56

Modulation Type: 802.11be EHT80 (30.6Mbps) CH42

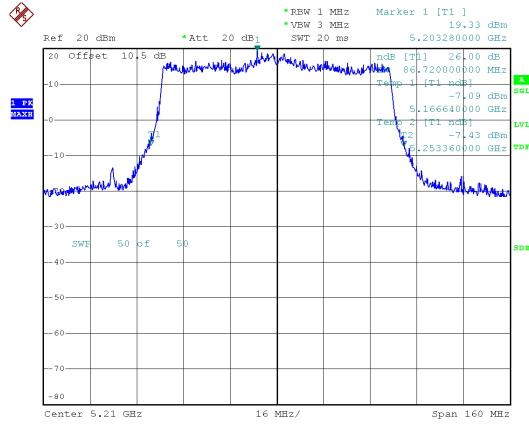

Date: 6.JAN.2025 14:56:01


CH46

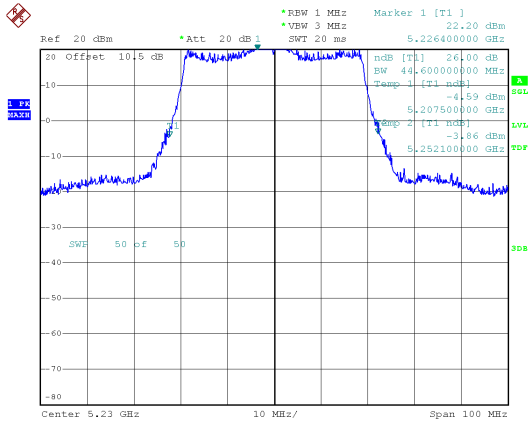

Date: 6.JAN.2025 13:17:29




26dB Bandwidth, ANT A  
Modulation Type: 802.11a (6Mbps)  
CH52

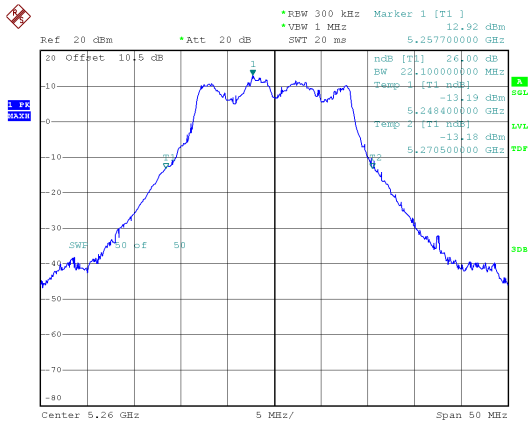


Date: 3.JAN.2025 10:38:24

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH52

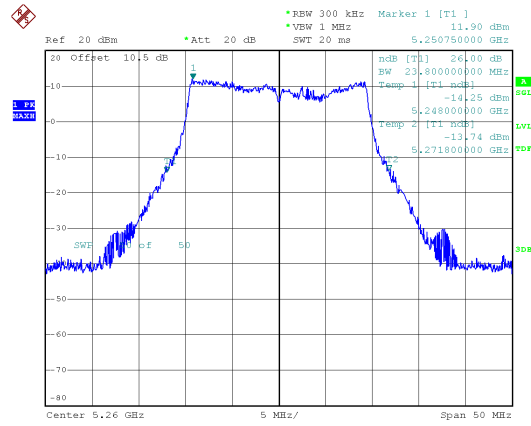


Date: 3.JAN.2025 15:14:04

CH60

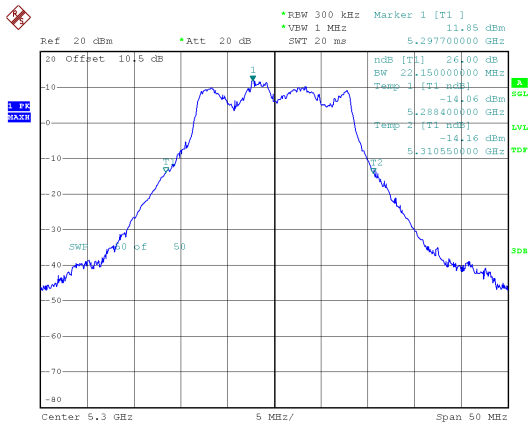


Date: 3.JAN.2025 10:46:12

CH60

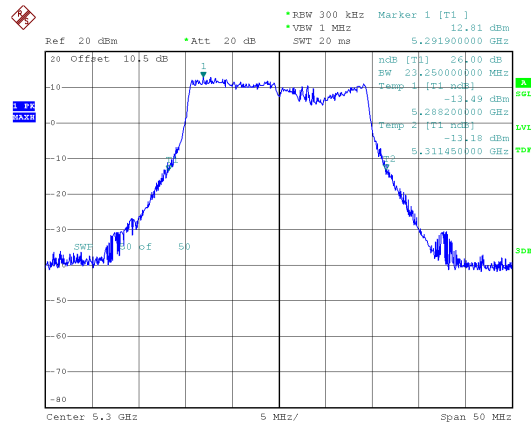


Date: 3.JAN.2025 15:34:58

CH64

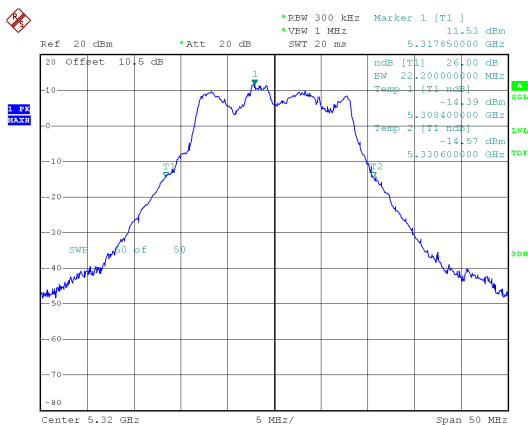

Date: 3.JAN.2025 11:03:28

CH64

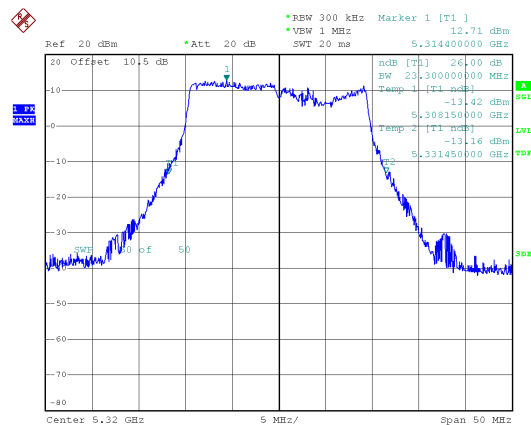


Date: 3.JAN.2025 15:39:10




26dB Bandwidth,ANT A  
Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH54

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH58

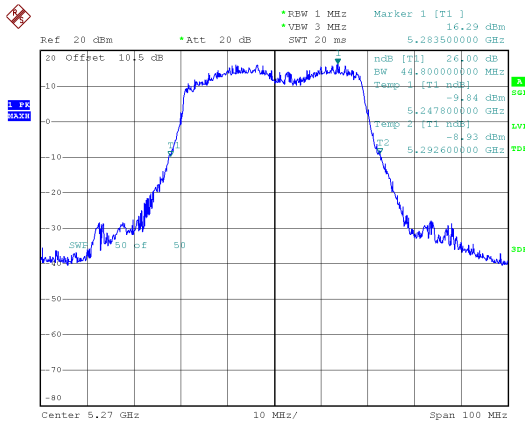


Date: 6.JAN.2025 13:20:21

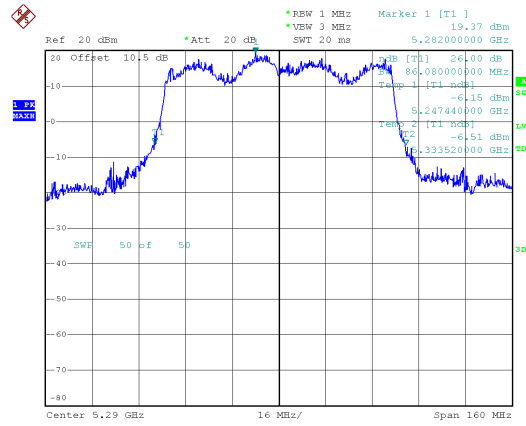

Date: 6.JAN.2025 15:01:53


CH62

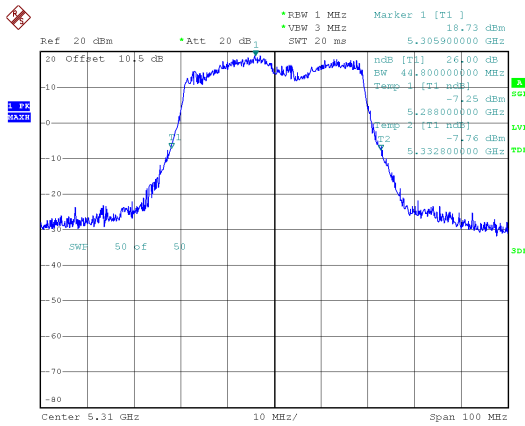

Date: 6.JAN.2025 13:37:56




26dB Bandwidth, ANT D  
Modulation Type: 802.11a (6Mbps)  
CH52

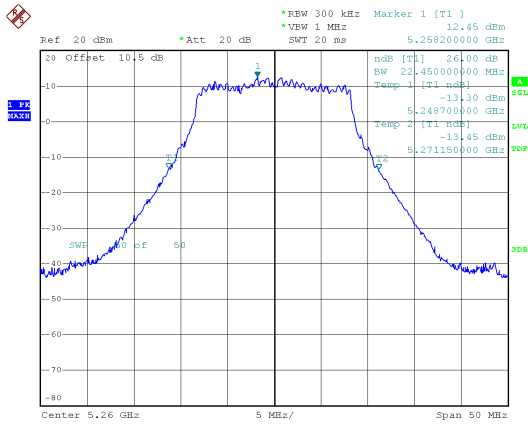


Date: 3.JAN.2025 10:40:38

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH52

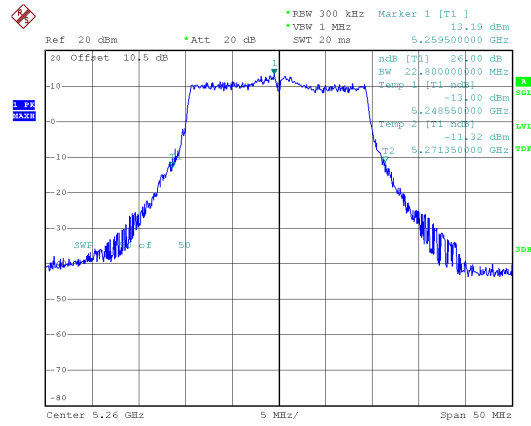


Date: 3.JAN.2025 15:19:12

CH60

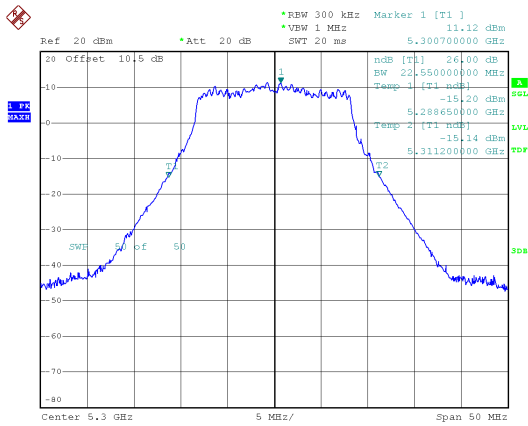


Date: 3.JAN.2025 10:47:39

CH60

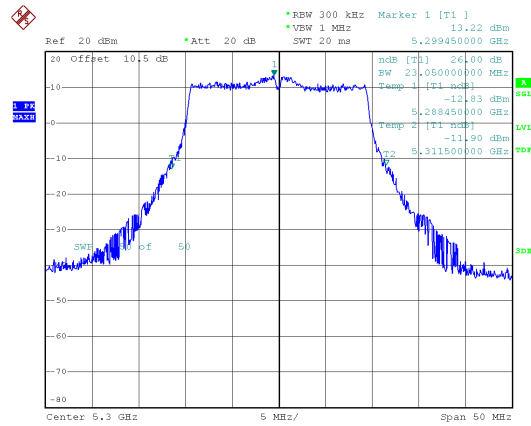


Date: 3.JAN.2025 15:36:27

CH64

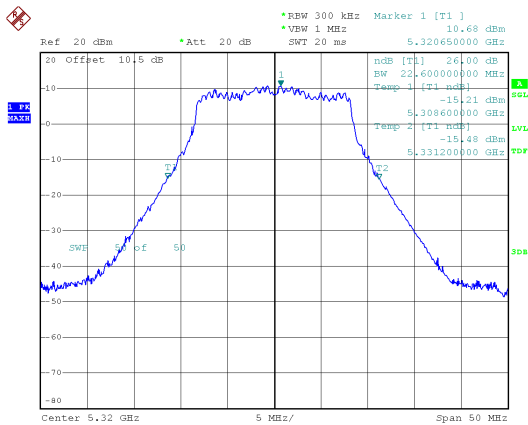

Date: 3.JAN.2025 11:04:54

CH64

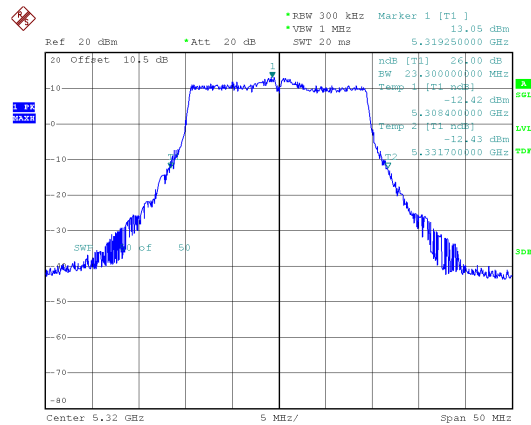


Date: 3.JAN.2025 15:40:38




26dB Bandwidth, ANT D  
Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH54

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH58

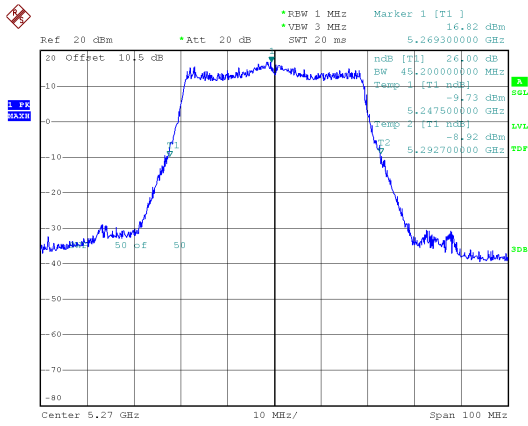


Date: 6.JAN.2025 13:22:37

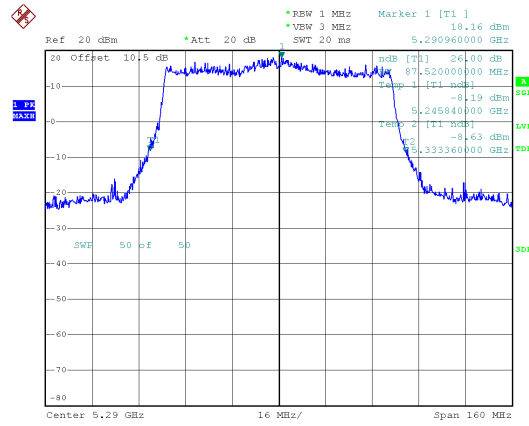

Date: 6.JAN.2025 15:03:26


CH62

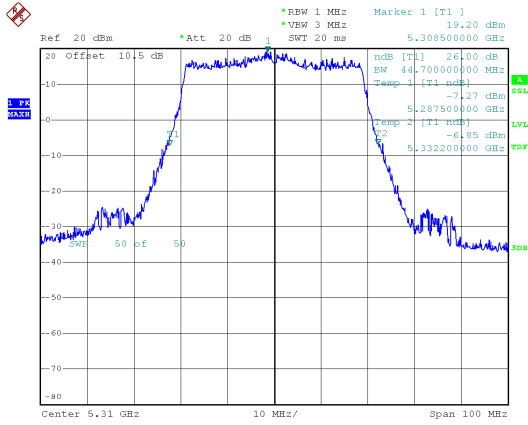

Date: 6.JAN.2025 13:39:00




26dB Bandwidth, ANT A  
Modulation Type: 802.11a (6Mbps)  
CH100

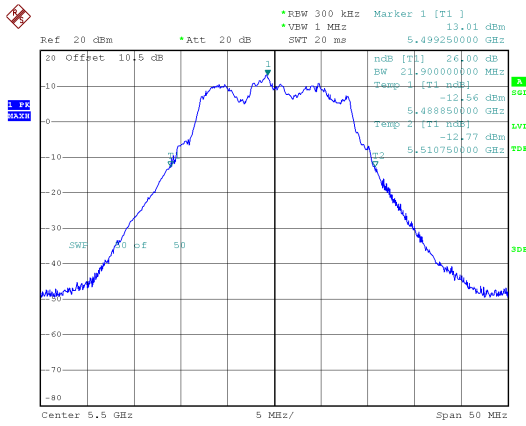


Date: 3.JAN.2025 11:07:48

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH100

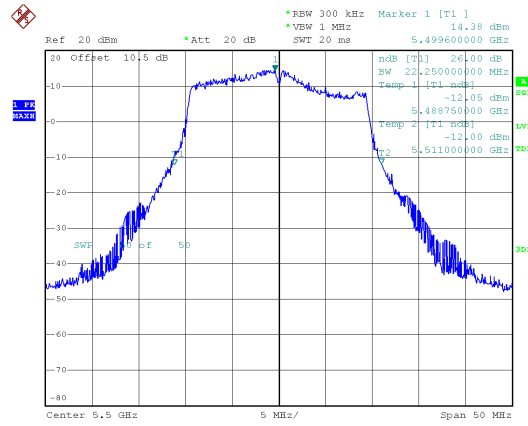


Date: 3.JAN.2025 16:37:09

CH120

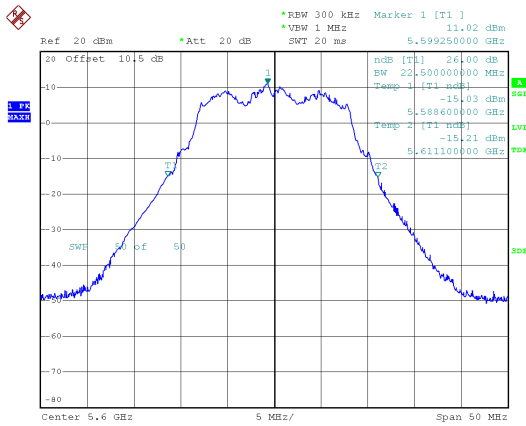


Date: 3.JAN.2025 11:24:01

CH120

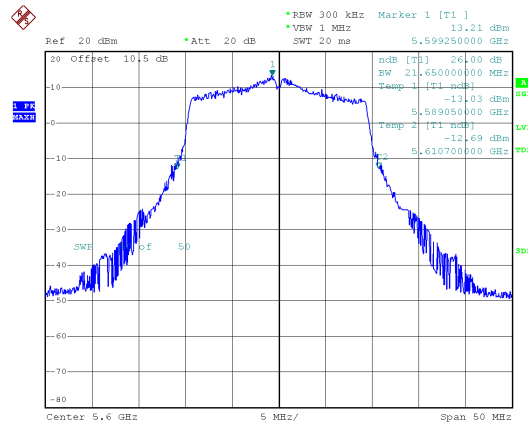


Date: 3.JAN.2025 16:54:28

CH140

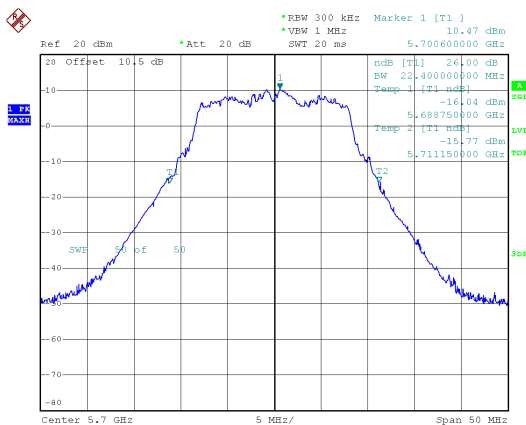

Date: 3.JAN.2025 11:41:30

CH140

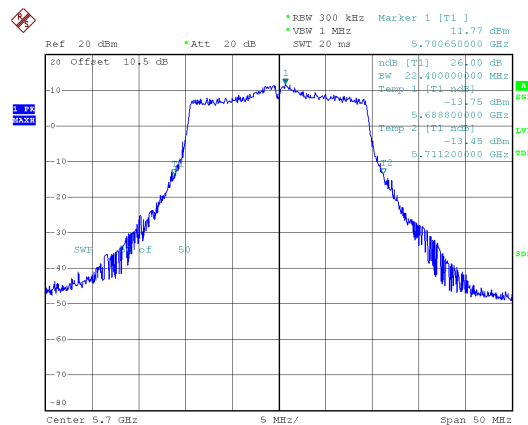


Date: 6.JAN.2025 09:43:39




26dB Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps) CH102

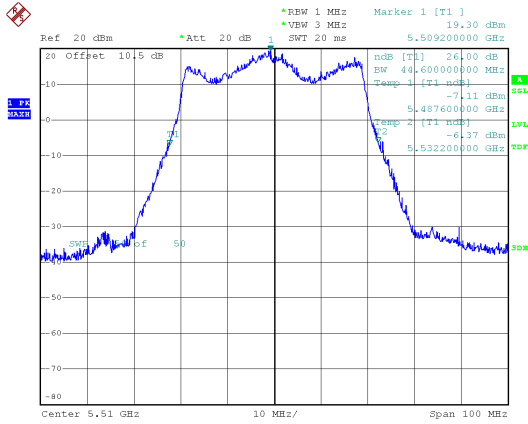


Date: 6.JAN.2025 13:50:19

Modulation Type: 802.11be EHT80 (30.6Mbps) CH106

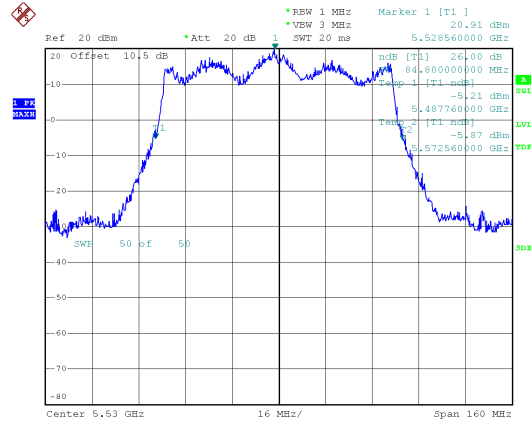


Date: 6.JAN.2025 15:25:11

CH118

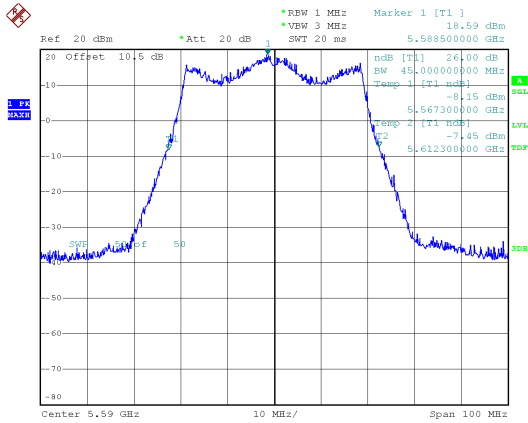


Date: 6.JAN.2025 14:10:33

CH122

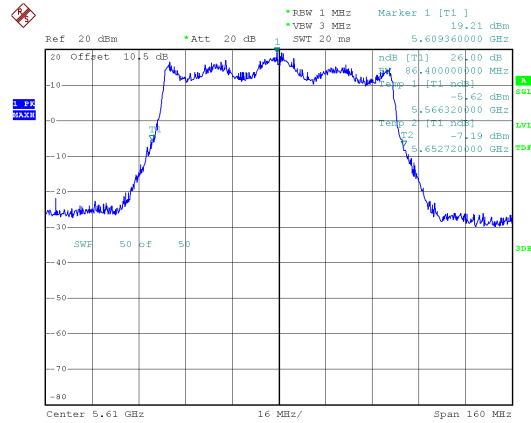

CH134

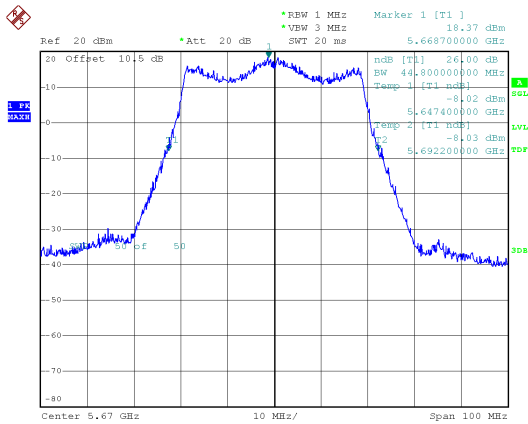


Date: 6.JAN.2025 14:15:30



26dB Bandwidth, ANT A


Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH114

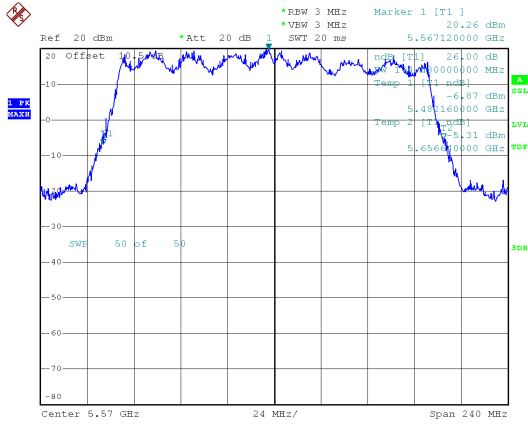

Date: 6.JAN.2025 16:48:22




26dB Bandwidth, ANT D  
Modulation Type: 802.11a (6Mbps)  
CH100

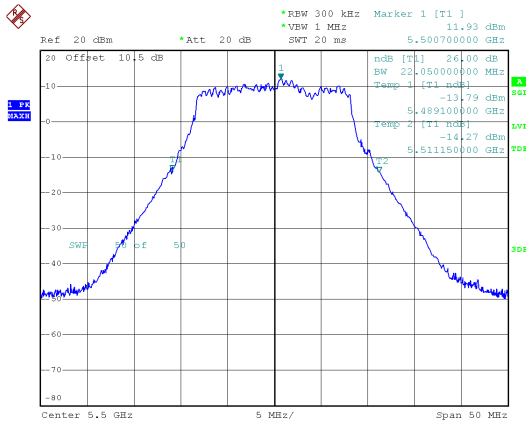


Date: 3.JAN.2025 11:08:56

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH100

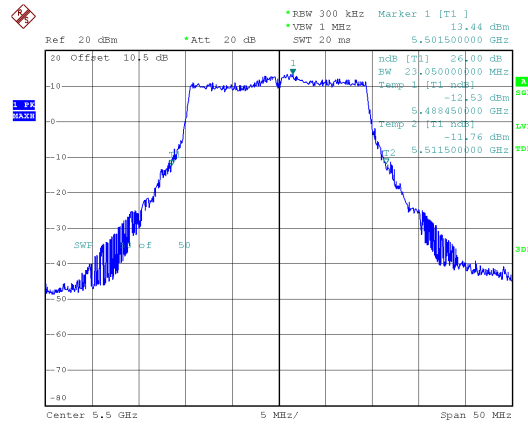


Date: 3.JAN.2025 16:38:47

CH120

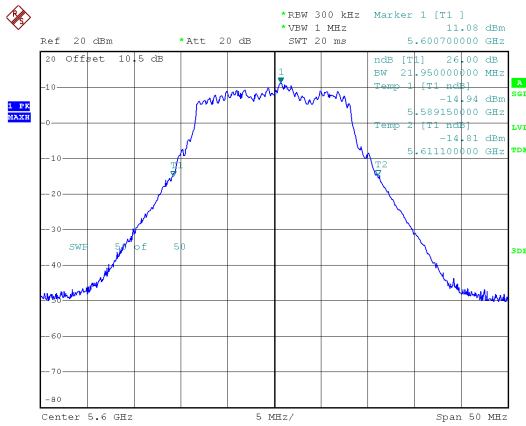


Date: 3.JAN.2025 11:25:09

CH120

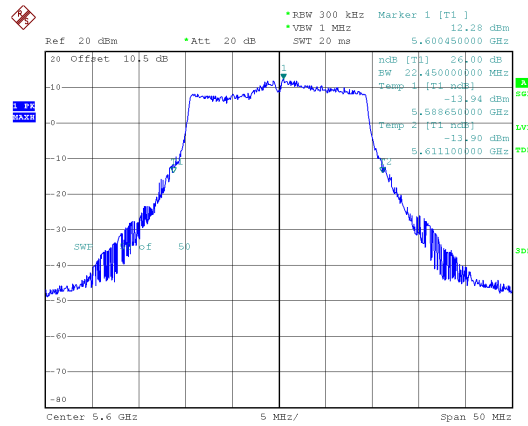


Date: 3.JAN.2025 16:56:06

CH140

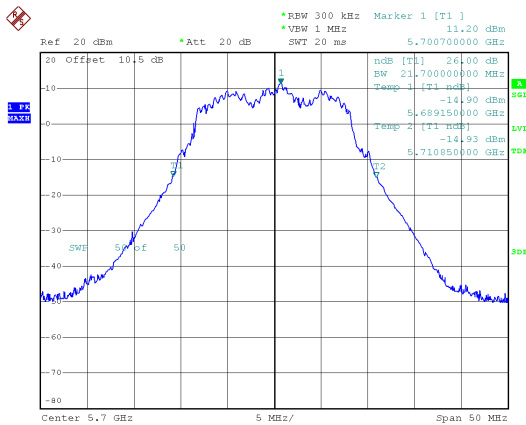

Date: 3.JAN.2025 11:42:37

CH140

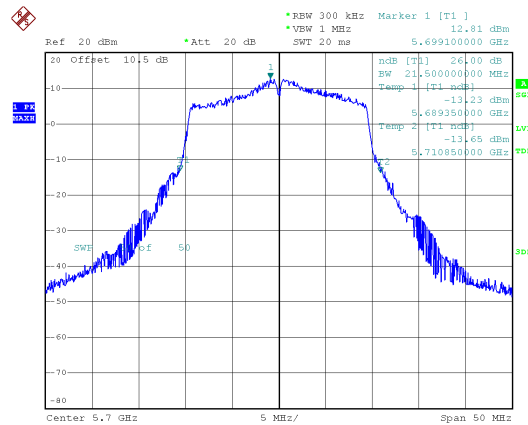


Date: 6.JAN.2025 09:45:11




26dB Bandwidth, ANT D

Modulation Type: 802.11be EHT40 (14.6Mbps) CH102

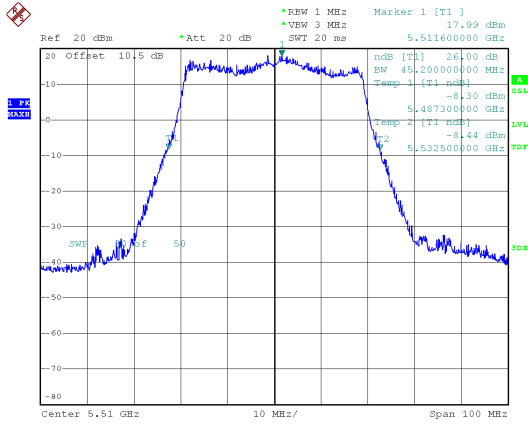


Date: 6.JAN.2025 13:51:08

Modulation Type: 802.11be EHT80 (30.6Mbps) CH106

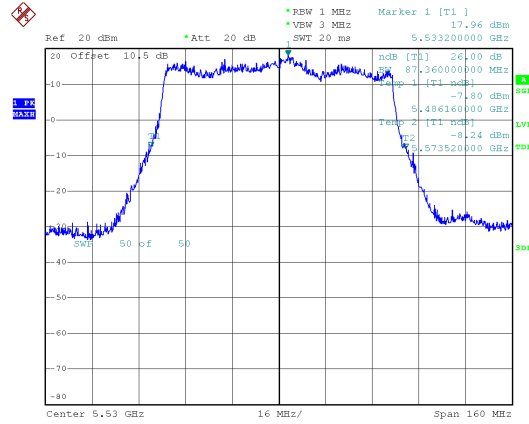


Date: 6.JAN.2025 15:26:00

CH118

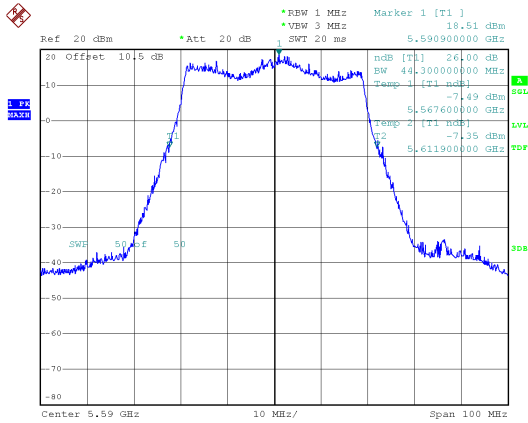


Date: 6.JAN.2025 14:11:22

CH122

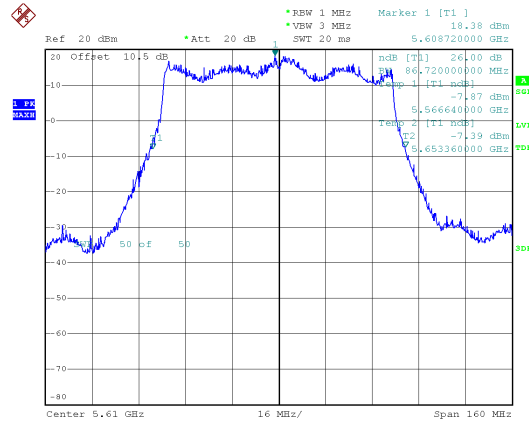

CH134

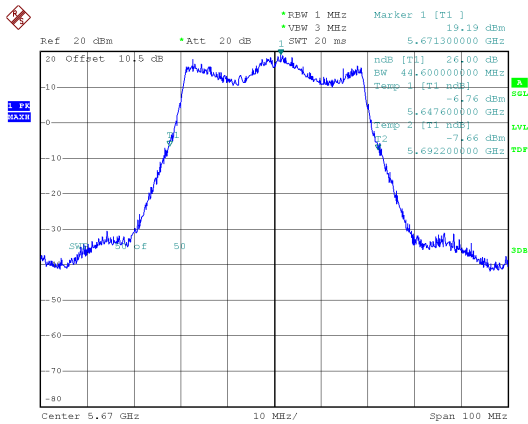


Date: 6.JAN.2025 14:16:19



26dB Bandwidth, ANT D


Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH114

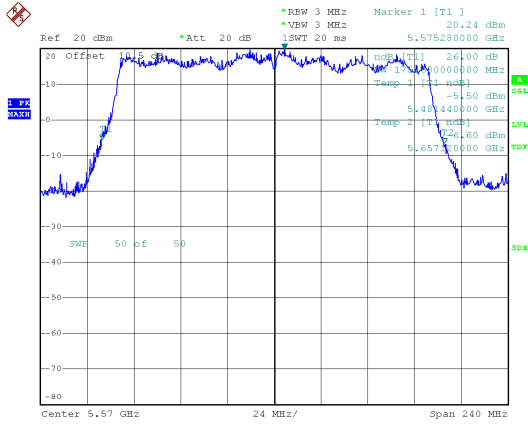

Date: 6.JAN.2025 16:49:51




26dB Bandwidth, ANT A  
Within 5470-5725MHz Band, Straddle Channel  
Modulation Type: 802.11a (6Mbps)  
CH144

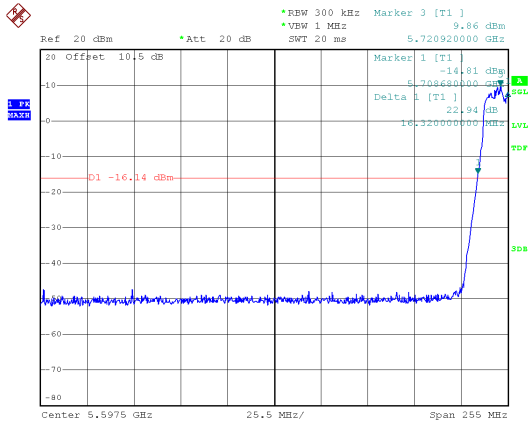


Date: 3.JAN.2025 11:50:18

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH138

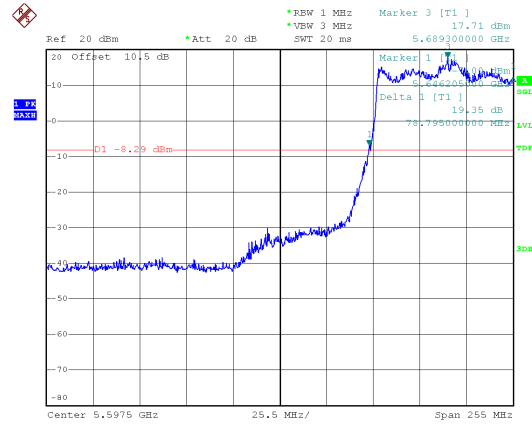


Date: 6.JAN.2025 15:58:50

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH144

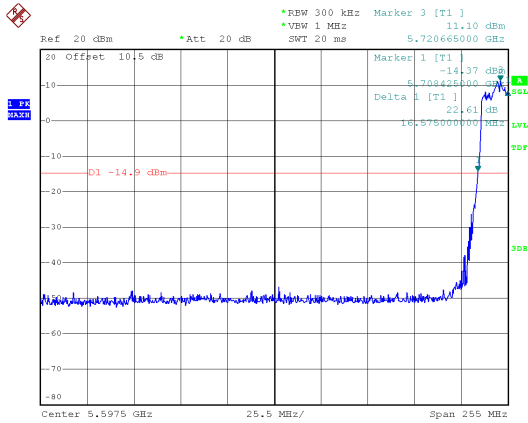

Date: 6.JAN.2025 10:28:22


Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH142

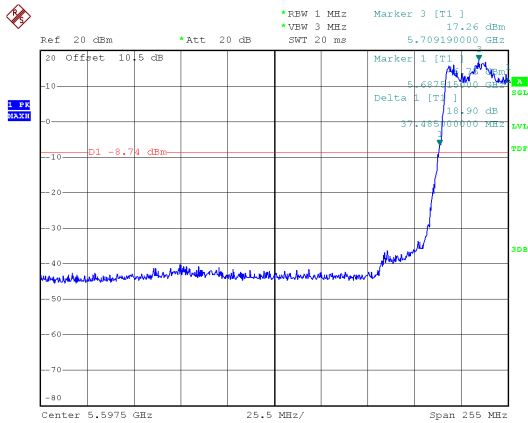

Date: 6.JAN.2025 14:35:32




26dB Bandwidth, ANT D  
Within 5470-5725MHz Band, Straddle Channel  
Modulation Type: 802.11a (6Mbps)  
CH144

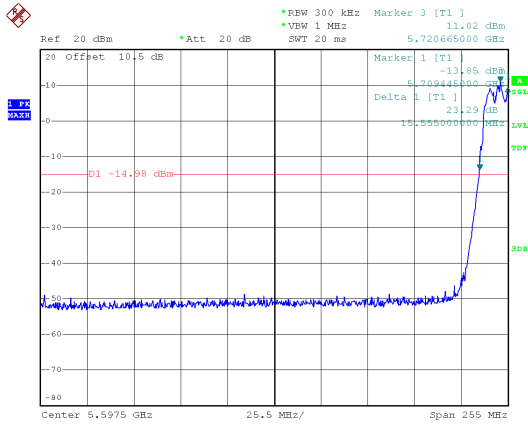


Date: 3.JAN.2025 11:53:03

Modulation Type: 802.11be EHT80 (30.6Mbps)  
CH138

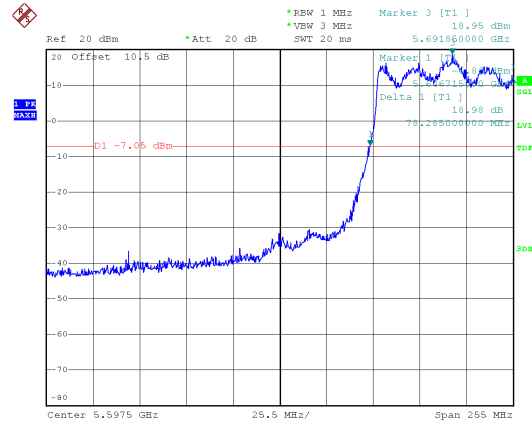


Date: 6.JAN.2025 16:00:21

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH144

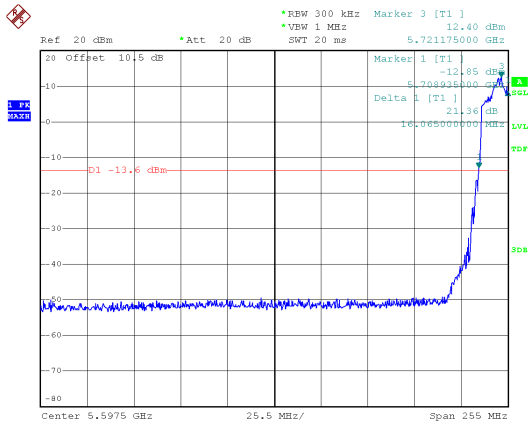

Date: 6.JAN.2025 10:32:50


Modulation Type: 802.11be EHT40 (14.6Mbps)  
CH142

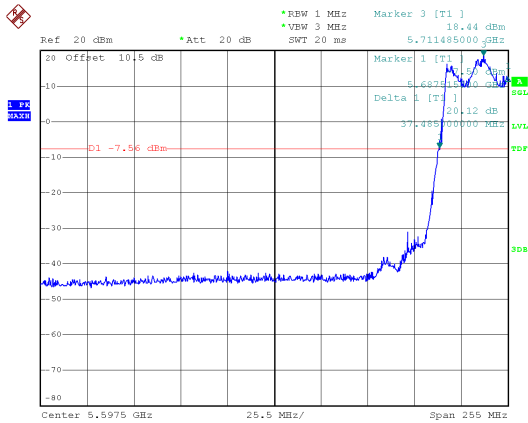

Date: 6.JAN.2025 14:37:03




26dB Bandwidth, ANT A  
Within 5150-5250MHz band, Straddle Channel  
Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH50

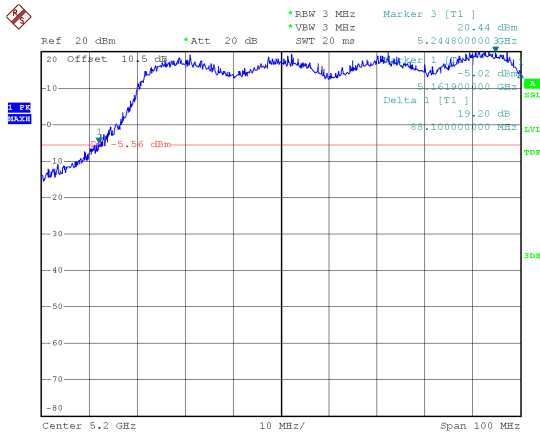

Date: 6.JAN.2025 16:35:11


26dB Bandwidth, ANT D  
Within 5150-5250MHz band, Straddle Channel  
Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH50

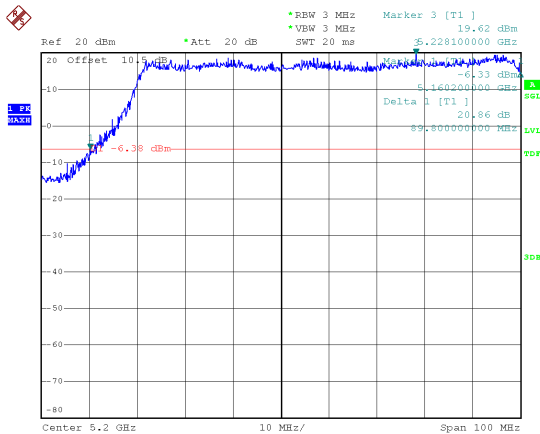

Date: 6.JAN.2025 16:38:59




26dB Bandwidth, ANT A  
Extends across 5250MHz band, Straddle Channel  
Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH50

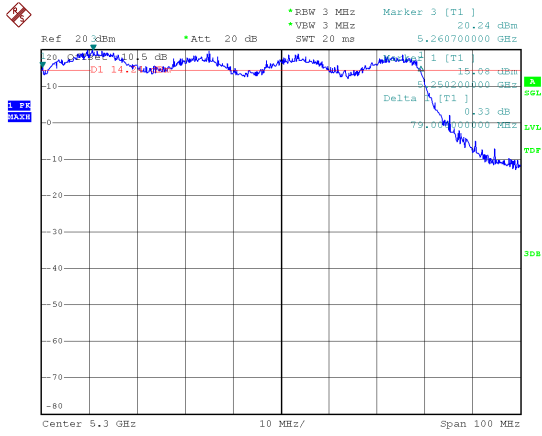

Date: 6.JAN.2025 16:35:36


26dB Bandwidth, ANT D  
Extends across 5250MHz band, Straddle Channel  
Modulation Type: 802.11be EHT160 (61.3Mbps)  
CH50

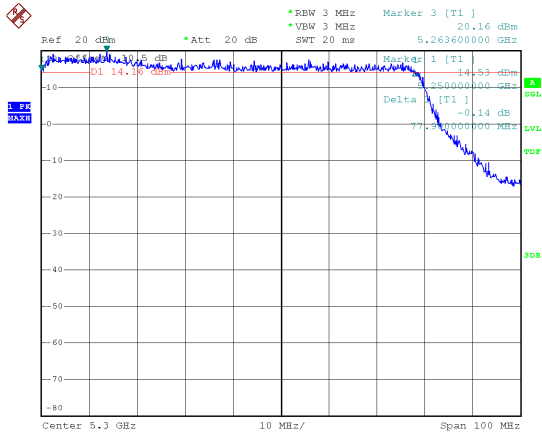

Date: 6.JAN.2025 16:39:24




99% Bandwidth, ANT A  
Modulation Type: 802.11a (6Mbps)  
CH36

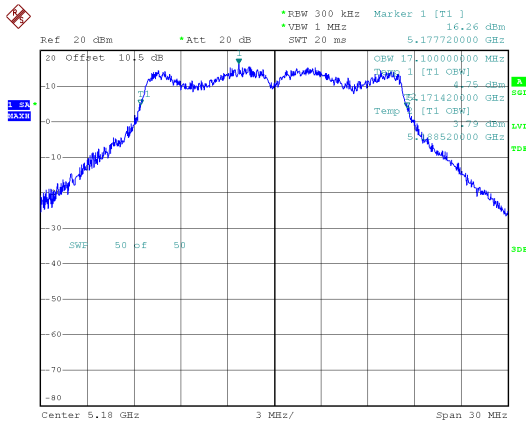


Date: 2.JAN.2025 17:44:43

Modulation Type: 802.11be EHT20 (7.3Mbps)  
CH36

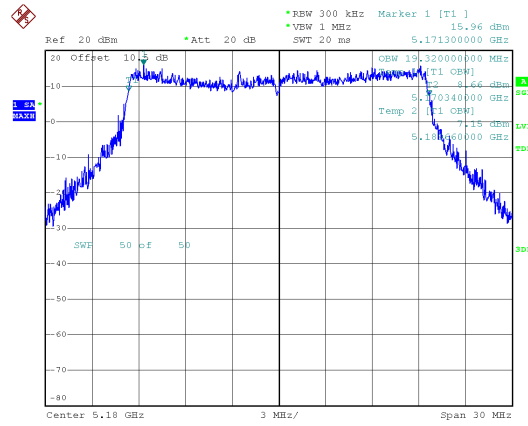


Date: 3.JAN.2025 14:27:31

CH40

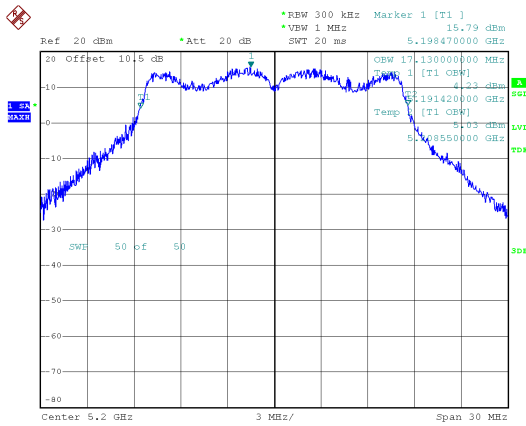


Date: 2.JAN.2025 17:51:48

CH40

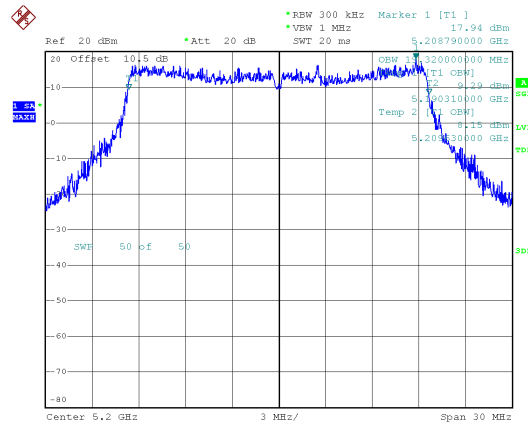


Date: 3.JAN.2025 14:38:19

CH48

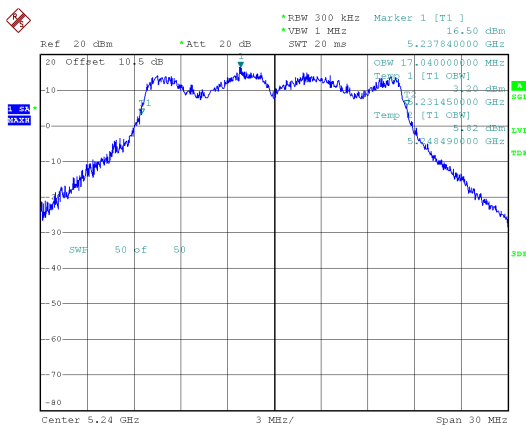

Date: 3.JAN.2025 10:32:32

CH48

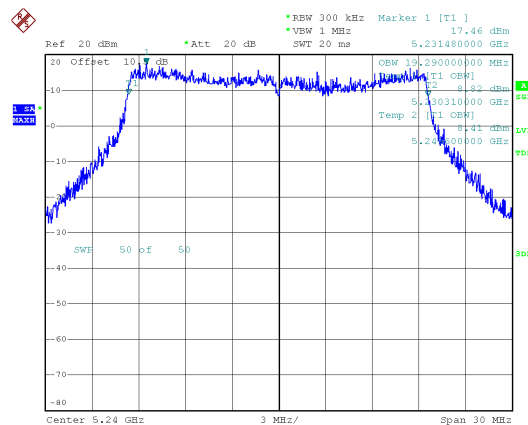


Date: 3.JAN.2025 14:56:26




99% Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps) CH38

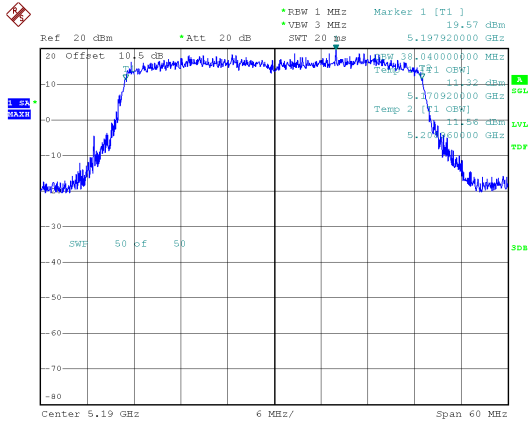


Date: 6.JAN.2025 11:47:00

Modulation Type: 802.11be EHT80 (30.6Mbps) CH42

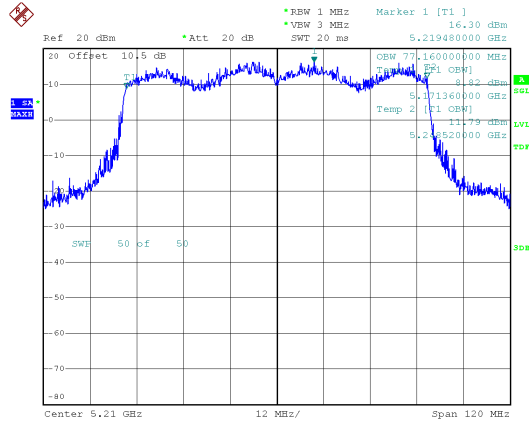

Date: 6.JAN.2025 14:54:29

CH46

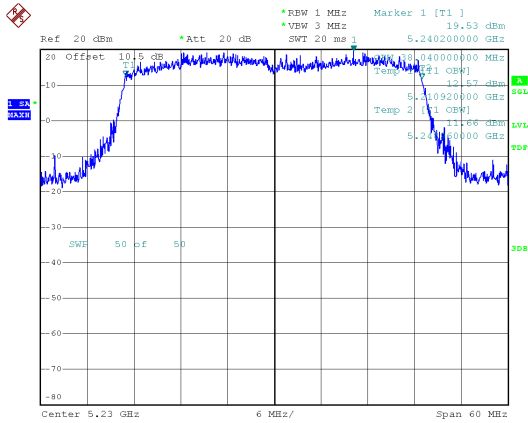

Date: 6.JAN.2025 11:52:09