

MEASUREMENT REPORT

of

Wireless ADSL2+

Applicant : D-Link Corporation
EUT : Wireless ADSL2+
Model No. : DSL-2640B
FCC ID : KA2SL2640BB3

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : D-Link Corporation
Applicant Address : 17595 Mt. Herrmann, Fountain Valley, California,
United States
FCC ID : KA2SL2640BB3
Model : DSL-2640B
Report No. : D1815090243
Test Date : December 01, 2009

Prepared by:

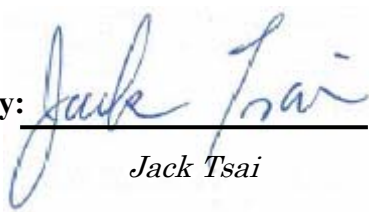
Jack Tsai

Approved by:

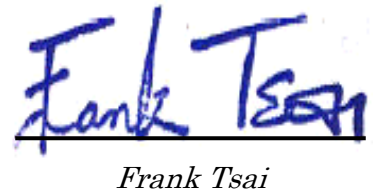
Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



Tables of Contents

I.	GENERAL	5
1.1	Introduction	5
1.2	Description of EUT	5
1.3	Test method	6
1.4	Description of Support Equipment	6
1.5	Configuration of System Under Test	8
1.6	Verify the Frequency and Channel	9
1.7	Test Procedure	10
1.8	Location of the Test Site	10
1.9	General Test Condition	10
II.	Section 15.203 : Antenna Requirement	11
III.	Section 15.207 : Power Line Conducted Emissions for AC Powered Units	12
3.1	Test Condition & Setup	12
3.2	List of Test Instruments	13
3.3	Test Result of Conducted Emissions	14
	IEEE 802.11b TX mode – Adt#1	14
	IEEE 802.11g TX mode – Adt#1	16
	IEEE 802.11b TX mode – Adt#2	17
	IEEE 802.11g TX mode – Adt#2	19
IV.	Section 15.247(a) : Technical Description of the EUT	21
V.	Section 15.247(a)(2) : Bandwidth for Direct Sequence System	22
5.1	Test Condition & Setup	22
5.2	Test Instruments Configuration	22
5.3	List of Test Instruments	22
5.4	Test Result of Bandwidth	22
	Channel 01	23
	Channel 06	24
	Channel 11	25

VI. Section 15.247(b) : Power Output	26
6.1 Test Condition & Setup	26
6.2 List of Test Instruments	26
6.3 Test Result	26
VII. Section 15.247(c) : Spurious Emissions (Radiated)	27
7.1 Test Condition & Setup	27
7.2 List of Test Instruments	29
7.3 Test Result of Spurious Radiated Emissions	30
IEEE 802.11b TX mode	30
IEEE 802.11g TX mode	36
7.4 Test Result of Bandedge.....	42
IEEE 802.11b TX mode	43
IEEE 802.11g TX mode	45
VIII. Section 15.247(d) : Power Spectral Density	47
8.1 Test Condition & Setup	47
8.2 Test Instruments Configuration	47
8.3 List of Test Instruments.....	47
8.4 Test Result of Power Spectral Density	48
Channel 01	49
Channel 06	50
Channel 11	51

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	KA2SL2640BB3
Product Name	:	Wireless ADSL2+
Model Name	:	DSL-2640B
Frequency Range	:	2.412GHz ~ 2.462GHz
Channel Spacing	:	5MHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by the switching adapter, 1. Manufacture: OEM Model: ADS18B-W 120100 I/P: 100-240VAC ~ 50-60Hz 0.5A. O/P: 12VDC 1.0A 155cm length, non-shielded, no ferrite core 2. Manufacture: OEM Model: ADS18B-B 120100 I/P: 100-240VAC ~ 50-60Hz 0.5A. O/P: 12VDC 1.0A 155cm length, non-shielded, no ferrite core
Data Cable	:	RJ11 cable x 1, 30m length, non-shielded, no ferrite core RJ45 cable x 1, 30m length, non-shielded, no ferrite core RJ45 cable x 1, 1.5m length, non-shielded, no ferrite core RJ45 cable x 2, 2.0m length, non-shielded, no ferrite core

1.3 Test method

- 1.3.1 The DC-In connected to AC mains supply by switching adapter.
- 1.3.2 The DSL port of EUT connected to far ADSL simulator.
- 1.3.3 The LAN2 and LAN3 ports are termination by RJ45 cables.
- 1.3.4 The LAN 4 port of EUT connected to far LAN port of PC.
- 1.3.5 Connected the LAN1 port of EUT with the LAN of Notebook. Using PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
- 1.3.6 Set different data rate and channel (CH01/CH06/CH11) being tested and repeat the procedures above.

(a) Conducted test and Radiated:

making EUT to the mode of continuous transmission

Notes: (1) and (2) adapters were pre-tested, the (1) adapter worst case one, was chosen for final test at radiation.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

Notebook : Lenovo

Model No. : 1709

Serial No. : LV-C3211

FCC ID : Doc Approved

BSMI : R33B65

Power Adaptor : Lenovo

Model No. : 92P1154

Serial No. : 11S92P1154Z1ZBGE68TKMG

FCC ID : Doc Approved

BSMI : R33030

Power type : 100 ~ 240VAC / 50/60Hz, 1.5A, Switching

Power cord (Main power to adaptor): Non-shielded, 1.84m length, Plastic hood, No ferrite core

Power cord (DC plug to adaptor): Shielded, 1.60m length, Plastic hood, ferrite core

Printer : **EPSON**
Model No. : B241A
Serial No. : FAPY155090
FCC ID : N/A, DoC Approved
BSMI : R33126
Power type : Switching adaptor
Power cord : Non-shielded, 198cm length, No ferrite core
Data cable : Shielded, 1.50m length, No ferrite core

LAN Card : **D-Link**
Model No. : DFE-530TX
Serial No. : 0050BAE3158B, 0050BAE32FF3
FCC ID : DoC Approved


ADSL Emulator : **PARADYNE**
Model No. : 2621-A3-431
Serial No. : 8075634
Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.0A, Switching

Notebook : **IBM Think Pad X20**
Model No. : 2662-11T
Serial No. : FX-1192200/09
FCC ID : N/A, DoC Approved
BSMI : 3892B565

Adaptor : **IBM**
Model No. : PA2450U
Serial No. : 02K6654
FCC ID : N/A, DoC Approved
Power type : I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.5A ~ 1.2A O/P: 16Vdc, 4.5A
Power cord : Non-shielded, 1.80m length, Plastic, with ferrite core

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated for Unintentional

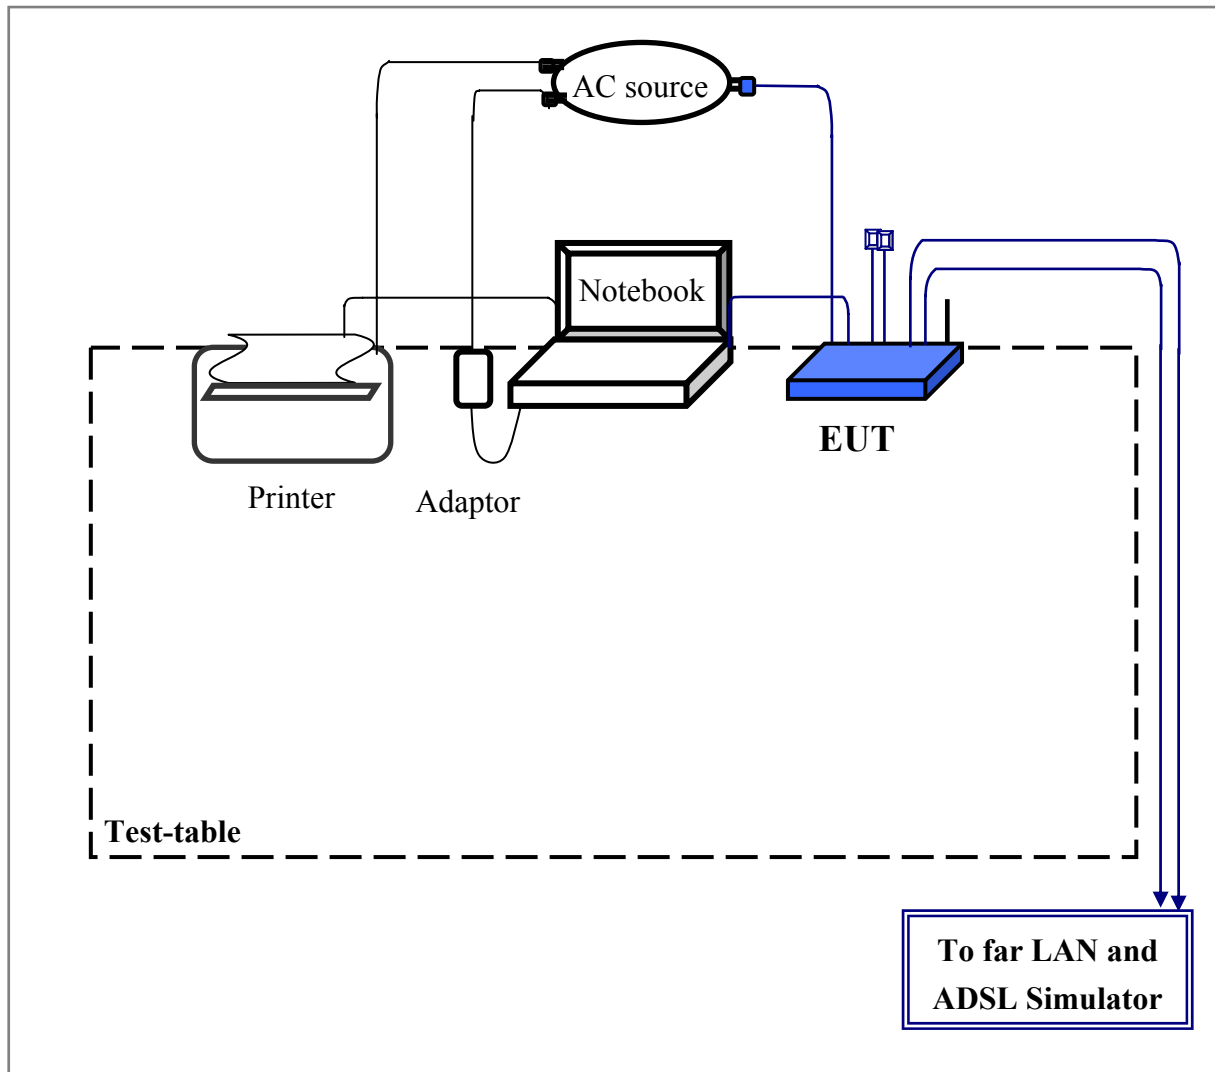

Notebook:

- * USB Port a printer
- * LAN Port EUT

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by LAN port.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, semi-anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a semi-anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.203: Antenna requirement

The EUT can be equipped with detachable antenna. The external antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The custom antenna specification of list as below:

Manufacturer	:	Pegatron
Part No	:	141501X000
Connector	:	SMA Plug Reverse
Antenna Gain	:	2.47 dBi (MAX.)

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	01/15/10
RF Filter Section	85460A	HP	3448A00217	01/15/10
LISN (EUT)	LISN-01	TRC	99-05	02/10/10
LISN (Support E.)	LISN-01	TRC	9912-03, 04	12/22/09
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	01/10/10
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	01/10/10
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	01/10/10
Coaxial Cable (2.0 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	01/10/10
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	01/10/10
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	01/10/10
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	01/10/10
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	01/10/10

3.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b Channel 1 - Adt#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	156.000	50.94	---	---	65.83	55.83	-4.89
	370.000	42.65	---	---	59.71	49.71	-7.06
	668.000	37.14	---	---	56.00	46.00	-8.86
	1518.000	37.43	---	---	56.00	46.00	-8.57
	4053.000	38.26	---	---	56.00	46.00	-7.74
	4445.000	39.73	---	---	56.00	46.00	-6.27
Line 2	155.000	49.87	---	---	65.86	55.86	-5.99
	366.000	40.71	---	---	59.83	49.83	-9.12
	717.000	38.89	---	---	56.00	46.00	-7.11
	980.000	37.90	---	---	56.00	46.00	-8.10
	1550.000	38.26	---	---	56.00	46.00	-7.74
	4484.000	38.48	---	---	56.00	46.00	-7.52

NOTE:

- (1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 6 - Adt#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	159.000	49.92	---	---	65.74	55.74	-5.82
	377.000	42.96	---	---	59.51	49.51	-6.55
	645.000	37.60	---	---	56.00	46.00	-8.40
	858.000	38.59	---	---	56.00	46.00	-7.41
	1346.000	37.28	---	---	56.00	46.00	-8.72
	4014.000	39.01	---	---	56.00	46.00	-6.99
Line 2	161.000	49.68	---	---	65.69	55.69	-6.01
	370.000	42.82	---	---	59.71	49.71	-6.89
	858.000	38.77	---	---	56.00	46.00	-7.23
	1518.000	37.92	---	---	56.00	46.00	-8.08
	3936.000	39.36	---	---	56.00	46.00	-6.64
	4288.000	39.64	---	---	56.00	46.00	-6.36

Test mode: IEEE 802.11b Channel 11 - Adt#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	161.000	48.74	---	---	65.69	55.69	-6.95
	377.000	42.81	---	---	59.51	49.51	-6.70
	645.000	36.99	---	---	56.00	46.00	-9.01
	850.000	38.19	---	---	56.00	46.00	-7.81
	1490.000	36.97	---	---	56.00	46.00	-9.03
	4249.000	39.93	---	---	56.00	46.00	-6.07
Line 2	163.000	49.41	---	---	65.63	55.63	-6.22
	216.000	42.40	---	---	64.11	54.11	-11.71
	377.000	43.40	---	---	59.51	49.51	-6.11
	858.000	38.35	---	---	56.00	46.00	-7.65
	1550.000	38.14	---	---	56.00	46.00	-7.86
	4288.000	38.95	---	---	56.00	46.00	-7.05

Test mode: IEEE 802.11g Channel 1 - Adt#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	155.000	49.57	---	---	65.86	55.86	-6.29
	366.000	41.35	---	---	59.83	49.83	-8.48
	674.000	40.31	---	---	56.00	46.00	-5.69
	858.000	41.86	---	---	56.00	46.00	-4.14
	1518.000	40.78	---	---	56.00	46.00	-5.22
	4445.000	38.90	---	---	56.00	46.00	-7.10
Line 2	156.000	50.49	---	---	65.83	55.83	-5.34
	373.000	42.68	---	---	59.63	49.63	-6.95
	413.000	39.73	---	---	58.49	48.49	-8.76
	795.000	41.72	---	---	56.00	46.00	-4.28
	1490.000	41.17	---	---	56.00	46.00	-4.83
	4445.000	39.47	---	---	56.00	46.00	-6.53

Test mode: IEEE 802.11g Channel 6 - Adt#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	156.000	50.49	---	---	65.83	55.83	-5.34
	366.000	42.27	---	---	59.83	49.83	-7.56
	876.000	42.18	---	---	56.00	46.00	-3.82
	1518.000	41.35	---	---	56.00	46.00	-4.65
	4171.000	38.28	---	---	56.00	46.00	-7.72
	19620.000	40.30	---	---	60.00	50.00	-9.70
Line 2	155.000	50.26	---	---	65.86	55.86	-5.60
	206.000	41.35	---	---	59.63	49.63	-8.28
	724.000	41.28	---	---	56.00	46.00	-4.72
	809.000	41.20	---	---	56.00	46.00	-4.80
	1477.000	41.73	---	---	56.00	46.00	-4.27
	4445.000	39.10	---	---	56.00	46.00	-6.90

Test mode: IEEE 802.11g Channel 11 - Adt#1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	155.000	49.39	---	---	65.86	55.86	-6.47
	370.000	41.66	---	---	59.71	49.71	-8.05
	674.000	39.34	---	---	56.00	46.00	-6.66
	841.000	40.78	---	---	56.00	46.00	-5.22
	1534.000	40.66	---	---	56.00	46.00	-5.34
	4484.000	38.03	---	---	56.00	46.00	-7.97
Line 2	158.000	50.05	---	---	65.77	55.77	-5.72
	363.000	40.43	---	---	59.91	49.91	-9.48
	409.000	40.26	---	---	58.60	48.60	-8.34
	858.000	41.31	---	---	56.00	46.00	-4.69
	1534.000	41.68	---	---	56.00	46.00	-4.32
	4445.000	38.50	---	---	56.00	46.00	-7.50

Test mode: IEEE 802.11b Channel 1 - Adt#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	152.000	45.00	---	---	65.94	55.94	-10.94
	185.000	44.61	---	---	65.00	55.00	-10.39
	366.000	41.78	---	---	59.83	49.83	-8.05
	645.000	34.40	---	---	56.00	46.00	-11.60
	928.000	34.67	---	---	56.00	46.00	-11.33
	4952.000	36.97	---	---	56.00	46.00	-9.03
Line 2	150.000	44.38	---	---	66.00	56.00	-11.62
	183.000	43.14	---	---	65.06	55.06	-11.92
	366.000	40.99	---	---	59.83	49.83	-8.84
	657.000	35.49	---	---	56.00	46.00	-10.51
	893.000	33.25	---	---	56.00	46.00	-12.75
	5000.000	36.57	---	---	60.00	50.00	-13.43

Test mode: IEEE 802.11b Channel 6 - Adt#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	164.000	42.50	---	---	65.60	55.60	-13.10
	182.000	44.68	---	---	65.09	55.09	-10.41
	366.000	41.30	---	---	59.83	49.83	-8.53
	426.000	34.90	---	---	58.11	48.11	-13.21
	657.000	35.18	---	---	56.00	46.00	-10.82
	4952.000	38.21	---	---	56.00	46.00	-7.79
Line 2	152.000	45.15	---	---	65.94	55.94	-10.79
	180.000	43.40	---	---	65.14	55.14	-11.74
	366.000	41.43	---	---	59.83	49.83	-8.40
	645.000	35.08	---	---	56.00	46.00	-10.92
	1038.000	34.41	---	---	56.00	46.00	-11.59
	4809.000	37.30	---	---	56.00	46.00	-8.70

Test mode: IEEE 802.11b Channel 11 - Adt#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	152.000	46.21	---	---	65.94	55.94	-9.73
	159.000	45.15	---	---	65.74	55.74	-10.59
	185.000	43.37	---	---	65.00	55.00	-11.63
	370.000	41.33	---	---	59.71	49.71	-8.38
	651.000	33.71	---	---	56.00	46.00	-12.29
	5000.000	39.02	---	---	60.00	50.00	-10.98
Line 2	153.000	48.35	---	---	65.91	55.91	-7.56
	189.000	42.39	---	---	64.89	54.89	-12.50
	373.000	40.18	---	---	59.63	49.63	-9.45
	928.000	33.83	---	---	56.00	46.00	-12.17
	5030.000	38.57	---	---	60.00	50.00	-11.43
	23120.000	38.40	---	---	60.00	50.00	-11.60

Test mode: IEEE 802.11g Channel 1 - Adt#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	150.000	44.84	---	---	66.00	56.00	-11.16
	185.000	43.12	---	---	65.00	55.00	-11.88
	366.000	41.39	---	---	59.83	49.83	-8.44
	645.000	33.83	---	---	56.00	46.00	-12.17
	4952.000	38.16	---	---	56.00	46.00	-7.84
	24440.000	38.43	---	---	60.00	50.00	-11.57
Line 2	152.000	45.71	---	---	65.94	55.94	-10.23
	187.000	42.41	---	---	64.94	54.94	-12.53
	370.000	40.20	---	---	59.71	49.71	-9.51
	850.000	36.94	---	---	56.00	46.00	-9.06
	5050.000	38.22	---	---	60.00	50.00	-11.78
	24320.000	39.71	---	---	60.00	50.00	-10.29

Test mode: IEEE 802.11g Channel 6 - Adt#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	152.000	44.70	---	---	65.94	55.94	-11.24
	187.000	42.88	---	---	64.94	54.94	-12.06
	366.000	41.11	---	---	59.83	49.83	-8.72
	4952.000	38.42	---	---	56.00	46.00	-7.58
	9980.000	36.64	---	---	60.00	50.00	-13.36
	24320.000	39.27	---	---	60.00	50.00	-10.73
Line 2	152.000	47.96	---	---	65.94	55.94	-7.98
	187.000	44.82	---	---	64.94	54.94	-10.12
	366.000	40.26	---	---	59.83	49.83	-9.57
	657.000	34.28	---	---	56.00	46.00	-11.72
	5050.000	37.50	---	---	60.00	50.00	-12.50
	23120.000	37.86	---	---	60.00	50.00	-12.14

Test mode: IEEE 802.11g Channel 11 - Adt#2

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	156.000	44.30	---	---	65.83	55.83	-11.53
	191.000	42.31	---	---	64.83	54.83	-12.52
	370.000	40.52	---	---	59.71	49.71	-9.19
	598.000	33.24	---	---	56.00	46.00	-12.76
	5000.000	38.14	---	---	60.00	50.00	-11.86
	24320.000	39.57	---	---	60.00	50.00	-10.43
Line 2	152.000	44.80	---	---	65.94	55.94	-11.14
	163.000	44.46	---	---	65.63	55.63	-11.17
	250.000	46.36	---	---	63.14	53.14	-6.78
	370.000	39.95	---	---	59.71	49.71	-9.76
	876.000	34.43	---	---	56.00	46.00	-11.57
	4666.000	38.38	---	---	56.00	46.00	-7.62

IV. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

V. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

5.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.2 Test Instruments Configuration

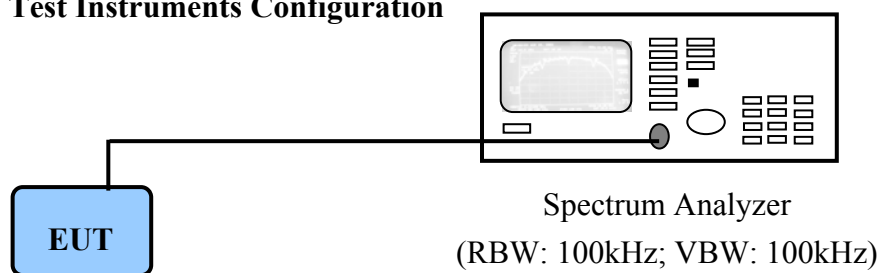

PC to control the EUT at maximal power output and channel number and set antenna kit

5.3 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/09

5.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	10.12 MHz	16.72 MHz
06	10.12 MHz	16.72 MHz
11	10.08 MHz	16.72 MHz

- Note:
1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

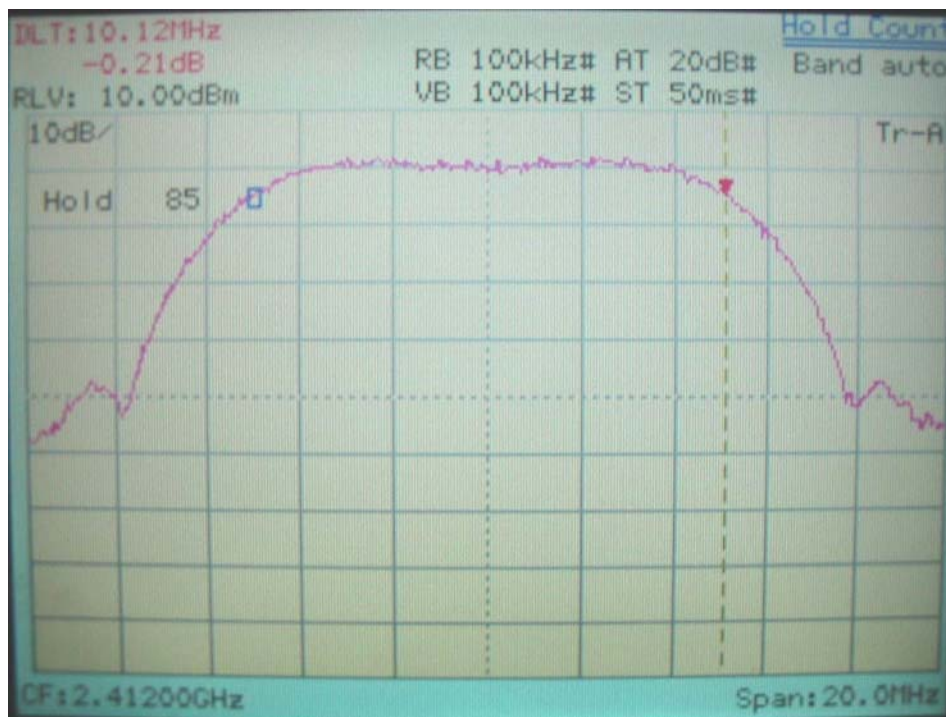


IEEE 802.11b

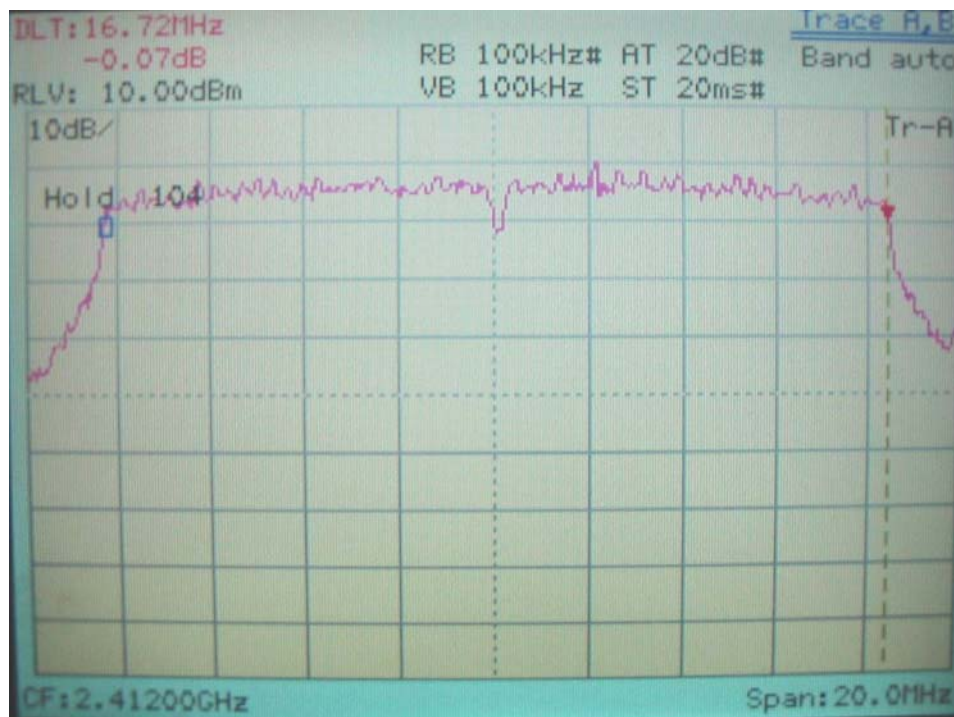


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

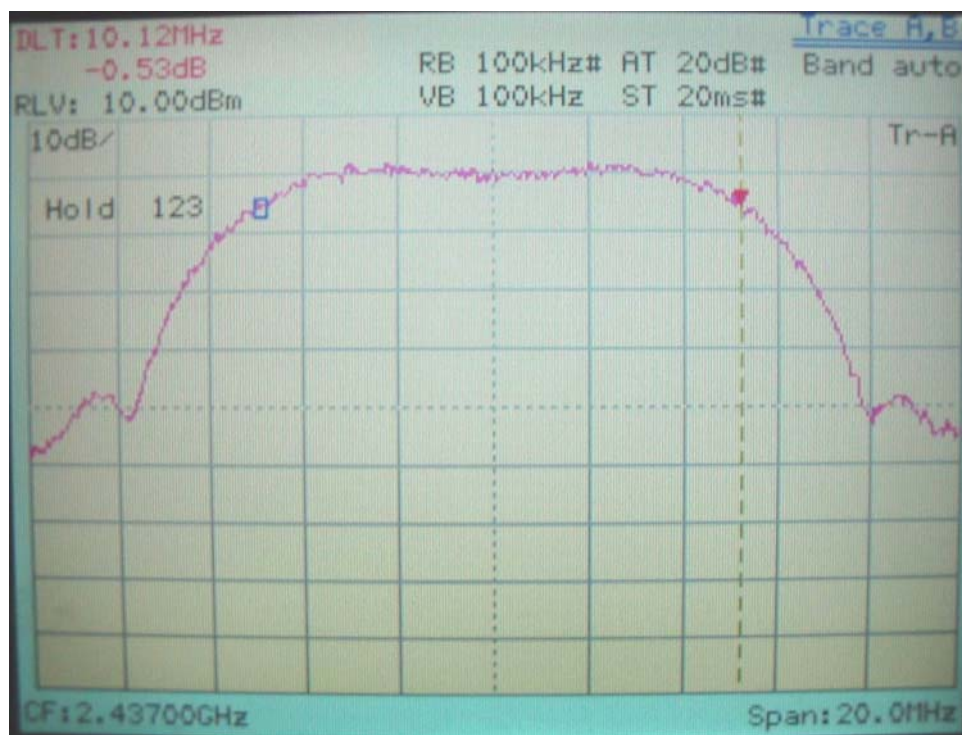


IEEE 802.11b

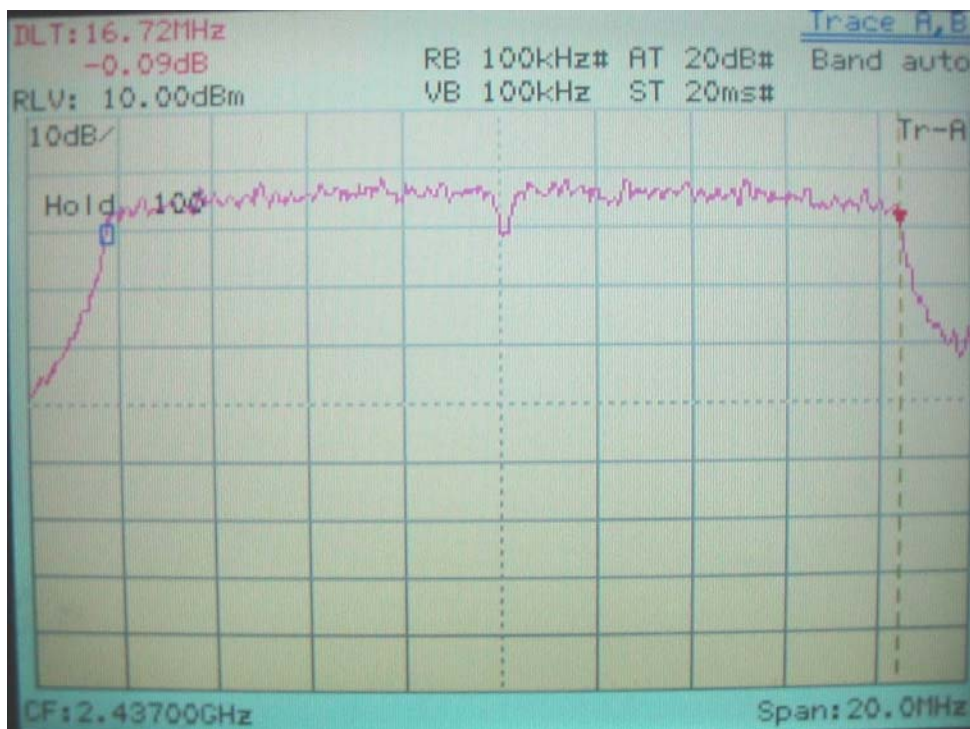


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

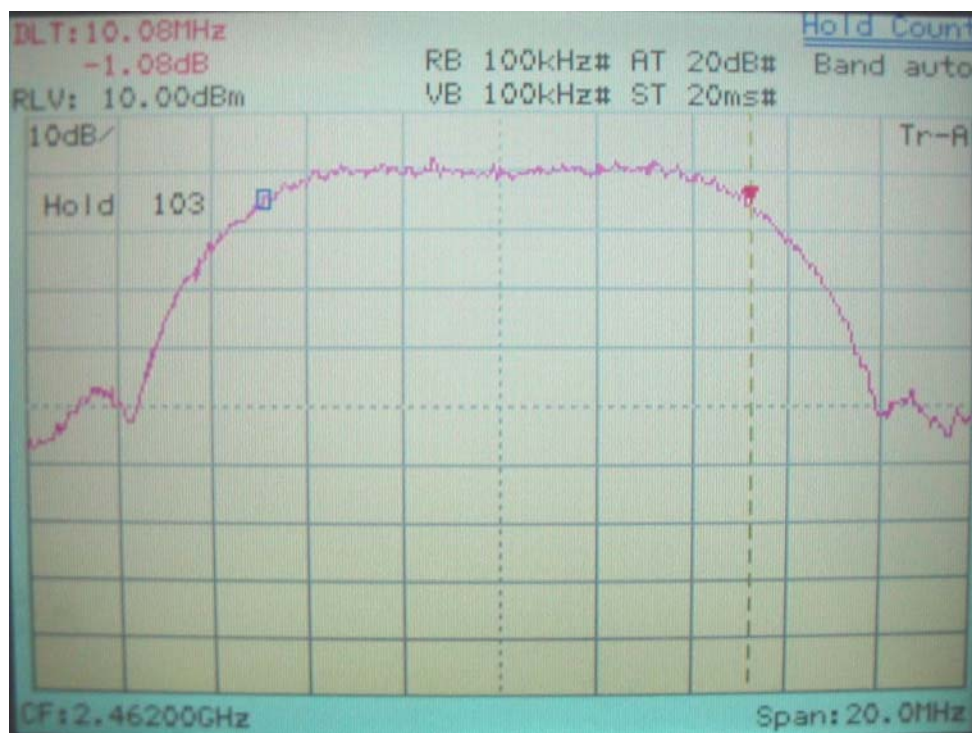


IEEE 802.11b

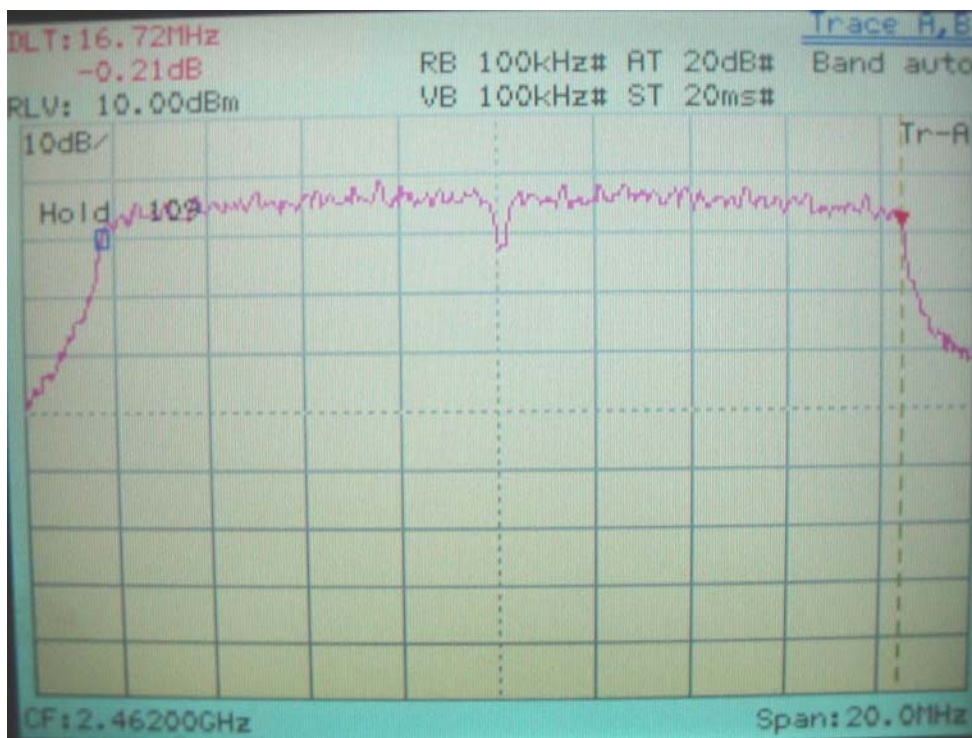

IEEE 802.11g

VI. Section 15.247(b): Power Output

6.1 Test Condition & Setup

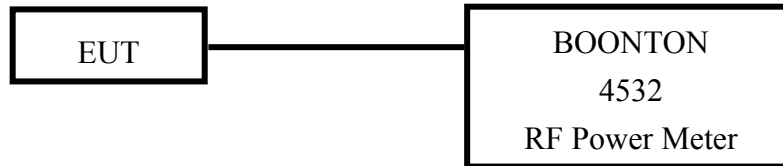

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

6.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	12/11/09
Peak Power Sensor	57340	BOONTON	2696	12/11/09

6.3 Test Result

Formula:

RF Output of EUT + |Cable Loss| = Output Peak Power

Channel	RF Output	Cable Loss	Output Peak Power	
			dBm	mW
802.11b CH01	18.87	1.00	19.87	87.05
802.11b CH06	19.15	1.00	20.15	103.51
802.11b CH11	19.09	1.00	20.09	102.09
802.11g CH01	21.79	1.00	22.79	190.11
802.11g CH06	21.48	1.00	22.48	177.01
802.11g CH11	21.56	1.00	22.56	180.30

VII. Section 15.247 (C): Spurious Emissions (Radiated)

7.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an semi-anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, semi-anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30MHz to 1000MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	01/15/10
RF Filter Section	85460A	HP	3448A00217	01/15/10
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	01/10/10
Pre-amplifier	PA1F	TRC	1FAC	01/10/10
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	01/10/10
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	01/10/10
Spectrum Analyzer	8564E	HP	3720A00840	12/17/09
Microwave Preamplifier	84125C	HP	US36433002	02/05/10
Horn Antenna	3115	EMCO	9104-3668	02/06/10
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/14/09
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	02/12/10
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	02/13/10
Pre-amplifier	PA2F	TRC	2F1GZ	01/10/10
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	01/10/10
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	01/10/10

7.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
302.81	40.53	1.00	67	-2.86	37.67	46.00	-8.33
353.74	40.79	1.00	71	-2.18	38.61	46.00	-7.39
363.44	40.09	1.00	198	-1.95	38.14	46.00	-7.86
382.84	39.69	1.00	71	-1.49	38.20	46.00	-7.80
482.26	38.55	1.00	346	1.54	40.09	46.00	-5.91
601.09	30.82	1.00	180	6.49	37.31	46.00	-8.69

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
64.00	36.70	1.00	125	1.46	38.16	40.00	-1.84
82.14	30.15	1.00	318	0.51	30.66	40.00	-9.34
108.81	41.38	1.00	125	-1.70	39.68	43.50	-3.82
143.97	36.29	1.00	138	-3.83	32.46	43.50	-11.04
601.09	31.55	1.00	84	6.49	38.04	46.00	-7.96
721.12	28.62	1.00	336	9.75	38.37	46.00	-7.63

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: IEEE 802.11b CH01 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1607.97	1.00	276	48.66	36.33	14.21	62.87	50.54	73.96	53.96	-3.42
2489.58	1.00	57	37.00	---	9.46	46.46	---	73.96	53.96	-7.50
9650.42	1.00	140	39.61	---	11.47	51.08	---	73.96	53.96	-2.88
19296.25	1.00	262	46.21	---	1.60	47.81	---	73.96	53.96	-6.15
21708.12	1.00	184	44.40	---	2.87	47.27	---	73.96	53.96	-6.69
24120.00	1.00	273	44.62	---	3.40	48.02	---	73.96	53.96	-5.94

Test mode: IEEE 802.11b CH01 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1607.98	1.00	233	49.99	37.50	14.21	64.20	51.71	73.96	53.96	-2.25
2183.97	1.00	225	43.51	30.67	8.61	52.12	39.28	73.96	53.96	-14.68
2239.97	1.00	218	44.03	30.33	8.76	52.79	39.09	73.96	53.96	-14.87
2490.34	1.00	79	47.68	34.83	9.46	57.14	44.29	73.96	53.96	-9.67
2639.96	1.00	223	44.17	36.00	9.75	53.92	45.75	73.96	53.96	-8.21
9647.85	1.00	69	41.78	35.44	11.46	53.24	46.90	73.96	53.96	-7.06

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	30.50	1.00	261	0.66	31.16	40.00	-8.84
301.60	40.86	1.00	99	-2.88	37.98	46.00	-8.02
363.44	44.79	1.00	185	-1.95	42.84	46.00	-3.16
379.20	39.49	1.00	103	-1.58	37.91	46.00	-8.09
501.66	36.11	1.00	38	1.85	37.96	46.00	-8.04
601.09	30.62	1.00	14	6.49	37.11	46.00	-8.89

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
60.31	34.71	1.00	168	1.55	36.26	40.00	-3.74
102.75	39.00	1.00	126	-0.90	38.10	43.50	-5.40
148.82	39.20	1.00	140	-4.28	34.92	43.50	-8.58
567.14	30.06	1.00	356	5.54	35.60	46.00	-10.40
601.09	31.58	1.00	74	6.49	38.07	46.00	-7.93
721.12	29.13	1.00	279	9.75	38.88	46.00	-7.12

Test mode: IEEE 802.11b CH06 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.65	1.00	320	47.16	35.83	13.95	61.11	49.78	73.96	53.96	-4.18
9747.84	1.00	68	40.94	31.11	11.89	52.83	43.00	73.96	53.96	-10.96
12187.92	1.00	83	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
19498.12	1.00	210	46.64	---	1.70	48.34	---	73.96	53.96	-5.62
21934.79	1.00	170	46.01	---	3.09	49.10	---	73.96	53.96	-4.86
24371.46	1.00	209	46.10	---	3.26	49.36	---	73.96	53.96	-4.60

Test mode: IEEE 802.11b CH06 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.65	1.00	237	48.66	37.50	13.95	62.61	51.45	73.96	53.96	-2.51
2200.00	1.00	214	33.00	---	18.65	51.65	---	73.96	53.96	-2.31
2279.10	1.00	315	47.48	33.67	8.87	56.35	42.54	73.96	53.96	-11.42
2513.66	1.00	79	46.66	34.50	9.52	56.18	44.02	73.96	53.96	-9.94
9747.85	1.00	614	48.77	36.77	11.89	60.66	48.66	73.96	53.96	-5.30
24371.46	1.00	221	45.94	---	3.26	49.20	---	73.96	53.96	-4.76

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	29.52	1.00	250	0.66	30.18	40.00	-9.82
301.60	39.92	1.00	58	-2.88	37.04	46.00	-8.96
362.22	38.95	1.00	192	-1.98	36.97	46.00	-9.03
382.84	37.80	1.00	110	-1.49	36.31	46.00	-9.69
482.26	38.95	1.00	336	1.54	40.49	46.00	-5.51
502.87	35.97	1.00	51	1.93	37.90	46.00	-8.10

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
66.37	35.83	1.00	94	1.40	37.23	40.00	-2.77
102.75	39.33	1.00	108	-0.90	38.43	43.50	-5.07
148.82	40.68	1.00	136	-4.28	36.40	43.50	-7.10
567.14	30.54	1.00	18	5.54	36.08	46.00	-9.92
700.51	28.45	1.00	53	9.54	37.99	46.00	-8.01
721.12	28.70	1.00	67	9.75	38.45	46.00	-7.55

Test mode: IEEE 802.11b CH11 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude Peak / Ave.		Correction Factor	Corrected Amplitude Peak / Ave.		Limit Peak / Ave.		Margin
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.30	1.00	307	44.99	34.33	13.69	58.68	48.02	73.96	53.96	-5.94
2300.00	1.00	163	39.50	---	8.93	48.43	---	73.96	53.96	-5.53
2543.75	1.00	162	38.00	---	9.57	47.57	---	73.96	53.96	-6.39
9849.79	1.00	62	36.94	---	11.93	48.87	---	73.96	53.96	-5.09
12308.75	1.00	177	38.11	---	9.56	47.67	---	73.96	53.96	-6.29
24619.37	1.00	87	45.66	---	3.01	48.67	---	73.96	53.96	-5.29

Test mode: IEEE 802.11b CH11 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude Peak / Ave.		Correction Factor	Corrected Amplitude Peak / Ave.		Limit Peak / Ave.		Margin
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.31	1.00	346	45.66	34.67	13.69	59.35	48.36	73.96	53.96	-5.60
2239.98	1.00	357	43.33	31.67	8.76	52.09	40.43	73.96	53.96	-13.53
2303.97	1.00	280	46.48	33.83	8.94	55.42	42.77	73.96	53.96	-11.19
2539.01	1.00	190	46.35	34.17	9.56	55.91	43.73	73.96	53.96	-10.23
9847.85	1.00	77	47.11	35.11	11.93	59.04	47.04	73.96	53.96	-6.92
24619.37	1.00	95	45.40	---	3.01	48.41	---	73.96	53.96	-5.55

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
79.71	29.65	1.00	271	0.66	30.31	40.00	-9.69
302.81	40.30	1.00	41	-2.86	37.44	46.00	-8.56
362.22	43.40	1.00	195	-1.98	41.42	46.00	-4.58
382.84	41.24	1.00	86	-1.49	39.75	46.00	-6.25
482.26	41.17	1.00	34	1.54	42.71	46.00	-3.29
601.09	31.48	1.00	229	6.49	37.97	46.00	-8.03

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
61.52	33.87	1.00	168	1.52	35.39	40.00	-4.61
100.32	38.49	1.00	127	-0.57	37.92	43.50	-5.58
107.60	39.90	1.00	154	-1.54	38.36	43.50	-5.14
363.44	41.18	1.00	271	-1.95	39.23	46.00	-6.77
380.41	37.95	1.00	189	-1.55	36.40	46.00	-9.60
721.12	29.70	1.00	112	9.75	39.45	46.00	-6.55

Test mode: IEEE 802.11g CH01 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1602.97	1.00	282	44.82	30.67	14.21	59.03	44.88	73.96	53.96	-9.08
2489.58	1.00	6	37.33	---	9.46	46.79	---	73.96	53.96	-7.17
9650.42	1.00	90	35.27	---	11.47	46.74	---	73.96	53.96	-7.22
19296.25	1.00	267	46.39	---	1.60	47.99	---	73.96	53.96	-5.97
21708.12	1.00	190	44.79	---	2.87	47.66	---	73.96	53.96	-6.30
24120.00	1.00	262	44.21	---	3.40	47.61	---	73.96	53.96	-6.35

Test mode: IEEE 802.11g CH01 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1607.99	1.00	80	48.82	31.50	14.21	63.03	45.71	73.96	53.96	-8.25
2256.32	1.00	316	44.49	28.00	8.81	53.30	36.81	73.96	53.96	-17.15
2347.44	1.00	35	46.99	29.50	9.06	56.05	38.56	73.96	53.96	-15.40
2488.77	1.00	312	47.16	29.67	9.46	56.62	39.13	73.96	53.96	-14.83
2639.95	1.00	87	44.17	31.83	9.75	53.92	41.58	73.96	53.96	-12.38
9647.83	1.00	78	40.73	22.94	11.46	52.19	34.40	73.96	53.96	-19.56

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
302.81	41.88	1.00	62	-2.86	39.02	46.00	-6.98
363.44	38.91	1.00	93	-1.95	36.96	46.00	-9.04
380.41	39.61	1.00	120	-1.55	38.06	46.00	-7.94
482.26	35.87	1.00	329	1.54	37.41	46.00	-8.59
502.87	36.47	1.00	27	1.93	38.40	46.00	-7.60
601.09	32.15	1.00	221	6.49	38.64	46.00	-7.36

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
67.59	35.06	1.00	87	1.37	36.43	40.00	-3.57
100.32	39.01	1.00	128	-0.57	38.44	43.50	-5.06
113.66	39.84	1.00	218	-2.06	37.78	43.50	-5.72
147.61	39.41	1.00	156	-4.17	35.24	43.50	-8.26
382.84	39.51	1.00	187	-1.49	38.02	46.00	-7.98
700.51	28.38	1.00	194	9.54	37.92	46.00	-8.08

Test mode: IEEE 802.11g CH06 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.65	1.00	287	45.82	30.17	13.95	59.77	44.12	73.96	53.96	-9.84
2350.00	1.00	92	38.83	---	9.07	47.90	---	73.96	53.96	-6.06
12187.92	1.00	0	38.44	---	9.74	48.18	---	73.96	53.96	-5.78
19498.12	1.00	209	46.93	---	1.70	48.63	---	73.96	53.96	-5.33
21934.79	1.00	165	45.85	---	3.09	48.94	---	73.96	53.96	-5.02
24371.46	1.00	195	45.75	---	3.26	49.01	---	73.96	53.96	-4.95

Test mode: IEEE 802.11g CH06 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.63	1.00	58	44.66	31.67	13.95	58.61	45.62	73.96	53.96	-8.34
2271.05	1.00	134	44.66	28.00	8.85	53.51	36.85	73.96	53.96	-17.11
2360.19	1.00	89	46.67	29.17	9.10	55.77	38.27	73.96	53.96	-15.69
2375.14	1.00	89	45.50	29.00	9.14	54.64	38.14	73.96	53.96	-15.82
2382.86	1.00	281	45.00	29.50	9.16	54.16	38.66	73.96	53.96	-15.30
2519.41	1.00	133	44.16	29.00	9.53	53.69	38.53	73.96	53.96	-15.43

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
304.02	42.05	1.00	87	-2.85	39.20	46.00	-6.80
363.44	38.67	1.00	90	-1.95	36.72	46.00	-9.28
433.76	38.74	1.00	218	0.45	39.19	46.00	-6.81
481.05	34.66	1.00	197	1.53	36.19	46.00	-9.81
502.87	34.64	1.00	24	1.93	36.57	46.00	-9.43
601.09	30.07	1.00	207	6.49	36.56	46.00	-9.44

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
61.52	35.06	1.00	113	1.52	36.58	40.00	-3.42
102.75	38.84	1.00	127	-0.90	37.94	43.50	-5.56
145.19	39.22	1.00	141	-3.94	35.28	43.50	-8.22
567.14	30.40	1.00	14	5.54	35.94	46.00	-10.06
700.51	27.94	1.00	50	9.54	37.48	46.00	-8.52
721.12	27.44	1.00	114	9.75	37.19	46.00	-8.81

Test mode: IEEE 802.11g CH11 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.34	1.00	321	42.66	29.83	13.69	56.35	43.52	73.96	53.96	-10.44
9849.79	1.00	183	35.94	---	11.93	47.87	---	73.96	53.96	-6.09
12308.75	1.00	146	37.27	---	9.56	46.83	---	73.96	53.96	-7.13
19696.46	1.00	112	45.41	---	1.81	47.22	---	73.96	53.96	-6.74
22157.92	1.00	265	44.32	---	3.25	47.57	---	73.96	53.96	-6.39
24619.37	1.00	81	45.44	---	3.01	48.45	---	73.96	53.96	-5.51

Test mode: IEEE 802.11g CH11 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.30	1.00	274	42.66	30.67	13.69	56.35	44.36	73.96	53.96	-9.60
2237.50	1.00	209	42.34	---	8.75	51.09	---	73.96	53.96	-2.87
2306.29	1.00	99	45.33	29.17	8.95	54.28	38.12	73.96	53.96	-15.84
2537.55	1.00	75	45.33	28.67	9.56	54.89	38.23	73.96	53.96	-15.73
9849.79	1.00	131	39.78	---	11.93	51.71	---	73.96	53.96	-2.25
24619.37	1.00	102	45.71	---	3.01	48.72	---	73.96	53.96	-5.24

7.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

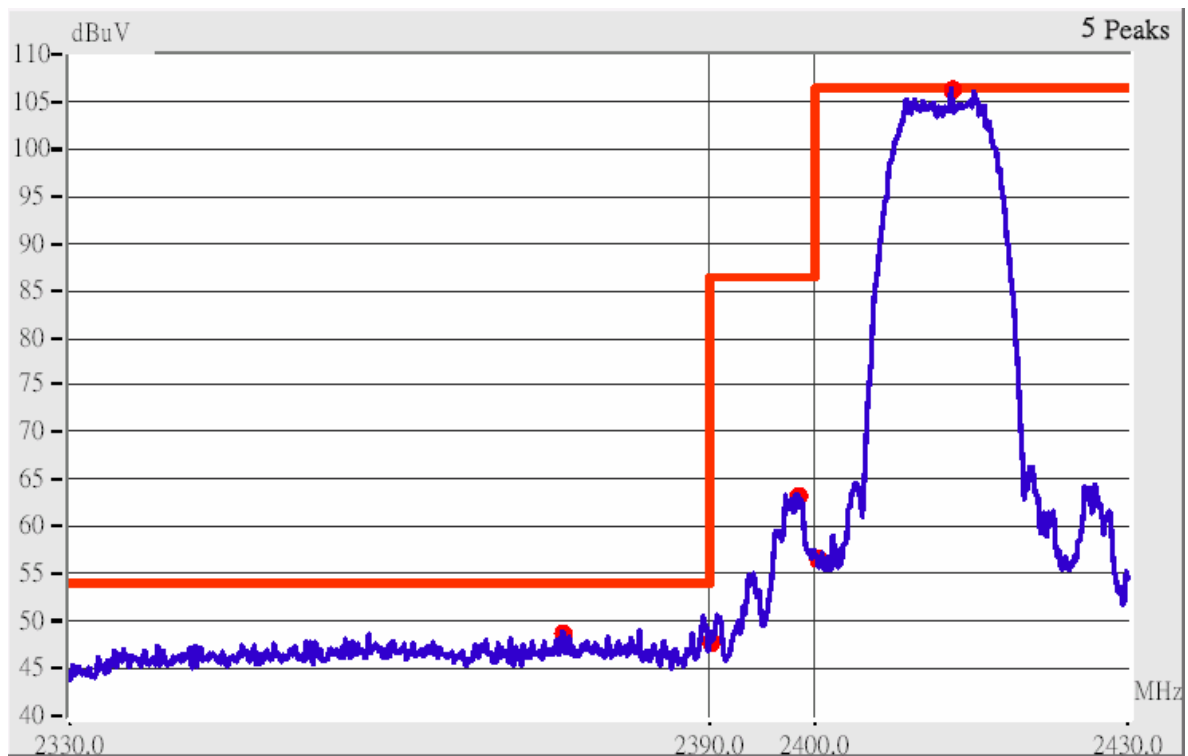


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2374.15	Hor	1.00	127	9.14	48.64	---	73.96	53.96	-5.32
2390.02	Hor	1.00	179	9.18	48.02	---	73.96	53.96	-5.94
2379.93	Ver	1.00	245	9.15	57.32	43.98	73.96	53.96	-9.98
2390.39	Ver	1.00	92	9.18	59.35	43.51	73.96	53.96	-10.45

Channel 11 of IEEE 802.11b

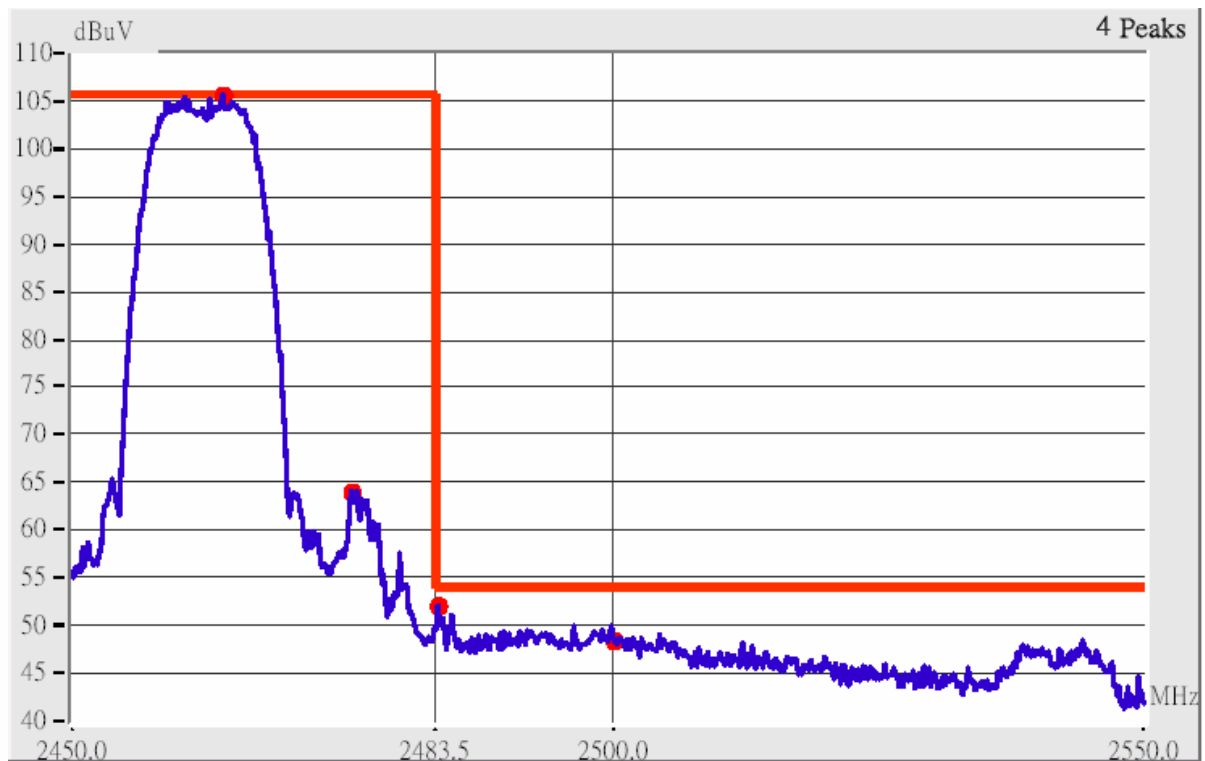


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBuV/m)</i>		<i>Limit (dBuV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	208	9.44	50.78	---	73.96	53.96	-3.18
2491.84	Hor	1.00	308	9.47	49.80	---	73.96	53.96	-4.16
2500.01	Hor	1.00	308	9.49	48.82	---	73.96	53.96	-5.14
2514.12	Hor	1.00	308	9.52	48.68	---	73.96	53.96	-5.28
2483.40	Ver	1.00	107	9.44	58.78	44.44	73.96	53.96	-9.52
2492.52	Ver	1.00	138	9.47	59.47	44.47	73.96	53.96	-9.49
2500.62	Ver	1.00	210	9.49	57.82	43.99	73.96	53.96	-9.97
2504.76	Ver	1.00	78	9.50	58.33	43.67	73.96	53.96	-10.29

Channel 1 of IEEE 802.11g

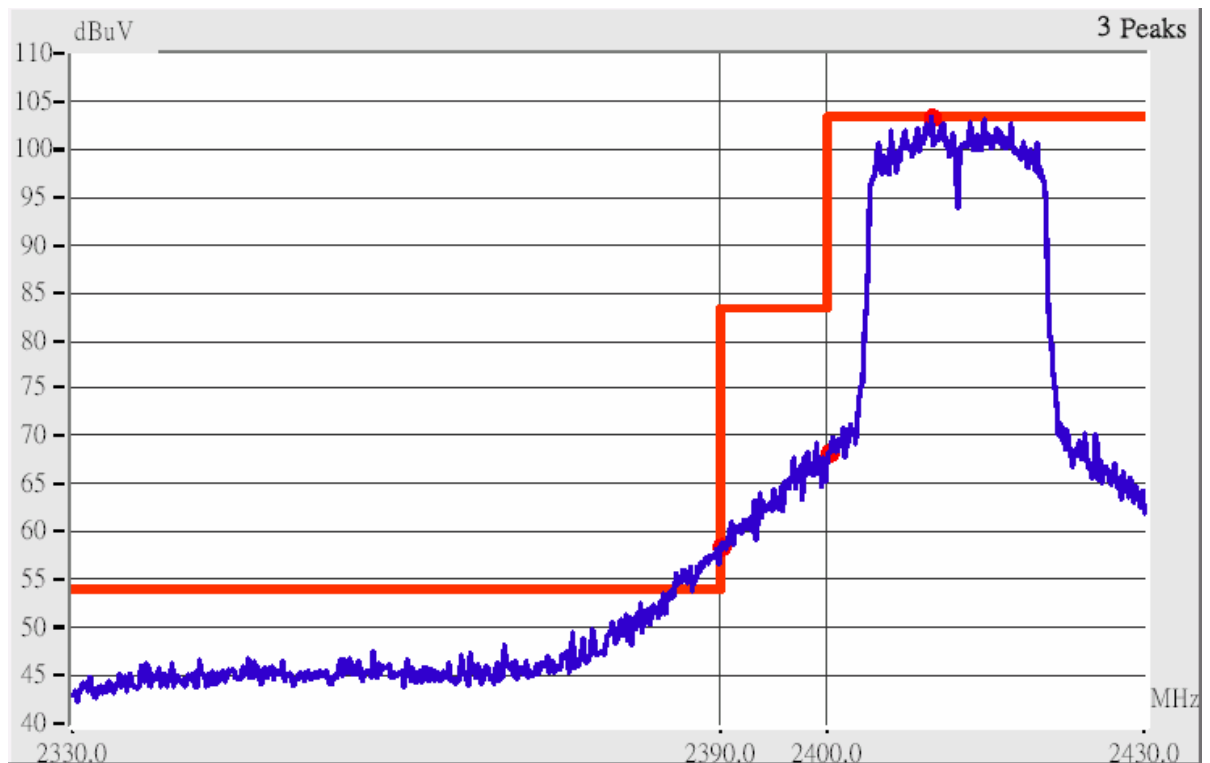


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2486.67	Hor	1.00	191	9.17	59.17	37.50	73.96	53.96	-14.79
2489.80	Hor	1.00	144	9.18	61.35	39.18	73.96	53.96	-12.61
2384.12	Ver	1.00	202	9.17	66.66	42.17	73.96	53.96	-7.30
2390.05	Ver	1.00	169	9.18	69.85	44.35	73.96	53.96	-4.11

Channel 11 of IEEE 802.11g

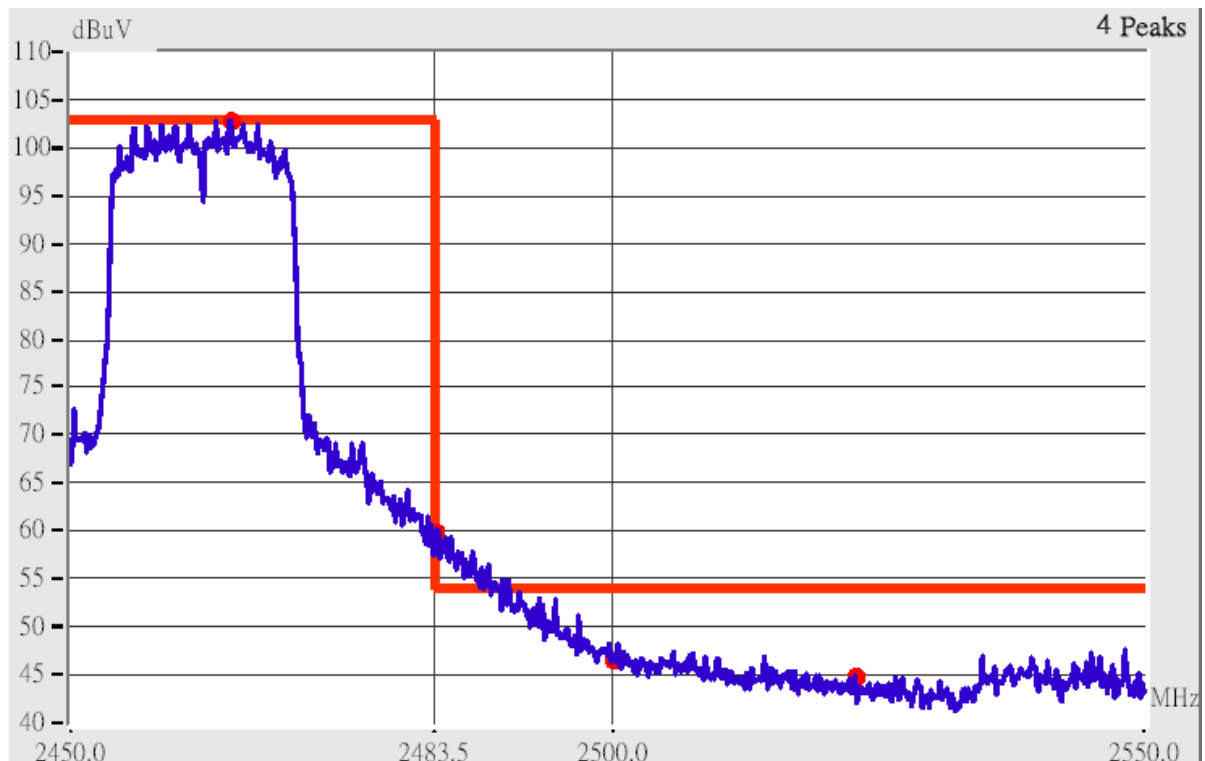

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.26	Hor	1.00	313	9.44	59.78	39.27	73.96	53.96	-14.18
2487.58	Hor	1.00	222	9.46	58.79	37.96	73.96	53.96	-15.17
2500.01	Hor	1.00	222	9.49	46.66	---	73.96	53.96	-7.30
2507.71	Hor	1.00	91	9.50	47.50	---	73.96	53.96	-6.46
2483.50	Ver	1.00	224	9.44	70.94	44.11	73.96	53.96	-3.02
2489.78	Ver	1.00	229	9.46	67.96	42.13	73.96	53.96	-6.00
2499.79	Ver	1.00	334	9.49	58.16	39.82	73.96	53.96	-14.14
2507.78	Ver	1.00	217	9.50	56.84	38.50	73.96	53.96	-15.46

VIII. Section 15.247(d): Power Spectral Density

8.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

8.2 Test Instruments Configuration

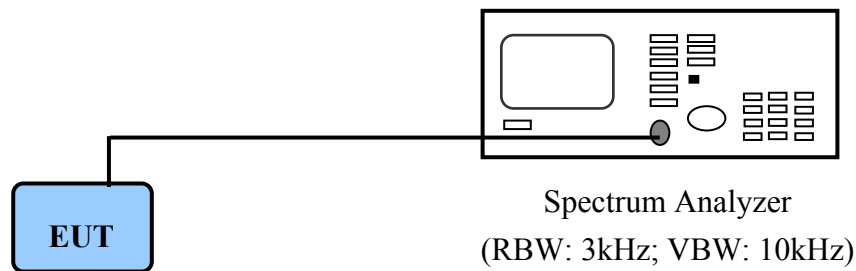

PC to control the EUT at maximal power output and channel number and set antenna kit

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/09

8.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-9.80	1.00	-8.80	8.00	-16.80
CH 06	-9.66	1.00	-8.66	8.00	-16.66
CH 11	-9.63	1.00	-8.63	8.00	-16.63


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-12.68	1.00	-11.68	8.00	-19.68
CH 06	-12.11	1.00	-11.11	8.00	-19.11
CH 11	-12.83	1.00	-11.83	8.00	-19.83


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for Channel 01

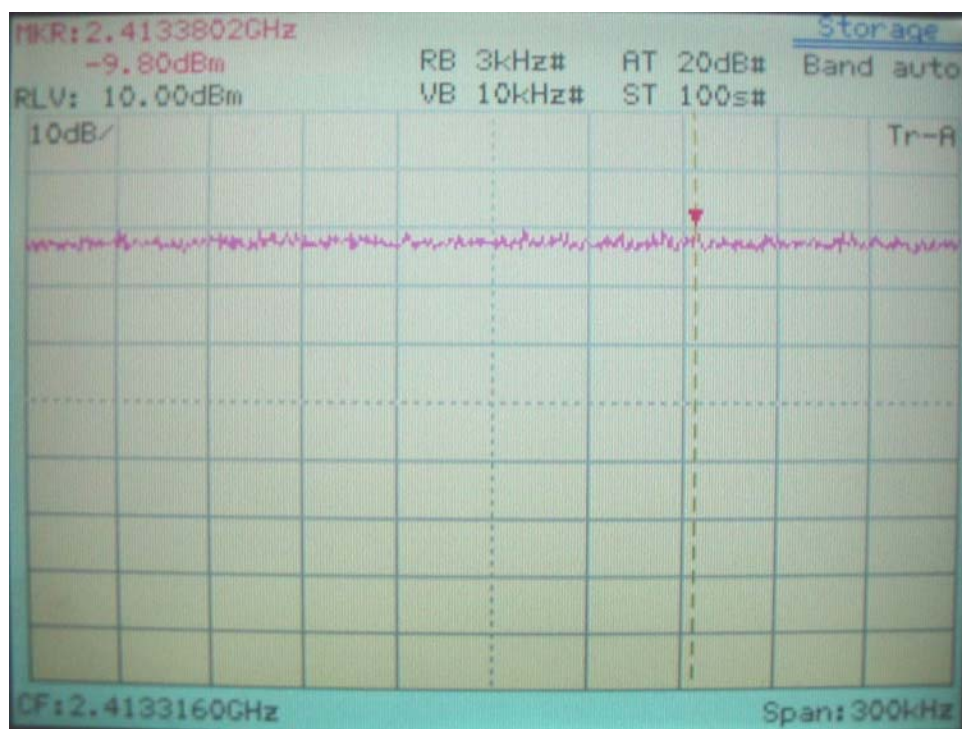


IEEE 802.11b

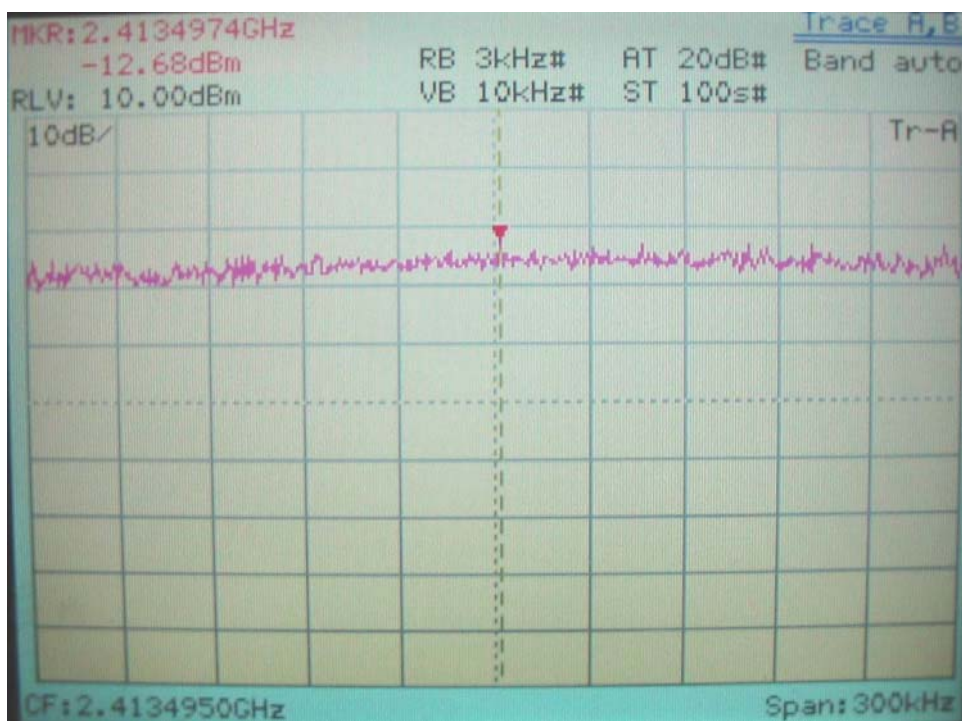


IEEE 802.11g

Power Spectral Density for Channel 06

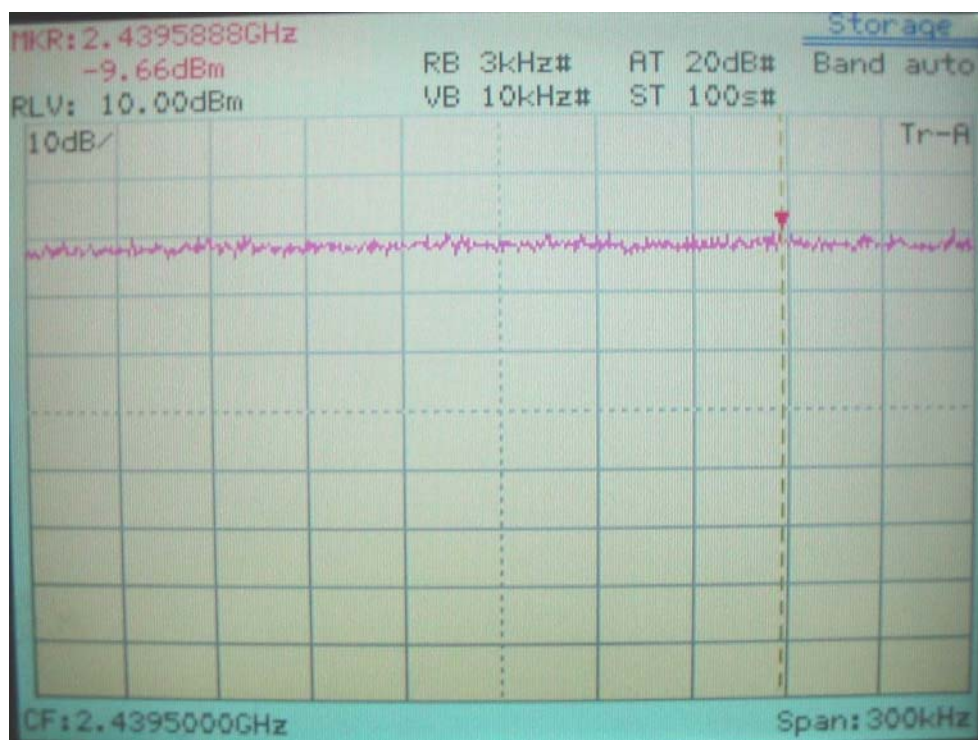


IEEE 802.11b

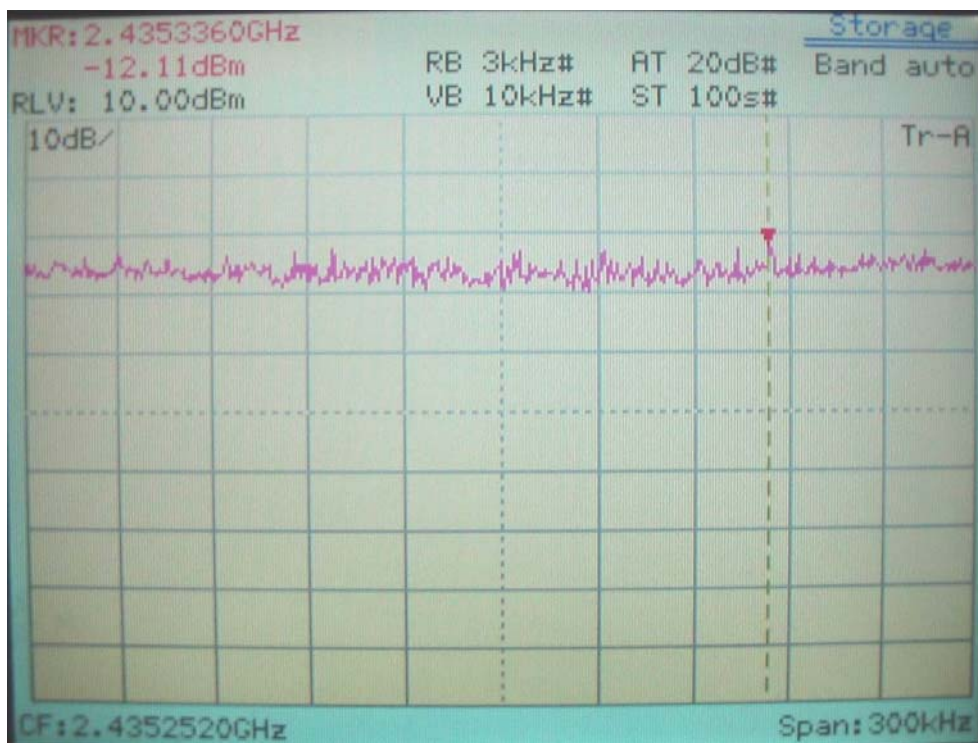


IEEE 802.11g

Power Spectral Density for Channel 11

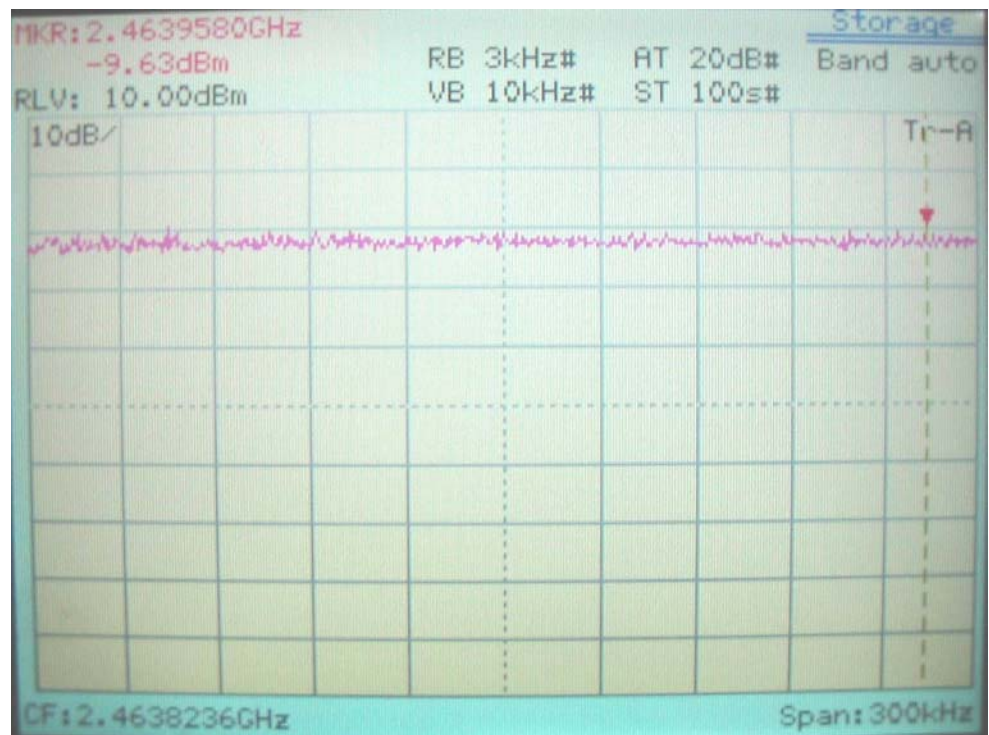

IEEE 802.11b

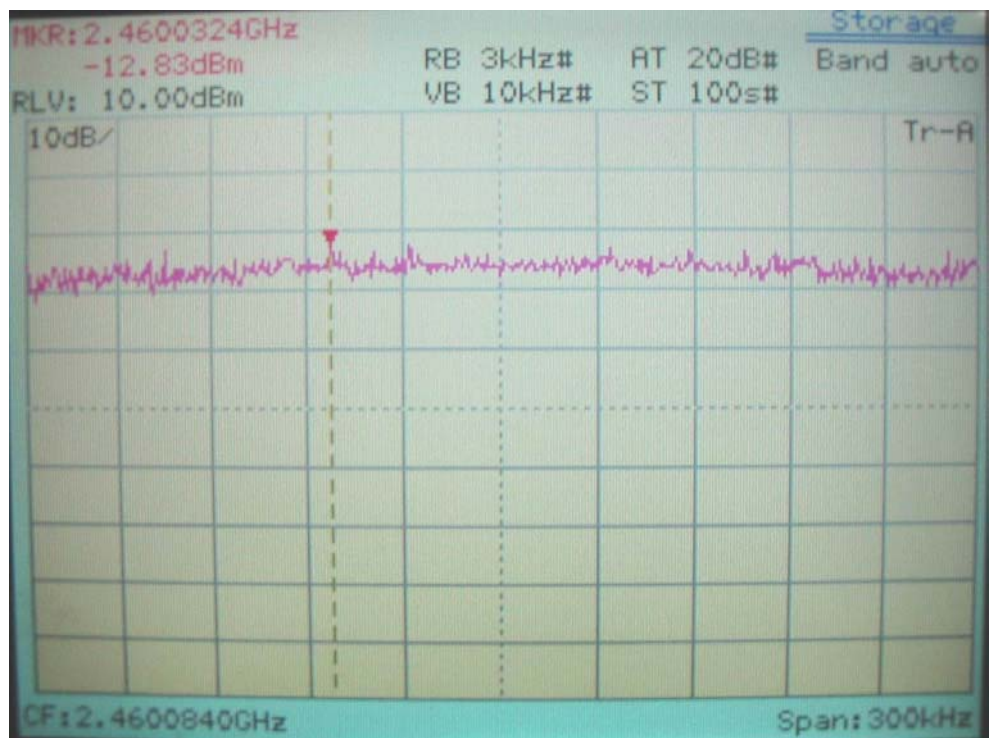

IEEE 802.11g