


Test Mode	IEEE 802.11ax (HEW80+80)_External Antenna	Test Date	2020/2/26
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Vertical

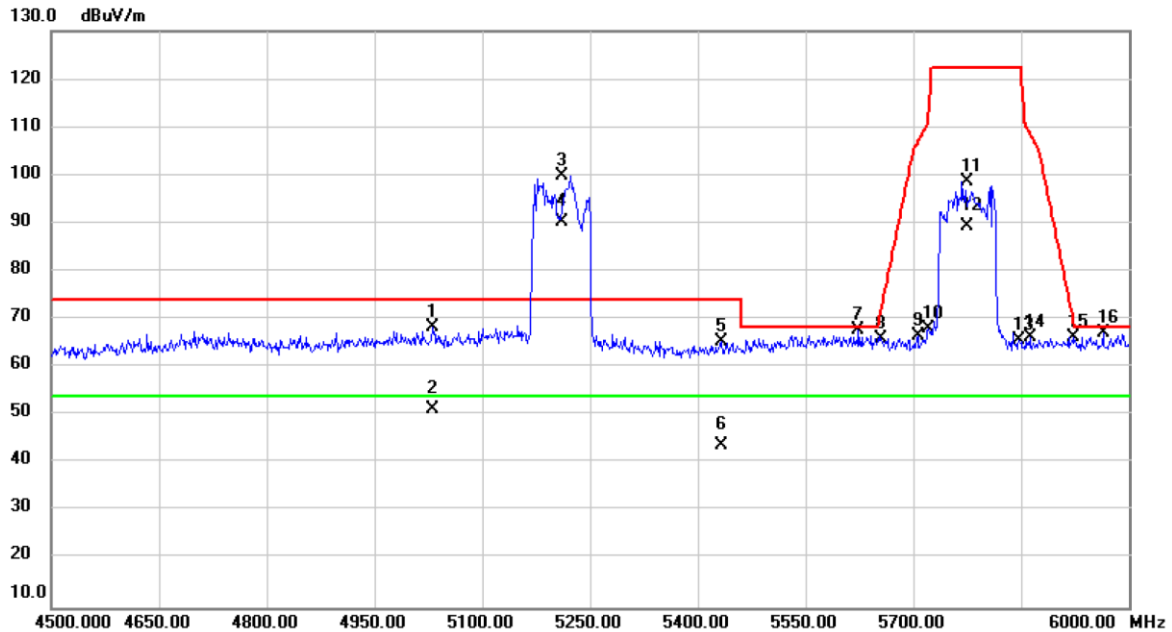


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5031.000	30.65	37.66	68.31	74.00	-5.69	peak	
2		5031.000	13.59	37.66	51.25	54.00	-2.75	AVG	
3	X	5210.000	62.01	37.87	99.88	74.00	25.88	peak	No Limit
4	*	5210.000	52.29	37.87	90.16	54.00	36.16	AVG	No Limit
5		5433.000	27.17	38.13	65.30	74.00	-8.70	peak	
6		5433.000	5.76	38.13	43.89	54.00	-10.11	AVG	
7		5623.500	29.48	38.30	67.78	68.20	-0.42	peak	
8		5655.000	27.66	38.33	65.99	71.90	-5.91	peak	
9		5706.000	28.21	38.36	66.57	106.88	-40.31	peak	
10		5721.000	29.56	38.37	67.93	113.08	-45.15	peak	
11		5775.000	60.11	38.41	98.52	122.20	-23.68	peak	No Limit
12	X	5775.000	50.85	38.41	89.26	54.00	35.26	AVG	No Limit
13		5847.000	27.11	38.47	65.58	122.20	-56.62	peak	
14		5862.000	27.76	38.48	66.24	108.84	-42.60	peak	
15		5923.500	27.82	38.52	66.34	69.31	-2.97	peak	
16		5964.000	28.59	38.55	67.14	68.20	-1.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Vertical

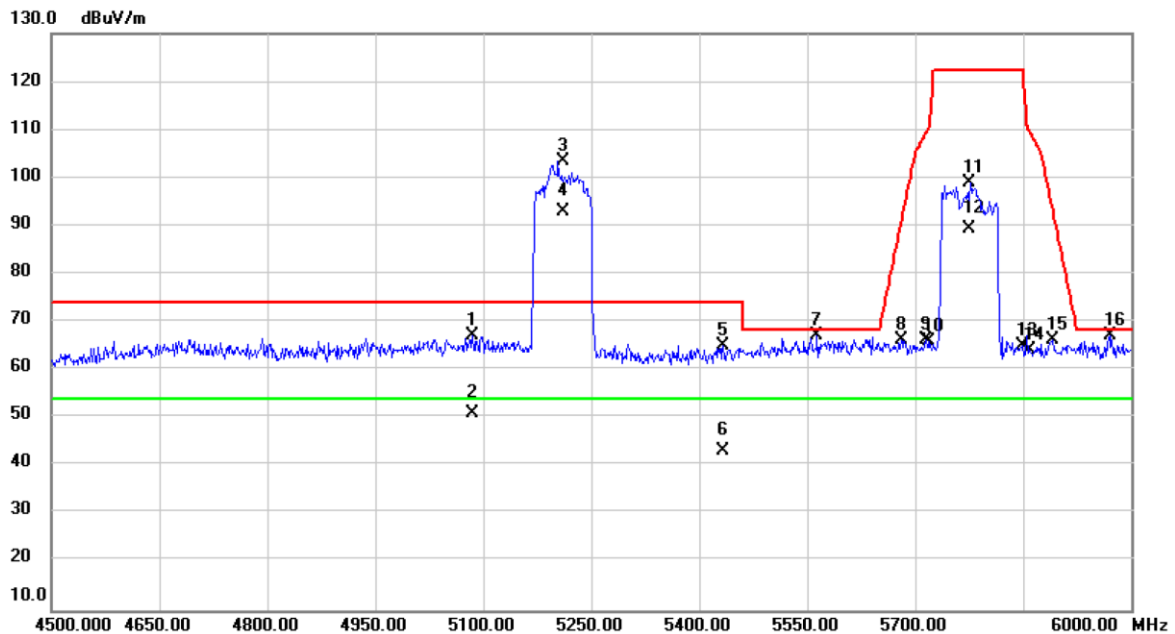


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5085.000	29.37	37.72	67.09	74.00	-6.91	peak	
2		5085.000	13.38	37.72	51.10	54.00	-2.90	AVG	
3	X	5210.000	65.56	37.87	103.43	74.00	29.43	peak	No Limit
4	*	5210.000	54.94	37.87	92.81	54.00	38.81	AVG	No Limit
5		5433.000	26.91	38.13	65.04	74.00	-8.96	peak	
6		5433.000	5.10	38.13	43.23	54.00	-10.77	AVG	
7		5563.500	28.87	38.26	67.13	68.20	-1.07	peak	
8		5680.500	27.81	38.34	66.15	90.77	-24.62	peak	
9		5715.000	27.91	38.37	66.28	109.40	-43.12	peak	
10		5719.500	27.56	38.38	65.94	110.66	-44.72	peak	
11		5775.000	60.48	38.41	98.89	122.20	-23.31	peak	No Limit
12	X	5775.000	50.84	38.41	89.25	54.00	35.25	AVG	No Limit
13		5848.500	26.45	38.47	64.92	122.20	-57.28	peak	
14		5859.000	25.74	38.47	64.21	109.68	-45.47	peak	
15		5890.500	27.88	38.50	66.38	93.73	-27.35	peak	
16		5970.000	28.48	38.56	67.04	68.20	-1.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

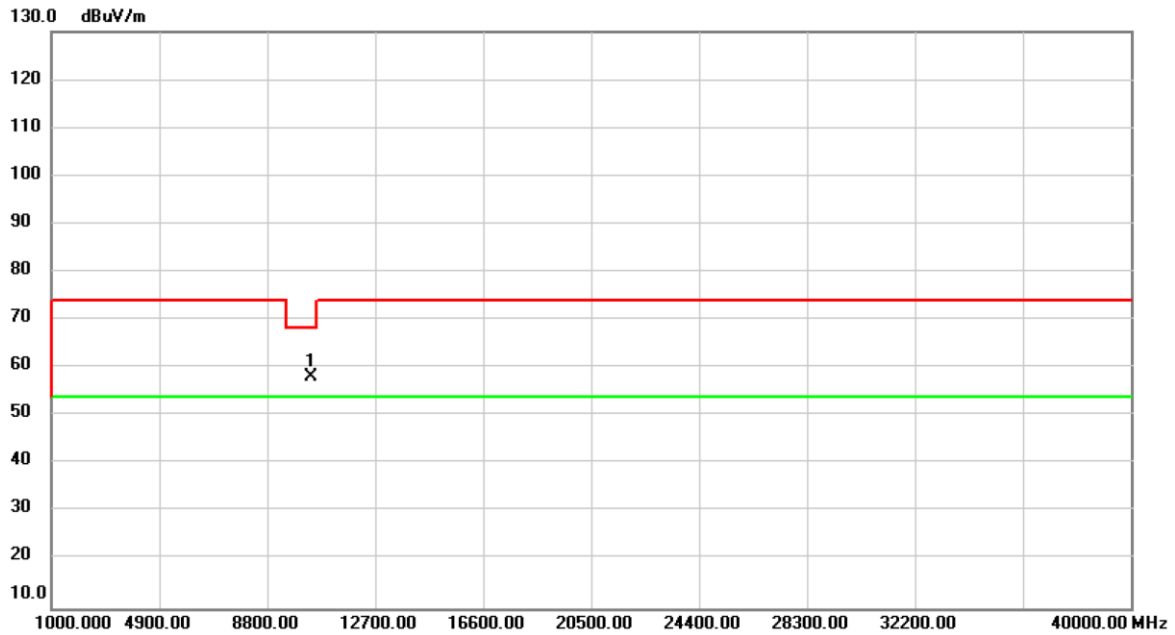


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	55.24	2.83	58.07	68.20	-10.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

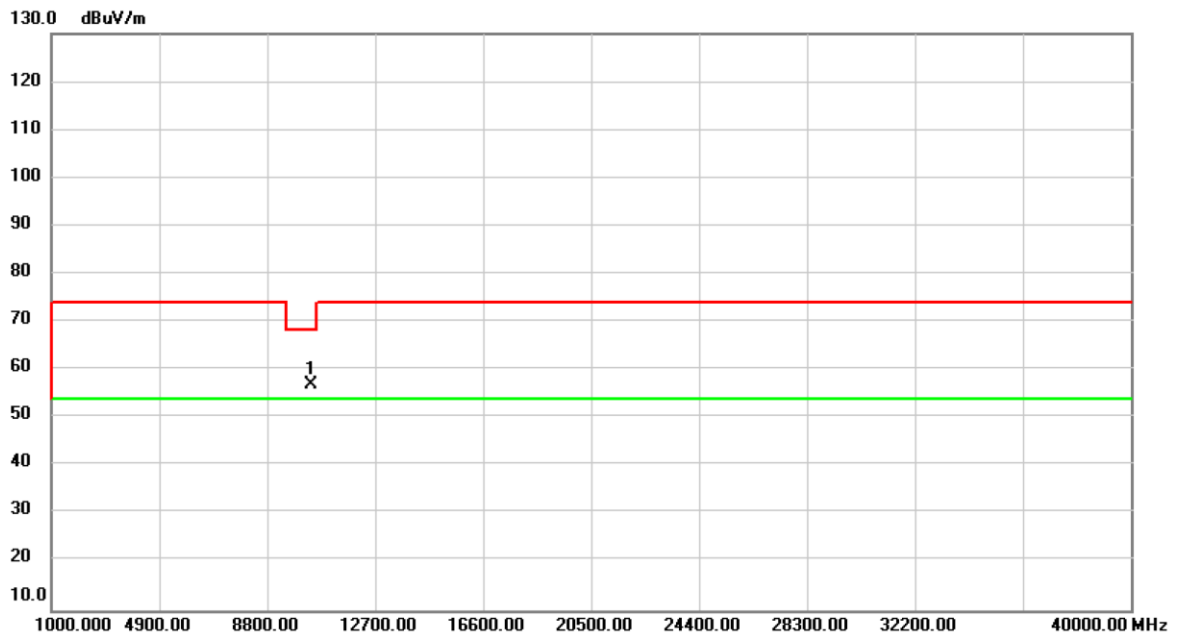


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.11	2.83	56.94	68.20	-11.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

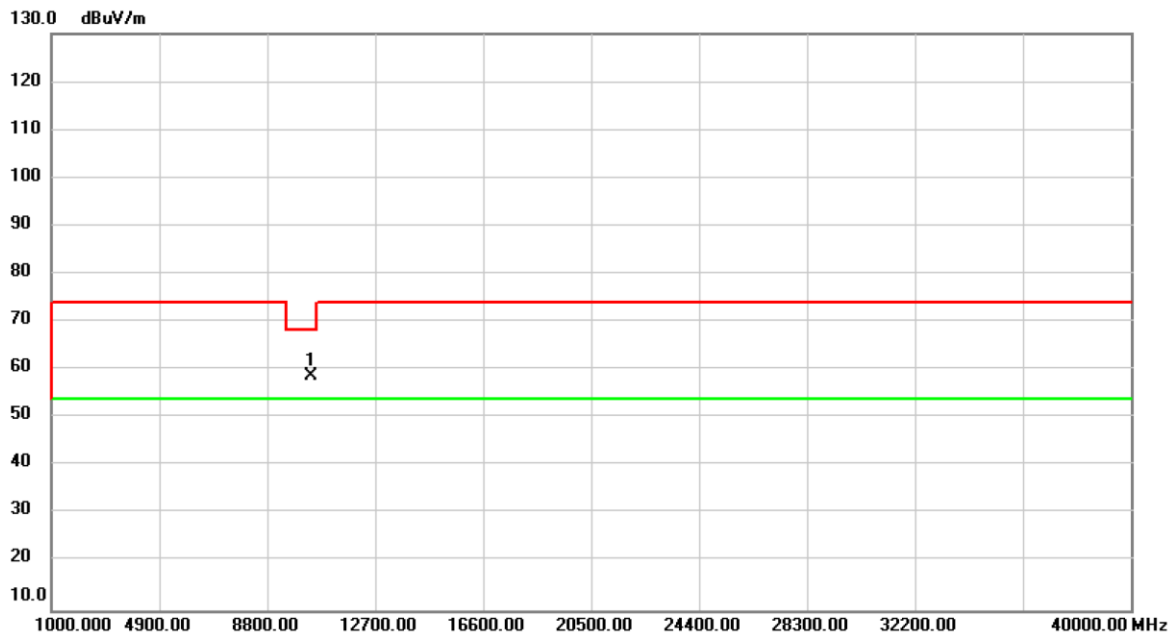


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	55.74	2.89	58.63	68.20	-9.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/11/29
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

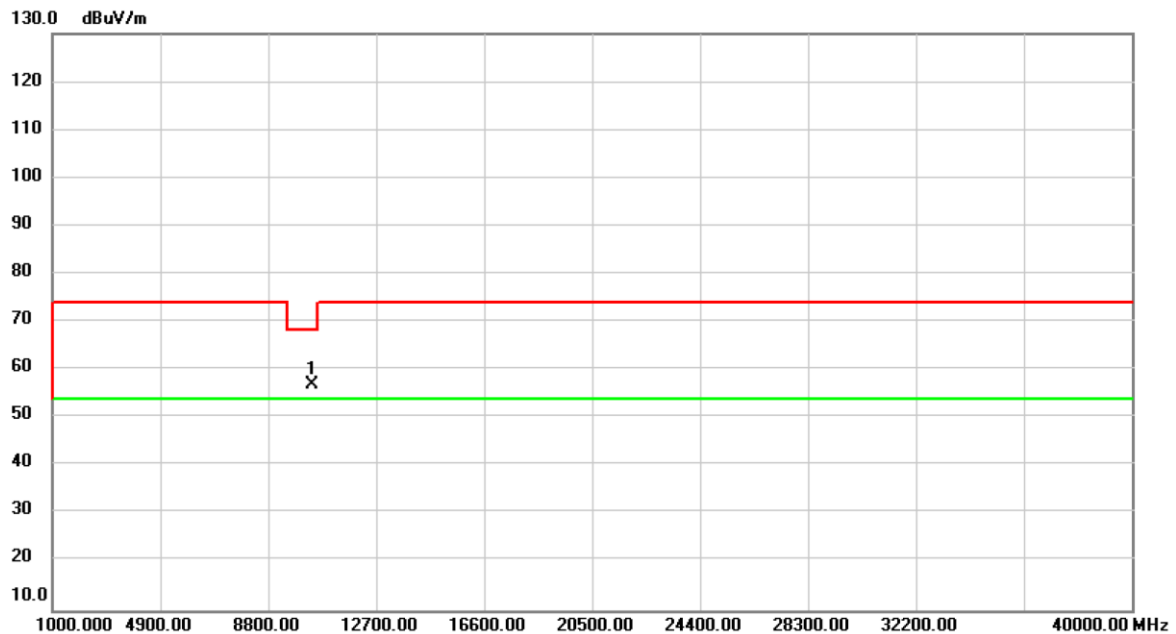


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	54.10	2.89	56.99	68.20	-11.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

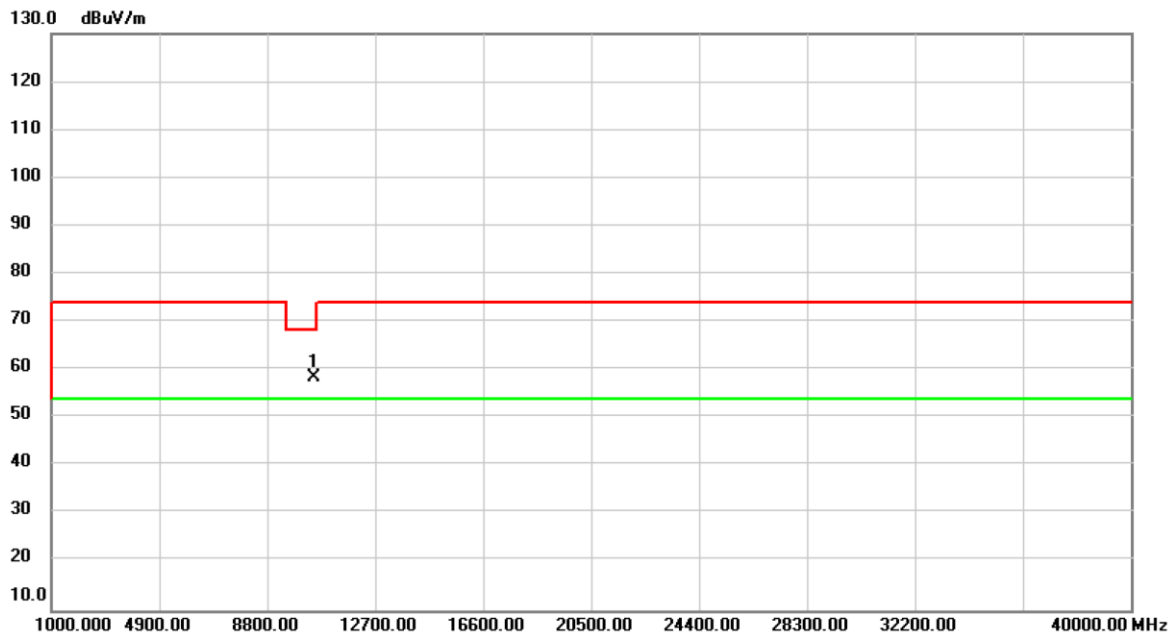


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	55.53	3.00	58.53	68.20	-9.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_External Antenna	Test Date	2019/12/2
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

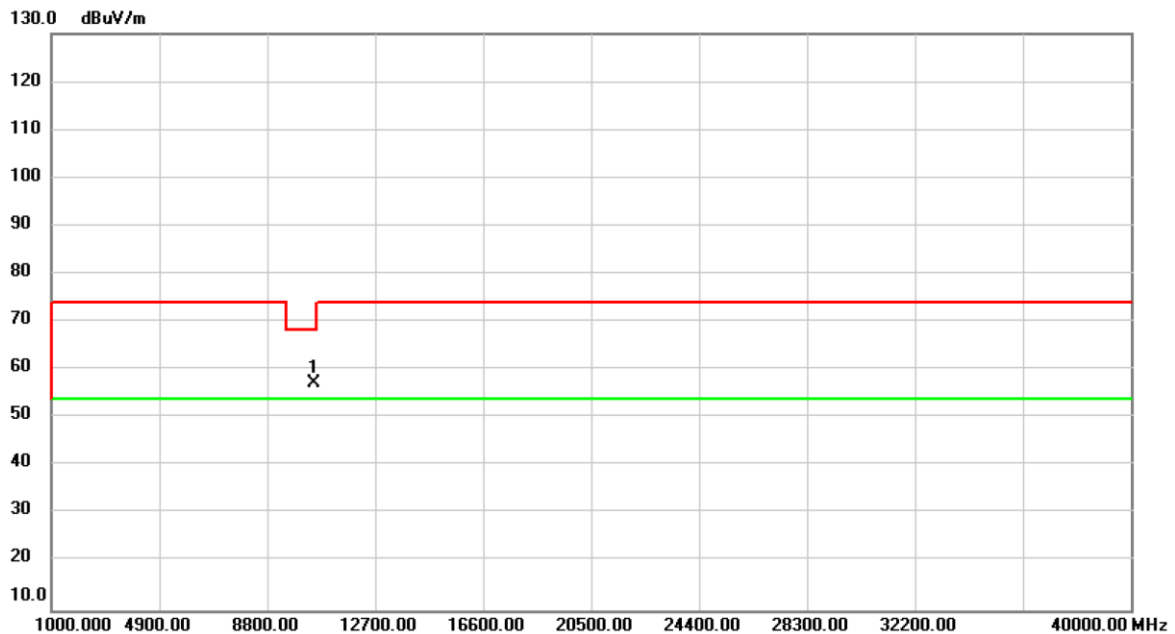


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	54.16	3.00	57.16	68.20	-11.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

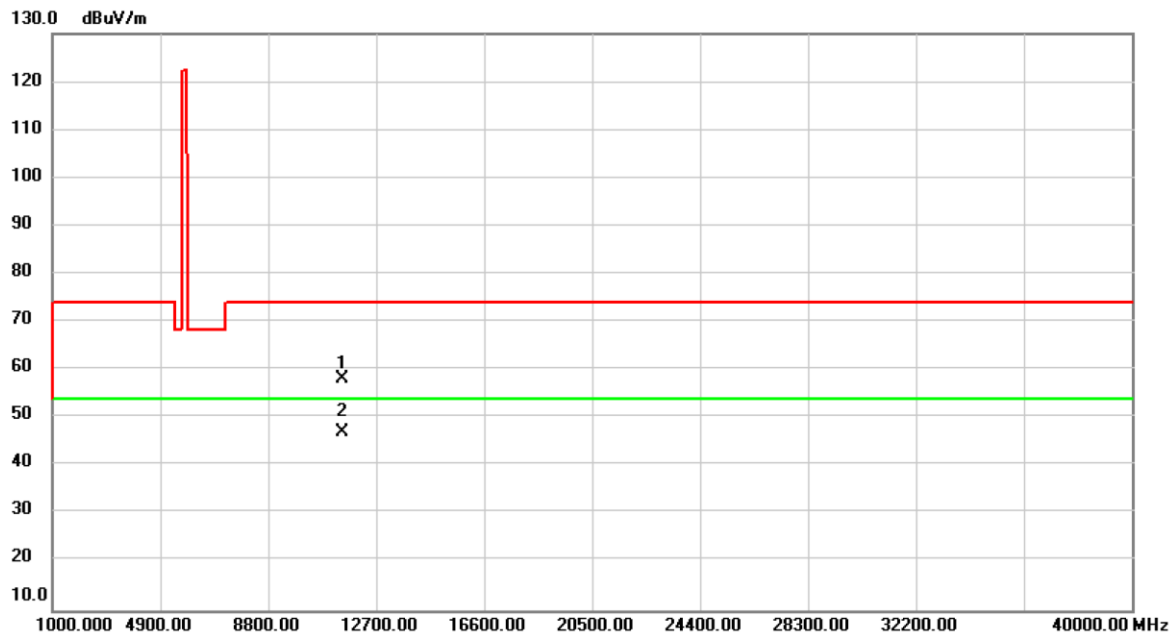


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.31	3.89	58.20	74.00	-15.80	peak	
2	*	11490.00	43.22	3.89	47.11	54.00	-6.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

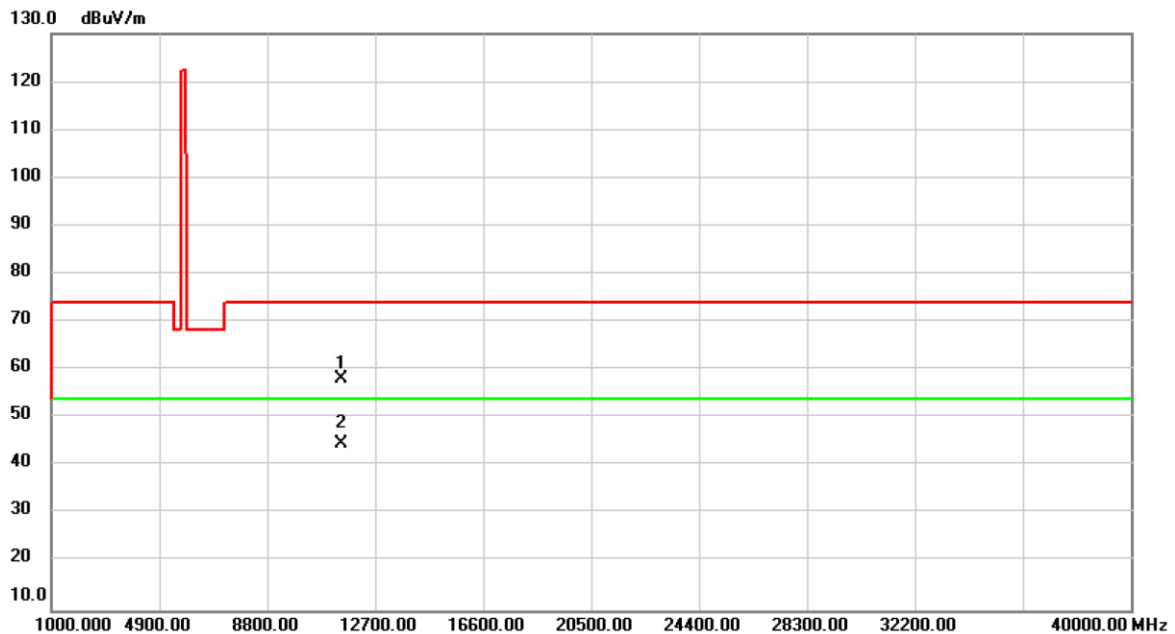


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.16	3.89	58.05	74.00	-15.95	peak	
2	*	11490.00	40.91	3.89	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

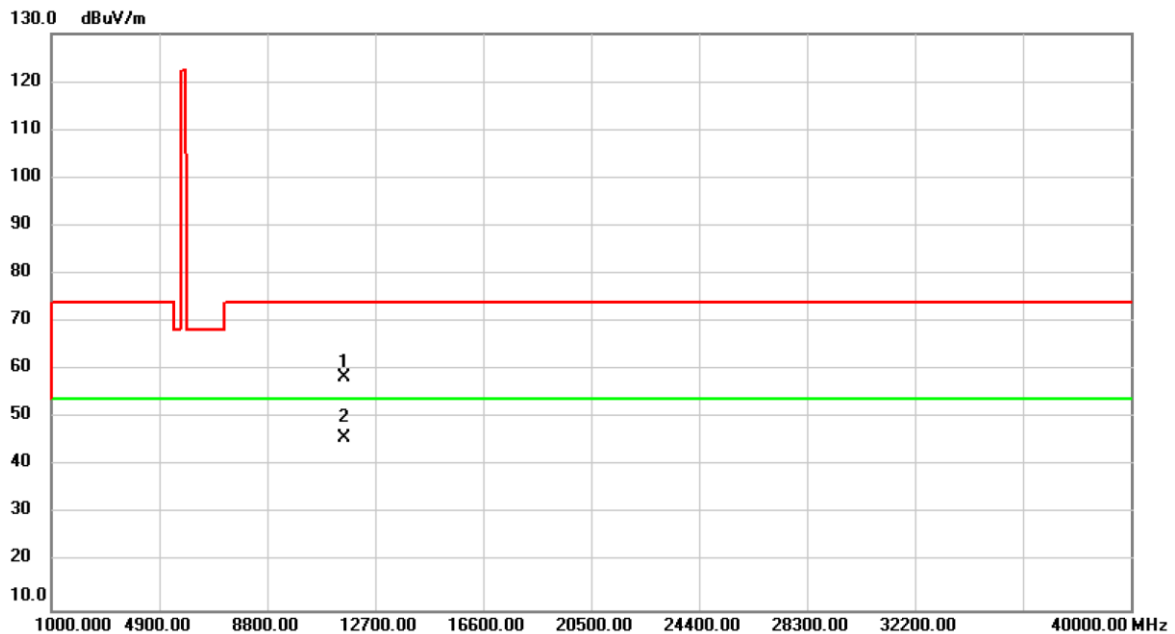


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.78	3.57	58.35	74.00	-15.65	peak	
2	*	11570.00	42.40	3.57	45.97	54.00	-8.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

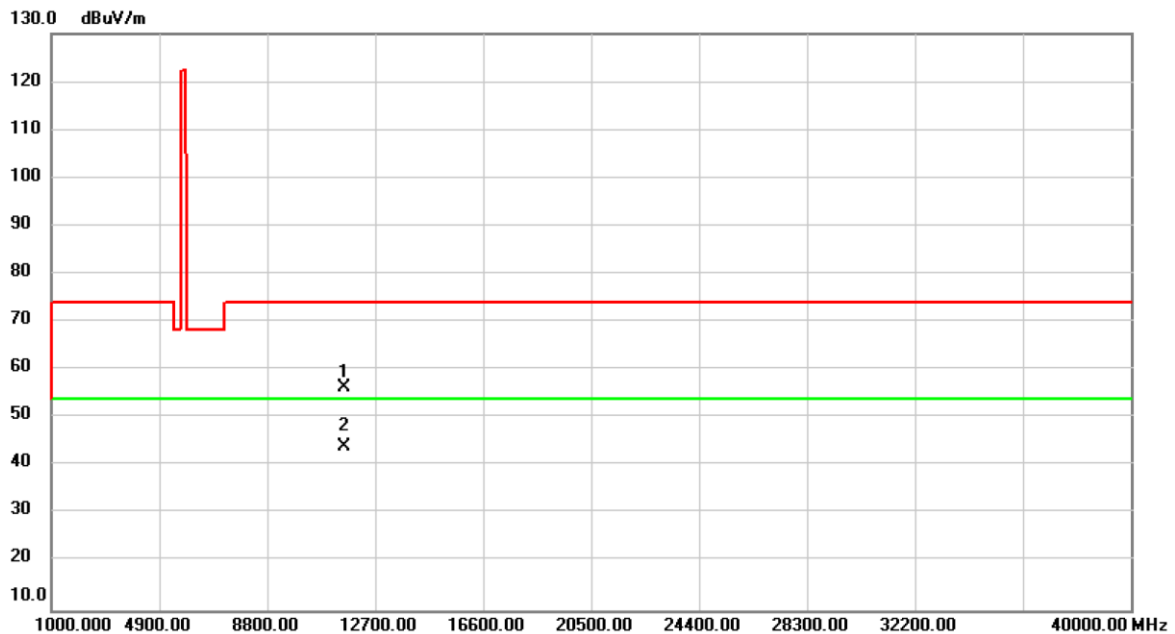


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	52.92	3.57	56.49	74.00	-17.51	peak	
2	*	11570.00	40.38	3.57	43.95	54.00	-10.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

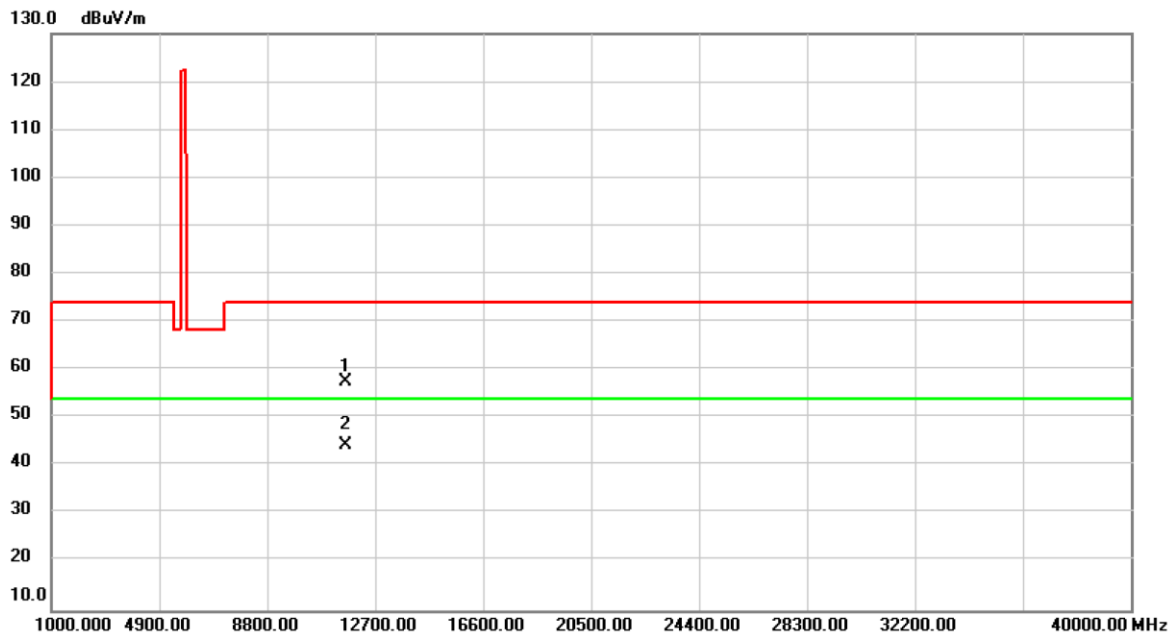


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	54.40	3.18	57.58	74.00	-16.42	peak	
2	*	11650.00	41.24	3.18	44.42	54.00	-9.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a_ External Antenna	Test Date	2019/12/2
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

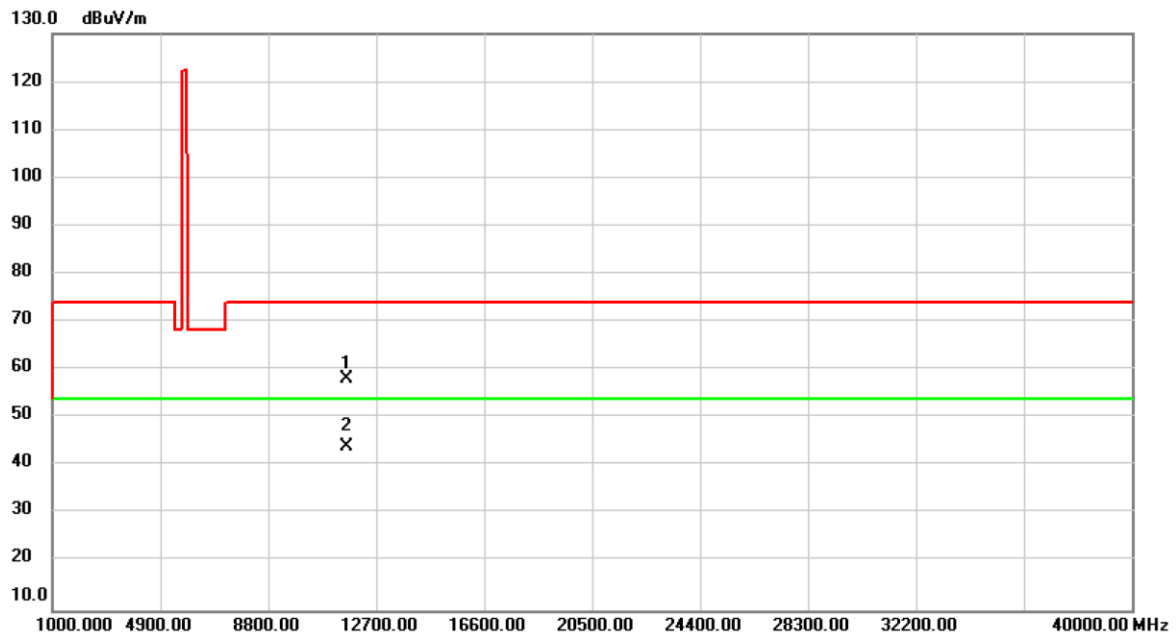


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	54.88	3.18	58.06	74.00	-15.94	peak	
2	*	11650.00	40.85	3.18	44.03	54.00	-9.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

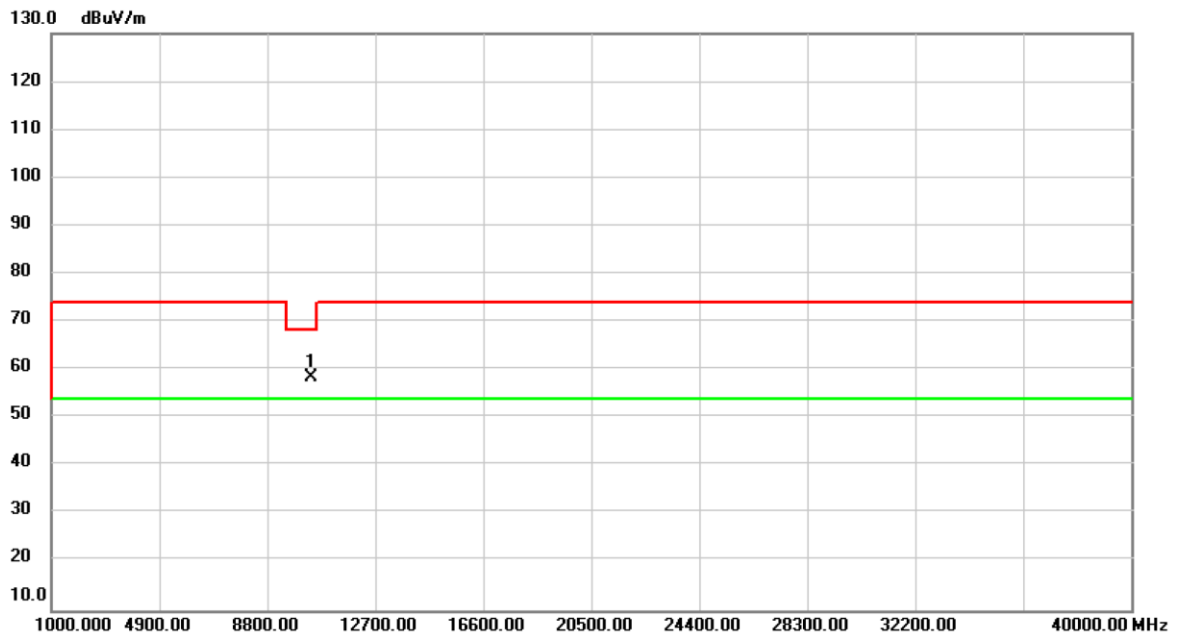


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	55.55	2.83	58.38	68.20	-9.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

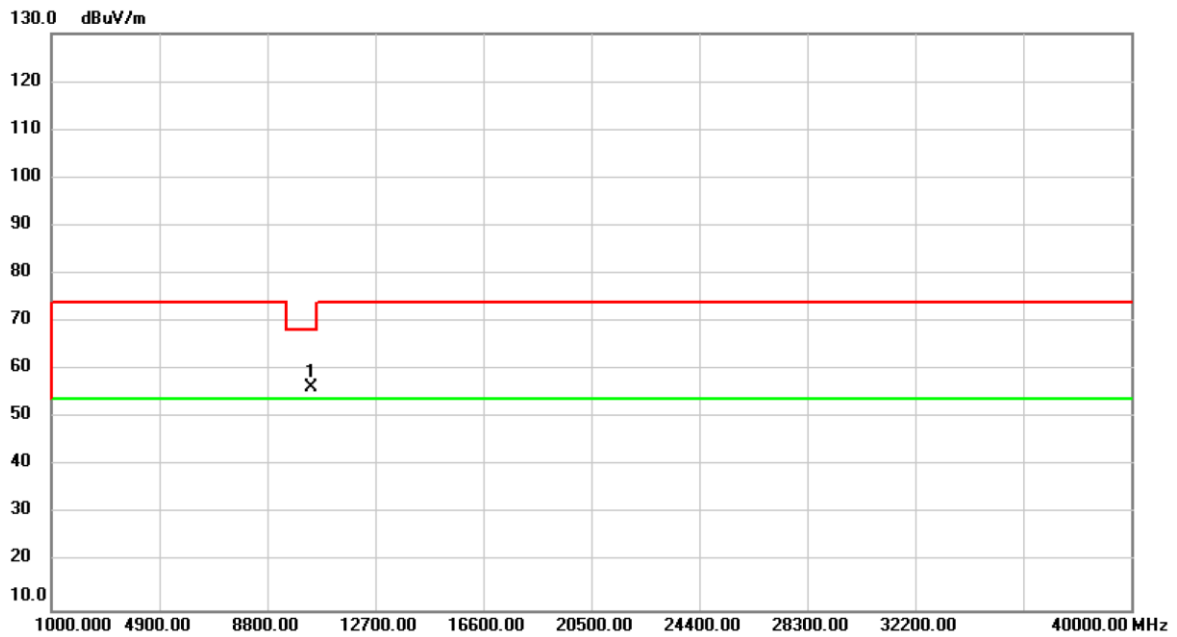


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.59	2.83	56.42	68.20	-11.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

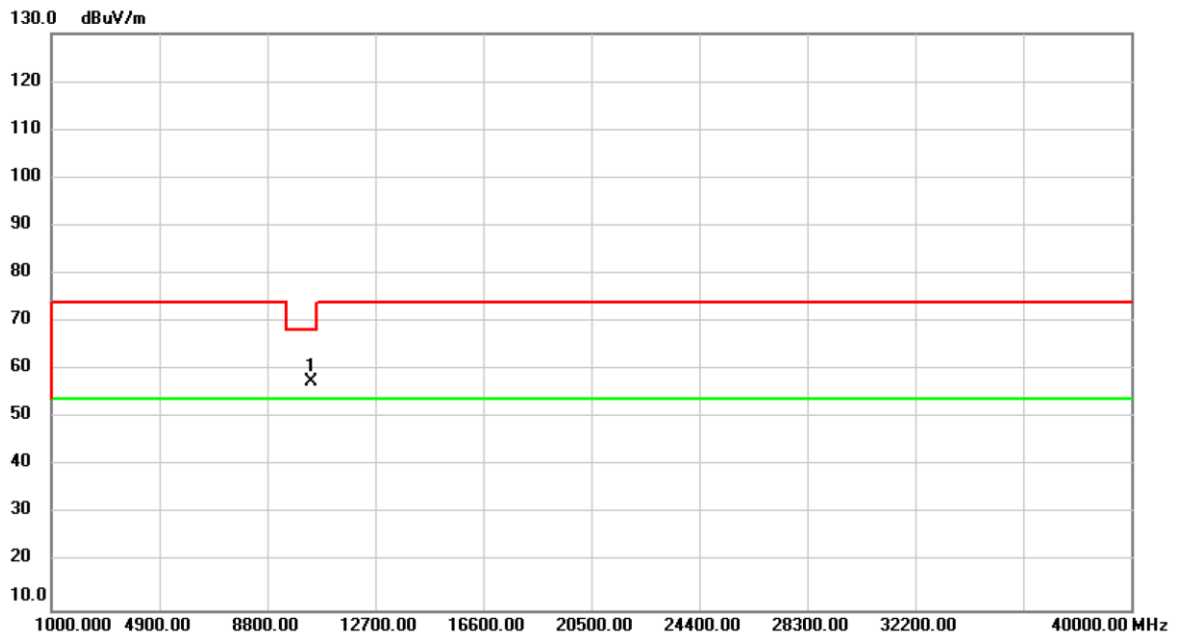


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	54.75	2.89	57.64	68.20	-10.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

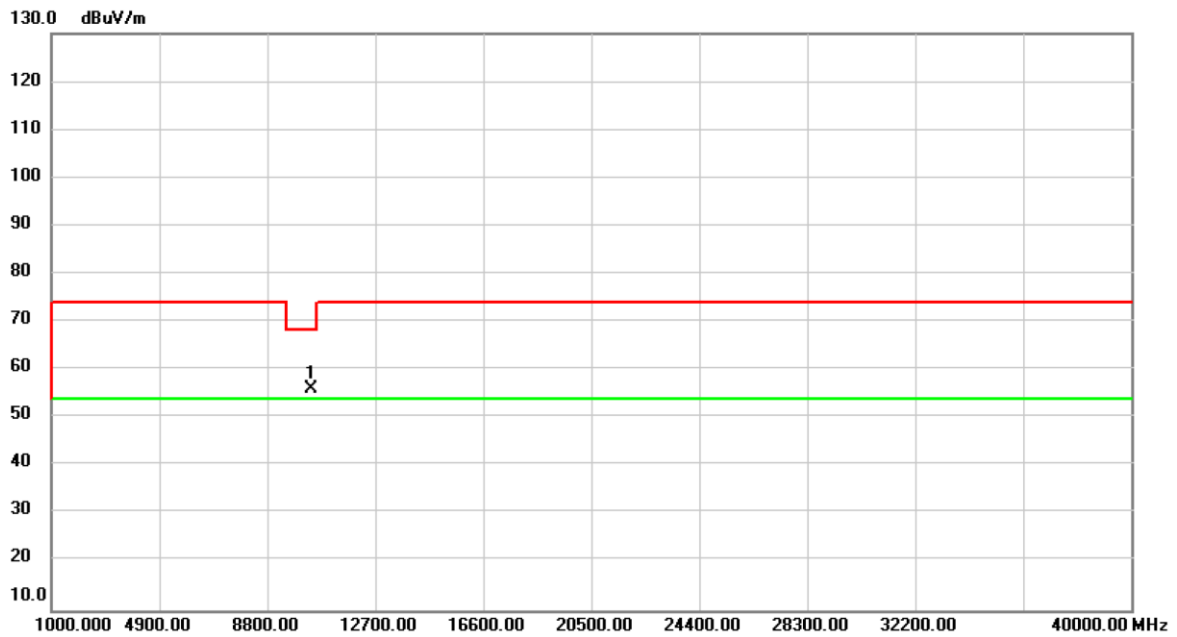


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.23	2.89	56.12	68.20	-12.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

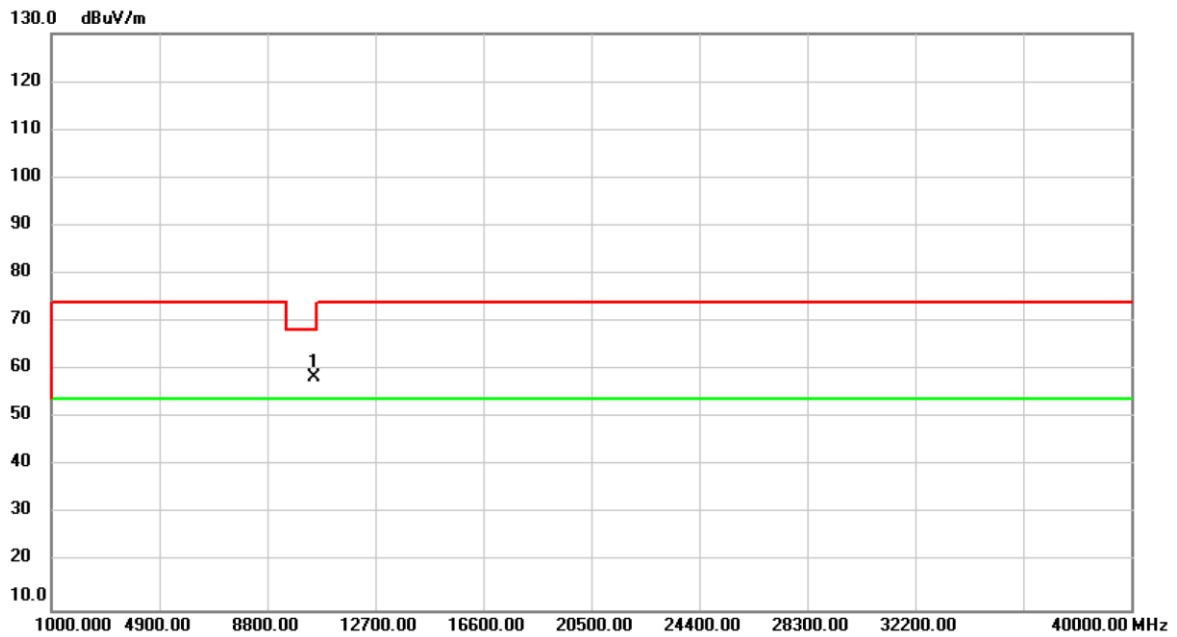


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.42	3.00	58.42	68.20	-9.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

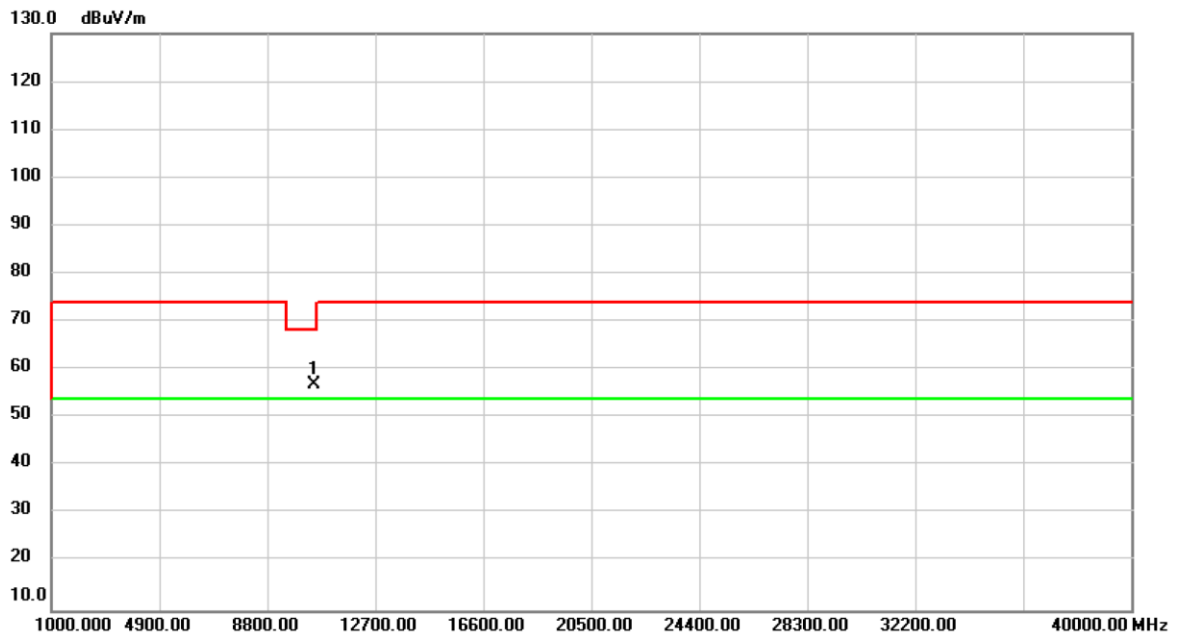


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.00	53.96	3.00	56.96	68.20	-11.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

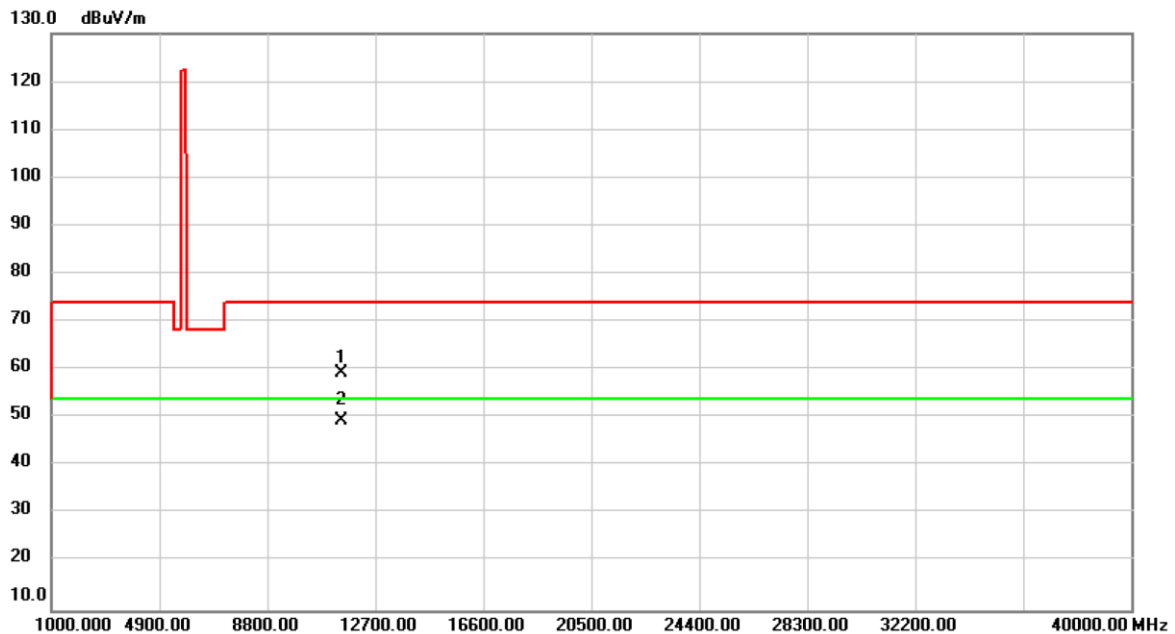


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	55.34	3.89	59.23	74.00	-14.77	peak	
2	*	11490.00	45.49	3.89	49.38	54.00	-4.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

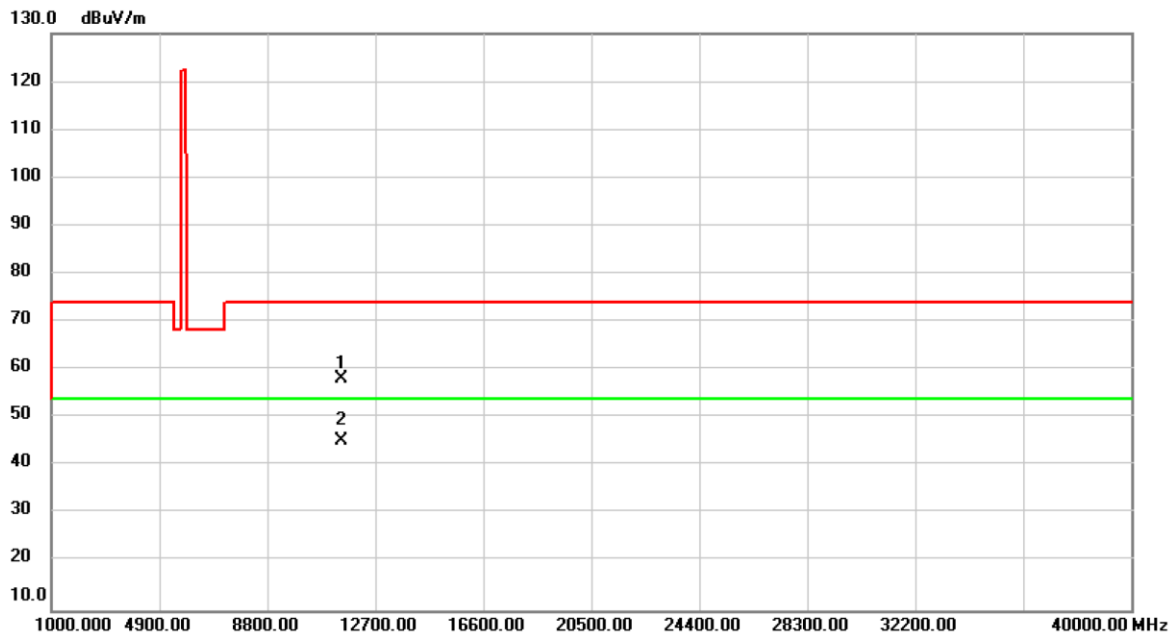


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.27	3.89	58.16	74.00	-15.84	peak	
2	*	11490.00	41.31	3.89	45.20	54.00	-8.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

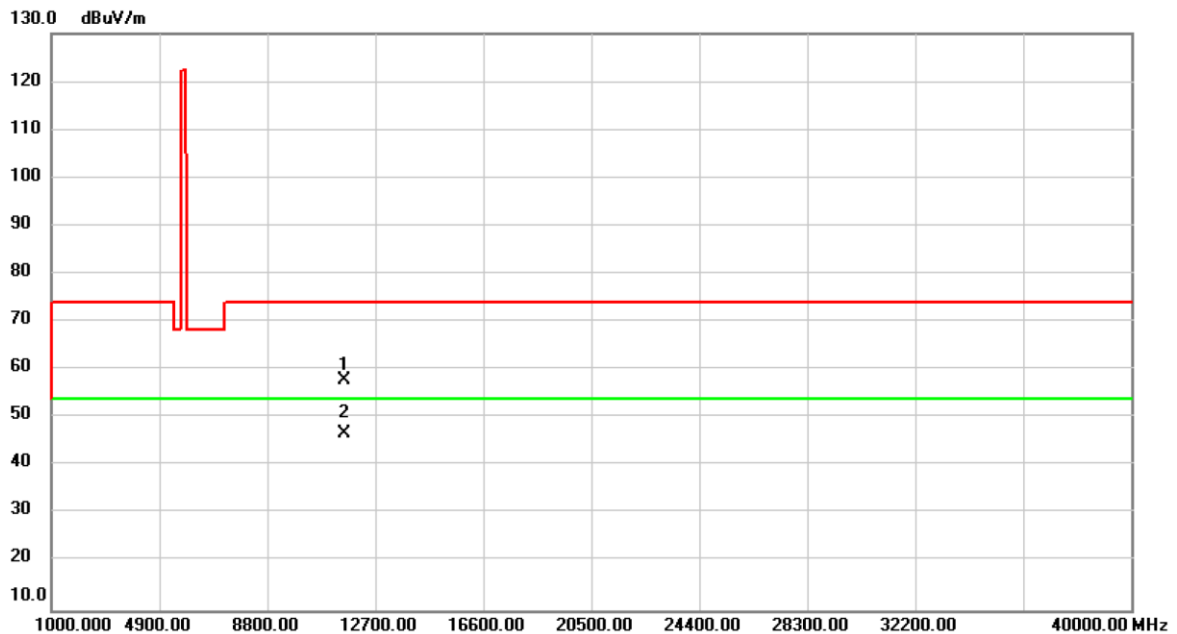


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.37	3.57	57.94	74.00	-16.06	peak	
2	*	11570.00	43.09	3.57	46.66	54.00	-7.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

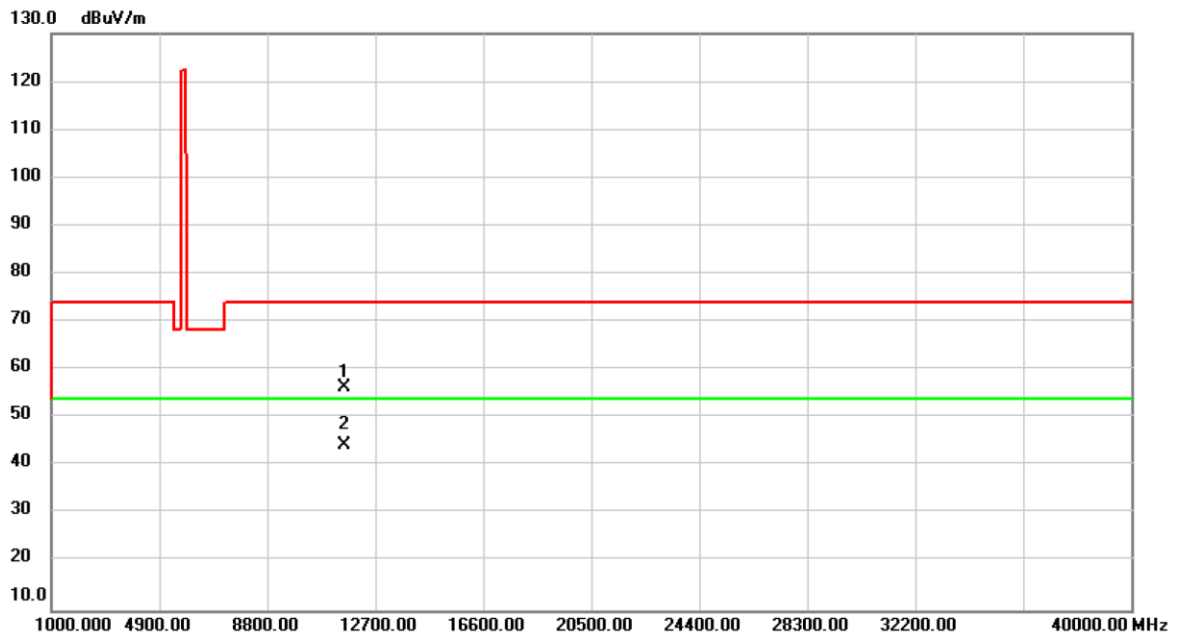


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	52.93	3.57	56.50	74.00	-17.50	peak	
2	*	11570.00	40.90	3.57	44.47	54.00	-9.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

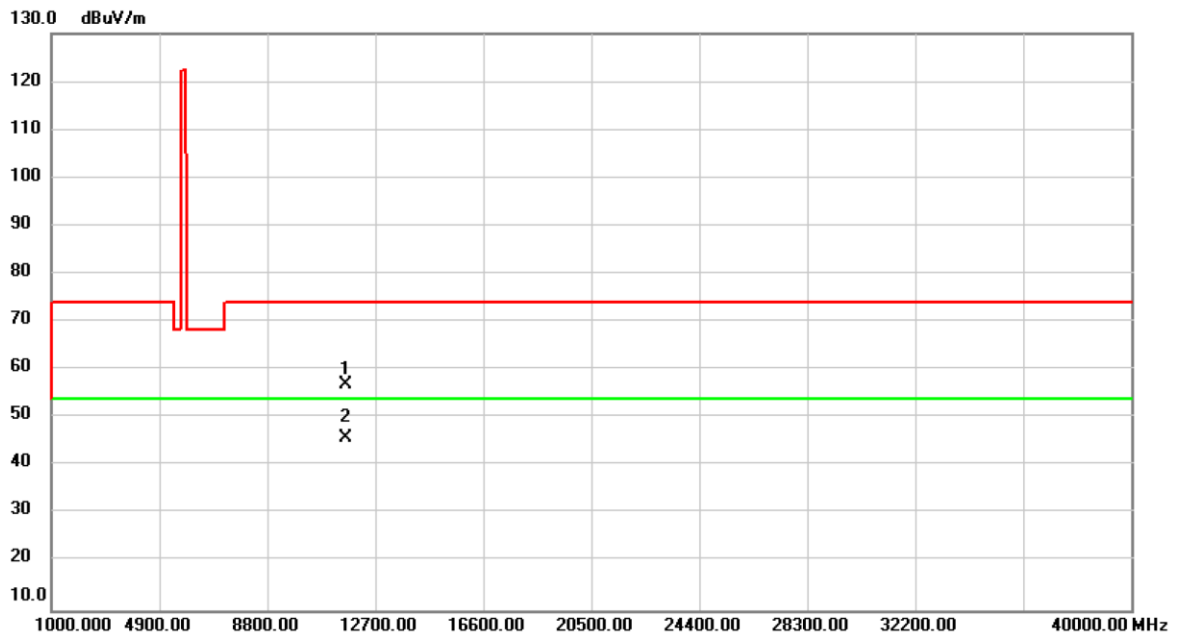


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.91	3.18	57.09	74.00	-16.91	peak	
2	*	11650.00	42.78	3.18	45.96	54.00	-8.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)_External Antenna	Test Date	2019/11/28
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

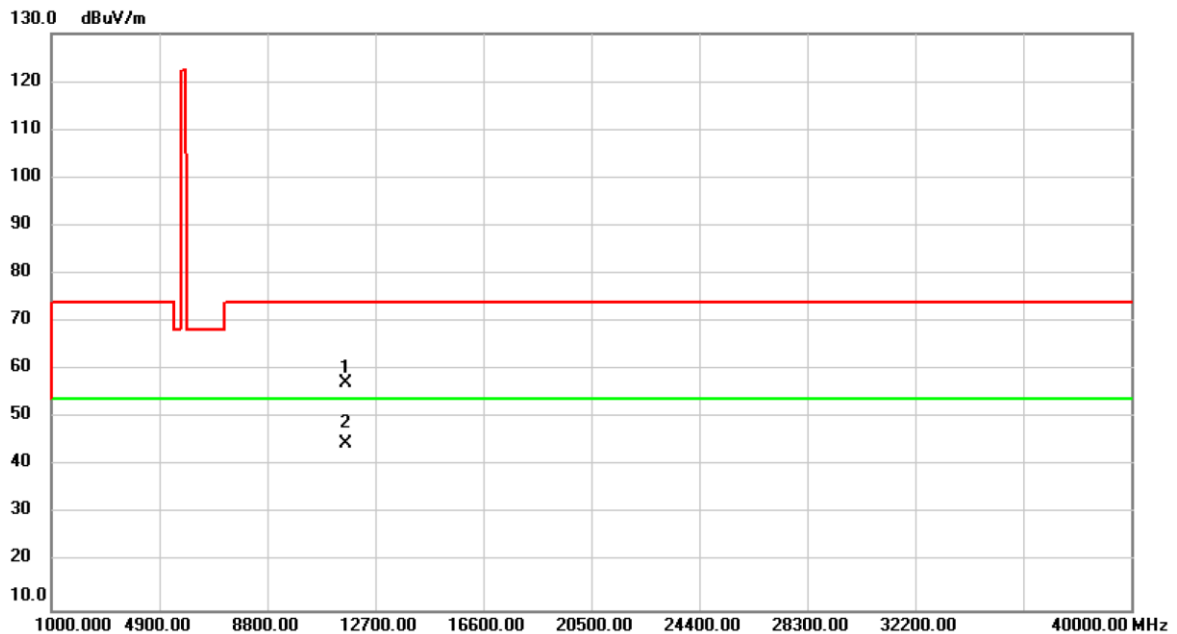


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.95	3.18	57.13	74.00	-16.87	peak	
2	*	11650.00	41.58	3.18	44.76	54.00	-9.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

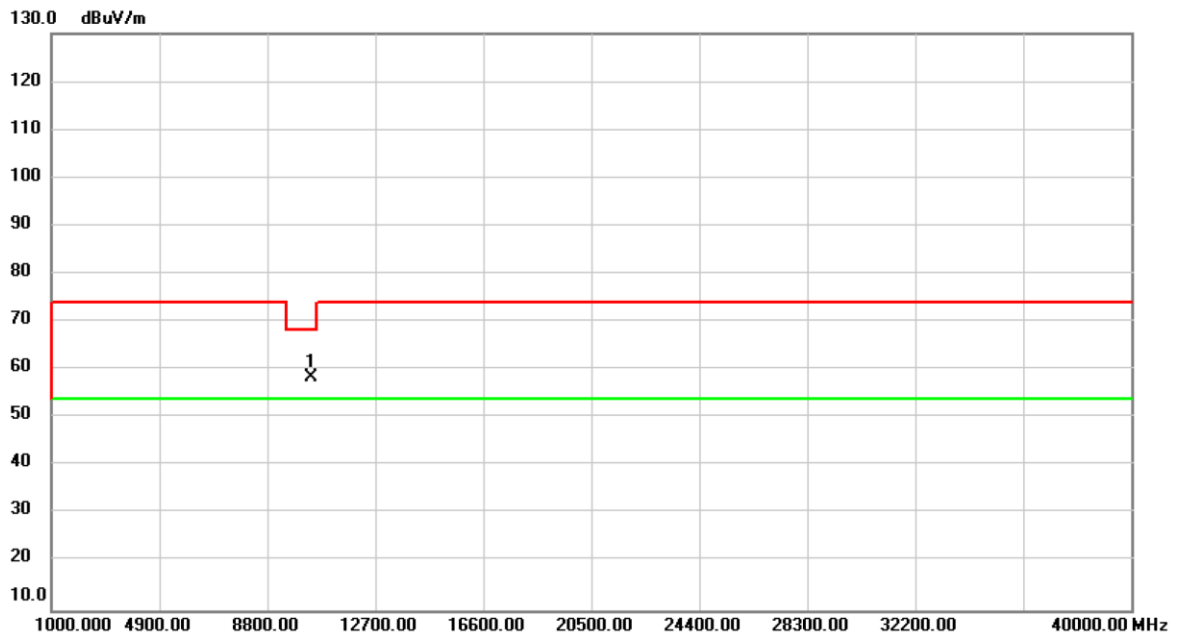


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	55.56	2.85	58.41	68.20	-9.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

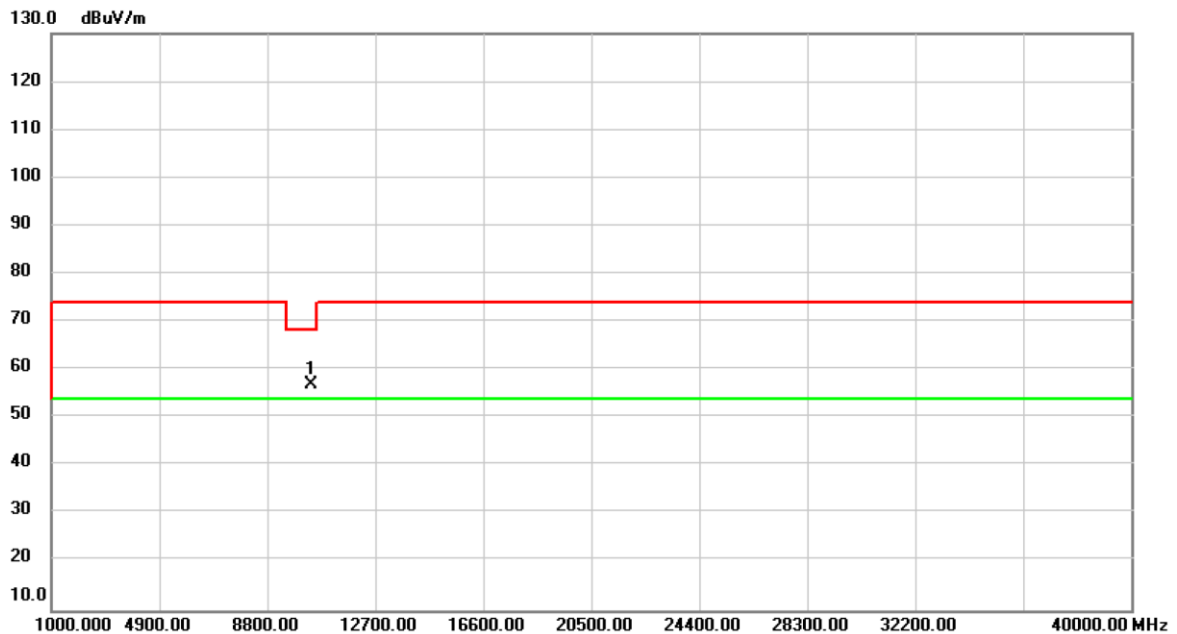


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	54.15	2.85	57.00	68.20	-11.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

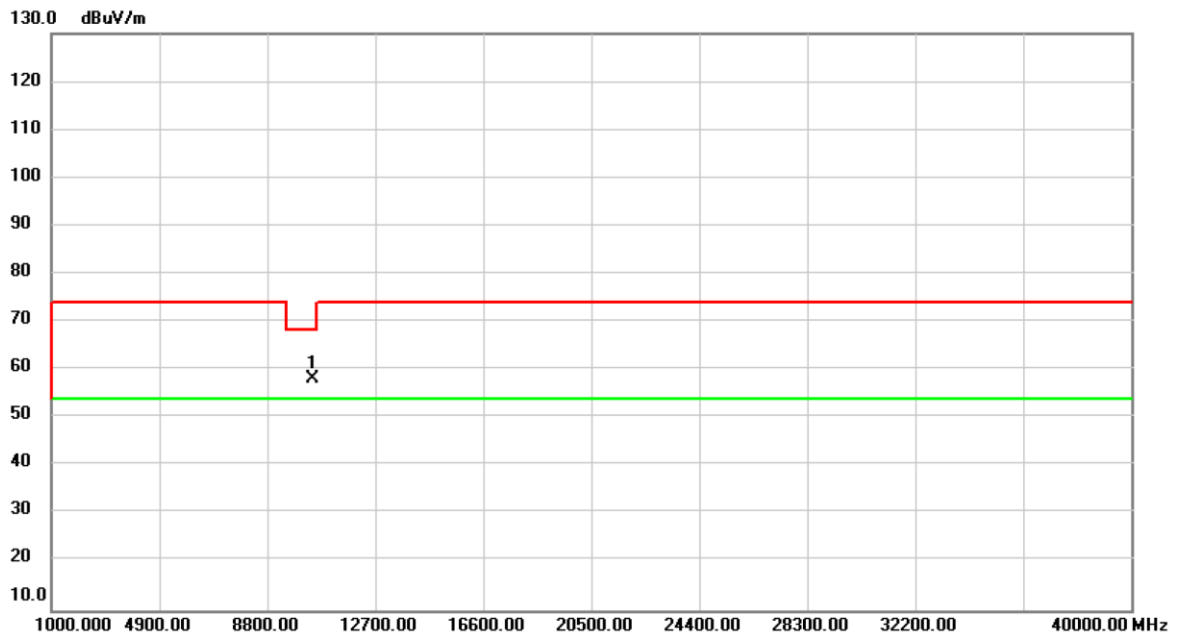


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	55.21	2.98	58.19	68.20	-10.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

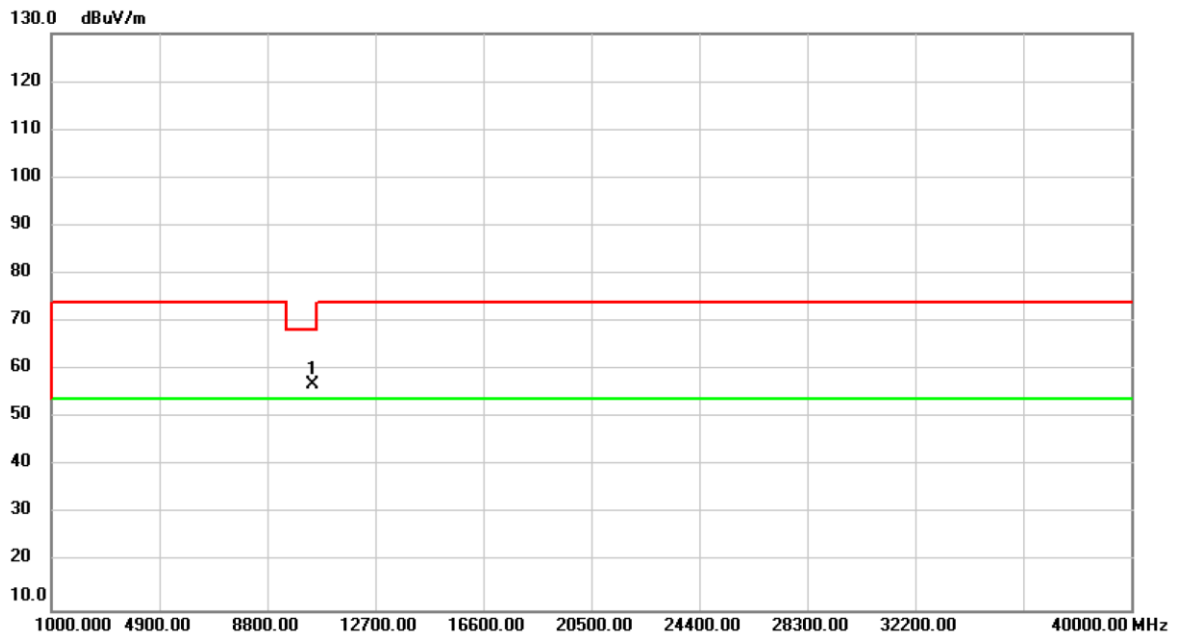


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	53.86	2.98	56.84	68.20	-11.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

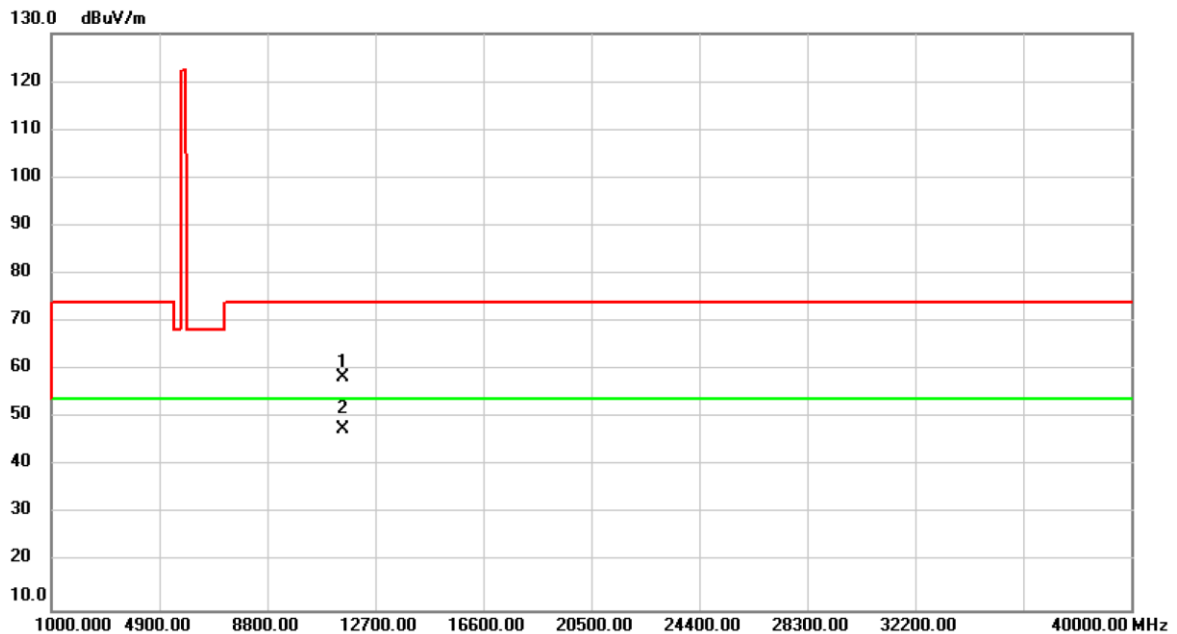


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	54.52	3.86	58.38	74.00	-15.62	peak	
2	*	11510.00	43.77	3.86	47.63	54.00	-6.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

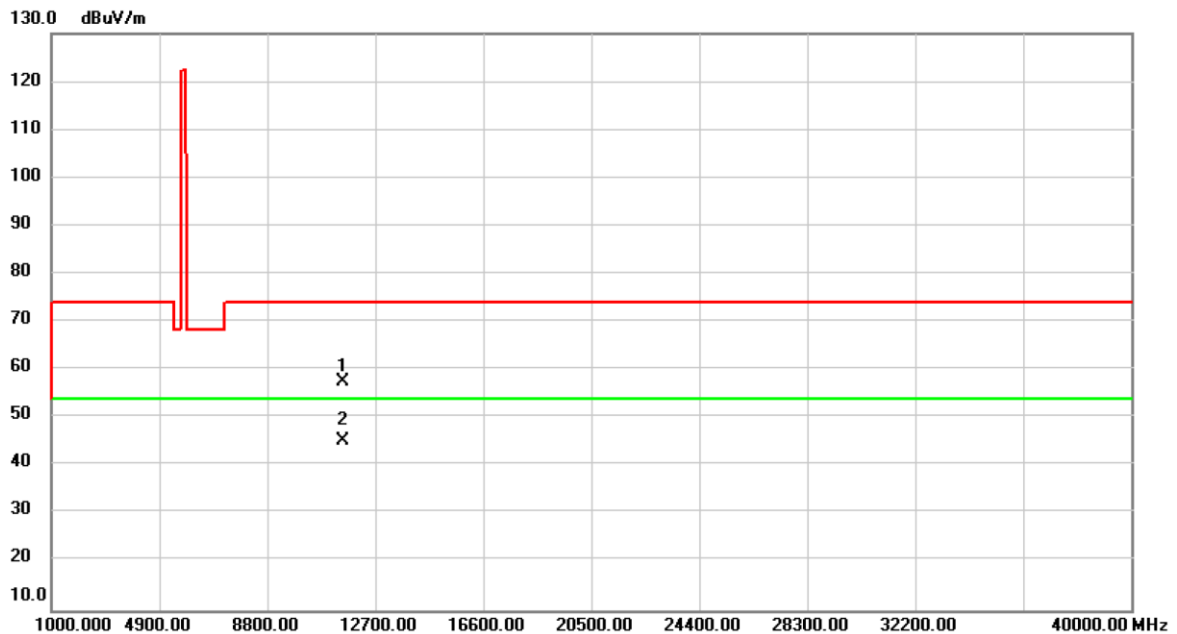


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	53.79	3.86	57.65	74.00	-16.35	peak	
2	*	11510.00	41.25	3.86	45.11	54.00	-8.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

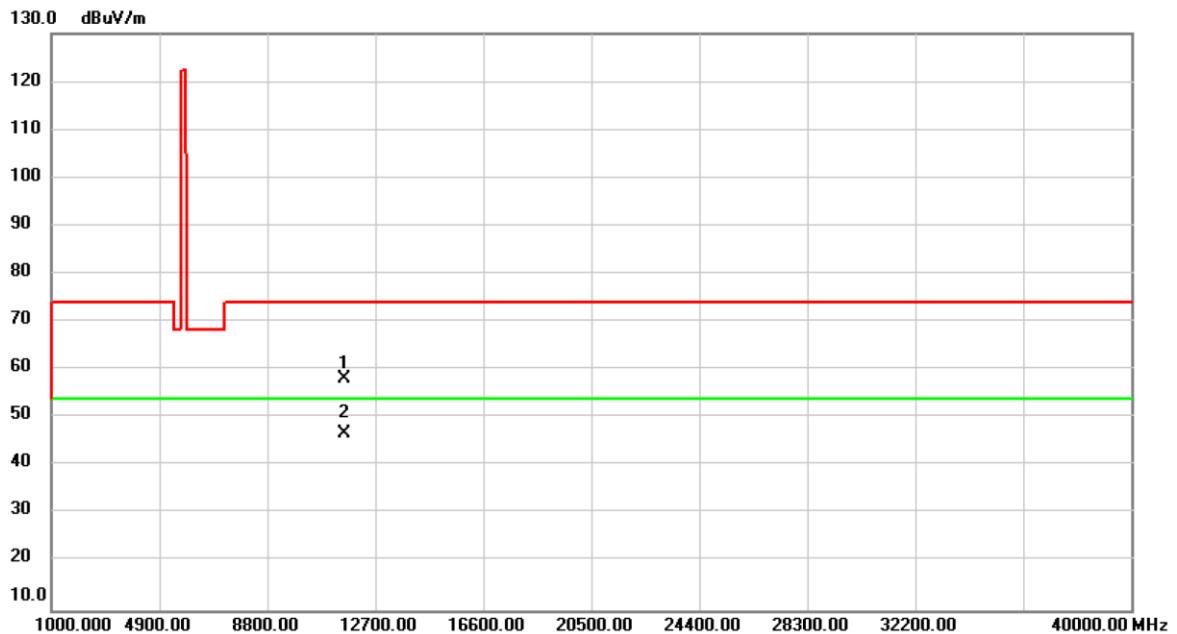


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.72	3.47	58.19	74.00	-15.81	peak	
2	*	11590.00	43.33	3.47	46.80	54.00	-7.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

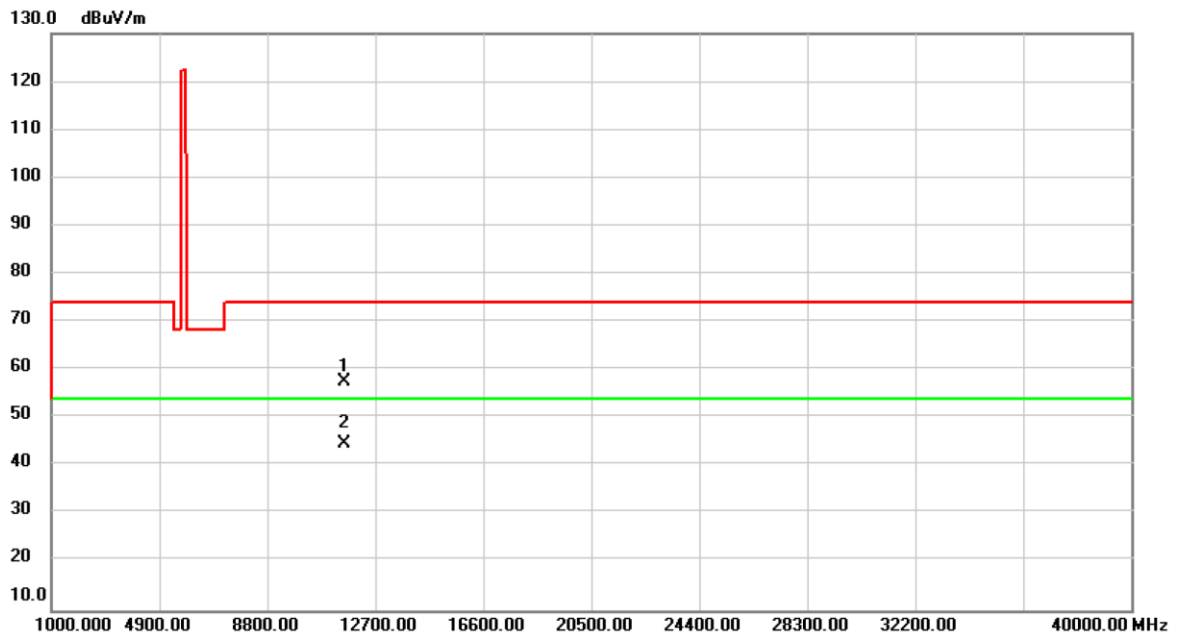


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.15	3.47	57.62	74.00	-16.38	peak	
2	*	11590.00	41.32	3.47	44.79	54.00	-9.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

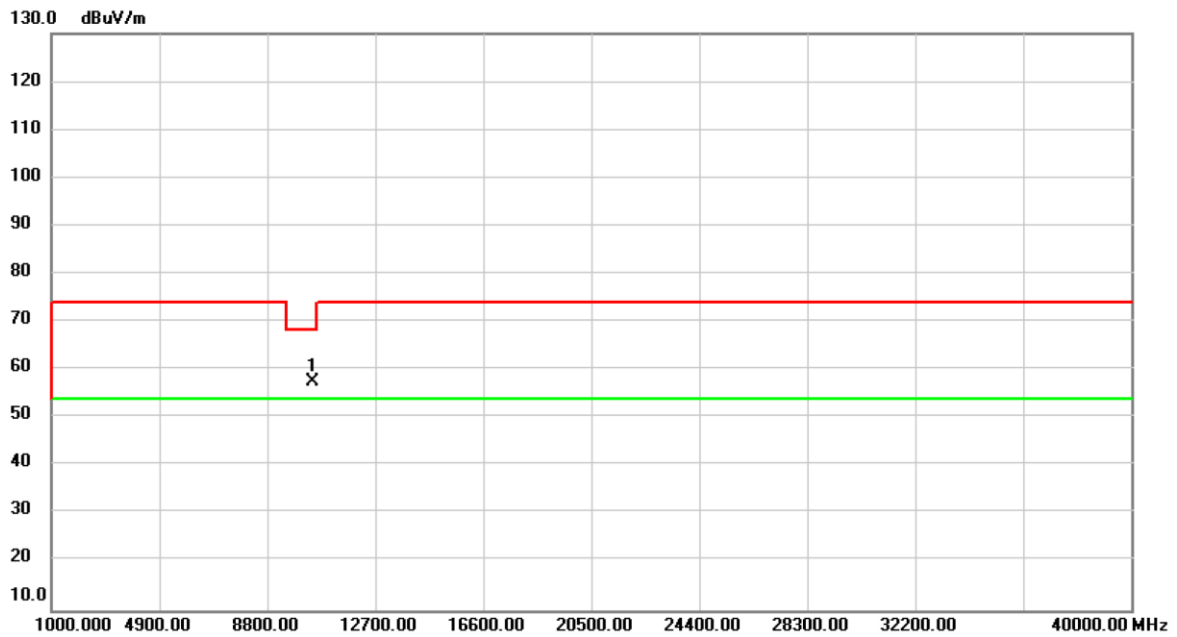


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	54.58	2.91	57.49	68.20	-10.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

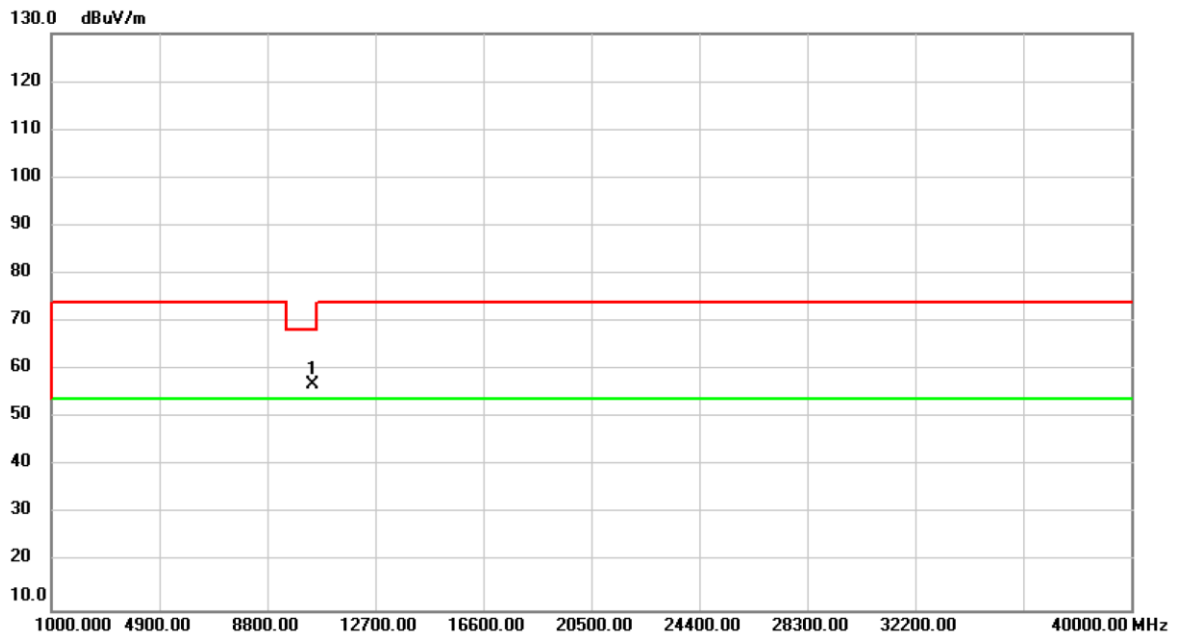


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	54.10	2.91	57.01	68.20	-11.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

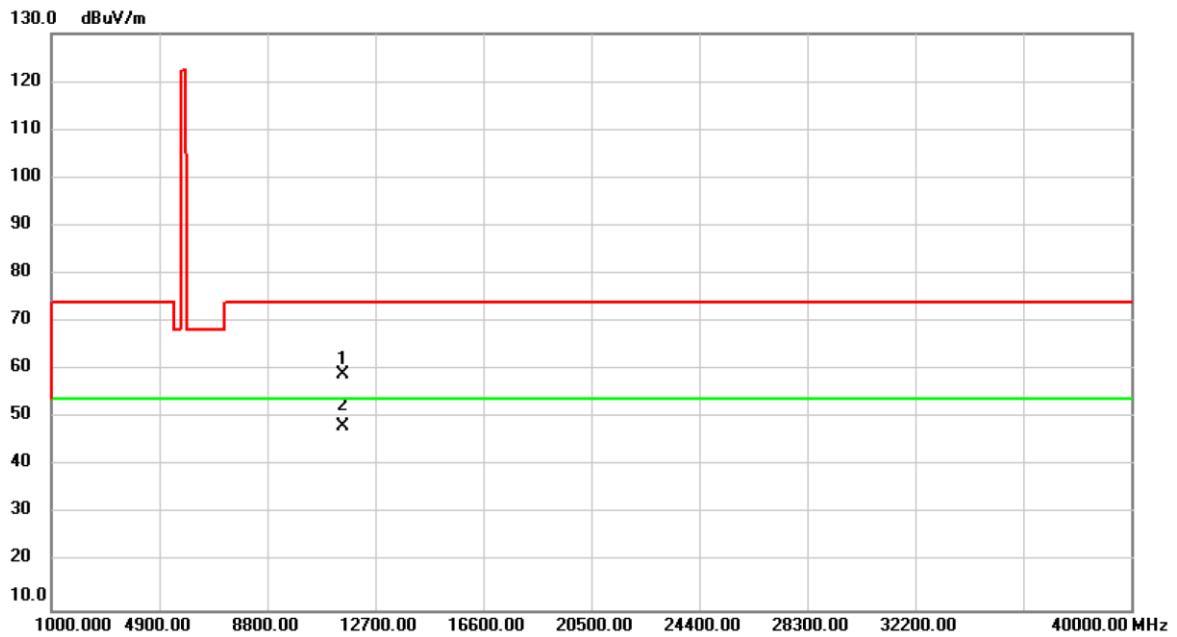


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	55.36	3.67	59.03	74.00	-14.97	peak	
2	*	11550.00	44.56	3.67	48.23	54.00	-5.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)_ External Antenna	Test Date	2019/11/28
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

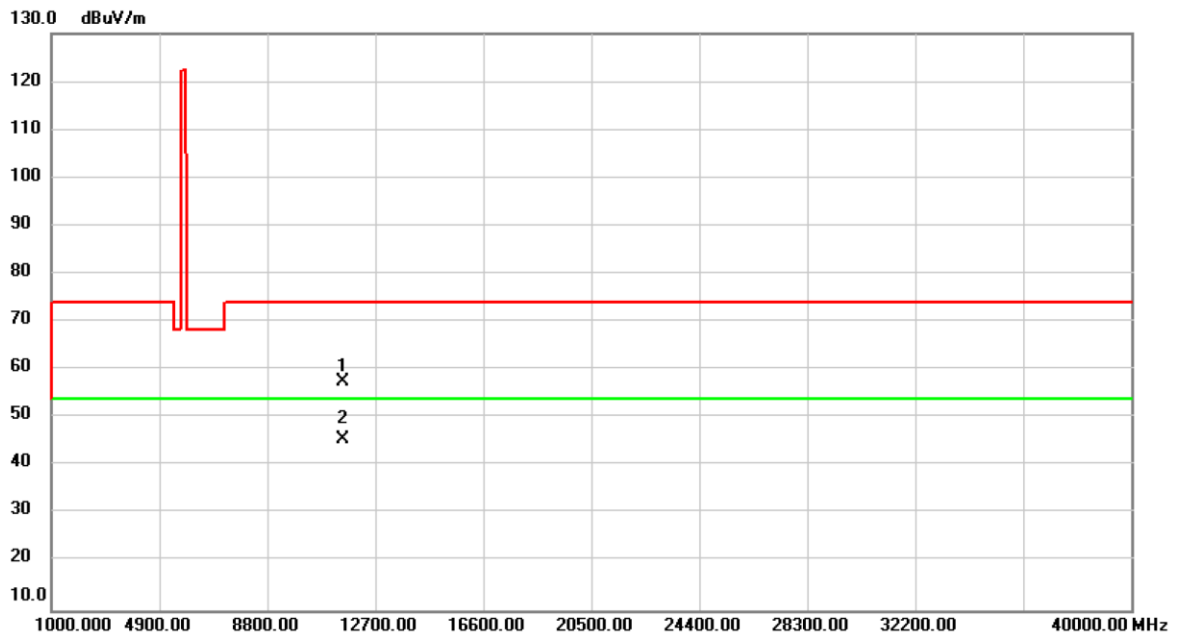


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	53.83	3.67	57.50	74.00	-16.50	peak	
2	*	11550.00	41.85	3.67	45.52	54.00	-8.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH36: 5180 MHz	Polarization	Vertical

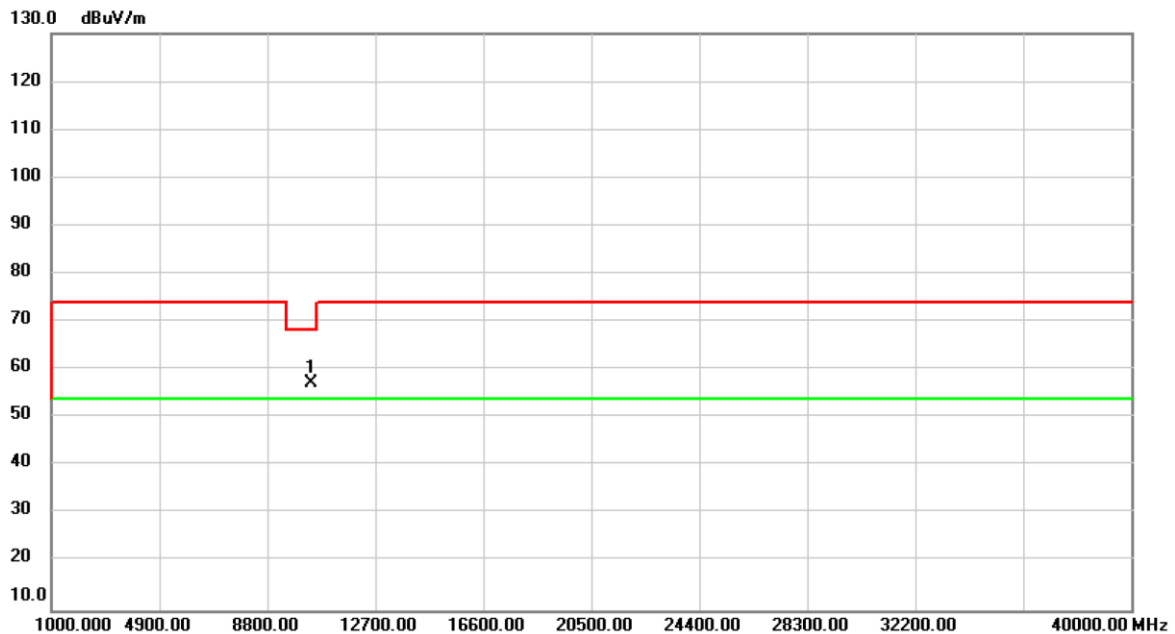


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.49	2.83	57.32	68.20	-10.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH36: 5180 MHz	Polarization	Horizontal

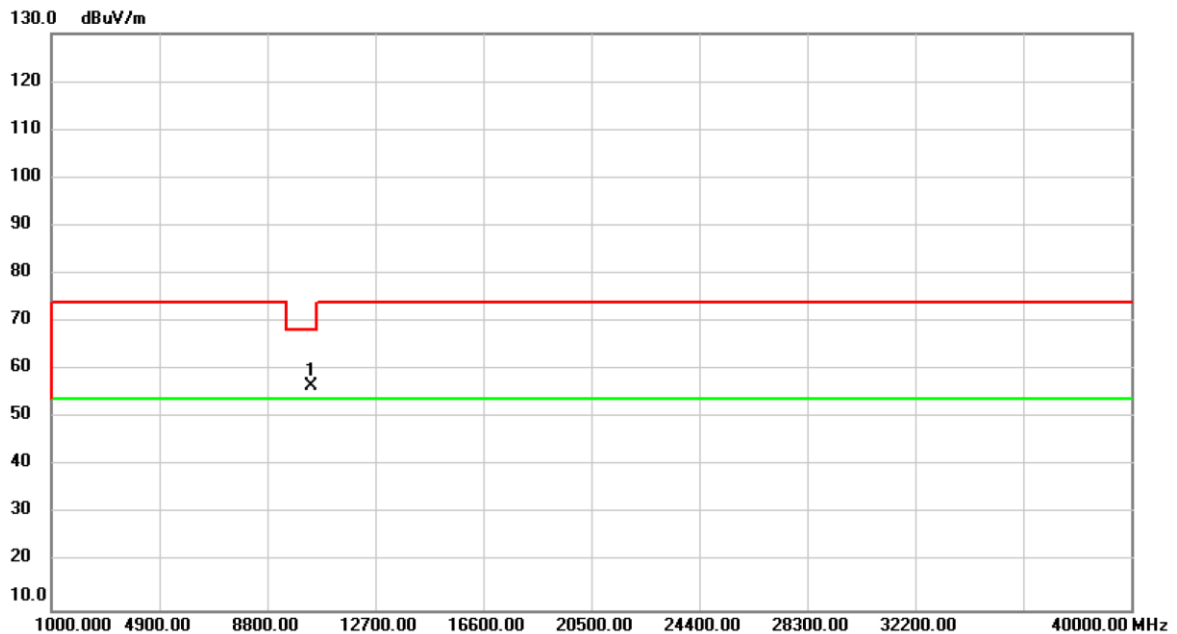


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	53.91	2.83	56.74	68.20	-11.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH40: 5200 MHz	Polarization	Vertical

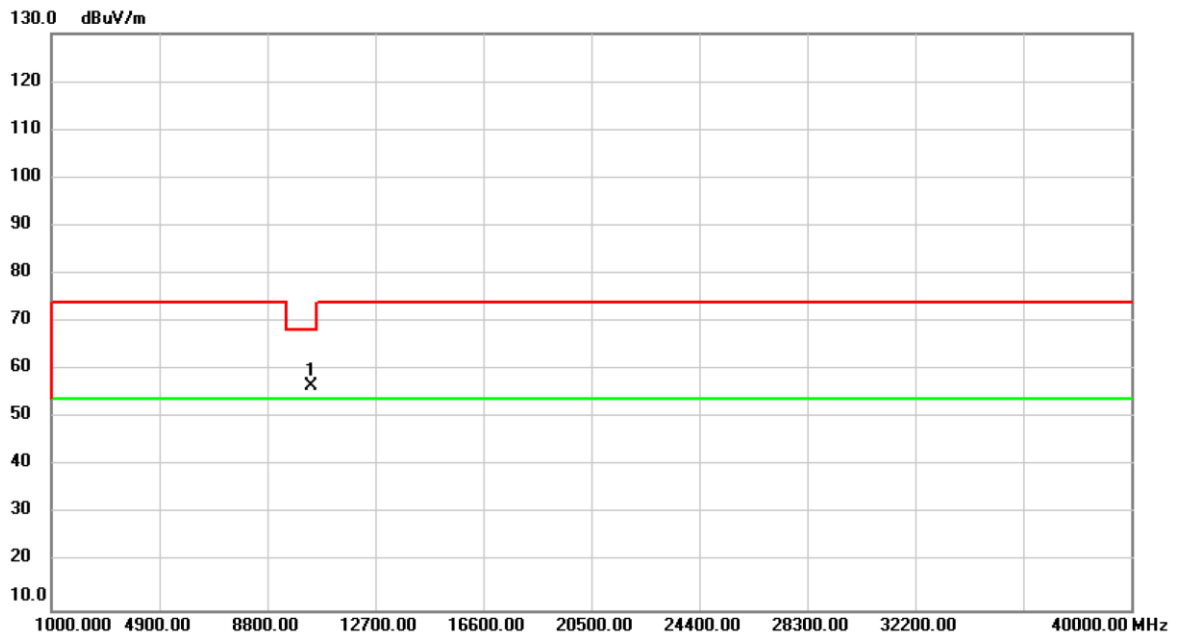


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	53.71	2.89	56.60	68.20	-11.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH40: 5200 MHz	Polarization	Horizontal

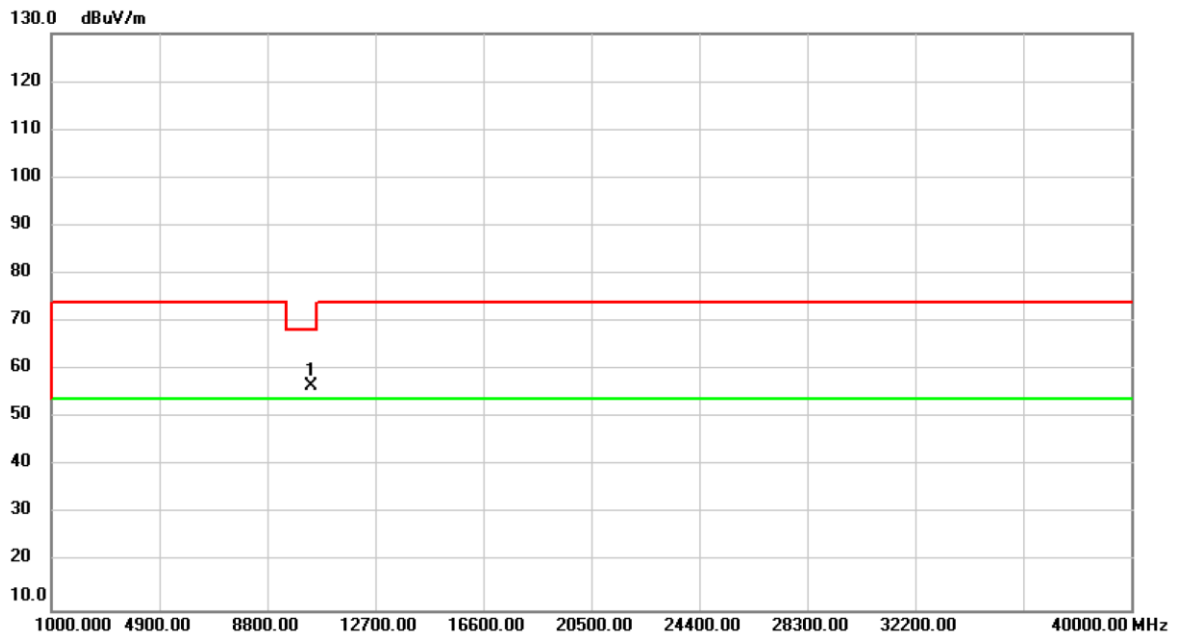


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	53.79	2.89	56.68	68.20	-11.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH48: 5240 MHz	Polarization	Vertical

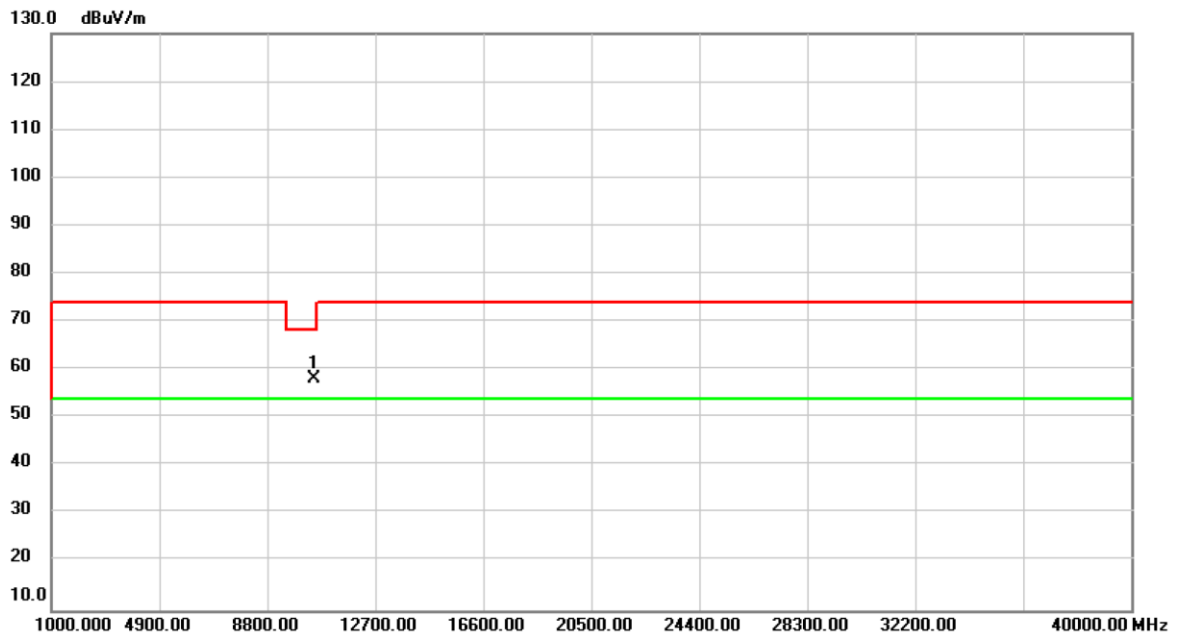


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	55.27	3.00	58.27	68.20	-9.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH48: 5240 MHz	Polarization	Horizontal

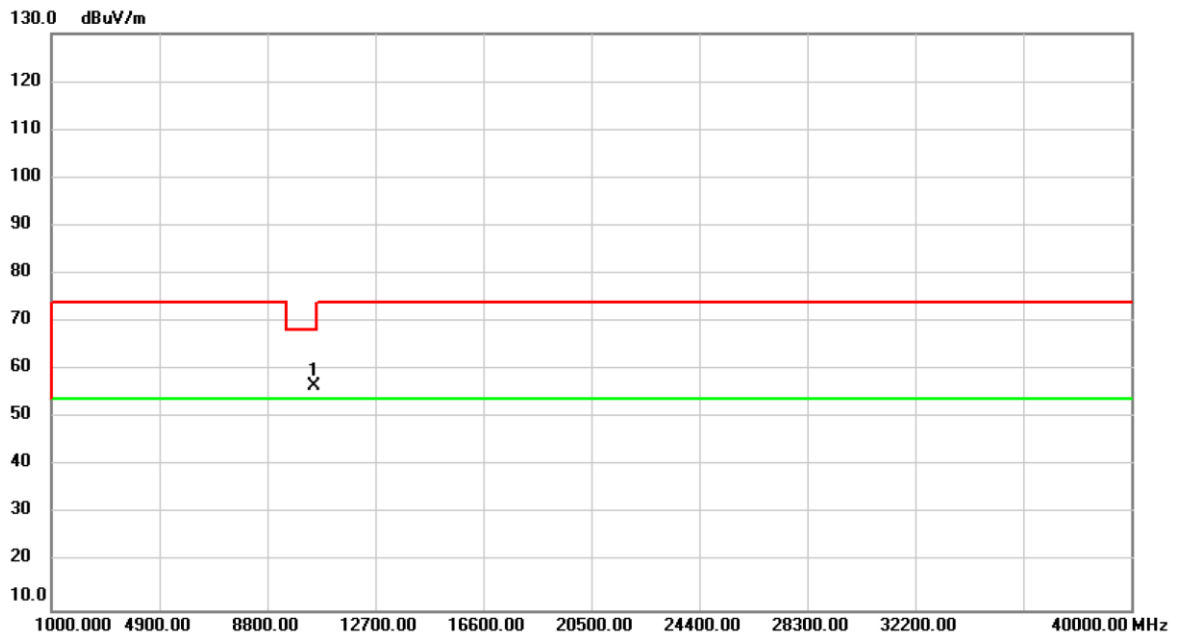


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	53.77	3.00	56.77	68.20	-11.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH149: 5745 MHz	Polarization	Vertical

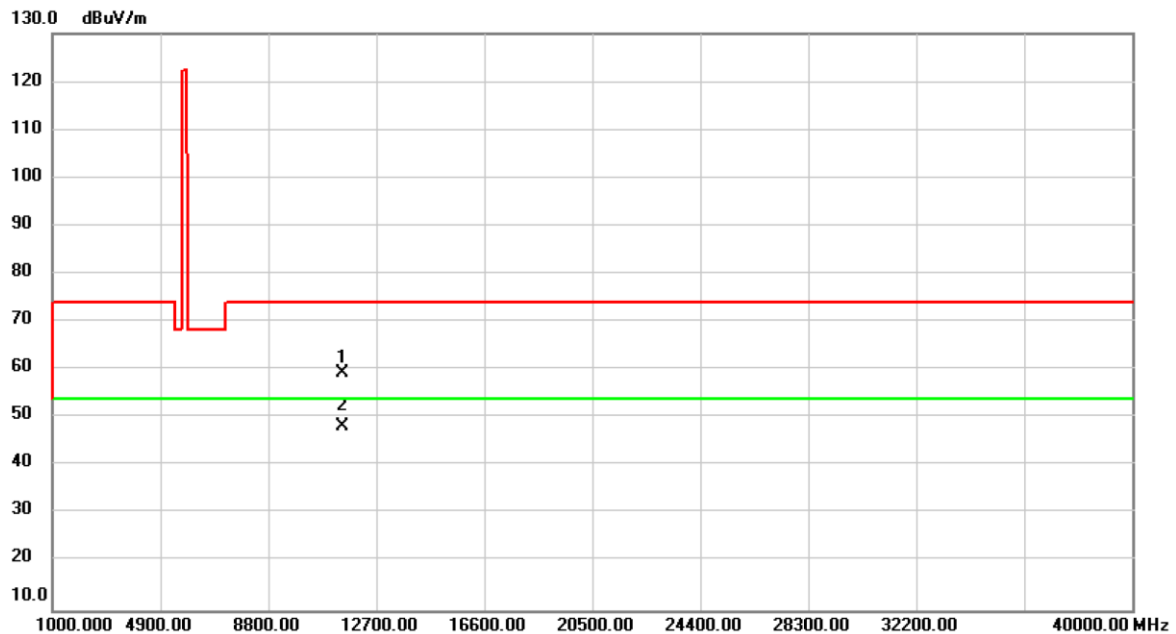


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	55.40	3.89	59.29	74.00	-14.71	peak	
2	*	11490.00	44.40	3.89	48.29	54.00	-5.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH149: 5745 MHz	Polarization	Horizontal

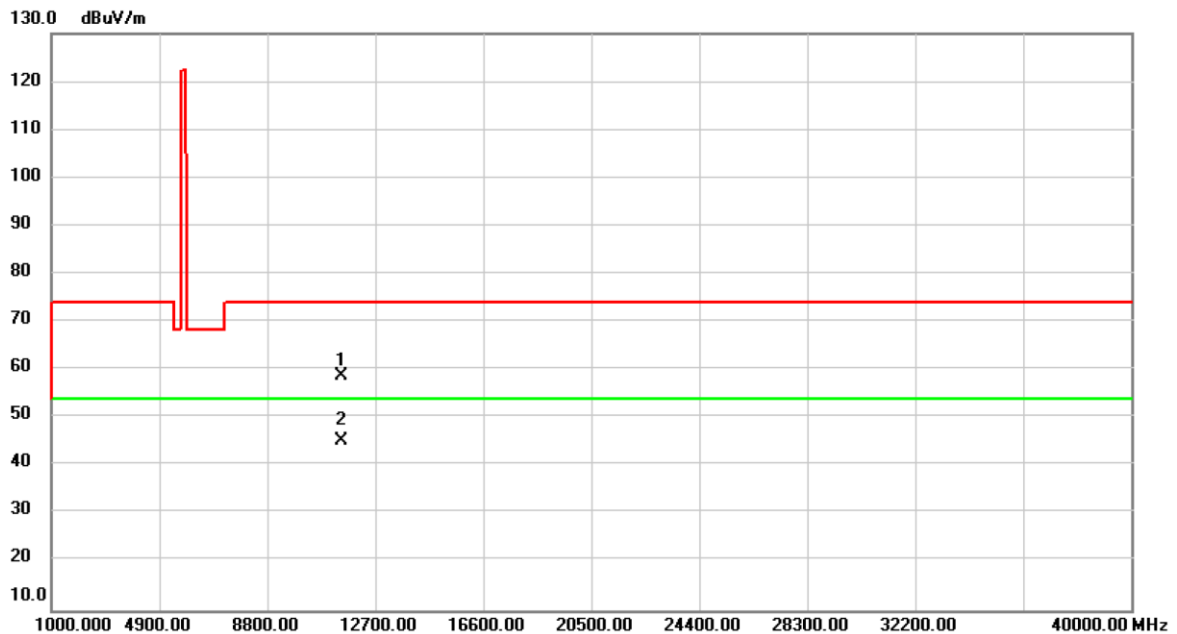


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.73	3.89	58.62	74.00	-15.38	peak	
2	*	11490.00	41.39	3.89	45.28	54.00	-8.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH157: 5785 MHz	Polarization	Vertical

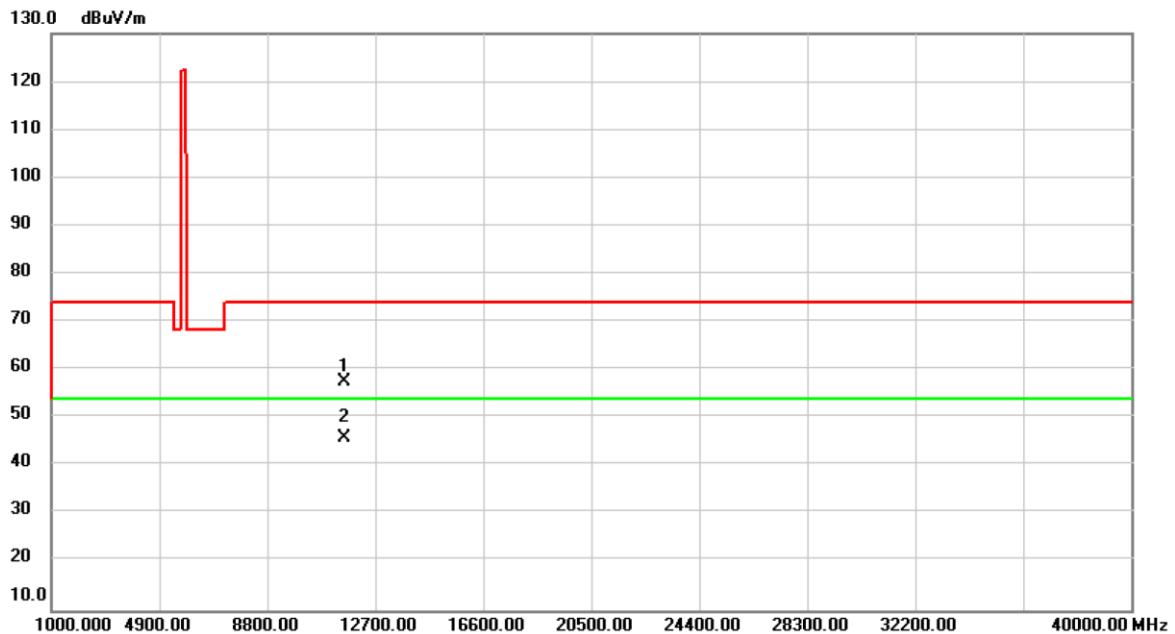


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.02	3.57	57.59	74.00	-16.41	peak	
2	*	11570.00	42.22	3.57	45.79	54.00	-8.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH157: 5785 MHz	Polarization	Horizontal

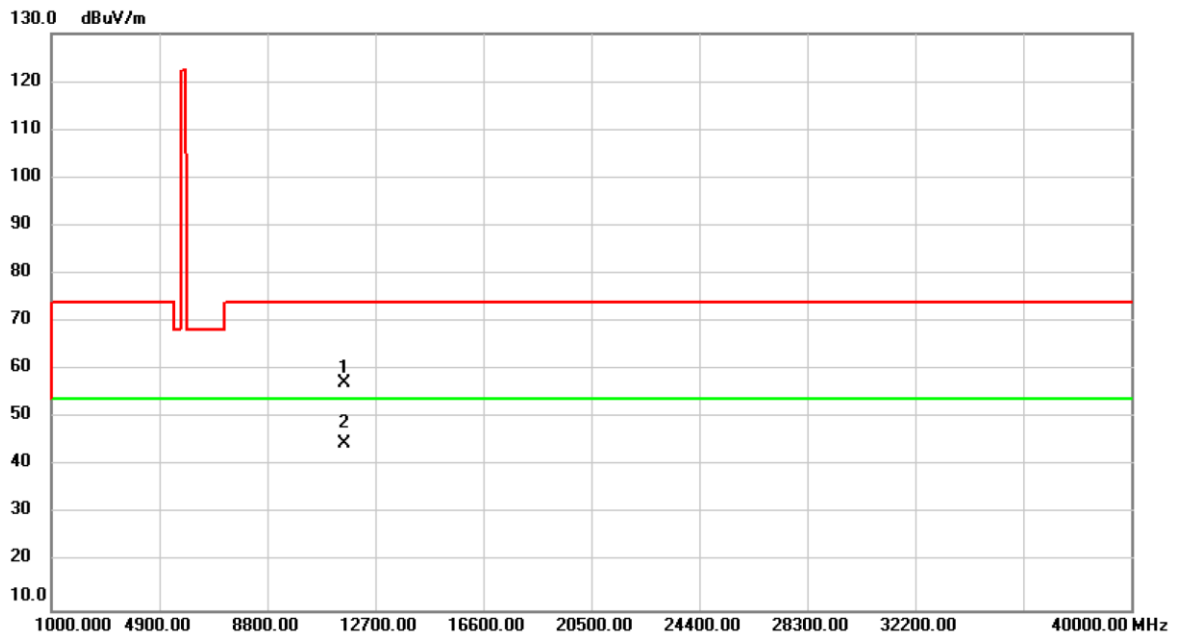


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.70	3.57	57.27	74.00	-16.73	peak	
2	*	11570.00	40.98	3.57	44.55	54.00	-9.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH165: 5825 MHz	Polarization	Vertical

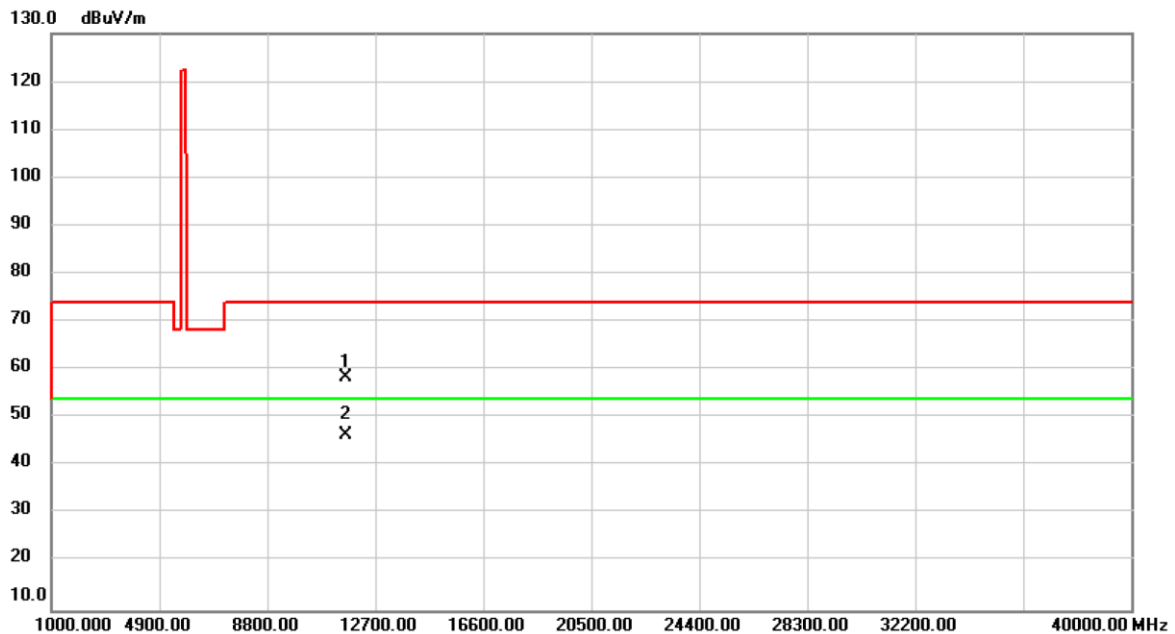


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	55.26	3.18	58.44	74.00	-15.56	peak	
2	*	11650.00	43.17	3.18	46.35	54.00	-7.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)_External Antenna	Test Date	2019/12/11
Test Frequency	CH165: 5825 MHz	Polarization	Horizontal

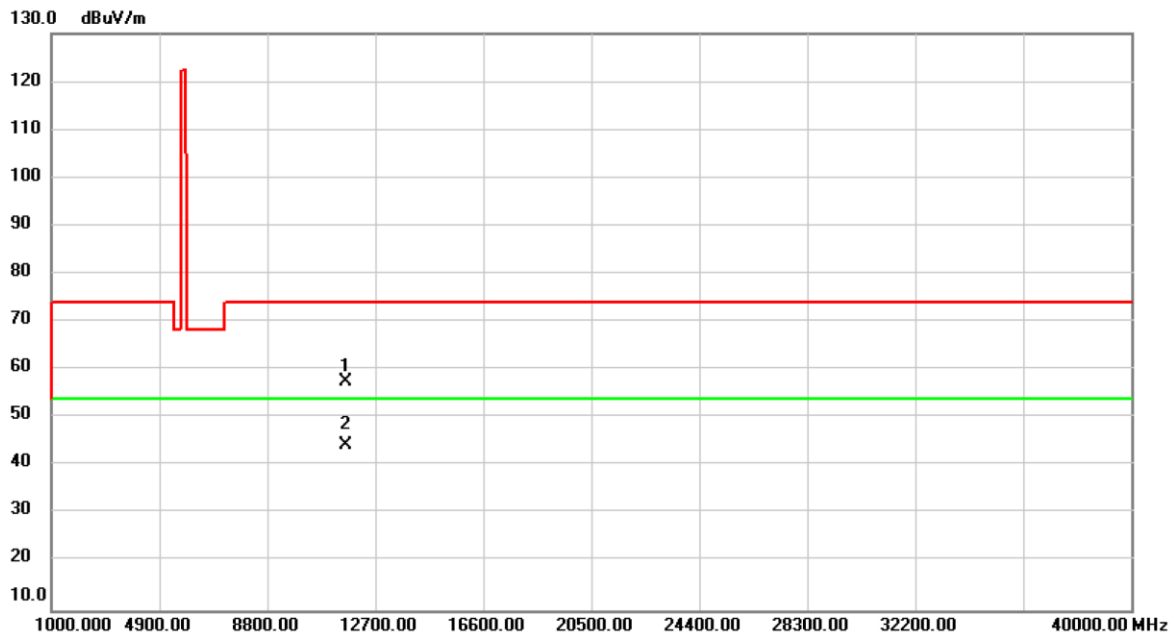


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	54.28	3.18	57.46	74.00	-16.54	peak	
2	*	11650.00	41.27	3.18	44.45	54.00	-9.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH38: 5190 MHz	Polarization	Vertical

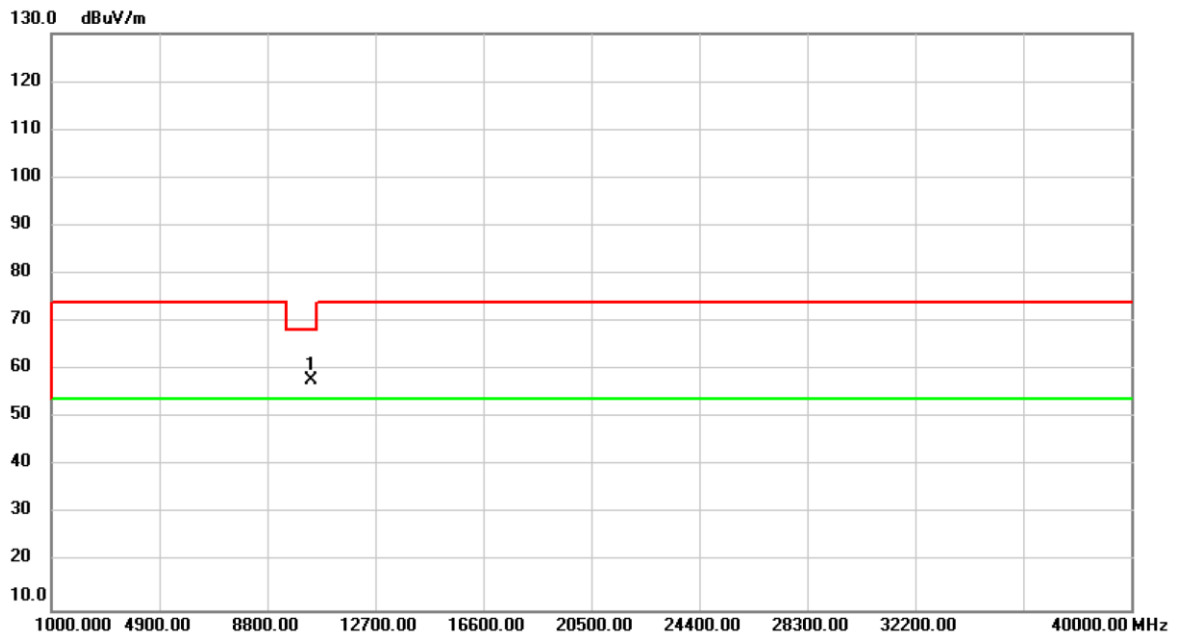


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	54.99	2.85	57.84	68.20	-10.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH38: 5190 MHz	Polarization	Horizontal

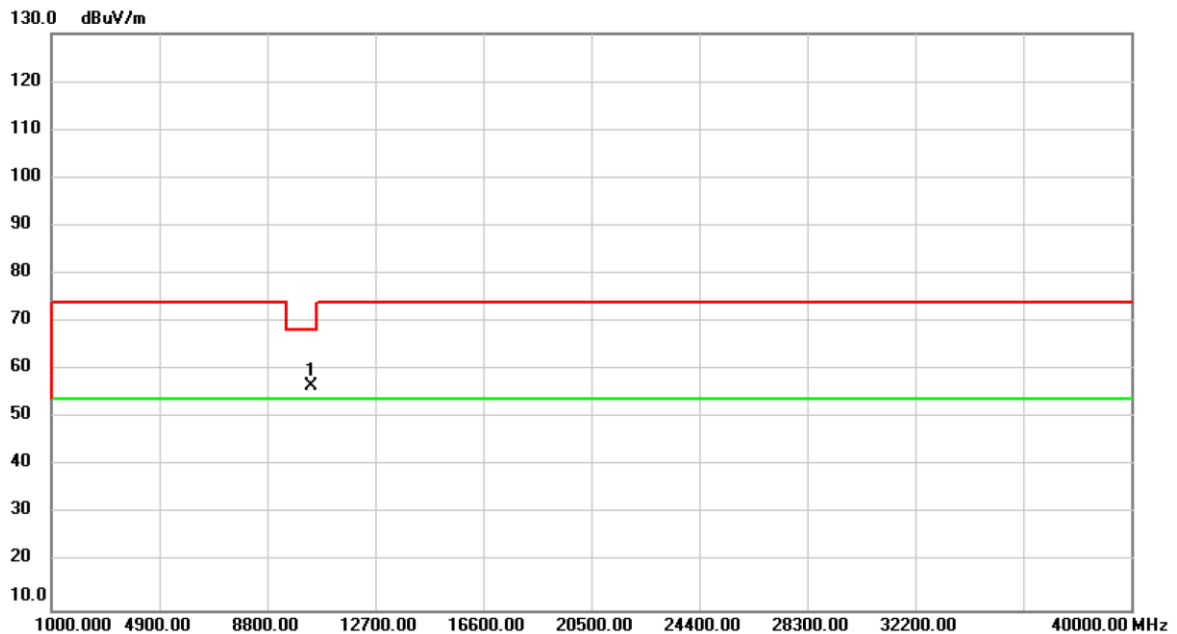


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.81	2.85	56.66	68.20	-11.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH46: 5230 MHz	Polarization	Vertical

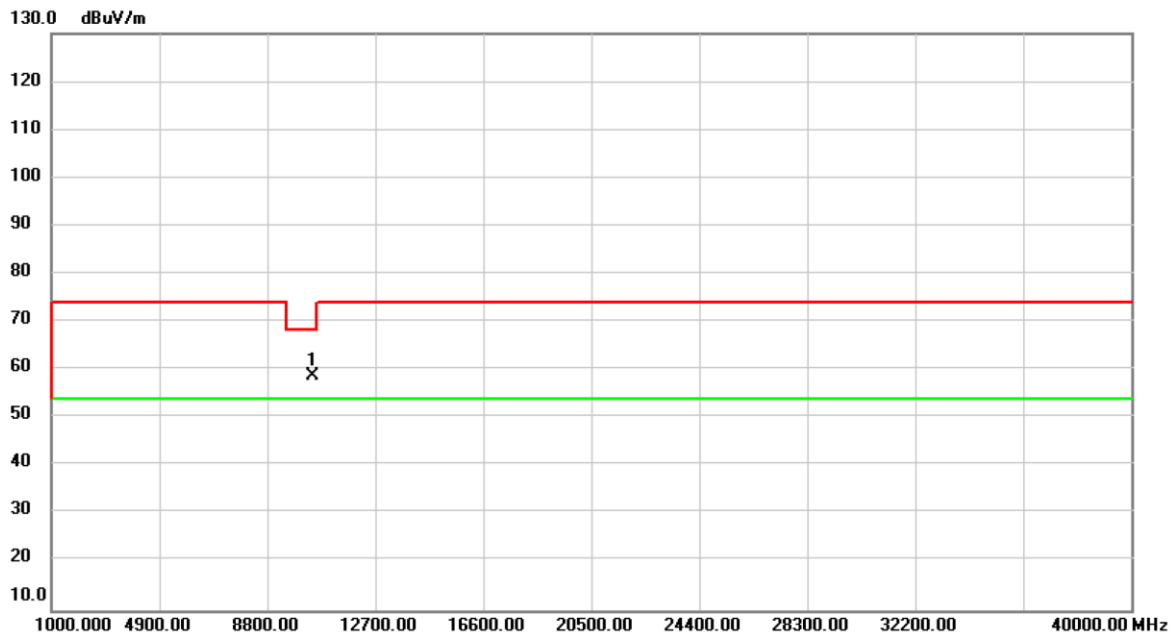


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	55.88	2.98	58.86	68.20	-9.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH46: 5230 MHz	Polarization	Horizontal

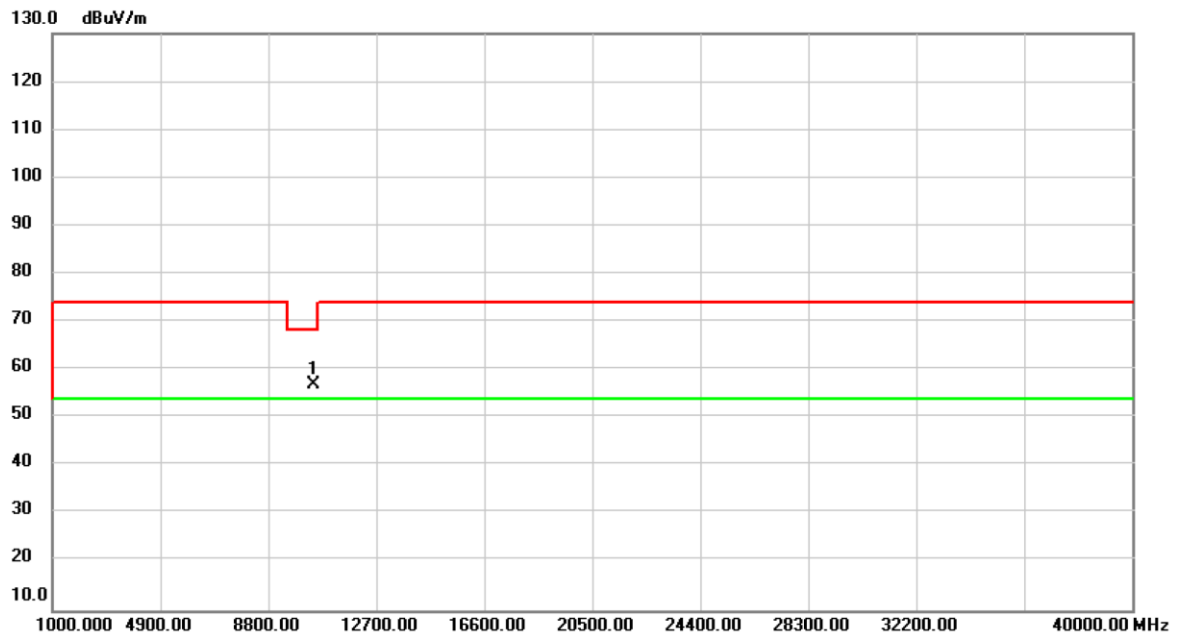


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	54.03	2.98	57.01	68.20	-11.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH151: 5755 MHz	Polarization	Vertical

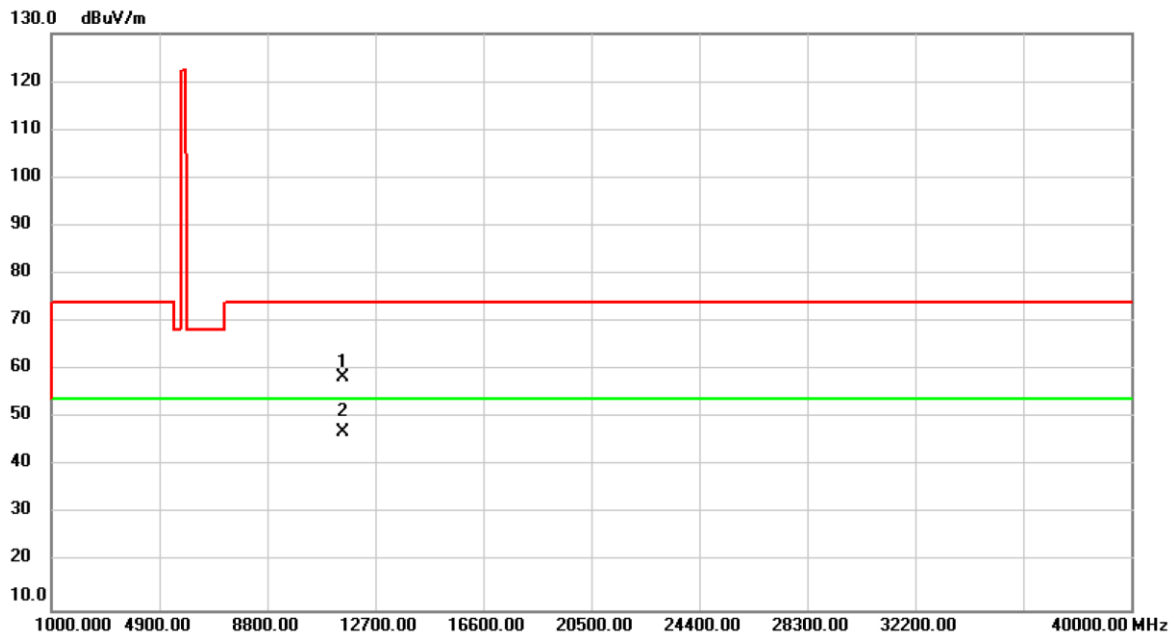


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	54.45	3.86	58.31	74.00	-15.69	peak	
2	*	11510.00	43.21	3.86	47.07	54.00	-6.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH151: 5755 MHz	Polarization	Horizontal

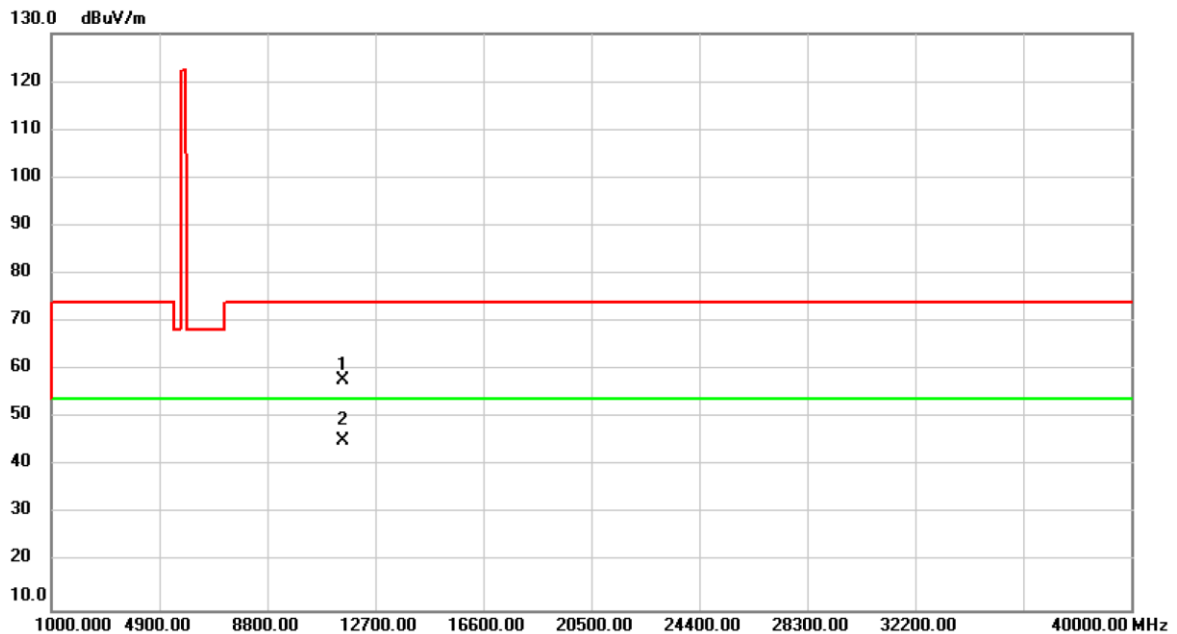


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	53.99	3.86	57.85	74.00	-16.15	peak	
2	*	11510.00	41.37	3.86	45.23	54.00	-8.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH159: 5795 MHz	Polarization	Vertical

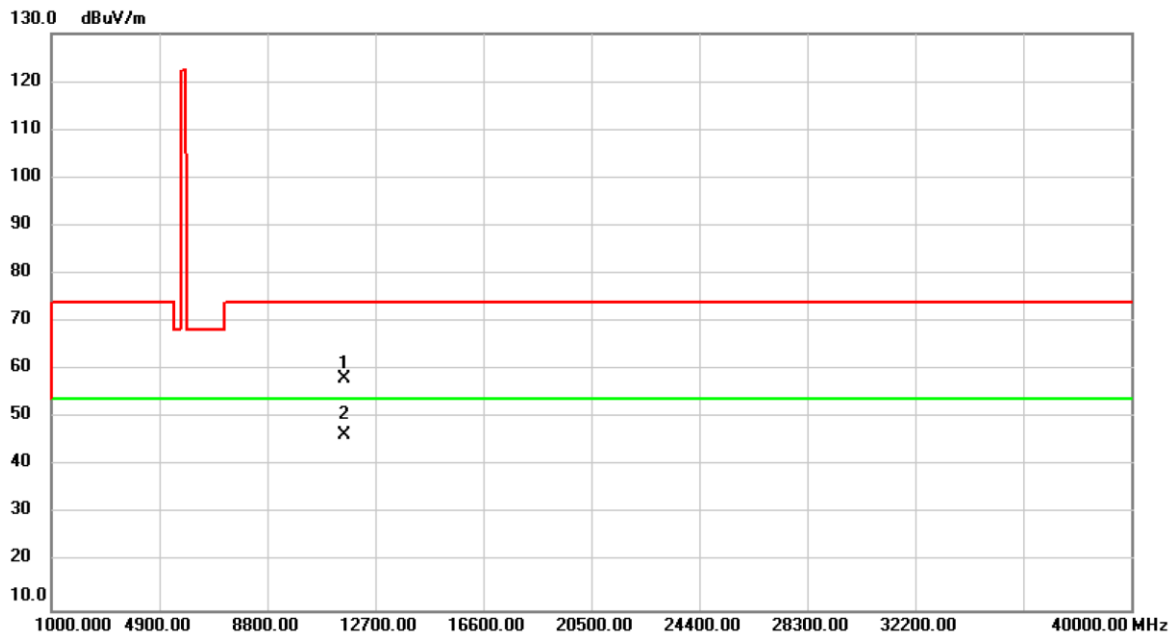


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.62	3.47	58.09	74.00	-15.91	peak	
2	*	11590.00	42.89	3.47	46.36	54.00	-7.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)_External Antenna	Test Date	2019/12/11
Test Frequency	CH159: 5795 MHz	Polarization	Horizontal

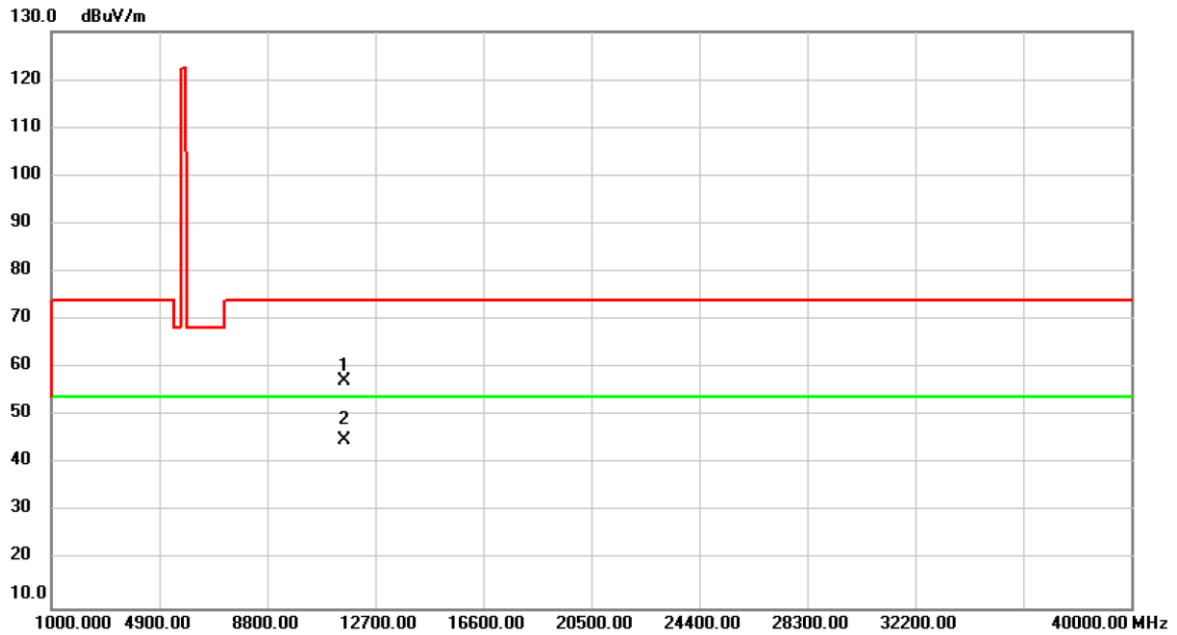


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	53.74	3.47	57.21	74.00	-16.79	peak	
2	*	11590.00	41.44	3.47	44.91	54.00	-9.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH42: 5210 MHz	Polarization	Vertical

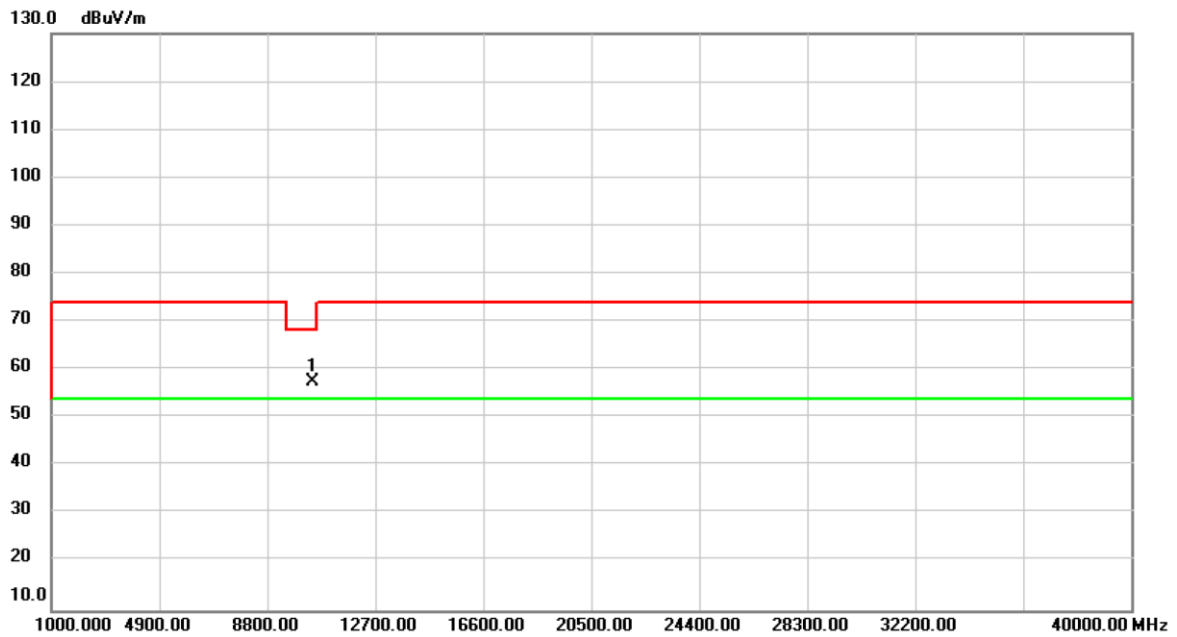


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	54.66	2.91	57.57	68.20	-10.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH42: 5210 MHz	Polarization	Horizontal

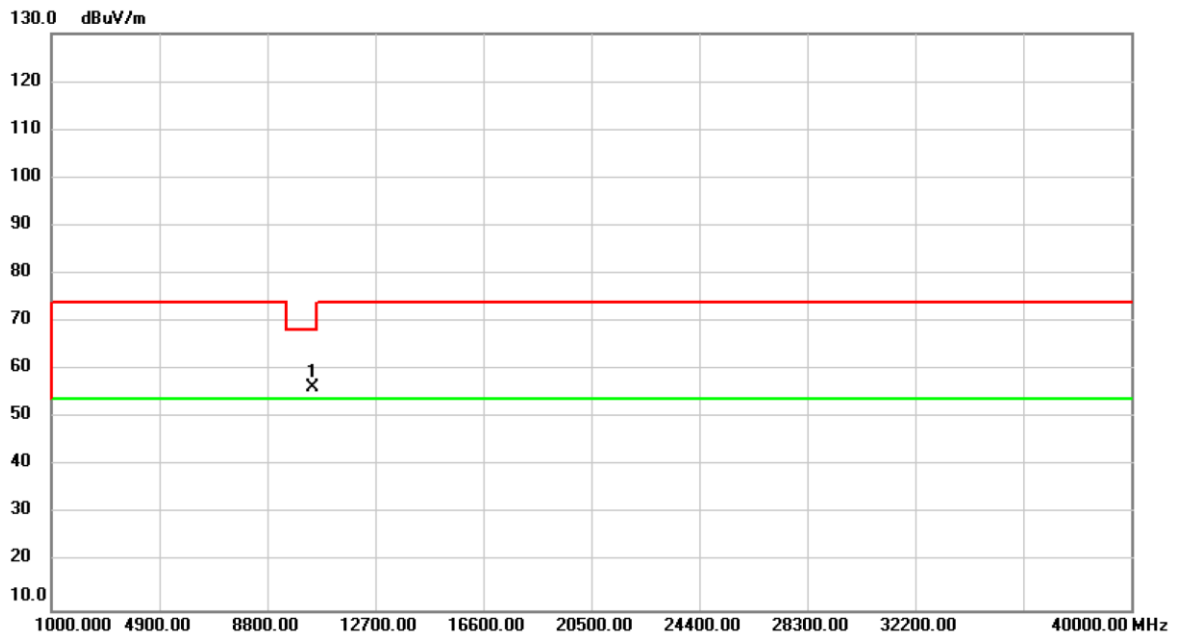


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	53.50	2.91	56.41	68.20	-11.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH155: 5775 MHz	Polarization	Vertical

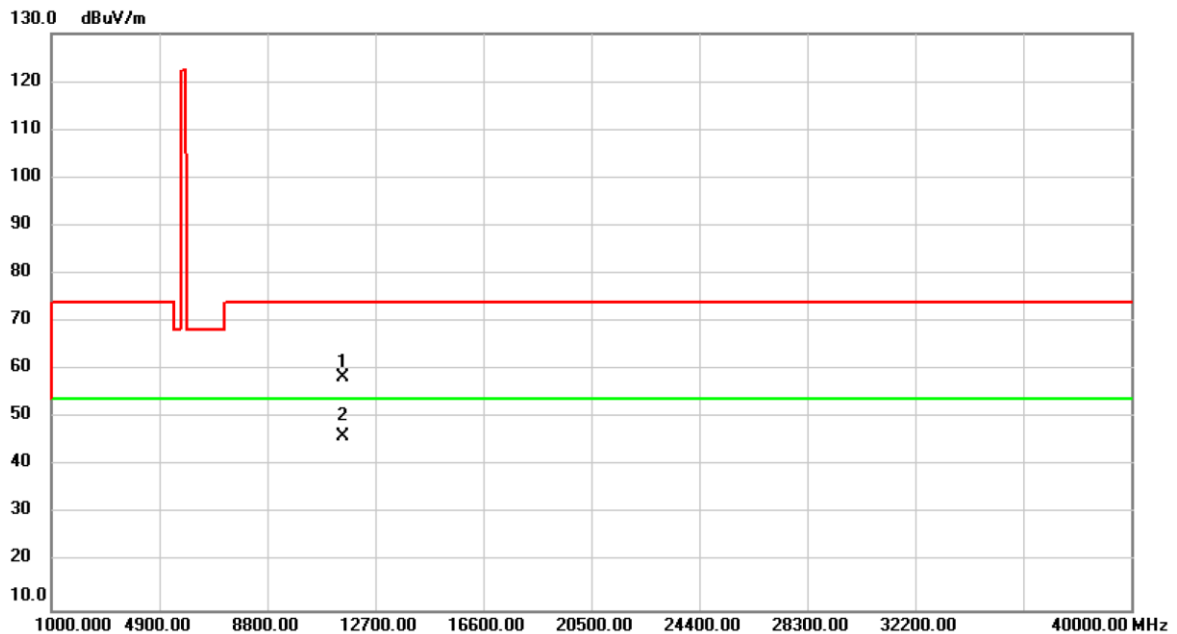


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	54.83	3.67	58.50	74.00	-15.50	peak	
2	*	11550.00	42.56	3.67	46.23	54.00	-7.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)_External Antenna	Test Date	2019/12/11
Test Frequency	CH155: 5775 MHz	Polarization	Horizontal

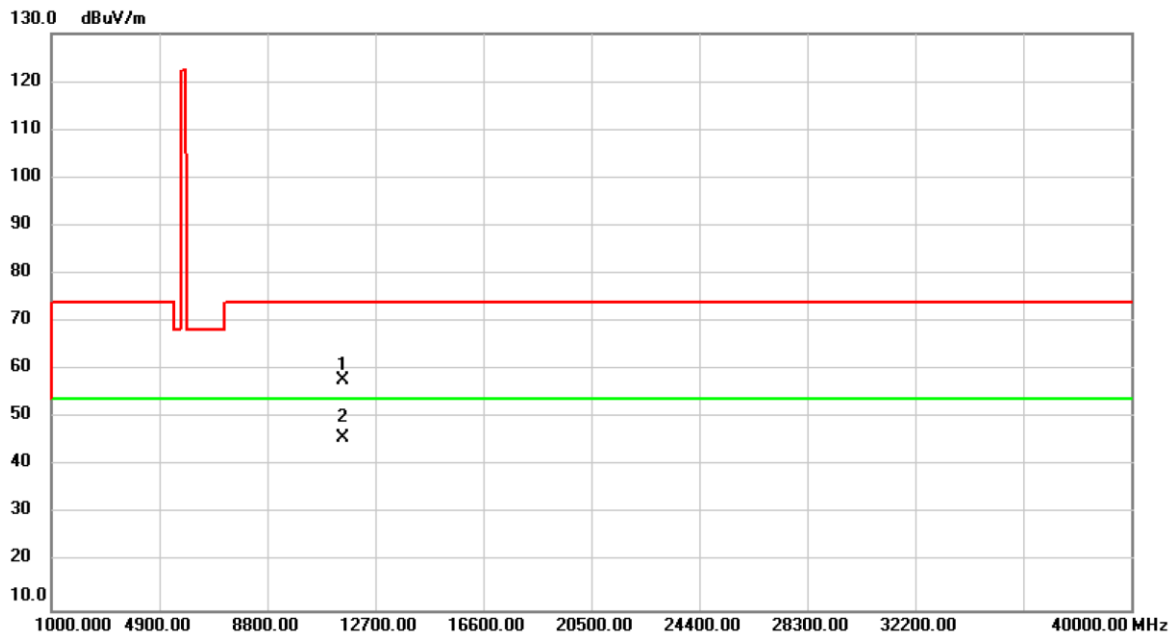


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	54.19	3.67	57.86	74.00	-16.14	peak	
2	*	11550.00	42.07	3.67	45.74	54.00	-8.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Vertical

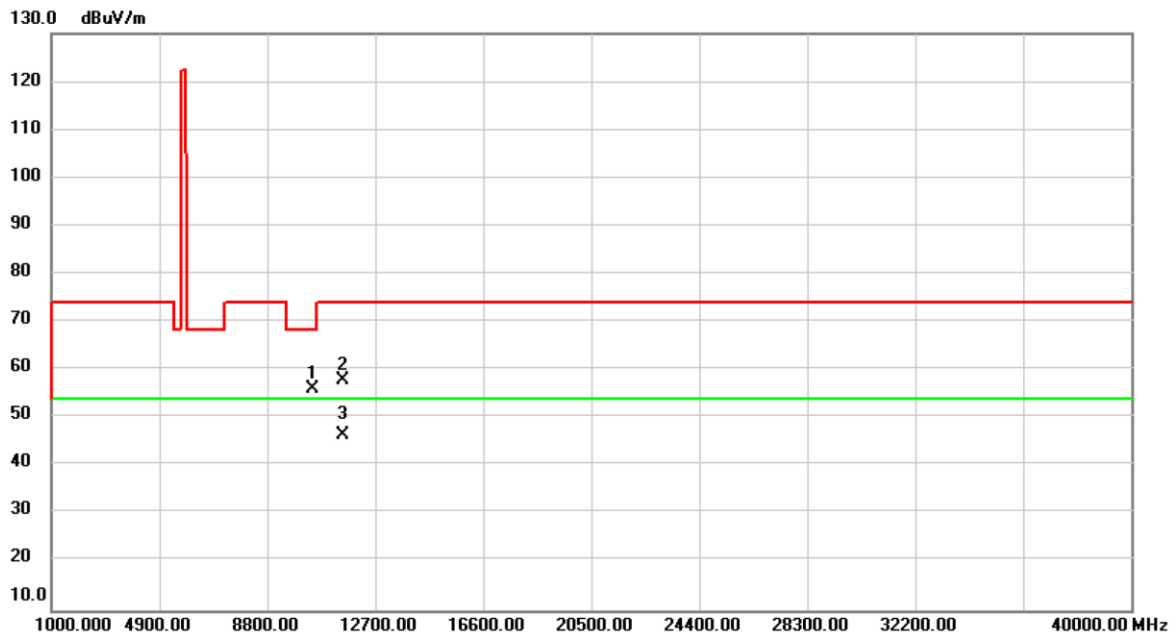


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	53.28	2.91	56.19	68.20	-12.01	peak	
2		11550.00	54.29	3.67	57.96	74.00	-16.04	peak	
3	*	11550.00	42.74	3.67	46.41	54.00	-7.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Horizontal

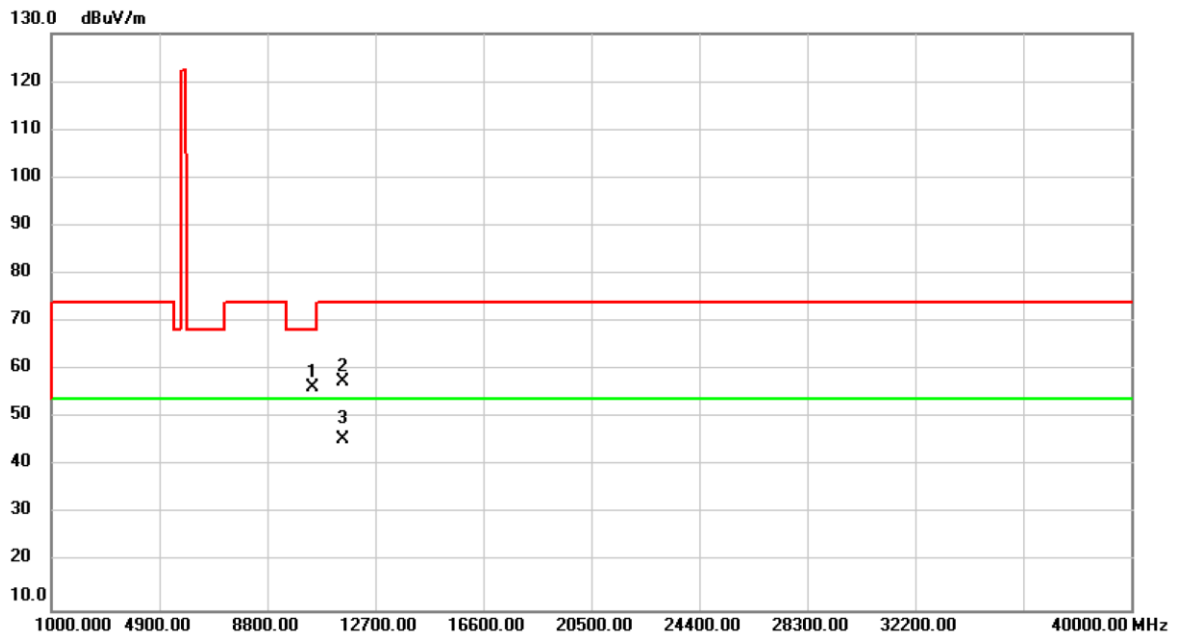


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	53.29	2.91	56.20	68.20	-12.00	peak	
2		11550.00	53.76	3.67	57.43	74.00	-16.57	peak	
3	*	11550.00	41.92	3.67	45.59	54.00	-8.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Vertical

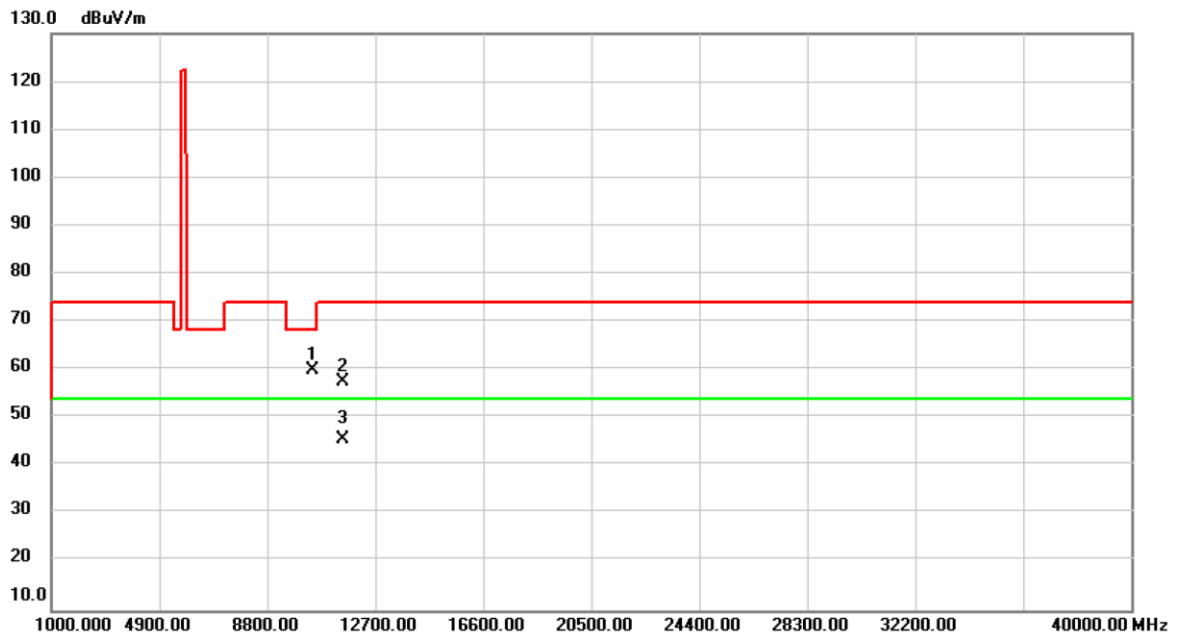


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	57.15	2.91	60.06	68.20	-8.14	peak	
2		11550.00	53.90	3.67	57.57	74.00	-16.43	peak	
3		11550.00	41.94	3.67	45.61	54.00	-8.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH155: 5775 MHz + CH42: 5210 MHz	Polarization	Horizontal

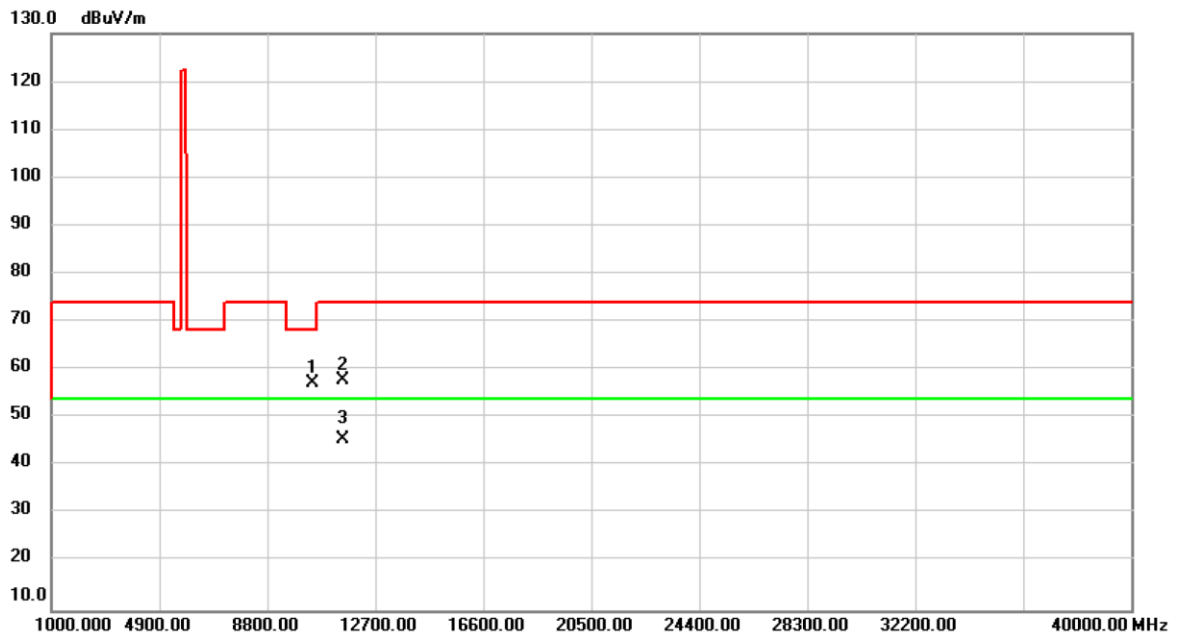


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	54.35	2.91	57.26	68.20	-10.94	peak	
2		11550.00	54.14	3.67	57.81	74.00	-16.19	peak	
3	*	11550.00	41.82	3.67	45.49	54.00	-8.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80+80)_External Antenna	Test Date	2019/12/30
Test Frequency	CH42: 5210 MHz + CH155: 5775 MHz	Polarization	Vertical

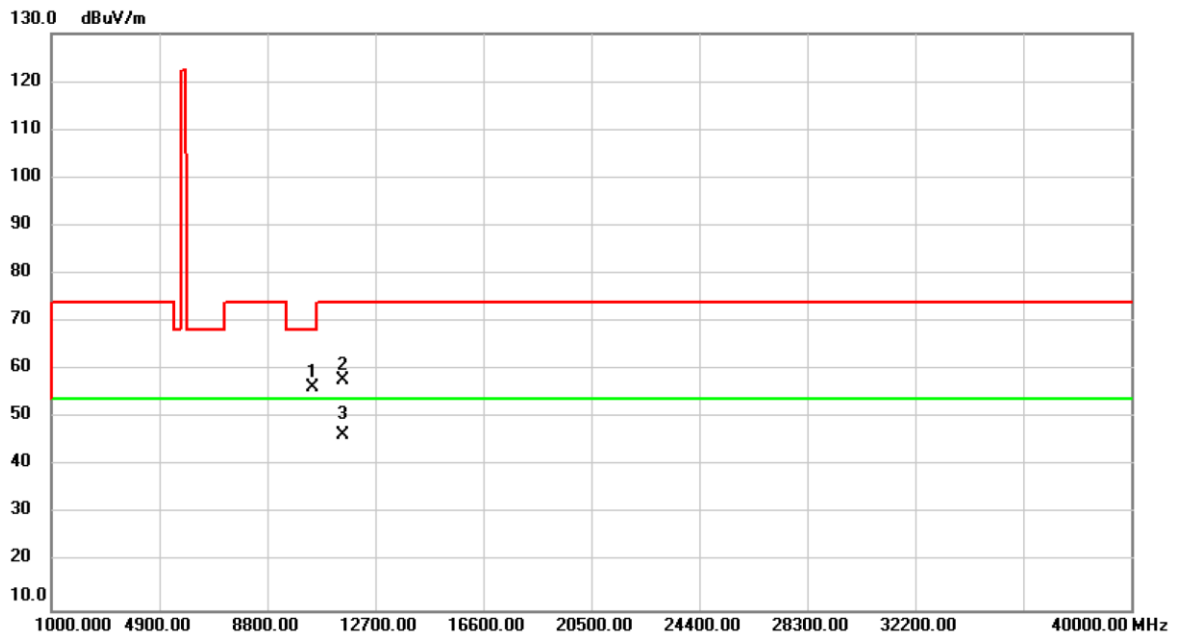

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	53.41	2.91	56.32	68.20	-11.88	peak	
2		11550.00	54.08	3.67	57.75	74.00	-16.25	peak	
3	*	11550.00	42.71	3.67	46.38	54.00	-7.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.