

DECLARATION OF COMPLIANCE FCC PART 24(E) EMC MEASUREMENTS

Test Lab

CELLTECH LABS INC.

1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

ITRONIX CORPORATION

801 South Stevens Street
Spokane, WA 99210-0179

Rule Part(s):	FCC 47 CFR §24(E), §2; IC RSS-133 Issue 2
Test Procedure(s):	FCC 47 CFR §24(E), §2; ANSI TIA/EIA-603-A-2001
FCC Device Classification:	PCS Licensed Transmitter (PCB)
IC Device Classification:	2GHz Personal Communication Services
Device Type:	Rugged Laptop PC with Sierra Wireless AirCard 750 PCS GSM/GPRS Modem (Co-located with Cisco Systems MPI-350 Mini-PCI DSSS WLAN Card & Bluetooth Transmitter Module)
FCC ID:	KBCIX260MPIA750BT
Model(s):	IX260
Tx Frequency Range:	1850.20 - 1909.80 MHz
Max. RF Output Power:	0.857 Watts EIRP (29.33 dBm)
Conducted Power Tested:	28.12 dBm (1850.20 MHz) 28.08 dBm (1880.00 MHz) 28.0 dBm (1909.80 MHz)
Modulation:	GMSK
Emission Designator:	271KGXW
Frequency Tolerance:	0.1 PPM
Antenna Type(s):	External Dipole (PCS GSM/GPRS Modem) Internal (Co-located DSSS WLAN Card) Internal (Co-located Bluetooth Transmitter)
Battery Type:	11.1V Lithium-Ion, 6.0Ah (Model: A2121-2)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §24(E), §2, and ANSI TIA/EIA-603-A-2001.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.



TABLE OF CONTENTS		
1.1	SCOPE	3
2.1	GENERAL INFORMATION - §2.1033(a)	3
MEASUREMENT PROCEDURES & DATA		
3.1	RF Output Power - §2.1046	4
4.1	Spurious Emissions at Antenna Terminal - §2.1051	4
5.1	Radiated Measurement Test Setup	4
6.1	Occupied Bandwidth - §2.1049, §24.238	5
7.1	Effective Isotropic Radiated Power Output - §24.232(b)	6
8.1	Field Strength of Spurious Radiation - §2.1053	7-11
9.1	Frequency Stability / Temperature Variation - §2.1055, §24.235	12
10.1	LIST OF TEST EQUIPMENT	13
11.1	CONCLUSION	14
APPENDIX A - TEST PLOTS		15
APPENDIX B - RADIATED TEST SETUP PHOTOGRAPHS		16

FCC PART 24(E) EMC MEASUREMENT REPORT

1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission and Industry Canada.

2.1 GENERAL INFORMATION - §2.1033(a)

FCC ID	KBCIX260MPIA750BT
Model(s)	IX260
Serial No.	Pre-production
EUT Type	Rugged Laptop PC with Sierra Wireless AirCard 750 PCS GSM/GPRS PCMCIA Modem Card (Co-located with Cisco MPI-350 Mini-PCI DSSS WLAN Card and Bluetooth Transmitter Module)
Rule Part(s)	FCC 47 CFR §24(E), §2; IC RSS-133 Issue 2
FCC Classification	PCS Licensed Transmitter (PCB)
IC Classification	2GHz Personal Communication Services
Test Procedure(s)	FCC 47 CFR §24(E), §2; ANSI TIA/EIA-603-A-2001
Tx Frequency Range	1850.20 - 1909.80 MHz
Modulation	GMSK
Max. RF Output Power	0.857 Watts EIRP (14.46 dBm)
RF Conducted Output Power Tested	28.12 dBm Peak (1850.20 MHz) 28.08 dBm Peak (1880.00 MHz) 28.0 dBm Peak (1909.80 MHz)
Emission Designator	271KGXW
Frequency Tolerance	0.1 PPM
Battery Type(s)	11.1V Lithium-Ion, 6.0Ah (Model: A2121-2)
Antenna Type(s)	External Dipole (Length: 4.3 inches) Dual Internal (Co-located DSSS WLAN Card & Co-located Bluetooth Transmitter)

3.1 RF OUTPUT POWER MEASUREMENT - §2.1046

The conducted power was measured with a Gigatronics 8650A Universal Power Meter in burst average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed before the sensor input. The transmitter terminal was coupled to the power meter and the EUT was placed into test mode via internal software. All subsequent tests were performed using the same tune-up procedures.

Frequency (MHz)	Conducted Power (dBm)
1850.20	28.12
1880.00	28.08
1909.80	28.0

4.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

The EUT was tested in GPRS mode via internal software at a full rated power with the EUT transmitting continuously on 4 time slots in GPRS mode via internal software. An offset was entered into the power meter to correct for all losses of the attenuator and cable installed before the sensor input. The EUT was placed into test mode via internal software. The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The resolution bandwidth and video bandwidth were set to 1MHz. The spectrum was scanned from 10MHz to 20GHz at the low, medium, and high channels. The radio transmitter was operating at maximum output power. The antenna output terminal of the EUT was connected to the input of a 50 Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The reported emissions were below the specified limit of -13dBm. The test plots are shown in Appendix A.

5.1 RADIATED MEASUREMENT TEST SETUP

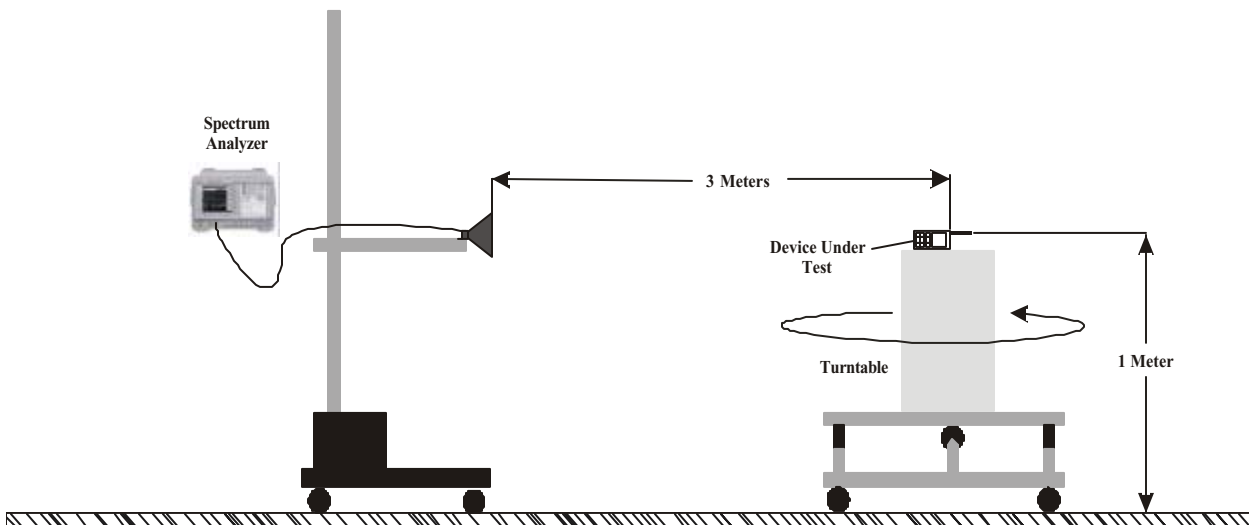


Figure 1. Radiated Measurement Test Setup Diagram

6.1 OCCUPIED BANDWIDTH - §2.1049, §24.238

The EUT was placed into test mode via internal software at a full rated power with the EUT transmitting continuously on 4 time slots in GPRS mode via internal software. The EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator. For PCS and GPRS mode the resolution bandwidth and video bandwidth were set to 3kHz. The EUT was operating at maximum output power. Data were taken for low, mid and high frequencies. The table below lists the -26dBc occupied bandwidths. Spectrum analyzer plots for 99% power and -26 dBc occupied bandwidths are shown in Appendix A.

Frequency	-26 dBc Bandwidth
1850.20 MHz	299
1880.00 MHz	301
1909.80 MHz	300

Specified Limits:

§24.238

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (e) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

7.1 EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b)

EIRP measurements were performed using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001 on a 3-meter open area test site. The EUT was tested with the EUT transmitting continuously on 4 time slots in GPRS mode via internal software at a full rated power. The EUT was placed on a turntable 3-meters from the receive antenna and placed into test mode via internal software at a full rated power. The field of maximum intensity was found by rotating the EUT 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once a peak was found the spectrum analyzer was set to peak hold and the value of the emission was extracted. The field strength was recorded for each channel being tested, and for both EUT antenna polarizations and modes. A standard gain horn antenna was substituted in place of the EUT. The antenna was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the signal to the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The feed point for the antenna was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the horn antenna. The conducted power at the antenna feed point was recorded. The forward conducted power for the horn antenna was then determined and the EIRP level was determined by adding the horn forward conducted power and the antenna gain in dB.

Modem Transmit Configuration	Freq. Tuned	EUT Conducted Power	Maximum Field Strength of EUT	Antenna Polariz.	Horn Gain	Horn Forward Conducted Power	EIRP of EUT Horn Gain + Horn Forward Conducted Power	
	MHz	dBm	dBm	H/V	dBi	dBm	dBm	Watts
AC750	1850.20	28.1	- 8.81	H	6.55	22.55	29.10	0.813
AC750	1880.00	28.1	- 9.07	H	6.58	22.75	29.33	0.857
AC750	1909.80	28.0	- 10.20	H	6.61	21.47	28.08	0.643

Notes:

1. EIRP measurements were performed for both horizontal and vertical antenna polarizations and the worst-case is reported.

8.1 FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053

Radiated and harmonic emissions were measured on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-A-2001. The EUT was tested with the EUT transmitting continuously on 4 time slots in GPRS mode via internal software at a full rated power.

For the simultaneous transmit tests with the co-located WLAN card the WLAN was set to maximum conducted power (21.2 dBm) at the low channel (2412 MHz), with a modulated DSSS signal, using the right side internal antenna (the WLAN EIRP measurement results showed the low channel as the maximum EIRP – please refer to EIRP measurement data in the Part 15.247 test report for the Cisco MPI-350 Mini-PCI DSSS WLAN Card submitted simultaneously with this application).

For the simultaneous transmit tests with the tri-located WLAN card & Bluetooth transmitter module The co-located Bluetooth module was set to the maximum conducted power level (14.46 dBm) at the low channel (2402 MHz) with a modulated signal for the simultaneous transmit tests, based on the maximum EIRP measured for the Bluetooth Module recorded at the low channel (Left side internal antenna). Please refer to the EIRP measurement data in the Part 15.247 test report for the Bluetooth submitted simultaneously with this application.

The EUT was placed on the turntable with the transmitter transmitting into a non-radiating load. A receiving antenna located 3 meters from the turntable received any signal radiated from the transmitter and its operating accessories. The receiving antenna was varied in height from 1 to 4 meters and the polarization was varied (horizontal and vertical) to determine the worst-case emission level. A standard gain horn antenna was substituted in place of the EUT. A modulated signal was fed through a directional coupler to the antenna and the power at the coupler port was monitored. A signal generator and power amplifier controlled the antenna, and the input level of the antenna was adjusted to the same field strength level as the EUT. The antenna feed point was then connected to a calibrated power meter and the power was adjusted to read the same power at the coupler port previously recorded, to account for any mismatch in impedance which may occur at the horn antenna. The conducted power at the antenna feed point was then recorded. The forward conducted power for the horn antenna was determined by measuring the power at the horn antenna feed point and reproducing the coupler power previously measured. The EIRP level was determined by adding the horn forward conducted power and the horn antenna gain. All spurious emissions from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier were investigated.

Operating Frequency (MHz): 1850.20
Channel: 512 (Low)
EUT Conducted Pwr. (dBm): 28.12
Measured EIRP (dBm): 29.1
Modulation: GMSK (Single Transmit)
Distance: 3 Meters
Limit: $43 + 10 \log (W) = 42.10 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBd	H/V	dBm	dBm	
3700.40	-74.95	-42.06	6.6	H	-35.46	-37.60	66.70
5550.60	-76.37	-38.57	7.8	H	-30.77	-32.91	62.01
7400.80	-73.52	-36.94	7.8	H	-29.14	-31.28	60.38
9251.00	-73.44	-35.42	7.6	H	-27.82	-29.96	59.06
11101.20	-74.24	-37.88	8.5	H	-29.38	-31.52	60.62
12951.40	-73.41	-35.53	8.8	H	-26.73	-28.87	57.97
14801.60	-70.49	-32.61	9.6	H	-23.01	-25.15	54.25
16651.80	-70.90	-33.07	9.0	H	-24.07	-26.21	55.31
18502.00	-71.92	-35.71	9.3	H	-26.41	-28.55	57.65

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 1880.00
 Channel: 661 (Mid)
 EUT Conducted Pwr. (dBm): 28.08
 Measured EIRP (dBm): 29.33
 Modulation: GMSK (Single Transmit)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 42.33 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3760.00	-75.92	-43.03	6.6	H	-36.43	-38.57	67.90
5640.00	-76.39	-38.59	7.8	H	-30.79	-32.93	62.26
7520.00	-73.82	-37.24	7.8	H	-29.44	-31.58	60.91
9400.00	-74.23	-36.21	7.6	H	-28.61	-30.75	60.08
11280.00	-74.63	-38.27	8.5	H	-29.77	-31.91	61.24
13160.00	-74.27	-36.39	8.8	H	-27.59	-29.73	59.06
15040.00	-70.40	-32.52	9.6	H	-22.92	-25.06	54.39
16920.00	-71.24	-33.41	9.0	H	-24.41	-26.55	55.88
18800.00	-71.49	-35.28	9.3	H	-25.98	-28.12	57.45

Operating Frequency (MHz): 1909.8
 Channel: 810 (High)
 EUT Conducted Pwr. (dBm): 27.99
 Measured EIRP (dBm): 28.08
 Modulation: GMSK (Single Transmit)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 41.08 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3819.60	-75.35	-42.46	6.6	H	-35.86	-38.00	66.08
5729.40	-76.19	-38.39	7.8	H	-30.59	-32.73	60.81
7639.20	-74.29	-37.71	7.8	H	-29.91	-32.05	60.13
9549.00	-73.86	-35.84	7.6	H	-28.24	-30.38	58.46
11458.80	-74.41	-38.05	8.5	H	-29.55	-31.69	59.77
13368.60	-73.39	-35.51	8.8	H	-26.71	-28.85	56.93
15278.40	-70.96	-33.08	9.6	H	-23.48	-25.62	53.70
17188.20	-71.11	-33.28	9.0	H	-24.28	-26.42	54.50
19098.00	-72.11	-35.90	9.3	H	-26.60	-28.74	56.82

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 1850.20
 Channel: 512 (Low)
 EUT Conducted Pwr. (dBm): 28.11
 Measured EIRP (dBm): 28.44
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 41.44 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3700.40	-75.89	-43.00	6.6	H	-36.40	-38.54	66.98
5550.60	-76.43	-38.63	7.8	H	-30.83	-32.97	61.41
7400.80	-73.80	-37.22	7.8	H	-29.42	-31.56	60.00
9251.00	-74.50	-36.48	7.6	H	-28.88	-31.02	59.46
11101.20	-73.15	-36.79	8.5	H	-28.29	-30.43	58.87
12951.40	-73.81	-35.93	8.8	H	-27.13	-29.27	57.71
14801.60	-70.97	-33.09	9.6	H	-23.49	-25.63	54.07
16651.80	-71.36	-33.53	9.0	H	-24.53	-26.67	55.11
18502.00	-71.44	-35.23	9.3	H	-25.93	-28.07	56.51

Operating Frequency (MHz): 1880.00
 Channel: 661 (Mid)
 EUT Conducted Pwr. (dBm): 28.08
 Measured EIRP (dBm): 28.33
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 41.33 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3760.00	-75.51	-42.62	6.6	H	-36.02	-38.16	66.49
5640.00	-75.52	-37.72	7.8	H	-29.92	-32.06	60.39
7520.00	-73.84	-37.26	7.8	H	-29.46	-31.60	59.93
9400.00	-74.89	-36.87	7.6	H	-29.27	-31.41	59.74
11280.00	-74.24	-37.88	8.5	H	-29.38	-31.52	59.85
13160.00	-73.37	-35.49	8.8	H	-26.69	-28.83	57.16
15040.00	-68.70	-30.82	9.6	H	-21.22	-23.36	51.69
16920.00	-69.62	-31.79	9.0	H	-22.79	-24.93	53.26
18800.00	-70.82	-34.61	9.3	H	-25.31	-27.45	55.78

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 1909.8
 Channel: 810 (High)
 EUT Conducted Pwr. (dBm): 27.98
 Measured EIRP (dBm): 28.42
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 41.42 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dB	H/V	dBm	dBm	
3819.60	-76.07	-43.18	6.6	H	-36.58	-38.72	67.14
5729.40	-74.87	-37.07	7.8	H	-29.27	-31.41	59.83
7639.20	-74.20	-37.62	7.8	H	-29.82	-31.96	60.38
9549.00	-73.37	-35.35	7.6	H	-27.75	-29.89	58.31
11458.80	-73.54	-37.18	8.5	H	-28.68	-30.82	59.24
13368.60	-70.28	-32.40	8.8	H	-23.60	-25.74	54.16
15278.40	-71.40	-33.52	9.6	H	-23.92	-26.06	54.48
17188.20	-72.11	-34.28	9.0	H	-25.28	-27.42	55.84
19098.00	-72.04	-35.83	9.3	H	-26.53	-28.67	57.09

Operating Frequency (MHz): 1850.20
 Channel: 512 (Low)
 EUT Conducted Pwr. (dBm): 28.12
 Measured EIRP (dBm): 27.4
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card and Bluetooth Transmitter)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 40.40 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dB	H/V	dBm	dBm	
3700.40	-76.56	-43.67	6.6	H	-37.07	-39.21	66.61
5550.60	-75.89	-38.09	7.8	H	-30.29	-32.43	59.83
7400.80	-73.90	-37.32	7.8	H	-29.52	-31.66	59.06
9251.00	-74.44	-36.42	7.6	H	-28.82	-30.96	58.36
11101.20	-73.65	-37.29	8.5	H	-28.79	-30.93	58.33
12951.40	-73.80	-35.92	8.8	H	-27.12	-29.26	56.66
14801.60	-71.40	-33.52	9.6	H	-23.92	-26.06	53.46
16651.80	-72.16	-34.33	9.0	H	-25.33	-27.47	54.87
18502.00	-71.46	-35.25	9.3	H	-25.95	-28.09	55.49

FIELD STRENGTH OF SPURIOUS RADIATION - §2.1053 (Cont.)

Operating Frequency (MHz): 1880.0
 Channel: 661 (Mid)
 EUT Conducted Pwr. (dBm): 28.09
 Measured EIRP (dBm): 27.8
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card and Bluetooth Transmitter)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 40.80 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3760.00	-76.95	-44.06	6.6	H	-37.46	-39.60	67.40
5640.00	-74.88	-37.08	7.8	H	-29.28	-31.42	59.22
7520.00	-74.03	-37.45	7.8	H	-29.65	-31.79	59.59
9400.00	-74.93	-36.91	7.6	H	-29.31	-31.45	59.25
11280.00	-74.83	-38.47	8.5	H	-29.97	-32.11	59.91
13160.00	-74.04	-36.16	8.8	H	-27.36	-29.50	57.30
15040.00	-71.10	-33.22	9.6	H	-23.62	-25.76	53.56
16920.00	-71.38	-33.55	9.0	H	-24.55	-26.69	54.49
18800.00	-70.48	-34.27	9.3	H	-24.97	-27.11	54.91

Operating Frequency (MHz): 1909.8
 Channel: 810 (High)
 EUT Conducted Pwr. (dBm): 27.99
 Measured EIRP (dBm): 28.39
 Modulation: GMSK (Simultaneous Transmit with co-located DSSS WLAN Card and Bluetooth Transmitter)
 Distance: 3 Meters
 Limit: $43 + 10 \log (W) = 41.39 \text{ dBc}$

Frequency	Field Strength of Spurious Radiation	Horn Forward Cond. Pwr.	Standard Gain Horn Antenna Gain	POL	EIRP	ERP	dBc
MHz	dBm	dBm	dBi	H/V	dBm	dBm	
3819.60	-76.28	-43.39	6.6	H	-36.79	-38.93	67.32
5729.40	-75.11	-37.31	7.8	H	-29.51	-31.65	60.04
7639.20	-73.70	-37.12	7.8	H	-29.32	-31.46	59.85
9549.00	-74.93	-36.91	7.6	H	-29.31	-31.45	59.84
11458.80	-74.59	-38.23	8.5	H	-29.73	-31.87	60.26
13368.60	-69.20	-31.32	8.8	H	-22.52	-24.66	53.05
15278.40	-72.06	-34.18	9.6	H	-24.58	-26.72	55.11
17188.20	-71.80	-33.97	9.0	H	-24.97	-27.11	55.50
19098.00	-71.24	-35.03	9.3	H	-25.73	-27.87	56.26

9.1 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235


The minimum frequency stability shall be $\pm 150\text{Hz}$ referenced to a received carrier frequency. This meets the requirement for operational accuracy of 0.00005% for digital mode. An HP 53181A Frequency Counter was used to measure the error in the fundamental frequency. The transmitter was set to maximum power at the center frequency of the band. The EUT was tested inside the temperature chamber.

The frequency stability of the transmitter was measured by:

1. **Temperature:** The temperature was varied from -30°C to $+60^{\circ}\text{C}$ at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to each frequency measurement.
2. **Primary Supply Voltage:** The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

Carrier Frequency (GHz): 1.88
Channel: 661
Mode: GPRS
Deviation Limit (PPM): 0.1

Temperature (C)	Voltage (%)	Power (WDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	5.5	-33.98	-0.018	0.1	-0.1
-30	100	5.5	-60.67	-0.032	0.1	-0.1
-20	100	5.5	-41.13	-0.022	0.1	-0.1
-10	100	5.5	-37.65	-0.020	0.1	-0.1
0	100	5.5	-20.88	-0.011	0.1	-0.1
+10	100	5.5	-18.19	-0.010	0.1	-0.1
+20	100	5.5	-33.98	-0.018	0.1	-0.1
+30	100	5.5	-12.26	-0.007	0.1	-0.1
+40	100	5.5	-7.71	-0.004	0.1	-0.1
+50	100	5.5	-23.54	-0.013	0.1	-0.1
+60	100	5.5	-28.12	-0.015	0.1	-0.1
+20	Endpoint	3.1	-18.83	-0.010	0.1	-0.1

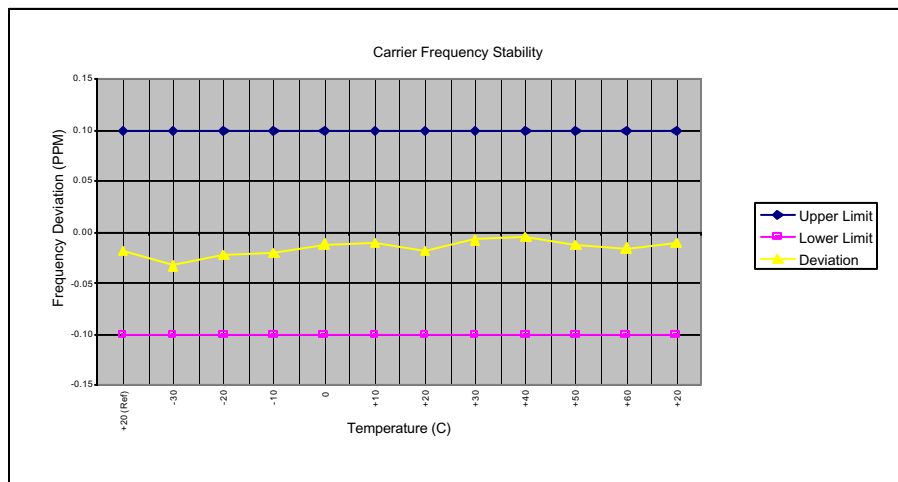

Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C , the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to $+60^{\circ}\text{C}$, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

10.1 TEST EQUIPMENT LIST

TEST EQUIPMENT LIST			
Equipment Type	Model	Serial No.	Calibration Due Date
HP Signal Generator	8648D (9kHz-4.0GHz)	3847A00611	Feb 2004
Rohde & Schwarz Signal Generator	SMR40 (10MHz-40GHz)	835537/022	Nov 2003
Gigatronics Power Meter	8652A	1835272	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833535	Feb 2004
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833542	Feb 2004
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	26235	N/A
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	3123A00587	N/A
Network Analyzer	HP 8753E (30kHz-3GHz)	US38433013	Feb 2004
Frequency Counter	HP 53181A (3GHz)	3736A05175	May 2004
DC Power Supply	HP E3611A	KR83015294	N/A
Multi-Device Controller	EMCO 2090	9912-1484	N/A
Mini Mast	EMCO 2075	0001-2277	N/A
Turntable	EMCO 2080-1.2/1.5	0002-1002	N/A
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6267	Oct 2003
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6276	Oct 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-239	Sept 2003
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	9120A-240	Sept 2003
Roberts Dipoles	Compliance Design (2 sets) 3121C		June 2004
Spectrum Analyzer	HP 8594E	3543A02721	Feb 2004
Spectrum Analyzer	HP E4408B	US39240170	Nov 2003
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	16297	N/A
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	0510154-B	Feb 2004

11.1 CONCLUSION

The data in this measurement report shows that the ITRONIX CORPORATION Model: IX260 FCC ID: KBCIX260MPIA750BT Rugged Laptop PC with Sierra Wireless AirCard 750 PCS GSM/GPRS PCMCIA Modem Card (Co-located with Cisco Systems MPI-350 Mini-PCI DSSS WLAN Card & Bluetooth Transmitter Module) complies with the requirements of FCC Rule Parts §24(E) and §2.

APPENDIX A - TEST PLOTS



10:31:45 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK A LOWER EDGE

Mkr1 1.849985 GHz


Ref 28.1 dBm

Atten 10 dB

-17.9 dBm

Peak
Log
10
dB/
Offset
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

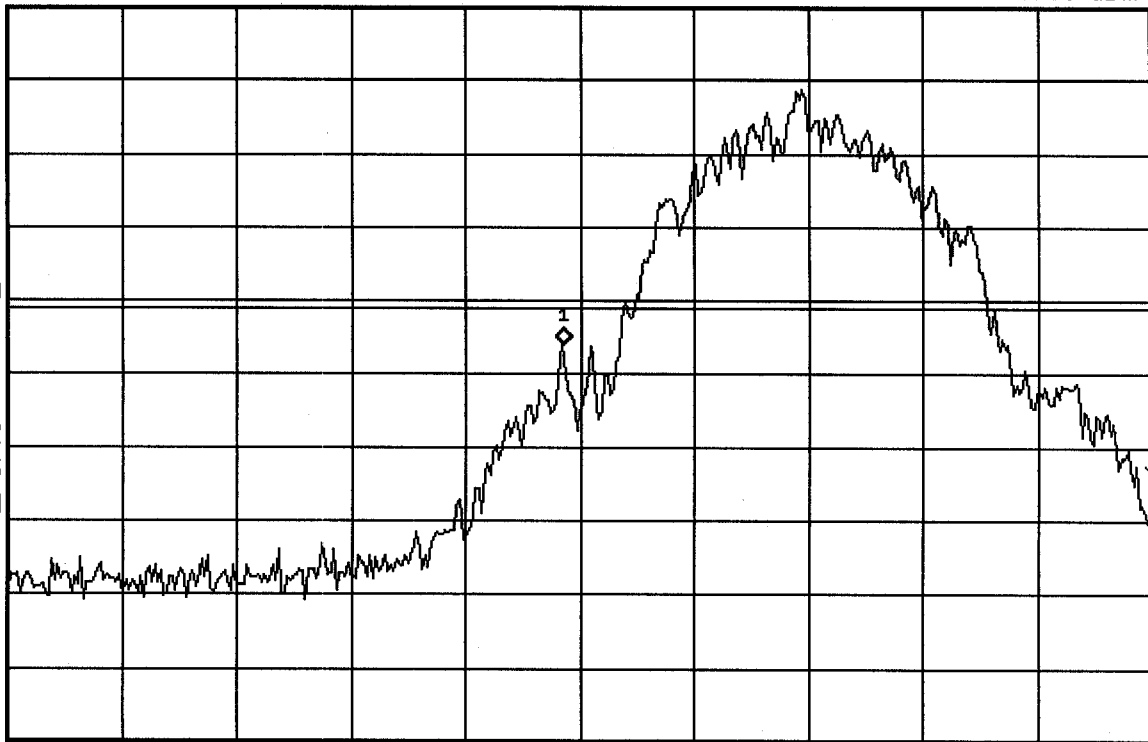

Center 1.85 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



10:52:01 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK A UPPER EDGE

Mkr1 1.864990 GHz


Ref 28.1 dBm

Atten 10 dB

-21.53 dBm

Peak
Log
10
dB/
Offset
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

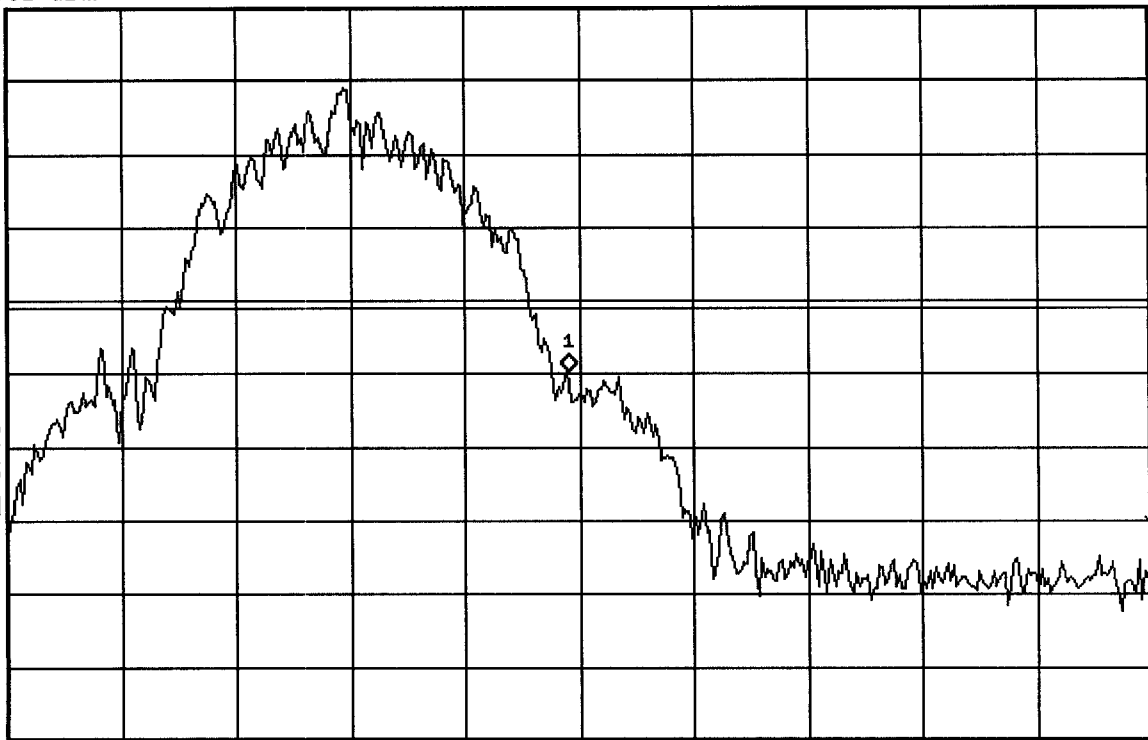

Center 1.865 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:04:15 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK B LOWER EDGE

Ref 28.1 dBm


Atten 10 dB

Mkr1 1.870010 GHz

-18.16 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

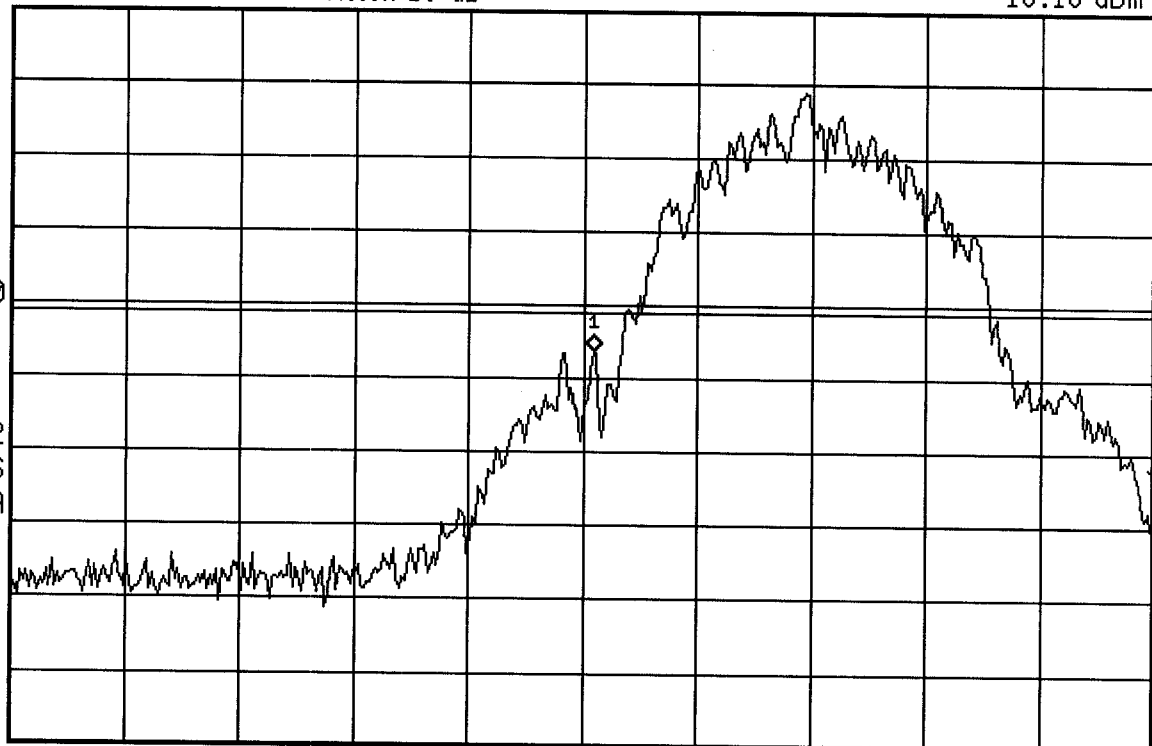

Center 1.87 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:11:55 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK B UPPER EDGE

Ref 28.1 dBm


Atten 10 dB

Mkr1 1.884990 GHz

-21.48 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

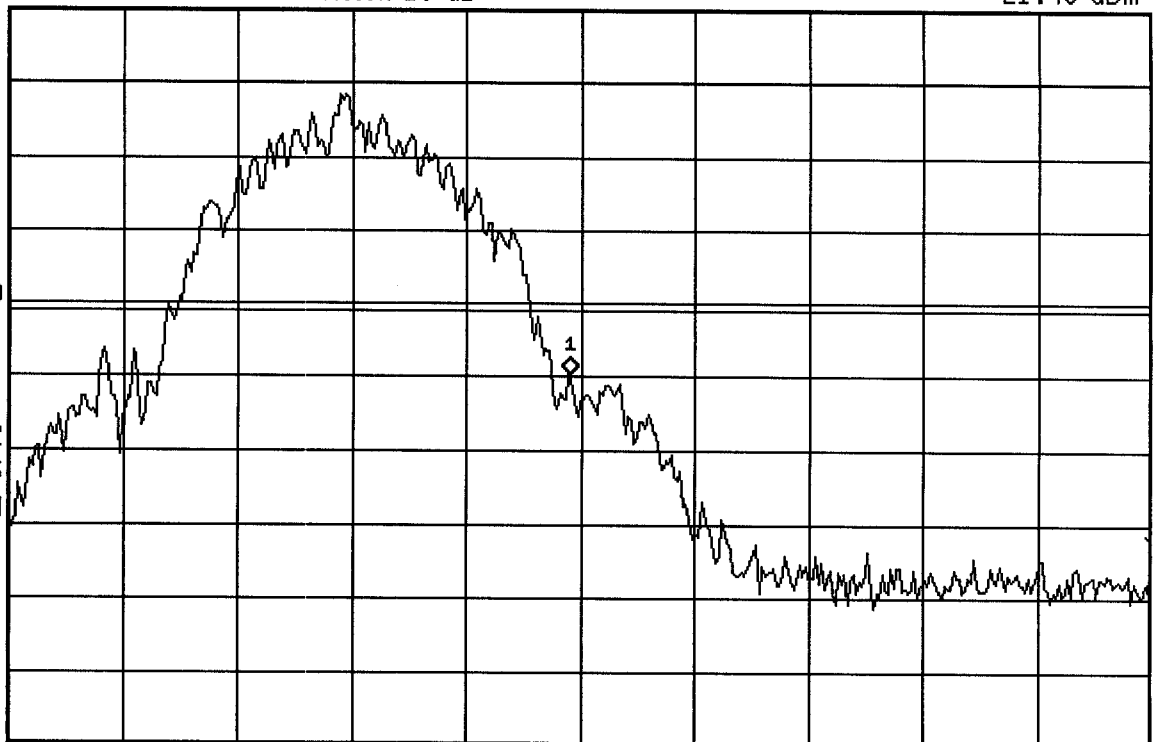

Center 1.885 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:23:51 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK C LOWER EDGE

Mkr1 1.895010 GHz


Ref 28 dBm

Atten 10 dB

-17.88 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

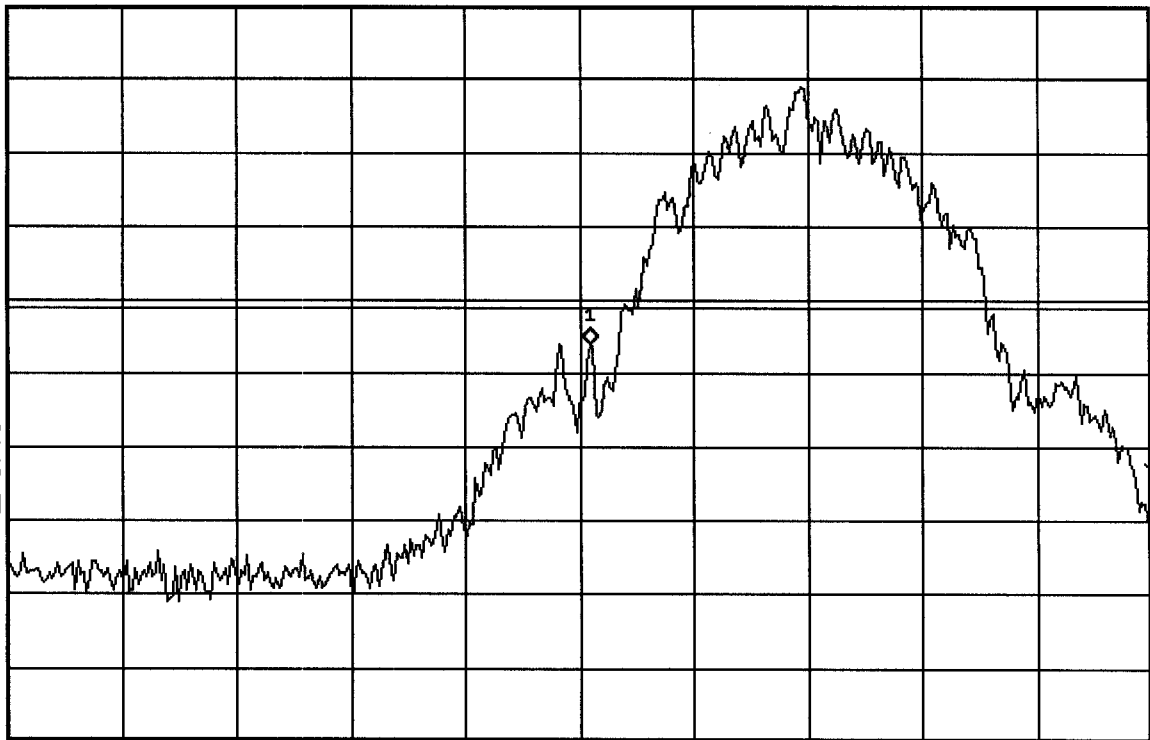

Center 1.895 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:46:05 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK C UPPER EDGE

Mkr1 1.909990 GHz

Ref 28 dBm

Atten 10 dB

-21.06 dBm

Peak

Log

10

dB/

Offset

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

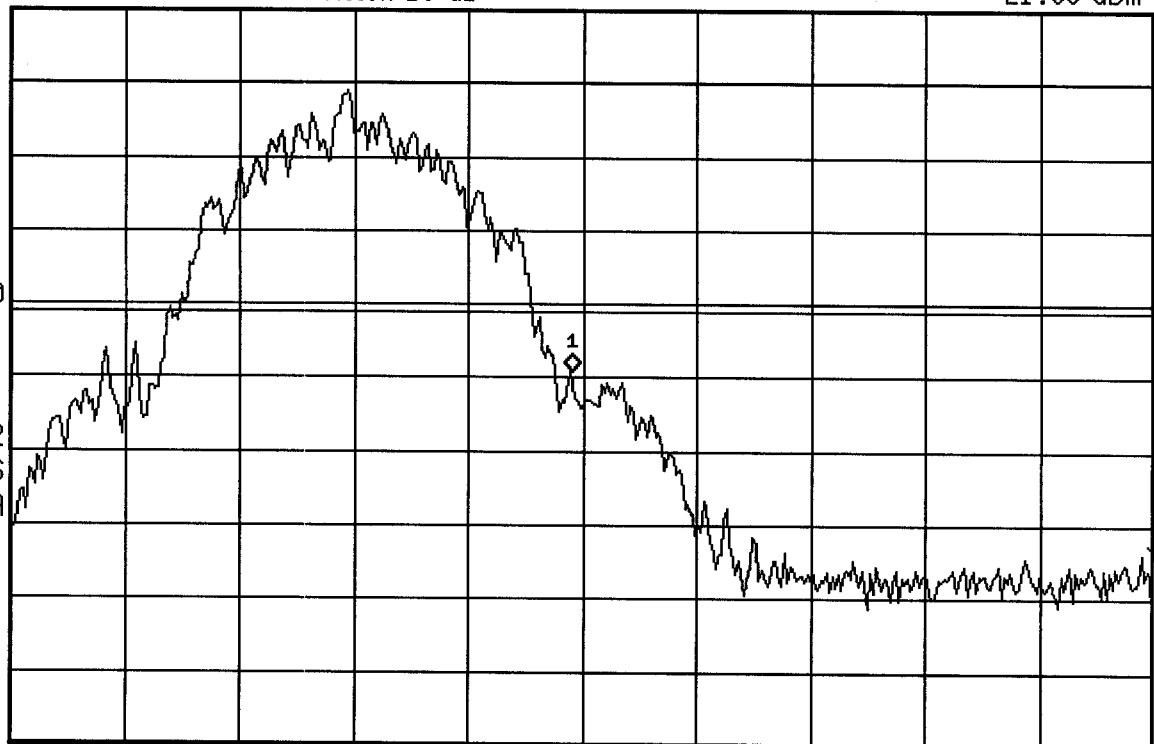

Center 1.91 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:52:52 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK D LOWER EDGE

Mkr1 1.864985 GHz

Ref 28.1 dBm

Atten 10 dB

-17.89 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

W1 S2

S3 FS

AA

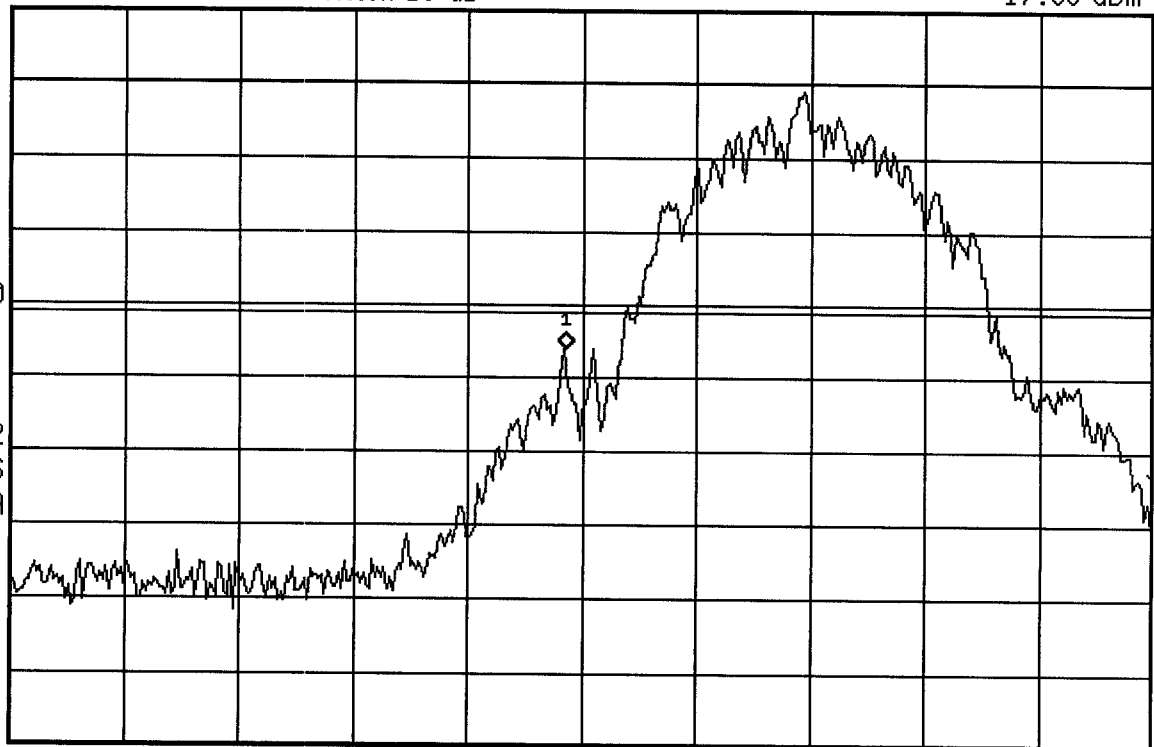

Center 1.865 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



11:59:29 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK D UPPER EDGE

Ref 28.1 dBm


Atten 10 dB

Mkr1 1.869990 GHz

-21.67 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

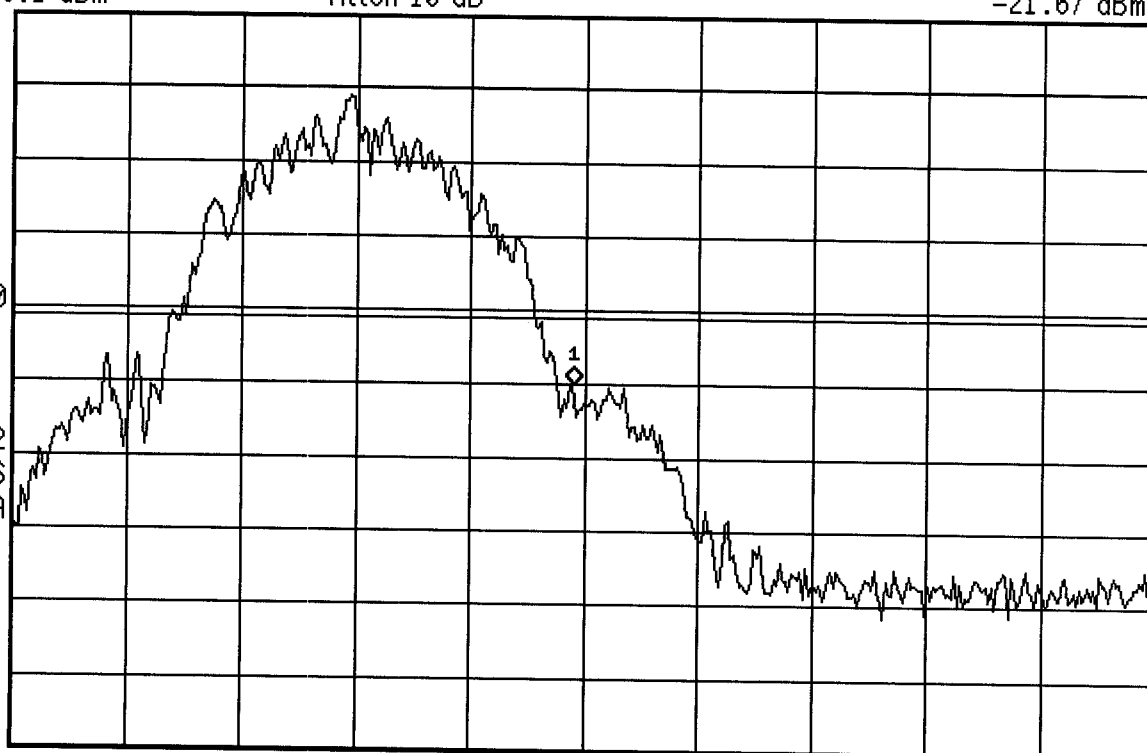

Center 1.87 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



12:06:21 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK E LOWER EDGE

Mkr1 1.884985 GHz


Ref 28.1 dBm

Atten 10 dB

-18 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

W1 S2
S3 FS
AA

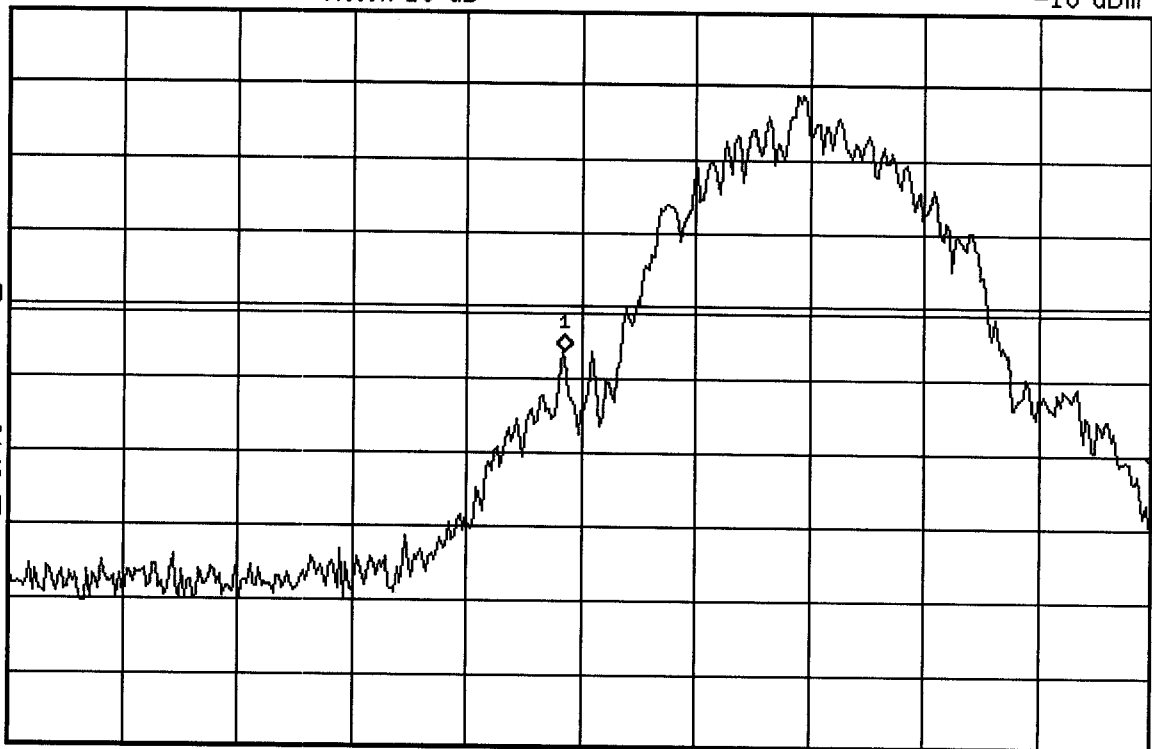

Center 1.885 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



12:16:08 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK E UPPER EDGE

Mkr1 1.889990 GHz

Ref 28 dBm

Atten 10 dB

-21.54 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm


W1

S2

S3

FS

AA

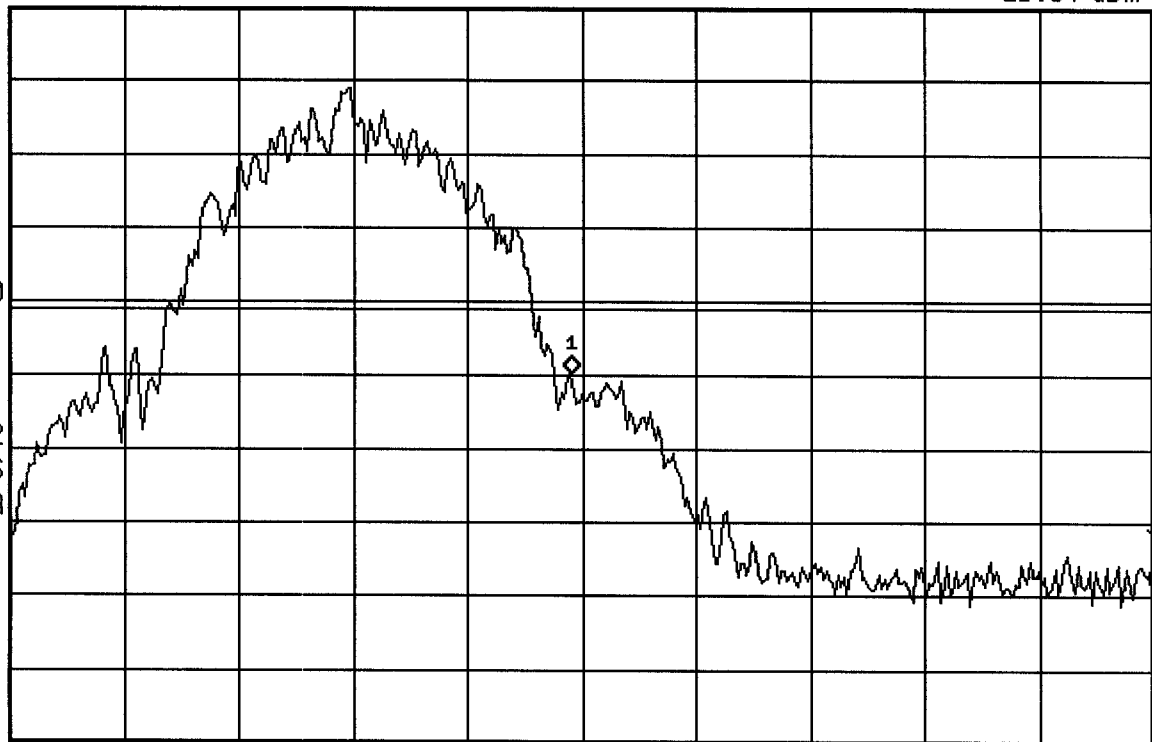

Center 1.89 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s

12:22:30 Jul 16, 2003

ITRONIX KBCIX260MPIA750BT BLOCK F LOWER EDGE

Ref 28 dBm

Atten 10 dB

Mkr1 1.889985 GHz
-18.01 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

W1 S2

S3 FS

AA


Center 1.89 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s

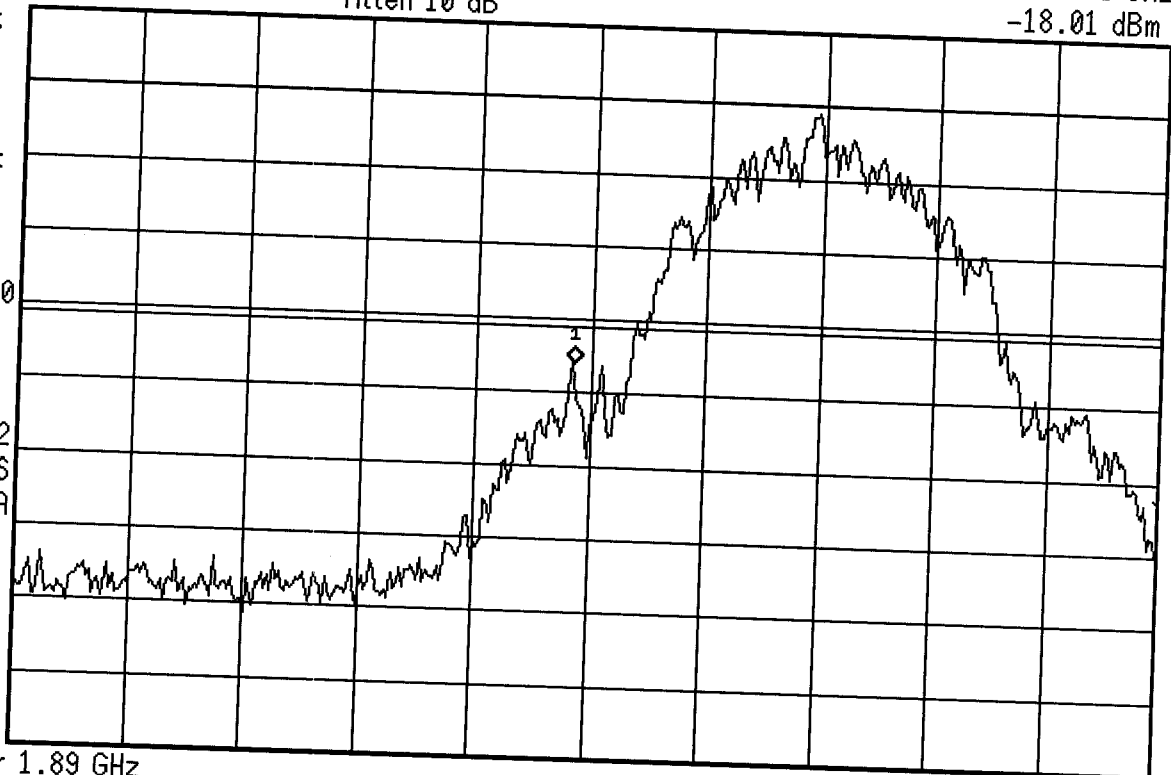

hp 12:29:32 Jul 16, 2003


ITRONIX KBCIX260MPIA750BT BLOCK F UPPER EDGE

Ref 28 dBm

Atten 10 dB

Mkr1 1.894990 GHz

-21.22 dBm

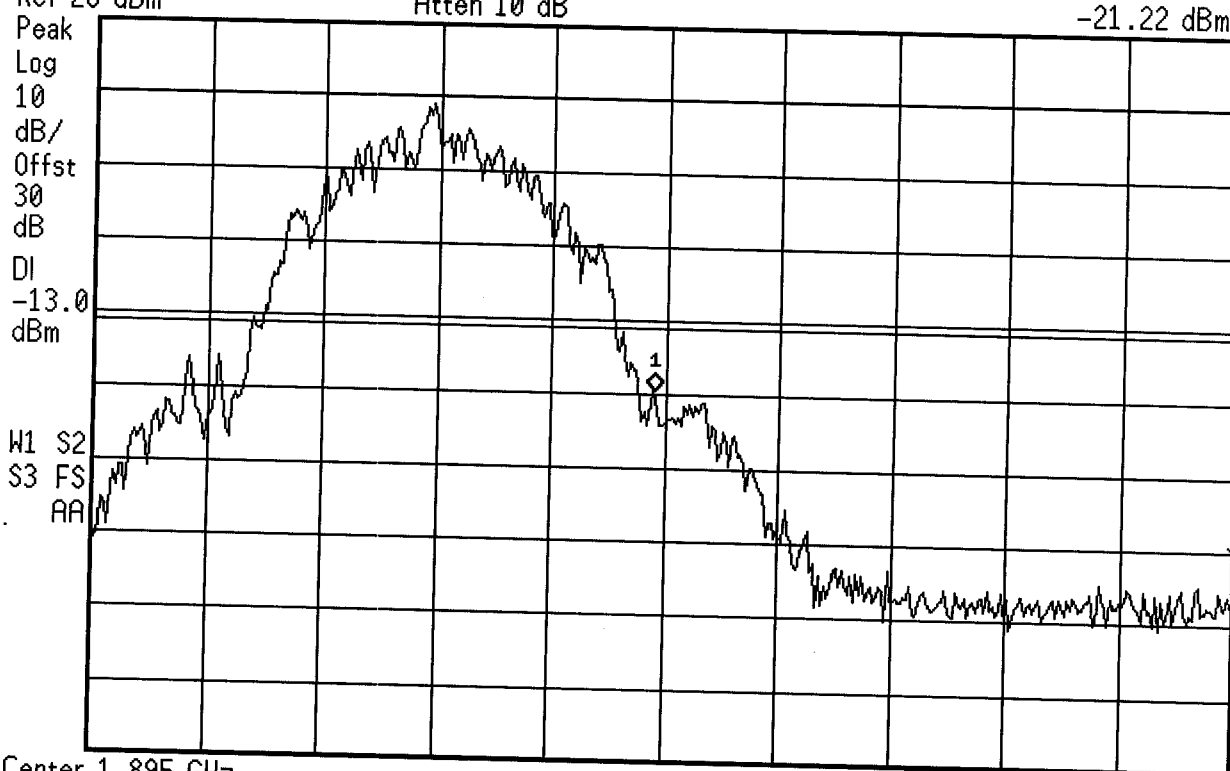

Center 1.895 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

*Sweep 2 s



16:34:28 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 512

Ref 27.9 dBm


Atten 10 dB

Mkr1 2.351 GHz

-27.35 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

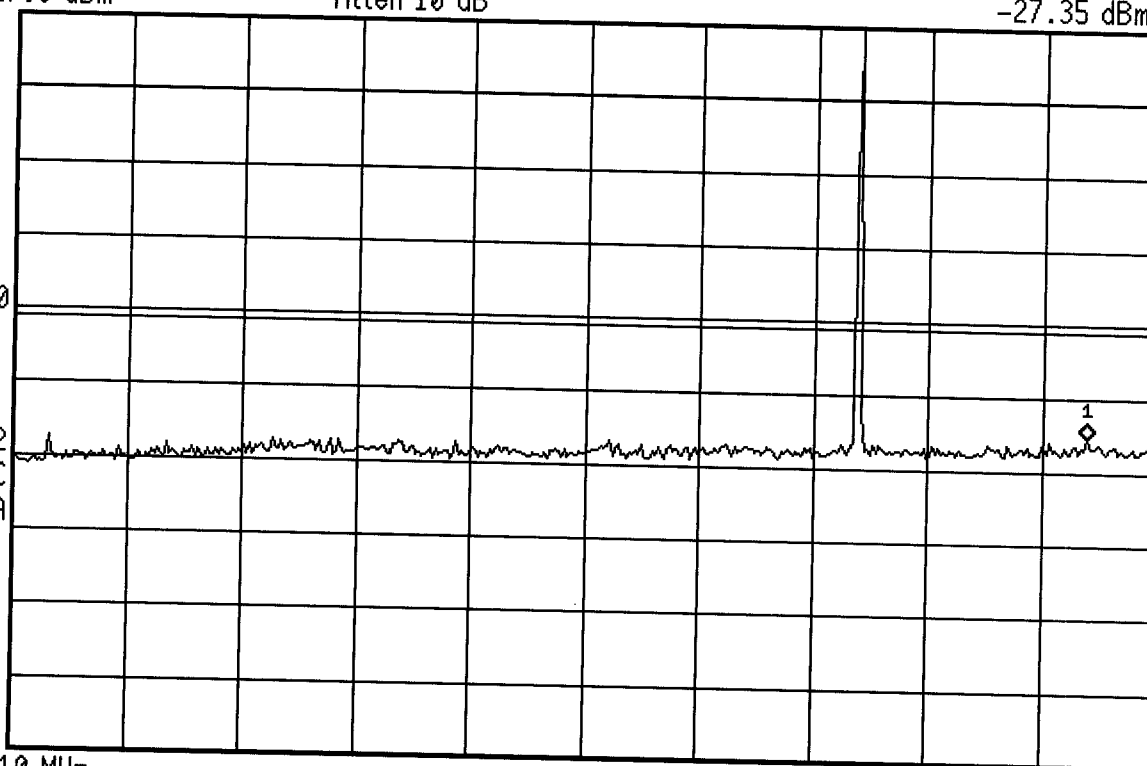

Start 10 MHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz

Sweep 6.225 ms



16:35:12 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 512

Ref 27.9 dBm


Atten 10 dB

Mkr1 2.988 GHz

-29.75 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

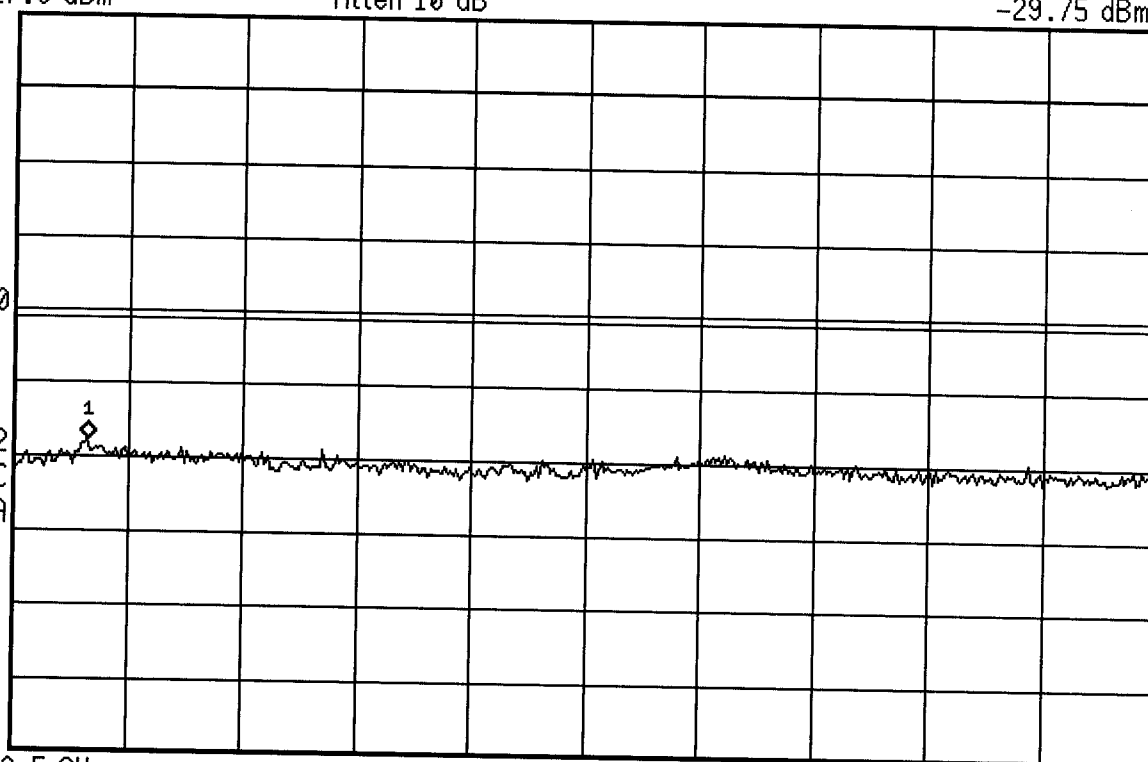

Start 2.5 GHz

*Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz

Sweep 18.75 ms



16:35:49 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 512

Ref 27.9 dBm

Atten 10 dB

Mkr1 14.35 GHz

-29.37 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA


Start 10 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 20 GHz

Sweep 100 ms

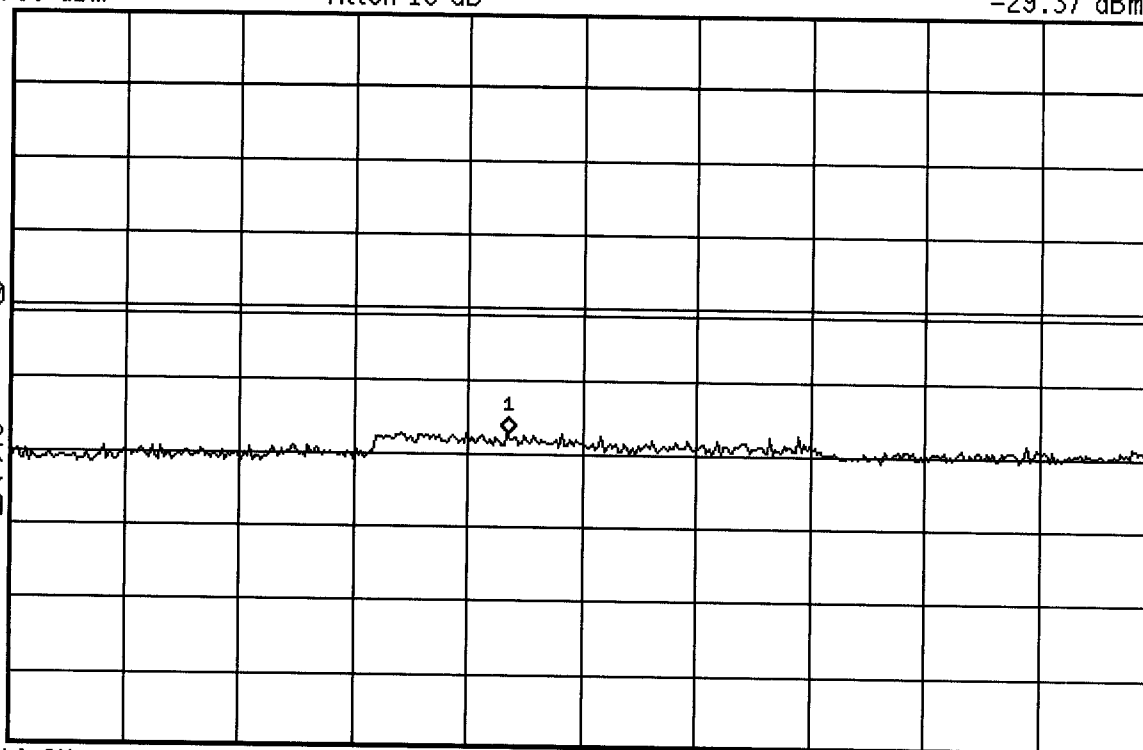



16:38:44 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 661

Mkr1 2.351 GHz

Ref 27.9 dBm

Atten 10 dB

-27.39 dBm

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA


Start 10 MHz

*Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz

Sweep 6.225 ms

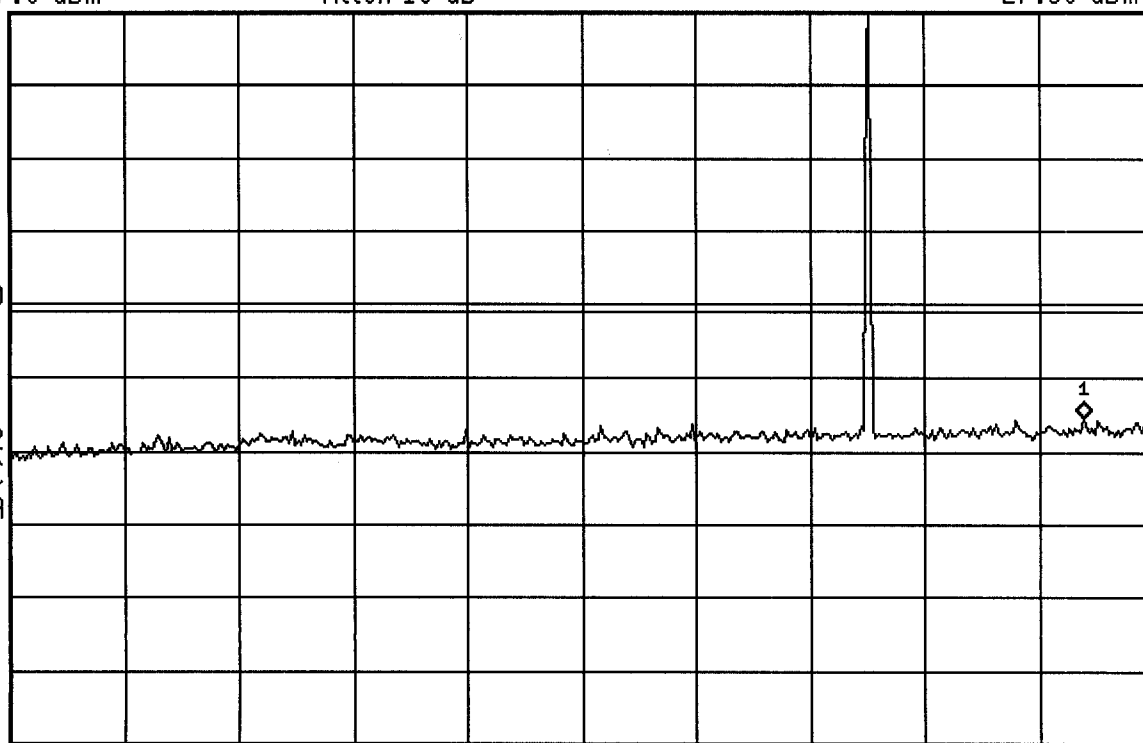



16:37:41 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 661

Mkr1 2.969 GHz

Ref 27.9 dBm

Atten 10 dB

-29.58 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

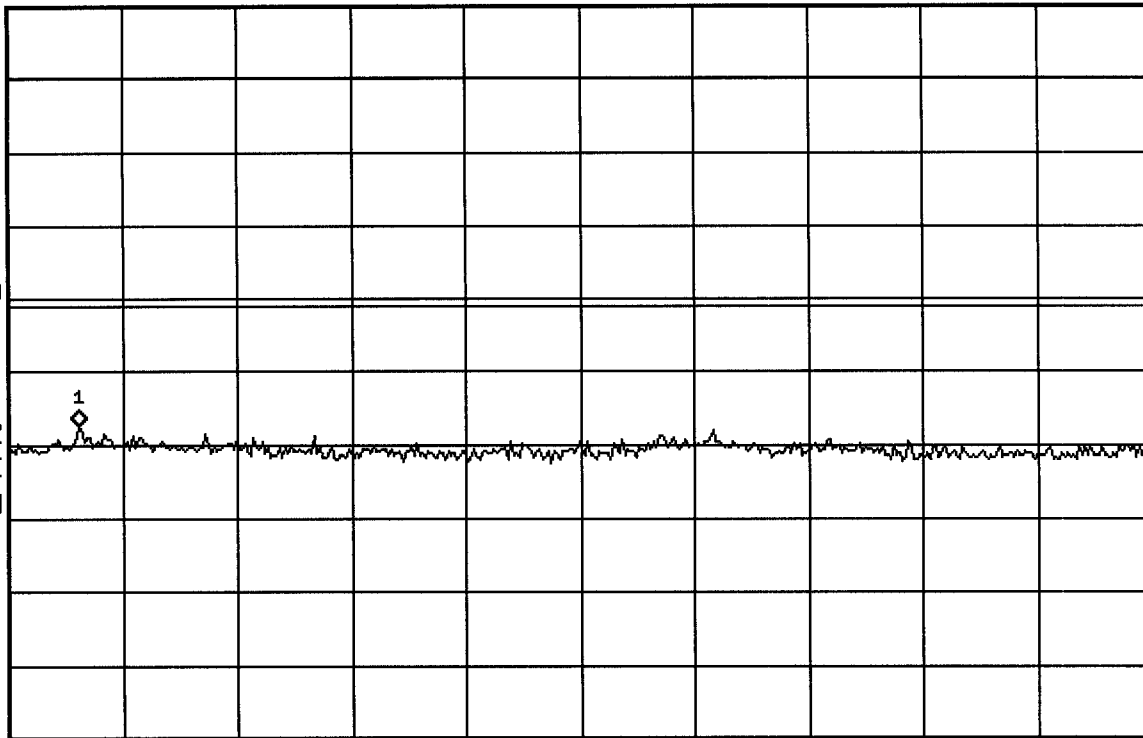

Start 2.5 GHz

*Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz

Sweep 18.75 ms



16:36:56 Nov 27, 2002

ETRONIX KBCIX260MPIA750BT COND SPURS CH 661

Ref 27.9 dBm


Atten 10 dB

Mkr1 13.35 GHz

-27.41 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

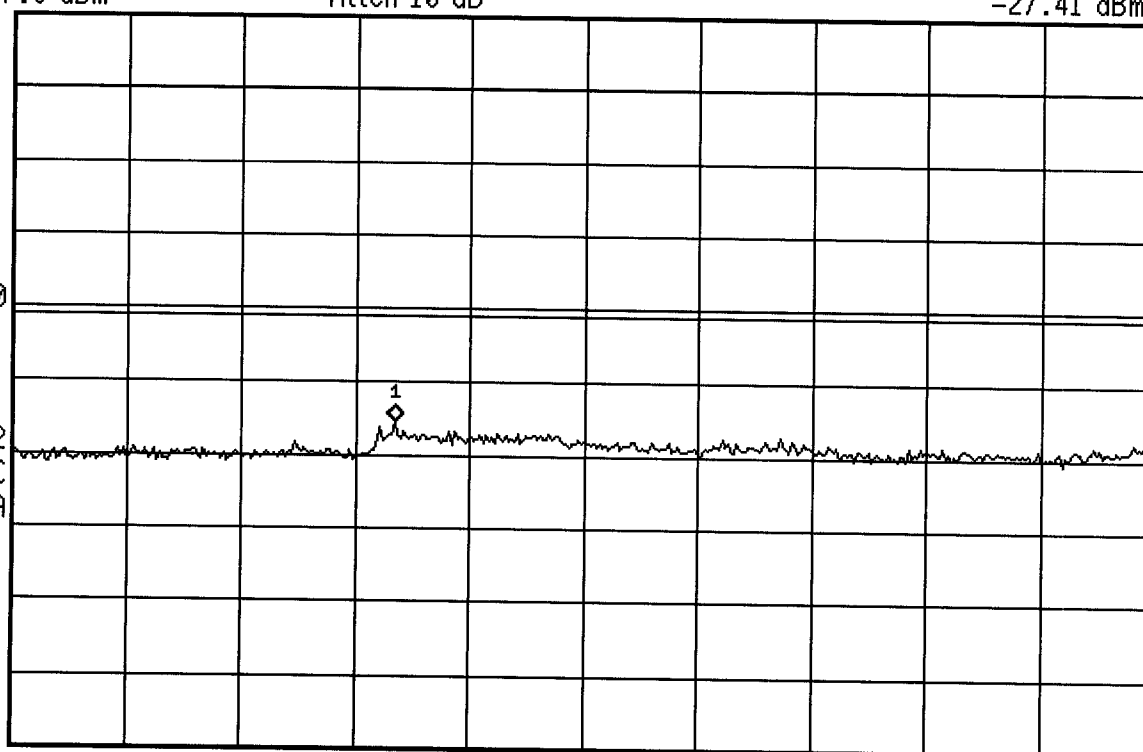

Start 10 GHz

*Res BW 1 MHz

VBW 1 MHz

Stop 20 GHz

Sweep 100 ms



16:50:12 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 810

Mkr1 2.357 GHz


Ref 27.8 dBm

Atten 10 dB

-27.38 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

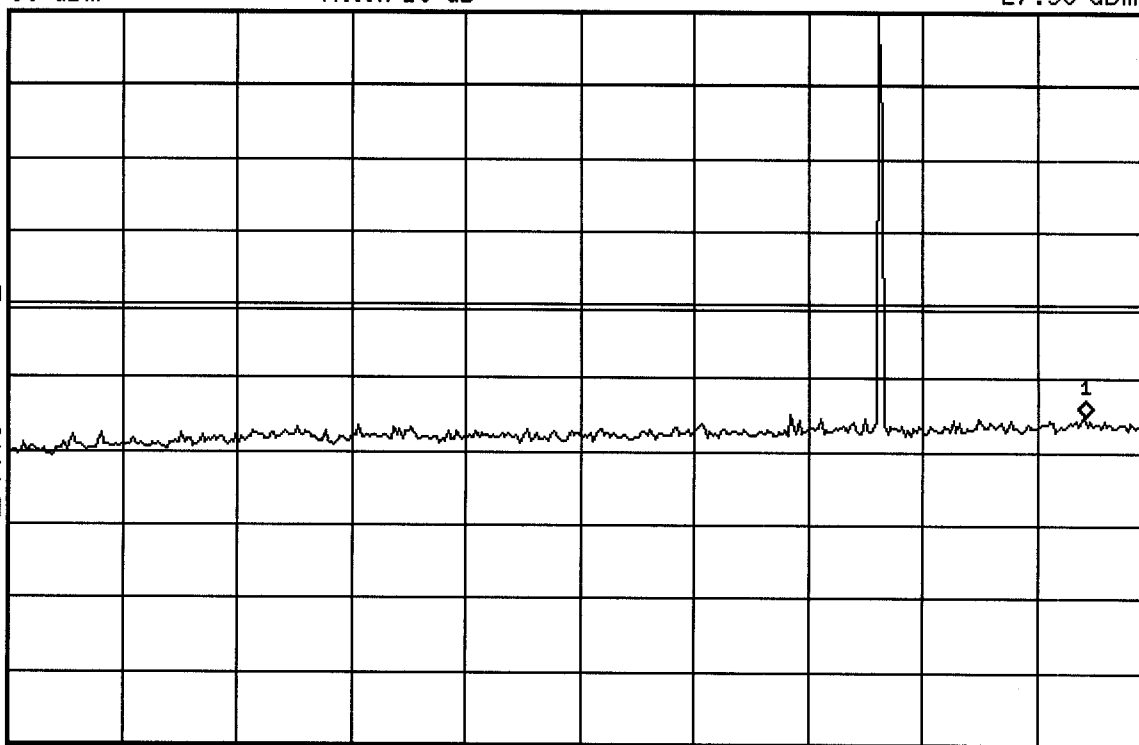

Start 10 MHz
*Res BW 1 MHz

VBW 1 MHz

Stop 2.5 GHz
Sweep 6.225 ms



16:48:38 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 810

Mkr1 2.988 GHz


Ref 27.8 dBm

Atten 10 dB

-28.92 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

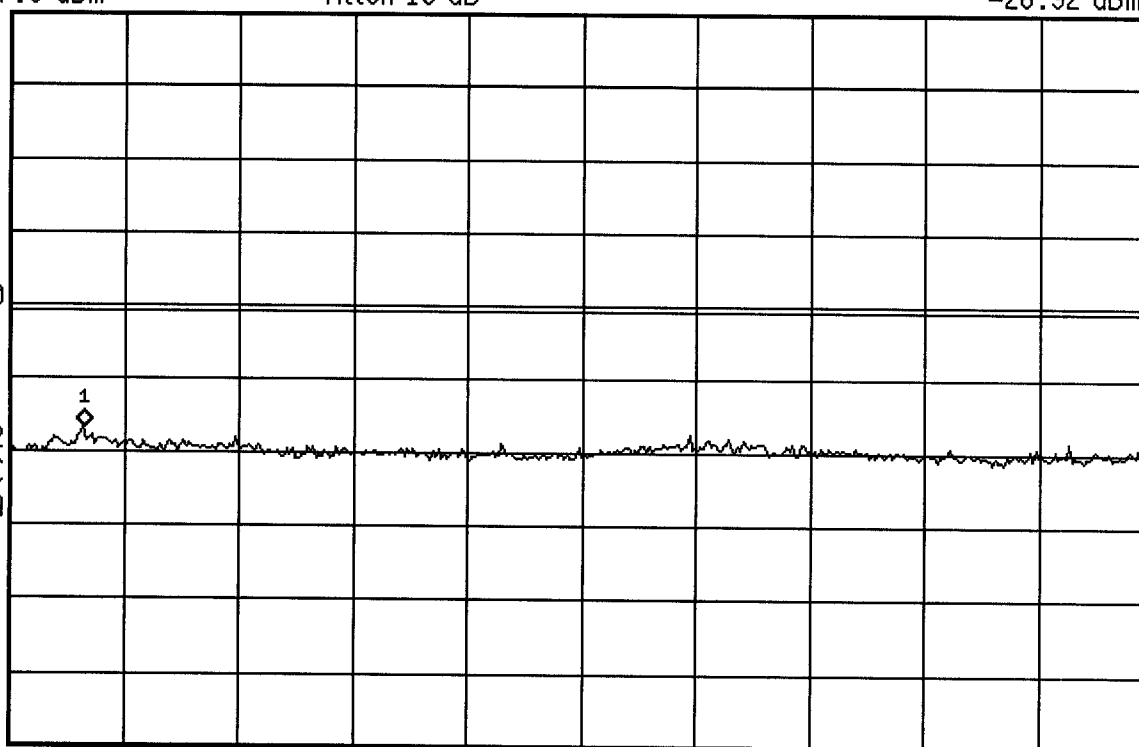

Start 2.5 GHz
#Res BW 1 MHz

VBW 1 MHz

Stop 10 GHz
Sweep 18.75 ms



16:44:14 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT COND SPURS CH 810

Ref 27.8 dBm

Atten 10 dB

Mkr1 14.68 GHz

-28.88 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

· AA

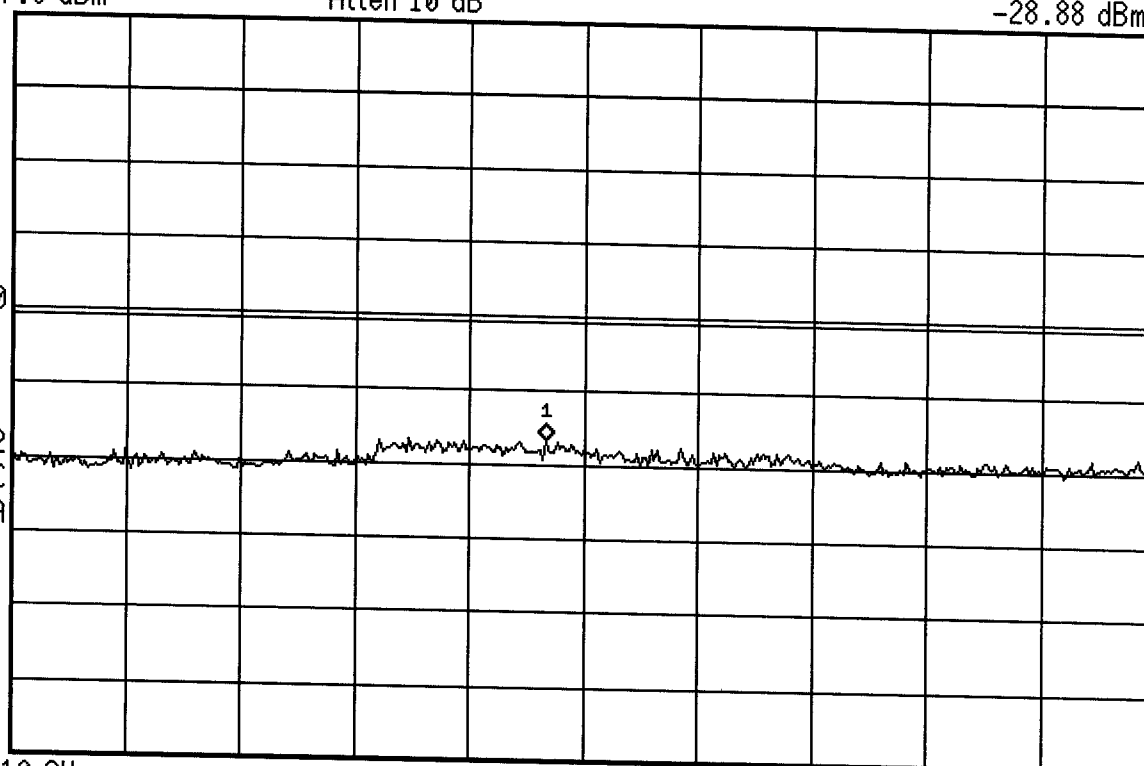

Start 10 GHz

*Res BW 1 MHz

VBW 1 MHz

Stop 20 GHz

Sweep 100 ms



17:09:44 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT RECEIVER SPURS

Mkr1 1.93708 GHz

Ref -51.2 dBm

Atten 5 dB

-60.43 dBm

Peak

Log

10

dB/

Offst

30

dB

W1 S2

S3 FC

AA


Start 1.931 GHz

*Res BW 30 kHz

VBW 30 kHz

Stop 1.989 GHz

*Sweep 2 s

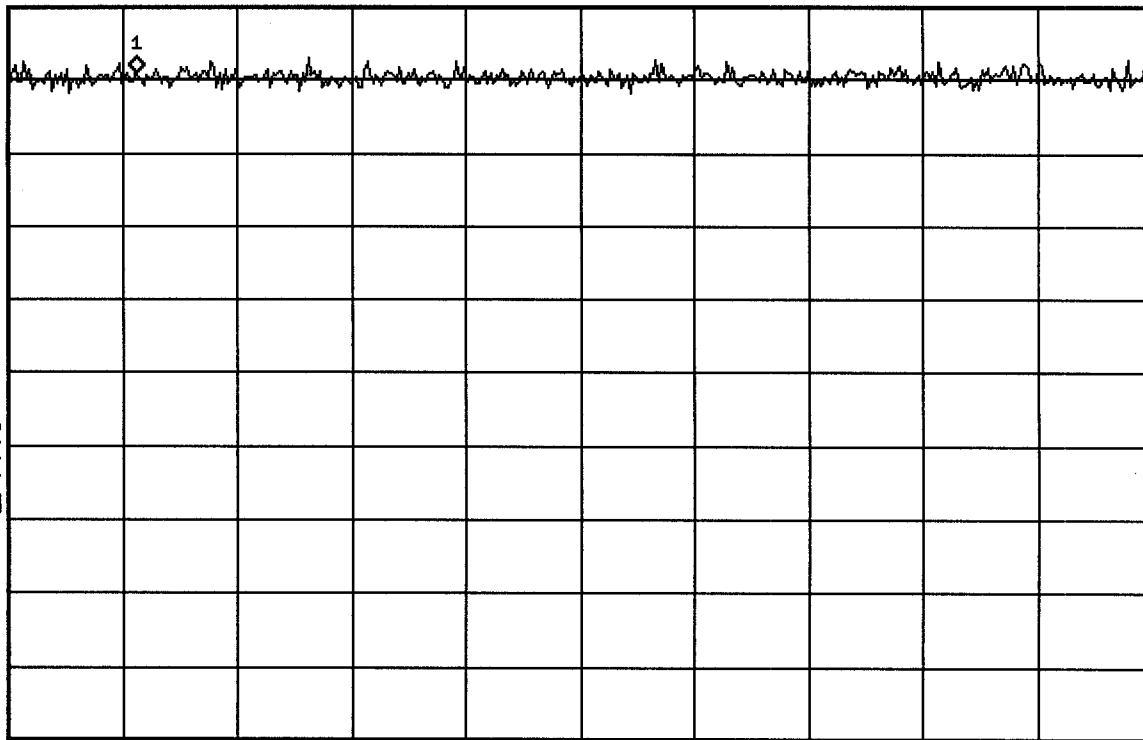



16:58:13 Nov 27, 2002

ITRONIX KBCIX260AC750-MPI PCS GSM MODE CH 512

Ref 27.9 dBm

Atten 10 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

Limit




Center 1.85 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms

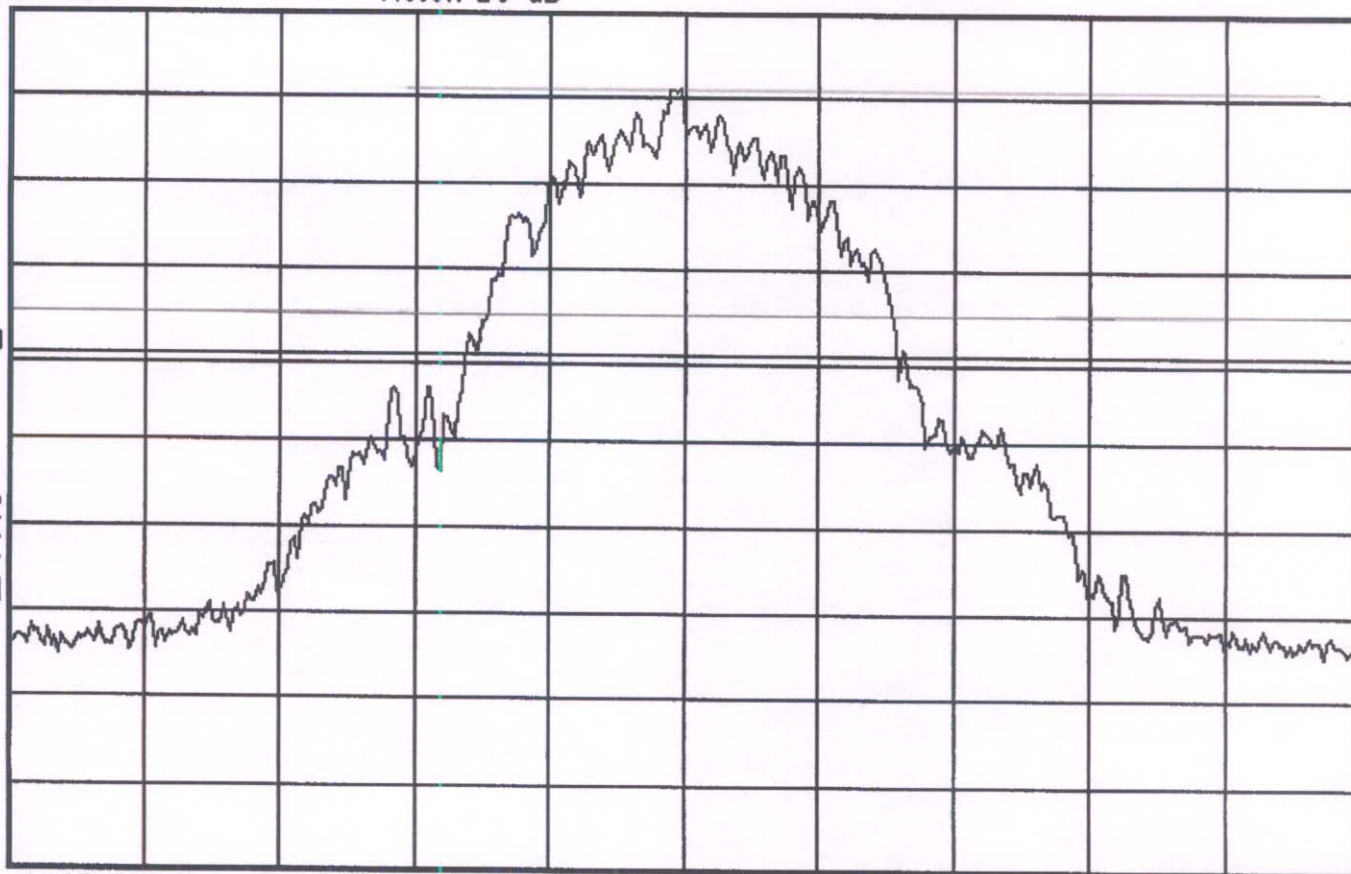



16:59:08 Nov 27, 2002

ITRONIX KBCIX260AC750-MPI PCS GSM MODE CH 661

Ref 27.9 dBm

Atten 10 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

Limit




Center 1.88 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms

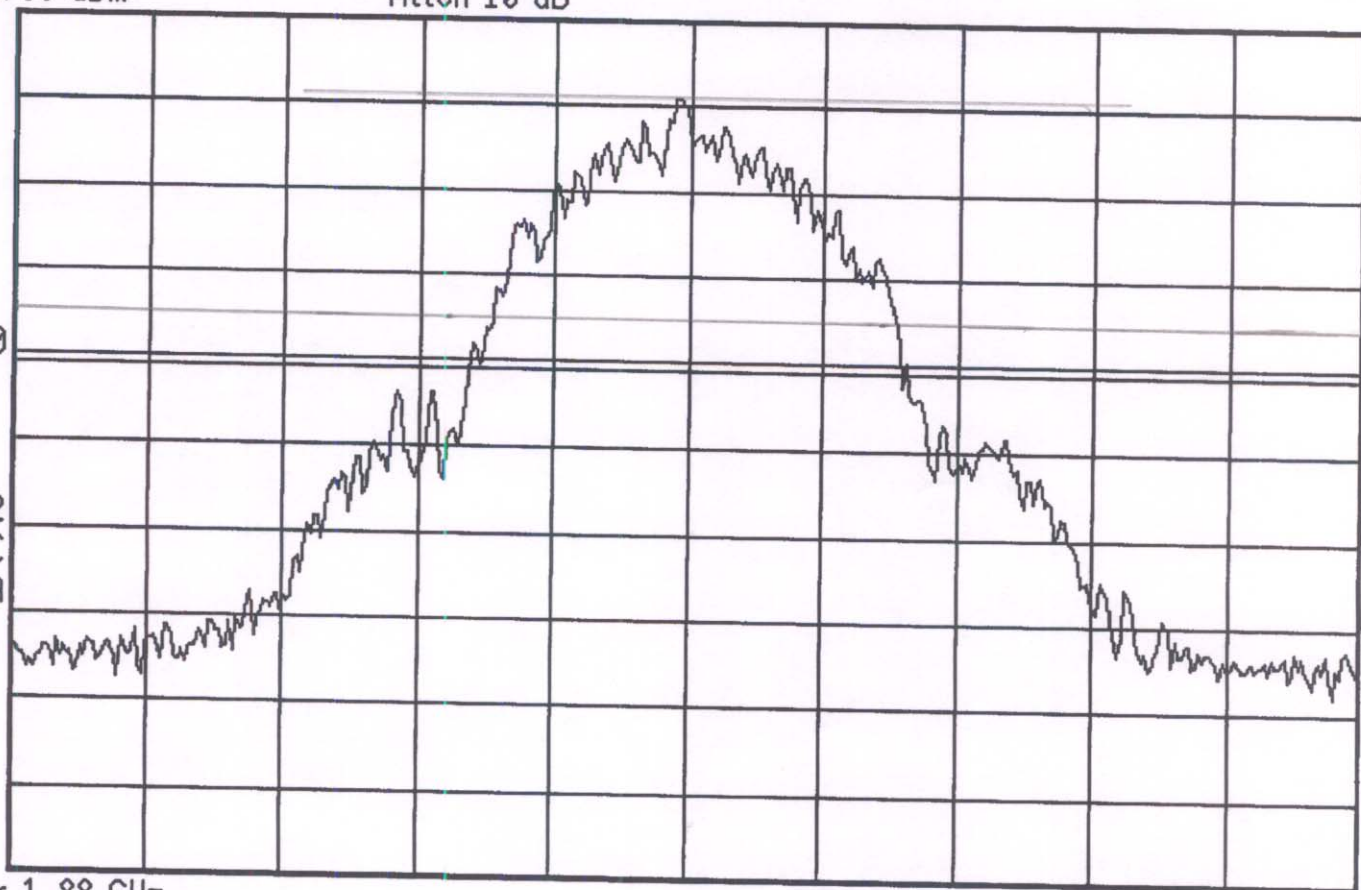



16:54:23 Nov 27, 2002

ITRONIX KBCIX260AC750-MPI PCS GSM MODE CH 810

Ref 27.8 dBm

Atten 10 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

Limit




Center 1.91 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms

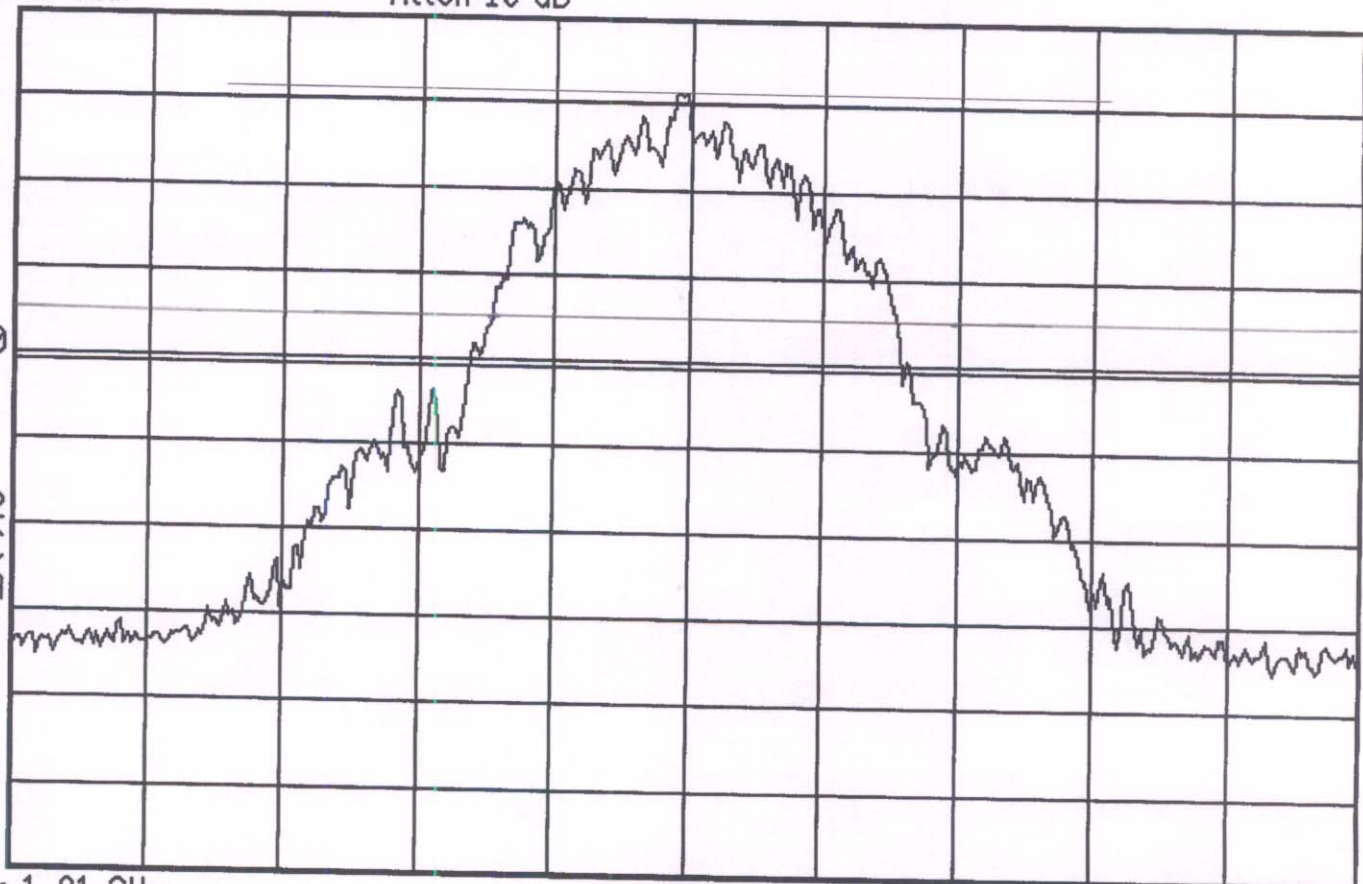



17:01:57 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT OCCUPIED BANDWIDTH

Ref 27.9 dBm

Atten 10 dB

▲ Mkr1 250 kHz

-5.263 dB

Peak

Log

10

dB/

Offst

30

dB

DI

-13.0

dBm

M1 S2

S3 FC

AA

.


Center 1.88 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms

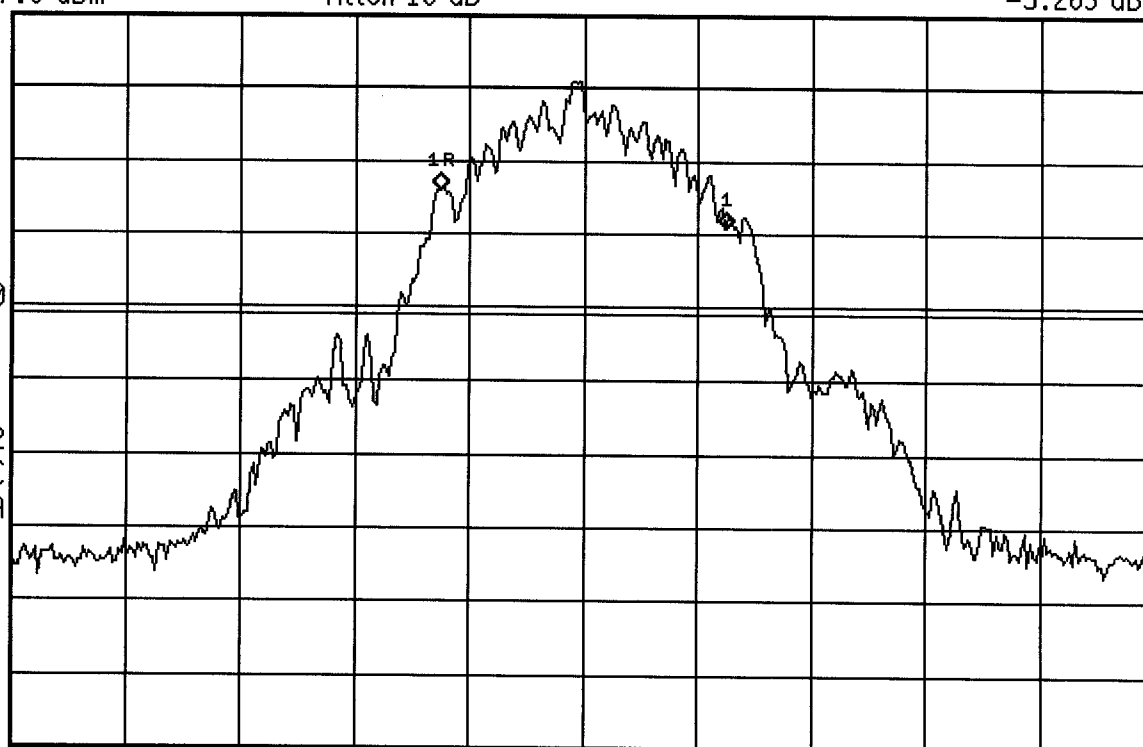



17:03:57 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT BAND EDGE LOW CH

Mkr1 1.850010 GHz

Ref 27.9 dBm

Atten 10 dB

-16.23 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

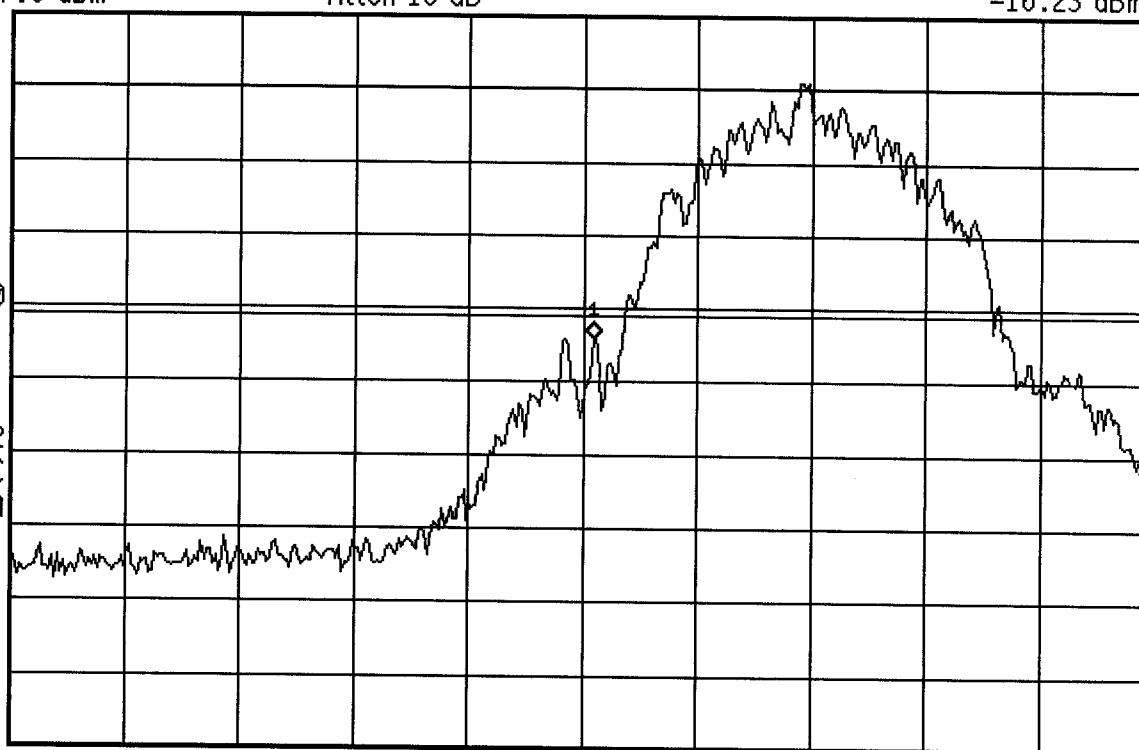

Center 1.85 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms



17:06:58 Nov 27, 2002

ITRONIX KBCIX260MPIA750BT BAND EDGE HIGH CH

Mkr1 1.909613 GHz

Ref 27.8 dBm

Atten 10 dB

-15.8 dBm

Peak

Log

10

dB/

Offst

30

dB

DI


-13.0

dBm

M1 S2

S3 FC

AA

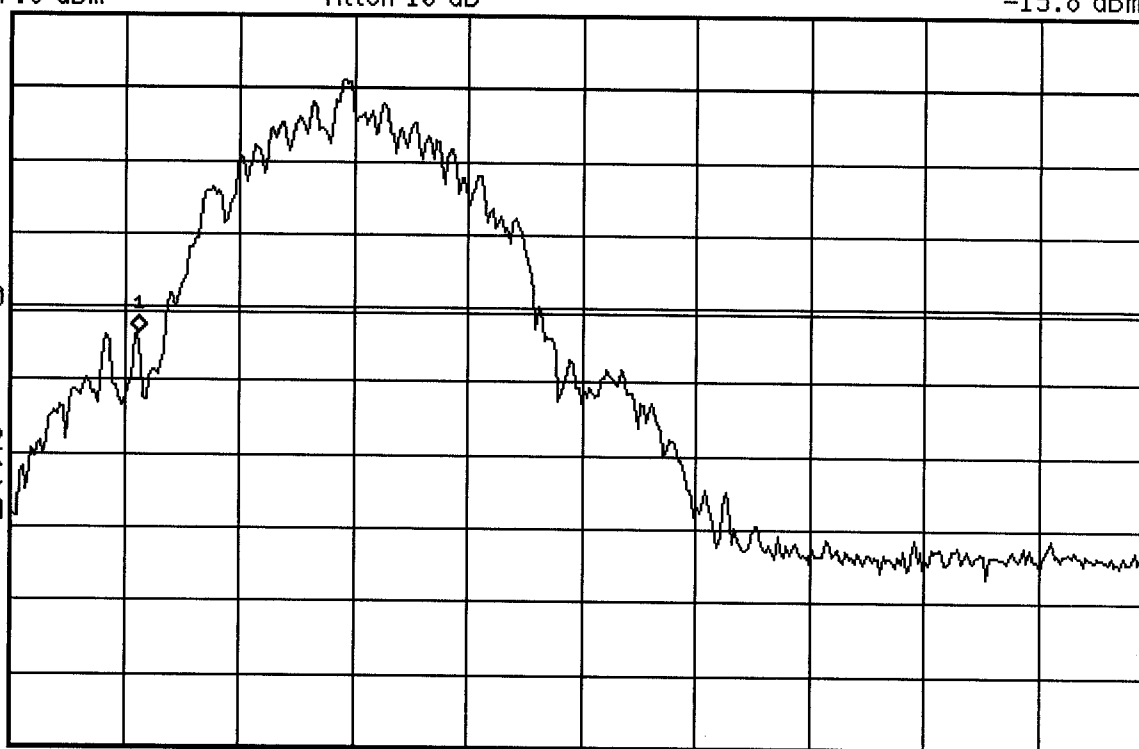

Center 1.91 GHz

*Res BW 3 kHz

VBW 3 kHz

Span 1 MHz

Sweep 277.8 ms

APPENDIX B - RADIATED TEST SETUP PHOTOGRAPHS

RADIATED TEST SETUP PHOTOGRAPHS

Vertical Polarization



RADIATED TEST SETUP PHOTOGRAPHS

Horizontal Polarization

