

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

DECLARATION OF COMPLIANCE

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Tel.: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

ITRONIX CORPORATION
801 South Stevens Street
Spokane, WA 99204
United States

FCC IDENTIFIER: KBCIX260PNL3AC555
IC IDENTIFIER: 1943A-IX260Pb
Model(s): IX260PNL3AC555

FCC Rule Part(s): FCC 47 CFR §24(E), §22(H), §2
IC Rule Part(s): RSS-133 Issue 2, RSS-132 Issue 1 (Provisional)
Test Procedure(s): FCC 47 CFR §24(E), §22(H), §2
IC RSS-133 Issue 2, IC RSS-132 Issue 1 (Provisional)
ANSI TIA/EIA-603-B-2002
FCC Device Classification: PCS Licensed Transmitter (PCB)
IC Device Classification: 2 GHz Personal Communication Services (RSS-133)
Device Description: 800 MHz Cellular Telephones Employing New Technologies (RSS-132)
Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band CDMA PCMCIA Modem
with External Swivel Dipole Antenna, Vehicle-Mount Antenna, and Vehicle Cradle
Co-located Transmitter(s): Senao NL-3054MP 802.11b/g WLAN Mini-PCI Card (with Internal Surface-Mount Antenna)
Tx Frequency Range(s): 1851.25 - 1908.75 MHz (PCS CDMA)
Rx Frequency Range(s): 824.70 - 848.31 MHz (Cellular CDMA)
1931.25 - 1988.75 MHz (PCS CDMA)
869.70 - 893.31 MHz (Cellular CDMA)
Max. ERP/EIRP Measured: 0.302 Watts (24.80 dBm) EIRP - PCS CDMA (Itronix Swivel Dipole Antenna)
0.306 Watts (24.86 dBm) ERP - Cellular CDMA (Itronix Swivel Dipole Antenna)
0.040 Watts (16.03 dBm) EIRP - PCS CDMA (MaxRad Vehicle-Mount Antenna)
0.146 Watts (21.65 dBm) ERP - Cellular CDMA (MaxRad Vehicle-Mount Antenna)
Max. Conducted Power Measured: 23.0 dBm (PCS CDMA)
23.0 dBm (Cellular CDMA)
Modulation Type(s): QPSK
Emission Designator(s): 1M25F9W
Frequency Tolerance(s): 150 Hz (PCS CDMA)
300 Hz (Cellular CDMA)
Antenna Type(s) Tested: Itronix IX260+ External Swivel Dipole (Dual-Band CDMA)
MaxRad 3 dBi Gain Vehicle-Mount P/N: WMLPVDB800/1900 (Dual-Band CDMA)
Power Source(s) Tested: 11.1 V Lithium-ion Battery, 6.0 Ah (Model: A2121-2)
12 V Vehicle Battery (for Vehicle Cradle)

This mobile device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §24(E), §22(H), §2; Industry Canada RSS-133 Issue 2, RSS-132 Issue 1 (Provisional); and ANSI TIA/EIA-603-B-2002.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.


Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.


Duane M. Friesen
EMC Manager
Celltech Labs Inc.



Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

TABLE OF CONTENTS

Section	DESCRIPTION	Page #		
1.1	SCOPE	3		
2.1	GENERAL INFORMATION / DEVICE DESCRIPTION	3		
3.1	TEST EQUIPMENT LIST	4		
Appendix	MEASUREMENT PROCEDURES & DATA	FCC Rule Part(s)	IC Rule Part(s)	Page #
A	RF Output Power	§2.1046	RSS-133 §6.2 RSS-132 §4.4	5
B	Spurious Emissions at Antenna Terminal	§2.1051	RSS-133 §6.3 RSS-132 §4.5	6-16
C	Occupied Bandwidth & Emission Bandwidth	§2.1049 §22.917 §24.238	RSS-133 §6.3 RSS-132 §4.2 RSS-132 §4.5	17-25
D	Effective Isotropic Radiated Power Output	§24.232(b)	RSS-133 §6.2	26-27
E	Effective Radiated Power Output	§22.913	RSS-132 §4.4	28-29
F	Field Strength of Spurious Radiation	§24.238 §22.917	RSS-133 §6.3 RSS-132 §4.5	30-42
G	Frequency Stability / Temperature Variation	§2.1055 §24.235	RSS-133 §6.3 RSS-132 §4.5	43-45
H	Radiated Test Setup Photographs			46-50

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

EMC MEASUREMENT REPORT

1.1 SCOPE

This report describes the measurements made and results collected during the Electromagnetic emissions testing of the Itronix Corporation IX260+ Rugged Laptop PC incorporating the internal Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem with external swivel dipole antenna, vehicle-mount antenna, and vehicle cradle. The DUT also incorporates a co-located internal Senao NL-3054MP 802.11b/g 2.4 GHz DSSS WLAN Mini-PCI Card and RangeStar internal surface-mount antenna. **The Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem and co-located Senao NL-3054MP 802.11b/g 2.4 GHz DSSS WLAN Mini-PCI Card do not transmit simultaneously.** The measurement results were applied against the EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication Commission Code of Federal Regulations Title 47 Parts 24(E), 22(H), and 2; and Industry Canada Radio Standards Specification RSS-133 Issue 2 and RSS-132 Issue 1 (Provisional).

2.1 GENERAL INFORMATION / DEVICE DESCRIPTION

APPLICANT	ITRONIX CORPORATION		801 South Stevens Street, Spokane, WA 99204											
FCC IDENTIFIER	KBCIX260PNL3AC555													
Model(s)	IX260PNL3AC555													
Serial No.(s)	ZZGEG4112ZZ9777		IX260+ Rugged Laptop PC			Production Unit								
	63013A85		AirCard 555 CDMA Modem			Production Unit								
Device Description	Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band CDMA PCMCIA Modem utilizing an External Swivel Dipole Antenna, Vehicle-Mount Antenna, and Vehicle Cradle													
Co-located Transmitter(s)	Senao NL-3054MP 802.11b/g WLAN Mini-PCI Card with internal RangeStar Surface-Mount Antenna													
Co-located Transmit	Single Transmit Only (CDMA and WLAN co-located transmitters do not transmit simultaneously)													
FCC Rule Part(s)	§24(E)		§22(H)			§2								
IC Rule Part(s)	RSS-133 Issue 2			RSS-132 Issue 1 (Provisional)										
FCC Classification	PCS Licensed Transmitter (PCB)													
IC Classification	2 GHz Personal Communication Services (RSS-133)													
	800 MHz Cellular Telephones Employing New Technologies (RSS-132)													
Tx Frequency Range(s)	1851.25 - 1908.75 MHz			PCS CDMA										
	824.70 - 848.31MHz			Cellular CDMA										
Rx Frequency Range(s)	1931.25 - 1988.75 MHz			PCS CDMA										
	869.70 - 893.31 MHz			Cellular CDMA										
Antenna Type(s) Tested	Type	Description		Max. RF Output Power (EIRP/ERP)										
	Dual-Band CDMA	External Swivel Dipole	0.302	W	24.80	dBm	EIRP	PCS						
			0.306	W	24.86	dBm	ERP	Cellular						
	Dual-Band CDMA	3 dBi-Gain Vehicle-Mount	0.040	W	16.03	dBm	EIRP	PCS						
			0.146	W	21.65	dBm	ERP	Cellular						
Max. RF Conducted Power Tested	23.0 dBm		PCS CDMA			23.0 dBm		Cellular CDMA						
Emission Designator(s)	1M25F9W													
Modulation Type(s)	QPSK													
Frequency Tolerance	150 Hz (PCS CDMA)			300 Hz (Cellular CDMA)										
Power Source(s) Tested	Lithium-ion Battery			11.1 V, 6.0 Ah			Model: A2121-2							
	Vehicle Battery			12 V			(For Vehicle Cradle)							

Applicant:	ITronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						3 of 50

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FCC PART 24(E) & 22(H) EMC MEASUREMENT REPORT (Continued)

3.1 TEST EQUIPMENT LIST

Equipment Type	Model	Serial No.	Calibration Due Date
HP Signal Generator	8648D (9kHz-4.0GHz)	3847A00611	April 2005
Rohde & Schwarz Signal Generator	SMR 20 (10MHz-40GHz)	100104	April 2005
Gigatronics Power Meter	8651A	8650137	April 2005
Gigatronics Power Meter	8652A	1835267	April 2005
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833535	April 2005
Gigatronics Power Sensor	80701A (0.05-18GHz)	1833542	April 2005
Gigatronics Power Sensor	80701A (0.05-18GHz)	1834350	April 2005
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	26235	N/A
Amplifier Research Power Amp.	10W1000C (0.5 – 1 GHz)	27887	N/A
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	3123A00587	N/A
Network Analyzer	HP 8753E (30kHz-3GHz)	US38433013	April 2005
Frequency Counter	HP 53181A (3GHz)	3736A05175	April 2005
DC Power Supply	HP E3611A	KR83015294	N/A
Multi-Device Controller	EMCO 2090	9912-1484	N/A
Mini Mast	EMCO 2075	0001-2277	N/A
Turntable	EMCO 2080-1.2/1.5	0002-1002	N/A
Double Ridged Horn Antenna	ETS 3115 (1-18GHz) TX Substitution Antenna (Horn SN6267)	6267	Oct 2004
Double Ridged Horn Antenna	ETS 3115 (1-18GHz)	6276	Oct 2004
Standard Gain Horn Antenna	ETS 3160-09 TX Substitution Antenna (3160-09)	9810-1123	N/A
Standard Gain Horn Antenna	ETS 3160-09	1263	N/A
Bilog Antenna	Schaffner CBL6111A	1607	Jan 2005
Roberts Dipole Antenna	3121C-DB4 TX Substitution Antenna (B_3121C)	0003-1494	Dec 2004
Roberts Dipole Antenna	3121C-DB4	0003-1498	Dec 2004
Spectrum Analyzer	HP 8594E	3543A02721	April 2005
Spectrum Analyzer	HP E4408B	US39240170	Dec 2004
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	16297	N/A
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	0510154-B	Feb 2005
Directional Coupler	Amplifier Research DC7154 (0.8-4.2 GHz)	26197	N/A
Directional Coupler	Pasternack PE2214-20	00078	N/A
High Pass Filter	Microwave Circuits HIG318G1	0001DC0020	N/A
High Pass Filter	Microwave Circuits H02G18G1	0001DC0020	N/A
30 dB Attenuator	Pasternack PE7019-30	00065	N/A

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

APPENDIX A - RF OUTPUT POWER MEASUREMENT - §2.1046

A.1. MEASUREMENT PROCEDURE

The RF conducted power levels for both PCS and cellular bands were measured at the AirCard 555 PCMCIA modem antenna connector port using a Gigatronics 8652A Universal Power Meter in mean average power mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the transmitter output port and the power sensor input. The Sierra Wireless AirCard 555 test software was used to set the DUT to transmit in the CDMA "always up" power control mode. All subsequent tests were performed using the same power measurement procedures.

A.2. MEASUREMENT DATA

RF CONDUCTED OUTPUT POWER MEASUREMENTS (measured at the AirCard 555 PCMCIA Modem Antenna Port)			
Frequency (MHz)	Average Power (dBm)	Frequency (MHz)	Average Power (dBm)
824.70	23.0	1851.25	23.0
835.89	23.0	1880.00	23.0
848.31	23.0	1908.75	23.0

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

APPENDIX B - SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051



B.1. MEASUREMENT PROCEDURE

The Sierra Wireless AirCard 555 test software installed in the IX260+ Laptop PC was used to set the DUT to transmit in the CDMA “always up” power control mode. The level of the carrier and the various conducted spurious frequencies were measured by means of a calibrated spectrum analyzer. The resolution bandwidth and video bandwidth were set to 1MHz. The spectrum was scanned from 10MHz to 20GHz at the low, mid, and high channels. The radio transmitter was operating at maximum output power. The antenna output terminal of the DUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The reported emissions were below the specified limit of -13dBm.

(See next pages for Spectrum Analyzer plots)



SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - PCS Band

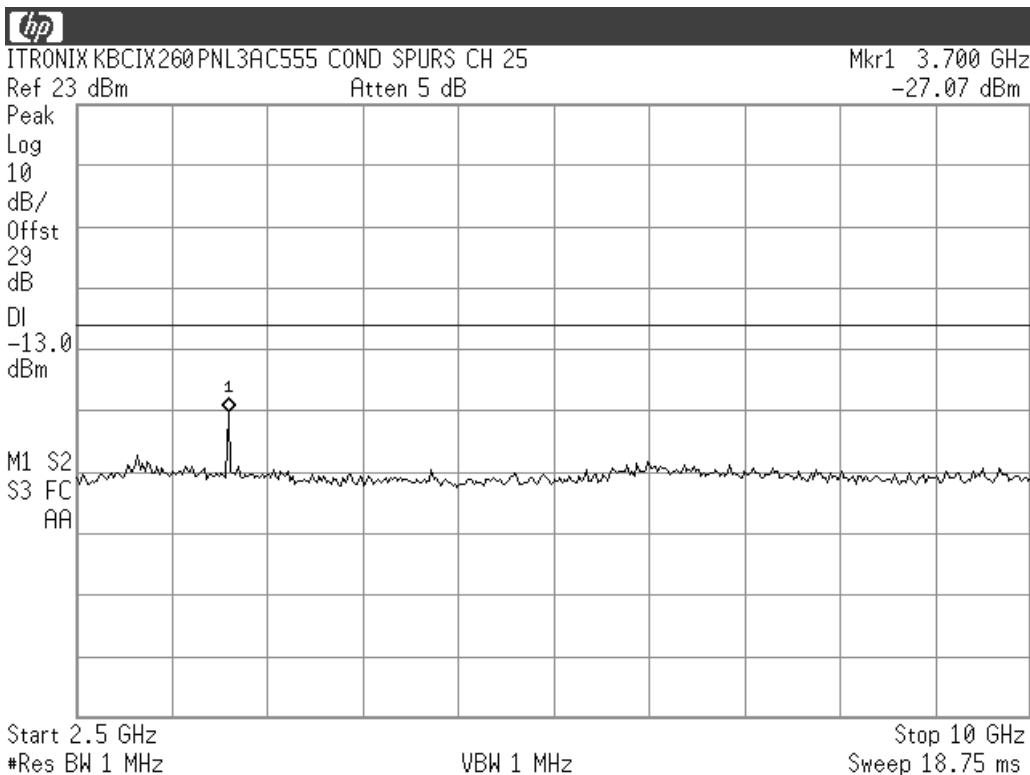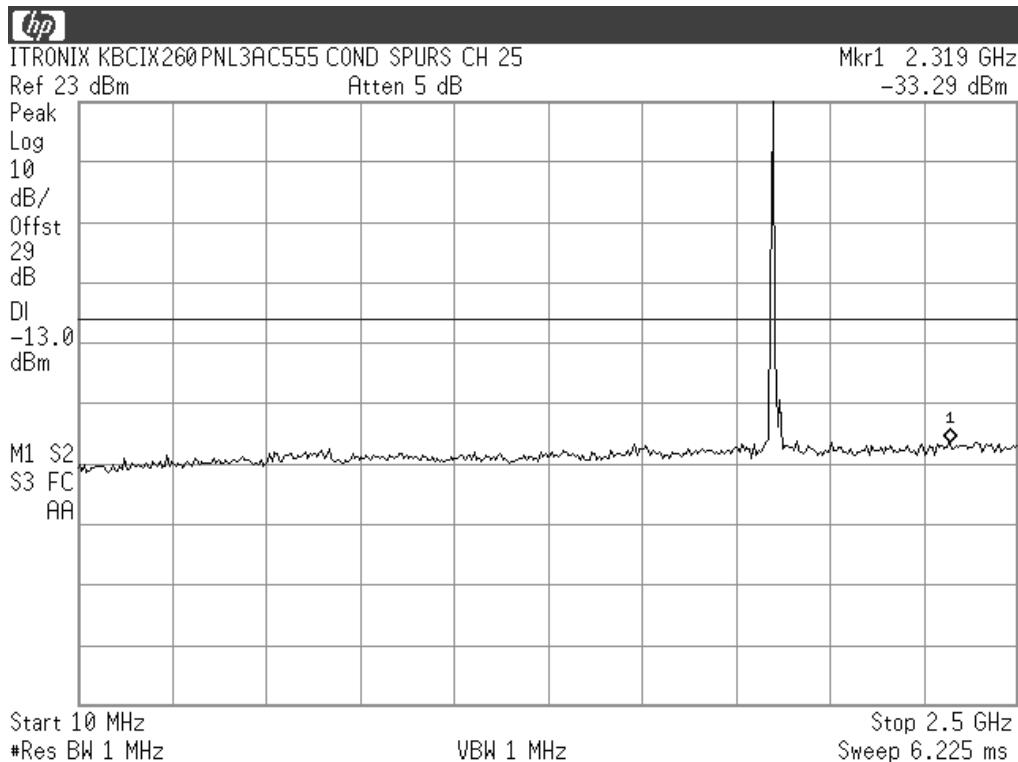

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)



B.2. MEASUREMENT DATA - PCS Band (Cont.)

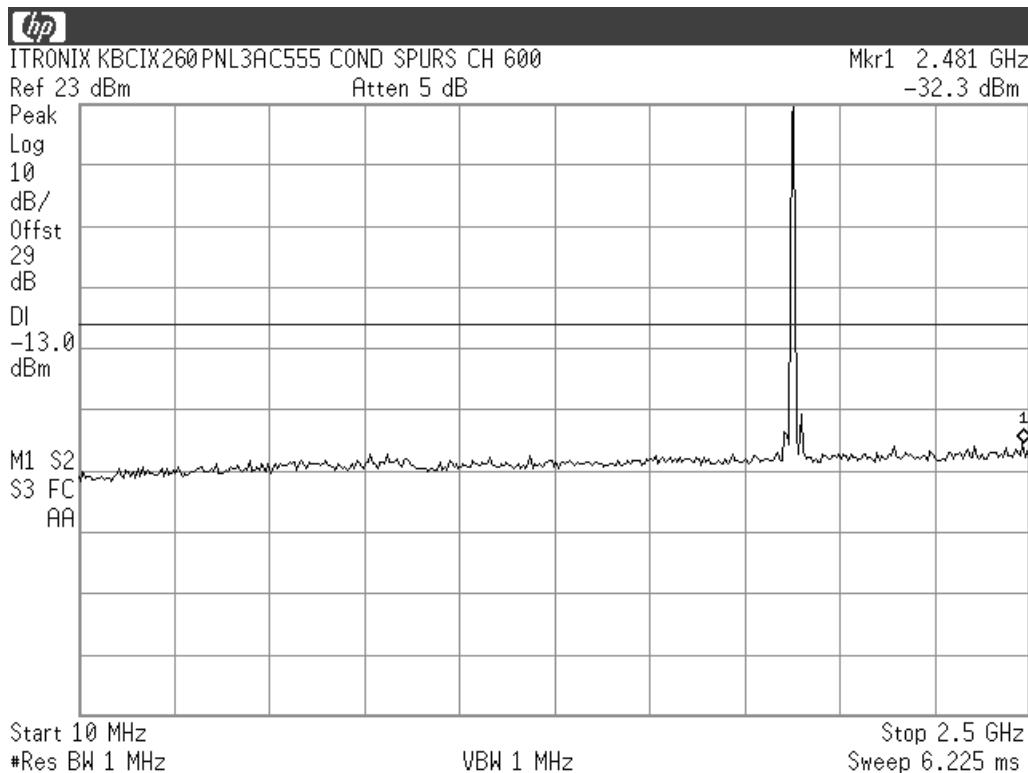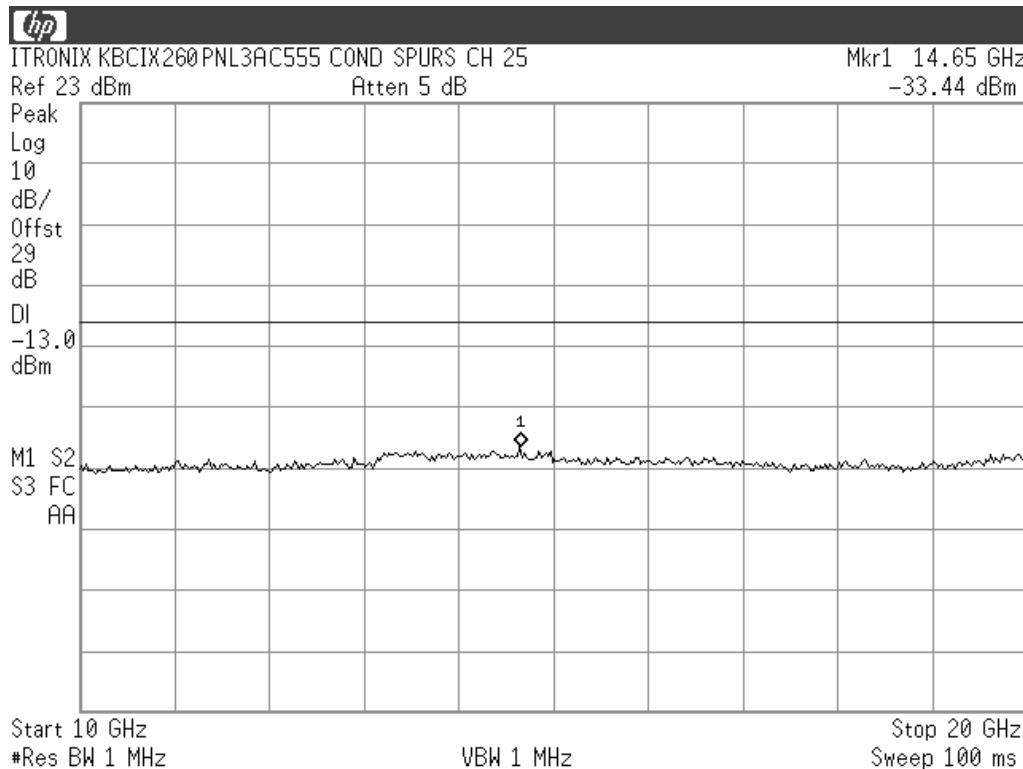

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - PCS Band (Cont.)

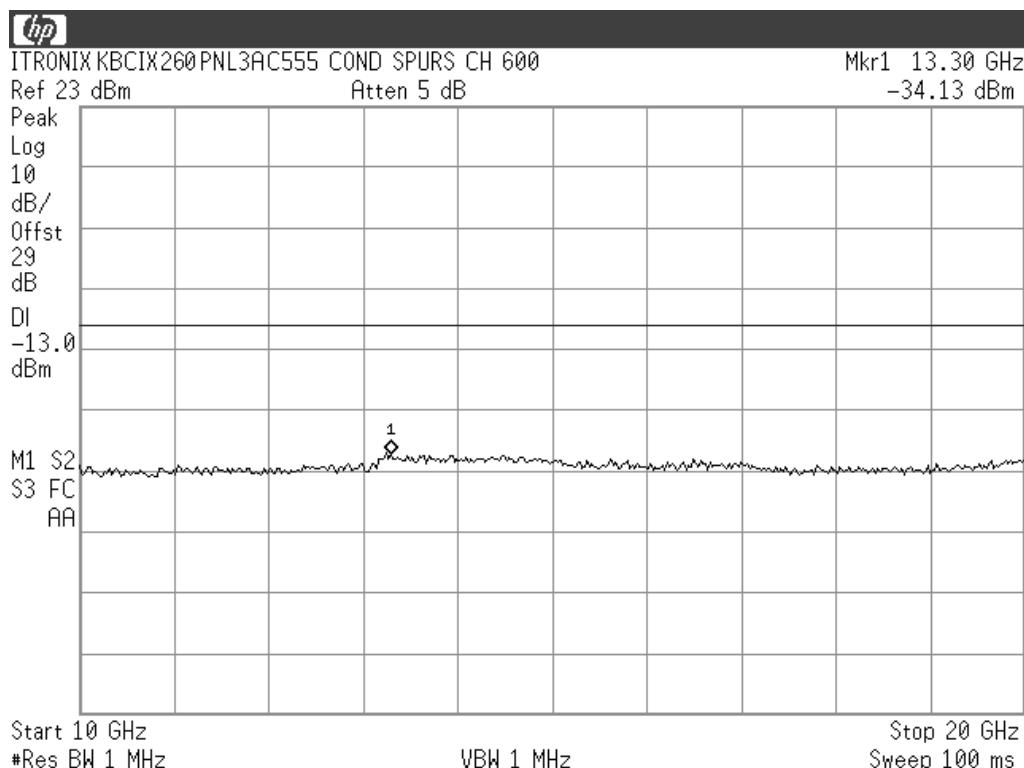
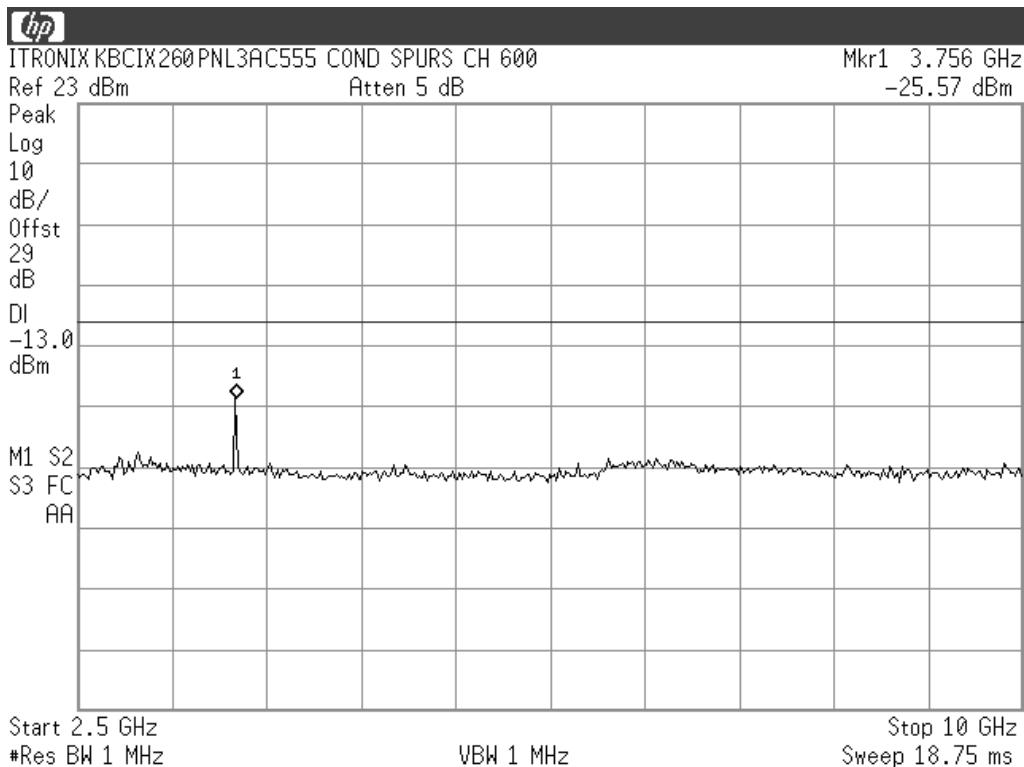


Applicant:	ITronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					9 of 50	

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - PCS Band (Cont.)

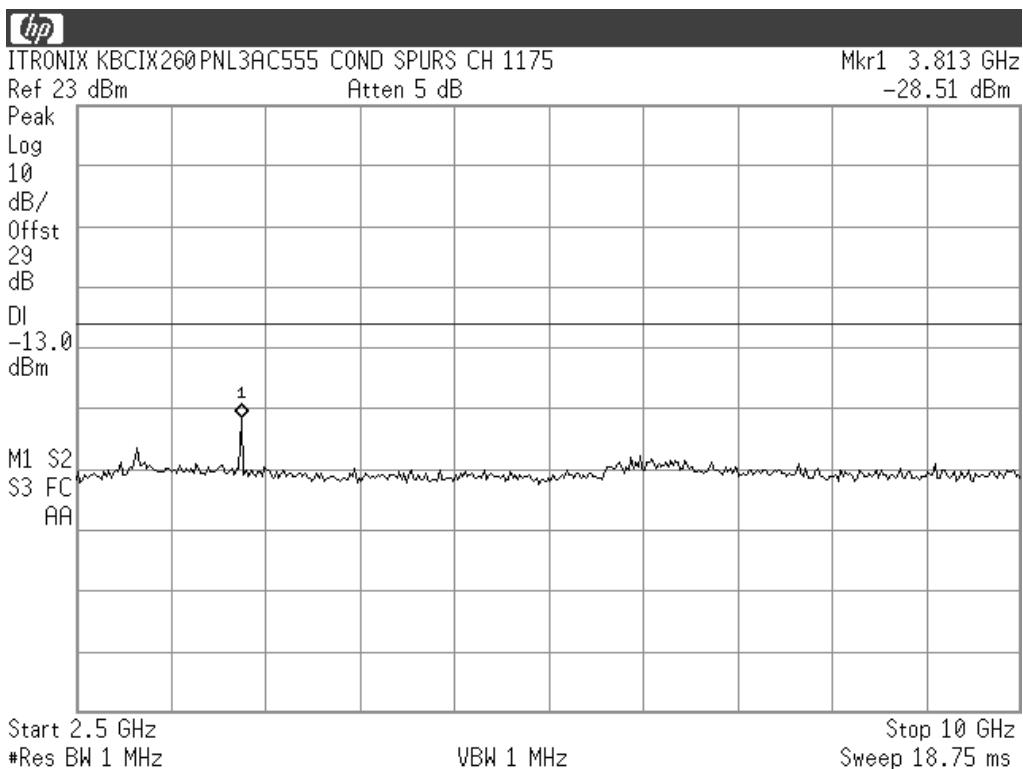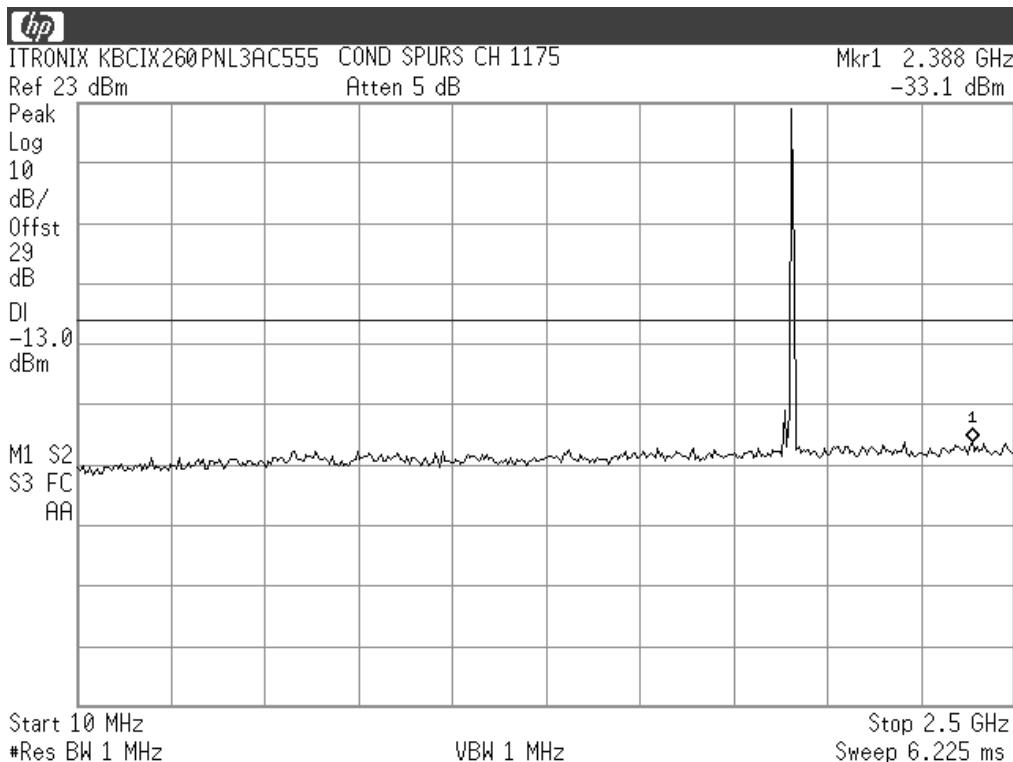


Applicant:	ITronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN						 ITRONIX	
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					10 of 50	

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874



SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - PCS Band (Cont.)

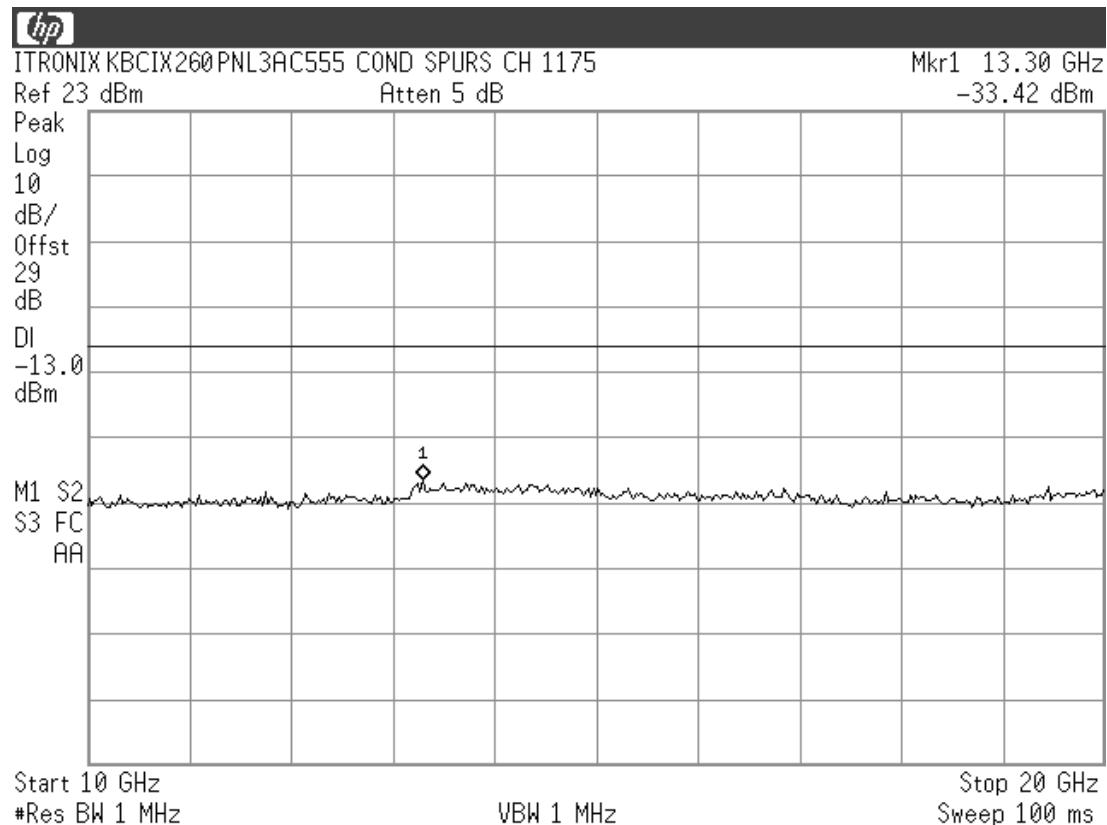

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)



B.2. MEASUREMENT DATA - Cellular Band

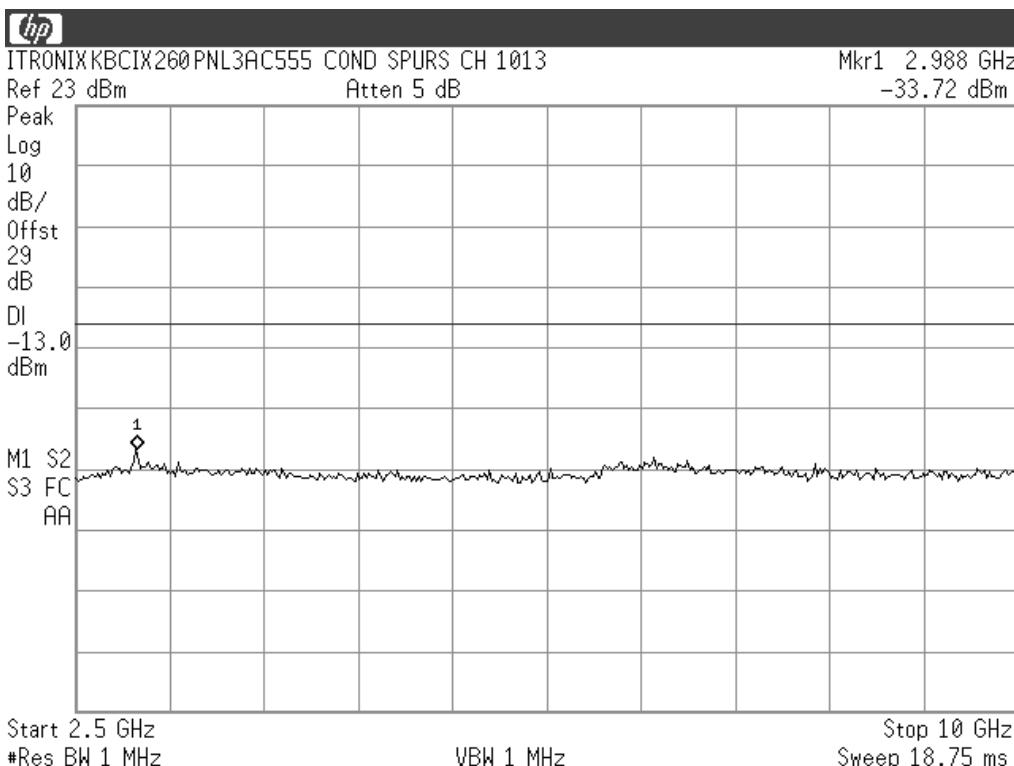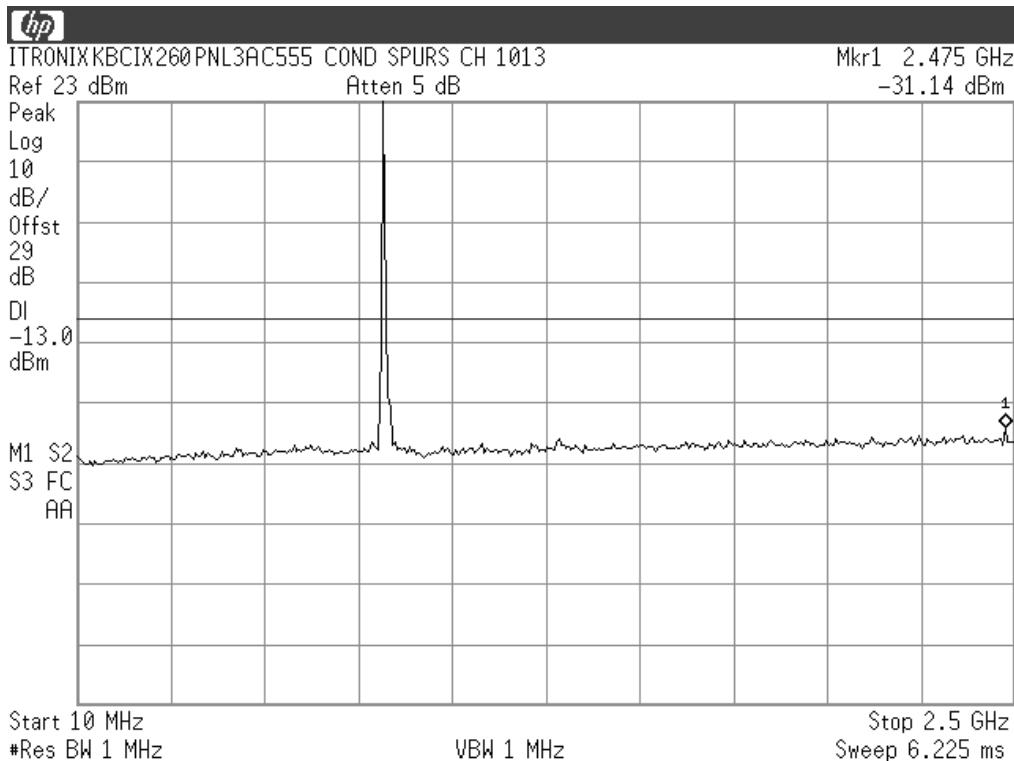

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)



B.2. MEASUREMENT DATA - Cellular Band (Cont.)

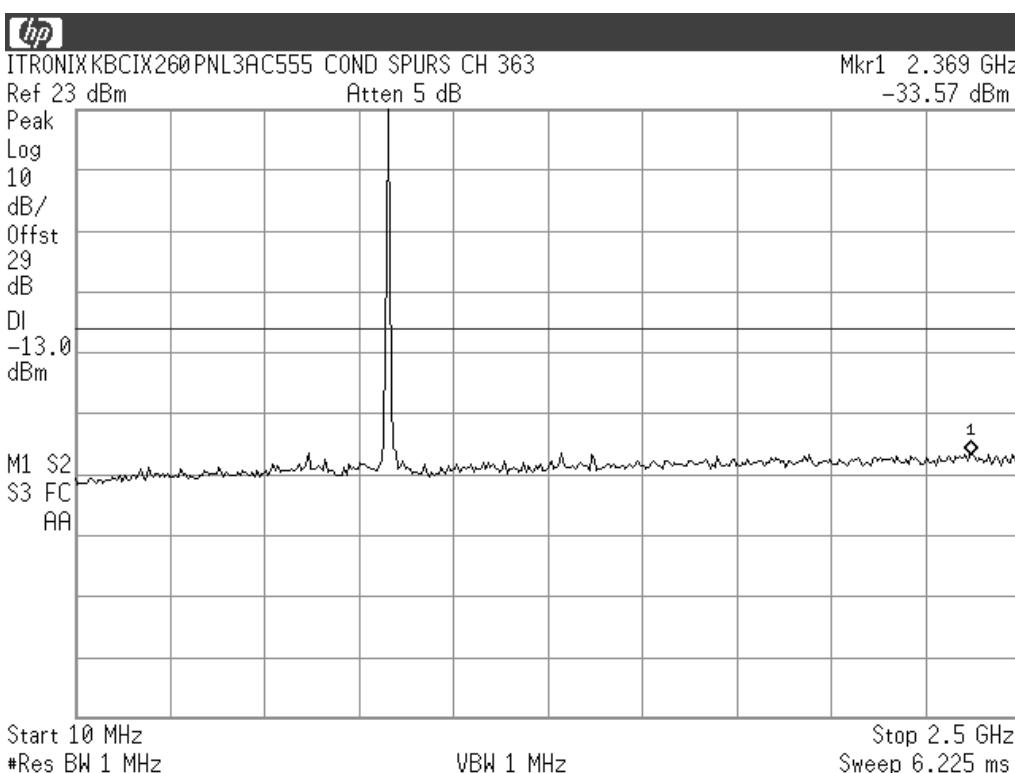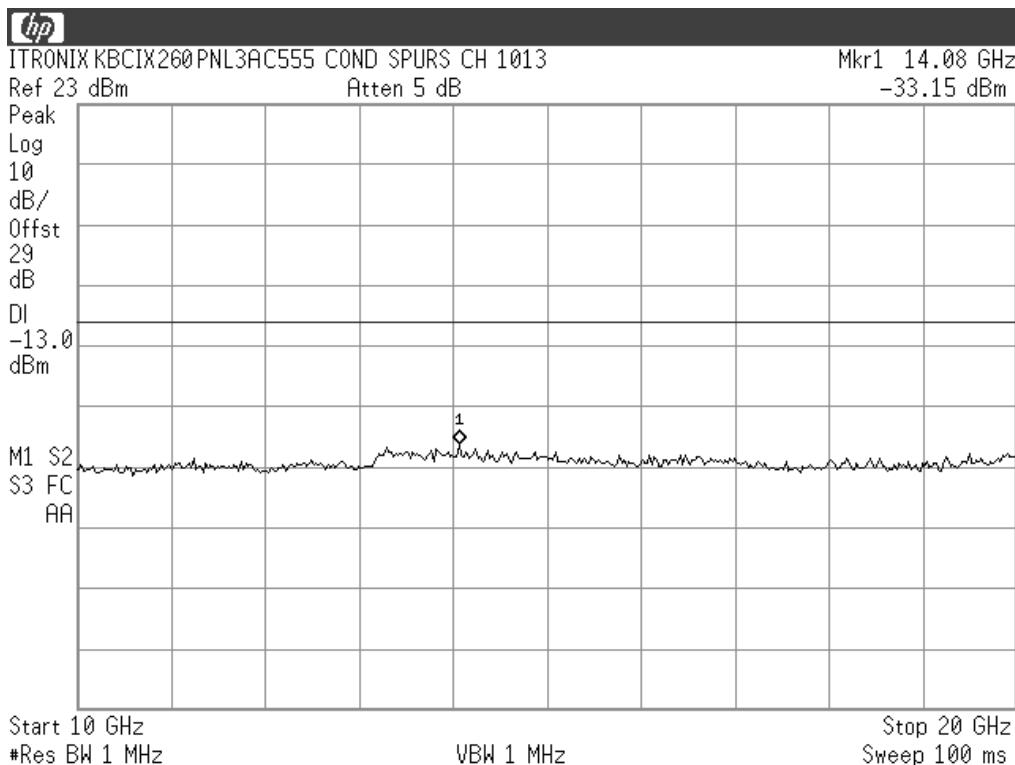

Applicant:	ITronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN						 ITRONIX	
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					13 of 50	



SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - Cellular Band (Cont.)

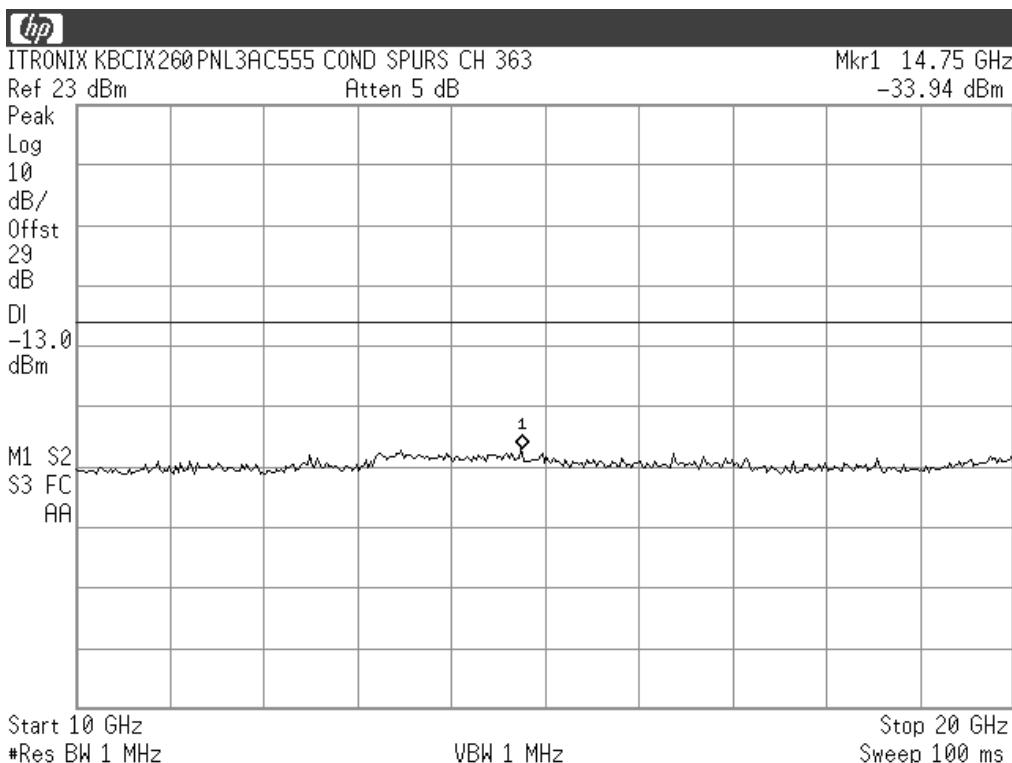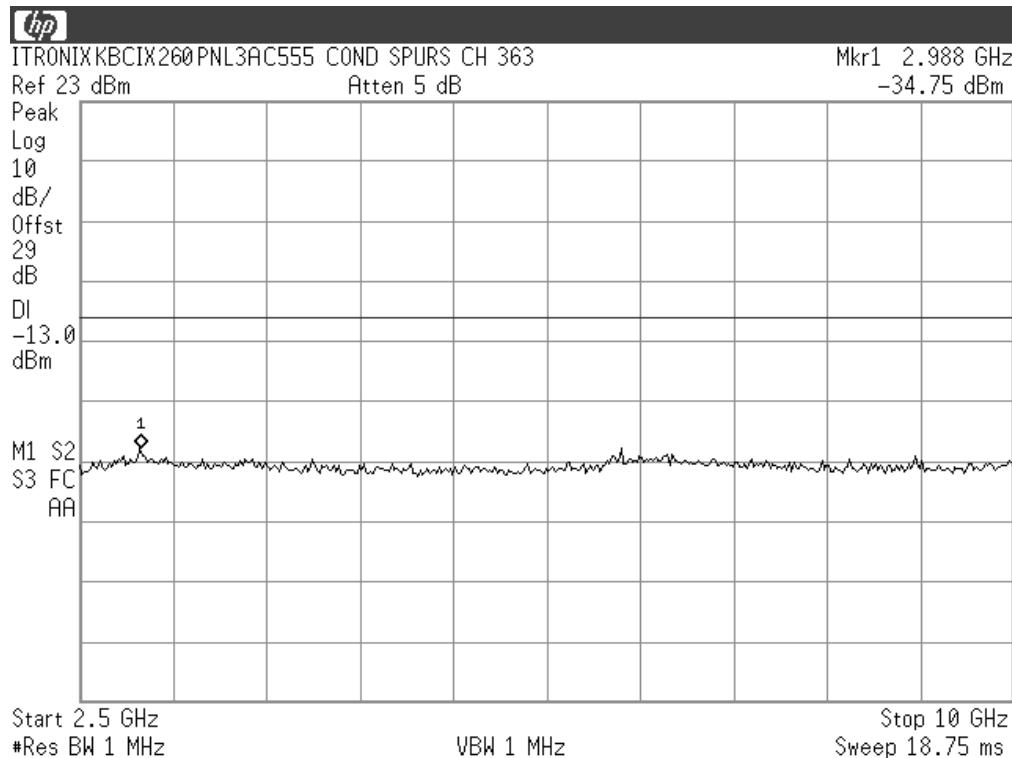

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)


B.2. MEASUREMENT DATA - Cellular Band (Cont.)

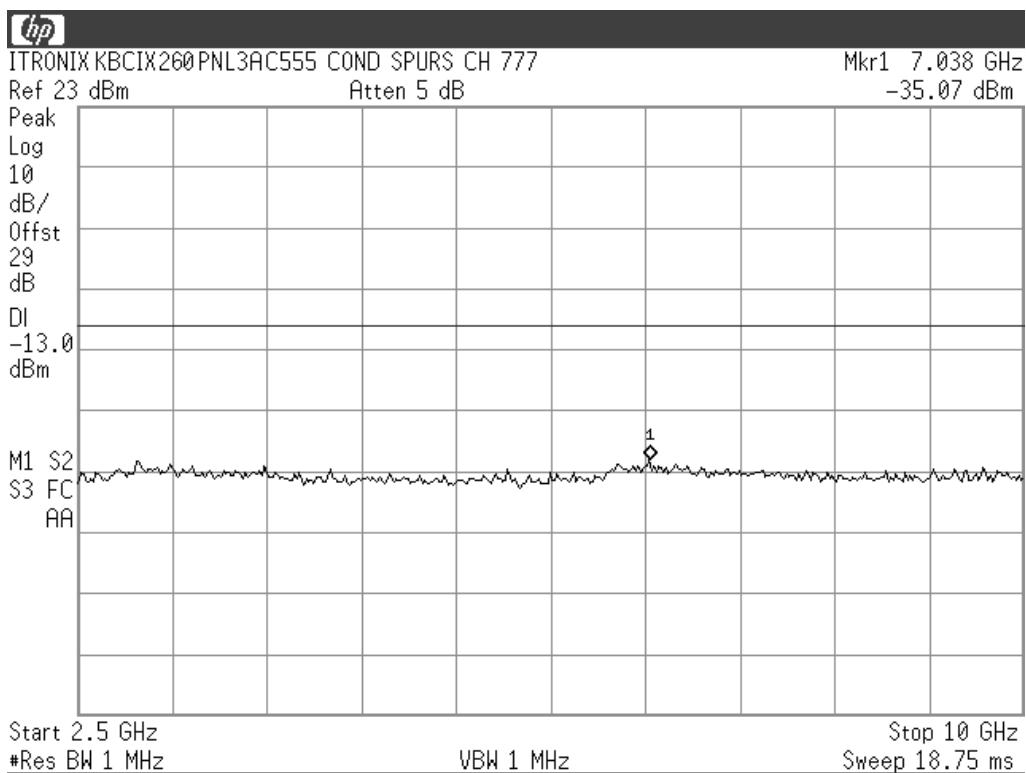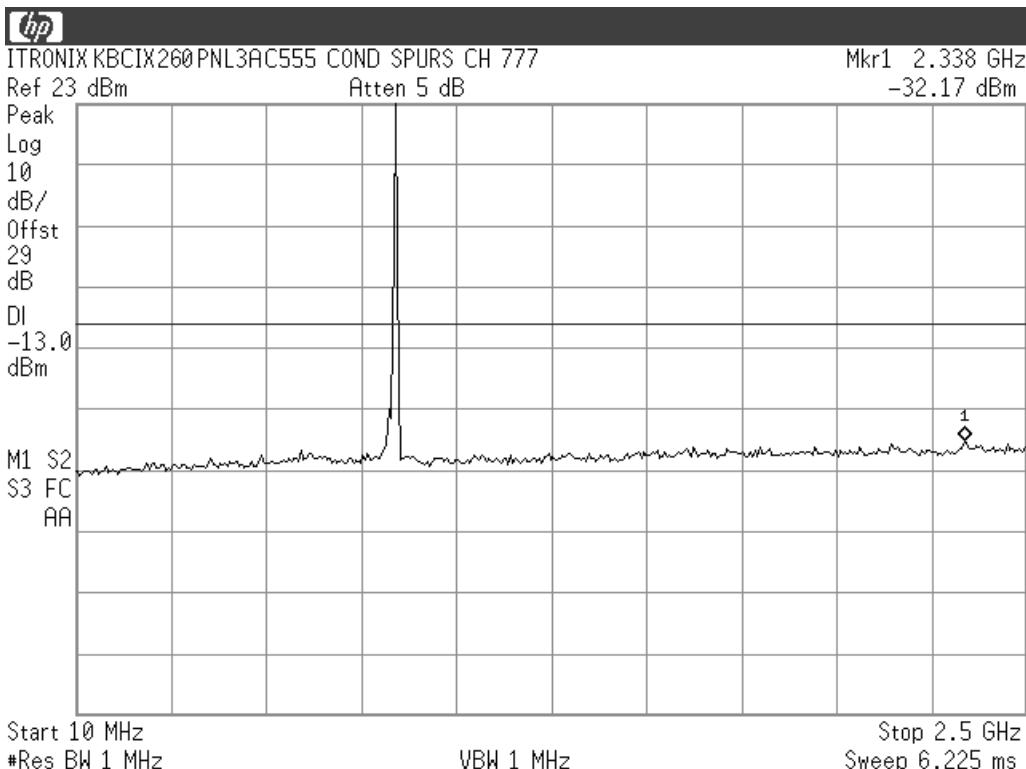

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 (Continued)

B.2. MEASUREMENT DATA - Cellular Band (Cont.)

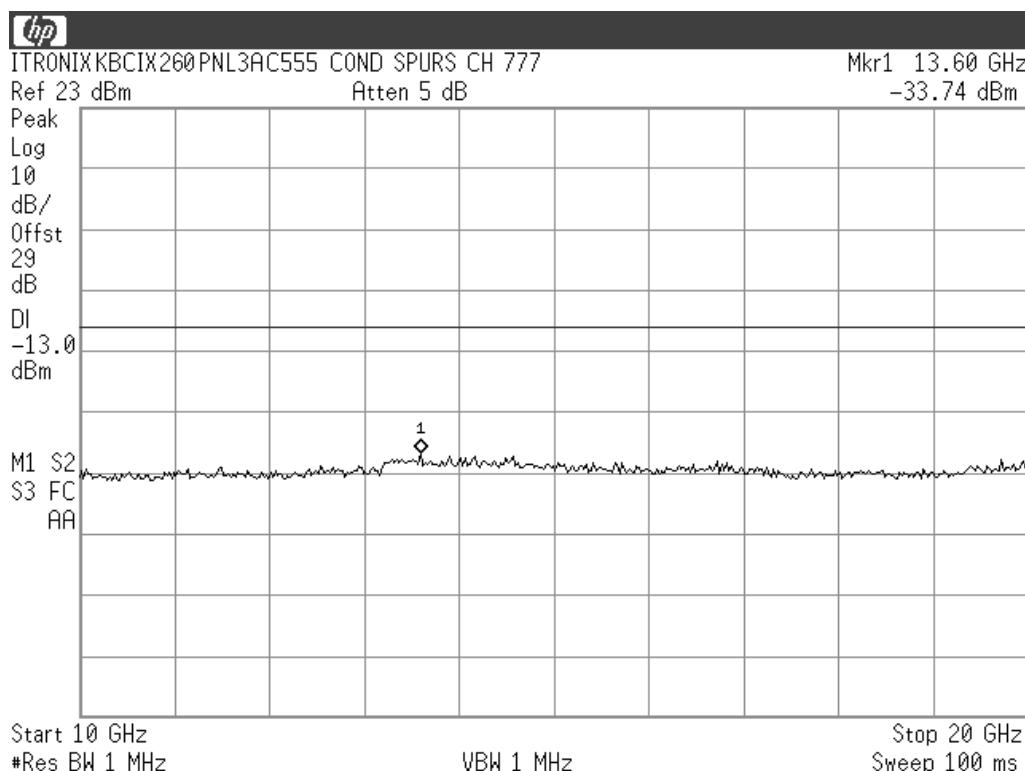

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

APPENDIX C - OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238

C.1. MEASUREMENT PROCEDURE

The Sierra Wireless AirCard 555 test software installed in the IX260+ Laptop PC was used to set the DUT to transmit in the CDMA "always up" power control mode. The DUT was connected to the input of a 50Ω spectrum analyzer through a matched 30 dB attenuator. For both PCS CDMA and cellular CDMA modes the resolution bandwidth was set to 30 kHz and the video bandwidth was set to 300 kHz.

Specified Limits:

§22.917

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.
- (d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

§24.238

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (e) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.



C.2. MEASUREMENT DATA

Frequency (MHz)	99% Occupied Bandwidth (MHz)	-26 dBc Emission Bandwidth (MHz)
1851.25	1.266	1.473
1880.00	1.269	1.483
1908.75	1.260	1.499
824.70	1.254	1.424
835.89	1.258	1.432
848.31	1.267	1.442

(See next pages for Spectrum Analyzer plots)



Applicant:	ITRONIX Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					17 of 50	

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

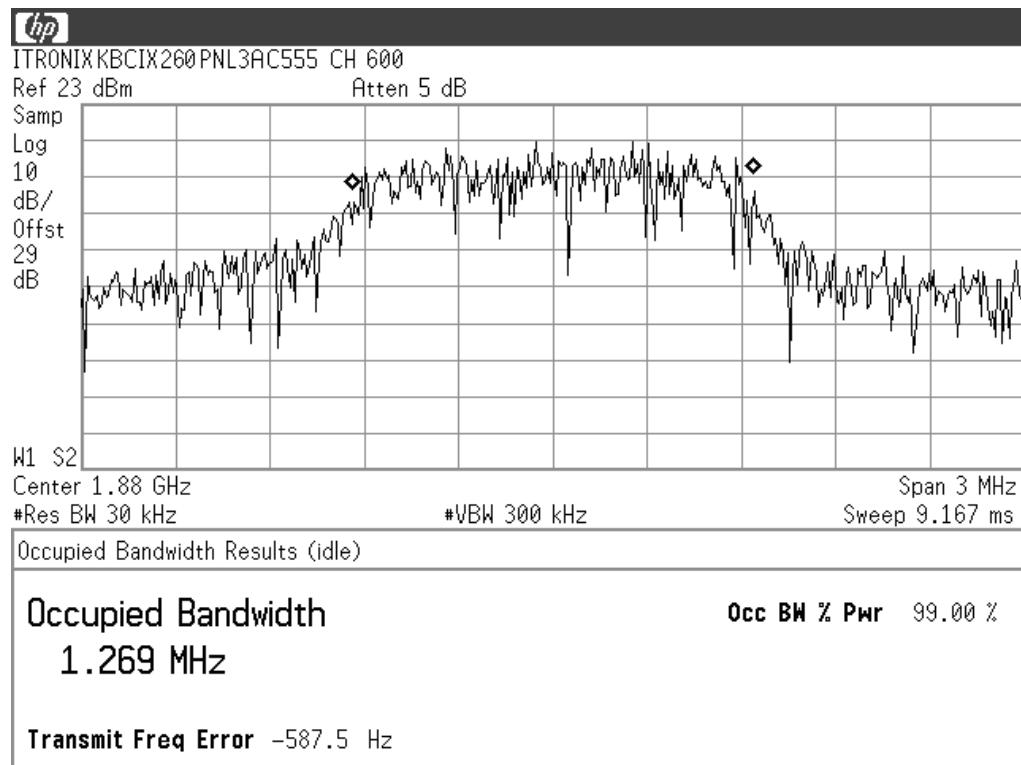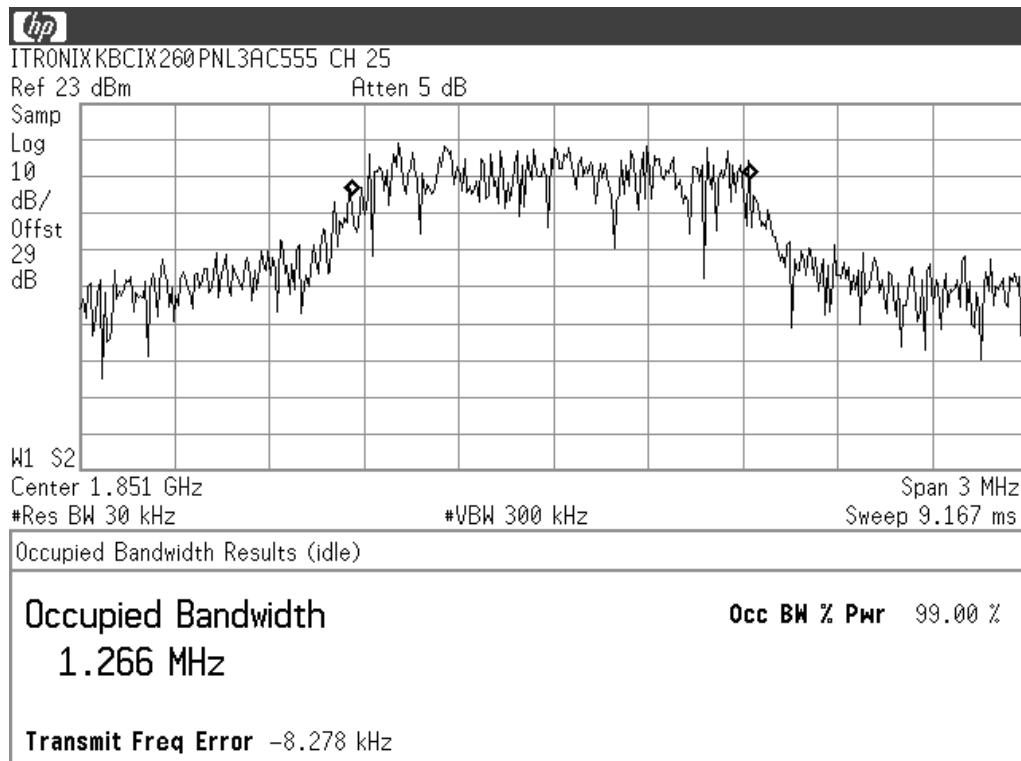OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)
C.2. MEASUREMENT DATA - PCS Band


Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					18 of 50	

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

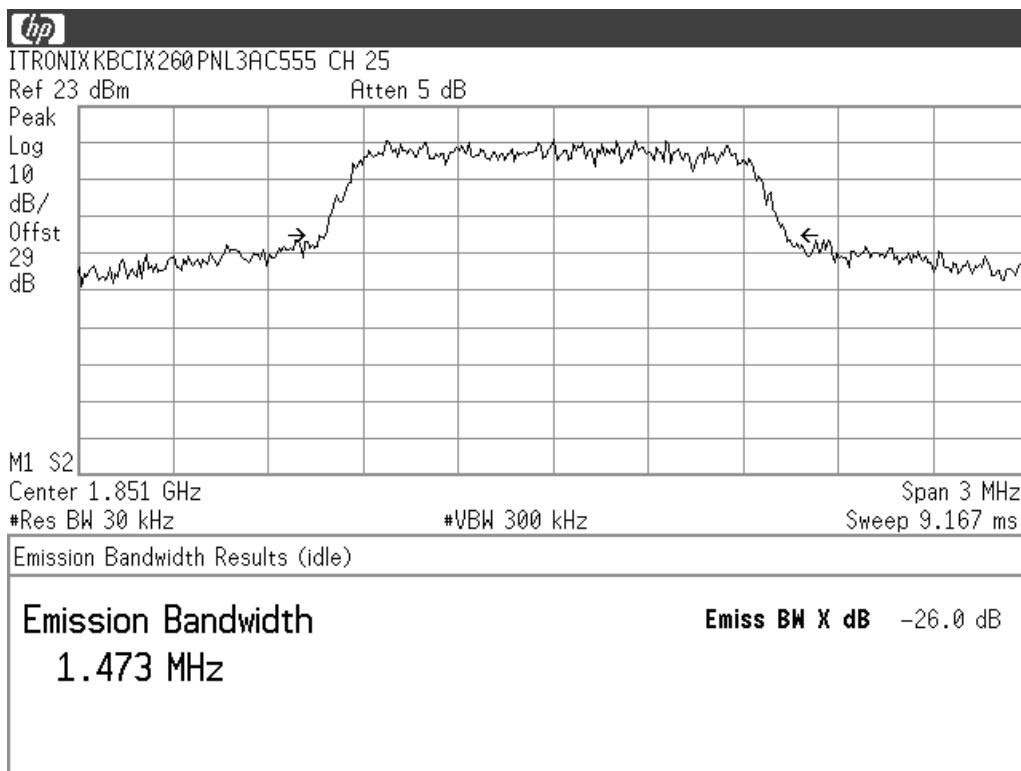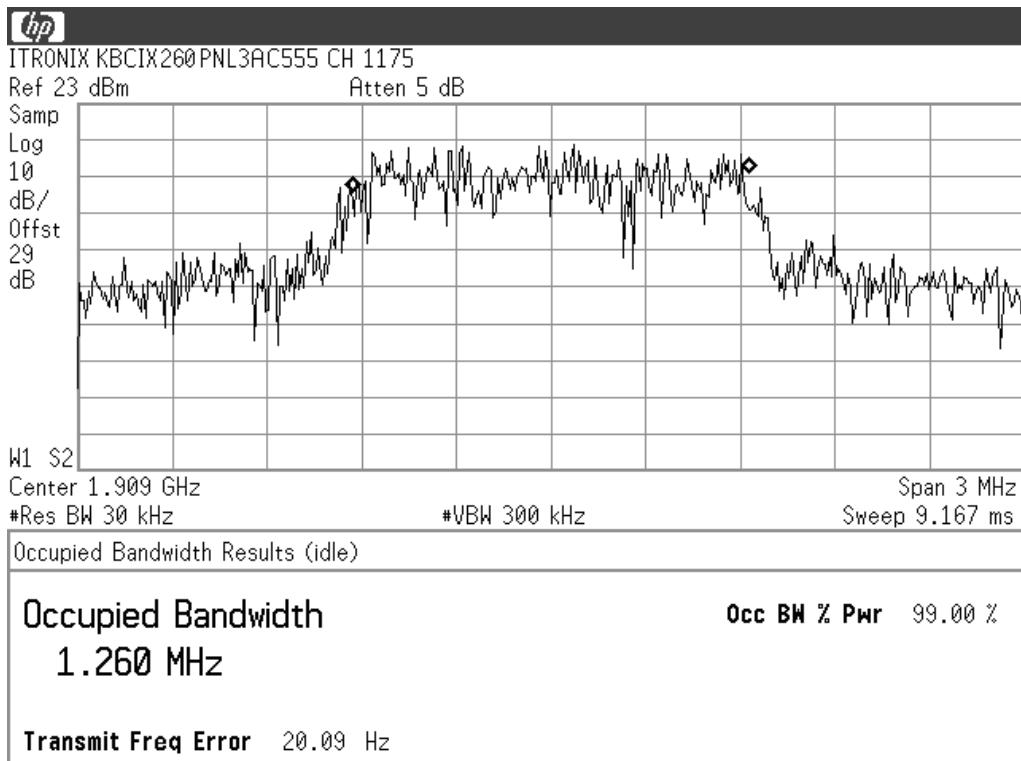
OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)
C.2. MEASUREMENT DATA - PCS Band (Cont.)


Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					19 of 50	


Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)

C.2. MEASUREMENT DATA - PCS Band (Cont.)

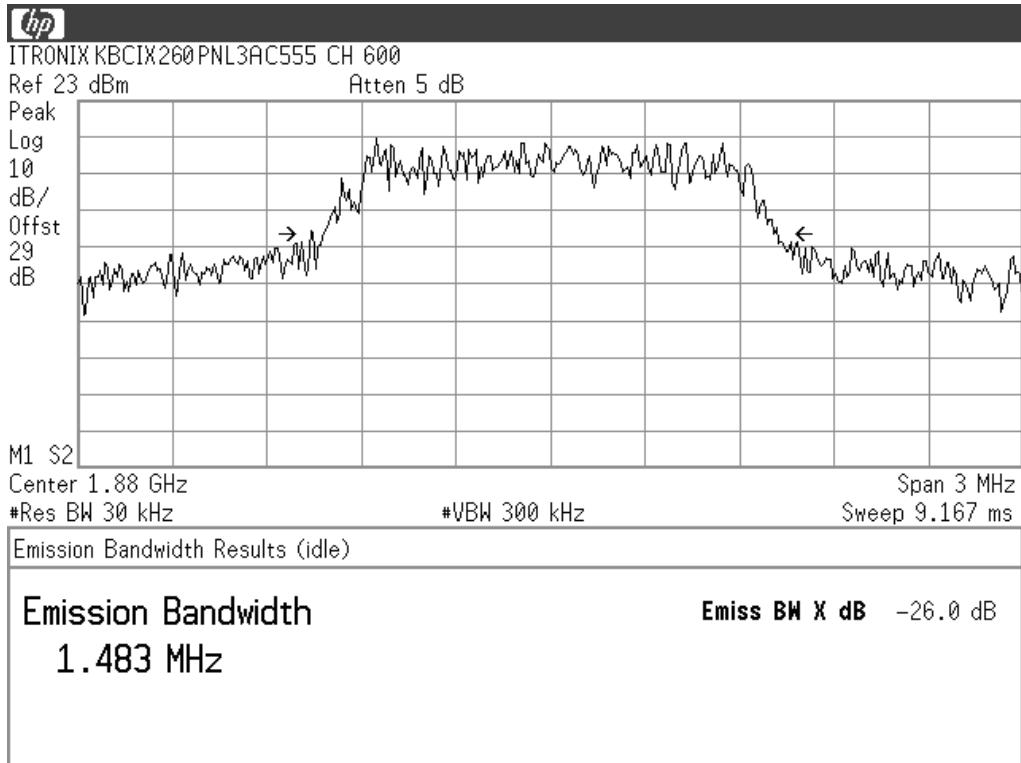



C.2. MEASUREMENT DATA - PCS Band (Cont.)

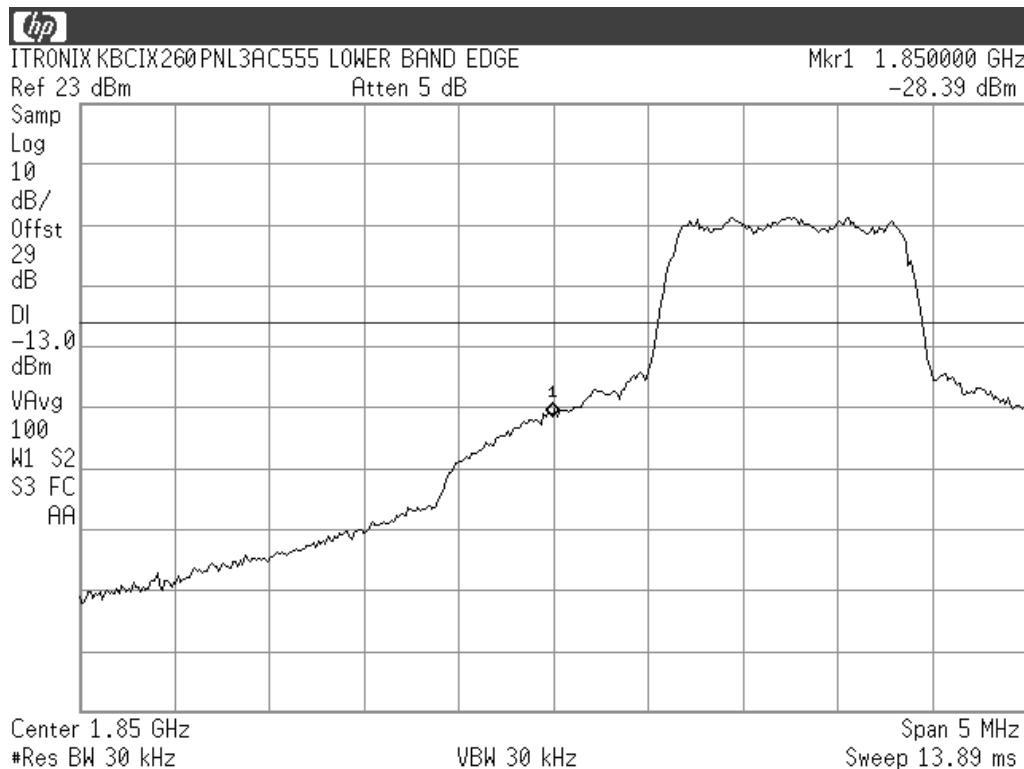

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)

C.2. MEASUREMENT DATA - Cellular Band

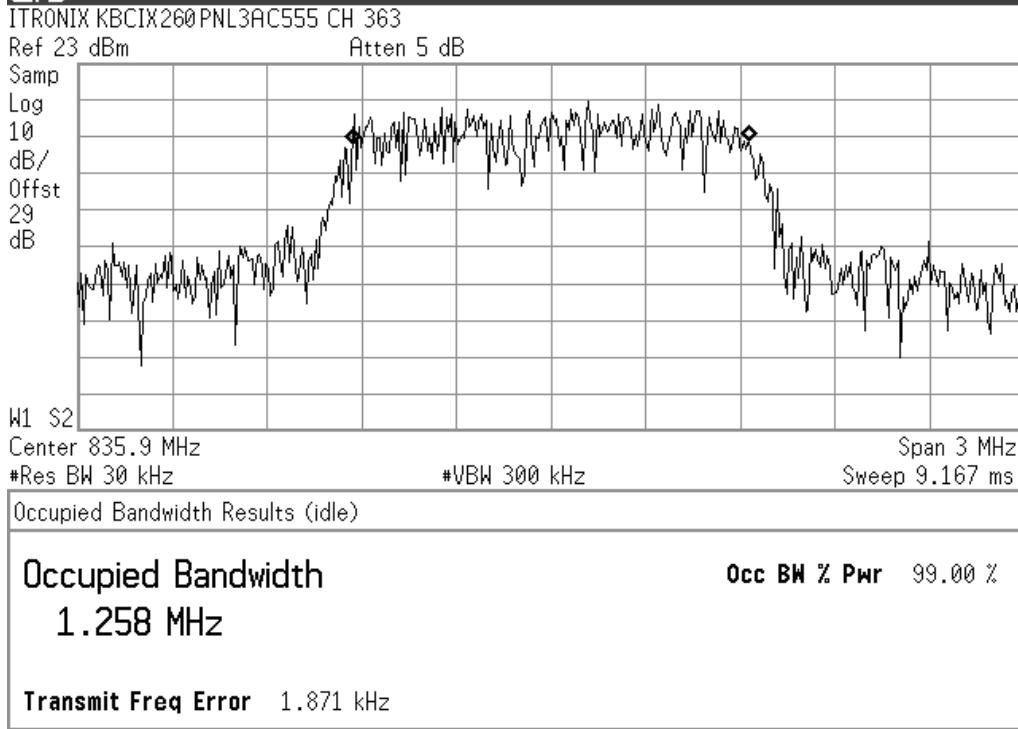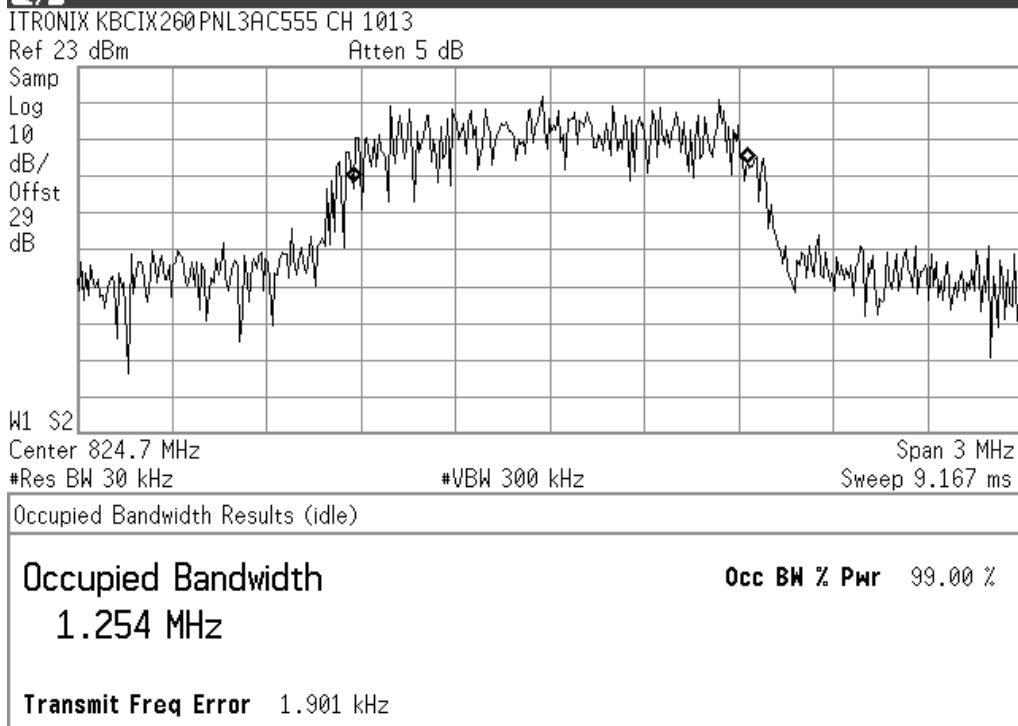

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN						 ITRONIX	
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					22 of 50	

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)

C.2. MEASUREMENT DATA - Cellular Band (Cont.)



ITRONIX KBCIX260PNL3AC555 CH 777

Ref 23 dBm

Atten 5 dB

Samp

Log

10

dB/

Offst

29

dB

W1 S2

Center 848.3 MHz

#Res BW 30 kHz

#VBW 300 kHz

Span 3 MHz

Sweep 9.167 ms

Occupied Bandwidth Results (idle)

Occupied Bandwidth
1.267 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error -1.851 kHz



ITRONIX KBCIX260PNL3AC555 CH 1013

Ref 23 dBm

Atten 5 dB

Peak

Log

10

dB/

Offst

29

dB

M1 S2

Center 824.7 MHz

#Res BW 30 kHz

#VBW 300 kHz

Span 3 MHz

Sweep 9.167 ms



Emission Bandwidth Results (measuring..)

Emission Bandwidth
1.424 MHz

Emiss BW X dB -26.0 dB

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					23 of 50	


Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

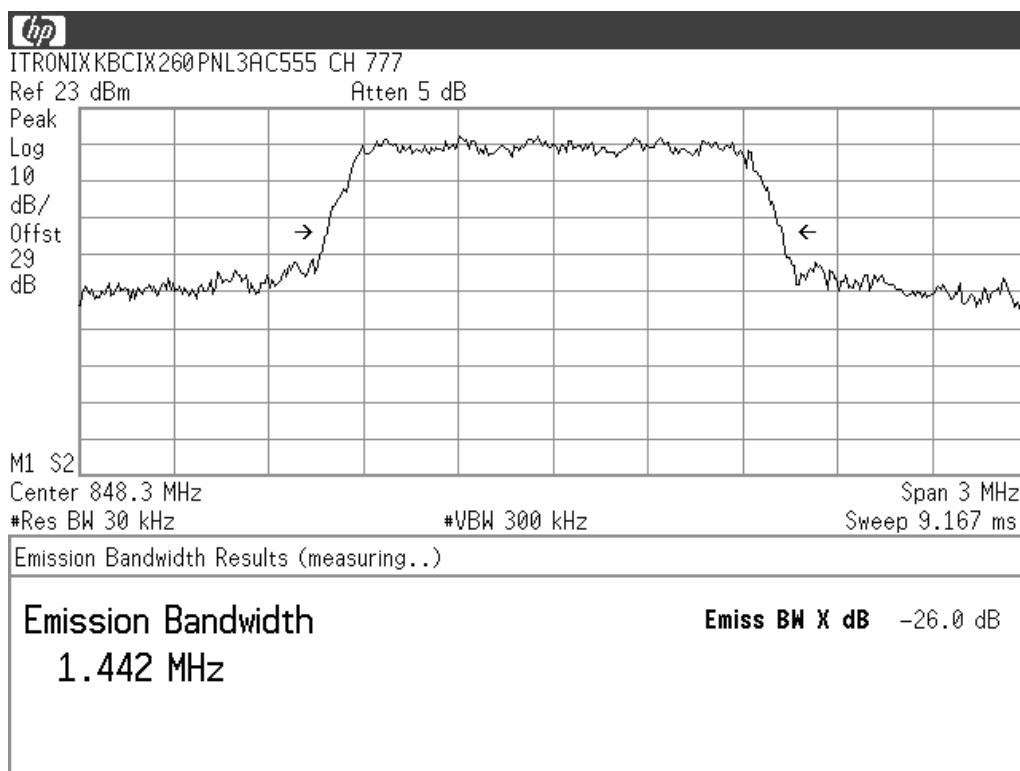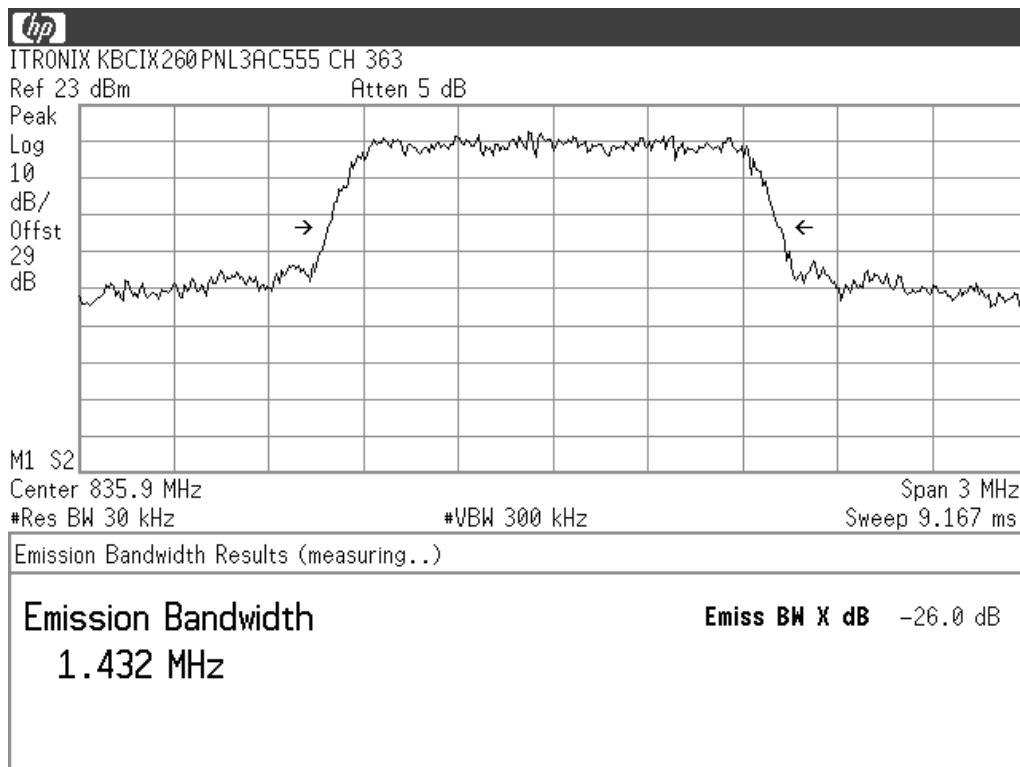OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)
C.2. MEASUREMENT DATA - Cellular Band (Cont.)


Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

OCCUPIED BANDWIDTH - §2.1049, §22.917, §24.238 (Continued)

C.2. MEASUREMENT DATA - Cellular Band (Cont.)

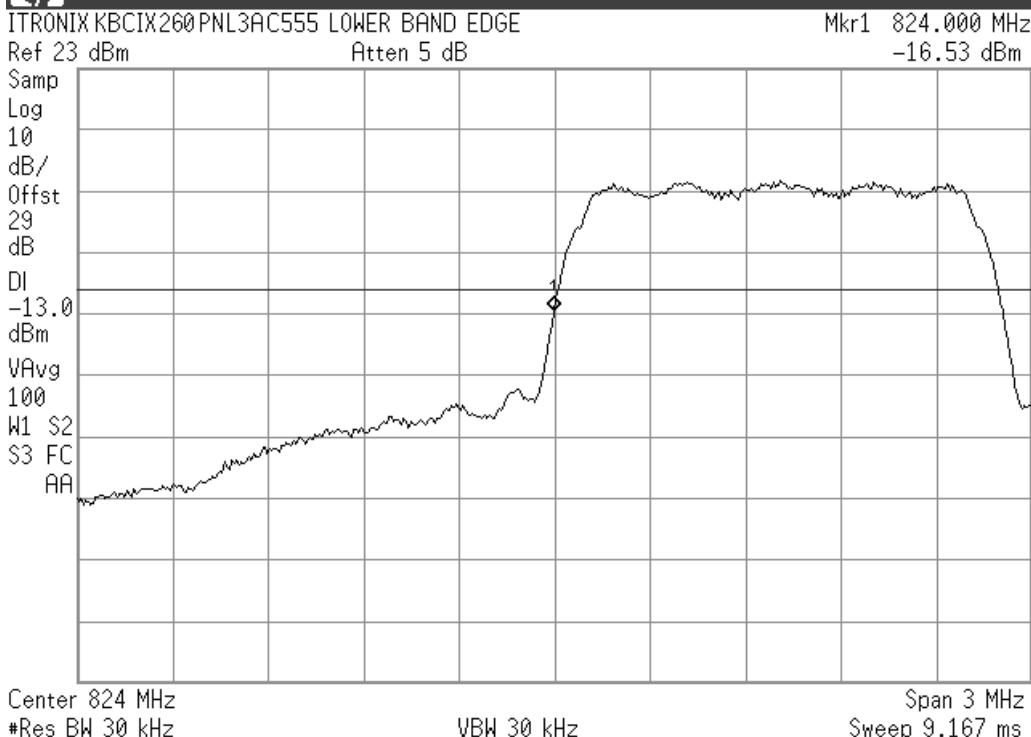

Applicant:	ITronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN						 ITRONIX	
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					25 of 50	

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

APPENDIX D - EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b)

D.1. MEASUREMENT PROCEDURE

EIRP measurements were performed on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-B-2002. The Sierra Wireless AirCard 555 test software installed in the IX260+ Laptop PC was used to set the DUT to transmit in the CDMA "always up" power control mode. The DUT was placed on a turntable 3 meters from the receive antenna. For the swivel dipole evaluation, the DUT was placed in the center of the turntable, on a Styrofoam support, 1 meter above the ground plane. For the vehicle-mount antenna evaluation, the antenna was fixed on a 50 cm x 50 cm ground plane and installed on the Styrofoam support, and connected to the transmitter via a 17-foot LMR-195 cable representing a typical vehicle mount installation. The IX260+ Laptop PC was installed in the cradle on the turntable below the 50 cm x 50 cm ground plane. The maximum field intensity was determined by rotating the DUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once the maximum emission was found, the spectrum analyzer was set to peak hold and the uncorrected emission value recorded for each of the low, mid and high channels tested. The DUT was then substituted with a horn antenna. A signal, simulating the DUT emission was generated, amplified, and fed through a directional coupler to the substitution antenna. The height and direction of the receive antenna as well as the direction of the substitution horn was adjusted for a maximum received signal. The power applied to the horn was then adjusted to give the same field strength reading as previously recorded for the DUT and the power at the forward coupler port recorded. The substitution antenna was then replaced with a calibrated power sensor, the forward coupler port power level confirmed and the power applied to the horn antenna recorded. The EIRP level was determined by correcting the applied feed point power with the addition of the horn gain.

(See next page for measurement data)

EFFECTIVE ISOTROPIC RADIATED POWER OUTPUT - §24.232(b) (Continued)

D.2. MEASUREMENT DATA

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>														
										Standard:	FCC24.232b			
										Test Start Date:	23-Aug-04			
Swivel Dipole Antenna Carrier Power Levels														
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Carrier EIRP Level	EIRP Limit	Margin	Pass/Fail		
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	Watts	dBm*	Watts	dB	
H	3	Horn SN6267	25	1851.25	123.55	91.60	18.25	6.55	24.80	0.302	33.01	2.00	8.21	PASS
H	3	Horn SN6267	600	1880.00	121.69	89.60	17.64	6.58	24.22	0.264	33.01	2.00	8.79	PASS
H	3	Horn SN6267	1175	1908.75	119.14	86.90	17.08	6.61	23.69	0.234	33.01	2.00	9.32	PASS
V	3	Horn SN6267	25	1851.25	118.35	86.40	13.42	6.55	19.98	0.099	33.01	2.00	13.03	PASS
V	3	Horn SN6267	600	1880.00	117.59	85.50	13.70	6.58	20.28	0.107	33.01	2.00	12.73	PASS
V	3	Horn SN6267	1175	1908.75	115.74	83.50	13.81	6.61	20.42	0.110	33.01	2.00	12.59	PASS
<p>Note: Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: EIRP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Power (watts) = (10^(Power in dBm/10))/1000 Margin (dB) = Limit (dBm) - Level (dBm)</p>														

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>														
										Standard:	FCC24.232b			
										Test Start Date:	23-Aug-04			
Vehicle Mount Antenna Carrier Power Levels														
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Carrier EIRP Level	EIRP Limit	Margin	Pass/Fail		
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	Watts	dBm*	Watts	dB	
H	3	Horn SN6267	25	1851.25	102.95	71.00	-1.63	6.55	4.92	0.003	33.01	2.00	28.09	PASS
H	3	Horn SN6267	600	1880.00	103.89	71.80	0.44	6.58	7.02	0.005	33.01	2.00	25.99	PASS
H	3	Horn SN6267	1175	1908.75	98.04	65.80	-3.41	6.61	3.20	0.002	33.01	2.00	29.81	PASS
V	3	Horn SN6267	25	1851.25	114.35	82.40	9.47	6.55	16.03	0.040	33.01	2.00	16.98	PASS
V	3	Horn SN6267	600	1880.00	112.79	80.70	9.07	6.58	15.65	0.037	33.01	2.00	17.36	PASS
V	3	Horn SN6267	1175	1908.75	109.54	77.30	7.80	6.61	14.40	0.028	33.01	2.00	18.61	PASS
<p>Note: Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: EIRP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Power (watts) = (10^(Power in dBm/10))/1000 Margin (dB) = Limit (dBm) - Level (dBm)</p>														

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

APPENDIX E - EFFECTIVE RADIATED POWER OUTPUT - §22.913

E.1. MEASUREMENT PROCEDURE

ERP measurements were performed on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-B-2002. The Sierra Wireless AirCard 555 test software installed in the IX260+ Laptop PC was used to set the DUT to transmit in the CDMA "always up" power control mode. The DUT was placed on a turntable, 3 meters from the receive antenna. For the swivel dipole testing, the DUT was placed in the center of the turntable, on a Styrofoam support, 1 meter above the ground plane. For the vehicle-mount antenna evaluation, the antenna was fixed on a 50 cm x 50 cm ground plane and installed on the Styrofoam support and connected to the transmitter via a 17-foot LMR-195 cable representing a typical vehicle mount installation. The IX260+ Laptop PC was installed in the cradle on the turntable below the 50 cm x 50 cm ground plane. The maximum field intensity was determined by rotating the DUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. Once the maximum emission was found, the spectrum analyzer was set to peak hold and the uncorrected emission value recorded for each of the low, mid and high channels tested. The DUT was then substituted with a dipole antenna. A signal, simulating the DUT emission was generated, amplified, and fed through a directional coupler to the substitution antenna. The height and direction of the receive antenna as well as the direction of the substitution dipole was adjusted for a maximum received signal. The power applied to the dipole was then adjusted to give the same field strength reading as previously recorded for the DUT and the power at the forward coupler port recorded. The substitution antenna was then replaced with a calibrated power sensor, the forward coupler port power level confirmed and the power applied to the dipole antenna recorded. The ERP level was determined by correcting the applied feed point power with the addition of the dipole gain.

(See next page for measurement data)

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

EFFECTIVE RADIATED POWER OUTPUT - §22.913 (Continued)

E.2. MEASUREMENT DATA

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Swivel Dipole Antenna Carrier Power Levels											
 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Carrier Power Levels			Carrier ERP Level			ERP Limit		Margin	Pass/Fail		
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	dBm*	Watts	dB	Pass/Fail		
m	MHz	dBuV/m	dBuV	dBm	dBd	dBm	Watts	dBm*	Watts	dB				
H	3	B_3121C	1013	824.70	116.17	91.00	23.79	-0.84	22.95	0.197	38.45	7.00	15.50	PASS
H	3	B_3121C	363	835.89	116.36	90.90	23.45	-0.71	22.74	0.188	38.45	7.00	15.71	PASS
H	3	B_3121C	777	848.31	115.38	89.80	23.20	-0.56	22.64	0.183	38.45	7.00	15.81	PASS
V	3	B_3121C	1013	824.70	113.17	88.00	25.70	-0.84	24.86	0.306	38.45	7.00	13.59	PASS
V	3	B_3121C	363	835.89	113.46	88.00	24.66	-0.71	23.95	0.248	38.45	7.00	14.50	PASS
V	3	B_3121C	777	848.31	113.48	87.90	23.09	-0.56	22.53	0.179	38.45	7.00	15.92	PASS
<p>Note: Dipole Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: ERP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm) Power (watts) = (10^(Power in dBm/10))/1000</p>														

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Vehicle Mount Antenna Carrier Power Levels											
 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Carrier Power Levels			Carrier ERP Level			ERP Limit		Margin	Pass/Fail		
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	dBm*	Watts	dB	Pass/Fail		
m	MHz	dBuV/m	dBuV	dBm	dBd	dBm	Watts	dBm*	Watts	dB				
H	3	B_3121C	1013	824.70	102.97	77.80	11.09	-0.84	10.25	0.011	38.45	7.00	28.20	PASS
H	3	B_3121C	363	835.89	104.36	78.90	11.93	-0.71	11.22	0.013	38.45	7.00	27.23	PASS
H	3	B_3121C	777	848.31	102.98	77.40	11.32	-0.56	10.76	0.012	38.45	7.00	27.69	PASS
V	3	B_3121C	1013	824.70	109.27	84.10	21.97	-0.84	21.12	0.129	38.45	7.00	17.33	PASS
V	3	B_3121C	363	835.89	111.06	85.60	22.36	-0.71	21.65	0.146	38.45	7.00	16.80	PASS
V	3	B_3121C	777	848.31	110.68	85.10	20.40	-0.56	19.84	0.096	38.45	7.00	18.61	PASS
<p>Note: Dipole Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: ERP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm) Power (watts) = (10^(Power in dBm/10))/1000</p>														

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						29 of 50

APPENDIX F - FIELD STRENGTH OF SPURIOUS RADIATION - §24.238, 22.917

F.1. MEASUREMENT PROCEDURE

EIRP measurements were performed on a 3-meter open area test site using the Signal Substitution Method in accordance with ANSI TIA/EIA-603-B-2002. The Sierra Wireless AirCard 555 test software installed in the IX260+ Laptop PC was used to set the DUT to transmit in the CDMA "always up" power control mode. For the swivel dipole testing, the DUT was placed in the center of the turntable, on a Styrofoam support, 1 meter above the ground plane. For the vehicle-mount antenna evaluation, the antenna was fixed on a 50 cm x 50 cm ground plane and installed on the Styrofoam support and connected to the transmitter via a 17-foot LMR-195 cable representing a typical vehicle mount installation. The IX260+ Laptop PC was installed in the cradle on the turntable below the 50 cm x 50 cm ground plane. A frequency band from just above the highest transmitted frequency to just above the 10th harmonic of the highest transmitted frequency was divided into smaller bands corresponding to measurement equipment setups and capabilities. The measurement equipment including carrier blocking filters, was optimized for maximum sensitivity for each band while ensuring no saturation occurred in any gain stages that may be present. It was also necessary to measure the bands above 10 GHz at a distance of 1 meter versus the 3-meter measurement distance used for the lower bands. The applicable bands were chosen from: 800 MHz to 1 GHz, 1 GHz to 5 GHz, 5 GHz to 10 GHz, 10 GHz to 18 GHz and 18 GHz to 20 GHz. The maximum field intensity in each of these bands were determined by rotating the DUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters while maintaining the spectrum analyzer trace in max hold. The stored trace was then evaluated to determine any significant emissions that should be evaluated by substitution. The frequency and uncorrected field strength level for each significant emission was recorded. To describe the noise floor, the maximum level associated with a number of frequencies within the band were also recorded. The DUT was then substituted with a transmit antenna. A signal simulating the DUT emission was generated for each of the signals recorded; it was amplified and fed through a directional coupler to the substitution antenna. The height and direction of the receive antenna as well as the direction of the substitution horn was adjusted for a maximum received signal. The power applied to the transmit antenna was then adjusted to give the same field strength reading as previously recorded for the DUT and the power at the forward coupler port recorded. The substitution antenna was then replaced with a calibrated power sensor, the forward coupler port power level confirmed and the power applied to the horn antenna recorded. The radiated power level was determined by correcting the applied feed point power with the addition of the antenna gain.

(See next pages for measurement data)

F.2. MEASUREMENT SETUP

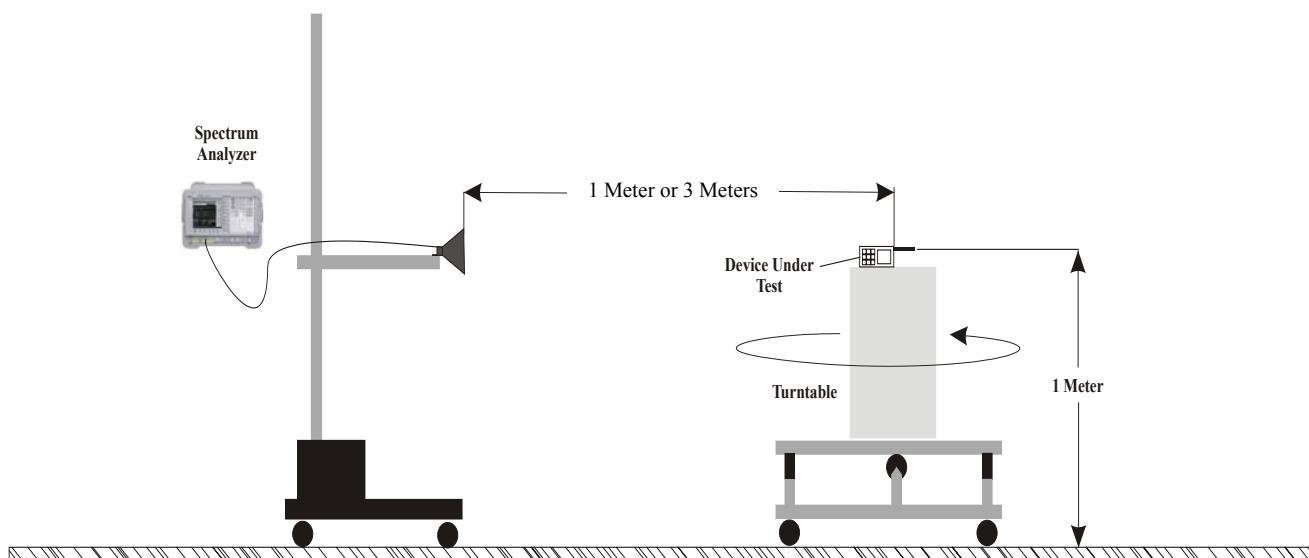


Figure 1. Radiated Measurement Test Setup Diagram
(3 Meters for Frequencies < 10 GHz - 1 Meter for Frequencies \geq 10 GHz)

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band

 <p>Celltech Testing and Engineering Services Lab</p>			Project Number:	052604-519			Standard:	FCC24.238				
			Company:	Itronix			Test Start Date:	26-Jul-04				
			Product:	IX260+ w/ AC555			Test End Date:	13-Aug-04				
Swivel Dipole Antenna Low Channel (Channel 25), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	25	5553.75	48.90	42.50	-54.39	8.66	-45.73	-13.00	32.73	PASS
H	3	Horn SN6267	25	7405.00	51.81	42.50	-55.54	8.98	-46.56	-13.00	33.56	PASS
H	3	Horn SN6267	25	9256.25	53.27	41.50	-54.59	9.06	-45.53	-13.00	32.53	PASS
H	3	Horn SN6267	25	9340.00	64.23	52.40	-38.88	9.14	-29.74	-13.00	16.74	PASS
H	1	Horn SN6267	25	11107.50	49.41	37.30	-64.39	10.45	-53.94	-13.00	40.94	PASS
H	1	Horn SN6267	25	12958.75	58.55	44.50	-64.20	10.64	-53.56	-13.00	40.56	PASS
H	1	Horn SN6267	25	14810.00	59.54	44.10	-64.00	11.06	-52.94	-13.00	39.94	PASS
H	1	Horn SN6267	25	16661.25	62.26	45.90	-64.48	12.58	-51.90	-13.00	38.90	PASS
H	1	Horn SN6267	25	17960.00	66.42	46.30	-57.96	8.08	-49.88	-13.00	36.88	PASS
H	1	3160-09	25	18512.50	58.56	43.70	-64.23	15.31	-48.93	-13.00	35.93	PASS
H	1	3160-09	25	19978.00	60.65	44.30	-58.57	15.99	-42.58	-13.00	29.58	PASS
V	3	Horn SN6267	25	5794.38	56.99	50.40	-41.89	8.95	-32.94	-13.00	19.94	PASS
V	1	Horn SN6267	25	11107.50	50.61	38.50	-64.63	10.45	-54.18	-13.00	41.18	PASS
V	1	Horn SN6267	25	12920.00	60.38	46.30	-63.67	10.68	-52.99	-13.00	39.99	PASS
V	1	Horn SN6267	25	12958.75	59.75	45.70	-63.66	10.64	-53.02	-13.00	40.02	PASS
V	1	Horn SN6267	25	14810.00	59.14	43.70	-63.72	11.06	-52.66	-13.00	39.66	PASS
V	1	Horn SN6267	25	14816.00	61.63	46.20	-61.60	11.06	-50.54	-13.00	37.54	PASS
V	1	Horn SN6267	25	16661.25	62.46	46.10	-64.84	12.58	-52.26	-13.00	39.26	PASS
V	1	3160-09	25	18512.50	57.96	43.10	-64.11	15.31	-48.81	-13.00	35.81	PASS
V	1	3160-09	25	19984.00	60.44	44.10	-60.63	15.99	-44.64	-13.00	31.64	PASS
Note: All bands were investigated and the significant worstcase emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi												
Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm EIRP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)												

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ w/ AC555</p>	Swivel Dipole Antenna Mid Channel (Channel 600), Spurious Emissions												
	Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail
		m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	600		3760.00	53.81	51.20	-44.22	8.05	-36.17	-13.00	23.17	PASS
H	3	Horn SN6267	600		5273.13	60.80	54.90	-39.61	8.60	-31.01	-13.00	18.01	PASS
H	1	Horn SN6267	600		11280.00	48.90	36.90	-63.94	10.69	-53.25	-13.00	40.25	PASS
H	1	Horn SN6267	600		13160.00	58.11	43.50	-63.89	10.70	-53.19	-13.00	40.19	PASS
H	1	Horn SN6267	600		15040.00	59.95	44.70	-64.11	11.29	-52.82	-13.00	39.82	PASS
H	1	Horn SN6267	600		16920.00	61.13	44.10	-65.21	11.91	-53.30	-13.00	40.30	PASS
H	1	Horn SN6267	600		17944.00	66.53	46.50	-59.09	8.15	-50.94	-13.00	37.94	PASS
II	1	3160-09	600		18800.00	59.87	44.30	-61.15	15.42	-45.73	-13.00	32.73	PASS
H	1	3160-09	600		19930.00	60.43	44.10	-57.86	15.97	-41.89	-13.00	28.89	PASS
V	3	Horn SN6267	600		9400.00	52.95	41.10	-55.96	9.20	-46.76	-13.00	33.76	PASS
V	1	Horn SN6267	600		11280.00	48.10	36.10	-64.74	10.69	-54.05	-13.00	41.05	PASS
V	1	Horn SN6267	600		13160.00	58.31	43.70	-64.27	10.70	-53.57	-13.00	40.57	PASS
V	1	Horn SN6267	600		15040.00	59.55	44.30	-63.61	11.29	-52.32	-13.00	39.32	PASS
V	1	Horn SN6267	600		16920.00	61.93	44.90	-63.27	11.91	-51.36	-13.00	38.36	PASS
V	1	Horn SN6267	600		17744.00	66.17	46.70	-59.08	9.03	-50.05	-13.00	37.05	PASS
V	1	3160-09	600		18800.00	58.67	43.10	-61.71	15.42	-46.29	-13.00	33.29	PASS
V	1	3160-09	600		19934.00	61.23	44.90	-57.81	15.97	-41.84	-13.00	28.84	PASS
<p>Note: All bands were investigated and the significant worst case emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm EIRP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)</p>													

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ w/ AC555</p>			Swivel Dipole Antenna High Channel (Channel 1175), Spurious Emissions													
			Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail	
	m							MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	1175	3818.13	66.41	63.60	-30.46	8.04	-22.42	-13.00	9.42	PASS				
H	1	Horn SN6267	1175	11452.50	50.98	38.90	-63.52	10.93	-52.59	-13.00	39.59	PASS				
H	1	Horn SN6267	1175	13361.25	59.20	44.30	-63.83	10.82	-53.01	-13.00	40.01	PASS				
H	1	Horn SN6267	1175	15270.00	60.29	45.70	-63.45	12.40	-51.05	-13.00	38.05	PASS				
H	1	Horn SN6267	1175	17178.75	63.42	45.50	-64.99	11.13	-53.86	-13.00	40.86	PASS				
H	1	Horn SN6267	1175	17968.00	66.68	46.50	-60.12	8.04	-52.08	-13.00	39.08	PASS				
H	1	3160-09	1175	19087.50	58.59	43.30	-60.45	15.55	-44.90	-13.00	31.90	PASS				
II	1	3160-09	1175	19904.00	60.84	44.50	-59.93	15.99	-43.94	-13.00	30.94	PASS				
V	3	Horn SN6267	1175	7937.50	55.00	44.90	-55.79	9.25	-46.54	-13.00	33.54	PASS				
V	1	Horn SN6267	1175	11452.50	49.78	37.70	-64.35	10.93	-53.42	-13.00	40.42	PASS				
V	1	Horn SN6267	1175	13361.25	58.80	43.90	-64.11	10.82	-53.29	-13.00	40.29	PASS				
V	1	Horn SN6267	1175	15270.00	59.69	45.10	-63.64	12.40	-51.24	-13.00	38.24	PASS				
V	1	Horn SN6267	1175	17178.75	63.62	45.70	-55.42	11.13	-44.29	-13.00	31.29	PASS				
V	1	Horn SN6267	1175	17904.00	66.00	46.10	-47.04	8.32	-38.72	-13.00	25.72	PASS				
V	1	3160-09	1175	19087.50	58.59	43.30	-59.27	15.55	-43.72	-13.00	30.72	PASS				
V	1	3160-09	1175	19948.00	60.85	44.50	-59.03	15.98	-43.05	-13.00	30.05	PASS				
<p>Note: All bands were investigated and the significant worstcase emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = 43 + 10*log(Fundamental Power Level, in watts) below the Fundamental peak power => -13 dBm EIRP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)</p>																

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Standard:	FCC24.238								
			Test Start Date:	26-Jul-04								
			Test End Date:	13-Aug-04								
Vehicle Mount Antenna Low Channel (Channel 25), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	1	Horn SN6267	25	11107.50	49.61	37.50	-62.22	10.45	-51.77	-13.00	38.77	PASS
H	1	Horn SN6267	25	12958.75	58.15	44.10	-62.70	10.64	-52.06	-13.00	39.06	PASS
H	1	Horn SN6267	25	14810.00	58.14	42.70	-61.71	11.06	-50.65	-13.00	37.65	PASS
H	1	Horn SN6267	25	16661.25	57.86	41.50	-62.06	12.58	-49.48	-13.00	36.48	PASS
H	1	Horn SN6267	25	17998.00	65.10	44.70	-60.81	7.91	-52.90	-13.00	39.90	PASS
H	1	3160-09	25	18512.50	57.36	42.50	-63.51	15.31	-48.21	-13.00	35.21	PASS
H	1	3160-09	25	19994.00	60.24	43.90	-56.60	16.00	-40.60	-13.00	27.60	PASS
V	3	Horn SN6267	25	3702.50	51.25	48.80	-48.99	8.06	-40.93	-13.00	27.93	PASS
V	1	Horn SN6267	25	11107.50	50.41	38.30	-62.27	10.45	-51.82	-13.00	38.82	PASS
V	1	Horn SN6267	25	12958.75	57.15	43.10	-62.68	10.64	-52.04	-13.00	39.04	PASS
V	1	Horn SN6267	25	14810.00	57.74	42.30	-62.44	11.06	-51.38	-13.00	38.38	PASS
V	1	Horn SN6267	25	16661.25	58.06	41.70	-62.09	12.58	-49.51	-13.00	36.51	PASS
V	1	Horn SN6267	25	17994.00	64.07	43.70	-58.14	7.93	-50.21	-13.00	37.21	PASS
V	1	3160-09	25	18512.50	57.76	42.90	-61.77	15.31	-46.47	-13.00	33.47	PASS
V	1	3160-09	25	19996.00	59.64	43.30	-57.56	16.00	-41.56	-13.00	28.56	PASS
<p>Note: All bands were investigated and the worse case significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm EIRP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)</p>												

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band (Cont.)

 <p>Project Number: Company: Product:</p>		052604-519								Standard: Test Start Date: Test End Date:		
		Itronix		IX260+ with AC555				FCC24.238 26-Jul-04 13-Aug-04				
Vehicle Mount Antenna Mid Channel (Channel 600), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	600	5981.88	51.85	45.10	-52.02	9.18	-42.84	-13.00	29.84	PASS
H	1	Horn SN6267	600	11280.00	50.90	38.90	-62.45	10.69	-51.76	-13.00	38.76	PASS
H	1	Horn SN6267	600	13160.00	56.71	42.10	-62.52	10.70	-51.82	-13.00	38.82	PASS
H	1	Horn SN6267	600	13558.00	60.71	45.90	-62.55	10.92	-51.63	-13.00	38.63	PASS
H	1	Horn SN6267	600	15040.00	57.95	42.70	-62.38	11.29	-51.09	-13.00	38.09	PASS
H	1	Horn SN6267	600	16920.00	60.33	43.30	-61.90	11.91	-49.99	-13.00	36.99	PASS
H	1	3160-09	600	18800.00	58.27	42.70	-57.84	15.42	-42.42	-13.00	29.42	PASS
II	1	3160-09	600	19974.00	61.05	44.70	-55.77	15.99	-39.78	-13.00	26.78	PASS
V	3	Horn SN6267	600	5640.00	44.14	37.70	-42.99	8.77	-34.22	-13.00	21.22	PASS
V	1	Horn SN6267	600	11280.00	50.10	38.10	-62.24	10.69	-51.55	-13.00	38.55	PASS
V	1	3160-09	600	19942.00	61.44	45.10	-56.65	15.98	-40.67	-13.00	27.67	PASS
Note: All bands were investigated and the worse case significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi Formulae: Limit = 43 + 10*log(Fundamental Power Level, in watts) below the Fundamental peak power => -13 dBm EIRP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)												

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						35 of 50

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §24.238 (Continued)

F.3. MEASUREMENT DATA - PCS Band (Cont.)

			Project Number:		052604-519		Standard:		FCC24.238			
					Company:		Test Start Date:		20-Jul-04			
			Product:		IX260+ with AC555		Test End Date:		13-Aug-04			
Vehicle Mount Antenna High Channel (Channel 1175), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission EIRP Level	EIRP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	1	Horn SN6267	1175	11452.50	50.78	38.70	-62.41	10.93	-51.48	-13.00	38.48	PASS
H	1	Horn SN6267	1175	13361.25	59.00	44.10	-62.92	10.82	-52.10	-13.00	39.10	PASS
H	1	Horn SN6267	1175	15270.00	58.49	43.90	-61.91	12.40	-49.51	-13.00	36.51	PASS
H	1	Horn SN6267	1175	17178.75	60.62	42.70	-61.72	11.13	-50.59	-13.00	37.59	PASS
H	1	Horn SN6267	1175	17996.00	65.08	44.70	-60.12	7.92	-52.20	-13.00	39.20	PASS
H	1	3160-09	1175	19087.50	58.59	43.30	-57.25	15.55	-41.70	-13.00	28.70	PASS
H	1	3160-09	1175	19928.00	60.62	44.30	-54.73	15.97	-38.76	-13.00	25.76	PASS
V	3	Horn SN6267	1175	3010.13	55.71	52.90	-39.02	8.04	-30.96	-13.00	17.90	PASS
V	1	Horn SN6267	1175	11452.50	50.18	38.10	-62.46	10.93	-51.53	-13.00	38.53	PASS
V	1	Horn SN6267	1175	13361.25	57.80	42.90	-62.81	10.82	-51.99	-13.00	38.99	PASS
V	1	Horn SN6267	1175	15270.00	58.09	43.50	-61.73	12.40	-49.33	-13.00	36.33	PASS
V	1	Horn SN6267	1175	17178.75	61.22	43.30	-62.13	11.13	-51.00	-13.00	38.00	PASS
V	1	3160-09	1175	19087.50	58.19	42.90	-58.51	15.55	-42.96	-13.00	29.96	PASS
V	1	3160-09	1175	19908.00	60.99	44.70	-56.65	15.96	-40.69	-13.00	27.69	PASS
Note: All bands were investigated and the worse case significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power $\rightarrow -13 \text{ dBm}$ EIRP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) Margin (dB) = Limit (dBm) - Level (dBm)												

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ w/ AC555</p>			Standard: FCC22.917									
			Test Start Date: 26-Jul-04									
Swivel Dipole Antenna Low Channel (Channel 1013), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBd or dBi	dBm	dBm*	dB	
H	3	Horn SN6267	1013	2474.10	53.58	56.40	-52.86	7.74	-45.12	-13.00	34.26	PASS
H	3	Horn SN6267	1013	5772.90	49.87	43.30	-55.28	8.93	-46.35	-13.00	35.49	PASS
H	3	Horn SN6267	1013	7422.30	53.08	43.70	-55.16	8.96	-46.20	-13.00	35.34	PASS
H	3	Horn SN6267	1013	8247.00	52.67	42.30	-55.02	9.30	-45.72	-13.00	34.86	PASS
H	3	Horn SN6267	1013	9353.13	61.94	50.10	-44.96	9.15	-35.81	-13.00	24.95	PASS
V	3	Horn SN6267	1013	1649.40	57.07	53.60	-54.91	6.35	-48.56	-13.00	37.70	PASS
V	3	Horn SN6267	1013	6597.60	50.49	43.10	-55.44	9.54	-45.90	-13.00	35.04	PASS
<p>Note: All bands were investigated and the worse case significant emissions or noise floor reported. Dipole Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm ERP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>												

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ w/ AC555</p>		Swivel Dipole Antenna Mid Channel (Channel 363), Spurious Emissions												
		Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
			m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	363	1671.80	54.15	51.20	-44.22	6.37	-37.85	-13.00	26.99	PASS		
H	3	Horn SN6267	363	5015.40	42.25	36.90	-63.94	8.60	-55.34	-13.00	44.48	PASS		
H	3	Horn SN6267	363	5273.13	60.80	54.90	-39.61	8.60	-31.01	-13.00	20.15	PASS		
H	3	Horn SN6267	363	5851.30	50.12	43.50	-63.89	9.02	-54.87	-13.00	44.01	PASS		
H	3	Horn SN6267	363	6687.20	52.33	44.70	-64.11	9.49	-54.62	-13.00	43.76	PASS		
H	3	Horn SN6267	363	7523.10	53.67	44.10	-65.21	8.92	-56.29	-13.00	45.43	PASS		
H	3	Horn SN6267	363	8359.00	54.79	44.30	-61.15	9.30	-51.85	-13.00	40.99	PASS		
H	1	Horn SN6267	363	17944.00	66.53	46.50	-59.09	8.15	-50.94	-13.00	40.08	PASS		
H	1	3160-09	363	19930.00	60.43	44.10	-57.86	15.97	-41.89	-13.00	31.03	PASS		
V	3	Horn SN6267	363	4179.50	44.82	41.10	-55.96	8.25	-47.71	-13.00	36.85	PASS		
V	3	Horn SN6267	363	5015.40	41.45	36.10	-64.74	8.60	-56.14	-13.00	45.28	PASS		
V	3	Horn SN6267	363	5851.30	50.32	43.70	-64.27	9.02	-55.25	-13.00	44.39	PASS		
V	3	Horn SN6267	363	6687.20	51.93	44.30	-63.61	9.49	-54.12	-13.00	43.26	PASS		
V	3	Horn SN6267	363	7523.10	54.47	44.90	-63.27	8.92	-54.35	-13.00	43.49	PASS		
V	3	Horn SN6267	363	8359.00	53.59	43.10	-61.71	9.30	-52.41	-13.00	41.55	PASS		
V	1	Horn SN6267	363	17744.00	66.17	46.70	-59.08	9.03	-50.05	-13.00	39.19	PASS		
V	1	3160-09	363	19934.00	61.23	44.90	-57.81	15.97	-41.84	-13.00	30.98	PASS		
<p>Note: All bands were investigated and the significant emissions or noise floor reported. Dipole Antenna used for substitution Antenna factors are stated in dBd Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm ERP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>														

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ w/ AC555</p>		Swivel Dipole Antenna High Channel (Channel 777), Spurious Emissions												
		Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
			m			MHz	dBuV/m	dBuV	dBm	dBd or dBi *	dBm	dBm*	dB	
H	3	Horn SN6267	777	3818.13		66.41	63.60	-30.46	8.04	-22.42	-13.00	11.56	PASS	
H	3	Horn SN6267	777	5089.86		44.42	38.90	-63.52	8.60	-54.92	-13.00	44.06	PASS	
H	3	Horn SN6267	777	5938.17		51.02	44.30	-63.83	9.13	-54.70	-13.00	43.84	PASS	
H	3	Horn SN6267	777	6786.48		53.57	45.70	-63.45	9.43	-54.02	-13.00	43.16	PASS	
H	3	Horn SN6267	777	7634.79		55.24	45.50	-64.99	9.01	-55.98	-13.00	45.12	PASS	
H	3	Horn SN6267	777	8483.10		53.89	43.30	-60.45	9.30	-51.15	-13.00	40.29	PASS	
H	1	Horn SN6267	777	17968.00		66.68	46.50	-60.12	8.04	-52.08	-13.00	41.22	PASS	
H	1	3160-09	777	19948.00		60.84	44.50	-59.93	15.99	-43.94	-13.00	33.08	PASS	
V	3	Horn SN6267	777	5089.86		43.22	37.70	-64.35	8.60	-55.75	-13.00	44.89	PASS	
V	3	Horn SN6267	777	5938.17		50.62	43.90	-64.11	9.13	-54.98	-13.00	44.12	PASS	
V	3	Horn SN6267	777	6786.48		52.97	45.10	-63.64	9.43	-54.21	-13.00	43.35	PASS	
V	3	Horn SN6267	777	7634.79		55.44	45.70	-55.42	9.01	-46.41	-13.00	35.55	PASS	
V	3	Horn SN6267	777	8483.10		53.89	43.30	-59.27	9.30	-49.97	-13.00	39.11	PASS	
V	3	Horn SN6267	777	7937.50		55.00	44.90	-55.79	9.25	-46.54	-13.00	35.68	PASS	
V	1	Horn SN6267	777	17904.00		66.00	46.10	-47.04	8.32	-38.72	-13.00	27.86	PASS	
V	1	3160-09	777	19948.00		60.85	44.50	-59.03	15.98	-43.05	-13.00	32.19	PASS	
<p>Note: All bands were investigated and the worsecase significant emissions or noise floor reported. Dipole Antenna used for substitution Antenna factors are stated in dBi Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm ERP (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>														

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band (Cont.)

 <p>Project Number: Company: Product:</p>		Vehicle Mount Antenna Low Channel (Channel 1013), Spurious Emissions												
		Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
		m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB		
H	3	Horn SN6267	1013	4948.20	47.09	41.90	-55.27	8.61	-48.80	-13.00	35.80	PASS		
H	3	Horn SN6267	1013	7422.30	52.48	43.10	-55.25	8.96	-48.43	-13.00	35.43	PASS		
H	3	Horn SN6267	1013	8247.00	53.47	43.10	-55.34	9.30	-48.18	-13.00	35.18	PASS		
V	3	Horn SN6267	1013	4123.50	46.17	42.50	-56.36	8.17	-50.33	-13.00	37.33	PASS		
V	3	Horn SN6267	1013	5772.90	47.67	41.10	-55.27	8.93	-48.48	-13.00	35.48	PASS		
V	3	Horn SN6267	1013	6597.60	49.89	42.50	-55.24	9.54	-47.84	-13.00	34.84	PASS		
<p>Note: All bands were investigated and the worsecase significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm ERP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>														

Applicant:	ITRONIX CORPORATION	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						40 of 50

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band (Cont.)

 <p>Project Number: Company: Product:</p>	052604-519							Standard:	FCC22.917			
								Test Start Date:	26-Jul-04			
								Test End Date:	13-Aug-04			
Vehicle Mount Antenna Mid Channel (Channel 363), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	363	2507.70	41.80	44.50	-59.63	7.80	-53.97	-13.00	40.97	PASS
H	3	Horn SN6267	363	3343.60	42.08	41.10	-58.15	8.01	-52.28	-13.00	39.28	PASS
H	3	Horn SN6267	363	5851.30	49.12	42.50	-55.21	9.02	-48.33	-13.00	35.33	PASS
H	3	Horn SN6267	363	6687.20	49.53	41.90	-55.10	9.49	-47.75	-13.00	34.75	PASS
H	3	Horn SN6267	363	7523.10	52.67	43.10	-55.11	8.92	-48.33	-13.00	35.33	PASS
H	3	Horn SN6267	363	8359.00	53.59	43.10	-55.15	9.30	-47.99	-13.00	34.99	PASS
V	3	Horn SN6267	363	4179.50	46.62	42.90	-55.28	8.25	-49.17	-13.00	36.17	PASS
V	3	Horn SN6267	363	5015.40	45.45	40.10	-57.31	8.60	-50.85	-13.00	37.85	PASS
<p>Note: All bands were investigated and the worsecase significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi Formulae: Limit = 43 + 10*log(Fundamental Power Level, in watts) below the Fundamental peak power => -13 dBm ERP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>												

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						41 of 50

Test Report S/N:	100504KBC-T564-E24C
Test Date(s):	July 26 - August 23, 2004
Test Type(s):	FCC §24E, §22H IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830 IC Lab File #3874

FIELD STRENGTH OF SPURIOUS RADIATION - §22.917 (Continued)

F.3. MEASUREMENT DATA - Cellular Band (Cont.)

 <p>Project Number: 052604-519 Company: Itronix Product: IX260+ with AC555</p>			Standard: FCC22.917									
			Test Start Date: 26-Jul-04									
			Test End Date: 13-Aug-04									
Vehicle Mount Antenna High Channel (Channel 777), Spurious Emissions												
Polarity	Distance	Tx Antenna	Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level	Power Applied to Antenna	Antenna Gain	Emission ERP Level	ERP Limit	Margin	Pass/Fail
				MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm*	dB	
H	3	Horn SN6267	777	5938.17	46.62	39.90	-55.14	9.13	-48.15	-13.00	35.15	PASS
H	3	Horn SN6267	777	6786.48	49.97	42.10	-55.28	9.43	-47.99	-13.00	34.99	PASS
V	3	Horn SN6267	777	4241.55	46.67	42.90	-57.12	8.34	-50.92	-13.00	37.92	PASS
V	3	Horn SN6267	777	5089.86	45.62	40.10	-55.05	8.60	-48.59	-13.00	35.59	PASS
V	3	Horn SN6267	777	7634.79	52.24	42.50	-55.15	9.01	-48.28	-13.00	35.28	PASS
V	3	Horn SN6267	777	8158.75	54.64	44.30	-55.18	9.30	-48.02	-13.00	35.02	PASS
V	3	Horn SN6267	777	8483.10	52.29	41.70	-55.14	9.30	-47.98	-13.00	34.98	PASS
<p>Note: All bands were investigated and the worsecase significant emissions or noise floor reported. Horn Antenna used for substitution Antenna factors are stated in dBi</p> <p>Formulae: Limit = $43 + 10 \log(\text{Fundamental Power Level, in watts})$ below the Fundamental peak power => -13 dBm ERP Level (dBm) = Power applied to Antenna (dBm) + Antenna Gain (dBi) - 2.14 Margin (dB) = Limit (dBm) - Level (dBm)</p>												

Applicant:	Itronix Corporation	Model:	IX260PNL3AC555	IC ID:	1943A-IX260Pb	FCC ID:	KBCIX260PNL3AC555
Rugged Laptop PC w/ Sierra Wireless AirCard 555/550 CDMA Modem & Senao NL-3054MP 802.11b/g WLAN							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						42 of 50

Test Report S/N:	100504KBC-T564-E24C	
Test Date(s):	July 26 - August 23, 2004	
Test Type(s):	FCC §24E, §22H	IC RSS-133, RSS-132
Lab Registration(s):	FCC #714830	IC Lab File #3874

APPENDIX G - FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235

G.1. MEASUREMENT PROCEDURE

The minimum frequency stability shall be $\pm 300\text{Hz}$ (Cellular CDMA) and $\pm 150\text{Hz}$ (PCS CDMA) referenced to a received carrier frequency. This meets the requirement for operational accuracy of 0.00005% for digital mode. An HP 53181A Frequency Counter was used to measure the error in the fundamental frequency. The transmitter was set to maximum power at the center frequency of the band. The DUT was placed inside the temperature chamber. The test data is shown on pages 44-45.

Measurement Method:

The frequency stability of the transmitter was measured by:

1. Temperature:

The temperature was varied from -30°C to $+60^\circ\text{C}$ at intervals no more than 10°C throughout the temperature range using an environmental chamber. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to each frequency measurement.

2. Primary Supply Voltage:

The primary supply voltage was set at the specified nominal rating and reduced to the battery operating endpoint specified by the manufacturer. The voltage was measured at the terminals of the power supply or at the input to the cable normally provided with the equipment.

Time Period and Procedure:

1. The carrier frequency of the transmitter was measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment was subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C , the measurement of the carrier frequency of the transmitter was made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to $+60^\circ\text{C}$, then back to room temperature. A minimum period of one hour was provided to allow stabilization of the equipment at each temperature level.

FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235 (Continued)

G.2. MEASUREMENT DATA - PCS Band


Carrier Frequency (GHz): 1.88

Channel: 600

Mode: PCS CDMA

Deviation Limit (PPM): 0.08

Temperature (°C)	Voltage (%)	Power (VDC)	Carrier Frequency Deviation		Specification	
			(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	6.0	6.47	0.003	0.08	-0.08
-30	100	6.0	3.58	0.002	0.08	-0.08
-20	100	6.0	-6.71	-0.004	0.08	-0.08
-10	100	6.0	-8.36	-0.004	0.08	-0.08
0	100	6.0	7.11	0.004	0.08	-0.08
+10	100	6.0	-3.85	-0.002	0.08	-0.08
+20	100	6.0	6.47	0.003	0.08	-0.08
+30	100	6.0	4.02	0.002	0.08	-0.08
+40	100	6.0	-5.90	-0.003	0.08	-0.08
+50	100	6.0	3.63	0.002	0.08	-0.08
+60	100	6.0	-1.78	-0.001	0.08	-0.08
+20	Battery Endpoint	4.0	4.21	0.002	0.08	-0.08

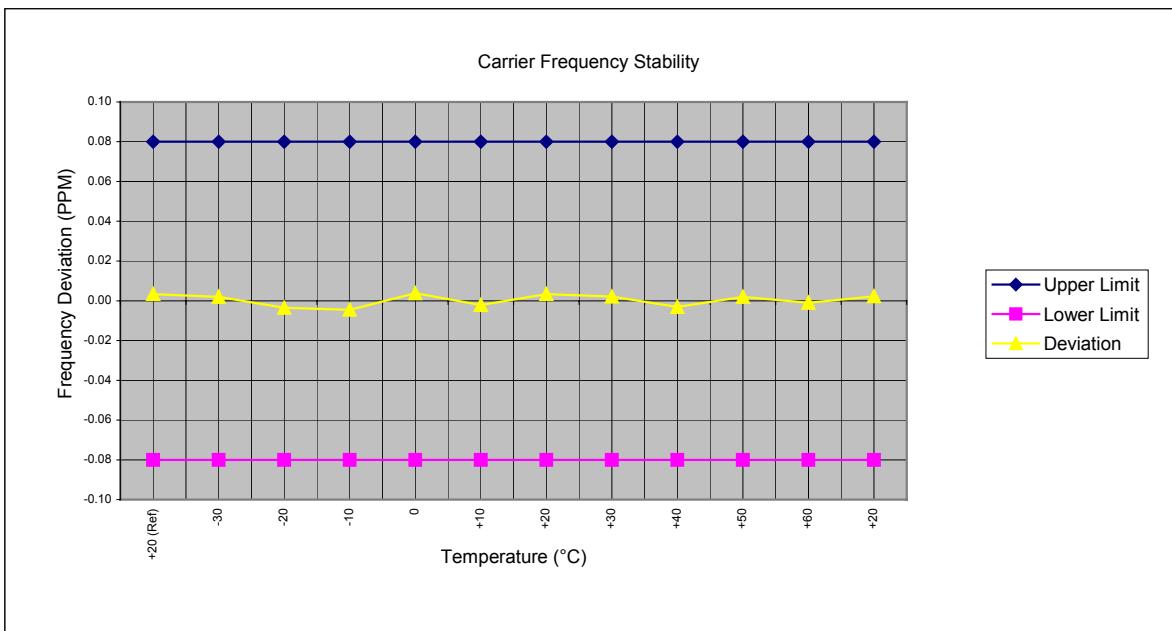

FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055, §24.235 (Continued)

G.2. MEASUREMENT DATA - Cellular Band

Carrier Frequency (MHz): 835.89

Channel: 363

Mode: Cellular CDMA

Deviation Limit (PPM): 0.359

Temperature	Voltage	Power	Carrier Frequency Deviation		Specification				
			(°C)	(%)	(VDC)	(Hz)	(PPM)	Lower Limit (PPM)	Upper Limit (PPM)
+20 (Ref)	100	6.0		5.64		0.007		0.359	-0.359
-30	100	6.0		1.44		0.002		0.359	-0.359
-20	100	6.0		-3.17		-0.004		0.359	-0.359
-10	100	6.0		2.02		0.002		0.359	-0.359
0	100	6.0		-1.95		-0.002		0.359	-0.359
+10	100	6.0		-2.32		-0.003		0.359	-0.359
+20	100	6.0		5.64		0.007		0.359	-0.359
+30	100	6.0		1.93		0.002		0.359	-0.359
+40	100	6.0		-5.41		-0.006		0.359	-0.359
+50	100	6.0		-3.37		-0.004		0.359	-0.359
+60	100	6.0		2.11		0.003		0.359	-0.359
+20	Battery Endpoint	4.0		-1.46		-0.002		0.359	-0.359

