

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

FCC PART 15.247 EMC TEST REPORT
FOR THE
ITRONIX RUGGED LAPTOP PC MODEL: IX260PNLA775BT
INCLUDING THE
SENAO NL-3054MP 802.11B/G 2.4 GHz DSSS WLAN MINI-PCI CARD
WITH THE
RANGESTAR INTERNAL SURFACE-MOUNT ANTENNA
CO-LOCATED WITH THE
CIRRONET BT2022 BLUETOOTH TRANSMITTER
AND THE
RANGESTAR INTERNAL SURFACE-MOUNT ANTENNA
CO-LOCATED WITH THE
SIERRA WIRELESS AIRCARD 775 DUAL-BAND GSM GPRS/EDGE PCMCIA MODEM
AND THE
ITRONIX EXTERNAL SWIVEL DIPOLE ANTENNA

TRSN 102604KBC-T575-E15W
Issue 1.0

Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
1955 Moss Court
Kelowna, BC
Canada
V1Y 9L3

November 11, 2004

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

DECLARATION OF COMPLIANCE

Test Lab	CELLTECH LABS INC. Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7048 e-mail: info@celltechlabs.com web site: www.celltechlabs.com	Applicant	ITRONIX CORPORATION 801 South Stevens Street Spokane, WA 99204 United States
Lab Registration No.(s):	FCC: 714830	IC: IC 3874	
Rule Part(s):	FCC: §15.247; §2.1091; §1.1310	IC: RSS-210 Issue 5	
Device Classification:	FCC: Digital Transmission System (DTS)	IC: Low Power Licence-Exempt Device	
Device Identification:	FCC ID: KBCIX260PNLA775BT	IC: 1943A-IX260Pe	
DUT Description:			
Model:	IX260PNLA775BT		
Device Description:	Rugged Laptop PC with Senao NL-3054MP 802.11b/g 2.4 GHz DSSS WLAN Mini-PCI Card		
Co-located Transmitter(s):	Cirronet BT2022 Bluetooth Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem		
TX Frequency Range:	2412 - 2462 MHz		
Max. RF Output Power:	0.056 Watts - 17.46 dBm - Peak Conducted - 802.11b 0.100 Watts - 20.00 dBm - Peak Conducted - 802.11g		
Modulation Type(s):	DBPSK, DQPSK, CCK		
Antenna Type(s):	WLAN: RangeStar P/N: 100929 Internal Surface-Mount (upper right rear edge of LCD Display) Bluetooth: RangeStar P/N: 100929 Internal Surface-Mount (upper left rear edge of LCD Display) GSM GPRS/EDGE: Itronix IX260+ External Swivel Dipole (upper right side edge of LCD Display)		
Power Supply:	Stationary: 90 Watt AC Power Adapter / 11.1V Lithium-ion Battery, 6.0Ah (Model: A2121-2)		

This wireless mobile device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR §15.247 and Industry Canada RSS-210 Issue 5.

I attest to the accuracy of the data. All measurements reported herein were performed by me or were under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.



Duane M. Friesen
EMC Manager
Celltech Labs Inc.




Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							 ITRONIX
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							2 of 48

1.0 SCOPE	5
2.0 REFERENCES	5
2.1 Normative References	5
3.0 TERMS AND DEFINITIONS	6
4.0 FACILITIES AND ACCREDITATIONS	7
5.0 GENERAL INFORMATION	7
5.1 Applicant Information	7
5.2 DUT Description.....	7
5.3 Co-Located Equipment	8
5.4 Cable Descriptions.....	8
5.5 Support Equipment	8
5.6 Clock Frequencies	9
5.7 Mode(s) of Operation Tested	9
5.8 Configuration Description	10
6.0 PASS/FAIL CRITERIA.....	10
APPENDIX.....	11
Appendix A - DUT Photographs	12
Appendix B - 6 dB Bandwidth Measurement.....	13
Appendix C - Peak Conducted Power Measurement.....	14
Appendix D - Maximum Permissible Exposure Calculation.....	17
Appendix E - Radiated Spurious Emissions Measurement.....	20
Appendix F - Restricted Band Emissions Measurement	29
Appendix G - Peak Power Spectral Density Measurement.....	41
Appendix H - Conducted Powerline Emissions Measurement	42
END OF DOCUMENT.....	48

Figure C-1 - Setup Drawing	15
Figure E-1 - Setup Drawing	21
Figure F-1 - Setup Drawing.....	31
Figure H-1 - Setup Drawing	44

Photograph A-1 - Front of Open IX260+ Laptop PC.....	12
Photograph A-2 - Back of Open IX260+ Laptop PC.....	12
Photograph A-3 - Left Side of Open IX260+ Laptop PC.....	12
Photograph A-4 - Right Side of Open IX260+ Laptop PC.....	12
Photograph E-1 - Vertical Polarization (1-18 GHz).....	22
Photograph E-2 - Vertical Polarization (18-26 GHz).....	22
Photograph E-3 - Front of Radiated Emission Configuration.....	22
Photograph E-4 - Back of Radiated Emission Configuration.....	22
Photograph F-1 - Horizontal Polarization (30MHz - 1 GHz).....	32
Photograph F-2 - Vertical Polarization (1-18 GHz).....	32
Photograph F-3 - Front of Radiated Emission Configuration.....	32
Photograph F-4 - Back of Radiated Emission Configuration.....	32
Photograph H-1 - AC Powerline Conducted Emission Configuration.....	43
Photograph H-2 - AC Powerline Conducted Emission Cable Placement.....	43

2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 3 of 48



* Pass based on results outlined in reference module report.

Issue	Description	Implemented By	Implementation Date
1.0	Initial Release	Jon Hughes	11Nov04

Prepared By		Nov. 11, 2004
Name/Title	Duane M. Friesen, C.E.T. / EMC Manager	Date
Reviewed By		Nov. 11, 2004
Name/Title	Jon Hughes / General Manager	Date

2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 4 of 48

AVG	Average
CFR	Code of Federal Regulations
dB	decibel
dBm	dB referenced to 1 mW
dBuV	dB referenced to 1 uV
DUT	Device under Test
dBc	dB down from carrier
EBW	Emission Bandwidth
EMC	Electromagnetic Compatibility
FCC	Federal Communication Commission
HP	Hewlett Packard
HPF	High Pass Filter
Hpol	Horizontal Polarization
IC	Industry Canada
kHz	kilohertz
LNA	Low Noise Amplifier
m	meter
MHz	Megahertz
Mbps	megabits per second
na	not applicable
n/a	not available
PK	Peak
PPSD	Peak Power Spectral Density
QP	Quasi-peak
RBW	Resolution Bandwidth
R&S	Rohde & Schwarz
RSS	Radio Standard Specification
SA	Spectrum Analyzer
VBW	Video Bandwidth
Vpol	Vertical Polarization
WLAN	Wireless Local Area Network

The facilities used in collecting the test results outlined in this report are located at 1955 Moss Court, Kelowna, British Columbia, Canada, V1Y 9L3. The radiated and conducted emissions sites conform with the requirements set forth in ANSI C63.4 and are filed and are listed with the FCC under Registration Number 714830 and Industry Canada under File Number IC 3874.

5.1 Applicant Information

<u>Company Name:</u>	Itronix Corporation
<u>Address:</u>	801 South Stevens Street
	Spokane, WA 99204
	United States

The DUT consisted of the Rugged Laptop PC with Senao NL-3054MP 802.11b/g 2.4 GHz DSSS WLAN Mini-PCI Card installed in the Mini-PCI slot, and Internal Surface-Mount Antenna installed in the upper right side rear edge of the LCD display. Co-located within the Rugged Laptop PC is a Cirronet BT2022 Bluetooth transmitter incorporating an Internal Surface-Mount Antenna installed in the upper left side rear edge of the LCD display. The DUT also incorporates an internal co-located Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem with external swivel dipole antenna located at the upper right side edge of the LCD display. Photographs of the DUT placement and construction are shown in Appendix A.

Device:	Rugged Laptop PC			
Model:	IX260PNLA775BT			
Serial Number:	ZZGEG4196ZZ6479			
Identifier(s):	FCC ID:	KBCIX260PNLA775BT	IC:	1943A-IX260Pe
Power Source:	Delta Electronics Model ADP-90AB Rev B 90 Watt AC-DC power supply			

Device:	2.4GHz DSSS WLAN Mini-PCI Card (802.11b/g)			
Model:	Senao NL-3054MP PLUS ARIES (F) 1.00			
Serial Number:	048253621			
Rule Part(s):	FCC:	§15.247; §2.1091; §1.1310	IC:	RSS-210 Issue 5
Classification:	FCC:	Digital Transmission System (DTS)	IC:	Low Power Licence-Exempt Transmitter
Power Source:	Powered from the internal PC power supply			

Device:	Internal Surface-Mount Antenna (upper right side rear edge of LCD display)
Model:	RangeStar P/N: 100929
Gain:	4.5 dBi

2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 7 of 48

Device:	2.4GHz FHSS Bluetooth Transmitter
Model:	Cirronet BT2022
Serial Number:	n/a
Antenna Type:	Internal Surface-Mount Antenna (upper left side rear edge of LCD display)
Model:	RangeStar P/N: 100929
Gain:	4.5 dBi

Device:	Dual-Band PCS/Cellular GSM GPRS/EDGE PCMCIA Modem
Model:	Sierra Wireless AirCard 775
Serial Number:	X04060400690004
Antenna Type:	External Swivel Dipole Antenna (upper right side edge of LCD display)
Model:	Ittronix IX260+
Gain:	2.6 dBi

Device:	GPS Receiver Module and Antenna (Receive only)
Model:	Leadtek P/N GPS9547

ROUTING		Length	Model	Terminations		Shield Type	Shield Termination		Suppression
From	To	m		End 1	End 2		End 1	End 2	
PC modem port	Unterminated	1.0	n/a	RJ-11	RJ-11	None	na	na	None

SUPPORT EQUIPMENT LIST		
MANUFACTURER	MODEL	DESCRIPTION
D-Link	DE-809TC/	Ethernet hub
YNG YUH	YP-040	Hub power supply
MLi	699	Speakers
Polk Audio	n/a	Speaker-microphone
DeLorme	Tripmate	GPS Receiver
Intel	CS-430	Camera
Logitech	M-S34	Mouse

2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 8 of 48

5.6 Clock Frequencies

5.6.1 DUT Clock Frequencies

Device:	Rugged Laptop PC
Clocks:	1.6 GHz processor
Name:	2.4GHz DSSS WLAN Mini-PCI Card
Clocks:	n/a
Name:	Internal Surface-Mount Antenna (WLAN)
Clocks:	None

5.6.2 Co-Located Clock Frequencies


Device:	Peripherals
Clocks:	n/a

5.7 Mode(s) of Operation Tested

Customer supplied software was used to place the WLAN card in the appropriate mode, channel, and power level for the specific measurement.

TX Frequency Range:	2412 - 2462 MHz Ch. 1 (2412 MHz), Ch. 6 (2437 MHz) & Ch. 11 (2462 MHz) measured unless otherwise noted	
Software Power Gain Settings:	802.11b set to 0,1 for Channel 1; 0,5 for Channel 6; 0,7 for Channel 11 802.11g set to 0,8 for Channel 1; 0,10 for Channel 6; 0,12 for Channel 11 (x,y setting x = rfgain_l y = PN9 gain)	
RF Peak Conducted Output Power Tested:	802.11b 2412 MHz(1 Mbps) = 16.99 dBm 802.11b 2437 MHz(1 Mbps) = 17.46 dBm 802.11b 2462 MHz(1 Mbps) = 17.35 dBm	802.11g 2412 MHz(6 Mbps) = 20.00 dBm 802.11g 2437 MHz(6 Mbps) = 19.52 dBm 802.11g 2462 MHz(6 Mbps) = 19.49 dBm
Modes / Data Rates Tested*:	802.11b (1, 5.5, 11 Mbps checked in prescan) (1 Mbps determined to be worse case and used unless otherwise noted)	
	802.11g (6, 36, 54 Mbps checked in prescan) (6 Mbps determined to be worse case and used unless otherwise noted)	
Modulation Type(s):	OFDM with BPSK, QPSK, 16QAM, 64QAM, DBPSK, DQPSK, CCK	
Battery Type(s):	11.1V Lithium-ion, 6.0Ah (Model: A2121-2)	

* Turbo mode available at module level but not enabled when installed in DUT



The DUT was configured and exercised using customer supplied test software that allowed an operator to set the parameters of the WLAN operation. The settings used are described in each appendix. Unless otherwise noted the power gain settings were set as described in section 5.6 with the worse case data rate as described in the same section.


The DUT was configured, as described by the client as being representative of what would be delivered to a final customer. This configuration included the WLAN and internal antenna as described in section 5.2 installed in a typical manner. More specific details may be included in each appendix.

The DUT was tested in a configuration described by the client as being worse case but typical of normal use.

Prescan measurements were made with the WLAN in each of the two available modes (b & g), lowest and highest bit rates and each of the lowest, highest and mid-band frequencies. From this preliminary data, it was determined that Mode b Rate 1 Mbps resulted in the highest spurious emissions. When a measurement of Mode g was required, its data rate was set for a worse case setting of 6 Mbps. Unless otherwise specified in the applicable appendices, these settings were used for the measurements described in this report.

Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. A DUT is considered to have passed the requirements, if the data collected during the described measurement procedure is less than or equal to the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							10 of 48



Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							11 of 48

Photograph A-1 - Front of Open IX260+ Laptop PC



2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 12 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix B - 6 dB Bandwidth Measurement

B.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §15.247 (2)
Procedure Reference	FCC 97-114

B.2. LIMITS

B.2.1. FCC CFR 47

FCC CFR 47 §15.247	(2) <i>Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz</i>
-----------------------	---

B.3. TEST PROCEDURE

The test method used is outlined in the ADT Corp reference test report no. RF921215R02, section 4.3

B.4. TEST RESULTS

The results used to show compliance to the applicable parts are outlined in the ADT Corp. reference test report no. RF921215R02, section 4.3.

As shown in section 4.3.7, the following are the outlined results for Mode b:


Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	11.48	0.5	PASS
6	2437	11.48	0.5	PASS
11	2462	11.08	0.5	PASS

As shown in section 4.3.7, the following are the outlined results for Mode g:

Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	16.52	0.5	PASS
6	2437	16.56	0.5	PASS
11	2462	16.40	0.5	PASS

B.5. PASS/FAIL

In reference to the results outlined in B.4 and stated in the ADT Corp reference report, the DUT passes the requirements as stated in the reference standards as follows:
FCC 15.247 (2): The 6 dB bandwidth as measured meets the minimum 500 kHz bandwidth requirement.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							13 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix C - Peak Conducted Power Measurement

C.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §15.247(b) (3)
Procedure Reference	FCC 97-114

C.2. LIMITS

C.2.1. FCC CFR

§15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247(b) (3) For system using digital modulation in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands: 1 Watt.

C.3. ENVIRONMENTAL CONDITIONS

Temperature	25.2 +/- 2 °C
Humidity	35 +/- 2 %
Barometric Pressure	96.34 kPa

C.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00015	Agilent	E4408B	Spectrum Analyzer	29Dec03	29Dec04
00075	Alpha Wire-J	9223	2ft. RG223/U RF Cable	08Jul04*	24Jun05
00076	Pasternack	PE7014-30	30dB 2 Watt Attenuator	08Jul04*	24Jun05

*Cable and attenuator verified with power meter prior to use

C.5. MEASUREMENT EQUIPMENT SETUP

Measurement Equipment Connections	The equipment was connected as shown in the setup drawing in C.6.
Measurement Equipment Settings	To evaluate the maximum peak power, the 26 dB bandwidth needs to be determined. This is performed with the spectrum analyzer using the following setting: RBW – 300 kHz VBW – 1MHz Span – 50 MHz Detector – Peak Average – Power Trace Average – 100 Once the 26 dB bandwidth is determined, the channel power is measured within the band with the following spectrum analyzer settings: RBW – 1 MHz VBW – 3 MHz Detector – Peak Average – Power Integrate BW – equal to specific -26 dB EBW




Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							14 of 48

Figure C-1 - Setup Drawing



The worst-case data rate was determined from prescan investigations. Measurements were made at three channels throughout the band, Low Channel (2412 MHz), Mid Channel (2437 MHz), High Channel (2462 MHz) and for both Modes b and g.

Channel	Frequency	802.11b				802.11g			
		Peak Conducted Power		Limit	-26 dB EBW	Peak Conducted Power		Limit	-26 dB EBW
	MHz	dBm	Watts	Watts	MHz	dBm	Watts	Watts	MHz
Low	2412	16.99	0.050	1	19.2	20.00	0.100	1	29.59
Mid	2437	17.46	0.056	1	19.2	19.52	0.090	1	29.70
High	2462	17.35	0.054	1	19.2	19.49	0.089	1	30.56

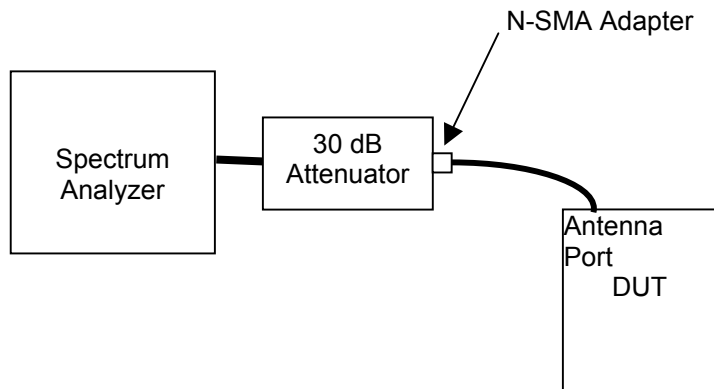

In reference to the results outlined in C.8 the DUT passes the requirements as stated in the reference standards as follows:
FCC 15.247 (b) (3): The peak power did not exceed 1 Watt.

3Nov04
Date

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							16 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix D - Maximum Permissible Exposure Calculation

D.1. REFERENCES

Normative Reference Standard	FCC CFR 47§1.1310 IEEE Std C95.1-1999
Procedure Reference	FCC CFR 47§2.1091

D.2. LIMITS

FCC CFR 47§1.1310 Table 1(b)	1.0 mW/cm ²
------------------------------	------------------------

D.3. ENVIRONMENTAL CONDITIONS

Temperature	na
Humidity	na
Barometric Pressure	na

D.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
na					

D.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The results described herein were determined by the following calculation, so no measurement equipment was used.
MEASUREMENT EQUIPMENT SETTINGS	na

D.6. SETUP PHOTOS

na

D.7. SETUP DRAWINGS

na

D.8. DUT OPERATING DESCRIPTION

na

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							17 of 48

Calculation:

Tx Frequency:	2437	(MHz)
RF Output Power at Antenna Input Terminal:	17.46	(dBm)
Antenna gain:	4.50	(dBi)

S=	1.00	(mW/cm^2)
P=	55.7186	(mW)
G=	2.82	(numeric)

S at 20cm: 0.031207528 (mW/cm^2)

Tx Frequency:	2412	(MHz)
RF Output Power at Antenna Input Terminal:	20.00	(dBm)
Antenna gain:	4.50	(dBi)

S= 1.00 (mW/cm²)
P= 100.0000 (mW)
G= 2.82 (numeric)

S at 20cm: 0.0560092 (mW/cm^2)


$$S = \frac{PG}{4\pi R^2}$$

$$R = \sqrt{\frac{P}{4\pi S}}$$

where: S = Power Density Limit
P = Power Applied to the Antenna
G = Numeric Antenna Gain
R = Distance from Antenna

Mode	Power Density Limit	RF Conducted Output Power	Antenna Gain	MPE Distance	Power Density at 20 cm
	mW/cm ²	dBm	dBi	cm	mW/cm ²
802.11b	1.0	17.46	4.5	3.54	0.031
802.11g	1.0	20.00	4.5	4.74	0.056

2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 18 of 48



In reference to the results outlined in D.9 the DUT passes the requirements as stated in the reference standards as follows:

- 1) The DUT must comply with the minimum spacing requirement of 20 cm to ensure an exposure of not more than 1 mW/cm².

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Date _____

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							19 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix E - Radiated Spurious Emissions Measurement

E.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §15.247(c)
Procedure Reference	ANSI C63.4; FCC 97-114

E.2. LIMITS

E.2.1. FCC CFR 47

§15.247 (c): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in 15.209 (a) is not required.


Note: Spurious emissions within the restricted bands are reported in Appendix F.

E.3. ENVIRONMENTAL CONDITIONS

Temperature	27.4 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96.24 +/- 0.2 kPa

E.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00072	EMCO	2075	Mini-mast	n/a	n/a
00073	EMCO	2080	Turn Table	n/a	n/a
00071	EMCO	2090	Multi-Device Controller	n/a	n/a
00050	Chase	CBL-6111A	Bilog Antenna	30Apr04	30Apr05
00035	ETS	3115	Double Ridged Guide Horn	24Mar04	24Mar05
00202	ETS	3160-09	Small Horn Antenna	27May04	27Jun05
00015	Agilent	E4408B	Spectrum Analyzer	29Dec03	29Dec04
00049	HP	8566B	Spectrum Analyzer RF Section	18May04	18May05
00049	HP	85650A	Quasi-peak Adapter	18May04	18May05
00047	HP	85685A	RF Preselector	18May04	18May05
00048	Gore	65474	Microwave Cable	20May04	20May05
00030	HP	83017A	LNA	20May04	20May05

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.					20 of 48

MEASUREMENT EQUIPMENT CONNECTIONS

ETS 3160-09 Horn

MEASUREMENT EQUIPMENT SETTINGS

Peak*

Photograph E-1 - Vertical Polarization (1-18 GHz)




Photograph E-2 - Vertical Polarization (18-26 GHz)




Photograph E-3 - Front of Radiated Emission Configuration



Photograph E-4 - Back of Radiated Emission Configuration

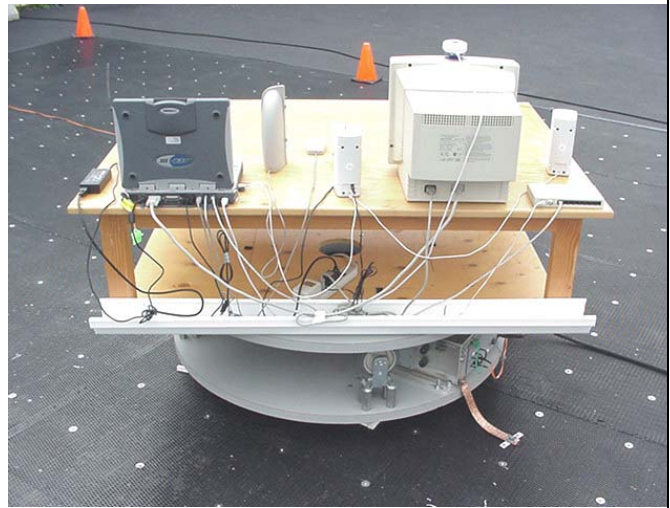

The worst-case data rate was determined from prescan investigations. Measurements were made at three channels throughout the band, Low Channel (2412 MHz), Mid Channel (2437 MHz), High Channel (2462 MHz) and for both Modes b and g for the band-edge measurements and for Mode b for the remaining measurements. The configuration used for all other measurements was Mode b, 1 mbps with a gain setting of 0,1.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							22 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

E.9. TEST RESULTS

E.9.1. Mode b - Fundamental Field Strengths @ Specified Distance


Project Number: 100504KBC-T562-E15W **Standard:** FCC15.247a
Company: Itronix **Test Start Date:** 25Oct04
Product: IX260+ with Senao NL-3054MP Plus Aries2 WLAN **Test End Date:** 03Nov04

Mode b Carrier Field Strengths																	
Channel	Polarity	Measurement Distance	Antenna	Frequency	SA Level	Noise Floor	AF	CL	Other	Total CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Margin	Pass/Fail
		m						MHz	dBuV		dB/m		dB	dB			
1	H	3	Horn SN6276	2412.00	74.44		30.26	3.49	0.00	33.75	108.19	PK	3	0.00	116.20	8.01	PASS
6	H	3	Horn SN6276	2437.00	74.58		30.30	3.51	0.00	33.81	108.39	PK	3	0.00	116.20	7.81	PASS
11	H	3	Horn SN6276	2462.00	73.48		30.34	3.52	0.00	33.86	107.34	PK	3	0.00	116.20	8.86	PASS
1	V	3	Horn SN6276	2412.00	67.66		30.26	3.49	0.00	33.75	101.41	PK	3	0.00	116.20	14.79	PASS
6	V	3	Horn SN6276	2437.00	68.53		30.30	3.51	0.00	33.81	102.34	PK	3	0.00	116.20	13.86	PASS
11	V	3	Horn SN6276	2462.00	67.05		30.34	3.52	0.00	33.86	100.91	PK	3	0.00	116.20	15.29	PASS

E.9.2. Mode q - Fundamental Field Strengths @ Specified Distance

Project Number: 100504KBC-T562-E15W **Standard:** FCC15.247a
Company: Itronix **Test Start Date:** 25Oct04
Product: IX260+ with Senao NL-3054MP Plus Aries2 WLAN **Test End Date:** 03Nov04

Mode g Carrier Field Strengths																	
Channel	Polarity	Measurement Distance	Antenna	Frequency	SA Level	Noise Floor	AF	CL	Other	Total CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Margin	Pass/Fail
		m						MHz	dBuV		dB/m		dB	dB			
1	H	3	Horn SN6276	2412.00	73.32		30.26	3.49	0.00	33.75	107.07	PK	3	0.00	116.20	9.13	PASS
6	H	3	Horn SN6276	2437.00	71.68		30.30	3.51	0.00	33.81	105.49	PK	3	0.00	116.20	10.71	PASS
11	H	3	Horn SN6276	2462.00	70.70		30.34	3.52	0.00	33.86	104.56	PK	3	0.00	116.20	11.64	PASS
1	V	3	Horn SN6276	2412.00	66.81		30.26	3.49	0.00	33.75	100.56	PK	3	0.00	116.20	15.64	PASS
6	V	3	Horn SN6276	2437.00	66.31		30.30	3.51	0.00	33.81	100.12	PK	3	0.00	116.20	16.08	PASS
11	V	3	Horn SN6276	2462.00	64.89		30.34	3.52	0.00	33.86	98.75	PK	3	0.00	116.20	17.45	PASS

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

$$\text{Field Strength} = \text{SA Reading} + \text{Total CF}$$

Limit Distance Correction = $40 \cdot \log(d_1/d_2)$ for $F < 30$ MHz, $20 \cdot \log(d_1/d_2)$ for $F > 30$ MHz :
where d_1 is the measurement distance

$$\text{Limit} = \text{Specified Limit} + \text{Limit Distance Correction}$$
$$\text{Margin} = \text{Limit} - \text{Field Strength}$$


Calculated Limit (-20 dBc) = Field Strength -20

*Calculated Limit used for spurious emission evaluation, levels measured with 100 kHz RBW

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						23 of 48

Note: (Upper Band-edge (Restricted Band) is in Appendix F)

Channel 1 Mode g - Conducted Band-edge Plots

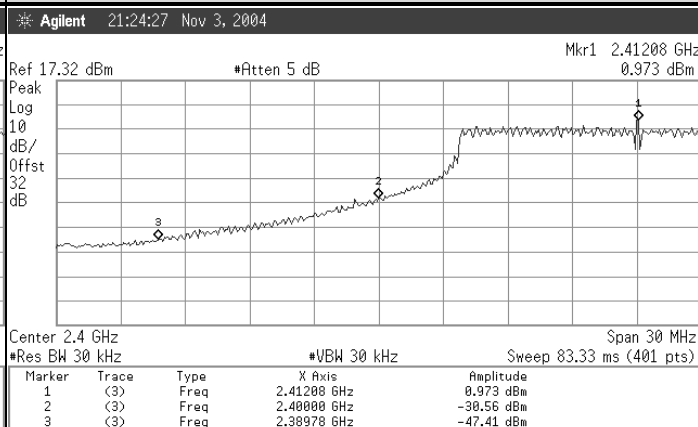

Channel 1 Mode g - Radiated Carrier Field Strengths

Channel	Polarity	Measurement Distance	Mode g										
			Antenna	Frequency	SA Level	Noise Floor	AF	CL	Other	Total CF	Field Strength	Detector	
							m	MHz	dBuV	dB/m	dB	dB	dB/m
1	H	3	Horn SN6276	2412.00	73.32			30.26	3.49	0.00	33.75	107.07	PK
1	H	3	Horn SN6276	2412.00	71.38			30.26	3.49	0.00	33.75	105.13	AV
1	V	3	Horn SN6276	2412.00	66.81			30.26	3.49	0.00	33.75	100.56	PK
1	V	3	Horn SN6276	2412.00	64.84			30.26	3.49	0.00	33.75	98.59	AV


Channel 1 g - Calculated Band-edge (Out-of-Band) Field Strengths

Mode g												
Channel	Polarity	Distance	Frequency	Carrier Radiated Field Strength	Marker-Delta	Detector	Calculated Band-edge Field Strength	Limit Distance	Limit Distance Correction	Specified Limit	Margin	Pass/Fail
		m	MHz	dBuV/m	dBuV		dBuV/m	m	dB	dBuV/m	dB	
1	H	3	2400.00	107.07	31.53	PK	75.53	3.00	0.00	87.07	11.53	Pass
1	H	3	2400.00	105.13	31.53	AV	73.59	3.00	0.00	85.13	11.53	Pass
1	V	3	2400.00	100.56	31.53	PK	69.02	3.00	0.00	87.07	18.04	Pass
1	V	3	2400.00	98.59	31.53	AV	67.05	3.00	0.00	85.13	18.07	Pass

$$\text{Margin (dB)} = \text{Limit (dBuV/m)} - \text{Field Strength (dBuV/m)}$$

Note: Measurements and calculation reference the Marker-Delta Method Described in FCC Public Notice DA 00-705

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						24 of 48



Standard:	FCC15.247c
Test Start Date:	25Oct04
Test End Date:	03Nov04

Standard:	FCC15.247c
Test Start Date:	25Oct04
Test End Date:	03Nov04

25 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

E.9.6. Channel 6 Out-of-Band Spurious Emission Field Strengths @ Specified Distance (not within restricted bands)



Company: 100504KBC-T562-E15W
Product: Itronix
IX260+ with Senao NL-3054MP Plus Aries2 WLAN

Standard: FCC15.247c
Test Start Date: 25Oct04
Test End Date: 03Nov04

Mode b																		
Channel	Polarity	Distance	Rx Antenna	Frequency	SA Level	Noise Floor	Rx AF	Rx CL	Other Rx	Total Rx CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Lower Limit	Margin	Pass/Fail
		m		MHz	dBuV		dB/m	dB	dB	dB/m	dBuV/m	(PK/QP/AV)	m	dB	#REF!		dB	
CH6	H	3	Horn SN6276	1892.00	22.10		29.08	3.07	0.00	32.15	54.25	PK	3.00	0.00	88.39	*	34.13	PASS
CH6	V	3	Horn SN6276	1887.00	31.10		29.06	3.07	0.00	32.13	63.23	PK	3.00	0.00	82.34	*	19.11	PASS
CH6	V	1	Horn SN6276	17641.50	39.90		44.82	10.48	-36.59	18.72	58.62	PK	3.00	9.54	91.88	*	33.26	PASS

E.9.7. Channel 6 Harmonic Emission Field Strengths @ Specified Distance (not within restricted bands)



Company: 100504KBC-T562-E15W
Product: Itronix
IX260+ with Senao NL-3054MP Plus Aries2 WLAN

Standard: FCC15.247c
Test Start Date: 25Oct04
Test End Date: 03Nov04

Mode b																		
Channel	Polarity	Distance	Rx Antenna	Frequency	SA Level	Noise Floor	Rx AF	Rx CL	Other Rx	Total Rx CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Lower Limit	Margin	Pass/Fail
		m		MHz	dBuV		dB/m	dB	dB	dB/m	dBuV/m	(PK/QP/AV)	m	dB	#REF!		dB	
CH6	H	3	Horn SN6276	9748.00	47.32	x	40.30	7.39	-34.25	13.44	60.76	PK	3.00	0.00	88.39	*	27.63	PASS
CH6	H	1	Horn SN6276	17059.00	38.50	x	43.17	10.40	-36.66	16.91	55.41	PK	3.00	9.54	97.93	*	42.52	PASS
CH6	H	1	3160-09	21933.00	47.81	x	40.30	11.99	-37.96	14.33	62.14	PK	3.00	9.54	97.93	*	35.79	PASS
CH6	V	3	Horn SN6276	9748.00	49.37	x	40.30	7.39	-34.25	13.44	62.81	PK	3.00	0.00	82.34	*	19.53	PASS
CH6	V	1	Horn SN6276	17059.00	36.70	x	43.17	10.40	-36.66	16.91	53.61	PK	3.00	9.54	91.88	*	38.27	PASS
CH6	V	1	3160-09	21933.00	48.67		40.30	11.99	-37.96	14.33	63.00	PK	3.00	9.54	91.88	*	28.88	PASS

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

Field Strength = SA Reading + Total CF

Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:

where d1 is the measurement distance, d2 is the published limit distance

Limit = Specified Limit + Limit Distance Correction

Margin = Limit - Field Strength


*Where applicable the QP or Average Limits were applied to the peak emission

No emissions levels were measured above those reported

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
------------	---------------------	--------	----------------	--------	---------------	---------	-------------------

Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM





Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.247c
Test Start Date:	25Oct04
Test End Date:	03Nov04

Mode b																		
Channel	Polarity	Distance	Rx Antenna	Frequency	SA Level	Noise Floor	Rx AF	Rx CL	Other Rx	Total Rx CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Lower Limit	Margin	Pass/Fail
CH11	H	m	Horn SN6276	MHz	dBuV		dB/m	dB	dB	dB/m	dBuV/m	PK/QP/AV	m	dB	#REF!	*	dB	
CH11	H	3	Horn SN6276	4441.56	49.57		34.70	4.78	-34.04	5.43	55.00	PK	3.00	0.00	88.39	*	33.38	PASS
CH11	H	3	Horn SN6276	9647.81	50.06		40.30	7.37	-34.25	13.41	63.47	PK	3.00	0.00	88.39	*	24.91	PASS
CH11	H	1	Horn SN6276	16498.40	44.50		41.90	10.28	-33.05	19.12	63.62	PK	3.00	9.54	97.93	*	34.31	PASS
CH11	V	3	Horn SN6276	9647.81	49.38		40.30	7.37	-34.25	13.41	62.79	PK	3.00	0.00	82.34	*	19.54	PASS
CH11	V	1	Horn SN6276	16422.00	45.30		41.70	10.14	-33.10	18.73	64.03	PK	3.00	9.54	91.88	*	27.85	PASS

Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.247c
Test Start Date:	25Oct04
Test End Date:	03Nov04

Mode b																		
Channel	Polarity	Distance	Rx Antenna	Frequency	SA Level	Noise Floor	Rx AF	Rx CL	Other Rx	Total Rx CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Lower Limit	Margin	Pass/Fail
		m		MHz	dBuV		dB/m	dB	dB	dB/m	dBuV/m	PK/QP/AV	m	dB	dBuV/m		dB	
CH11	H	3	Horn SN6276	9848.00	44.51	x	40.30	7.41	-34.25	13.46	57.97	PK	3.00	0.00	88.39	*	30.41	PASS
CH11	V	3	Horn SN6276	9848.00	44.43	x	40.30	7.41	-34.25	13.46	57.89	PK	3.00	0.00	82.34	*	24.44	PASS

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

$$\text{Field Strength} = \text{SA Reading} + \text{Total CF}$$


Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:

where d_1 is the measurement distance, d_2 is the published limit distance

$$\text{Limit} = \text{Specified Limit} + \text{Limit Distance Correction}$$
$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

*Where applicable the QP or Average Limits were applied to the peak emission

No emissions levels were measured above those reported




In reference to the results outlined in E.9, the DUT passes the requirements as stated in the reference standards as follows: FCC 15.247 (c): All emissions within any 100 kHz bandwidth outside the operating frequency band are greater than 20 dB below the maximum 100 kHz bandwidth signal within the operating band.

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.

04Nov04

Date _____

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							28 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix F - Restricted Band Emissions Measurement


F.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §15.205 (a) (b), FCC CFR 47 §15.209 (a)
Procedure Reference	FCC 97-114

F.2. LIMITS

FCC CFR 47 §15.205	(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:																																																																											
	<table><thead><tr><th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr></thead><tbody><tr><td>0.090–0.110</td><td>16.42–16.423</td><td>399.9–410</td><td>4.5–5.15</td></tr><tr><td>1.0495–0.505</td><td>16.69475–16.69525</td><td>608–614</td><td>5.35–5.46</td></tr><tr><td>2.1735–2.1905</td><td>16.80425–16.80475</td><td>960–1240</td><td>7.25–7.75</td></tr><tr><td>4.125–4.128</td><td>25.5–25.67</td><td>1300–1427</td><td>8.025–8.5</td></tr><tr><td>4.17725–4.17775</td><td>37.5–38.25</td><td>1435–1626.5</td><td>9.0–9.2</td></tr><tr><td>4.20725–4.20775</td><td>73–74.6</td><td>1645.5–1646.5</td><td>9.3–9.5</td></tr><tr><td>6.215–6.218</td><td>74.8–75.2</td><td>1660–1710</td><td>10.6–12.7</td></tr><tr><td>6.26775–6.26825</td><td>108–121.94</td><td>1718.8–1722.2</td><td>13.25–13.4</td></tr><tr><td>6.31175–6.31225</td><td>123–138</td><td>2200–2300</td><td>14.47–14.5</td></tr><tr><td>8.291–8.294</td><td>149.9–150.05</td><td>2310–2390</td><td>15.35–16.2</td></tr><tr><td>8.362–8.366</td><td>156.52475–156.52525</td><td>2483.5–2500</td><td>17.7–21.4</td></tr><tr><td>8.37625–8.38675</td><td>156.7–156.9</td><td>2655–2900</td><td>22.01–23.12</td></tr><tr><td>8.41425–8.41475</td><td>162.0125–167.17</td><td>3260–3267</td><td>23.6–24.0</td></tr><tr><td>12.29–12.293</td><td>167.72–173.2</td><td>3332–3339</td><td>31.2–31.8</td></tr><tr><td>12.51975–12.52025</td><td>240–285</td><td>3345.8–3358</td><td>36.43–36.5</td></tr><tr><td>12.57675–12.57725</td><td>322–335.4</td><td>3600–4400</td><td>(2)</td></tr><tr><td>13.36–13.41</td><td></td><td></td><td></td></tr></tbody></table> ¹Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz. ²Above 38.6	MHz	MHz	MHz	GHz	0.090–0.110	16.42–16.423	399.9–410	4.5–5.15	1.0495–0.505	16.69475–16.69525	608–614	5.35–5.46	2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75	4.125–4.128	25.5–25.67	1300–1427	8.025–8.5	4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2	4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5	6.215–6.218	74.8–75.2	1660–1710	10.6–12.7	6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4	6.31175–6.31225	123–138	2200–2300	14.47–14.5	8.291–8.294	149.9–150.05	2310–2390	15.35–16.2	8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4	8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12	8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0	12.29–12.293	167.72–173.2	3332–3339	31.2–31.8	12.51975–12.52025	240–285	3345.8–3358	36.43–36.5	12.57675–12.57725	322–335.4	3600–4400	(2)	13.36–13.41						
MHz	MHz	MHz	GHz																																																																									
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15																																																																									
1.0495–0.505	16.69475–16.69525	608–614	5.35–5.46																																																																									
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75																																																																									
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5																																																																									
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2																																																																									
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5																																																																									
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7																																																																									
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4																																																																									
6.31175–6.31225	123–138	2200–2300	14.47–14.5																																																																									
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2																																																																									
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4																																																																									
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12																																																																									
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0																																																																									
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8																																																																									
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5																																																																									
12.57675–12.57725	322–335.4	3600–4400	(2)																																																																									
13.36–13.41																																																																												
	(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions of 15.35 apply to these measurements.																																																																											
FCC CFR 47 §15.209	(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:																																																																											
	<table><thead><tr><th>Frequency</th><th colspan="2">Field Strength</th><th>Measurement Distance</th></tr><tr><th>MHz</th><th>uV/m</th><th>dBuV/m</th><th>Meters</th></tr></thead><tbody><tr><td>.009 – 0.490</td><td>2400/F(kHz)</td><td>48.52 – 13.80</td><td>300</td></tr><tr><td>0.490 – 1.705</td><td>24000/F(kHz)</td><td>33.80 – 22.97</td><td>30</td></tr><tr><td>1.705 – 30.0</td><td>30</td><td>29.54</td><td>30</td></tr><tr><td>30 – 88</td><td>100</td><td>40.00</td><td>3</td></tr><tr><td>88 – 216</td><td>150</td><td>43.52</td><td>3</td></tr><tr><td>216 – 960</td><td>200</td><td>46.02</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>53.98</td><td>3</td></tr></tbody></table>	Frequency	Field Strength		Measurement Distance	MHz	uV/m	dBuV/m	Meters	.009 – 0.490	2400/F(kHz)	48.52 – 13.80	300	0.490 – 1.705	24000/F(kHz)	33.80 – 22.97	30	1.705 – 30.0	30	29.54	30	30 – 88	100	40.00	3	88 – 216	150	43.52	3	216 – 960	200	46.02	3	Above 960	500	53.98	3																																							
Frequency	Field Strength		Measurement Distance																																																																									
MHz	uV/m	dBuV/m	Meters																																																																									
.009 – 0.490	2400/F(kHz)	48.52 – 13.80	300																																																																									
0.490 – 1.705	24000/F(kHz)	33.80 – 22.97	30																																																																									
1.705 – 30.0	30	29.54	30																																																																									
30 – 88	100	40.00	3																																																																									
88 – 216	150	43.52	3																																																																									
216 – 960	200	46.02	3																																																																									
Above 960	500	53.98	3																																																																									
	(b) In the emission table above, the tighter limit applies at the band edges.																																																																											

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							29 of 48



Temperature	27.4 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96.24 +/- 0.2 kPa

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00072	EMCO	2075	Mini-mast	n/a	n/a
00073	EMCO	2080	Turn Table	n/a	n/a
00071	EMCO	2090	Multi-Device Controller	n/a	n/a
00200	Empire	LG-105	Large Loop Antenna	30Apr04	30Apr05
00201	Empire	LC-105	Small Loop Antenna	30Apr04	30Apr05
00050	Chase	CBL-6111A	Bilog Antenna	30Apr04	30Apr05
00035	ETS	3115	Double Ridged Guide Horn	24Mar04	24Mar05
00202	ETS	3160-09	Small Horn Antenna	27May04	27Jun05
00015	Agilent	E4408B	Spectrum Analyzer	29Dec03	29Dec04
00049	HP	8566B	Spectrum Analyzer RF Section	18May04	18May05
00049	HP	85650A	Quasi-peak Adapter	18May04	18May05
00047	HP	85685A	RF Preselector	18May04	18May05
00048	Gore	65474	Microwave Cable	20May04	20May05
00030	HP	83017A	LNA	20May04	20May05

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							30 of 48

MEASUREMENT EQUIPMENT CONNECTIONS




Frequency Range	Antenna
9 kHz – 150 kHz	LP-105 Loop
150 kHz – 30 MHz	LG-105 Loop
30 MHz – 1 GHz	CBL-6111A Bilog
1 GHz – 18 GHz	ETS 3115 Horn
18 GHz– 26GHz	ETS 3160-09 Horn

Frequency Range	RBW	VBW	Detector
MHz	kHz	kHz	
0.009 - 0.150	0.200	10	Peak*
0.150 - 30	9	30	Peak*
30 – 1000	100	300	Peak*
> 1000	1000*	1000	Peak*

The diagram illustrates the measurement setup for the 100 MHz and 100 kHz tests. It shows a Signal Generator connected to a Spectrum Analyzer via a cable. The Spectrum Analyzer is connected to an LNA* (Low Noise Amplifier) and then to an HPF* (High Pass Filter). The output of the HPF* is connected to a probe, which is positioned 1 or 3 meters away from the DUT (Device Under Test). The probe is also positioned 1 - 4 meters above the DUT. The DUT is placed on a table.

31 of 48

Photograph F-1 - Horizontal Polarization (30MHz - 1 GHz)



Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							32 of 48

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874


F.9. TEST RESULTS

F.9.1. Upper Band-edge Emission Field Strengths @ Specified Distance

Note: (Lower Band-edge (Out-of-Band) is in Appendix E)


Channel 11 Mode b - Conducted Band-edge Plots

Agilent 21:32:58 Nov 3, 2004

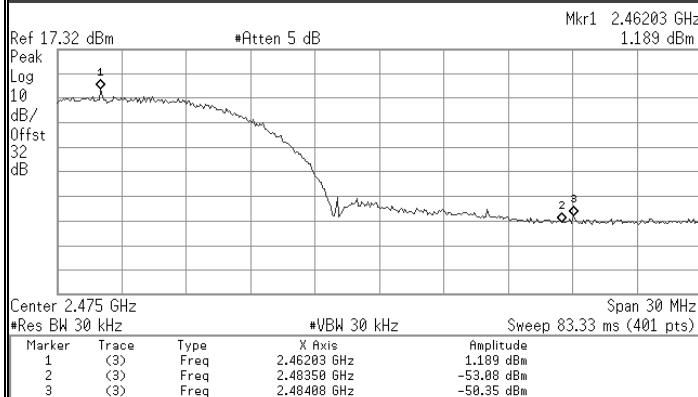

Channel 11 Mode g - Conducted Band-edge Plots

Agilent 21:29:16 Nov 3, 2004

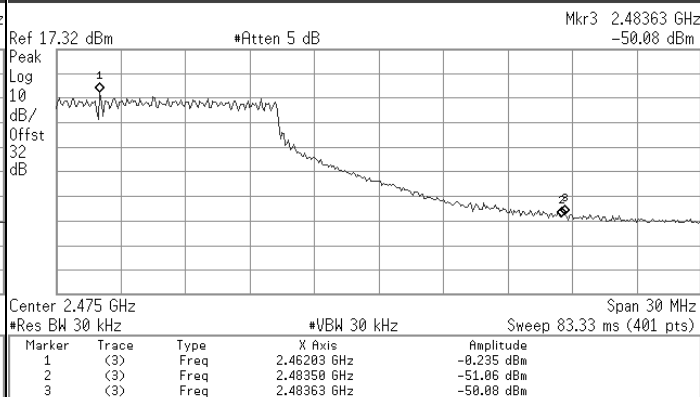

Channel 11 Mode b - Radiated Carrier Field Strengths

Mode b													
Channel	Polarity	Measurement Distance	Antenna	Frequency	SA Level	Noise Floor	AF	CL	Other	Total CF	Field Strength	Detector	
							m	MHz	dBuV	dB/m	dB	dB	dBuV/m
11	H	3	Horn SN6276	2462.00	80.01		30.34	3.52	0.00	33.86	113.87	PK	
11	H	3	Horn SN6276	2462.00	71.00		30.34	3.52	0.00	33.86	104.86	AV	
11	V	3	Horn SN6276	2462.00	74.17		30.34	3.52	0.00	33.86	108.03	PK	
11	V	3	Horn SN6276	2462.00	65.24		30.34	3.52	0.00	33.86	99.10	AV	

Channel 11 Mode g - Radiated Carrier Field Strengths

Mode g												
Channel	Polarity	Measurement Distance	Antenna	Frequency	SA Level	Noise Floor	AF	CL	Other	Total CF	Field Strength	Detector
m	MHz	dBuV	dBm/m	dB	dB	dBuV/m	(PK/QP/AVG)					
11	H	3	Horn SN6276	2462.00	77.70		30.34	3.52	0.00	33.86	111.56	PK
11	H	3	Horn SN6276	2462.00	69.10		30.34	3.52	0.00	33.86	102.96	AV
11	V	3	Horn SN6276	2462.00	73.86		30.34	3.52	0.00	33.86	107.72	PK
11	V	3	Horn SN6276	2462.00	64.80		30.34	3.52	0.00	33.86	98.66	AV

Channel 11 b – Calculated Band-edge (Restricted) Field Strengths

Mode b												
Channel	Polarity	Distance	Frequency	Carrier Radiated Field Strength	Marker-Data	Detector	Calculated Band-edge Field Strength	Limit Distance	Limit Distance Correction	Specified Limit	Margin	Pass/Fail
		m	MHz	dBµV/m	dBµV		dBµV/m	m	dB	dBµV/m	dB	
11	H	3	2483.50	113.87	51.54	PK	62.33	3.00	0.00	73.98	11.65	Pass
11	H	3	2483.50	104.86	51.54	AV	53.32	3.00	0.00	53.98	0.66	Pass
11	V	3	2483.50	108.03	51.54	PK	56.49	3.00	0.00	73.98	17.49	Pass
11	V	3	2483.50	99.10	51.54	AV	47.56	3.00	0.00	53.98	6.42	Pass

Channel 11 g - Calculated Band-edge (Restricted) Field Strengths

Mode g												
Channel	Polarity	Distance	Frequency	Carrier Radiated Field Strength	Marker-Delta	Detector	Calculated Band-edge Field Strength	Limit Distance	Limit Distance Correction	Specified Limit	Margin	Pass/Fail
		m	MHz	dBuV/m	dBuV		dBuV/m	m	dB	dBuV/m	dB	
11	H	3	2483.50	111.56	49.85	PK	61.71	3.00	0.00	73.98	12.27	Pass
11	H	3	2483.50	102.96	49.85	AV	53.11	3.00	0.00	53.98	0.87	Pass
11	V	3	2483.50	107.72	49.85	PK	57.87	3.00	0.00	73.98	16.11	Pass
11	V	3	2483.50	98.66	49.85	AV	48.81	3.00	0.00	53.98	5.17	Pass

Formulae:


$$\text{Total CF (dB)} = \text{Antenna Factor (dB)} + \text{Cable Factor (dB)} + \text{Other Factor (Amplifier Gain, Filter Loss, etc) (dB)}$$
$$\text{Field Strength (dBuV/m)} = \text{SA Reading (dBuV)} + \text{Total CF (dB/m)}$$

Limit Distance Correction (dB) = $40 \cdot \log(d_1/d_2)$ for $f < 30$ MHz, $20 \cdot \log(d_1/d_2)$ for $f > 30$ MHz; where d_1 is the measurement distance and d_2 is the published limit

$$\text{Limit (dBuV/m)} = \text{Published Limit (dBuV/m)} + \text{Limit Distance Correction (dB)}$$
$$\text{Margin (dB)} = \text{Limit (dBuV/m)} - \text{Field Strength (dBuV/m)}$$

Note: Measurements and calculation reference the Marker-Delta Method described in FCC Public Notice DA 00-705

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						33 of 48



Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

Formulae:

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)

$$\text{Field Strength} = \text{SA Reading} + \text{Total CF}$$

Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:


where d_1 is the measurement distance, d_2 is the published limit distance

$$\text{Limit} = \text{Specified Limit} + \text{Limit Distance Correction}$$
$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

*Where applicable the QP or Average Limits were applied to the peak emission

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.


Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						34 of 48



Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.



Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

Formulae:

$$\text{Field Strength} = \text{SA Reading} + \text{Total CF}$$


where d_1 is the measurement distance, d_2 is the published limit distance

$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

*Where applicable the QP or Average Limits where applied to the peak emission

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							36 of 48




Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

+

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							37 of 48



Celltech
Testing and Engineering Services Ltd

Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							38 of 48

Celltech
NATURE AND ENVIRONMENTAL SCIENCE LTD


Standard:	FCC15.209
Test Start Date:	25Oct04
Test End Date:	03Nov04

Mode b																		
Channel	Polarity	Distance	Rx Antenna	Frequency	SA Level	Noise Floor	Rx AF	Rx CL	Other Rx	Total Rx CF	Field Strength	Detector	Limit Distance	Limit Distance Correction	Calculated Limit	Lower Limit	Margin	Pass/Fail
CH11	H	3	Horn SN6276	4924.00	41.20		35.55	5.05	-34.09	6.51	47.71	PK	3.00	0.00	73.98		26.27	PASS
CH11	H	3	Horn SN6276	4924.00	28.80		35.55	5.05	-34.09	6.51	35.31	AV	3.00	0.00	53.98		18.67	PASS
CH11	H	3	Horn SN6276	7386.00	44.50		38.49	6.34	-34.32	10.51	55.01	PK	3.00	0.00	73.98		18.97	PASS
CH11	H	3	Horn SN6276	7386.00	31.70		38.49	6.34	-34.32	10.51	42.21	AV	3.00	0.00	53.98		11.77	PASS
CH11	H	1	Horn SN6276	12310.00	36.30	x	40.93	8.69	-34.18	15.45	51.75	PK	3.00	9.54	63.52	*	11.78	PASS
CH11	H	1	Horn SN6276	14772.00	51.90	x	42.55	9.29	-34.11	17.73	69.63	PK	3.00	9.54	83.52		13.89	PASS
CH11	H	1	Horn SN6276	14772.00	39.00	x	42.55	9.29	-34.11	17.73	56.73	AV	3.00	9.54	63.52		6.79	PASS
CH11	H	1	3160-09	19696.00	54.90	x	40.30	11.42	-36.33	15.39	70.29	PK	3.00	9.54	83.52		13.24	PASS
CH11	H	1	3160-09	19696.00	42.30	x	40.30	11.42	-36.33	15.39	57.69	AV	3.00	9.54	63.52		5.84	PASS
CH11	H	1	3160-09	22158.00	49.49	x	40.33	12.08	-37.86	14.54	64.03	PK	3.00	9.54	83.52		19.49	PASS
CH11	H	1	3160-09	22158.00	35.19	x	40.33	12.08	-37.86	14.54	49.73	AV	3.00	9.54	63.52		13.79	PASS
CH11	V	3	Horn SN6276	4924.00	46.60		35.55	5.05	-34.09	6.51	53.11	PK	3.00	0.00	73.98		20.87	PASS
CH11	V	3	Horn SN6276	4924.00	40.10		35.55	5.05	-34.09	6.51	46.61	AV	3.00	0.00	53.98		7.37	PASS
CH11	V	3	Horn SN6276	7386.00	43.60		38.49	6.34	-34.32	10.51	54.11	PK	3.00	0.00	73.98		19.87	PASS
CH11	V	3	Horn SN6276	7386.00	31.10		38.49	6.34	-34.32	10.51	41.61	AV	3.00	0.00	53.98		12.37	PASS
CH11	V	1	Horn SN6276	12310.00	36.90		40.93	8.69	-34.18	15.45	52.35	PK	3.00	9.54	63.52	*	11.18	PASS
CH11	V	1	Horn SN6276	14772.00	51.30	x	42.55	9.29	-34.11	17.73	69.03	PK	3.00	9.54	83.52		14.49	PASS
CH11	V	1	Horn SN6276	14772.00	39.06	x	42.55	9.29	-34.11	17.73	56.79	AV	3.00	9.54	63.52		6.73	PASS
CH11	V	1	3160-09	19696.00	55.50	x	40.30	11.42	-36.33	15.39	70.89	PK	3.00	9.54	83.52		12.64	PASS
CH11	V	1	3160-09	19696.00	42.30	x	40.30	11.42	-36.33	15.39	57.69	AV	3.00	9.54	63.52		5.84	PASS
CH11	V	1	3160-09	22158.00	49.48	x	40.33	12.08	-37.86	14.54	64.02	PK	3.00	9.54	83.52		19.50	PASS
CH11	V	1	3160-09	22158.00	35.46	x	40.33	12.08	-37.86	14.54	50.00	AV	3.00	9.54	63.52		13.52	PASS

Total CF = Antenna Factor + Cable Factor + Other Factor (Amplifier Gain, filter loss, etc)
 Field Strength = SA Reading + Total CF
 Limit Distance Correction = $40 \cdot \log(d1/d2)$ for $F < 30$ MHz, $20 \cdot \log(d1/d2)$ for $F > 30$ MHz:
 where d1 is the measurement distance, d2 is the published limit distance
 Limit = Specified Limit + Limit Distance Correction
 Margin = Limit - Field Strength

The frequency points reported describe the highest emission measured in each of the ranges tested and are used to describe the measured spectrum as a whole. It is shown that the highest emissions measured within the spectrum pass the appropriate restricted limits; therefore all emissions within the restricted bands would also meet the requirements. No out-of-band emissions were measured above the levels noted.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.						39 of 48



In reference to the results outlined in F.9, the DUT passes the requirements as stated in the reference standards as follows: FCC 15.205 (a) (b) and 15.209 (a): No emissions were measured within the restricted bands as outlined in 15.205 that exceeded the limits stated in 15.209.

Date _____

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							40 of 48

G.1. REFERENCES	
Normative Reference Standard	FCC CFR 47 §15.247(d)
Procedure Reference	FCC 97-114

G.2. LIMITS
G.2.1. FCC CFR
<i>§15.247(d): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.</i>

G.3. TEST PROCEDURE
The test method used is outlined in the ADT Corp reference test report no. RF921215R02, section 4.5

G.4. TEST RESULTS						
The results used to show compliance to the applicable parts are outlined in the ADT Corp reference test report no. RF921215R02, section 4.5.						
Channel	802.11b			802.11g		
	Frequency (GHz)	PPSD (dBm)	Data Rate Mb/s	Frequency (GHz)	PPSD (dBm)	Data Rate Mb/s
Low	2.412	-1.13	11	2.412	-10.79	6
Mid	2.437	5.44	11	2.437	-7.58	6
High	2.462	4.44	11	2.462	-11.99	6

G.5. PASS/FAIL	
In reference to the results outlined in G.4 and stated in the ADT Corp reference report, the DUT passes the requirements as stated in the reference standards as follows: FCC 15.247 (d): The peak power spectral density did not exceed +8 dBm in any 3 kHz band.	

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

Appendix H - Conducted Powerline Emissions Measurement

H.1. REFERENCES

Normative Reference Standard	CFR 47 FCC Part 15 §15.207
Procedure Reference	ANSI C63.4

H.2. LIMITS

\$15.207: Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each powerline and ground at the power terminal.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.50 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases logarithmically with frequency.

H.3. ENVIRONMENTAL CONDITIONS

Temperature	+26 ± 5 °C
Humidity	31 % ± 10% RH
Barometric Pressure	101.4 kpa

H.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00063	HP	85662A	Spectrum Analyzer Display	na	na
00051	HP	8566B	Spectrum Analyzer RF Section	18May04	18May05
00049	HP	85650A	Quasi-Peak Adapter	18May04	18May05
00047	HP	85685A	Preselector	18May04	18May05
00083	EMCO	3825/2	Line Impedance Stabilization Network	29Apr04	29Apr05
00084	EMCO	3825/2	Line Impedance Stabilization Network	29Apr04	29Apr05

H.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The conducted emissions were measured on each of the two AC powerline leads connected to the DUT's power supply brick. A two line LISN was used to make this measurement. A drawing of the equipment setup is shown in H.7
MEASUREMENT EQUIPMENT SETTINGS	Each of the monitor ports from the 2-line LISN was connected in turn to the spectrum analyzer. The port not connected to the analyzer was terminated in a 50-ohm load. A prescan of the peak emission levels was made of the 150 kHz – 30 MHz range split into 4 equal frequency bands. The following were the spectrum analyzer settings: - Start Frequency and Stop Frequency set by software for each of the four bands - RBW: 100 kHz - VBW: 300 kHz - Sweep: 500 mS The resulting data from each band was corrected and collected by software and presented in the graphical representations shown in H.9 for the two leads. The frequency points with the highest 10 levels on each lead were used by software to optimize a set of 20 readings for each type of detector (peak, quasi-peak and average). This data was corrected by the software is presented in the tables shown in section H.9.

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							42 of 48

Photograph H-1 - AC Powerline Conducted Emission Configuration



Photograph H-2 - AC Powerline Conducted Emission Cable Placement





Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							43 of 48

Figure H-1 - Setup Drawing

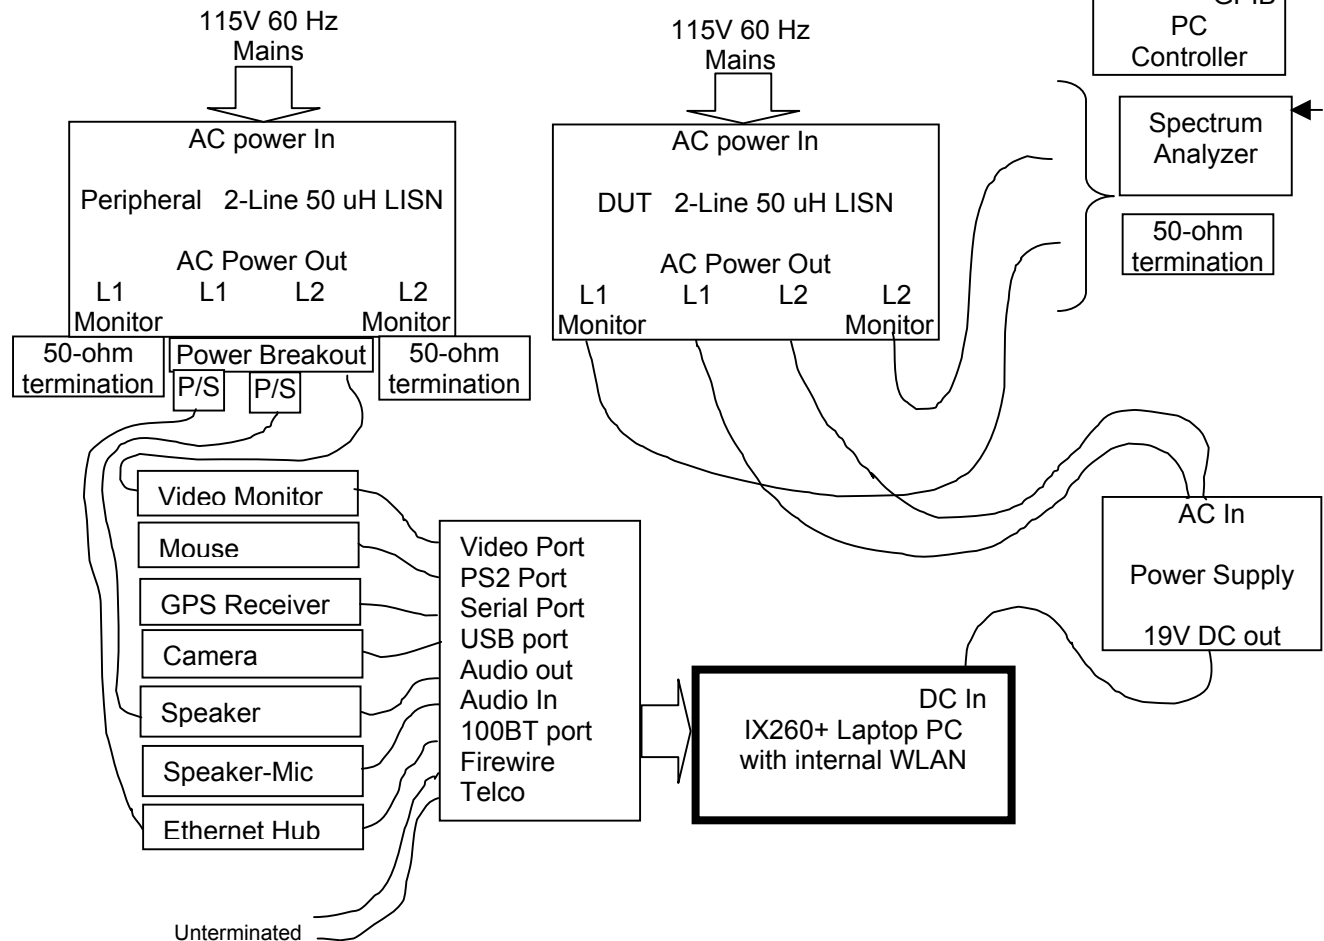


WLAN:	The WLAN was set to transmit at full power on Channel 1, Mode b 1 Mb/s
PC:	Other than operating the WLAN software and running MS windows, no PC exercising was performed.
Peripherals:	All peripherals were active, but no specific traffic was initiated.

Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

H.9. TEST RESULTS

H.9.1. Line 1 Conducted Emissions

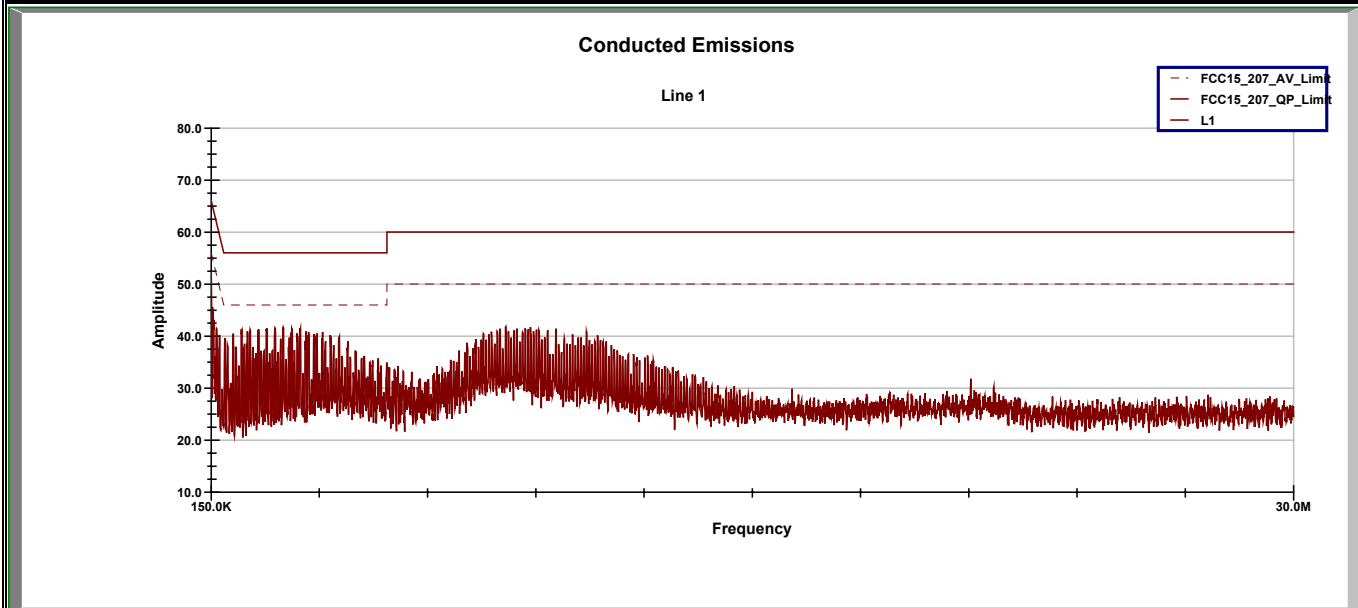

Project Number: 072804KBC-T543-E15B
Company: Itronix
Product: IX260+ with Cirronet BT2022 Bluetooth

Standard: FCC 15.207
Test Start Date: 14-Oct-04
Test End Date: 14-Oct-04

Line 1 Conducted Emissions

Frequency MHz	Uncorrected Reading			Correction Factor dB	Corrected Emission Level			Quasi-Peak Limit dBuV	Quasi-Peak Margin dB	Average Limit dBuV	Average Margin dB	Pass/Fail
	Peak dBuV	Quasi-Peak dBuV	Average dBuV		Peak dBuV	Quasi-Peak dBuV	Average dBuV					
0.186	46.50	42.69	25.92	1.57	48.07	44.26	27.49	64.23	19.97	54.23	26.74	Pass
0.992	39.70	38.89	38.44	0.32	40.03	39.22	38.77	56.00	16.79	46.00	7.24	Pass
1.895	43.00	31.49	29.85	0.29	43.29	31.78	30.13	56.00	24.22	46.00	15.87	Pass
2.126	43.10	41.67	41.32	0.29	43.39	41.96	41.61	56.00	14.04	46.00	4.39	Pass
8.290	42.80	41.50	38.55	0.32	43.12	41.82	38.87	60.00	18.18	50.00	11.13	Pass
8.975	42.40	40.92	36.32	0.33	42.73	41.25	36.65	60.00	18.75	50.00	13.35	Pass
9.654	41.40	39.08	33.94	0.33	41.73	39.41	34.27	60.00	20.59	50.00	15.73	Pass
16.301	30.00	23.10	15.72	0.37	30.37	23.47	16.09	60.00	36.53	50.00	33.91	Pass

Calculations

CF = Correction Factor
Emission Level = Measured Level + correction factor
Margin = Limit – Emission Level


Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
------------	---------------------	--------	----------------	--------	---------------	---------	-------------------

Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM



Test Report S/N:	102604KBC-T575-E15W	
Test Date(s):	25Oct04 - 05Nov04	
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5
Lab Registration(s):	FCC #714830	IC Lab File #3874

H.9.2. Line 2 Conducted Emissions

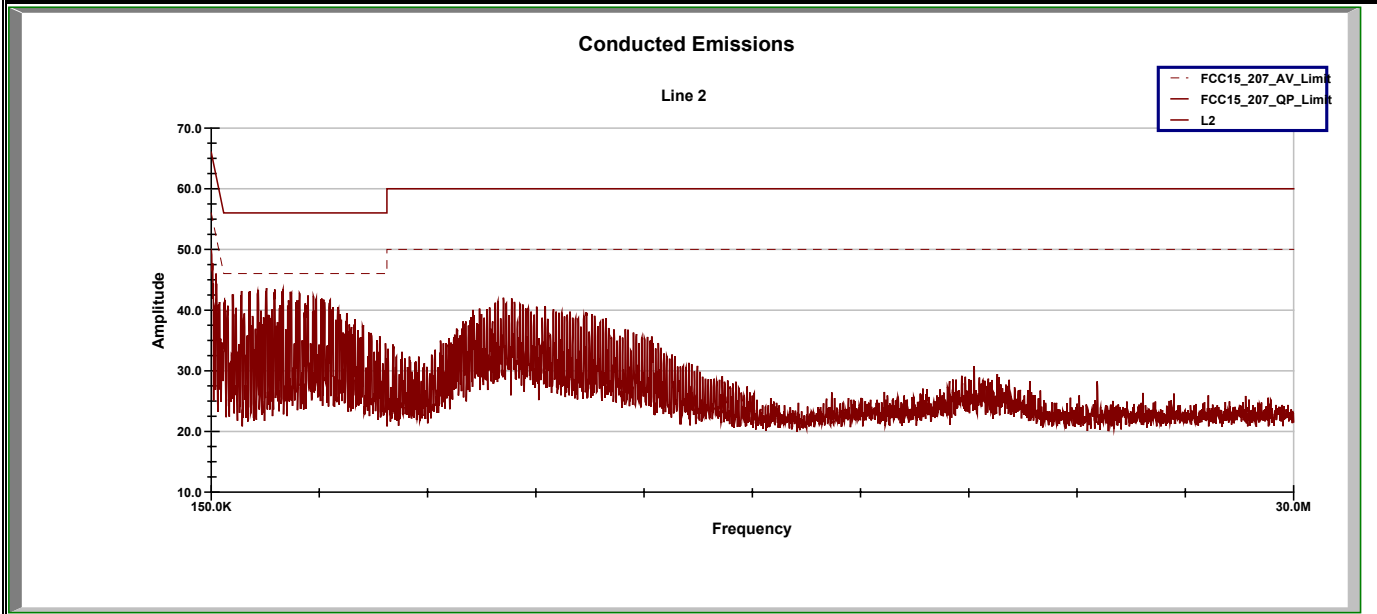

Project Number: 072804KBC-T543-E15B
Company: Itronix
Product: IX260+ with Cirronet BT2022 Bluetooth

Standard:	FCC 15.207
Test Start Date:	14-Oct-04
Test End Date:	14-Oct-04

Line 2 Conducted Emissions


Frequency	Uncorrected Reading			Correction Factor	Corrected Emission Level			Quasi-Peak Limit	Quasi-Peak Margin	Average Limit	Average Margin	Pass/Fail
	Peak	Quasi-Peak	Average		Peak	Quasi-Peak	Average					
MHz	dBuV	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dBuV	dB	
0.193	48.10	44.67	28.79	1.51	49.61	46.18	30.30	63.91	17.72	53.91	23.61	Pass
0.284	42.00	38.75	19.10	0.89	42.89	39.64	20.00	60.71	21.06	50.71	30.71	Pass
1.670	43.20	42.67	42.72	0.30	43.50	42.97	43.02	56.00	13.03	46.00	2.98	Pass
1.900	43.40	42.75	42.79	0.29	43.69	43.04	43.09	56.00	12.96	46.00	2.91	Pass
8.209	41.90	40.79	37.84	0.33	42.23	41.12	38.17	60.00	18.88	50.00	11.83	Pass
8.437	41.90	40.93	38.24	0.33	42.23	41.26	38.57	60.00	18.74	50.00	11.43	Pass
10.488	39.90	38.66	35.90	0.33	40.23	38.99	36.24	60.00	21.01	50.00	13.77	Pass
21.024	31.50	27.26	22.42	0.99	32.49	28.25	23.41	60.00	31.75	50.00	26.59	Pass

Calculations

CF = Correction Factor

$$\text{Emission Level} = \text{Measured Level} + \text{correction factor}$$
$$\text{Margin} = \text{Limit} - \text{Emission Level}$$

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 46 of 48							



In reference to the results outlined in H.9 the DUT passes the requirements as stated in the reference standards as follows:
The RF voltage measured in reference to ground on each of the power line conductors does not exceed the limits as outline in FCC 15.207.

H.11. SIGN-OFF


I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell W. Pease

Russell Pipe
Senior Compliance Technologist
Celltech Labs Inc.

05Nov04

Date _____



END OF DOCUMENT

Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							48 of 48