

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## EMC TEST REPORT

FOR THE

**ITRONIX RUGGED TABLET PC MODEL: IX325-AC775IWL**  
INCLUDING THE  
**SIERRA WIRELESS AIRCARD 775**  
**DUAL-BAND GSM GPRS/EDGE PCMCIA MODEM**  
WITH  
**EXTERNAL MONOPOLE ANTENNA**

**FCC ID: KBCIX325-AC775IWL**

**IC: 1943A-IX325e**

**Test Report Serial Number**  
**060605KBC-T645-E24G**  
**Issue 1.0**

**Test Lab**  
**Celltech Compliance Testing & Engineering Lab**  
**(Celltech Labs Inc.)**  
**1955 Moss Court**  
**Kelowna, BC**  
**Canada V1Y 9L3**

**Test Report Issue Date**  
**September 01, 2005**

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## DECLARATION OF COMPLIANCE

|  |  |  |  |   |  |           |
|--|--|--|--|---|--|-----------|
| <u>Test Lab</u>                        | <b>CELLTECH LABS INC.</b><br>Testing and Engineering Services<br>1955 Moss Court<br>Kelowna, B.C. Canada V1Y 9L3 |  |  | <u>Applicant Information</u>  | <b>ITRONIX CORPORATION</b><br>801 South Stevens Street<br>Spokane, WA 99204<br>United States |           |
| Phone:                                 | 250-448-7047   |  |  |   |  |           |
| Fax:                                   | 250-448-7048   |  |  |   |  |           |
| e-mail:                                | info@celltechlabs.com  |  |  |   |  |           |
| web site:                              | www.celltechlabs.com   |  |  |   |  |           |
| <u>Laboratory Registration No.(s):</u> |  | FCC:   | 714830   | IC:   | IC 3874  |           |
| <u>Rule Part(s):</u>                   |  | FCC:   | §2; §22H; §24E                                 |   |  |           |
|  |  | IC:  | RSS-133 Issue 3, RSS-132 Issue 1 (Provisional) |   |  |           |
| <u>Device Classification:</u>          |  | FCC:   | Dual Band GSM                                  | - PCS Licensed Transmitter (PCB)  |  |           |
|  |  |  | Dual Band GSM                                  | - 800 MHz Cellular Telephones Employing New Technologies<br>- 2 GHz Personal Communication Services |  |           |
| <u>Device Identification:</u>          |  | FCC ID:  | KBCIX325-AC775IWL                              | IC ID:  | 1943A-IX325e   |           |
| <u>DUT Description:</u>                |  |  |  |   |  |           |
| <u>Model:</u>                          |  | IX325-AC775IWL   |  |   |  |           |
| <u>Device Description:</u>             |  | Rugged Tablet PC   |  |   |  |           |
| <u>Internal Transmitter:</u>           |  | Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem |  |   |  |           |
| <u>Antenna(s) Tested:</u>              |  | Dual Band GSM  | Sierra Wireless Monopole Antenna               |   |  |           |
| <u>Tx Frequency Range(s):</u>          |  | Dual Band GSM  | Cellular                                       | 824.2 - 848.8 MHz   |  |           |
|  |  |  | PCS  | 1850.2 - 1909.8 MHz   |  |           |
| <u>Max. RF Output Power Measured:</u>  |  | Dual Band GSM  | Cellular                                       | Conducted   | 1.56 Watts   | 31.92 dBm |
|  |  |  |  | ERP   | 1.00 Watts   | 30.01 dBm |
|  |  |  | PCS  | Conducted   | 0.832 Watts  | 29.20 dBm |
|  |  |  |  | EIRP  | 1.26 Watts   | 31.02 dBm |
| <u>Modulation Type(s):</u>             |  | Dual Band GSM  | GMSK, 8-PSK                                    |   |  |           |
| <u>Power Source(s) Tested:</u>         |  | Stationary: 75 Watt AC Power Adapter (Model: ADP-75FB B)         |  |   |  |           |
|  |  | Portable: 11.1V Lithium-ion Battery, 3.6Ah (Model: A2121-2)      |  |   |  |           |

This wireless device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Parts 2, 22H, 24E, Industry Canada RSS-132 Issue 1 (Provisional), RSS 133 Issue 3; and ANSI TIA/EIA-603-C-2004.

I attest to the accuracy of the data. All measurements reported herein were performed by me or were under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested by:



Reviewed by:



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

Duane M. Friesen  
EMC Manager  
Celltech Labs Inc.



|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX CORPORATION  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 2 of 69        |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## TABLE OF CONTENTS

|  |    |
|--|----|
| 1.0 SCOPE .....  | 6  |
| 2.0 REFERENCES .....   | 6  |
| 2.1 Normative References .....   | 6  |
| 3.0 TERMS AND DEFINITIONS .....  | 7  |
| 4.0 FACILITIES AND ACCREDITATIONS .....                                    | 8  |
| 5.0 GENERAL INFORMATION .....  | 8  |
| 5.1 Applicant Information .....  | 8  |
| 5.2 DUT Description .....  | 8  |
| 5.3 Co-Located Equipment .....   | 9  |
| 5.4 Cable Descriptions .....   | 9  |
| 5.5 Support Equipment .....  | 10 |
| 5.6 Clock Frequencies .....  | 10 |
| 5.7 Mode(s) of Operation Tested .....                                      | 11 |
| 5.8 Configuration Description .....  | 11 |
| 6.0 PASS/FAIL CRITERIA .....   | 12 |
| APPENDICES .....   | 13 |
| Appendix A - Photographs .....   | 14 |
| Appendix B - Cellular Band Conducted TX RF Output Power Measurement .....  | 15 |
| Appendix C - Conducted Cellular TX Spurious Emissions Measurement .....    | 18 |
| Appendix D - Conducted Cellular RX Spurious Emissions Measurement .....    | 25 |
| Appendix E - Cellular Band Effective Radiated Power Measurement .....      | 29 |
| Appendix F - Radiated Cellular TX Spurious Emissions Measurement .....     | 33 |
| Appendix G - PCS Band Conducted TX RF Output Power Measurement .....       | 41 |
| Appendix H - Conducted PCS TX Spurious Emissions Measurement .....         | 44 |
| Appendix I - Conducted PCS RX Spurious Emissions Measurement .....         | 52 |
| Appendix J - PCS Band Effective Isotropic Radiated Power Measurement ..... | 57 |
| Appendix K - Radiated PCS TX Spurious Emissions Measurement .....          | 61 |
| END OF DOCUMENT .....  | 69 |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## FIGURES

|  |    |
|--|----|
| Figure B.6-1 - Setup Drawing .....                     | 16 |
| Figure C.6-1 - Setup Drawing .....                     | 19 |
| Figure D.6-1 - Setup Drawing .....                     | 26 |
| Figure E.6-1 - Field Strength Setup Drawing .....      | 30 |
| Figure E.6-2 - Signal Substitution Setup Drawing ..... | 30 |
| Figure F.6-1 - Field Strength Setup Drawing .....      | 35 |
| Figure F.6-2 - Signal Substitution Setup Drawing ..... | 35 |
| Figure G.6-1 - Setup Drawing .....                     | 42 |
| Figure H.6-1 - Setup Drawing .....                     | 45 |
| Figure I.6-1 - Setup Drawing .....                     | 53 |
| Figure J.6-1 - Field Strength Setup Drawing .....      | 58 |
| Figure J.6-2 - Substitution Setup Drawing .....        | 58 |
| Figure K.6-1 - Field Strength Setup Drawing .....      | 63 |
| Figure K.6-2 - Signal Substitution Setup Drawing ..... | 63 |

## PHOTOGRAPHS

|   |    |
|---|----|
| Photograph A.1-1 - Tablet PC in the worst-case Cellular Configuration .....                   | 14 |
| Photograph A.1-2 - Tablet PC in the worst-case PCS Configuration .....                        | 14 |
| Photograph A.1-3 - AirCard 775 PCMCIA Modem Card .....  | 14 |
| Photograph A.1-4 - AirCard 775 Monopole Antenna .....   | 14 |
| Photograph E.7-1 - DUT in Highest Cellular Carrier Configuration .....                        | 31 |
| Photograph F.7-1 - Horizontal Bilog Cellular Radiated Emissions Setup .....                   | 36 |
| Photograph F.7-2 - Vertical 3115 Horn and LNA Cellular Radiated Emissions Setup .....         | 36 |
| Photograph J.7-1 - DUT in Highest PCS Carrier Configuration .....                             | 59 |
| Photograph K.7-1 - Vertical Bilog PCS Band Radiated Emissions 3-meter Setup .....             | 64 |
| Photograph K.7-2 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 3-meter Setup ..... | 64 |
| Photograph K.7-3 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 1-meter Setup ..... | 64 |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## TEST SUMMARY

### Referenced Standard: FCC CFR Title 47 Part 2, 22H

| Appendix | Test Description                | Procedure Reference | Limit Reference | Test Start Date | Test End Date | Result |
|----------|---------------------------------|---------------------|-----------------|-----------------|---------------|--------|
| B        | Conducted RF Output Power       | §2.1046             | §2.1046         | 24May05         | 24May05       | Pass   |
| C        | Conducted TX Spurious Emissions | §22.917(b)          | §22.917(a)      | 25May05         | 25May05       | Pass   |
| E        | Effective Radiated Power        | ANSI/TIA/EIA-603-C  | §22.913         | 26May05         | 26May05       | Pass   |
| F        | Radiated TX Spurious Emissions  | ANSI/TIA/EIA-603-C  | §22.917 (e)     | 1Jun05          | 27Jun05       | Pass   |

### Referenced Standard: FCC CFR Title 47 Part 2, 24E

|   |                                    |                    |             |         |         |      |
|---|------------------------------------|--------------------|-------------|---------|---------|------|
| G | Conducted RF Output Power          | §2.1046            | §2.1046     | 24May05 | 24May05 | Pass |
| H | Conducted TX Spurious Emissions    | §24.238(b)         | §24.238(a)  | 25May05 | 25May05 | Pass |
| J | Effective Isotropic Radiated Power | ANSI/TIA/EIA-603-C | §24.232(b)  | 26May05 | 26May05 | Pass |
| K | Radiated TX Spurious Emissions     | ANSI/TIA/EIA-603-C | §24.238 (a) | 1Jun05  | 27Jun05 | Pass |

### Referenced Standard: IC RSS-132 Issue 1

|   |                                 |                        |      |         |         |      |
|---|---------------------------------|------------------------|------|---------|---------|------|
| B | Conducted RF Output Power       | FCC CFR 47 §2.1046     | §6.4 | 24May05 | 24May05 | Pass |
| C | Conducted TX Spurious Emissions | FCC CFR 47 §22.917 (b) | §6.5 | 25May05 | 25May05 | Pass |
| D | Conducted RX Spurious Emissions | §4.6                   | §6.6 | 26May05 | 26May05 | Pass |
| E | Effective Radiated Power        | ANSI/TIA/EIA-603-C     | §6.4 | 26May05 | 26May05 | Pass |
| F | Radiated TX Spurious Emissions  | §4.6                   | §6.5 | 1Jun05  | 27Jun05 | Pass |

### Referenced Standard: IC RSS-133 Issue 3

|   |                                    |                       |          |         |         |      |
|---|------------------------------------|-----------------------|----------|---------|---------|------|
| G | Conducted RF Output Power          | ANSI/TIA/EIA-603-C    | §6.4     | 24May05 | 24May05 | Pass |
| H | Conducted TX Spurious Emissions    | FCC CFR 47 §24.238(b) | §6.5     | 25May05 | 25May05 | Pass |
| I | Conducted RX Spurious Emissions    | §4.5                  | §6.7 (b) | 26May05 | 26May05 | Pass |
| J | Effective Isotropic Radiated Power | ANSI/TIA/EIA-603-C    | §6.4     | 26May05 | 26May05 | Pass |
| K | Radiated TX Spurious Emissions     | ANSI/TIA/EIA-603-C    | §6.5     | 1Jun05  | 27Jun05 | Pass |

## REVISION LOG

| Issue | Description     | Implemented By | Implementation Date |
|-------|-----------------|----------------|---------------------|
| 1.0   | Initial Release | Jon Hughes     | 01Sep05             |

## SIGNATORIES

|              |   |                |
|--------------|---|----------------|
| Prepared By: |  | Sept. 01, 2005 |
| Name/Title   | Duane M. Friesen, C.E.T. / EMC Manager  | Date           |
| Approved By: |  | Sept. 01, 2005 |
| Name/Title   | Jon Hughes / General Manager  | Date           |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 5 of 69   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## 1.0 SCOPE

This report outlines the measurements made and results collected during electromagnetic emissions testing of the Itronix Corporation Model: IX325-AC775IWL Rugged Tablet PC with the internal Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem. The AirCard 775 Modem was connected to a bendable external monopole antenna attached to the end of the PCMCIA Card. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication Commission Code of Federal Regulations Title 47 Parts 2, 22 Subpart H, and 24 Subpart E; and Industry Canada Radio Standards Specifications RSS-132 Issue 1 (Provisional), and RSS-133 Issue 3.

## 2.0 REFERENCES

### 2.1 Normative References

|  |  |
|--|--|
| ANSI/ISO 17025:1999                                | General Requirements for competence of testing and calibration laboratories  |
| IEEE/ANSI C63.4:2003                               | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz   |
| IEEE/ANSI Std C95.1:1999                           | American National Standard Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields  |
| ANSI/TIA/EIA-603-C:2004                            | Land Mobile FM or PM Communication Equipment Measurement and Performance Standards   |
| CFR Title 47 Part 2:2004                           | Code of Federal Regulations<br>Title 47: Telecommunication<br>Part 2: Frequency Allocations and Radio Treaty Matters;<br>General Rules and Regulations<br>Part 22: Public Mobile Services<br>Part 24: Personal Communication Services  |
| IC Spectrum Management & Telecommunications Policy | Radio Standards Specification<br>RSS-102 Issue 1 (Provisional) - Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields<br>RSS-132 Issue 1 (Provisional) - 800 MHz Cellular Telephones Employing New Technologies<br>RSS-133 Issue 3 - 2 GHz Personal Communication Services |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 6 of 69        |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### 3.0 TERMS AND DEFINITIONS

|      |   |
|------|---|
| AV   | Average                                     |
| CDMA | Code Division Multiple Access               |
| CFR  | Code of Federal Regulations                 |
| dB   | decibel                                     |
| dBm  | dB referenced to 1 mW                       |
| dBuV | dB referenced to 1 uV                       |
| DUT  | Device under Test                           |
| dBc  | dB down from carrier                        |
| EBW  | Emission Bandwidth                          |
| EIRP | Effective Isotropic Radiated Power          |
| EDGE | Enhanced Data Rates for GSM Evolution       |
| EMC  | Electromagnetic Compatibility               |
| ERP  | Effective Radiated Power                    |
| FCC  | Federal Communication Commission            |
| FHSS | Frequency Hopping Spread Spectrum           |
| GSM  | Global Systems for a Mobility Communication |
| GPRS | General Packet Radio Service                |
| HP   | Hewlett Packard                             |
| HPF  | High Pass Filter                            |
| Hpol | Horizontal Polarization                     |
| Hz   | Hertz                                       |
| IC   | Industry Canada                             |
| kHz  | kilohertz                                   |
| LNA  | Low Noise Amplifier                         |
| m    | meter                                       |
| MHz  | Megahertz                                   |
| Mbps | megabits per second                         |
| na   | not applicable                              |
| n/a  | not available                               |
| PK   | Peak  |
| PPSD | Peak Power Spectral Density                 |
| QP   | Quasi-peak                                  |
| RBW  | Resolution Bandwidth                        |
| R&S  | Rohde & Schwarz                             |
| RSS  | Radio Standard Specification                |
| SA   | Spectrum Analyzer                           |
| VBW  | Video Bandwidth                             |
| Vpol | Vertical Polarization                       |
| WLAN | Wireless Local Area Network                 |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## 4.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 1955 Moss Court, Kelowna, British Columbia, Canada, V1Y 9L3. The radiated and conducted emissions sites conform with the requirements set forth in ANSI C63.4 and are filed and listed with the FCC under Registration Number 714830 and Industry Canada under File Number IC 3874.

## 5.0 GENERAL INFORMATION

### 5.1 Applicant Information

|                      |                          |  |  |
|----------------------|--------------------------|--|--|
| <u>Company Name:</u> | Itronix Corporation      |  |  |
| <u>Address:</u>      | 801 South Stevens Street |  |  |
|                      | Spokane, WA 99204        |  |  |
|                      | United States            |  |  |

### 5.2 DUT Description

The DUT consisted of the IX325-AC775IWL Rugged Tablet PC containing a Sierra Wireless AirCard 775 Dual-Band GSM PCMCIA Modem connected to an attached external monopole antenna. Photographs of the DUT placement and construction are shown in Appendix A.

|                          |   |                   |                     |
|--------------------------|---|-------------------|---------------------|
| <b>Device:</b>           | Rugged Tablet PC  |                   |                     |
| <b>Model:</b>            | IX325-AC775IWL  |                   |                     |
| <b>Serial Number(s):</b> | ZZGEG5073ZZ9782   |                   |                     |
| <b>Identifier(s):</b>    | FCC ID:   | KBCIX325-AC775IWL | IC ID: 1943A-IX325e |
| <b>Power Source(s):</b>  | Stationary: 75 Watt AC Power Adapter (Model: ADP-75FB B)<br>Portable: 11.1V Lithium-ion Battery, 3.6Ah (Model: A2121-2) |                   |                     |

|                           |   |  |  |
|---------------------------|---|--|--|
| <b>Device:</b>            | Dual-Band PCS/Cellular GSM PCMCIA Modem   |  |  |
| <b>Model:</b>             | Sierra Wireless AirCard 775               |  |  |
| <b>Serial Number:</b>     | X04122800475010                           |  |  |
| <b>Rule Part(s):</b>      | FCC:                                      | §22.913; §22.917; §24.232; §24.238                               |  |
|                           | IC:                                       | RSS-132 Issue 1 (Provisional); RSS-133 Issue 3                   |  |
| <b>Classification(s):</b> | FCC:                                      | PCS Licensed Transmitter (PCB)                                   |  |
|                           | IC:                                       | 800 MHz Cellular Telephones employing New Technologies (RSS-132) |  |
|                           |   | 2 GHz Personal Communication Services (RSS-133)                  |  |
| <b>Power Source:</b>      | Powered from the internal PC power supply |  |  |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 8 of 69        |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

|         |                                     |
|---------|-------------------------------------|
| Device: | External Monopole Antenna           |
| Model:  | Sierra Wireless AirCard 775 Antenna |

### 5.3 Co-Located Equipment

|        |  |
|--------|--|
| Name:  | GPS Receiver Module with attached Antenna (Receive only) |
| Model: | Leadtek Model LR9805                                     |

|         |                           |
|---------|---------------------------|
| Device: | GPS Antenna               |
| Model:  | Sarantel 101401040/2004UK |

### 5.4 Cable Descriptions

| ROUTING          |              | Length | Model | Terminations |       | Shield Type | Shield Termination |       | Suppression |
|------------------|--------------|--------|-------|--------------|-------|-------------|--------------------|-------|-------------|
| From             | To           | m      |       | End 1        | End 2 |             | End 1              | End 2 |             |
| PC modem port    | Unterminated | 1.0    | n/a   | RJ-11        | RJ-11 | None        | na                 | na    | None        |
| PC Ethernet Port | Ethernet Hub | 1.0    | n/a   | RJ-45        | RJ-45 | None        | na                 | na    | None        |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 9 of 69   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## 5.5 Support Equipment

The following equipment was used in support of the DUT.

| Co-located Support Equipment List |           |                    |
|-----------------------------------|-----------|--------------------|
| Manufacturer                      | Model     | Description        |
| D-Link                            | DE-809TC/ | Ethernet hub       |
| YNG YUH                           | YP-040    | Hub power supply   |
| MLi                               | 699       | Speakers           |
| Polk Audio                        | n/a       | Speaker-microphone |
|                                   | K8255     | Keyboard           |
| Sanwa Supply                      | MA-MBUSB  | Mouse              |

## 5.6 Clock Frequencies

### 5.6.1 DUT Clock Frequencies

|         |   |
|---------|---|
| Device: | Rugged Tablet PC                        |
| Clocks: | n/a                                     |
| Device: | Dual-Band PCS/Cellular GSM PCMCIA Modem |
| Clocks: | n/a                                     |
| Device: | Monopole Antenna                        |
| Clocks: | None                                    |

### 5.6.2 Co-Located Clock Frequencies

|         |             |
|---------|-------------|
| Device: | Peripherals |
| Clocks: | n/a         |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   | <br><b>ITRONIX</b> |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 10 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## 5.7 Mode(s) of Operation Tested

### 5.7.1 Dual-Band GSM Modem

Customer supplied software was used to set the AirCard 775 modem to the appropriate channel and power level for the specific measurement. Measurements were made with the modem set to the low, mid and high channel in each band or on a worst-case channel for the measurement, as determined by prescan evaluations. The following settings were used for each channel.

#### 5.7.1.1 Cellular GSM

|                                      |   |
|--------------------------------------|---|
| <b>TX Frequency Range:</b>           | 824.2 - 848.8 MHz<br>Ch. 128 (824.2 MHz) (low), Ch. 190 (836.6 MHz) (mid) & Ch. 251 (848.8 MHz) (high)<br>measured unless otherwise noted |
| <b>Software Power Gain Settings:</b> | The supplied software set the power for maximum rated output power.   |
| <b>Modulation Type(s):</b>           | GMSK, 8-PSK   |

#### 5.7.1.2 PCS GSM

|                                      |   |
|--------------------------------------|---|
| <b>TX Frequency Range:</b>           | 1850.2 - 1909.8 MHz<br>Ch. 512 (1850.2 MHz) (low), Ch 661 (1880 MHz) (mid) & Ch. 810 (1909.8 MHz) (high)<br>measured unless otherwise noted |
| <b>Software Power Gain Settings:</b> | The supplied software set the power for maximum rated output power.   |
| <b>Modulation Type(s):</b>           | GMSK, 8-PSK   |

### 5.7.2 DUT Exercising Software Description

The DUT was configured and exercised during testing using customer supplied test software. Once the channel number was entered, the software enabled the card to transmit at the maximum power level for the set frequency.

## 5.8 Configuration Description

The DUT was configured, as described by the client, as being representative of a production unit that would be delivered to a final customer. Because the Tablet PC orientation can be user configured (0 degrees landscape and 90 degrees portrait only), prescan evaluations were made to determine the configuration that resulted in the highest emissions. This prescan evaluation indicated that tablet carrier field strengths were maximized during cellular operation with the unit placed flat, with the LCD facing up and the monopole antenna positioned parallel with the ground plane. Maximized carrier field strengths during PCS operation occurred with the tablet oriented with the “power port” edge facing up and the monopole antenna position parallel with the ground plane. During the radiated spurious emissions testing, the antenna was replaced with a 50-ohm termination and the Tablet PC placed in the orientation as described above. More specific details may be included in each appendix.

### 5.8.1 Configuration Justification

The DUT was tested in a configuration determined to emanate the maximum emission and be one described by the client as being typical of normal use.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 11 of 69       |   |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

## **6.0 PASS/FAIL CRITERIA**

Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. A DUT is considered to have passed the requirements, if the data collected during the described measurement procedure is within the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITronix Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 12 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## APPENDICES

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 13 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix A - Photographs

### A.1. DUT PHOTOGRAPHS

Photograph A.1-1 - Tablet PC in the worst-case Cellular Configuration



Photograph A.1-2 - Tablet PC in the worst-case PCS Configuration



Photograph A.1-3 - AirCard 775 PCMCIA Modem Card



Photograph A.1-4 - AirCard 775 Monopole Antenna



|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 14 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix B - Cellular Band Conducted TX RF Output Power Measurement

### B.1. REFERENCES

|                              |                    |
|------------------------------|--------------------|
| Normative Reference Standard | FCC CFR 47 §2.1046 |
| Procedure Reference          | FCC CFR 47 §2.1046 |

### B.2. LIMITS

|                        |  |
|------------------------|--|
| FCC CFR 47 §2.1046 (a) | For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedures to give the values of current and voltage on the circuit elements specified in §2.1033(c) (8). |
|------------------------|--|

\*ERP limits are specified in Appendix E.

### B.3. ENVIRONMENTAL CONDITIONS

|                     |             |
|---------------------|-------------|
| Temperature         | 25 +/- 2 °C |
| Humidity            | 35 +/- 4 %  |
| Barometric Pressure | 96 kPa      |

### B.4. EQUIPMENT LIST

| ASSET NUMBER | MANUFACTURER | MODEL     | DESCRIPTION         | LAST CAL | CAL DUE |
|--------------|--------------|-----------|---------------------|----------|---------|
| 00007        | Gigatronics  | 8652A     | Power Meter         | 18Oct04  | 18Oct05 |
| 00011        | Gigatronics  | 80701A    | Power Sensor        | 08Oct04  | 08Oct05 |
| 00102        | Pasternack   | PE7014-30 | 30dB attenuator     | na       | na*     |
| na           | ITronix      | na        | Cable & SMA adapter | na       | na*     |

\*Cable and attenuator verified with power meter prior to use

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 15 of 69  |


|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### B.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |
|-----------------------------------|--|
| Measurement Equipment Connections | The equipment was connected as shown in the setup drawing in B.6.  |
| Measurement Equipment Settings    | Power Meter Settings:<br>Mode - BAP<br>Frequency compensation set for carrier frequency<br>Offset set appropriately to compensate for any attenuator or cable losses   |
| Measurement Procedure             | The RF conducted output power levels were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in burst average power (BAP) mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the output port and the power sensor input. The DUT test software was used to set it to transmit in the maximum power control mode defined by the manufacturer. |

### B.6. SETUP DRAWING

Figure B.6-1 - Setup Drawing

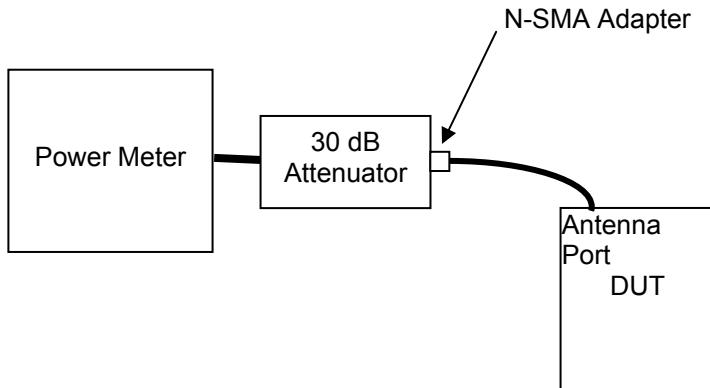

|   |                     |         |                   |        |                |  |
|---|---------------------|---------|-------------------|--------|----------------|--|
| Applicant:  | ITRONIX Corporation | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  <b>ITRONIX</b> |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |                     |         |                   | Model: | IX325-AC775IWL |  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### B.7. DUT OPERATING DESCRIPTION

Power measurements were made for each of the three Cellular test channels (Channel 128, 190 & 251), with the AirCard 775 modem set appropriately as described in section 5.7.

### B.8. TEST RESULTS

| Mode         | Channel | Frequency  | Conducted Power |            |
|--------------|---------|------------|-----------------|------------|
| Cellular GSM | 128     | 824.20 MHz | +31.64 dBm      | 1.46 Watts |
|              | 190     | 836.60 MHz | +31.80 dBm      | 1.51 Watts |
|              | 251     | 848.80 MHz | +31.92 dBm      | 1.56 Watts |

### B.9. PASS/FAIL

There is no pass/fail criterion for this measurement. The ERP values, applied to appropriate regulatory requirements are outlined in Appendix E.

### B.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

24May05  
Date

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix C - Conducted Cellular TX Spurious Emissions Measurement

### C.1. REFERENCES

|                              |                       |
|------------------------------|-----------------------|
| Normative Reference Standard | FCC CFR 47 §22.917(a) |
| Procedure Reference          | FCC CFR 47 §22.917(b) |

### C.2. LIMITS

|                    |   |
|--------------------|---|
| FCC CFR 47 §22.917 | (a) <i>Out of Band Emissions.</i> The mean power of emissions must be attenuated below the mean power of the unmodulated carrier ( $P$ ) on any frequency twice or more than twice the fundamental frequency by: at least $43 + 10 \log P$ dB |
|--------------------|---|

### C.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### C.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION         | LAST CAL | CAL DUE |
|----|--------------|--------------|-------------|---------------------|----------|---------|
| 1  | 00015        | Agilent      | E4408B      | Spectrum Analyzer   | 24Jan05  | 24Jan06 |
| 2  | 00102        | Pasternack   | PE7015-3030 | 30dB attenuator     | na       | na*     |
| 3  | na           | Itronix      | na          | Cable & SMA adapter | na       | na*     |

\*Verified with VNA

### C.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |       |       |        |          |
|-----------------------------------|--|-------|-------|--------|----------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in C.6. |       |       |        |          |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |       |       |        |          |
|                                   | Frequency Range  | RBW   | VBW   | Offset | Detector |
|                                   | MHz  | kHz   | kHz   | dB     |          |
|                                   | Between Block edge and 1 MHz from Block edges            | 3 *   | 3 *   | -31.0  | Peak     |
|                                   | Beyond 1MHz from Block edges                             | 1000* | 1000* |        |          |


\*Specified BW of 1% of EBW within Block and 1 MHz of each edge &  $\geq$  100 kHz beyond 1 MHz of the block edge.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 18 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### C.6. SETUP DRAWING

Figure C.6-1 - Setup Drawing

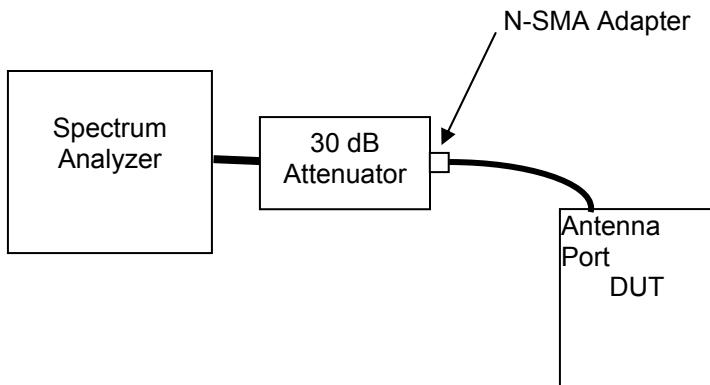

### C.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT transmitting at maximum power in the cellular band, in a configuration as described in Section 5 of this report. The Block edge measurements were made with the DUT transmitting on the channel closest to the edge under investigation (CH128 & CH251). The remaining spurious measurements were made on each of the three channels, Low (CH128), mid (CH190) and High (CH251).


|   |                     |         |                   |        |                |  |
|---|---------------------|---------|-------------------|--------|----------------|--|
| Applicant:  | ITRONIX Corporation | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  <b>ITRONIX</b> |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |                     |         |                   | Model: | IX325-AC775IWL |  |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

## C.8. TEST RESULTS





The spurious measurements detailed in this section are referenced to the conducted carriers levels outlined in Appendix B of this report:

### C.8.1. Spurious Emissions within 1MHz of Block Edge

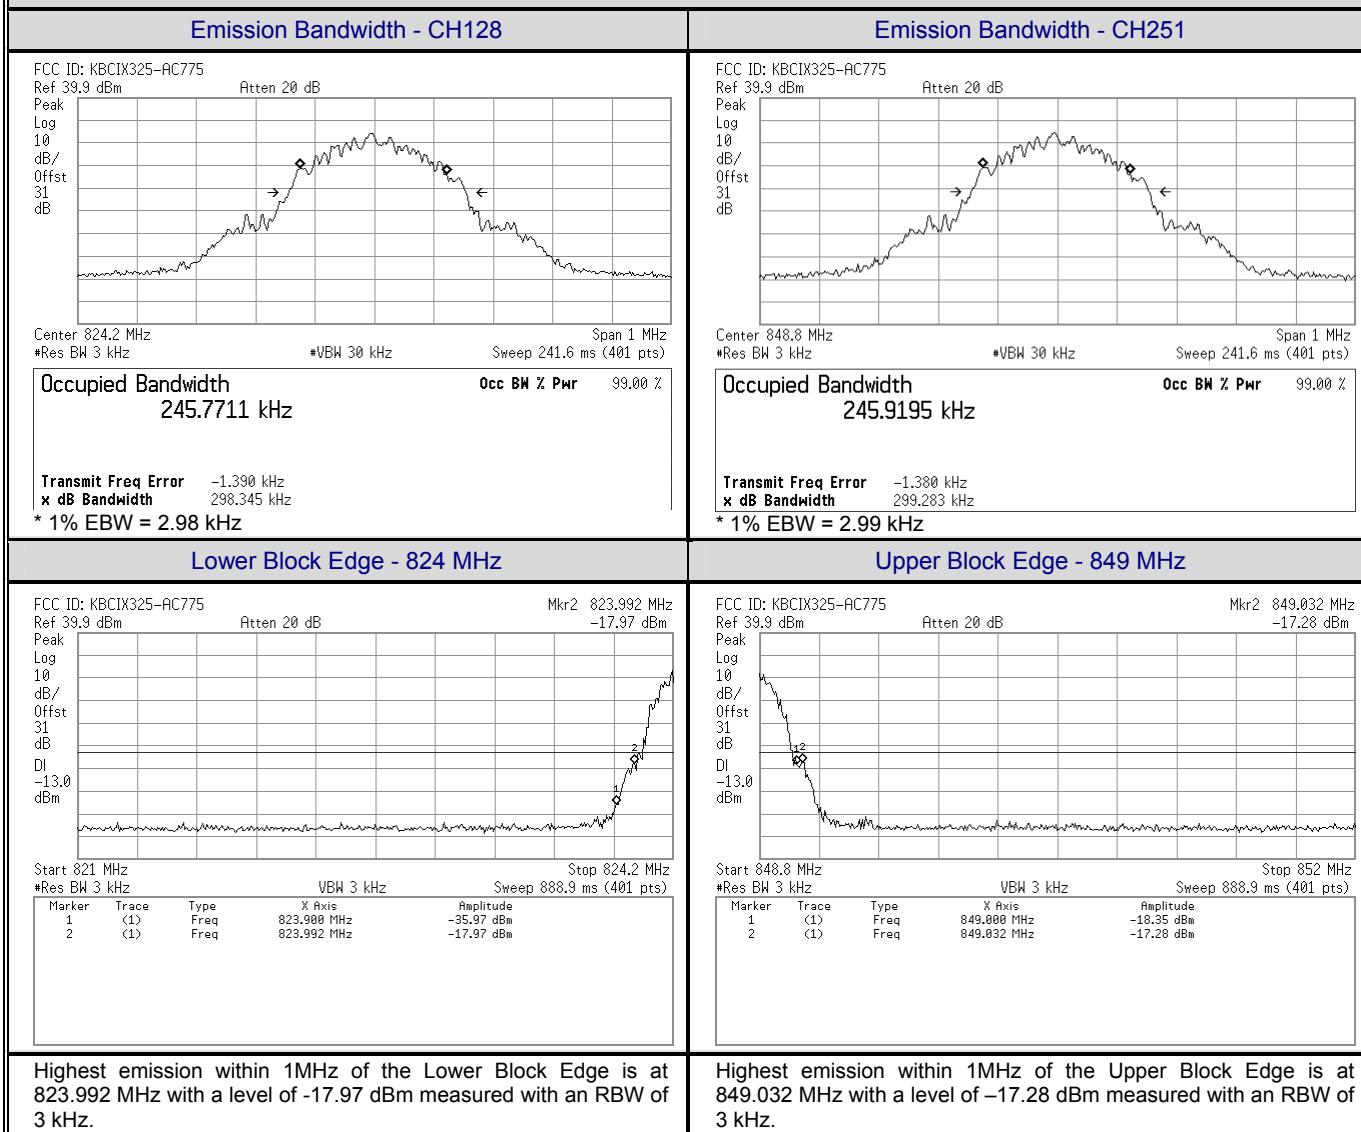


|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 20 of 69       |   |

|                                |                      |                          |           |
|--------------------------------|----------------------|--------------------------|-----------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b>     | Issue 1.0 |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>      | 01Sep05   |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   | <b>IC RSS-132/133</b>    |           |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 | <b>IC Lab File #3874</b> |           |

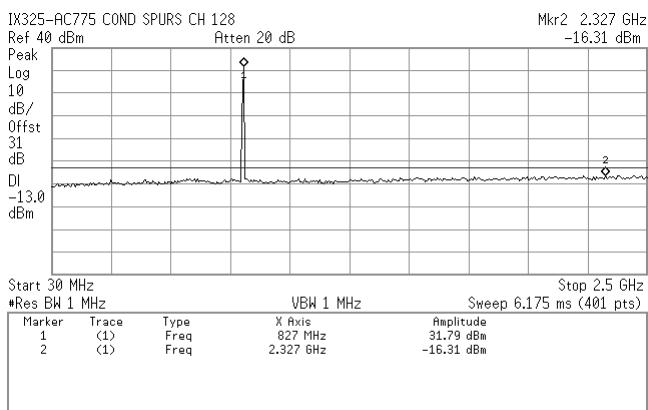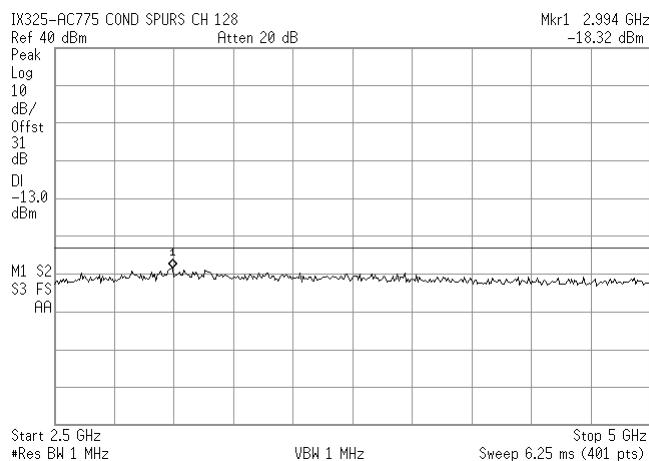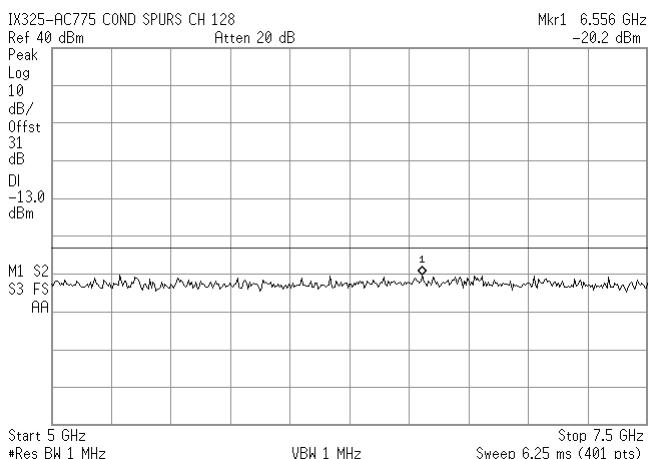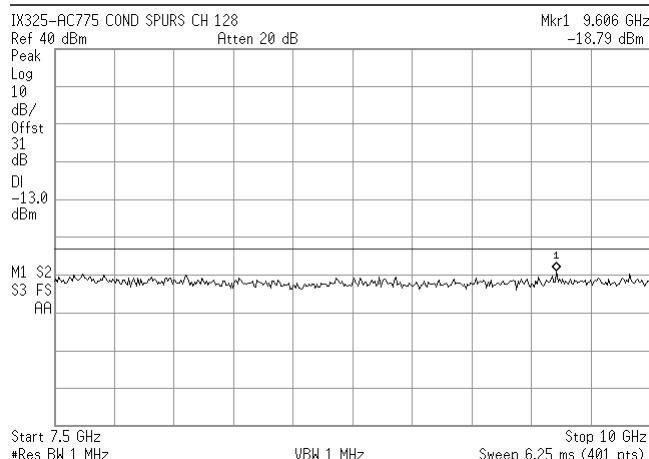
**C.8.2. Spurious Emissions removed by more than 1MHz from Block Edge**
**Channel 128**
**Band 1**

**Band 2**

**Band 3**

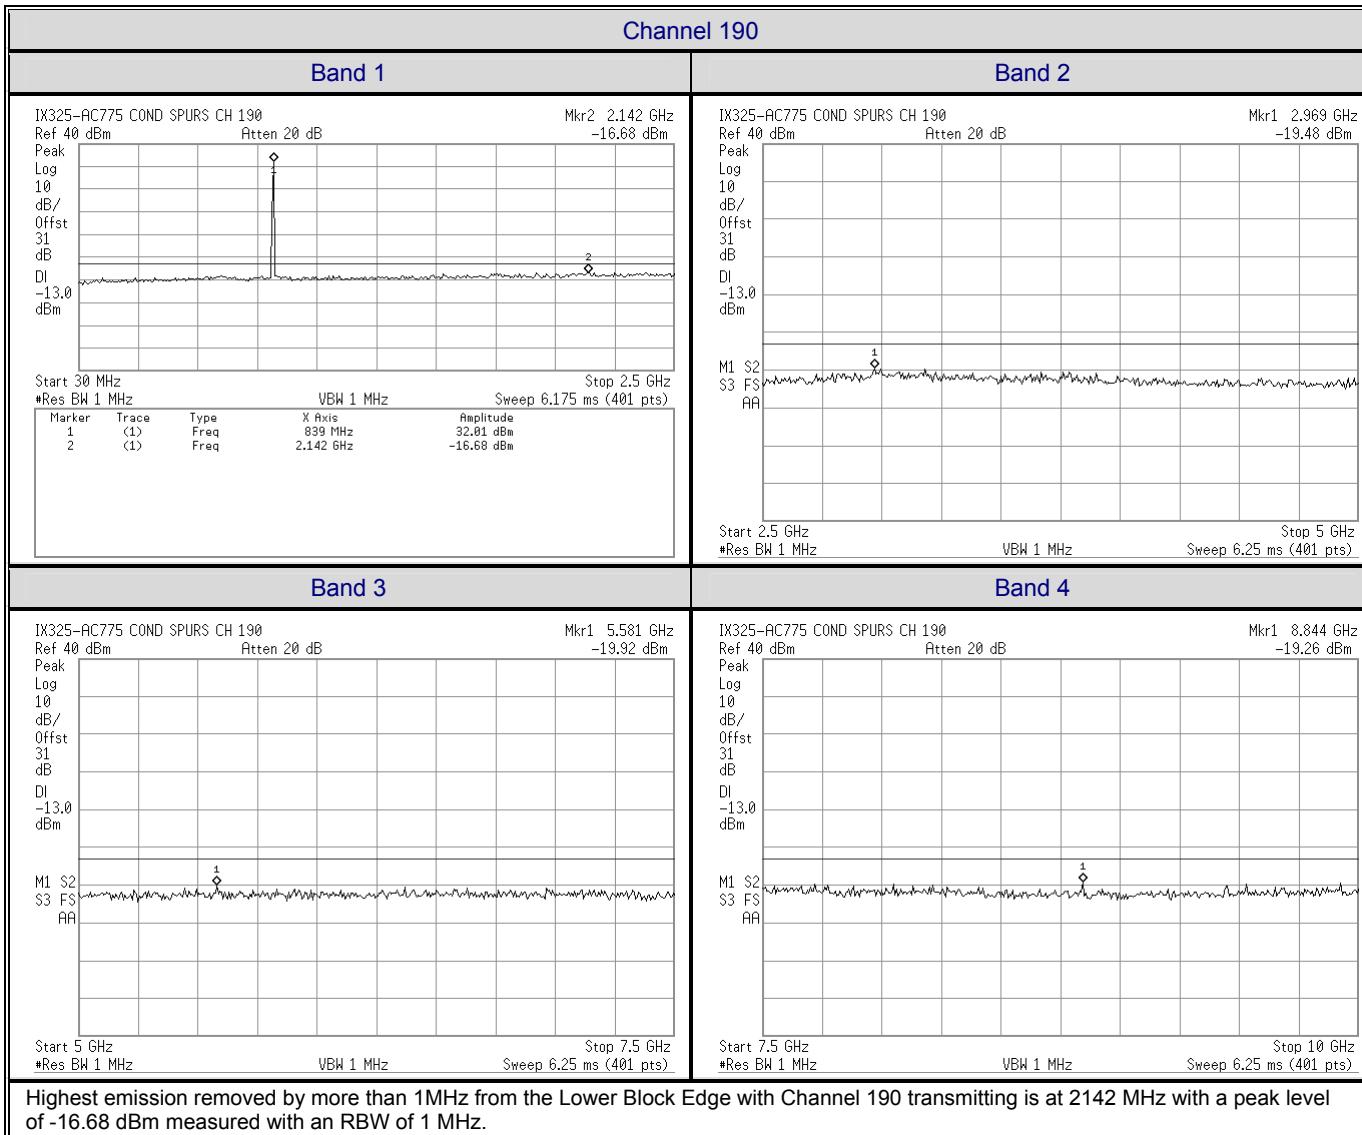**Band 4**


Highest emission removed by more than 1MHz from the Lower Block Edge with Channel 128 transmitting is at 2327 MHz with a peak level of -16.31 dBm measured with an RBW of 1 MHz.
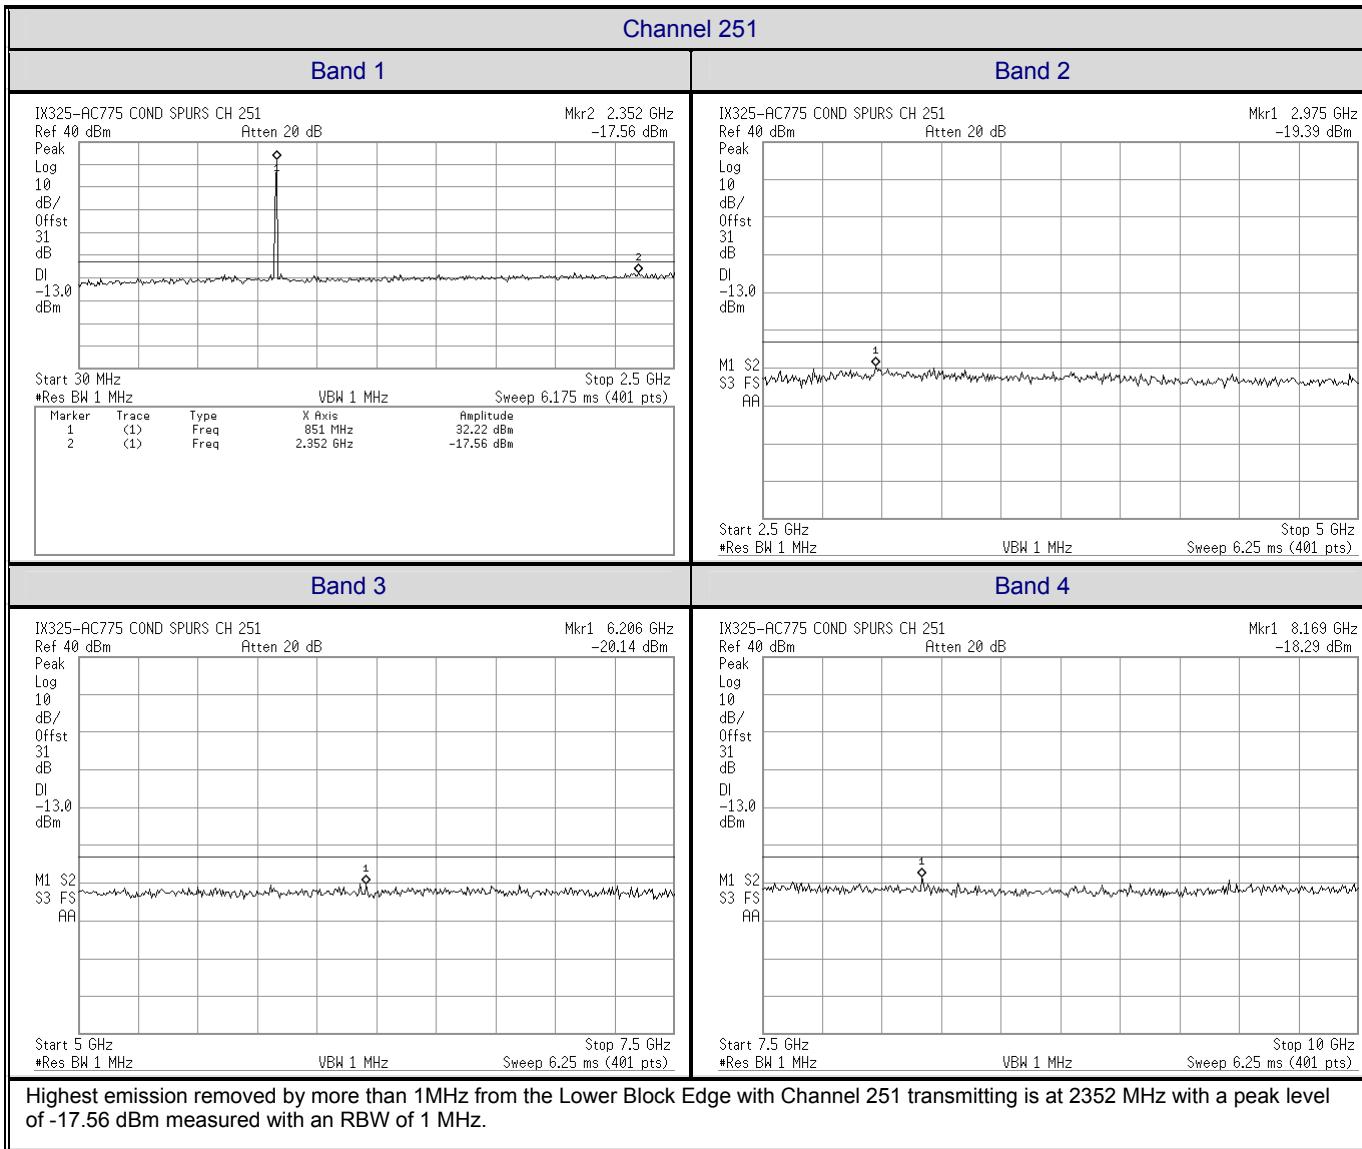
|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |



|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |



|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### C.9. PASS/FAIL

In reference to the results outlined in C.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §22.217 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 3.31 dB  
(-16.31 dBm @ 2327 MHz vs a limit of -13 dBm)

#### C.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

25May05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 24 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix D - Conducted Cellular RX Spurious Emissions Measurement

### D.1. REFERENCES

|                              |                     |
|------------------------------|---------------------|
| Normative Reference Standard | IC RSS-132 §6.6 (b) |
| Procedure Reference          | IC RSS-132 §4.6     |

### D.2. LIMITS

|                 |   |
|-----------------|---|
| IC RSS-132 §6.6 | (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4 kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz. |
|-----------------|---|

### D.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### D.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL  | DESCRIPTION         | LAST CAL | CAL DUE |
|----|--------------|--------------|--------|---------------------|----------|---------|
| 1  | 00015        | Agilent      | E4408B | Spectrum Analyzer   | 24Jan05  | 24Jan06 |
| 2  | na           | Itronix      | na     | Cable & SMA adapter | na       | na*     |

\*Verified with VNA

### D.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |     |     |          |
|-----------------------------------|--|-----|-----|----------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in D.6. |     |     |          |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |     |     |          |
| MEASUREMENT EQUIPMENT SETTINGS    | Frequency Range  | RBW | VBW | Detector |
|                                   | MHz  | kHz | kHz |          |
|                                   | 30 MHz - 3 x F <sub>c</sub>                              | 4*  | 4*  | Peak     |


Note: 4 kHz RBW & VBW are not attainable with equipment used and 3 kHz will be used. A bandwidth correction factor of  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$ , (1.25 dB) will be added to the final results.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 25 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### D.6. SETUP DRAWING

Figure D.6-1 - Setup Drawing

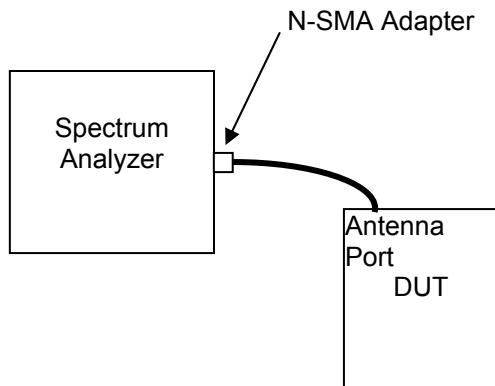


#### D.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT in receive mode for the cellular mid channel (CH190 836.6 MHz)

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

## D.8. TEST RESULTS

### D.8.1. Receiver Spurious Emissions

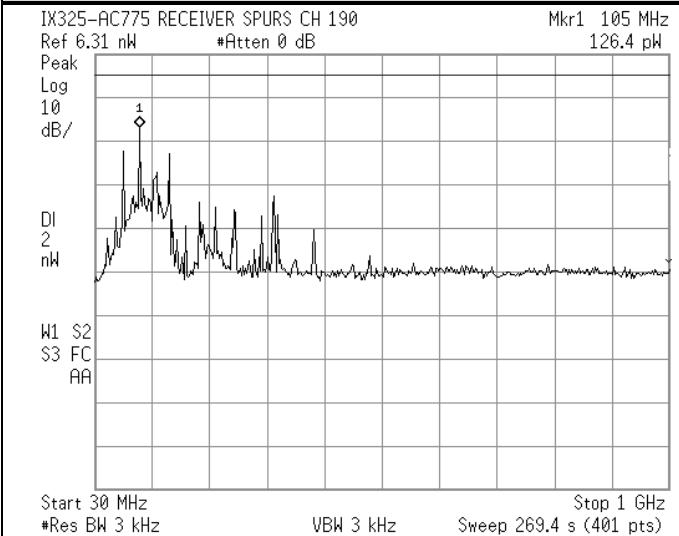

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
 BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$


In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 126.4 pW with RBW of 3 kHz:

Corrected Peak Emission =  $126.4 \text{ pW} * 4/3$   
 = 168.5 pW for RBW of 4 kHz  
 = 0.1685 nW

Margin (nW) = 2 nW - 0.1685 nW  
 = 1.83 nW

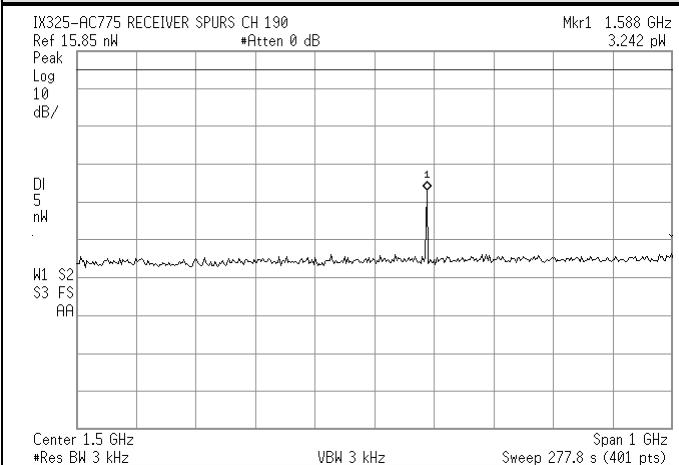

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
 BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$


In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 3.242 pW with RBW of 3 kHz:

Corrected Peak Emission =  $3.242 \text{ pW} * 4/3$   
 = 4.323 pW for RBW of 4 kHz  
 = 0.00432 nW

Margin (nW) = 5 nW - 0.00432 nW  
 = 4.996 nW

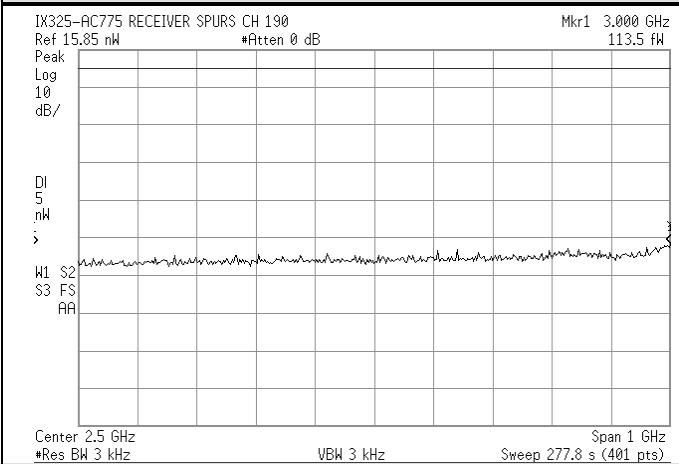

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
 BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$

In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 113.5 fW with RBW of 3 kHz:

Corrected Peak Emission =  $113.5 \text{ fW} * 4/3$   
 = 151 fW for RBW of 4 kHz  
 = 0.00015 nW

Margin (nW) = 5 nW - 0.00015 nW  
 = 4.9998 nW

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 27 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### D.9. PASS/FAIL

In reference to the results outlined in D.9, the DUT passes the requirements as stated in the reference standards.

IC RSS-132 §6.6 (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz.

The results set forth in this section meet the requirement with a margin of at least 1.83 nW

#### D.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

26May05  
Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 28 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix E - Cellular Band Effective Radiated Power Measurement

### E.1. REFERENCES

|                              |                        |
|------------------------------|------------------------|
| Normative Reference Standard | FCC CFR 47 §22.913 (a) |
| Procedure Reference          | ANSI/TIA/EIA-603-C     |

### E.2. LIMITS

|                        |  |
|------------------------|--|
| FCC CFR 47 §22.913 (a) | (a) Maximum ERP. .... The ERP of mobile transmitters and auxiliary transmitters must not exceed 7 Watts. |
|------------------------|--|

### E.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 4 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### E.4. EQUIPMENT LIST

| RECEIVING EQUIPMENT               |              |              |             |                         |          |         |
|-----------------------------------|--------------|--------------|-------------|-------------------------|----------|---------|
| ID                                | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION             | LAST CAL | CAL DUE |
| 1                                 | 00072        | EMCO         | 2075        | Mini-mast               | na       | na      |
| 2                                 | 00073        | EMCO         | 2080        | Turn Table              | na       | na      |
| 3                                 | 00071        | EMCO         | 2090        | Multi-Device Controller | na       | na      |
| 4                                 | 00050        | Chase        | CBL-6111A   | Bilog Antenna           | 08Feb05  | 08Feb06 |
| 5                                 | 00051        | HP           | 8566B       | Spectrum Analyzer       | 12Apr05  | 12Apr06 |
| 6                                 | 00047        | HP           | 85685A      | Preselector             | 13Apr05  | 13Apr06 |
| 7                                 | 00120        | Celltech     | n/a         | Microwave Cable (RX)    | 25Mar05  | 25Mar06 |
| 8                                 | 00121        | Andrew       | FSJ4-50B    | Microwave Cable (RX)    | 25Mar05  | 25Mar06 |
| 9                                 | 00130        | Andrew       | FSJ1-50A    | Microwave Cable (RX)    | 25Mar05  | 25Mar06 |
| ADDITIONAL SUBSTITUTION EQUIPMENT |              |              |             |                         |          |         |
| ID                                | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION             | LAST CAL | CAL DUE |
| 10                                | 00059        | ETS          | 3121C       | Roberts Dipole          | 04Dec03  | 04Dec05 |
| 11                                | 00131        | Andrew       | FSJ1-50A    | Microwave Cable (TX)    | na       | na      |
| 12                                | 00127        | Andrew       | FSJ4-50B    | Microwave Cable (TX)    | na       | na      |
| 13                                | 00133        | Andrew       | FSJ1-50A    | Microwave Cable (TX)    | na       | na      |
| 14                                | 00006        | R &S         | SMR40       | Signal Generator        | 12Apr05  | 12Apr06 |
| 15                                | 00007        | Gigatronics  | 8652A       | Power Meter             | 18Oct04  | 18Oct05 |
| 16                                | 00011        | Gigatronics  | 80701A      | Power Sensor            | 08Oct04  | 08Oct05 |
| 17                                | 00013        | Gigatronics  | 80701A      | Power Sensor            | 11Oct04  | 11Oct05 |
| 18                                | 00102        | Pasternack   | PE7015-3110 | 30 dB attenuator        | na*      | na*     |
| 19                                | 00078        | Pasternack   | PE2214-20   | Directional Coupler     | na*      | na*     |

\*Attenuation offset in power meter setup

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 29 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## E.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |     |     |          |
|-----------------------------------|--|-----|-----|----------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in E.6. |     |     |          |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |     |     |          |
|                                   | Frequency Range  | RBW | VBW | Detector |
|                                   | MHz  | kHz | kHz |          |
|                                   | 30 - 1000  | 100 | 100 |          |
|                                   |  |     |     | Peak     |

## E.6. SETUP DRAWING

Figure E.6-1 - Field Strength Setup Drawing


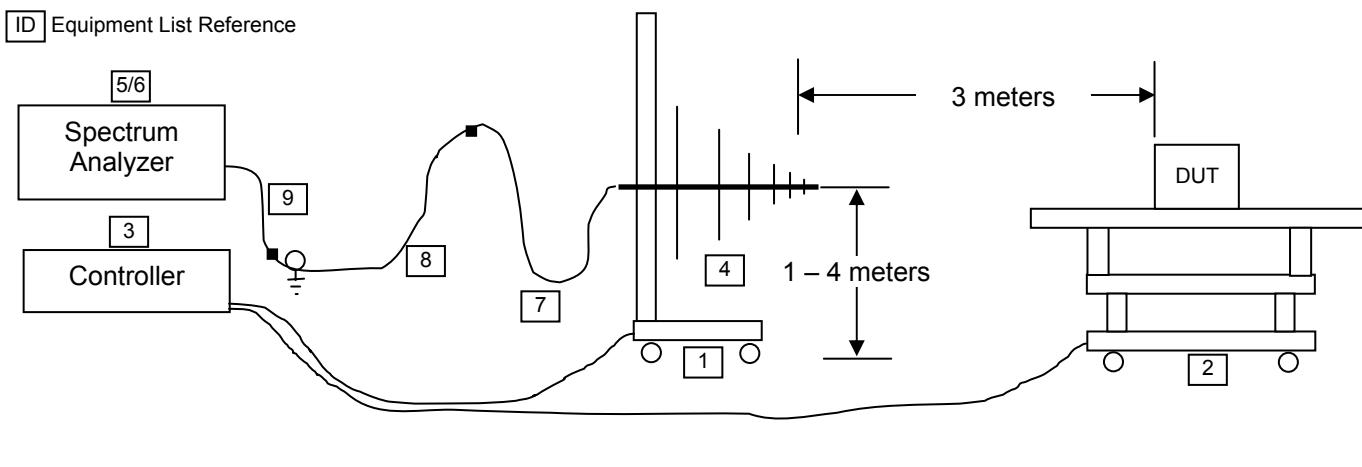


Figure E.6-2 - Signal Substitution Setup Drawing

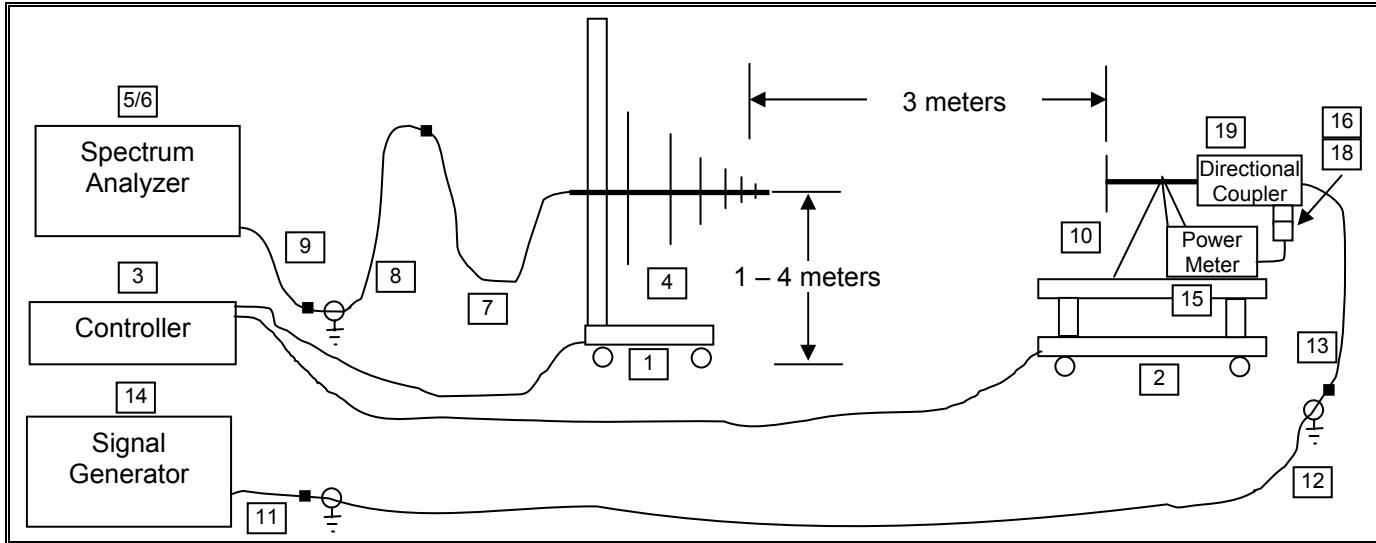

|   |  |         |                   |        |              |   |
|---|--|---------|-------------------|--------|--------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  | Model:  | IX325-AC775IWL    |        |              |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |              |   |
|   | 30 of 69   |         |                   |        |              |   |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

#### E.7. SETUP PHOTOGRAPHS

Photograph E.7-1 - DUT in Highest Cellular Carrier Configuration



#### E.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the cellular band at maximum power levels, and the DUT configured as described in Section 5 of this report.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 31 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## E.9. TEST RESULTS



Project Number: 040505KBC-T628-E24G  
Company: Itronix  
Product: IX325 with AC775

Standard: FCC22.913  
Test Start Date: 26-May-05  
Test End Date: 27-Jun-05

IX325 Tablet with AC775 Carrier Field Strengths

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | Carrier EIRP Level |        | EIRP Limit | Margin | Pass/Fail |      |       |     |       |    |  |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|--------------------|--------|------------|--------|-----------|------|-------|-----|-------|----|--|
|          |          |                           |                 |           |                          |   |                          |              | MHz                | dBuV/m | dBuV       | dBm    | dBd       | dBm  | Watts | dBm | Watts | dB |  |
| m        |          |                           |                 |           |                          |   |                          |              |                    |        |            |        |           |      |       |     |       |    |  |
| H        | 3        | B_3121C                   | 128             | 824.20    | 131.42                   | 106.18                                    | 30.79                    | -0.85        | 29.94              | 0.986  | 38.45      | 7.00   | 8.51      | PASS |       |     |       |    |  |
| V        | 3        | B_3121C                   | 128             | 824.20    | 123.20                   | 97.96                                     | 25.05                    | -0.85        | 24.20              | 0.263  | 38.45      | 7.00   | 14.25     | PASS |       |     |       |    |  |
| H        | 3        | B_3121C                   | 190             | 836.60    | 130.98                   | 105.32                                    | 30.64                    | -0.70        | 29.94              | 0.986  | 38.45      | 7.00   | 8.51      | PASS |       |     |       |    |  |
| V        | 3        | B_3121C                   | 190             | 836.60    | 123.02                   | 97.36                                     | 24.61                    | -0.70        | 23.91              | 0.246  | 38.45      | 7.00   | 14.54     | PASS |       |     |       |    |  |
| H        | 3        | B_3121C                   | 251             | 848.80    | 130.77                   | 104.58                                    | 30.56                    | -0.55        | 30.01              | 1.00   | 38.45      | 7.00   | 8.44      | PASS |       |     |       |    |  |
| V        | 3        | B_3121C                   | 251             | 848.80    | 122.81                   | 96.62                                     | 23.53                    | -0.55        | 22.98              | 0.198  | 38.45      | 7.00   | 15.47     | PASS |       |     |       |    |  |

Note:

Dipole Antenna used for substitution

Formulae:

ERP Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

Margin (dB) = Limit (dBm) – Level (dBm)

## E.10. PASS/FAIL

In reference to the results outlined in E.9, the DUT passes the requirements as stated in the reference standards as follows:

FCC 22.913 (a) Maximum ERP ..... The ERP of mobile transmitters and auxiliary transmitters must not exceed 7 Watts.

A maximum ERP of 30.01 dBm (1.00 Watts) was measured when Channel 251 was transmitting.

## E.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 32 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix F - Radiated Cellular TX Spurious Emissions Measurement

### F.1. REFERENCES

|                              |                       |
|------------------------------|-----------------------|
| Normative Reference Standard | FCC CFR 47 §22.917(e) |
| Procedure Reference          | ANSI/TIA/EIA-603-C    |

### F.2. LIMITS

|                    |  |
|--------------------|--|
| FCC CFR 47 §22.917 | (e) <i>Out of Band Emissions. The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: at least <math>43 + 10 \log P</math> dB</i> |
|--------------------|--|

### F.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### F.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL              | DESCRIPTION                      | LAST CAL | CAL DUE |
|----|--------------|--------------|--------------------|----------------------------------|----------|---------|
| 1  | 00072        | EMCO         | 2075               | Mini-mast                        | na       | na      |
| 2  | 00073        | EMCO         | 2080               | Turn Table                       | na       | na      |
| 3  | 00071        | EMCO         | 2090               | Multi-Device Controller          | na       | na      |
| 4  | 00050        | Chase        | CBL-6111A          | Bilog Antenna                    | 08Feb05  | 08Feb06 |
| 5  | 00035        | ETS          | 3115               | Double Ridged Guide Antenna (Rx) | 24Mar04  | 24Mar06 |
| 6  | 00015        | Agilent      | E4408B             | Spectrum Analyzer                | 24Jan05  | 24Jan06 |
| 7  | 00051        | HP           | 8566B              | Spectrum Analyzer                | 12Apr05  | 12Apr06 |
| 8  | 00047        | HP           | 85685A             | Preselector                      | 13Apr05  | 13Apr06 |
| 9  | 00120        | Celltech     | n/a                | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 10 | 00121        | Andrew       | FSJ4-50B           | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 11 | 00130        | Andrew       | FSJ1-50A           | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 12 | 00115        | Miteq        | JS4-00102600-35-5A | Low Noise Amplifier              | 08Jun05  | 08Jun06 |
| 13 | 00093        | Microtronics | HPM50111           | High Pass Filter                 | 25Mar05  | 25Mar06 |
| 14 | 00119        | INMAT        | 18AH-10            | 10dB attenuator                  | 25Mar05  | 25Mar06 |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 33 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

| ADDITIONAL SUBSTITUTION EQUIPMENT |              |              |             |                                  |          |         |
|-----------------------------------|--------------|--------------|-------------|----------------------------------|----------|---------|
| ID                                | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION                      | LAST CAL | CAL DUE |
| 15                                | 00059        | ETS          | 3121C       | Roberts Dipole                   | 04Dec03  | 04Dec05 |
| 16                                | 00034        | ETS          | 3115        | Double Ridged Guide Antenna (Tx) | 24Mar04  | 24Mar06 |
| 17                                | 00131        | Andrew       | FSJ1-50A    | Microwave Cable (TX)             | na       | na      |
| 18                                | 00127        | Andrew       | FSJ4-50B    | Microwave Cable (TX)             | na       | na      |
| 19                                | 00133        | Andrew       | FSJ1-50A    | Microwave Cable (TX)             | na       | na      |
| 20                                | 00006        | R & S        | SMR-20      | Signal Generator                 | 12Apr05  | 12Apr06 |
| 21                                | 00007        | Gigatronics  | 8652A       | Power Meter                      | 18Oct04  | 18Oct05 |
| 22                                | 00011        | Gigatronics  | 80701A      | Power Sensor                     | 08Oct04  | 08Oct05 |
| 23                                | 00013        | Gigatronics  | 80701A      | Power Sensor                     | 11Oct04  | 11Oct05 |
| 24                                | 00102        | Pasternack   | PE7015-3110 | 30 dB attenuator                 | na*      | na*     |
| 25                                | 00078        | Pasternack   | PE2214-20   | Directional Coupler              | na*      | na*     |
| 26                                | 00142        | HP           | 8491A       | 20 dB attenuator                 | na*      | na*     |

\* Attenuation offset in power meter setup

| F.5. MEASUREMENT EQUIPMENT SETUP  |   |             |                           |                    |                    |
|-----------------------------------|---|-------------|---------------------------|--------------------|--------------------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in F.6. A number of measurement equipment configurations were used to cover the applicable frequency ranges. The configurations for each range are as follows: |             |                           |                    |                    |
|                                   | Frequency Range   | LNA Asset # | Filter/Attenuator Asset # | Rx Antenna Asset # | Tx Antenna Asset # |
|                                   | 30 MHz – 1 GHz  | none        | none                      | 00050              | 00059              |
|                                   | 1 GHz – 2 GHz   | none        | none                      | 00035              | 00034              |
|                                   | 2 GHz – 3 GHz   | 00115       | 00119                     | 00035              | 00034              |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings:  |             |                           |                    |                    |
|                                   | Frequency Range   |             | RBW                       | VBW                | Detector           |
|                                   | MHz   |             | kHz                       | kHz                |                    |
|                                   | 800 MHz – 10 GHz  |             | 100*                      | 100*               | Peak               |

\*Field strength measurements were made with a worse case RBW and VBW of 1 MHz for frequency bands above 1 GHz when adequate margins were attained.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 34 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## F.6. SETUP DRAWING

Figure F.6-1 - Field Strength Setup Drawing


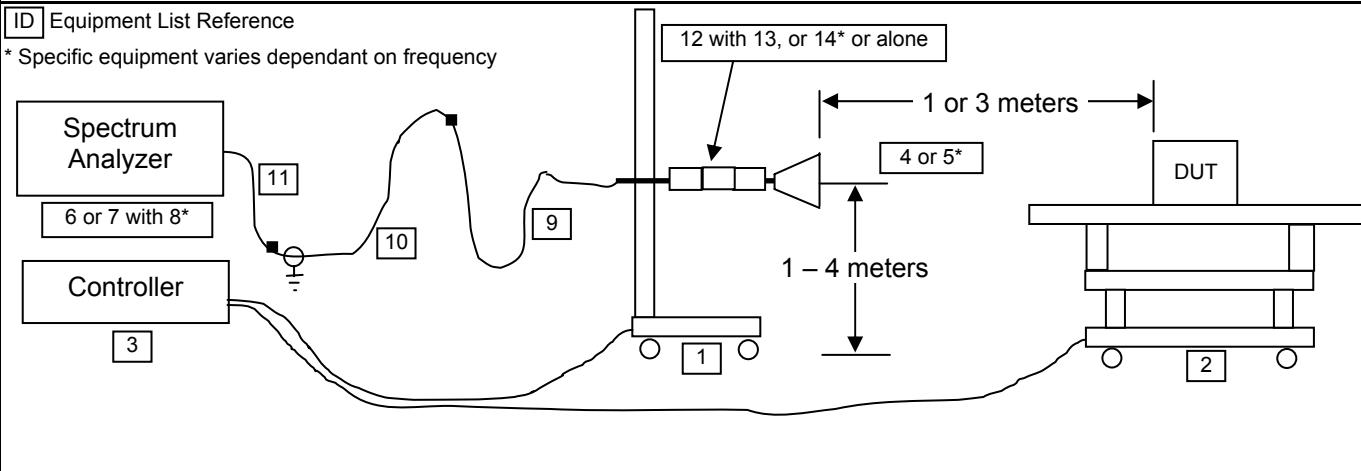


Figure F.6-2 - Signal Substitution Setup Drawing

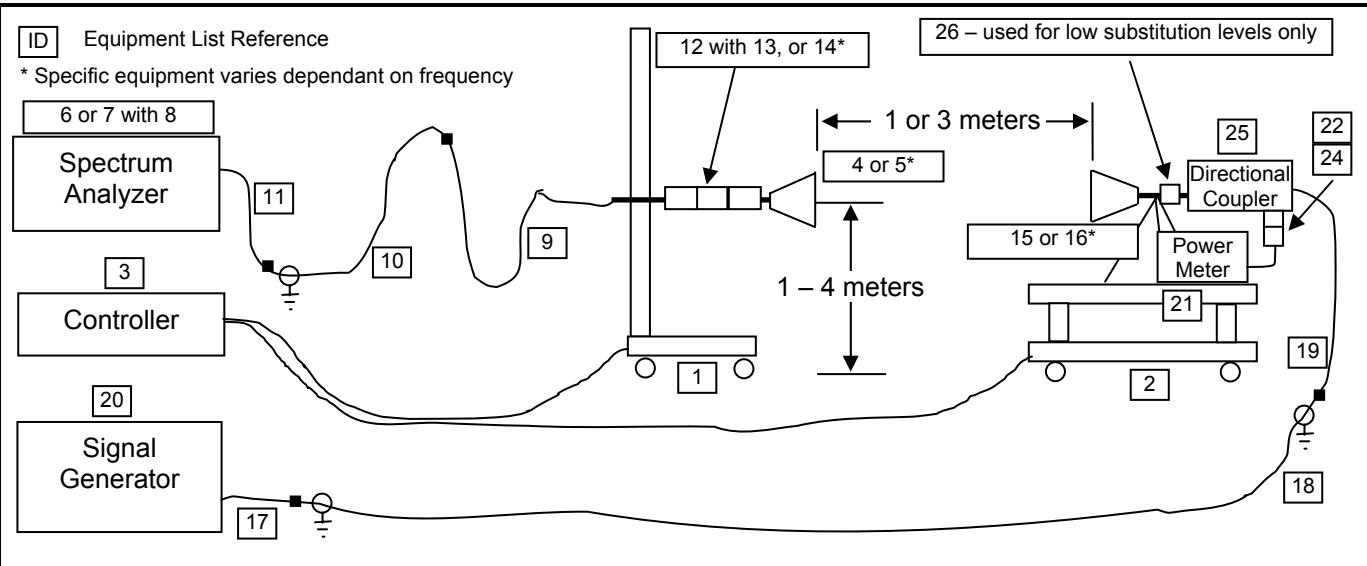

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

#### F.7. SETUP PHOTOGRAPHS

Photograph F.7-1 - Horizontal Bilog Cellular Radiated Emissions Setup



Photograph F.7-2 - Vertical 3115 Horn and LNA Cellular Radiated Emissions Setup



#### F.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the cellular band at maximum power levels as described in Section 5 of this report. During these measurements, the antenna was replaced with a 50-ohm load. The conducted emissions described in Appendix C supplement the results described in this appendix.

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 36 of 69       |   |

|                         |                      |               |                   |
|-------------------------|----------------------|---------------|-------------------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue: | Issue 1.0         |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:  | 01Sep05           |
| Test Standard(s):       | FCC §2, §22H, §24E   |               | IC RSS-132/133    |
| Lab Registration(s):    | FCC Lab Reg. #714830 |               | IC Lab File #3874 |

## F.9. TEST RESULTS

The spurious measurements detailed in this section are referenced to the carrier levels set forth in Appendix E of this report:

### F.9.1. Spurious Emissions

#### Channel 128

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | ERP Emission Level | Limit          | Margin | Pass/Fail |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|--------------------|----------------|--------|-----------|
|          |          |                           |                 | MHz       | dBuV/m                   | dBuV                                      | dBm                      | dBd          | dBm                | dBm or dBuV/m* | dB     |           |
| H        | 3        | Horn SN6267               | CH128           | 1631.00   | 59.71                    | 27.70                                     | -58.84                   | 4.19         | -54.65             | -13.00         | 41.65  | PASS      |
| H        | 3        | none                      | CH128           | 1891.00   | 62.72                    |   |                          |              |                    | 84.4*          | 21.6*  | PASS*     |
| H        | 3        | none                      | CH128           | 2190.00   | 38.70                    |   |                          |              |                    | 84.4*          | 45.7*  | PASS*     |
| H        | 3        | Horn SN6267               | CH128           | 2472.60   | 46.60                    | 34.20                                     | -62.26                   | 5.60         | -56.66             | -13.00         | 43.66  | PASS      |
| H        | 3        | none                      | CH128           | 2796.00   | 38.88                    |   |                          |              |                    | 84.4*          | 45.5*  | PASS*     |
| H        | 3        | Horn SN6267               | CH128           | 3296.80   | 43.73                    | 36.10                                     | -64.86                   | 5.84         | -59.02             | -13.00         | 46.02  | PASS      |
| H        | 3        | Horn SN6267               | CH128           | 4121.00   | 39.68                    | 29.30                                     | -71.12                   | 6.03         | -65.09             | -13.00         | 52.09  | PASS      |
| H        | 3        | Horn SN6267               | CH128           | 4945.20   | 44.78                    | 32.60                                     | -66.13                   | 6.47         | -59.66             | -13.00         | 46.66  | PASS      |
| H        | 3        | none                      | CH128           | 5271.50   | 47.81                    |   |                          |              |                    | 84.4*          | 36.6*  | PASS*     |
| H        | 3        | Horn SN6267               | CH128           | 5769.40   | 42.40                    | 28.30                                     | -69.46                   | 6.78         | -62.68             | -13.00         | 49.68  | PASS      |
| H        | 3        | Horn SN6267               | CH128           | 6593.60   | 46.67                    | 31.50                                     | -74.06                   | 7.40         | -66.66             | -13.00         | 53.66  | PASS      |
| H        | 3        | Horn SN6267               | CH128           | 7417.80   | 46.45                    | 28.90                                     | -79.28                   | 6.83         | -72.45             | -13.00         | 59.45  | PASS      |
| H        | 3        | Horn SN6267               | CH128           | 8245.00   | 46.15                    | 27.30                                     | -80.99                   | 7.16         | -73.83             | -13.00         | 60.83  | PASS      |
| H        | 3        | none                      | CH128           | 8302.50   | 52.56                    |   |                          |              |                    | 84.4*          | 31.8*  | PASS*     |
| H        | 3        | none                      | CH128           | 8374.25   | 54.58                    |   |                          |              |                    | 84.4*          | 29.8*  | PASS*     |
| H        | 3        | none                      | CH128           | 9039.25   | 47.54                    |   |                          |              |                    | 84.4*          | 36.8*  | PASS*     |
| V        | 3        | Horn SN6267               | CH128           | 1648.40   | 60.03                    | 27.90                                     | -59.03                   | 4.21         | -54.82             | -13.00         | 41.82  | PASS      |
| V        | 3        | none                      | CH128           | 1879.00   | 61.63                    |   |                          |              |                    | 84.4*          | 22.7*  | PASS*     |
| V        | 3        | Horn SN6267               | CH128           | 2027.00   | 38.56                    | 27.40                                     | -65.69                   | 4.62         | -61.07             | -13.00         | 48.07  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 2472.60   | 51.70                    | 39.30                                     | -54.42                   | 5.60         | -48.82             | -13.00         | 35.82  | PASS      |
| V        | 3        | none                      | CH128           | 2629.00   | 44.27                    |   |                          |              |                    | 84.4*          | 40.1*  | PASS*     |
| V        | 3        | none                      | CH128           | 2686.00   | 40.63                    |   |                          |              |                    | 84.4*          | 43.7*  | PASS*     |
| V        | 3        | Horn SN6267               | CH128           | 3296.80   | 51.63                    | 44.00                                     | -56.29                   | 5.84         | -50.45             | -13.00         | 37.45  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 4121.00   | 43.08                    | 32.70                                     | -64.98                   | 6.03         | -58.95             | -13.00         | 45.95  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 4945.20   | 53.78                    | 41.60                                     | -54.80                   | 6.47         | -48.33             | -13.00         | 35.33  | PASS      |
| V        | 3        | none                      | CH128           | 5266.25   | 47.80                    |   |                          |              |                    | 84.4*          | 36.6*  | PASS*     |
| V        | 3        | Horn SN6267               | CH128           | 5769.40   | 46.20                    | 32.10                                     | -63.01                   | 6.78         | -56.23             | -13.00         | 43.23  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 6593.60   | 46.37                    | 31.20                                     | -64.77                   | 7.40         | -57.37             | -13.00         | 44.37  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 7417.80   | 45.95                    | 28.40                                     | -67.27                   | 6.83         | -60.44             | -13.00         | 47.44  | PASS      |
| V        | 3        | Horn SN6267               | CH128           | 8242.00   | 46.00                    | 27.10                                     | -68.20                   | 7.16         | -61.04             | -13.00         | 48.04  | PASS      |
| V        | 3        | none                      | CH128           | 9352.50   | 48.30                    |   |                          |              |                    | 84.4*          | 36.1*  | PASS*     |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBd)

Margin (dB) = Limit (dBm) – ERP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |              |   |
|---|--|---------|-------------------|--------|--------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  | Model:  | IX325-AC775IWL    |        |              |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |              | 37 of 69  |

|                         |                      |               |                   |
|-------------------------|----------------------|---------------|-------------------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue: | Issue 1.0         |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:  | 01Sep05           |
| Test Standard(s):       | FCC §2, §22H, §24E   |               | IC RSS-132/133    |
| Lab Registration(s):    | FCC Lab Reg. #714830 |               | IC Lab File #3874 |

### Channel 190

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | ERP Emission Level | Limit          | Margin | Pass/Fail |  |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|--------------------|----------------|--------|-----------|--|
|          |          |                           |                 |           |                          |   |                          |              |                    |                |        |           |  |
|          | m        |                           |                 | MHz       | dBuV/m                   | dBuV                                      | dBm                      | dBd          | dBm                | dBm or dBuV/m* | dB     |           |  |
| H        | 3        | Horn SN6267               | CH190           | 1685.00   | 59.74                    | 27.40                                     | -55.97                   | 4.25         | -51.73             | -13.00         | 38.73  | PASS      |  |
| H        | 3        | Horn SN6267               | CH190           | 2511.00   | 46.06                    | 33.50                                     | -63.21                   | 5.66         | -57.55             | -13.00         | 44.55  | PASS      |  |
| H        | 3        | none                      | CH190           | 2665.00   | 39.31                    |   |                          |              |                    | 84.4*          | 45.1*  | PASS*     |  |
| H        | 3        | none                      | CH190           | 2671.00   | 39.15                    |   |                          |              |                    | 84.4*          | 45.2*  | PASS*     |  |
| H        | 3        | Horn SN6267               | CH190           | 3346.40   | 44.08                    | 36.30                                     | -64.72                   | 5.87         | -58.85             | -13.00         | 45.85  | PASS      |  |
| H        | 3        | Horn SN6267               | CH190           | 4183.00   | 42.53                    | 32.00                                     | -68.02                   | 6.12         | -61.90             | -13.00         | 48.90  | PASS      |  |
| H        | 3        | Horn SN6267               | CH190           | 5019.60   | 48.20                    | 35.90                                     | -58.90                   | 6.46         | -52.44             | -13.00         | 39.44  | PASS      |  |
| H        | 3        | none                      | CH190           | 5273.25   | 47.87                    |   |                          |              |                    | 84.4*          | 36.5*  | PASS*     |  |
| H        | 3        | Horn SN6267               | CH190           | 5856.20   | 44.92                    | 30.60                                     | -66.07                   | 6.89         | -59.18             | -13.00         | 46.18  | PASS      |  |
| H        | 3        | Horn SN6267               | CH190           | 6692.80   | 45.49                    | 30.10                                     | -70.20                   | 7.34         | -62.86             | -13.00         | 49.86  | PASS      |  |
| H        | 3        | Horn SN6267               | CH190           | 7529.40   | 47.23                    | 29.40                                     | -67.05                   | 6.78         | -60.27             | -13.00         | 47.27  | PASS      |  |
| H        | 3        | none                      | CH190           | 8302.50   | 52.46                    |   |                          |              |                    | 84.4*          | 31.9*  | PASS*     |  |
| H        | 3        | Horn SN6267               | CH190           | 8366.00   | 46.92                    | 28.10                                     | -63.84                   | 7.16         | -56.68             | -13.00         | 43.68  | PASS      |  |
| H        | 3        | none                      | CH190           | 8372.50   | 54.29                    |   |                          |              |                    | 84.4*          | 30.1*  | PASS*     |  |
| H        | 3        | none                      | CH190           | 9366.50   | 47.65                    |   |                          |              |                    | 84.4*          | 36.7*  | PASS*     |  |
| V        | 3        | Horn SN6267               | CH190           | 1673.20   | 59.47                    | 27.20                                     | -55.36                   | 4.23         | -51.13             | -13.00         | 38.13  | PASS      |  |
| V        | 3        | none                      | CH190           | 1896.00   | 62.36                    |   |                          |              |                    | 84.4*          | 22.0*  | PASS*     |  |
| V        | 3        | Horn SN6267               | CH190           | 2511.00   | 52.56                    | 40.00                                     | -55.47                   | 5.66         | -49.81             | -13.00         | 36.81  | PASS      |  |
| V        | 3        | none                      | CH190           | 2633.00   | 41.69                    |   |                          |              |                    | 84.4*          | 42.7*  | PASS*     |  |
| V        | 3        | none                      | CH190           | 2681.00   | 40.61                    |   |                          |              |                    | 84.4*          | 43.8*  | PASS*     |  |
| V        | 3        | none                      | CH190           | 2744.00   | 39.34                    |   |                          |              |                    | 84.4*          | 45.0*  | PASS*     |  |
| V        | 3        | Horn SN6267               | CH190           | 3346.40   | 53.28                    | 45.50                                     | -53.97                   | 5.87         | -48.10             | -13.00         | 35.10  | PASS      |  |
| V        | 3        | Horn SN6267               | CH190           | 4183.00   | 42.83                    | 32.30                                     | -66.32                   | 6.12         | -60.20             | -13.00         | 47.20  | PASS      |  |
| V        | 3        | Horn SN6267               | CH190           | 5019.60   | 42.90                    | 30.60                                     | -65.41                   | 6.46         | -58.95             | -13.00         | 45.95  | PASS      |  |
| V        | 3        | none                      | CH190           | 5264.50   | 48.24                    |   |                          |              |                    | 84.4*          | 36.1*  | PASS*     |  |
| V        | 3        | none                      | CH190           | 5766.75   | 52.38                    |   |                          |              |                    | 84.4*          | 32.0*  | PASS*     |  |
| V        | 3        | Horn SN6267               | CH190           | 5856.20   | 45.62                    | 31.30                                     | -67.03                   | 6.89         | -60.14             | -13.00         | 47.14  | PASS      |  |
| V        | 3        | Horn SN6267               | CH190           | 6692.80   | 48.49                    | 33.10                                     | -62.27                   | 7.34         | -54.93             | -13.00         | 41.93  | PASS      |  |
| V        | 3        | Horn SN6267               | CH190           | 7529.40   | 46.98                    | 29.15                                     | -66.27                   | 6.78         | -59.49             | -13.00         | 46.49  | PASS      |  |
| V        | 3        | Horn SN6267               | CH190           | 8366.00   | 47.25                    | 28.43                                     | -69.73                   | 7.16         | -62.57             | -13.00         | 49.57  | PASS      |  |
| V        | 3        | none                      | CH190           | 9203.75   | 53.72                    |   |                          |              |                    | 84.4*          | 30.7*  | PASS*     |  |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBd)

Margin (dB) = Limit (dBm) – ERP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 38 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### Channel 251

| Polarity | Distance<br>m | Substitution<br>Antenna Type | Carrier Channel | Frequency | Corrected Field<br>Strength | Substituted<br>SA Signal<br>Level<br>(uncorrected) | Power Applied<br>to Antenna | Antenna<br>Gain | ERP Carrier<br>Level | Limit  | Margin | Pass/Fail |
|----------|---------------|------------------------------|-----------------|-----------|-----------------------------|--|-----------------------------|-----------------|----------------------|--------|--------|-----------|
|          |               |                              |                 |           |                             |  |                             |                 |                      |        |        |           |
| H        | 3             | Horn SN6267                  | CH251           | 1699.00   | 60.33                       | 27.90  | -55.86                      | 4.26            | -51.60               | -13.00 | 38.60  | PASS      |
| H        | 3             | none                         | CH251           | 2303.39   | 37.70                       |  |                             |                 |                      | 84.4*  | 46.7*  | PASS*     |
| H        | 3             | none                         | CH251           | 2493.00   | 52.09                       |  |                             |                 |                      | 84.4*  | 32.3*  | PASS*     |
| H        | 3             | Horn SN6267                  | CH251           | 2546.24   | 48.01                       | 35.30  | -60.51                      | 5.66            | -54.85               | -13.00 | 41.85  | PASS      |
| H        | 3             | Horn SN6267                  | CH251           | 3395.20   | 45.77                       | 37.80  | -62.76                      | 5.90            | -56.86               | -13.00 | 43.86  | PASS      |
| H        | 3             | Horn SN6267                  | CH251           | 4244.00   | 43.92                       | 33.40  | -67.71                      | 6.20            | -61.51               | -13.00 | 48.51  | PASS      |
| H        | 3             | Horn SN6267                  | CH251           | 5092.80   | 45.61                       | 33.00  | -63.04                      | 6.46            | -56.58               | -13.00 | 43.58  | PASS      |
| H        | 3             | none                         | CH251           | 5271.00   | 44.31                       |  |                             |                 |                      | 84.4*  | 40.1*  | PASS*     |
| H        | 3             | Horn SN6267                  | CH251           | 5641.60   | 46.00                       | 32.10  | -65.04                      | 6.63            | -58.41               | -13.00 | 45.41  | PASS      |
| H        | 3             | none                         | CH251           | 5766.75   | 48.08                       |  |                             |                 |                      | 84.4*  | 36.3*  | PASS*     |
| H        | 3             | Horn SN6267                  | CH251           | 6790.40   | 47.24                       | 31.50  | -65.33                      | 7.29            | -58.04               | -13.00 | 45.04  | PASS      |
| H        | 3             | Horn SN6267                  | CH251           | 7639.20   | 51.11                       | 33.00  | -57.49                      | 6.87            | -50.62               | -13.00 | 37.62  | PASS      |
| H        | 3             | none                         | CH251           | 8302.50   | 52.46                       |  |                             |                 |                      | 84.4*  | 31.9*  | PASS*     |
| H        | 3             | none                         | CH251           | 8374.25   | 54.98                       |  |                             |                 |                      | 84.4*  | 29.4*  | PASS*     |
| H        | 3             | Horn SN6267                  | CH251           | 8488.00   | 51.49                       | 32.40  | -52.69                      | 7.16            | -45.53               | -13.00 | 32.53  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 1696.00   | 60.21                       | 27.80  | -55.48                      | 4.26            | -51.22               | -13.00 | 38.22  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 2546.21   | 53.71                       | 41.00  | -53.23                      | 5.66            | -47.57               | -13.00 | 34.57  | PASS      |
| V        | 3             | none                         | CH251           | 2685.20   | 51.03                       |  |                             |                 |                      | 84.4*  | 33.3*  | PASS*     |
| V        | 3             | none                         | CH251           | 2743.00   | 47.53                       |  |                             |                 |                      | 84.4*  | 36.8*  | PASS*     |
| V        | 3             | none                         | CH251           | 2796.00   | 47.28                       |  |                             |                 |                      | 84.4*  | 37.1*  | PASS*     |
| V        | 3             | Horn SN6267                  | CH251           | 3395.20   | 54.97                       | 47.00  | -50.70                      | 5.90            | -44.80               | -13.00 | 31.80  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 4244.00   | 43.62                       | 33.10  | -67.67                      | 6.20            | -61.47               | -13.00 | 48.47  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 5092.80   | 50.51                       | 37.90  | -58.42                      | 6.46            | -51.96               | -13.00 | 38.96  | PASS      |
| V        | 3             | none                         | CH251           | 5252.25   | 47.27                       |  |                             |                 |                      | 84.4*  | 37.1*  | PASS*     |
| V        | 3             | none                         | CH251           | 5761.50   | 53.04                       |  |                             |                 |                      | 84.4*  | 31.3*  | PASS*     |
| V        | 3             | Horn SN6267                  | CH251           | 5941.60   | 49.06                       | 34.50  | -60.92                      | 6.99            | -53.93               | -13.00 | 40.93  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 6790.40   | 48.04                       | 32.30  | -61.22                      | 7.29            | -53.93               | -13.00 | 40.93  | PASS      |
| V        | 3             | Horn SN6267                  | CH251           | 7639.20   | 51.51                       | 33.40  | -56.78                      | 6.87            | -49.91               | -13.00 | 36.91  | PASS      |
| V        | 3             | none                         | CH251           | 8374.25   | 48.88                       |  |                             |                 |                      | 84.4*  | 35.5*  | PASS*     |
| V        | 3             | Horn SN6267                  | CH251           | 8488.00   | 51.89                       | 32.80  | -54.18                      | 7.16            | -47.02               | -13.00 | 34.02  | PASS      |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – ERP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 39 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### F.10. PASS/FAIL

In reference to the results outlined in F.9, the DUT passes the requirements as stated in the reference standards.

(e) Out of Band Emissions. The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: at least  $43 + 10 \log P$  dB

The results set forth in this section meet the requirement with a margin of at least 21.6 dB

#### F.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 40 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix G - PCS Band Conducted TX RF Output Power Measurement

### G.1. REFERENCES

|                              |                    |
|------------------------------|--------------------|
| Normative Reference Standard | FCC CFR 47 §2.1046 |
| Procedure Reference          | FCC CFR 47 §2.1046 |

### G.2. LIMITS

|                        |  |
|------------------------|--|
| FCC CFR 47 §2.1046 (a) | For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedures to give the values of current and voltage on the circuit elements specified in §2.1033(c) (8). |
|------------------------|--|

\*EIRP limits are specified in Appendix J.

### G.3. ENVIRONMENTAL CONDITIONS

|                     |             |
|---------------------|-------------|
| Temperature         | 25 +/- 2 °C |
| Humidity            | 35 +/- 4 %  |
| Barometric Pressure | 96 kPa      |

### G.4. EQUIPMENT LIST

| ASSET NUMBER | MANUFACTURER | MODEL     | DESCRIPTION         | LAST CAL | CAL DUE |
|--------------|--------------|-----------|---------------------|----------|---------|
| 00007        | Gigatronics  | 8652A     | Power Meter         | 18Oct04  | 18Oct05 |
| 00011        | Gigatronics  | 80701A    | Power Sensor        | 08Oct04  | 08Oct05 |
| 00102        | Pasternack   | PE7014-30 | 30dB attenuator     | 8Jun04   | 8Dec05  |
| na           | Itronix      | na        | Cable & SMA adapter | na       | na*     |

\*Cable and attenuator verified with power meter prior to use


|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

#### G.5. MEASUREMENT EQUIPMENT SETUP

|  |   |
|--|---|
| <b>Measurement Equipment Connections</b> | The equipment was connected as shown in the setup drawing in G.6.   |
| <b>Measurement Equipment Settings</b>    | Power Meter Settings:<br>Mode - BAP<br>Frequency compensation set for carrier frequency<br>Offset set appropriately to compensate for any attenuator or cable losses  |
| <b>Measurement Procedure</b>             | The RF conducted power levels were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in burst average power (BAP) mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the output port and the power sensor input. The DUT test software was used to set it to transmit in the maximum power control mode defined by the manufacturer. |

#### G.6. SETUP DRAWING

Figure G.6-1 - Setup Drawing

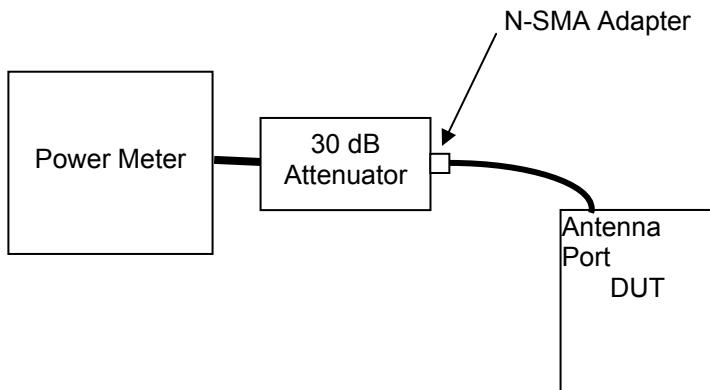

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 42 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### G.7. DUT OPERATING DESCRIPTION

Power measurements were made for each of the three PCS test channels (Channel 512, 661 & 810), with the AirCard 775 modem set appropriately as described in section 5.7.

#### G.8. TEST RESULTS

| Mode    | Channel | Frequency   | Conducted Power |             |
|---------|---------|-------------|-----------------|-------------|
| PCS GSM | 512     | 1850.20 MHz | +29.10 dBm      | 0.813 Watts |
|         | 661     | 1880.00 MHz | +29.05 dBm      | 0.804 Watts |
|         | 810     | 1909.80 MHz | +29.20 dBm      | 0.832 Watts |

#### G.9. PASS/FAIL

There is no pass/fail criterion for this measurement. The EIRP values, applied to appropriate regulatory requirements are outlined in Appendix J.

#### G.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

24May05  
Date

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix H - Conducted PCS TX Spurious Emissions Measurement

### H.1. REFERENCES

|                              |                       |
|------------------------------|-----------------------|
| Normative Reference Standard | FCC CFR 47 §24.238(a) |
| Procedure Reference          | FCC CFR 47 §24.238(b) |

### H.2. LIMITS

|                    |   |
|--------------------|---|
| FCC CFR 47 §24.238 | (a) <i>Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</i> |
|--------------------|---|

### H.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### H.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION         | LAST CAL | CAL DUE |
|----|--------------|--------------|-------------|---------------------|----------|---------|
| 1  | 00015        | Agilent      | E4408B      | Spectrum Analyzer   | 24Jan05  | 24Jan06 |
| 2  | 00102        | Pasternack   | PE7015-3030 | 30dB attenuator     | na       | na*     |
| 3  | na           | Ittronix     | na          | Cable & SMA adapter | na       | na*     |

\*Verified with VNA

### H.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |      |      |        |          |
|-----------------------------------|--|------|------|--------|----------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in H.6. |      |      |        |          |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |      |      |        |          |
|                                   | Frequency Range  | RBW  | VBW  | Offset | Detector |
|                                   | MHz  | kHz  | kHz  | dB     |          |
|                                   | Between Block edge and 1 MHz from Block edges            | 3 *  | 3 *  | -31.0  | Peak     |
|                                   | Beyond 1MHz from Block edges                             | 1000 | 1000 |        |          |


\*Specified BW of 1% of EBW within Block and 1 MHz of each edge.

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 44 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## H.6. SETUP DRAWING

Figure H.6-1 - Setup Drawing

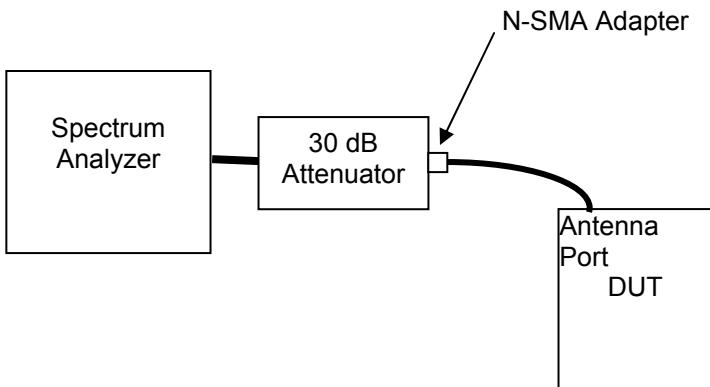

## H.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT transmitting at maximum power in the PCS band, in a configuration as described in Section 5 of this report. The Block edge measurements were made with the DUT transmitting on the channel closest to the edge under investigation (CH512 & CH810). The remaining spurious measurements were made on each of the three channels, Low (CH512), mid (CH661) and High (CH810).


|   |                     |         |                   |        |                |  |
|---|---------------------|---------|-------------------|--------|----------------|--|
| Applicant:  | ITRONIX Corporation | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  <b>ITRONIX</b> |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |                     |         |                   | Model: | IX325-AC775IWL |  |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

## H.8. TEST RESULTS

The spurious measurements detailed in this section are referenced to the conducted carrier levels set forth in Appendix G of this report:

### H.8.1. Spurious Emissions within 1MHz of Block Edge

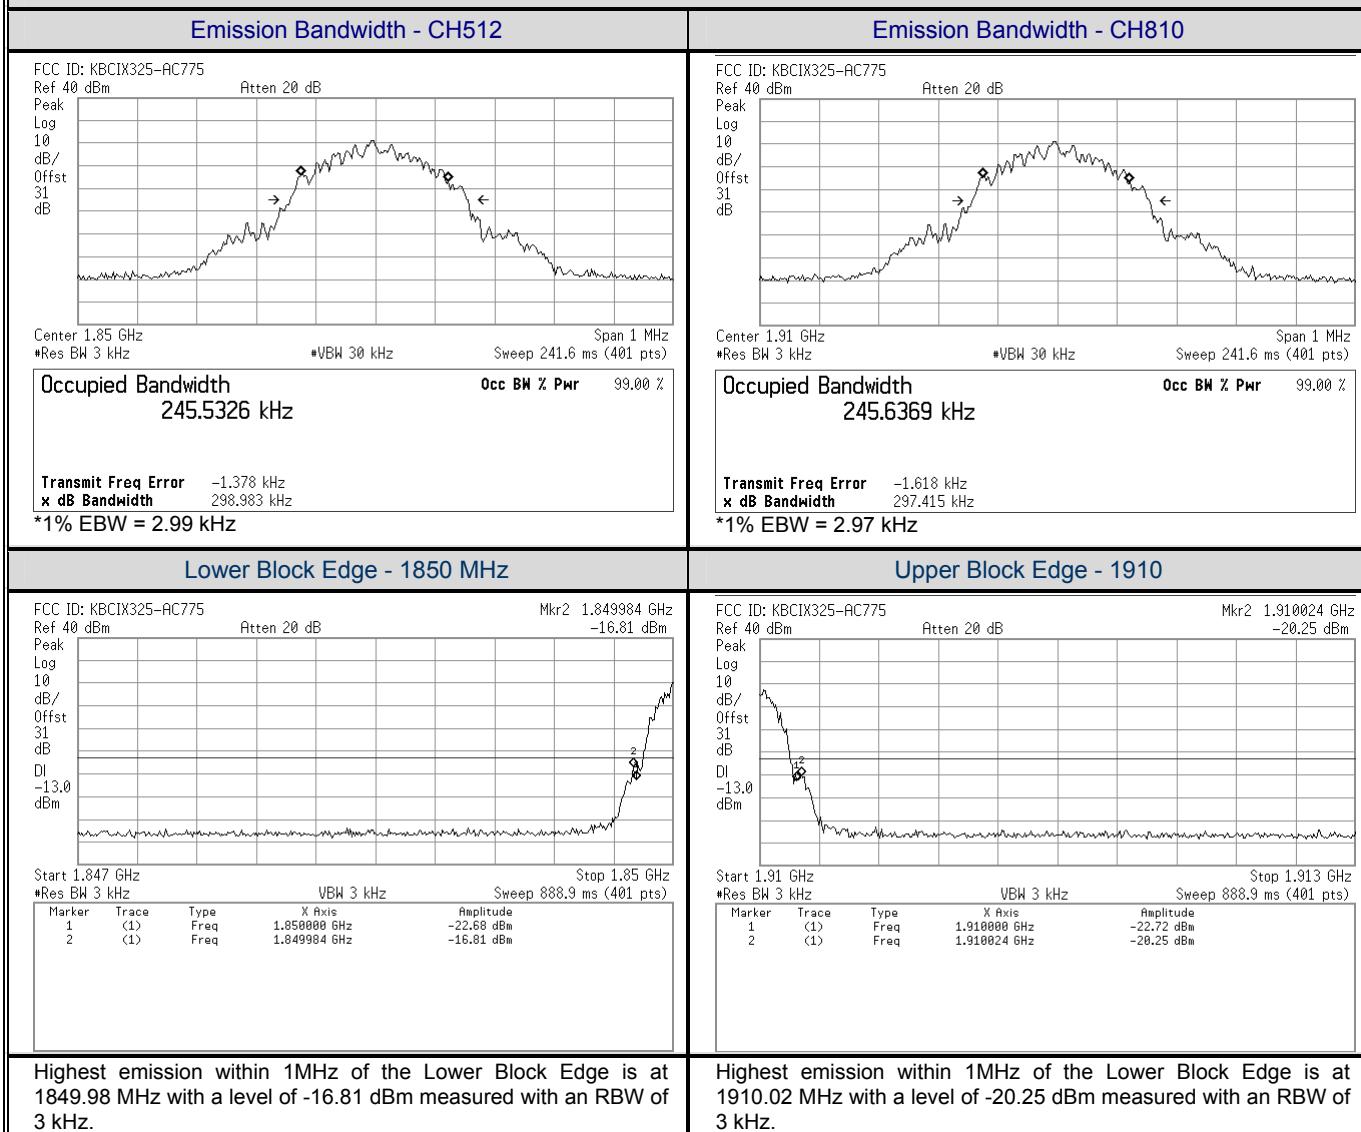


|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 46 of 69       |   |

|                                |                      |                       |           |
|--------------------------------|----------------------|-----------------------|-----------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b>  | Issue 1.0 |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>   | 01Sep05   |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   | <b>IC RSS-132/133</b> |           |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 | <b>IC Lab File #</b>  | 3874      |


### H.8.2. Spurious Emissions removed by more than 1MHz from Block Edge

#### Channel 512


##### Band 1

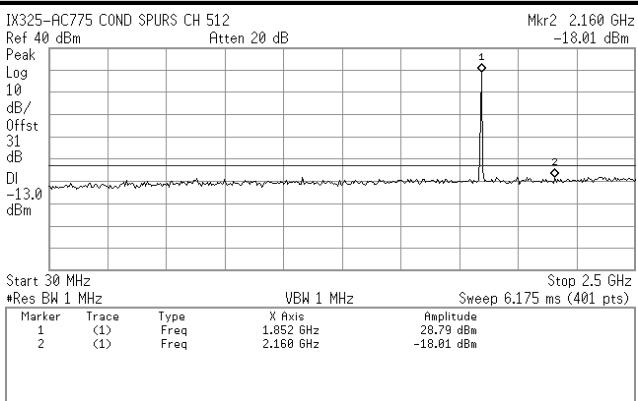


##### Band 2

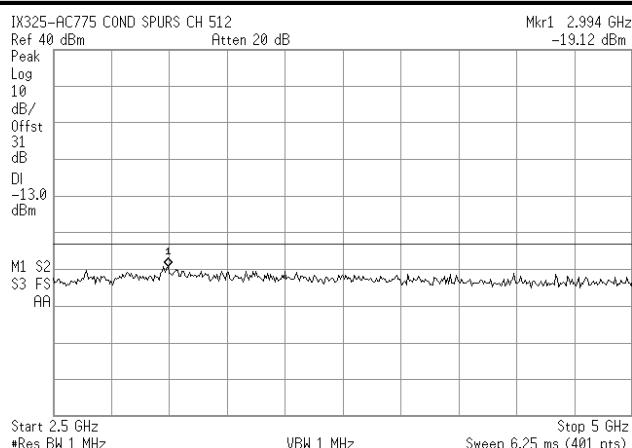

##### Band 3

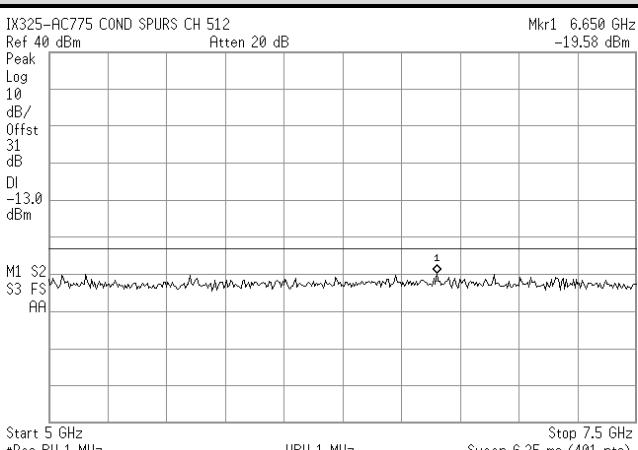


##### Band 4

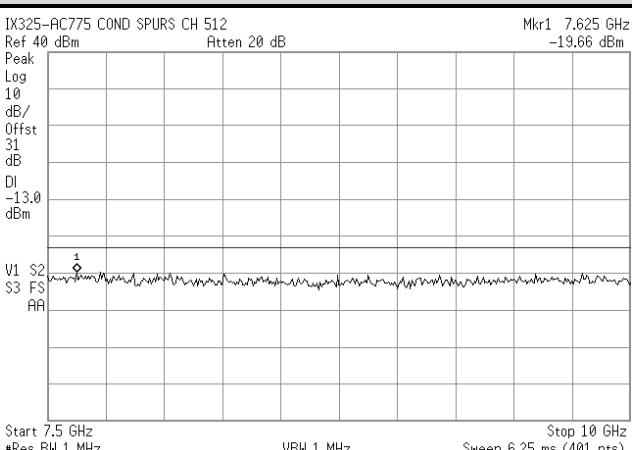

##### Band 5





##### Band 6

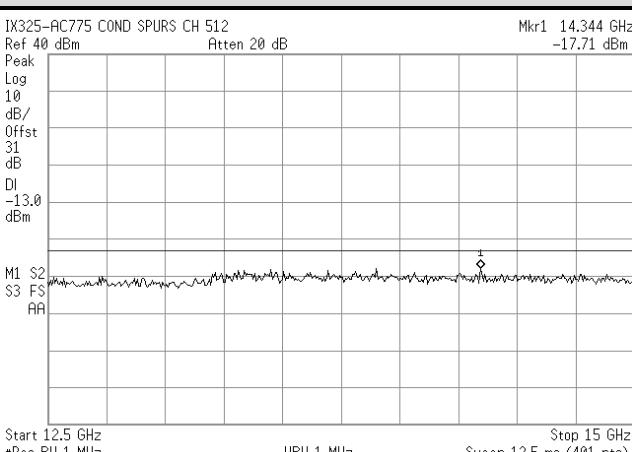


|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               |                | 47 of 69  |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

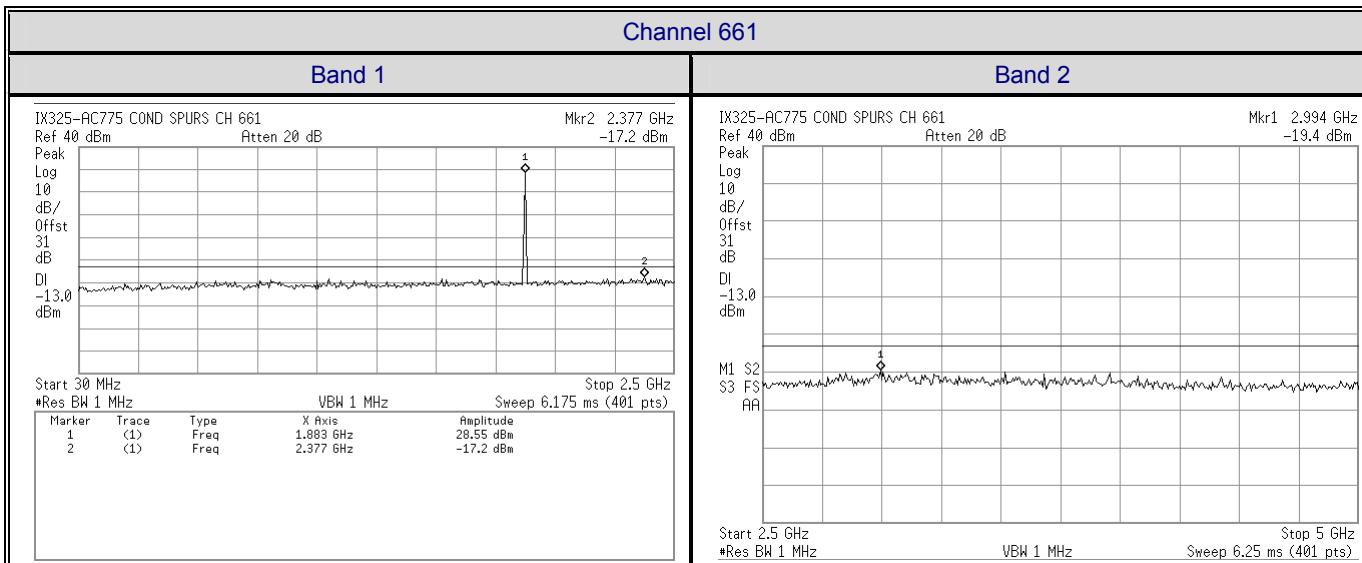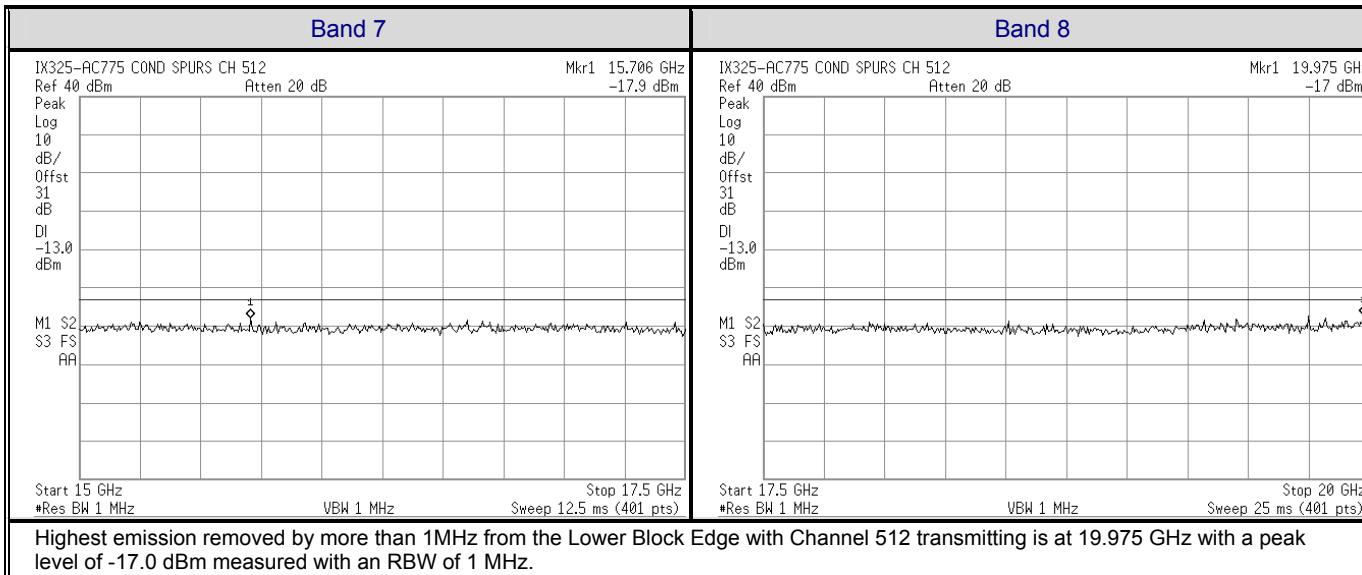


|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

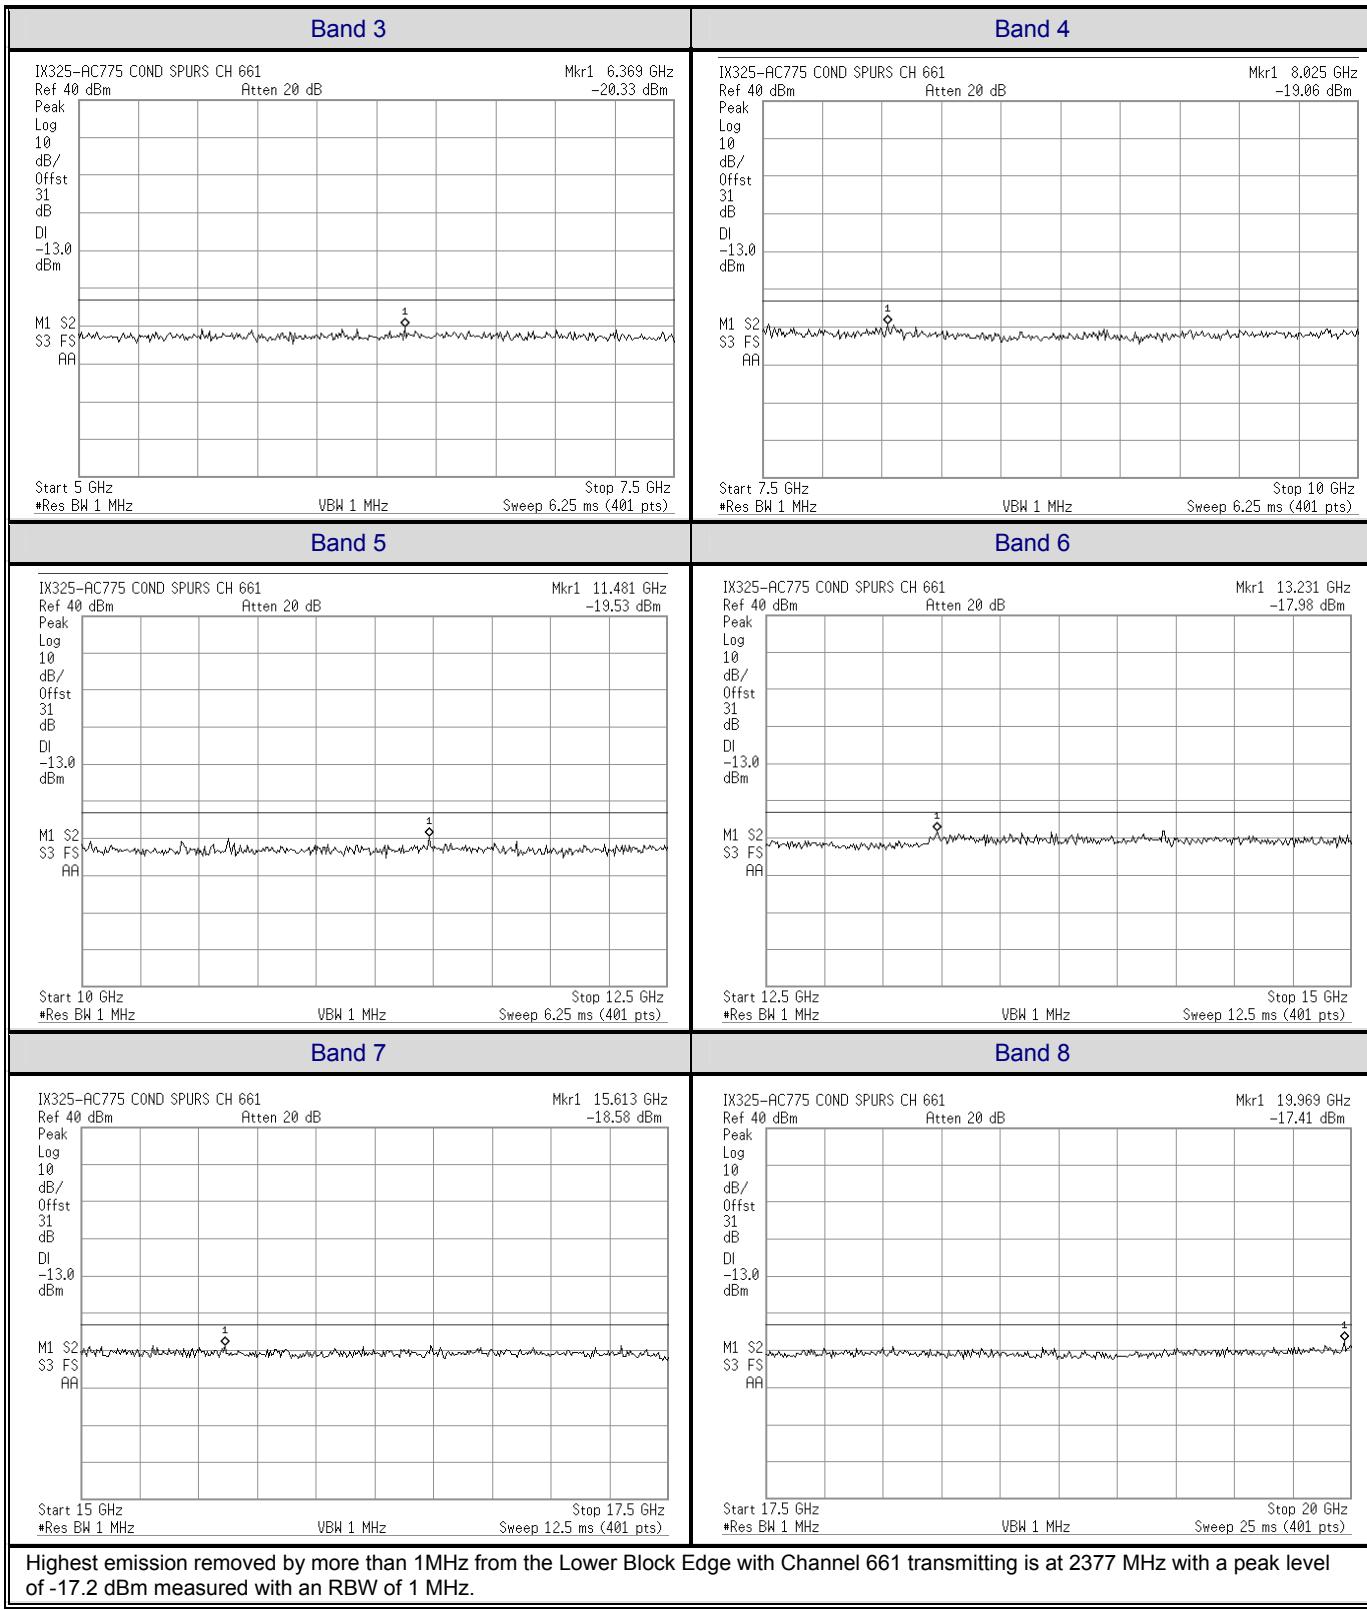


|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               |                | 49 of 69  |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

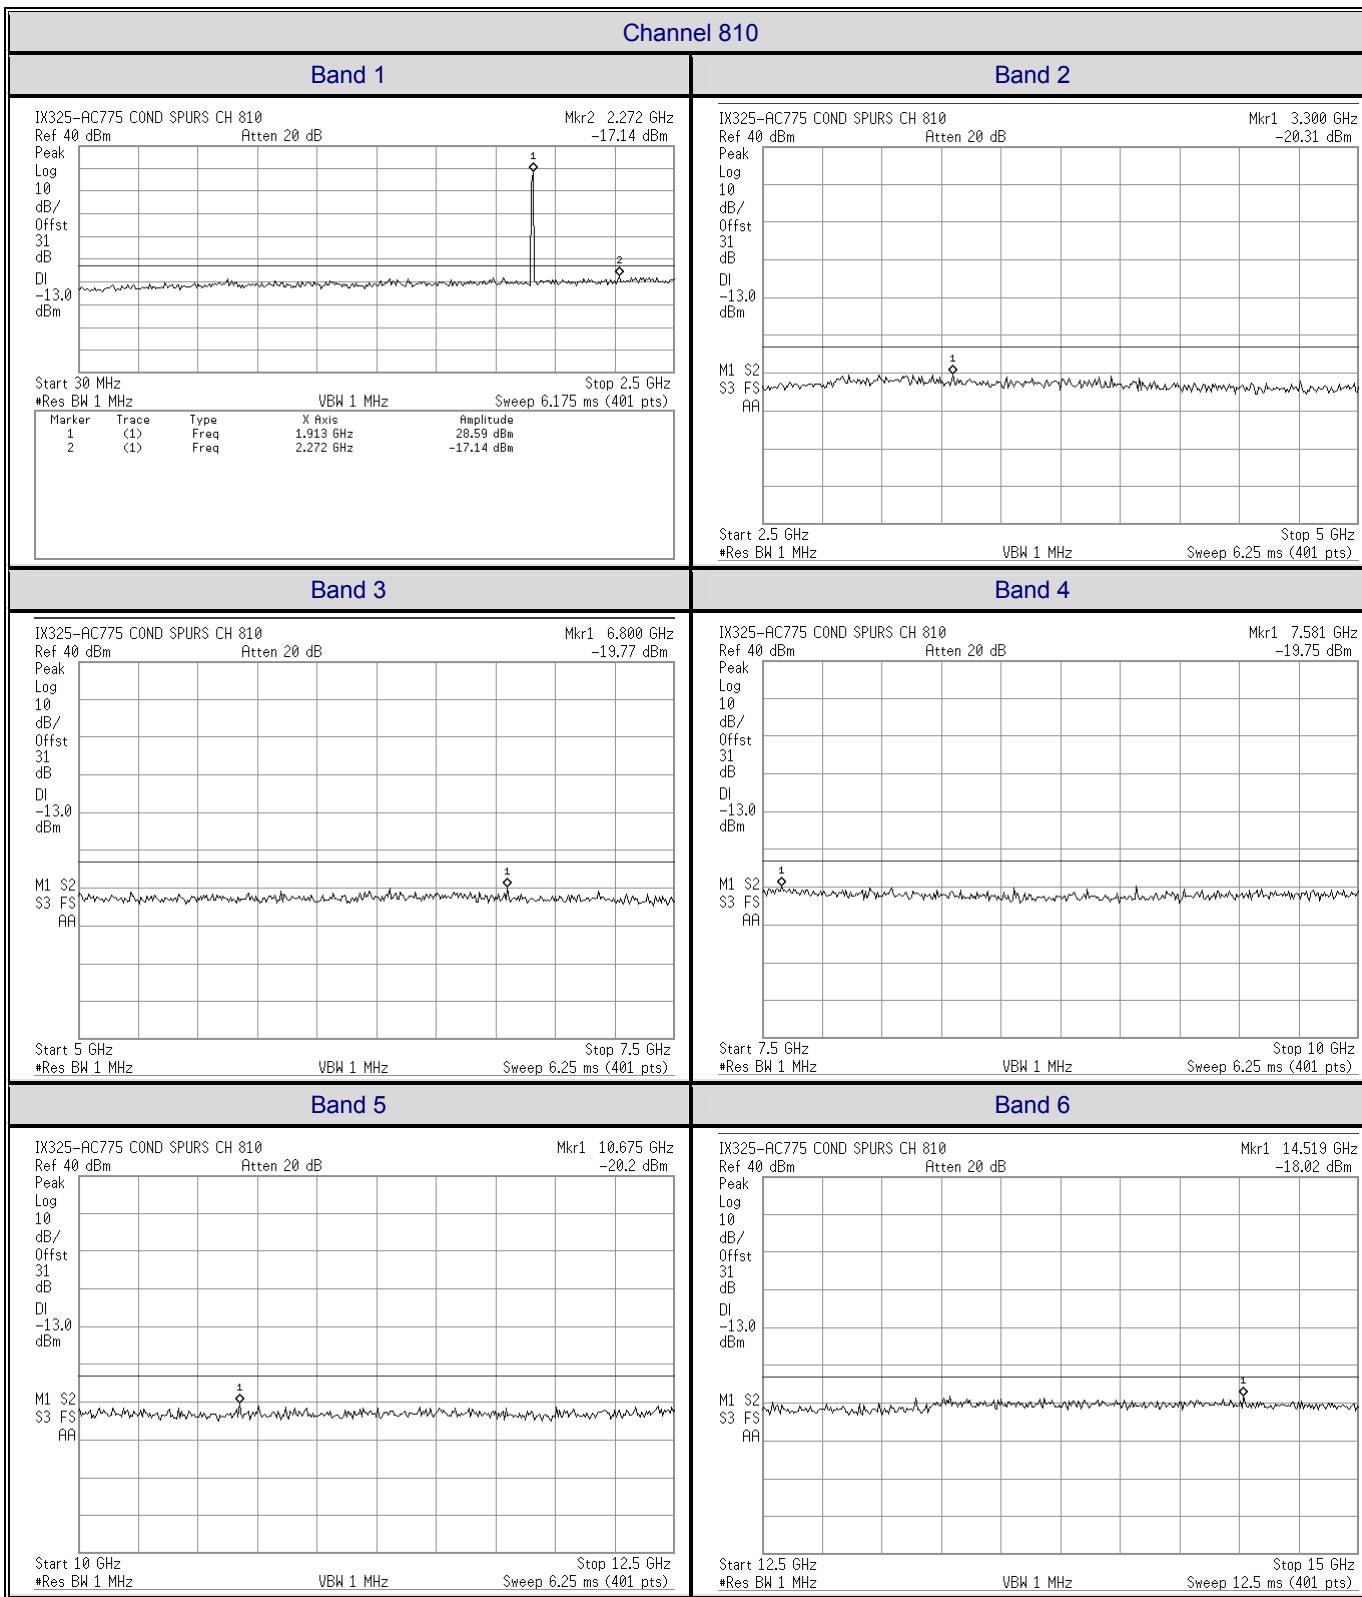

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 50 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

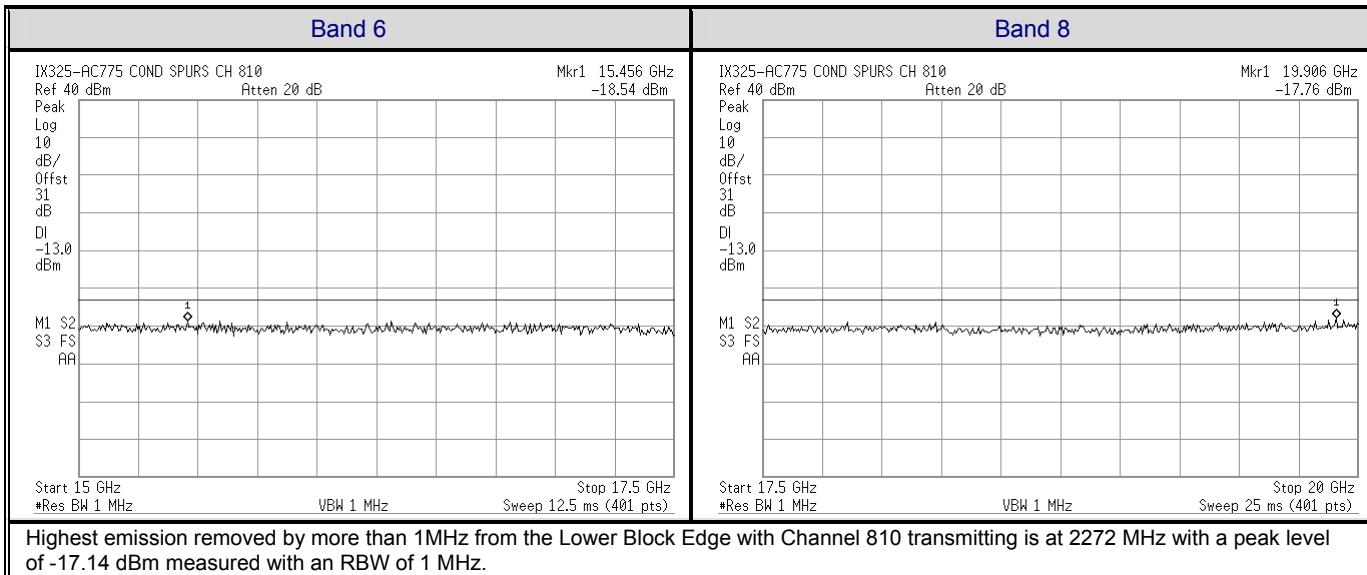

#### H.9. PASS/FAIL

In reference to the results outlined in H.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 4.00 dB (-17.0 dBm @ 19.975 vs a limit of -13 dBm)

#### H.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

25May05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 51 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix I - Conducted PCS RX Spurious Emissions Measurement

### I.1. REFERENCES

|                              |                     |
|------------------------------|---------------------|
| Normative Reference Standard | IC RSS-133 §6.7 (b) |
| Procedure Reference          | IC RSS-133 §4.5     |

### I.2. LIMITS

|                 |   |
|-----------------|---|
| IC RSS-133 §6.7 | (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4 kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz. |
|-----------------|---|

### I.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### I.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL  | DESCRIPTION         | LAST CAL | CAL DUE |
|----|--------------|--------------|--------|---------------------|----------|---------|
| 1  | 00015        | Agilent      | E4408B | Spectrum Analyzer   | 24Jan05  | 24Jan06 |
| 2  | na           | Itronix      | na     | Cable & SMA adapter | na       | na*     |

\*Verified with VNA

### I.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |     |          |      |
|-----------------------------------|--|-----|----------|------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in I.6. |     |          |      |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |     |          |      |
| Frequency Range                   | RBW  | VBW | Detector |      |
| MHz                               | kHz  | kHz |          |      |
| 30 MHz - 3 x F <sub>c</sub>       | 4*   | 4*  |          | Peak |


Note: 4 kHz RBW & VBW are not attainable with equipment used and 3 kHz will be used. A bandwidth correction factor of  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$ , (1.25 dB) will be added to the final results.

|   |  |         |                   |        |                |  |
|---|--|---------|-------------------|--------|----------------|--|
| Applicant:  | Itronix Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  <b>ITRONIX</b> |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |  |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 52 of 69       |  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## I.6. SETUP DRAWING

Figure I.6-1 - Setup Drawing

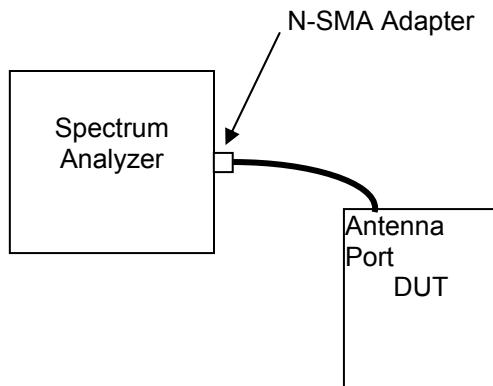


## I.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT in the receive mode for the PCS band mid channel (CH661 1880 MHz)

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

## I.8. TEST RESULTS

### I.8.1. Receiver Spurious Emissions

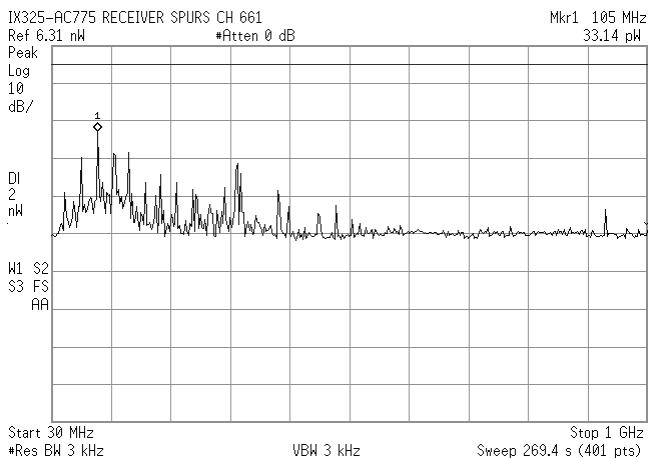

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 33.14 pW with RBW of 3 kHz:


$$\text{Corrected Peak Emission (pW)} = 33.14 \text{ pW} * 4/3$$

$$= 44.18 \text{ pW for RBW of 4 kHz}$$

$$= 0.0442 \text{ nW}$$

$$\text{Margin (nW)} = 2 \text{ nW} - .044 \text{ nW}$$

$$= 1.956 \text{ nW}$$

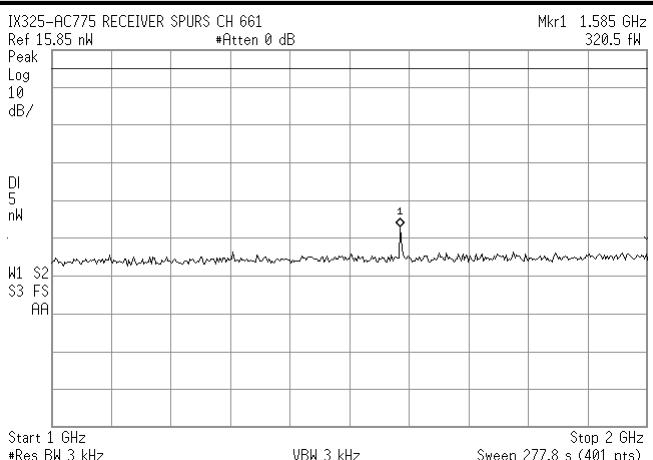

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 320.5 fW with RBW of 3 kHz:


$$\text{Corrected Peak Emission} = 320.5 \text{ fW} * 4/3$$

$$= 427.3 \text{ fW for RBW of 4 kHz}$$

$$= 0.00043 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0004 \text{ nW}$$

$$= 4.9996 \text{ nW}$$

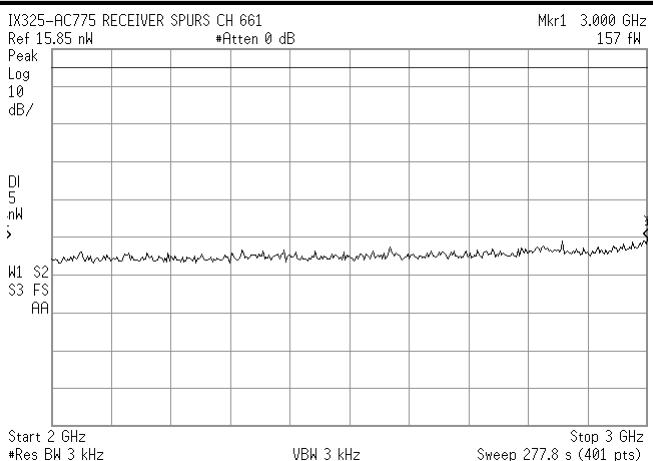

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 157 fW with RBW of 3 kHz:

$$\text{Corrected Peak Emission (pW)} = 157 \text{ fW} * 4/3$$

$$= 209 \text{ fW for RBW of 4 kHz}$$


$$= 0.00021 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0002 \text{ nW}$$

$$= 4.9998 \text{ nW}$$

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 54 of 69       |   |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

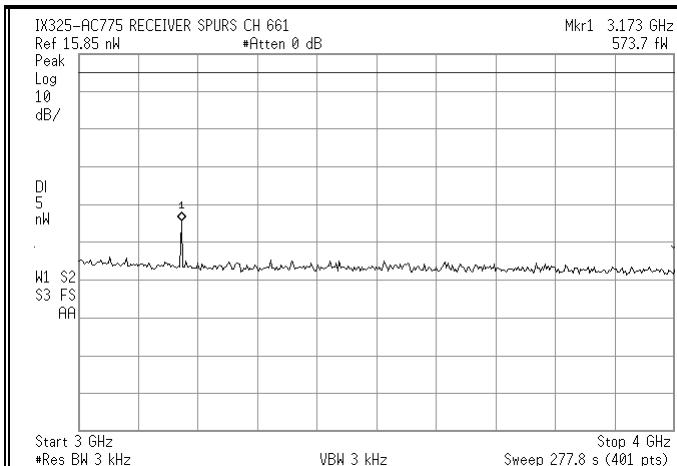

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 573.7 fW with RBW of 3 kHz:


$$\text{Corrected Peak Emission (pW)} = 573.7 \text{ fW} * 4/3$$

$$= 764.9 \text{ fW for RBW of 4 kHz}$$

$$= 0.00077 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0008 \text{ nW}$$

$$= 4.9992 \text{ nW}$$

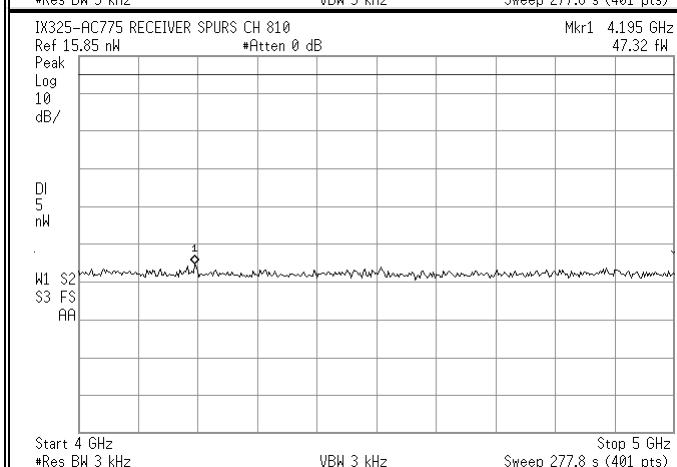

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 47.32 fW with RBW of 3 kHz:


$$\text{Corrected Peak Emission (pW)} = 47.32 \text{ fW} * 4/3$$

$$= 63.09 \text{ fW for RBW of 4 kHz}$$

$$= 0.00006 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0001 \text{ nW}$$

$$= 4.9999 \text{ nW}$$

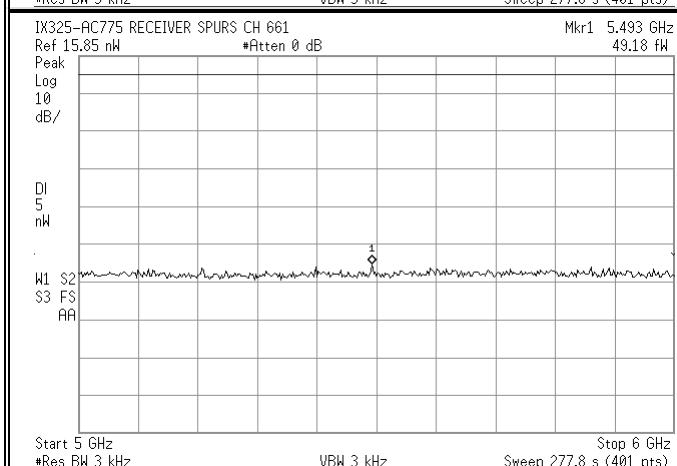

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 49.18 fW with RBW of 3 kHz:

$$\text{Corrected Peak Emission} = 49.18 \text{ fW} * 4/3$$

$$= 65.6 \text{ fW for RBW of 4 kHz}$$

$$= 0.00007 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0001 \text{ nW}$$

$$= 4.9999 \text{ nW}$$

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 55 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### I.9. PASS/FAIL

In reference to the results outlined in I.9, the DUT passes the requirements as stated in the reference standards.

IC RSS-133 §6.7 (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz.

The results set forth in this section meet the requirement with a margin of at least 1.96 nW.

#### I.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

26May05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 56 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix J - PCS Band Effective Isotropic Radiated Power Measurement

### J.1. REFERENCES

|                              |                       |
|------------------------------|-----------------------|
| Normative Reference Standard | FCC CFR 47 §24.232(b) |
| Procedure Reference          | ANSI/TIA/EIA-603-C    |

### J.2. LIMITS

|                        |  |
|------------------------|--|
| FCC CFR 47 §24.232 (b) | (b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications. |
|------------------------|--|

### J.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### J.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL    | DESCRIPTION                      | LAST CAL | CAL DUE |
|----|--------------|--------------|----------|----------------------------------|----------|---------|
| 1  | 00072        | EMCO         | 2075     | Mini-mast                        | na       | na      |
| 2  | 00073        | EMCO         | 2080     | Turn Table                       | na       | na      |
| 3  | 00071        | EMCO         | 2090     | Multi-Device Controller          | na       | na      |
| 4  | 00035        | ETS          | 3115     | Double Ridged Guide Antenna (Rx) | 24Mar04  | 24Mar06 |
| 5  | 00051        | HP           | 8566B    | Spectrum Analyzer                | 12Apr05  | 12Apr06 |
| 6  | 00047        | HP           | 85685A   | Preselector                      | 13Apr05  | 13Apr06 |
| 7  | 00120        | Celltech     | n/a      | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 8  | 00121        | Andrew       | FSJ4-50B | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 9  | 00130        | Andrew       | FSJ1-50A | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |

#### ADDITIONAL SUBSTITUTION EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION          | LAST CAL | CAL DUE |
|----|--------------|--------------|-------------|----------------------|----------|---------|
| 10 | 00034        | ETS          | 3115        | Horn Antenna (Tx)    | 24Mar04  | 24Mar06 |
| 11 | 00131        | Andrew       | FSJ1-50A    | Microwave Cable (TX) | na       | na      |
| 12 | 00127        | Andrew       | FSJ4-50B    | Microwave Cable (TX) | na       | na      |
| 13 | 00131        | Andrew       | FSJ1-50A    | Microwave Cable (TX) | na       | na      |
| 14 | 00006        | R & S        | SMR-20      | Signal Generator     | 12Apr05  | 12Apr06 |
| 15 | 00007        | Gigatronics  | 8652A       | Power Meter          | 18Oct04  | 18Oct05 |
| 16 | 00011        | Gigatronics  | 80701A      | Power Sensor         | 08Oct04  | 08Oct05 |
| 17 | 00013        | Gigatronics  | 80701A      | Power Sensor         | 11Oct04  | 11Oct05 |
| 18 | 00102        | Pasternack   | PE7015-3110 | 30 dB attenuator     | na*      | na*     |
| 19 | 00078        | Pasternack   | PE2214-20   | Directional Coupler  | na*      | na*     |
| 20 | 00142        | HP           | 8491A       | 20 dB attenuator     | na*      | na*     |

\*Attenuation offset in power meter setup

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 57 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### J.5. MEASUREMENT EQUIPMENT SETUP

|                                   |  |     |     |          |
|-----------------------------------|--|-----|-----|----------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in J.6. |     |     |          |
| MEASUREMENT EQUIPMENT SETTINGS    | The spectrum analyzer was set to the following settings: |     |     |          |
|                                   | Frequency Range  | RBW | VBW | Detector |
|                                   | MHz  | MHz | MHz |          |
|                                   | 1000 - 2000  | 1   | 1   | Peak     |

### J.6. SETUP DRAWING

Figure J.6-1 - Field Strength Setup Drawing


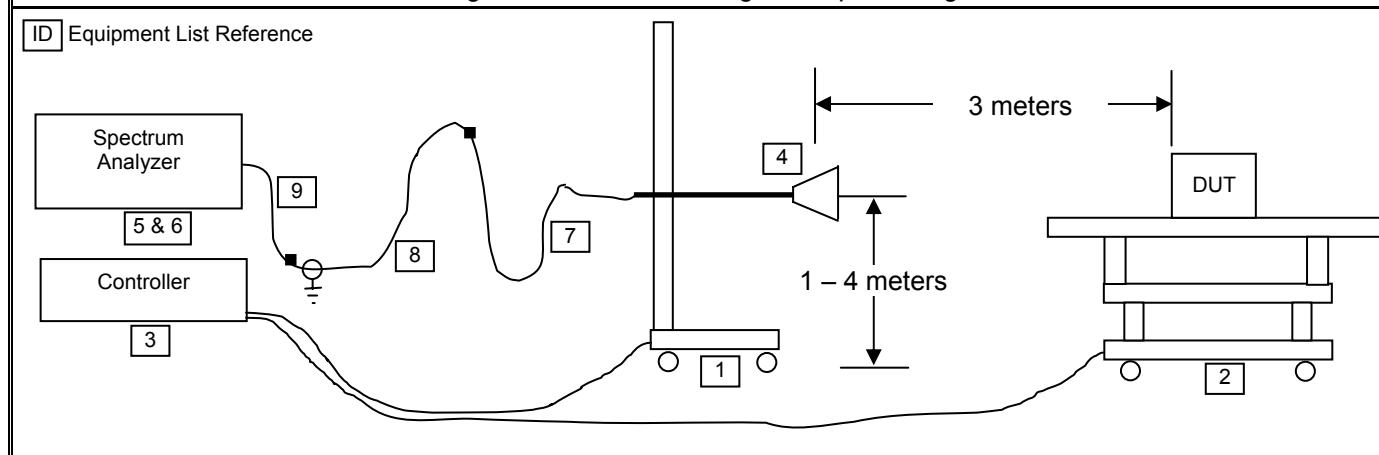


Figure J.6-2 - Substitution Setup Drawing

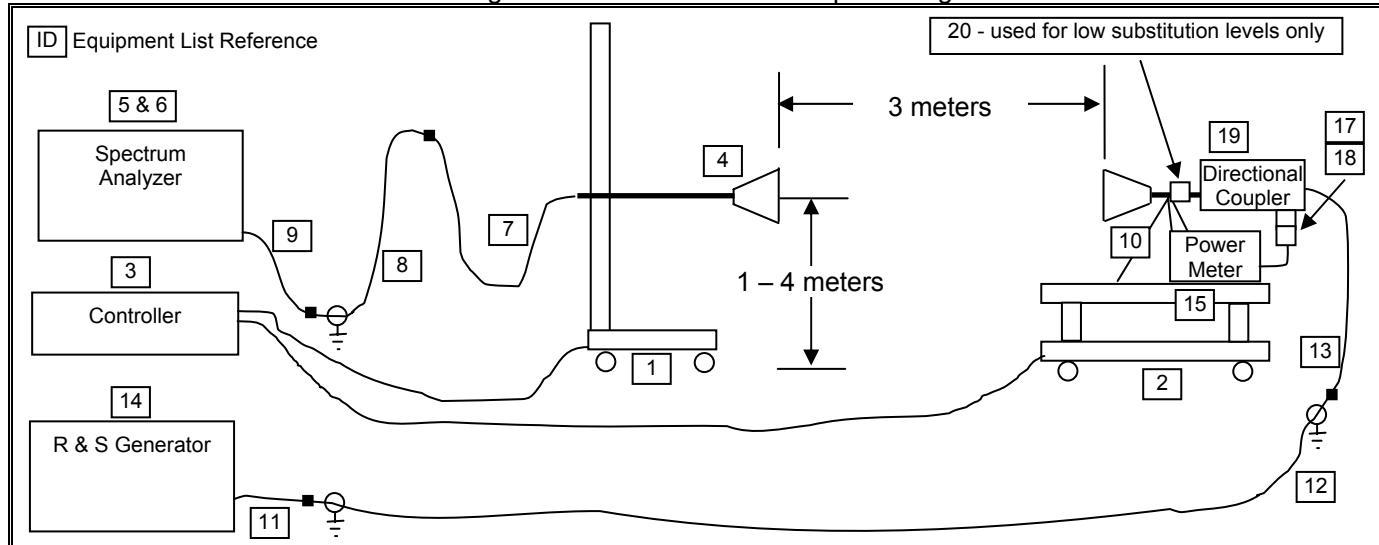

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

#### J.7. SETUP PHOTOGRAPHS

Photograph J.7-1 - DUT in Highest PCS Carrier Configuration



#### J.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the PCS band at maximum power levels, and the DUT configured as described in Section 5 of this report.

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 59 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

### J.9. TEST RESULTS



Project Number: 040505KBC-T628-E24G  
Company: Itronix  
Product: IX325 with AC775

Standard: FCC24.232b  
Test Start Date: 26-May-05  
Test End Date: 27-Jun-05

#### IX325 with AC775 Carrier Field Strengths

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | Carrier EIRP Level |        | EIRP Limit | Margin | Pass/Fail |      |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|--------------------|--------|------------|--------|-----------|------|
|          |          |                           |                 |           |                          |   |                          |              | MHz                | dBuV/m | dBuV       | dBm    | dBi       | dBm  |
| H        | 3        | Horn SN6267               | 512             | 1850.20   | 131.06                   | 97.72                                     | 24.47                    | 6.55         | 31.02              | 1.26   | 33.01      | 2.00   | 1.99      | PASS |
| V        | 3        | Horn SN6267               | 512             | 1850.20   | 123.88                   | 90.54                                     | 18.22                    | 6.55         | 24.77              | 0.300  | 33.01      | 2.00   | 8.24      | PASS |
| H        | 3        | Horn SN6267               | 661             | 1880.00   | 128.84                   | 95.30                                     | 22.70                    | 6.58         | 29.28              | 0.847  | 33.01      | 2.00   | 3.73      | PASS |
| V        | 3        | Horn SN6267               | 661             | 1880.00   | 123.38                   | 89.84                                     | 18.32                    | 6.58         | 24.90              | 0.309  | 33.01      | 2.00   | 8.11      | PASS |
| H        | 3        | Horn SN6267               | 810             | 1909.80   | 128.55                   | 94.84                                     | 22.72                    | 6.61         | 29.33              | 0.857  | 33.01      | 2.00   | 3.68      | PASS |
| V        | 3        | Horn SN6267               | 810             | 1909.80   | 123.15                   | 89.44                                     | 17.99                    | 6.61         | 24.60              | 0.288  | 33.01      | 2.00   | 8.41      | PASS |

#### Note:

Double Ridged Guide Antenna used for substitution

#### Formulae:

EIRP Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – Level (dBm)

### J.10. PASS/FAIL

In reference to the results outlined in J.9, the DUT passes the requirements as stated in the reference standards as follows:

FCC 24.232 (b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.....

A maximum EIRP of 31.02 dBm (1.26 Watts) was measured when Channel 512 was transmitting through the attached swivel dipole antenna.

### J.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

|  |                     |         |                   |        |                |   |
|--|---------------------|---------|-------------------|--------|----------------|---|
| Applicant:   | Itronix Corporation | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem  |                     |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                     |         |                   |        |                | 60 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## Appendix K - Radiated PCS TX Spurious Emissions Measurement

### K.1. REFERENCES

|                              |                       |
|------------------------------|-----------------------|
| Normative Reference Standard | FCC CFR 47 §24.238(a) |
| Procedure Reference          | ANSI/TIA/EIA-603-C    |

### K.2. LIMITS

|                    |   |
|--------------------|---|
| FCC CFR 47 §24.238 | (a) <i>Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</i> |
|--------------------|---|

### K.3. ENVIRONMENTAL CONDITIONS

|                     |                |
|---------------------|----------------|
| Temperature         | 27 +/- 2 °C    |
| Humidity            | 33 +/- 2 %     |
| Barometric Pressure | 96 +/- 0.2 kPa |

### K.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

| ID | ASSET NUMBER | MANUFACTURER | MODEL              | DESCRIPTION                      | LAST CAL | CAL DUE |
|----|--------------|--------------|--------------------|----------------------------------|----------|---------|
| 1  | 00072        | EMCO         | 2075               | Mini-mast                        | na       | na      |
| 2  | 00073        | EMCO         | 2080               | Turn Table                       | na       | na      |
| 3  | 00071        | EMCO         | 2090               | Multi-Device Controller          | na       | na      |
| 4  | 00035        | ETS          | 3115               | Double Ridged Guide Antenna (Rx) | 24Mar04  | 24Mar06 |
| 5  | 00161/00166  | Waveline     | 899/801-KF         | Standard Gain Horn Antenna (Rx)  | n/a      | n/a     |
| 6  | 00015        | HP           | E4408B             | Spectrum Analyzer                | 24Jan05  | 24Jan06 |
| 7  | 00051        | HP           | 8566B              | Spectrum Analyzer                | 12Apr05  | 12Apr06 |
| 8  | 00047        | HP           | 85685A             | Preselector                      | 13Apr05  | 13Apr06 |
| 9  | 00120        | Celltech     | n/a                | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 10 | 00121        | Andrew       | FSJ4-50B           | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 11 | 00130        | Andrew       | FSJ1-50A           | Microwave Cable (RX)             | 25Mar05  | 25Mar06 |
| 12 | 00115        | Miteq        | JS4-00102600-35-5A | Low Noise Amplifier              | 08Jun05  | 08Jun06 |
| 13 | 00093        | Microtronics | HPM50111           | High Pass Filter                 | 8Jun04   | 8Jun05  |
| 14 | 00119        | INMAT        | 18AH-10            | 10dB attenuator                  | 8Jun04   | 8Jun05  |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 61 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

| ADDITIONAL SUBSTITUTION EQUIPMENT |              |              |             |                                 |          |         |
|-----------------------------------|--------------|--------------|-------------|---------------------------------|----------|---------|
| ID                                | ASSET NUMBER | MANUFACTURER | MODEL       | DESCRIPTION                     | LAST CAL | CAL DUE |
| 15                                | 00034        | ETS          | 3115        | Horn Antenna (Tx)               | 24Mar04  | 24Mar06 |
| 16                                | 00162/00165  | Waveline     | 899/801-KF  | Standard Gain Horn Antenna (Tx) | na       | na      |
| 17                                | 00131        | Andrew       | FSJ1-50A    | Microwave Cable (TX)            | na       | na      |
| 18                                | 00127        | Andrew       | FSJ4-50B    | Microwave Cable (TX)            | na       | na      |
| 19                                | 00133        | Andrew       | FSJ1-50A    | Microwave Cable (TX)            | na       | na      |
| 20                                | 00006        | R & S        | SMR-20      | Signal Generator                | 12Apr05  | 12Apr06 |
| 21                                | 00007        | Gigatronics  | 8652A       | Power Meter                     | 18Oct04  | 18Oct05 |
| 22                                | 00011        | Gigatronics  | 80701A      | Power Sensor                    | 08Oct04  | 08Oct05 |
| 23                                | 00013        | Gigatronics  | 80701A      | Power Sensor                    | 11Oct04  | 11Oct05 |
| 24                                | 00102        | Pasternack   | PE7015-3110 | 30 dB attenuator                | na*      | na*     |
| 25                                | 00078        | Pasternack   | PE2214-20   | Directional Coupler             | na*      | na*     |
| 26                                | 00142        | HP           | 8491A       | 20 dB attenuator                | na*      | na*     |

\* Attenuation offset in power meter setup

| K.5. MEASUREMENT EQUIPMENT SETUP  |   |             |                           |                    |                    |
|-----------------------------------|---|-------------|---------------------------|--------------------|--------------------|
| MEASUREMENT EQUIPMENT CONNECTIONS | The measurement equipment was connected as shown in K.6. A number of measurement equipment configurations were used to cover the applicable frequency ranges. The configurations for each range are as follows: |             |                           |                    |                    |
|                                   | Frequency Range   | LNA Asset # | Filter/Attenuator Asset # | Rx Antenna Asset # | Tx Antenna Asset # |
|                                   | 1 GHz – 2 GHz   | none        | none                      | 00035              | 00034              |
|                                   | 2 GHz – 3 GHz   | 00115       | 00119                     | 00035              | 00034              |
|                                   | 3 GHz – 18 GHz  | 00115       | 00093                     | 00035              | 00034              |
| MEASUREMENT EQUIPMENT SETTINGS    | 18 GHz – 25 GHz   | 00115       | none                      | 000161/00166       | 000162/00165       |
|                                   | The spectrum analyzer was set to the following settings:  |             |                           |                    |                    |
|                                   | Frequency Range   |             | RBW                       | VBW                | Detector           |
|                                   | MHz   |             | kHz                       | kHz                |                    |
| 1 GHz – 25 GHz                    |   | 1000        | 1000                      | Peak               |                    |

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 62 of 69       |   |

## K.6. SETUP DRAWING

Figure K.6-1 - Field Strength Setup Drawing


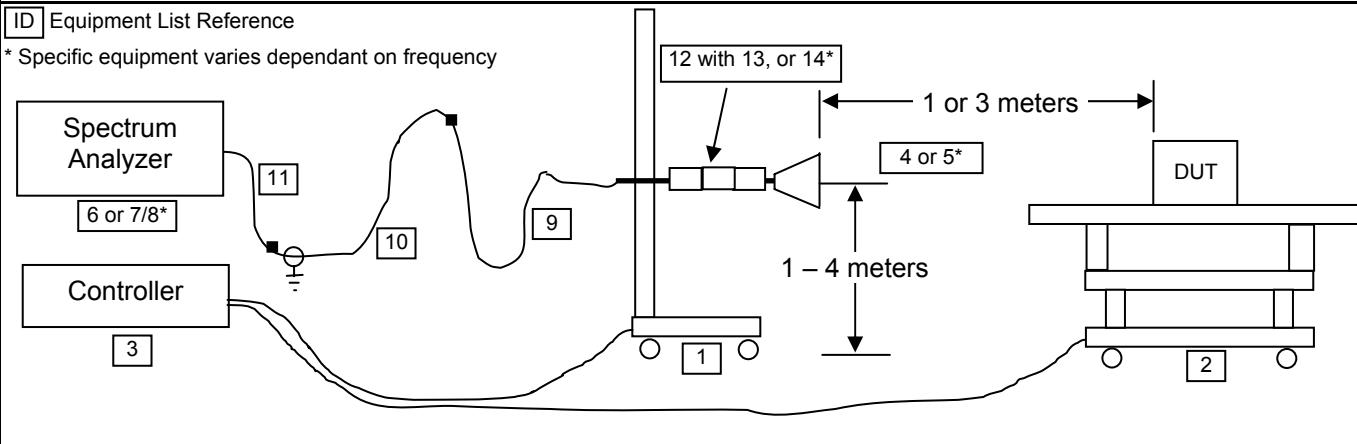


Figure K.6-2 - Signal Substitution Setup Drawing

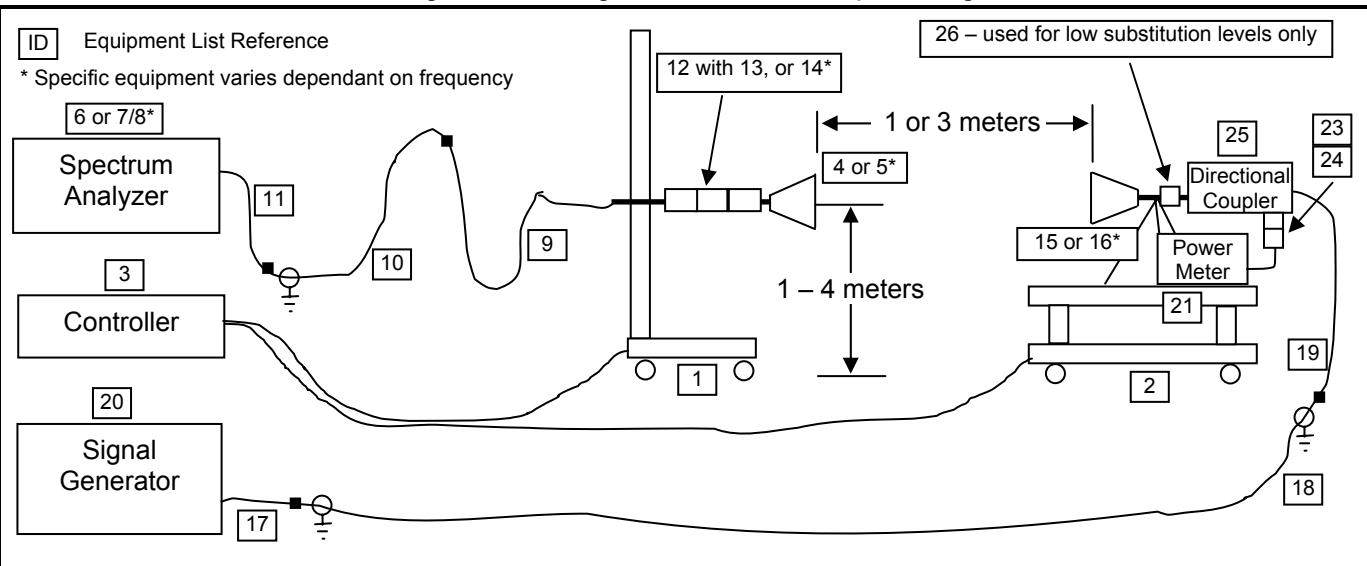

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

### K.7. SETUP PHOTOGRAPHS

Photograph K.7-1 - Vertical Bilog PCS Band Radiated Emissions 3-meter Setup



Photograph K.7-2 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 3-meter Setup



Photograph K.7-3 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 1-meter Setup



### K.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the PCS band at maximum power levels as described in Section 5 of this report. During these measurements, the antenna was replaced with a 50-ohm load. The conducted emissions described in Appendix H supplement the results described in this appendix.

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITRONIX Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 64 of 69       |   |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

## K.9. TEST RESULTS

The spurious measurements detailed in this section are referenced to the carrier levels set forth in Appendix E of this report:

### K.9.1. Spurious Emissions

#### Channel 512

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | EIRP Emission Level | Limit          | Margin | Pass/Fail |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|---------------------|----------------|--------|-----------|
|          |          |                           |                 | MHz       | dBuV/m                   | dBuV                                      | dBm                      | dBi          | dBm                 | dBm or dBuV/m* | dB     |           |
| H        | 3        | Horn SN6267               | CH512           | 2329.00   | 47.90                    | 35.90                                     | -60.52                   | 7.42         | -53.10              | -13.00         | 40.10  | PASS      |
| H        | 3        | none                      | CH512           | 2494.00   | 48.80                    |   |                          |              |                     | 82.2*          | 33.4*  | PASS*     |
| H        | 3        | none                      | CH512           | 3169.75   | 40.55                    |   |                          |              |                     | 82.2*          | 41.7*  | PASS*     |
| H        | 3        | none                      | CH512           | 4762.25   | 44.72                    |   |                          |              |                     | 82.2*          | 37.5*  | PASS*     |
| H        | 3        | none                      | CH512           | 5273.25   | 59.97                    |   |                          |              |                     | 82.2*          | 22.3*  | PASS*     |
| H        | 3        | Horn SN6267               | CH512           | 3700.00   | 56.35                    | 47.20                                     | -57.21                   | 8.06         | -49.15              | -13.00         | 36.15  | PASS      |
| H        | 3        | Horn SN6267               | CH512           | 5549.75   | 47.25                    | 33.50                                     | -68.54                   | 8.66         | -59.88              | -13.00         | 46.88  | PASS      |
| H        | 3        | Horn SN6267               | CH512           | 7399.50   | 57.73                    | 40.10                                     | -52.43                   | 8.98         | -43.45              | -13.00         | 30.45  | PASS      |
| H        | 3        | Horn SN6267               | CH512           | 9251.00   | 56.38                    | 35.40                                     | -48.94                   | 9.05         | -39.89              | -13.00         | 26.89  | PASS      |
| H        | 1        | Horn SN6267               | CH512           | 11101.20  | 72.25                    | 43.80                                     | -43.09                   | 10.44        | -32.65              | -13.00         | 19.65  | PASS      |
| H        | 1        | Horn SN6267               | CH512           | 12951.40  | 68.47                    | 43.00                                     | -39.57                   | 10.65        | -28.92              | -13.00         | 15.92  | PASS      |
| H        | 1        | Horn SN6267               | CH512           | 14801.60  | 73.12                    | 41.10                                     | -51.76                   | 11.06        | -40.70              | -13.00         | 27.70  | PASS      |
| H        | 1        | none                      | CH512           | 18502.00  | 72.35                    |   |                          |              |                     | 91.8*          | 19.4*  | PASS*     |
| V        | 3        | Horn SN6267               | CH512           | 1121.00   | 62.11                    | 32.00                                     | -47.13                   | 4.31         | -42.83              | -13.00         | 29.83  | PASS      |
| V        | 3        | none                      | CH512           | 1132.00   | 67.46                    |   |                          |              |                     | 82.2*          | 14.8*  | PASS*     |
| V        | 3        | none                      | CH512           | 1586.00   | 67.75                    |   |                          |              |                     | 82.2*          | 14.5*  | PASS*     |
| V        | 3        | none                      | CH512           | 2625.00   | 67.95                    |   |                          |              |                     | 82.2*          | 14.3*  | PASS*     |
| V        | 3        | Horn SN6267               | CH512           | 2685.00   | 53.83                    | 40.50                                     | -63.15                   | 7.80         | -55.35              | -13.00         | 42.35  | PASS      |
| V        | 3        | none                      | CH512           | 3169.75   | 39.85                    |   |                          |              |                     | 82.2*          | 42.4*  | PASS*     |
| V        | 3        | none                      | CH512           | 4762.25   | 44.22                    |   |                          |              |                     | 82.2*          | 38.0*  | PASS*     |
| V        | 3        | none                      | CH512           | 9251.00   | 71.58                    |   |                          |              |                     | 82.2*          | 10.6*  | PASS*     |
| V        | 3        | Horn SN6267               | CH512           | 3700.40   | 51.96                    | 42.80                                     | -57.89                   | 8.06         | -49.83              | -13.00         | 36.83  | PASS      |
| V        | 3        | Horn SN6267               | CH512           | 7400.80   | 56.03                    | 38.40                                     | -59.06                   | 8.98         | -50.08              | -13.00         | 37.08  | PASS      |
| V        | 3        | Horn SN6267               | CH512           | 5550.60   | 51.86                    | 38.10                                     | -55.18                   | 8.66         | -46.52              | -13.00         | 33.52  | PASS      |
| V        | 1        | Horn SN6267               | CH512           | 9251.00   | 71.58                    | 50.60                                     | -23.86                   | 9.05         | -14.81              | -13.00         | 1.81   | PASS      |
| V        | 1        | Horn SN6267               | CH512           | 11101.20  | 68.55                    | 40.10                                     | -47.04                   | 10.44        | -36.60              | -13.00         | 23.60  | PASS      |
| V        | 1        | Horn SN6267               | CH512           | 12951.40  | 69.67                    | 44.20                                     | -41.90                   | 10.65        | -31.25              | -13.00         | 18.25  | PASS      |
| V        | 1        | Horn SN6267               | CH512           | 14801.60  | 72.62                    | 40.60                                     | -51.24                   | 11.06        | -40.18              | -13.00         | 27.18  | PASS      |
| V        | 1        | none                      | CH512           | 18502.00  | 70.60                    |   |                          |              |                     | 91.8*          | 21.2*  | PASS*     |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |              |   |
|---|--|---------|-------------------|--------|--------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  | Model:  | IX325-AC775IWL    |        |              |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |              | 65 of 69  |

|                         |                      |               |                   |
|-------------------------|----------------------|---------------|-------------------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue: | Issue 1.0         |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:  | 01Sep05           |
| Test Standard(s):       | FCC §2, §22H, §24E   |               | IC RSS-132/133    |
| Lab Registration(s):    | FCC Lab Reg. #714830 |               | IC Lab File #3874 |

### Channel 661

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | EIRP Emission Level | Limit  | Margin | Pass/Fail |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|---------------------|--------|--------|-----------|
|          |          |                           |                 |           |                          |   |                          |              |                     |        |        |           |
|          | m        |                           |                 |           |                          |   |                          |              |                     |        |        |           |
| H        | 3        | Horn SN6267               | CH661           | 2326.00   | 47.39                    | 35.40                                     | -62.67                   | 7.42         | -55.25              | -13.00 | 42.25  | PASS      |
| H        | 3        | none                      | CH661           | 2629.00   | 52.67                    |   |                          |              |                     | 82.2*  | 29.6*  | PASS*     |
| H        | 3        | Horn SN6267               | CH661           | 3759.96   | 53.36                    | 44.00                                     | -51.00                   | 8.05         | -42.95              | -13.00 | 29.95  | PASS      |
| H        | 3        | Horn SN6267               | CH661           | 5639.89   | 44.22                    | 30.30                                     | -69.40                   | 8.77         | -60.63              | -13.00 | 47.63  | PASS      |
| H        | 3        | Horn SN6267               | CH661           | 7521.20   | 54.52                    | 36.60                                     | -67.08                   | 8.92         | -58.16              | -13.00 | 45.16  | PASS      |
| H        | 3        | Horn SN6267               | CH661           | 9400.16   | 60.46                    | 39.10                                     | -49.10                   | 9.20         | -39.90              | -13.00 | 26.90  | PASS      |
| H        | 3        | none                      | CH661           | 3177.16   | 40.17                    |   |                          |              |                     | 82.2*  | 42.1*  | PASS*     |
| H        | 3        | none                      | CH661           | 4759.48   | 44.91                    |   |                          |              |                     | 82.2*  | 37.3*  | PASS*     |
| H        | 3        | none                      | CH661           | 5269.20   | 68.65                    |   |                          |              |                     | 82.2*  | 13.6*  | PASS*     |
| H        | 1        | Horn SN6267               | CH661           | 11280.00  | 71.81                    | 42.10                                     | -44.51                   | 10.69        | -33.82              | -13.00 | 20.82  | PASS      |
| H        | 1        | Horn SN6267               | CH661           | 13160.00  | 67.39                    | 41.60                                     | -36.27                   | 10.70        | -25.57              | -13.00 | 12.57  | PASS      |
| H        | 1        | Horn SN6267               | CH661           | 15040.00  | 77.55                    | 42.75                                     | -26.48                   | 11.29        | -15.19              | -13.00 | 2.19   | PASS      |
| H        | 1        | Horn SN6267               | CH661           | 16920.00  | 67.95                    | 37.00                                     | -51.33                   | 11.91        | -39.42              | -13.00 | 26.42  | PASS      |
| H        | 1        | 3160-09                   | CH661           | 18800.00  | 72.49                    | 45.45                                     | -45.45                   | 15.42        | -30.03              | -13.00 | 17.03  | PASS      |
| V        | 3        | none                      | CH661           | 2628.00   | 58.26                    |   |                          |              |                     | 82.2*  | 24.0*  | PASS*     |
| V        | 3        | Horn SN6267               | CH661           | 2686.00   | 52.03                    | 38.70                                     | -59.28                   | 7.80         | -51.48              | -13.00 | 38.48  | PASS      |
| V        | 3        | Horn SN6267               | CH661           | 3760.00   | 59.86                    | 50.50                                     | -48.04                   | 8.05         | -39.99              | -13.00 | 26.99  | PASS      |
| V        | 3        | Horn SN6267               | CH661           | 5640.00   | 46.82                    | 32.90                                     | -66.54                   | 8.77         | -57.77              | -13.00 | 44.77  | PASS      |
| V        | 3        | Horn SN6267               | CH661           | 7520.00   | 53.43                    | 35.50                                     | -74.56                   | 8.92         | -65.64              | -13.00 | 52.64  | PASS      |
| V        | 3        | Horn SN6267               | CH661           | 9400.00   | 55.87                    | 34.50                                     | -46.27                   | 9.20         | -37.07              | -13.00 | 24.07  | PASS      |
| V        | 3        | none                      | CH661           | 4319.50   | 48.36                    |   |                          |              |                     | 82.2*  | 33.9*  | PASS*     |
| V        | 3        | none                      | CH661           | 4764.00   | 51.98                    |   |                          |              |                     | 82.2*  | 30.3*  | PASS*     |
| V        | 3        | none                      | CH661           | 5763.25   | 63.00                    |   |                          |              |                     | 82.2*  | 19.2*  | PASS*     |
| V        | 3        | none                      | CH661           | 3171.50   | 52.90                    |   |                          |              |                     | 82.2*  | 29.3*  | PASS*     |
| V        | 1        | Horn SN6267               | CH661           | 11280.00  | 69.51                    | 39.80                                     | -46.86                   | 10.69        | -36.17              | -13.00 | 23.17  | PASS      |
| V        | 1        | Horn SN6267               | CH661           | 13160.00  | 66.29                    | 40.50                                     | -41.90                   | 10.70        | -31.20              | -13.00 | 18.20  | PASS      |
| V        | 1        | Horn SN6267               | CH661           | 15040.00  | 77.25                    | 42.45                                     | -24.97                   | 11.29        | -13.68              | -13.00 | 0.68   | PASS      |
| V        | 1        | Horn SN6267               | CH661           | 16920.00  | 68.05                    | 37.10                                     | -46.93                   | 11.91        | -35.02              | -13.00 | 22.02  | PASS      |
| V        | 1        | 3160-09                   | CH661           | 18800.00  | 72.29                    | 45.25                                     | -45.25                   | 15.42        | -29.83              | -13.00 | 16.83  | PASS      |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) - EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) - Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 66 of 69  |

|                         |                      |               |                   |
|-------------------------|----------------------|---------------|-------------------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue: | Issue 1.0         |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:  | 01Sep05           |
| Test Standard(s):       | FCC §2, §22H, §24E   |               | IC RSS-132/133    |
| Lab Registration(s):    | FCC Lab Reg. #714830 |               | IC Lab File #3874 |

### Channel 810

| Polarity | Distance | Substitution Antenna Type | Carrier Channel | Frequency | Corrected Field Strength | Substituted SA Signal Level (uncorrected) | Power Applied to Antenna | Antenna Gain | EIRP Carrier Level | Limit          | Margin | Pass/Fail |
|----------|----------|---------------------------|-----------------|-----------|--------------------------|---|--------------------------|--------------|--------------------|----------------|--------|-----------|
|          |          |                           |                 |           |                          |   |                          |              |                    |                |        |           |
|          | m        |                           |                 | MHz       | dBuV/m                   | dBuV                                      | dBm                      | dBi          | dBm                | dBm or dBuV/m* | dB     |           |
| H        | 3        | none                      | CH810           | 2899.00   | 58.71                    |   |                          |              |                    | 82.2*          | 23.5*  | PASS*     |
| H        | 3        | Horn SN6267               | CH810           | 2326.00   | 47.79                    | 35.80                                     | -60.62                   | 7.42         | -53.20             | -13.00         | 40.20  | PASS      |
| H        | 3        | Horn SN6267               | CH810           | 3819.60   | 56.11                    | 46.50                                     | -51.75                   | 8.04         | -43.71             | -13.00         | 30.71  | PASS      |
| H        | 3        | Horn SN6267               | CH810           | 5729.40   | 47.40                    | 33.40                                     | -57.87                   | 8.88         | -48.99             | -13.00         | 35.99  | PASS      |
| H        | 3        | Horn SN6267               | CH810           | 7639.20   | 57.16                    | 39.05                                     | -51.16                   | 9.01         | -42.15             | -13.00         | 29.15  | PASS      |
| H        | 3        | Horn SN6267               | CH810           | 9549.00   | 57.50                    | 35.90                                     | -40.28                   | 9.36         | -30.92             | -13.00         | 17.92  | PASS      |
| H        | 3        | none                      | CH810           | 4762.25   | 50.92                    |   |                          |              |                    | 82.2*          | 31.3*  | PASS*     |
| H        | 3        | none                      | CH810           | 5273.25   | 55.37                    |   |                          |              |                    | 82.2*          | 26.9*  | PASS*     |
| H        | 3        | none                      | CH810           | 5768.50   | 53.19                    |   |                          |              |                    | 82.2*          | 29.0*  | PASS*     |
| H        | 1        | Horn SN6267               | CH810           | 11458.80  | 67.37                    | 38.50                                     | -48.18                   | 10.94        | -37.24             | -13.00         | 24.24  | PASS      |
| H        | 1        | Horn SN6267               | CH810           | 13368.60  | 68.90                    | 40.80                                     | -36.81                   | 10.82        | -25.99             | -13.00         | 12.99  | PASS      |
| H        | 1        | Horn SN6267               | CH810           | 15278.40  | 79.49                    | 41.20                                     | -60.73                   | 12.44        | -48.29             | -13.00         | 35.29  | PASS      |
| H        | 1        | Horn SN6267               | CH810           | 17188.20  | 71.91                    | 42.20                                     | -27.56                   | 11.10        | -16.46             | -13.00         | 3.46   | PASS      |
| H        | 1        | 3160-09                   | CH810           | 19098.00  | 72.40                    | 45.35                                     | -45.35                   | 15.56        | -29.79             | -13.00         | 16.79  | PASS      |
| V        | 3        | Horn SN6267               | CH810           | 2629.00   | 47.07                    | 34.00                                     | -64.03                   | 7.80         | -56.23             | -13.00         | 43.23  | PASS      |
| V        | 3        | none                      | CH810           | 2681.00   | 54.61                    |   |                          |              |                    | 82.2*          | 27.6*  | PASS*     |
| V        | 3        | none                      | CH810           | 2738.00   | 48.00                    |   |                          |              |                    | 82.2*          | 34.2*  | PASS*     |
| V        | 3        | Horn SN6267               | CH810           | 3819.60   | 58.96                    | 49.35                                     | -48.71                   | 8.04         | -40.67             | -13.00         | 27.67  | PASS      |
| V        | 3        | Horn SN6267               | CH810           | 5729.40   | 56.10                    | 42.10                                     | -57.04                   | 8.88         | -48.16             | -13.00         | 35.16  | PASS      |
| V        | 3        | Horn SN6267               | CH810           | 7639.20   | 56.66                    | 38.55                                     | -54.02                   | 9.01         | -45.01             | -13.00         | 32.01  | PASS      |
| V        | 3        | Horn SN6267               | CH810           | 9549.00   | 57.20                    | 35.60                                     | -43.16                   | 9.36         | -33.80             | -13.00         | 20.80  | PASS      |
| V        | 3        | none                      | CH810           | 4762.25   | 52.12                    |   |                          |              |                    | 82.2*          | 30.1*  | PASS*     |
| V        | 3        | none                      | CH810           | 5766.75   | 57.83                    |   |                          |              |                    | 82.2*          | 24.4*  | PASS*     |
| V        | 3        | none                      | CH810           | 6342.50   | 57.38                    |   |                          |              |                    | 82.2*          | 24.8*  | PASS*     |
| V        | 1        | Horn SN6267               | CH810           | 11458.80  | 70.82                    | 41.95                                     | -40.80                   | 10.94        | -29.86             | -13.00         | 16.86  | PASS      |
| V        | 1        | Horn SN6267               | CH810           | 13368.60  | 70.75                    | 42.65                                     | -37.02                   | 10.82        | -26.20             | -13.00         | 13.20  | PASS      |
| V        | 1        | Horn SN6267               | CH810           | 15278.40  | 79.59                    | 41.30                                     | -60.62                   | 12.44        | -48.18             | -13.00         | 35.18  | PASS      |
| V        | 1        | Horn SN6267               | CH810           | 17188.20  | 72.41                    | 42.70                                     | -26.19                   | 11.10        | -15.09             | -13.00         | 2.09   | PASS      |
| V        | 1        | 3160-09                   | CH810           | 19098.00  | 72.30                    | 45.25                                     | -45.25                   | 15.56        | -29.69             | -13.00         | 16.69  | PASS      |

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        |                | 67 of 69  |

|                         |                      |                   |           |
|-------------------------|----------------------|-------------------|-----------|
| Test Report Serial No.: | 060605KBC-T645-E24G  | Report Issue:     | Issue 1.0 |
| Test Date(s):           | 24May05 - 27Jun05    | Report Date:      | 01Sep05   |
| Test Standard(s):       | FCC §2, §22H, §24E   | IC RSS-132/133    |           |
| Lab Registration(s):    | FCC Lab Reg. #714830 | IC Lab File #3874 |           |

#### K.10. PASS/FAIL

In reference to the results outlined in K.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 0.68 dB.

#### K.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

|   |  |         |                   |        |                |   |
|---|--|---------|-------------------|--------|----------------|---|
| Applicant:  | ITRONIX Corporation  | FCC ID: | KBCIX325-AC775IWL | IC ID: | 1943A-IX325e   |  |
| Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem |  |         |                   | Model: | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.   | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |         |                   |        | 68 of 69       |   |

|                                |                      |                      |                   |
|--------------------------------|----------------------|----------------------|-------------------|
| <b>Test Report Serial No.:</b> | 060605KBC-T645-E24G  | <b>Report Issue:</b> | Issue 1.0         |
| <b>Test Date(s):</b>           | 24May05 - 27Jun05    | <b>Report Date:</b>  | 01Sep05           |
| <b>Test Standard(s):</b>       | FCC §2, §22H, §24E   |                      | IC RSS-132/133    |
| <b>Lab Registration(s):</b>    | FCC Lab Reg. #714830 |                      | IC Lab File #3874 |

**END OF DOCUMENT**

|  |  |                |                   |               |                |   |
|--|--|----------------|-------------------|---------------|----------------|---|
| <b>Applicant:</b>  | ITronix Corporation  | <b>FCC ID:</b> | KBCIX325-AC775IWL | <b>IC ID:</b> | 1943A-IX325e   |  |
| <b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b> |  |                |                   | <b>Model:</b> | IX325-AC775IWL |   |
| 2005 Celltech Labs Inc.  | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                |                   |               | 69 of 69       |   |