



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## EMC TEST REPORT

FOR

**ITRONIX CORPORATION**  
**MODEL: IX325A775IWLBT**  
**RUGGED TABLET PC**

INCLUDING

**DUAL-BAND GSM GPRS/EDGE PCMCIA MODEM**  
WITH  
**EXTERNAL MONOPOLE ANTENNA**

**FCC ID: KBCIX325A775IWLBT**

**IC: 1943A-IX325e**

Test Report Serial Number

**060605KBC-T646-E24G**  
**Revision 0**

Test Report Issue Date

**December 07, 2005**

Test Lab

**Celltech Compliance Testing & Engineering Lab**  
**(Celltech Labs Inc.)**  
**1955 Moss Court**  
**Kelowna, BC**  
**Canada**  
**V1Y 9L3**



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## DECLARATION OF COMPLIANCE

<u>Test Lab</u>	<b>CELLTECH LABS INC.</b> Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3		<u>Applicant Information</u>		<b>ITRONIX CORPORATION</b> 801 South Stevens Street Spokane, WA 99204 United States
Phone:	250-448-7047				
Fax:	250-448-7048				
e-mail:	info@celltechlabs.com				
web site:	www.celltechlabs.com				
<u>Laboratory Registration No.(s):</u>	FCC:	714830	IC:	IC 3874	
<u>Rule Part(s):</u>	FCC:	Dual Band GSM	§2; §22H; §24E		
	IC:	Dual Band GSM	RSS-133 Issue 3, RSS-132 Issue 1 (Provisional)		
<u>Device Classification:</u>	FCC:	Dual Band GSM	- PCS Licensed Transmitter (PCB)		
	IC:	Dual Band GSM	- 800 MHz Cellular Telephones Employing New Technologies - 2 GHz Personal Communication Services		
<u>Device Identification:</u>	FCC ID:	KBCIX325A775IWLBT	IC:	1943A-IX325e	
<u>DUT Description:</u>					
Model:	IX325A775IWLBT				
Device Description:	Rugged Tablet PC				
Internal Transmitter:	Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem				
Antenna(s) Tested:	Dual Band GSM	Sierra Wireless Monopole Antenna			
<u>Tx Frequency Range(s):</u>	Dual Band GSM	Cellular	824.2 - 848.8 MHz		
		PCS	1850.2 - 1909.8 MHz		
<u>Max. RF Output Power Measured:</u>	Dual Band GSM	Cellular	Conducted	1.56 Watts	31.92 dBm
			ERP	1.00 Watts	30.01 dBm
		PCS	Conducted	0.832 Watts	29.20 dBm
			EIRP	1.26 Watts	31.02 dBm
<u>Modulation Type(s):</u>	Dual Band GSM	GMSK (GPRS), 8-PSK (EDGE)			
<u>Power Source(s) Tested:</u>	Stationary: 75 Watt AC Power Adapter (Model: ADP-75FB B)				
	Portable: 11.1V Lithium-ion Battery, 3.6Ah (Model: A2121-2)				

This wireless device has demonstrated compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Parts 2, 22H, 24E, Industry Canada RSS-132 Issue 1 (Provisional), RSS 133 Issue 3; and ANSI TIA/EIA-603-C-2004.

I attest to the accuracy of the data. All measurements reported herein were performed by me or were under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested by:

Reviewed by:

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

Duane M. Friesen  
EMC Manager  
Celltech Labs Inc.



Applicant:	ITronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 2 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## TABLE OF CONTENTS

<b>1.0 SCOPE .....</b>	<b>6</b>
<b>2.0 REFERENCES .....</b>	<b>6</b>
<b>2.1 Normative References .....</b>	<b>6</b>
<b>3.0 TERMS AND DEFINITIONS .....</b>	<b>7</b>
<b>4.0 FACILITIES AND ACCREDITATIONS.....</b>	<b>8</b>
<b>5.0 GENERAL INFORMATION.....</b>	<b>8</b>
<b>5.1 Applicant Information .....</b>	<b>8</b>
<b>5.2 DUT Description.....</b>	<b>8</b>
<b>5.3 Co-Located Equipment .....</b>	<b>9</b>
<b>5.4 Cable Descriptions.....</b>	<b>9</b>
<b>5.5 Support Equipment .....</b>	<b>10</b>
<b>5.6 Clock Frequencies .....</b>	<b>10</b>
<b>5.7 Mode(s) of Operation Tested .....</b>	<b>11</b>
<b>5.8 Configuration Description.....</b>	<b>11</b>
<b>6.0 PASS/FAIL CRITERIA .....</b>	<b>12</b>
<b>APPENDICES.....</b>	<b>13</b>
<b>Appendix A - Photographs .....</b>	<b>14</b>
<b>Appendix B - Cellular Band Conducted TX RF Output Power Measurement.....</b>	<b>15</b>
<b>Appendix C - Cellular Band Conducted TX Spurious Emissions Measurement.....</b>	<b>18</b>
<b>Appendix D - Cellular Band Conducted RX Spurious Emissions Measurement .....</b>	<b>25</b>
<b>Appendix E - Cellular Band Effective Radiated Power Measurement.....</b>	<b>29</b>
<b>Appendix F - Cellular Band Radiated TX Spurious Emissions Measurement.....</b>	<b>33</b>
<b>Appendix G - PCS Band Conducted TX RF Output Power Measurement.....</b>	<b>41</b>
<b>Appendix H - PCS Band Conducted TX Spurious Emissions Measurement .....</b>	<b>44</b>
<b>Appendix I - PCS Band Conducted RX Spurious Emissions Measurement.....</b>	<b>52</b>
<b>Appendix J - PCS Band Effective Isotropic Radiated Power Measurement.....</b>	<b>57</b>
<b>Appendix K - PCS Band Radiated TX Spurious Emissions Measurement.....</b>	<b>61</b>
<b>END OF DOCUMENT .....</b>	<b>69</b>



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## FIGURES

Figure B.6-1 - Setup Drawing .....	16
Figure C.6-1 - Setup Drawing .....	19
Figure D.6-1 - Setup Drawing .....	26
Figure E.6-1 - Field Strength Setup Drawing .....	30
Figure E.6-2 - Signal Substitution Setup Drawing .....	30
Figure F.6-1 - Field Strength Setup Drawing .....	35
Figure F.6-2 - Signal Substitution Setup Drawing .....	35
Figure G.6-1 - Setup Drawing .....	42
Figure H.6-1 - Setup Drawing .....	45
Figure I.6-1 - Setup Drawing .....	53
Figure J.6-1 - Field Strength Setup Drawing .....	58
Figure J.6-2 - Substitution Setup Drawing .....	58
Figure K.6-1 - Field Strength Setup Drawing .....	63
Figure K.6-2 - Signal Substitution Setup Drawing .....	63

## PHOTOGRAPHS

Photograph A.1-1 - Tablet PC in the worst-case Cellular Configuration .....	14
Photograph A.1-2 - Tablet PC in the worst-case PCS Configuration .....	14
Photograph A.1-3 - AirCard 775 PCMCIA Modem Card .....	14
Photograph A.1-4 - AirCard 775 Monopole Antenna .....	14
Photograph E.7-1 - DUT in Highest Cellular Carrier Configuration .....	31
Photograph F.7-1 - Horizontal Bilog Cellular Radiated Emissions Setup .....	36
Photograph F.7-2 - Vertical 3115 Horn and LNA Cellular Radiated Emissions Setup .....	36
Photograph J.7-1 - DUT in Highest PCS Carrier Configuration .....	59
Photograph K.7-1 - Vertical Bilog PCS Band Radiated Emissions 3-meter Setup .....	64
Photograph K.7-2 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 3-meter Setup .....	64
Photograph K.7-3 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 1-meter Setup .....	64

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 4 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg #714830	Industry Canada Lab File #3874	

## TEST SUMMARY

Referenced Standard: FCC CFR Title 47 Part 2, 22H

<u>Appendix</u>	<u>Test Description</u>	<u>Procedure Reference</u>	<u>Limit Reference</u>	<u>Test Start Date</u>	<u>Test End Date</u>	<u>Result</u>
B	Conducted RF Output Power	§2.1046	§2.1046	24May05	24May05	Pass
C	Conducted TX Spurious Emissions	§22.917(b)	§22.917(a)	25May05	25May05	Pass
E	Effective Radiated Power	ANSI/TIA/EIA-603-C	§22.913	26May05	26May05	Pass
F	Radiated TX Spurious Emissions	ANSI/TIA/EIA-603-C	§22.917 (e)	1Jun05	27Jun05	Pass

Referenced Standard: FCC CFR Title 47 Part 2, 24E

G	Conducted RF Output Power	§2.1046	§2.1046	24May05	24May05	Pass
H	Conducted TX Spurious Emissions	§24.238(b)	§24.238(a)	25May05	25May05	Pass
J	Effective Isotropic Radiated Power	ANSI/TIA/EIA-603-C	§24.232(b)	26May05	26May05	Pass
K	Radiated TX Spurious Emissions	ANSI/TIA/EIA-603-C	§24.238 (a)	1Jun05	27Jun05	Pass

Referenced Standard: IC RSS-132 Issue 1

B	Conducted RF Output Power	FCC CFR 47 §2.1046	§6.4	24May05	24May05	Pass
C	Conducted TX Spurious Emissions	FCC CFR 47 §22.917 (b)	§6.5	25May05	25May05	Pass
D	Conducted RX Spurious Emissions	§4.6	§6.6	26May05	26May05	Pass
E	Effective Radiated Power	ANSI/TIA/EIA-603-C	§6.4	26May05	26May05	Pass
F	Radiated TX Spurious Emissions	§4.6	§6.5	1Jun05	27Jun05	Pass

Referenced Standard: IC RSS-133 Issue 3


Test Standard: FCC ID Test Results						
Test ID	Test Description	Test Standard	Test Result	Test Date	Review Date	Pass/Fail
G	Conducted RF Output Power	ANSI/TIA/EIA-603-C	\$6.4	24May05	24May05	Pass
H	Conducted TX Spurious Emissions	FCC CFR 47 §24.238(b)	\$6.5	25May05	25May05	Pass
I	Conducted RX Spurious Emissions	\$4.5	\$6.7 (b)	26May05	26May05	Pass
J	Effective Isotropic Radiated Power	ANSI/TIA/EIA-603-C	\$6.4	26May05	26May05	Pass
K	Radiated TX Spurious Emissions	ANSI/TIA/EIA-603-C	\$6.5	1Jun05	27Jun05	Pass

## REVISION LOG

Issue	Description	Implemented By	Implementation Date
1.0	Initial Release	Jon Hughes	07Dec05

## SIGNATORIES

Prepared By:		Dec. 07, 2005
Name/Title	Duane M. Friesen, C.E.T. / EMC Manager	Date
Approved By:		Dec. 07, 2005
Name/Title	Jonathan Hughes / General Manager	Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLB	IC ID:	1943A-IX325e	 <b>ITRONIX</b>
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLB	
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 5 of 69	



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## **1.0 SCOPE**

This report outlines the measurements made and results collected during electromagnetic emissions testing of the Itronix Corporation Model: IX325A775IWLBT Rugged Tablet PC with the internal Sierra Wireless AirCard 775 Dual-Band GSM GPRS/EDGE PCMCIA Modem. The AirCard 775 Modem was connected to a bendable external monopole antenna attached to the end of the PCMCIA Card. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communications Commission Code of Federal Regulations Title 47 Parts 2, 22 Subpart H, and 24 Subpart E; and Industry Canada Radio Standards Specifications RSS-132 Issue 1 (Provisional), and RSS-133 Issue 3.

## **2.0 REFERENCES**

### **2.1 Normative References**

ANSI/ISO 17025:1999	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4:2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IEEE/ANSI Std C95.1:1999	American National Standard Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields
ANSI/TIA/EIA-603-C:2004	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
FCC CFR Title 47:2004	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations Part 22: Public Mobile Services Part 24: Personal Communication Services
IC Spectrum Management & Telecommunications Policy	Radio Standards Specification RSS-102 Issue 1 (Provisional) - Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields RSS-132 Issue 1 (Provisional) - 800 MHz Cellular Telephones Employing New Technologies RSS-133 Issue 3 - 2 GHz Personal Communication Services

<b>Applicant:</b>	ITRONIX CORPORATION	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 6 of 69					



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### **3.0 TERMS AND DEFINITIONS**

AV	Average
CDMA	Code Division Multiple Access
CFR	Code of Federal Regulations
dB	decibel
dBm	dB referenced to 1 mW
dBuV	dB referenced to 1 uV
DUT	Device under Test
dBc	dB down from carrier
EBW	Emission Bandwidth
EIRP	Effective Isotropic Radiated Power
EDGE	Enhanced Data Rates for GSM Evolution
EMC	Electromagnetic Compatibility
ERP	Effective Radiated Power
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
GSM	Global Systems for a Mobility Communication
GPRS	General Packet Radio Service
HP	Hewlett Packard
HPF	High Pass Filter
Hpol	Horizontal Polarization
Hz	Hertz
IC	Industry Canada
kHz	kilohertz
LNA	Low Noise Amplifier
m	meter
MHz	Megahertz
Mbps	megabits per second
na	not applicable
n/a	not available
PK	Peak
PPSD	Peak Power Spectral Density
QP	Quasi-peak
RBW	Resolution Bandwidth
R&S	Rohde & Schwarz
RSS	Radio Standard Specification
SA	Spectrum Analyzer
VBW	Video Bandwidth
Vpol	Vertical Polarization
WLAN	Wireless Local Area Network

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 7 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## 4.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 1955 Moss Court, Kelowna, British Columbia, Canada, V1Y 9L3. The radiated and conducted emissions sites conform with the requirements set forth in ANSI C63.4 and are filed and listed with the FCC under Registration Number 714830 and Industry Canada under File Number IC 3874.

## 5.0 GENERAL INFORMATION

### 5.1 Applicant Information

<b>Company Name:</b>	ITRONIX CORPORATION
<b>Address:</b>	801 South Stevens Street
	Spokane, WA 99204
	United States

### 5.2 DUT Description

The DUT consisted of the IX325A775IWLBT Rugged Tablet PC containing a Sierra Wireless AirCard 775 Dual-Band GSM PCMCIA Modem connected to an attached external monopole antenna. Photographs of the DUT placement and construction are shown in Appendix A.

<b>Device:</b>	Rugged Tablet PC			
<b>Model:</b>	IX325A775IWLBT			
<b>Serial Number(s):</b>	ZZGEG5073ZZ9782			
<b>Identifier(s):</b>	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e
<b>Power Source(s):</b>	Stationary: 75 Watt AC Power Adapter (Model: ADP-75FB B) Portable: 11.1V Lithium-ion Battery, 3.6Ah (Model: A2121-2)			

<b>Device:</b>	Dual-Band PCS/Cellular GSM PCMCIA Modem			
<b>Model:</b>	Sierra Wireless AirCard 775			
<b>Serial Number:</b>	X04122800475010			
<b>Rule Part(s):</b>	FCC:	\$22.913; \$22.917; \$24.232; \$24.238		
	IC:	RSS-132 Issue 1 (Provisional); RSS-133 Issue 3		
<b>Classification(s):</b>	FCC:	PCS Licensed Transmitter (PCB)		
	IC:	800 MHz Cellular Telephones employing New Technologies (RSS-132) 2 GHz Personal Communication Services (RSS-133)		
<b>Power Source:</b>	Powered from the internal PC power supply			

<b>Applicant:</b>	ITRONIX CORPORATION	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 8 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

<b>Device:</b>	External Monopole Antenna
<b>Model:</b>	Sierra Wireless AirCard 775 Antenna

## 5.3 Co-Located Equipment

<b>Name:</b>	GPS Receiver Module with attached Antenna (Receive only)
<b>Model:</b>	Leadtek Model LR9805

<b>Device:</b>	GPS Antenna
<b>Model:</b>	Sarantel 101401040/2004UK

## 5.4 Cable Descriptions

ROUTING		Length	Model	Terminations		Shield Type	Shield Termination		Suppression
From	To	m		End 1	End 2		End 1	End 2	
PC modem port	Unterminated	1.0	n/a	RJ-11	RJ-11	None	na	na	None
PC Ethernet Port	Ethernet Hub	1.0	n/a	RJ-45	RJ-45	None	na	na	None



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## 5.5 Support Equipment

The following equipment was used in support of the DUT.

Co-located Support Equipment List		
Manufacturer	Model	Description
D-Link	DE-809TC/	Ethernet hub
YNG YUH	YP-040	Hub power supply
MLi	699	Speakers
Polk Audio	n/a	Speaker-microphone
	K8255	Keyboard
Sanwa Supply	MA-MBUSB	Mouse

## 5.6 Clock Frequencies

### 5.6.1 DUT Clock Frequencies

<b>Device:</b>	Rugged Tablet PC
<b>Clocks:</b>	n/a
<b>Device:</b>	Dual-Band PCS/Cellular GSM PCMCIA Modem
<b>Clocks:</b>	n/a
<b>Device:</b>	Monopole Antenna
<b>Clocks:</b>	None

### 5.6.2 Co-Located Clock Frequencies

<b>Device:</b>	Peripherals
<b>Clocks:</b>	n/a

<b>Applicant:</b>	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 10 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## 5.7 Mode(s) of Operation Tested

### 5.7.1 Dual-Band GSM Modem

Customer supplied software was used to set the AirCard 775 modem to the appropriate channel and power level for the specific measurement. Measurements were made with the modem set to the low, mid and high channel in each band or on a worst-case channel for the measurement, as determined by prescan evaluations. The following settings were used for each channel.

#### 5.7.1.1 Cellular GSM

<b>TX Frequency Range:</b>	824.2 - 848.8 MHz Ch. 128 (824.2 MHz) (low), Ch. 190 (836.6 MHz) (mid) & Ch. 251 (848.8 MHz) (high) measured unless otherwise noted
<b>Software Power Gain Settings:</b>	The supplied software set the power for maximum rated output power.
<b>Modulation Type(s):</b>	GMSK, 8-PSK

#### 5.7.1.2 PCS GSM

<b>TX Frequency Range:</b>	1850.2 - 1909.8 MHz Ch. 512 (1850.2 MHz) (low), Ch 661 (1880 MHz) (mid) & Ch. 810 (1909.8 MHz) (high) measured unless otherwise noted
<b>Software Power Gain Settings:</b>	The supplied software set the power for maximum rated output power.
<b>Modulation Type(s):</b>	GMSK, 8-PSK

### 5.7.2 DUT Exercising Software Description

The DUT was configured and exercised during testing using customer supplied test software. Once the channel number was entered, the software enabled the card to transmit at the maximum power level for the set frequency.

## 5.8 Configuration Description

The DUT was configured, as described by the client, as being representative of a production unit that would be delivered to a final customer. Because the Tablet PC orientation can be user configured (0 degrees landscape and -90 degrees portrait only), prescan evaluations were made to determine the configuration that resulted in the highest emissions. This prescan evaluation indicated that carrier field strengths were maximized during cellular operation with the DUT placed flat, with the LCD facing up and the monopole antenna positioned parallel with the ground plane. Maximized carrier field strengths during PCS operation occurred with the DUT oriented with the "power port" edge facing up and the monopole antenna position parallel with the ground plane. During the radiated spurious emissions testing, the antenna was replaced with a 50-ohm termination and the DUT placed in the orientation as described above. More specific details may be included in each appendix.

### 5.8.1 Configuration Justification

The DUT was tested in a configuration determined to emanate the maximum emission and described by the client as being typical of normal use.

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 11 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## **6.0 PASS/FAIL CRITERIA**

Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. A DUT is considered to have passed the requirements, if the data collected during the described measurement procedure is within the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 12 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## APPENDICES

<b>Applicant:</b>	ITronix Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 13 of 69

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix A - Photographs

### A.1. DUT PHOTOGRAPHS

Photograph A.1-1 - Tablet PC in the worst-case Cellular Configuration



Photograph A.1-3 - AirCard 775 PCMCIA Modem Card



Photograph A.1-2 - Tablet PC in the worst-case PCS Configuration



Photograph A.1-4 - AirCard 775 Monopole Antenna



<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 14 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix B - Cellular Band Conducted TX RF Output Power Measurement

### B.1. REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §2.1046
<b>Procedure Reference</b>	FCC CFR 47 §2.1046

### B.2. LIMITS

FCC CFR 47 §2.1046 (a)	For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedures to give the values of current and voltage on the circuit elements specified in §2.1033(c) (8).
------------------------	--

\*ERP limits are specified in Appendix E.

### B.3. ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	25 +/- 2 °C
<b>Humidity</b>	35 +/- 4 %
<b>Barometric Pressure</b>	96 kPa

### B.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
00102	Pasternack	PE7014-30	30dB attenuator	na	na*
na	ITronix	na	Cable & SMA adapter	na	na*

\*Cable and attenuator verified with power meter prior to use

Applicant:	ITronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 15 of 69




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## B.5. MEASUREMENT EQUIPMENT SETUP

<b>Measurement Equipment Connections</b>	The equipment was connected as shown in the setup drawing in B.6.
<b>Measurement Equipment Settings</b>	Power Meter Settings: Mode - BAP Frequency compensation set for carrier frequency Offset set appropriately to compensate for any attenuator or cable losses
<b>Measurement Procedure</b>	The RF conducted output power levels were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in burst average power (BAP) mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the output port and the power sensor input. The DUT test software was used to set it to transmit in the maximum power control mode defined by the manufacturer.

## B.6. SETUP DRAWING

Figure B.6-1 - Setup Drawing

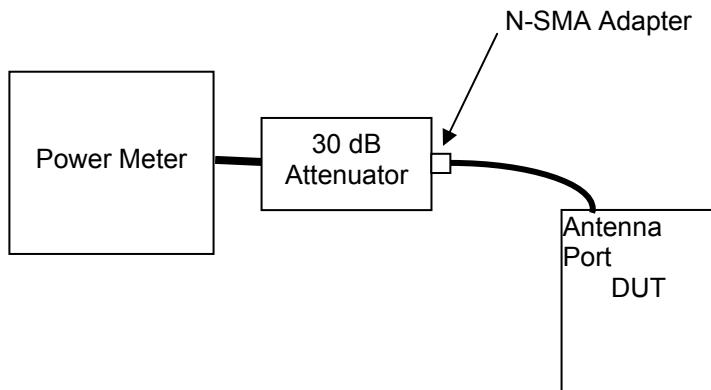

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 16 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### B.7. DUT OPERATING DESCRIPTION

Power measurements were made for each of the three Cellular test channels (Channel 128, 190 & 251), with the AirCard 775 modem set appropriately as described in section 5.7.

### B.8. TEST RESULTS

Mode	Channel	Frequency	Conducted Power	
Cellular GSM	128	824.20 MHz	+31.64 dBm	1.46 Watts
	190	836.60 MHz	+31.80 dBm	1.51 Watts
	251	848.80 MHz	+31.92 dBm	1.56 Watts

### B.9. PASS/FAIL

There is no pass/fail criterion for this measurement. The ERP values, applied to appropriate regulatory requirements are outlined in Appendix E.

### B.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

24May05  
Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 17 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix C - Cellular Band Conducted TX Spurious Emissions Measurement

### C.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §22.917(a)
Procedure Reference	FCC CFR 47 §22.917(b)

### C.2. LIMITS

FCC CFR 47 §22.917	(a) <i>Out of Band Emissions.</i> The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: at least $43 + 10 \log P$ dB
--------------------	---

### C.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### C.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00015	Agilent	E4408B	Spectrum Analyzer	24Jan05	24Jan06
2	00102	Pasternack	PE7015-3030	30dB attenuator	na	na*
3	na	Itronix	na	Cable & SMA adapter	na	na*

\*Verified with VNA

### C.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in C.6.				
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:				
	Frequency Range	RBW	VBW	Offset	Detector
	MHz	kHz	kHz	dB	
	Between Block edge and 1 MHz from Block edges	3 *	3 *	-31.0	Peak
	Beyond 1MHz from Block edges	1000*	1000*		


\*Specified BW of 1% of EBW within Block and 1 MHz of each edge &  $\geq$  100 kHz beyond 1 MHz of the block edge.

Applicant:	Itronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.
						Page 18 of 69

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### C.6. SETUP DRAWING

Figure C.6-1 - Setup Drawing

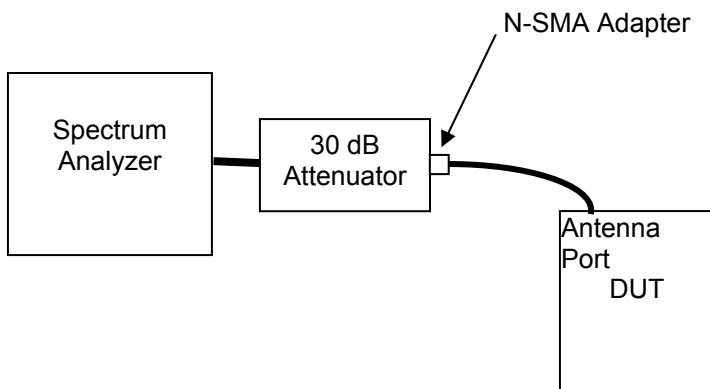

#### C.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT transmitting at maximum power in the cellular band, in a configuration as described in Section 5 of this report. The Block edge measurements were made with the DUT transmitting on the channel closest to the edge under investigation (CH128 & CH251). The remaining spurious measurements were made on each of the three channels, Low (CH128), mid (CH190) and High (CH251).




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## C.8. TEST RESULTS

The spurious measurements detailed in this section are referenced to the conducted carriers levels outlined in Appendix B of this report:

### C.8.1. Spurious Emissions within 1MHz of Block Edge

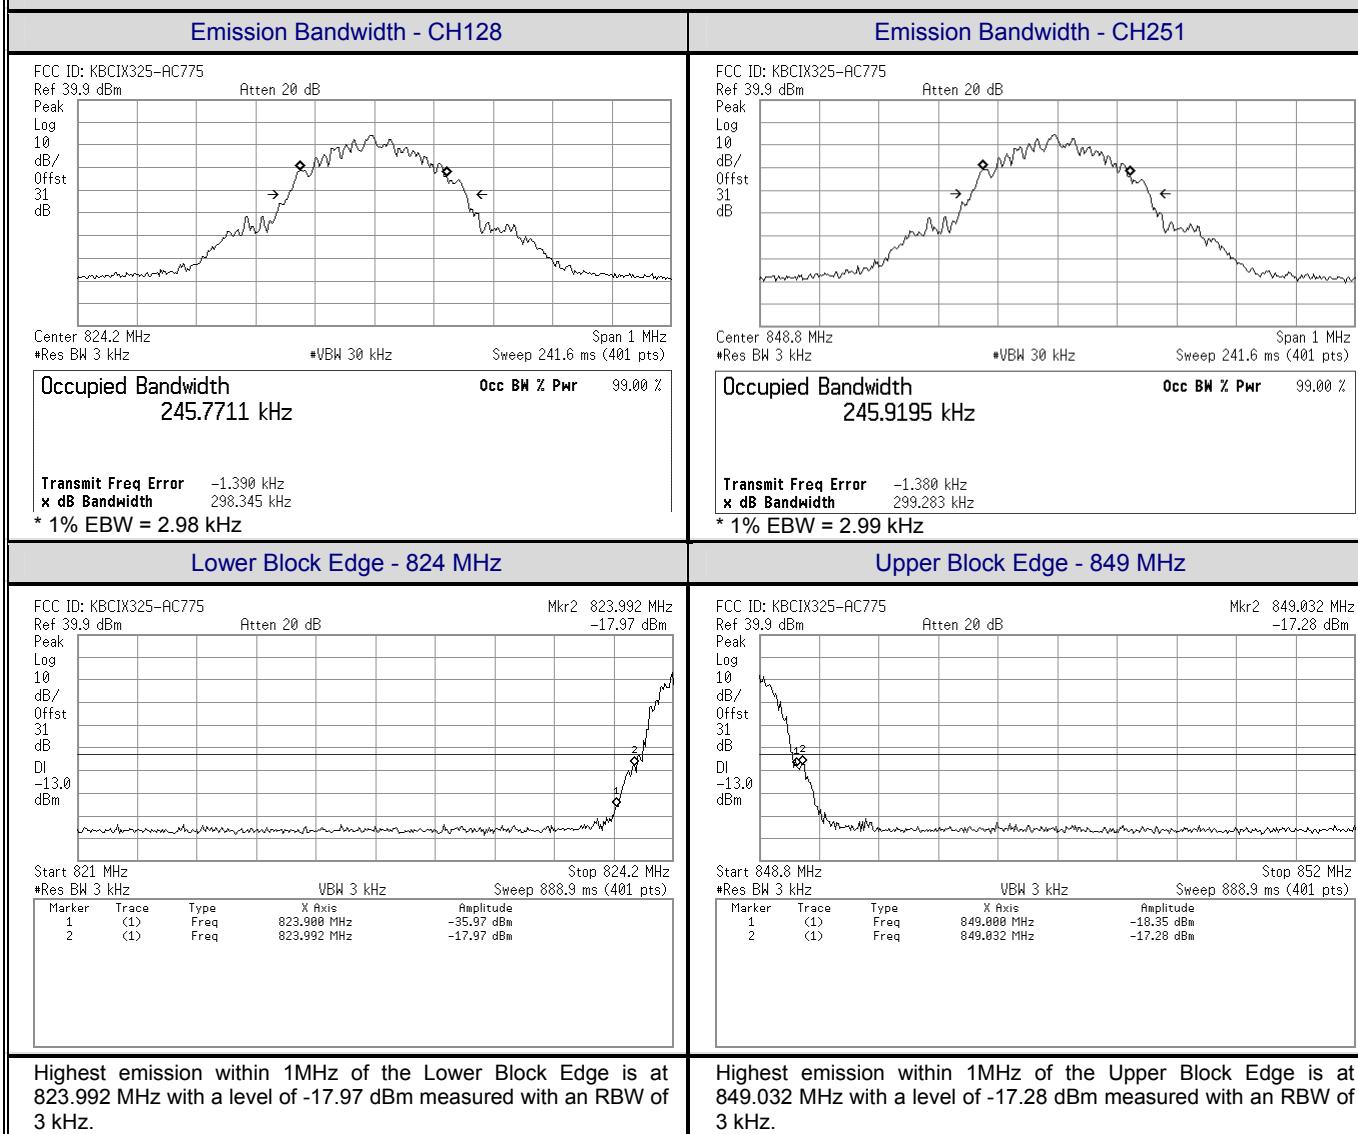





<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 20 of 69					



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### C.8.2. Spurious Emissions removed by more than 1MHz from Block Edge


## Channel 128

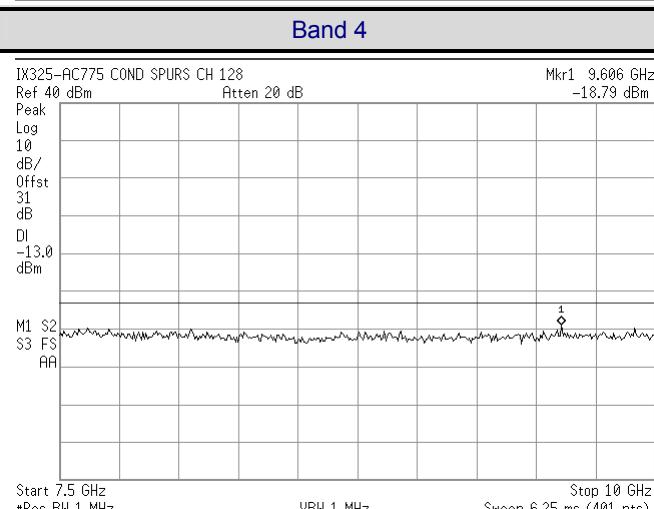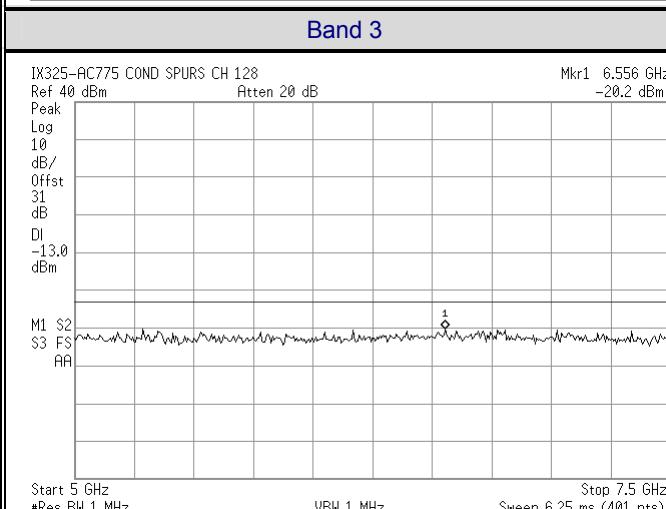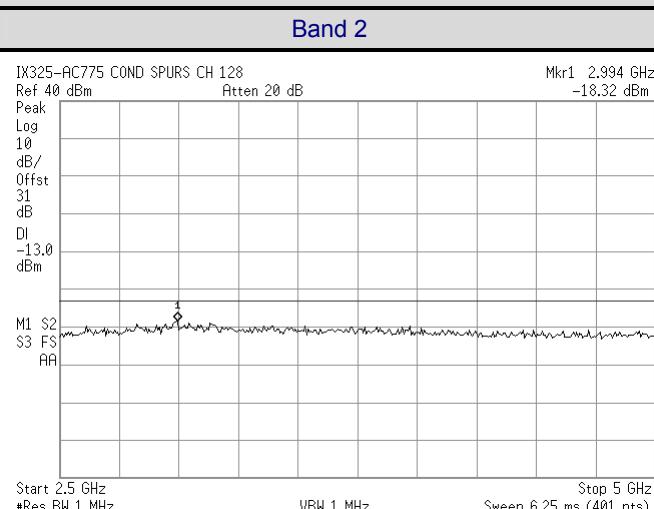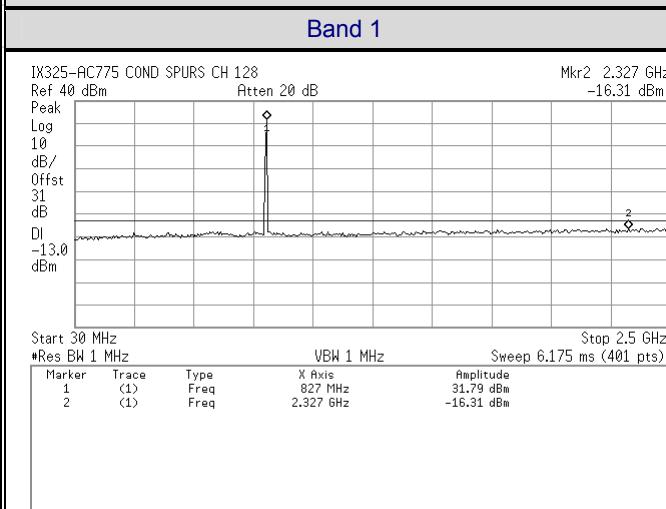

Highest emission removed by more than 1MHz from the Lower Block Edge with Channel 128 transmitting is at 2327 MHz with a peak level of -16.31 dBm measured with an RBW of 1 MHz




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

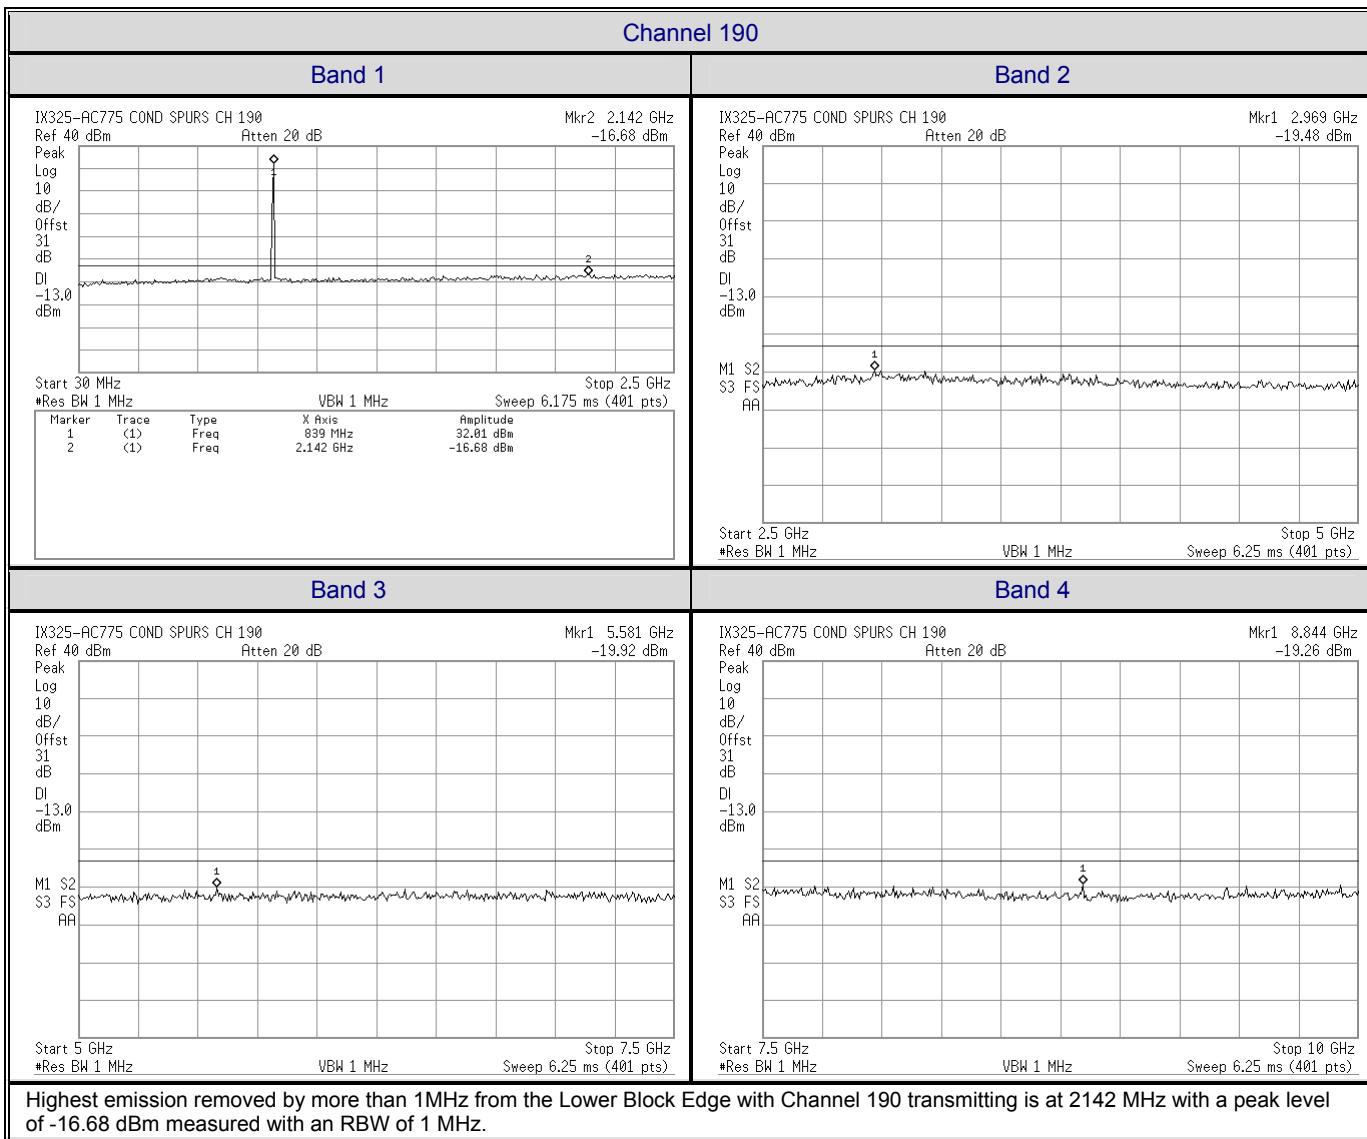

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 22 of 69					



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

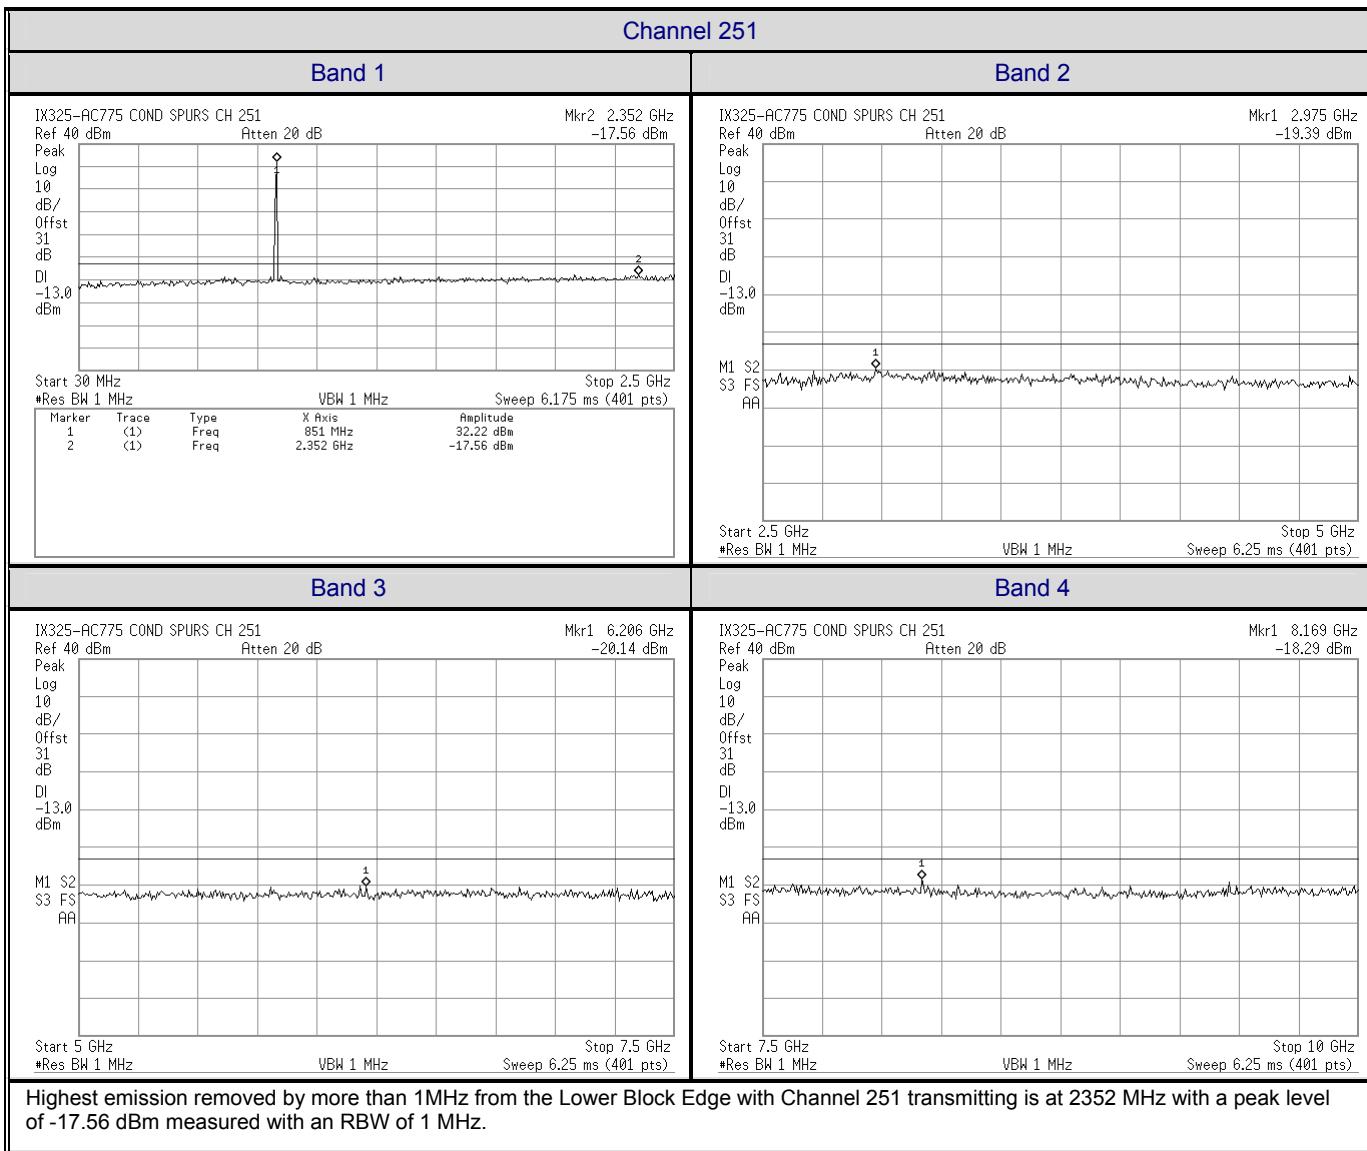

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem					Model:	



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### C.9. PASS/FAIL

In reference to the results outlined in C.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §22.217 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 3.31 dB  
(-16.31 dBm @ 2327 MHz vs a limit of -13 dBm)

#### C.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

25May05

Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix D - Cellular Band Conducted RX Spurious Emissions Measurement

### D.1. REFERENCES

Normative Reference Standard	IC RSS-132 §6.6 (b)
Procedure Reference	IC RSS-132 §4.6

### D.2. LIMITS

IC RSS-132 §6.6	(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4 kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz.
-----------------	---

### D.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### D.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00015	Agilent	E4408B	Spectrum Analyzer	24Jan05	24Jan06
2	na	Itronix	na	Cable & SMA adapter	na	na*

\*Verified with VNA

### D.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in D.6.			
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:			
Frequency Range	RBW	VBW	Detector	
	kHz	kHz		
	30 MHz - 3 x F <sub>c</sub>	4*		


Note: 4 kHz RBW & VBW are not attainable with equipment used and 3 kHz will be used. A bandwidth correction factor of 10 \* log (4 kHz / 3 kHz), (1.25 dB) will be added to the final results.

Applicant:	Itronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 25 of 69

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### D.6. SETUP DRAWING

Figure D.6-1 - Setup Drawing

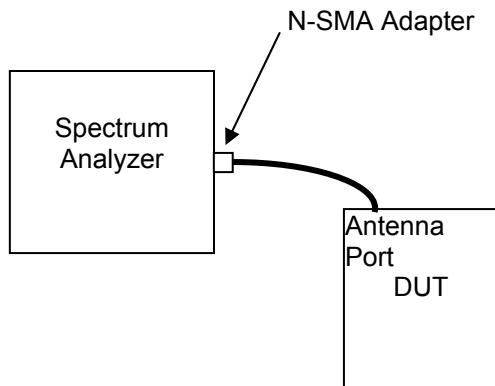

#### D.7. DUT OPERATING DESCRIPTION


Measurements were made with the DUT in receive mode for the cellular mid channel (CH190 836.6 MHz)



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## D.8. TEST RESULTS

### D.8.1. Receiver Spurious Emissions

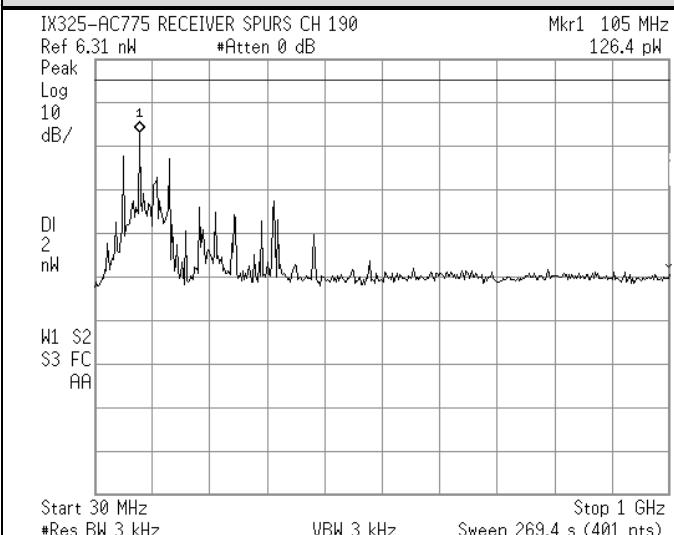

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$


In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 126.4 pW with RBW of 3 kHz:

$$\begin{aligned} \text{Corrected Peak Emission} &= 126.4 \text{ pW} * \frac{4}{3} \\ &= 168.5 \text{ pW for RBW of 4 kHz} \\ &= 0.1685 \text{ nW} \end{aligned}$$

$$\begin{aligned} \text{Margin (nW)} &= 2 \text{ nW} - 0.1685 \text{ nW} \\ &= 1.83 \text{ nW} \end{aligned}$$

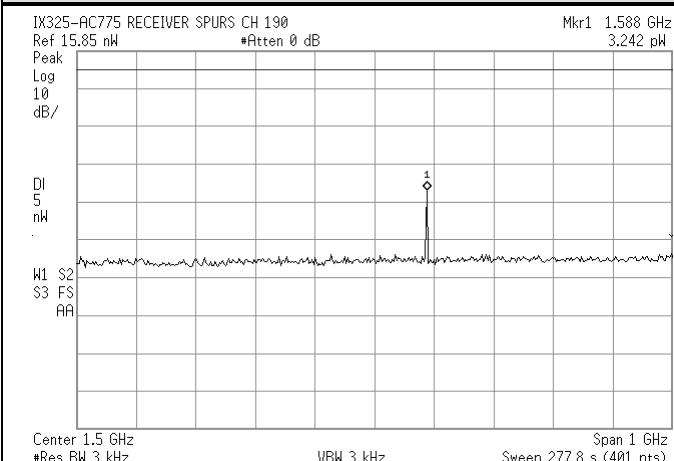

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$


In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 3.242 pW with RBW of 3 kHz:

$$\begin{aligned} \text{Corrected Peak Emission} &= 3.242 \text{ pW} * \frac{4}{3} \\ &= 4.323 \text{ pW for RBW of 4 kHz} \\ &= 0.00432 \text{ nW} \end{aligned}$$

$$\begin{aligned} \text{Margin (nW)} &= 5 \text{ nW} - 0.00432 \text{ nW} \\ &= 4.996 \text{ nW} \end{aligned}$$

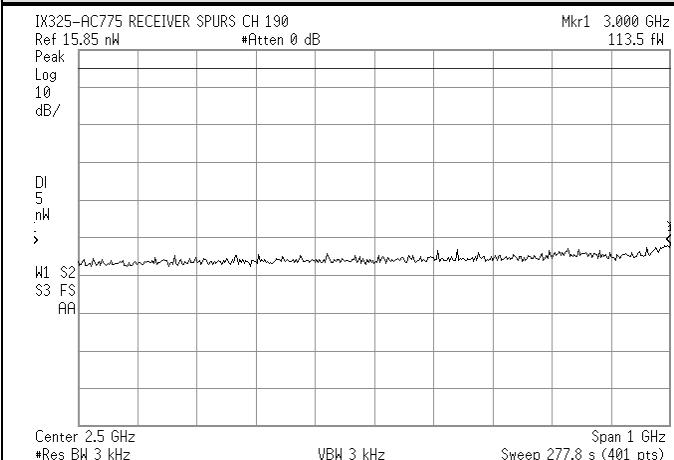

#### Calculations

Emission (dBm) =  $10 * \log (\text{Emission (mW)})$   
BW Correction =  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$

In linear terms:

Emission (pW) = Emission (pW) \*  $(4 \text{ kHz} / 3 \text{ kHz})$

For a Peak Emission of 113.5 fW with RBW of 3 kHz:

$$\begin{aligned} \text{Corrected Peak Emission} &= 113.5 \text{ fW} * \frac{4}{3} \\ &= 151 \text{ fW for RBW of 4 kHz} \\ &= 0.00015 \text{ nW} \end{aligned}$$

$$\begin{aligned} \text{Margin (nW)} &= 5 \text{ nW} - 0.00015 \text{ nW} \\ &= 4.9998 \text{ nW} \end{aligned}$$

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 27 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### D.9. PASS/FAIL

In reference to the results outlined in D.9, the DUT passes the requirements as stated in the reference standards.

IC RSS-132 §6.6 (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4kHz spurious frequency in the band 30 - 1000 MHz or 5 nanowatts above 1 GHz.

The results set forth in this section meet the requirement with a margin of at least 1.83 nW

#### D.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

26May05  
Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						Model: IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 28 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix E - Cellular Band Effective Radiated Power Measurement

### E.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §22.913 (a)
Procedure Reference	ANSI/TIA/EIA-603-C

### E.2. LIMITS

FCC CFR 47 §22.913 (a)	(a) Maximum ERP. .... The ERP of mobile transmitters and auxiliary transmitters must not exceed 7 Watts.
------------------------	--

### E.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 4 %
Barometric Pressure	96 +/- 0.2 kPa

### E.4. EQUIPMENT LIST

RECEIVING EQUIPMENT						
ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00072	EMCO	2075	Mini-mast	na	na
2	00073	EMCO	2080	Turn Table	na	na
3	00071	EMCO	2090	Multi-Device Controller	na	na
4	00050	Chase	CBL-6111A	Bilog Antenna	08Feb05	08Feb06
5	00051	HP	8566B	Spectrum Analyzer	12Apr05	12Apr06
6	00047	HP	85685A	Preselector	13Apr05	13Apr06
7	00120	Celltech	n/a	Microwave Cable (RX)	25Mar05	25Mar06
8	00121	Andrew	FSJ4-50B	Microwave Cable (RX)	25Mar05	25Mar06
9	00130	Andrew	FSJ1-50A	Microwave Cable (RX)	25Mar05	25Mar06

### ADDITIONAL SUBSTITUTION EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
10	00059	ETS	3121C	Roberts Dipole	04Dec03	04Dec05
11	00131	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
12	00127	Andrew	FSJ4-50B	Microwave Cable (TX)	na	na
13	00133	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
14	00006	R &S	SMR40	Signal Generator	12Apr05	12Apr06
15	00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
16	00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
17	00013	Gigatronics	80701A	Power Sensor	11Oct04	11Oct05
18	00102	Pasternack	PE7015-3110	30 dB attenuator	na*	na*
19	00078	Pasternack	PE2214-20	Directional Coupler	na*	na*

\*Attenuation offset in power meter setup

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.
						Page 29 of 69

## E.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in E.6.			
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:			
	Frequency Range	RBW	VBW	Detector
	MHz	kHz	kHz	
	30 - 1000	100	100	Peak

## E.6. SETUP DRAWING

Figure E.6-1 - Field Strength Setup Drawing


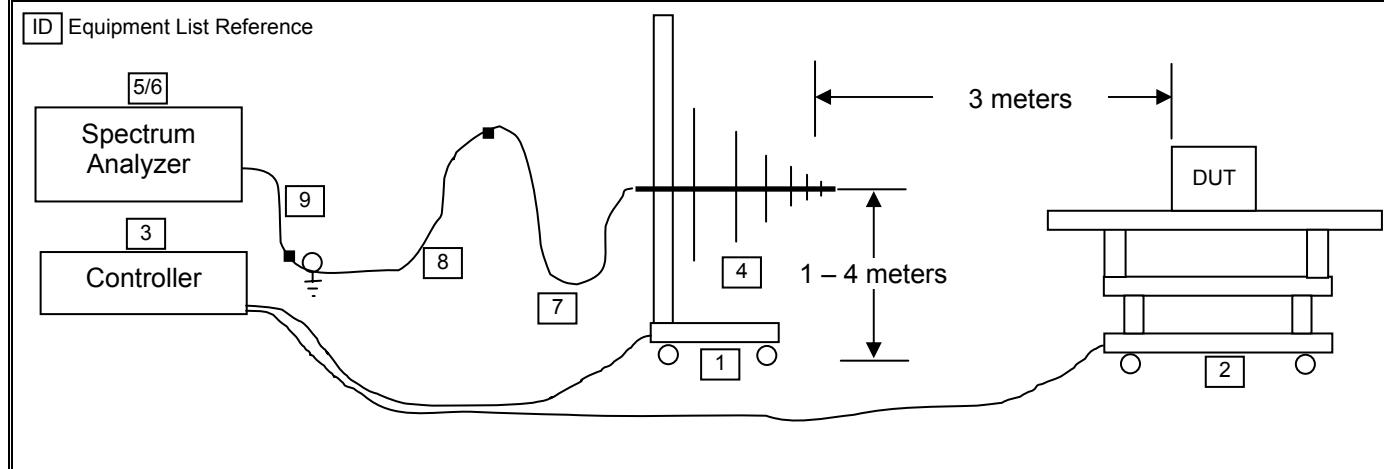


Figure E.6-2 - Signal Substitution Setup Drawing

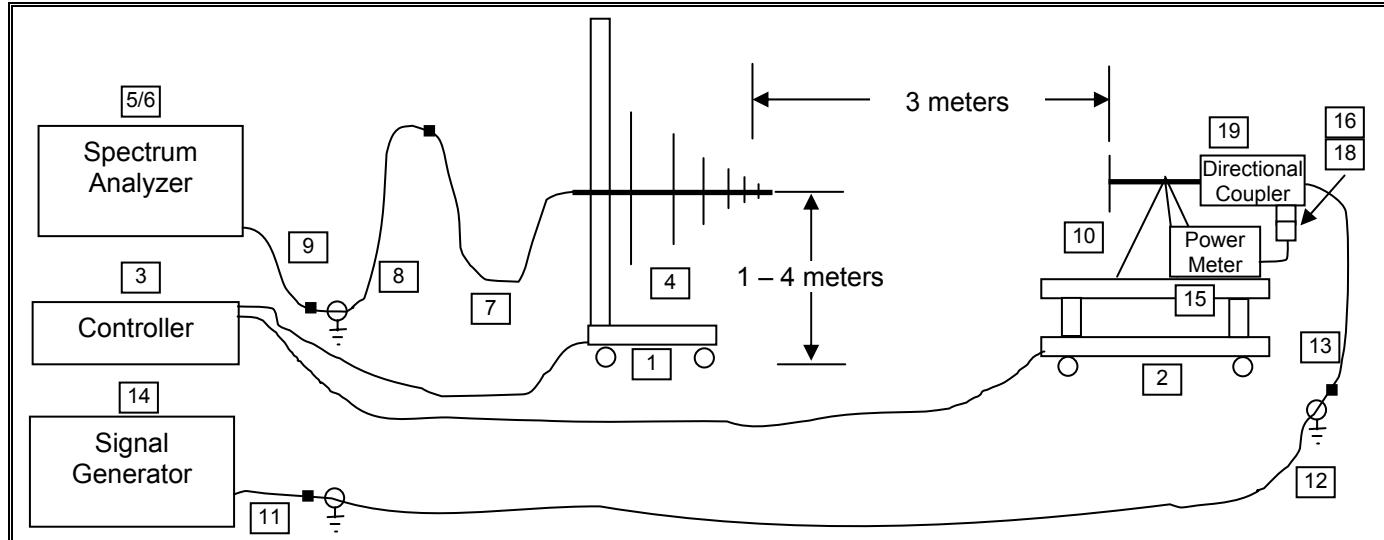

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### E.7. SETUP PHOTOGRAPHS

Photograph E.7-1 - DUT in Highest Cellular Carrier Configuration



#### E.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the cellular band at maximum power levels, and the DUT configured as described in Section 5 of this report.



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## E.9. TEST RESULTS



Project Number: 040505KBC-T628-E24G  
Company: Itronix  
Product: IX325 with AC775

Standard: FCC22.913  
Test Start Date: 26-May-05  
Test End Date: 27-Jun-05

IX325 Tablet with AC775 Carrier Field Strengths

Polarity	Distance	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	Carrier EIRP Level		EIRP Limit	Margin	Pass/Fail	
									MHz	dBuV/m	dBuV	dBm	dBd	dBm
H	3	B_3121C	128	824.20	131.42	106.18	30.79	-0.85	29.94	0.986	38.45	7.00	8.51	PASS
V	3	B_3121C	128	824.20	123.20	97.96	25.05	-0.85	24.20	0.263	38.45	7.00	14.25	PASS
H	3	B_3121C	190	836.60	130.98	105.32	30.64	-0.70	29.94	0.986	38.45	7.00	8.51	PASS
V	3	B_3121C	190	836.60	123.02	97.36	24.61	-0.70	23.91	0.246	38.45	7.00	14.54	PASS
H	3	B_3121C	251	848.80	130.77	104.58	30.56	-0.55	30.01	1.00	38.45	7.00	8.44	PASS
V	3	B_3121C	251	848.80	122.81	96.62	23.53	-0.55	22.98	0.198	38.45	7.00	15.47	PASS

### Note:

Dipole Antenna used for substitution

### Formulae:

ERP Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBd)

Margin (dB) = Limit (dBm) – Level (dBm)

## E.10. PASS/FAIL

In reference to the results outlined in E.9, the DUT passes the requirements as stated in the reference standards as follows:

FCC 22.913 (a) Maximum ERP. .... The ERP of mobile transmitters and auxiliary transmitters must not exceed 7 Watts.

A maximum ERP of 30.01 dBm (1.00 Watts) was measured when Channel 251 was transmitting.

## E.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

Applicant:	ITRONIX CORPORATION	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 32 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix F - Cellular Band Radiated TX Spurious Emissions Measurement

### F.1. REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §22.917(e)
<b>Procedure Reference</b>	ANSI/TIA/EIA-603-C

### F.2. LIMITS

FCC CFR 47 §22.917	(e) <i>Out of Band Emissions. The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: at least <math>43 + 10 \log P</math> dB</i>
--------------------	--

### F.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### F.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00072	EMCO	2075	Mini-mast	na	na
2	00073	EMCO	2080	Turn Table	na	na
3	00071	EMCO	2090	Multi-Device Controller	na	na
4	00050	Chase	CBL-6111A	Bilog Antenna	08Feb05	08Feb06
5	00035	ETS	3115	Double Ridged Guide Antenna (Rx)	24Mar04	24Mar06
6	00015	Agilent	E4408B	Spectrum Analyzer	24Jan05	24Jan06
7	00051	HP	8566B	Spectrum Analyzer	12Apr05	12Apr06
8	00047	HP	85685A	Preselector	13Apr05	13Apr06
9	00120	Celltech	n/a	Microwave Cable (RX)	25Mar05	25Mar06
10	00121	Andrew	FSJ4-50B	Microwave Cable (RX)	25Mar05	25Mar06
11	00130	Andrew	FSJ1-50A	Microwave Cable (RX)	25Mar05	25Mar06
12	00115	Miteq	JS4-00102600-35-5A	Low Noise Amplifier	08Jun05	08Jun06
13	00093	Microtronics	HPM50111	High Pass Filter	25Mar05	25Mar06
14	00119	INMAT	18AH-10	10dB attenuator	25Mar05	25Mar06

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.
						Page 33 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### ADDITIONAL SUBSTITUTION EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
15	00059	ETS	3121C	Roberts Dipole	04Dec03	04Dec05
16	00034	ETS	3115	Double Ridged Guide Antenna (Tx)	24Mar04	24Mar06
17	00131	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
18	00127	Andrew	FSJ4-50B	Microwave Cable (TX)	na	na
19	00133	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
20	00006	R & S	SMR-20	Signal Generator	12Apr05	12Apr06
21	00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
22	00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
23	00013	Gigatronics	80701A	Power Sensor	11Oct04	11Oct05
24	00102	Pasternack	PE7015-3110	30 dB attenuator	na*	na*
25	00078	Pasternack	PE2214-20	Directional Coupler	na*	na*
26	00142	HP	8491A	20 dB attenuator	na*	na*

\* Attenuation offset in power meter setup

#### F.5. MEASUREMENT EQUIPMENT SETUP

<b>MEASUREMENT EQUIPMENT CONNECTIONS</b>	The measurement equipment was connected as shown in F.6. A number of measurement equipment configurations were used to cover the applicable frequency ranges. The configurations for each range are as follows:				
	Frequency Range	LNA Asset #	Filter/Attenuator Asset #	Rx Antenna Asset #	Tx Antenna Asset #
	30 MHz – 1 GHz	none	none	00050	00059
	1 GHz – 2 GHz	none	none	00035	00034
	2 GHz – 3 GHz	00115	00119	00035	00034
<b>MEASUREMENT EQUIPMENT SETTINGS</b>	3 GHz – 10 GHz	00115	00093	00035	00034
	The spectrum analyzer was set to the following settings:				
	Frequency Range	RBW	VBW	Detector	
	MHz	kHz	kHz		
	800 MHz – 10 GHz	100*	100*		Peak

\*Field strength measurements were made with a worse case RBW and VBW of 1 MHz for frequency bands above 1 GHz when adequate margins were attained.

<b>Applicant:</b>	ITronix Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 34 of 69

## F.6. SETUP DRAWING

Figure F.6-1 - Field Strength Setup Drawing


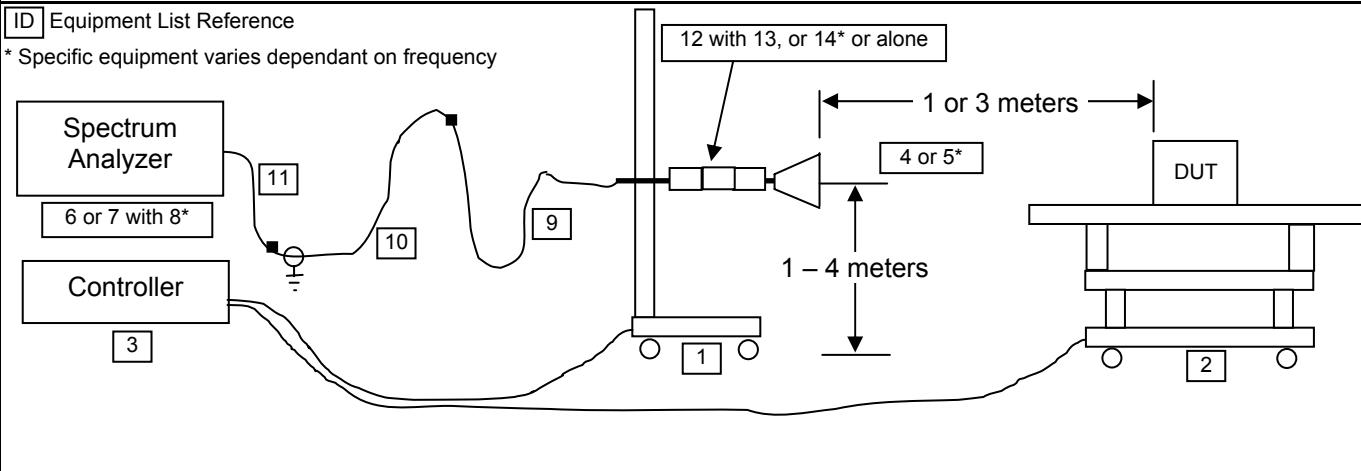


Figure F.6-2 - Signal Substitution Setup Drawing

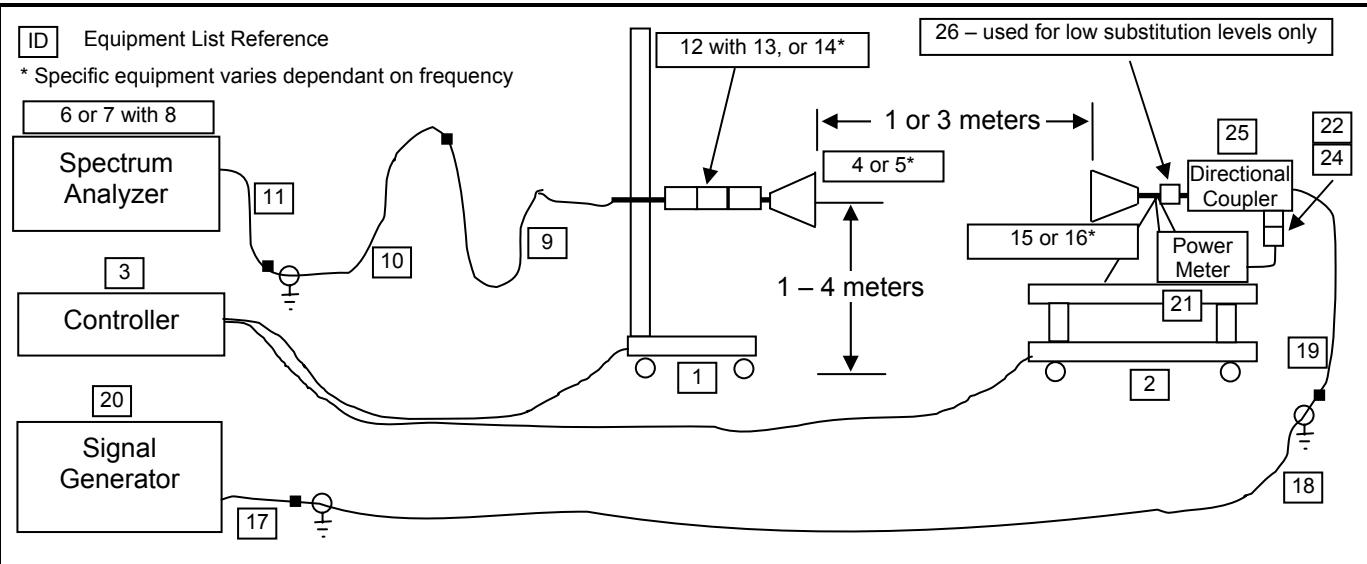

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### F.7. SETUP PHOTOGRAPHS

Photograph F.7-1 - Horizontal Bilog Cellular Radiated Emissions Setup



Photograph F.7-2 - Vertical 3115 Horn and LNA Cellular Radiated Emissions Setup



#### F.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the cellular band at maximum power levels as described in Section 5 of this report. During these measurements, the antenna was replaced with a 50-ohm load. The conducted emissions described in Appendix C supplement the results described in this appendix.

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 36 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## **F.9. TEST RESULTS**

The spurious measurements detailed in this section are referenced to the carrier levels set forth in Appendix E of this report:

### F.9.1. Spurious Emissions

## Channel 128

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Emission Level	Limit	Margin	Pass/Fail
H	3	Horn SN6267	CH128	1631.00	59.71	27.70	-58.84	4.19	-54.65	-13.00	41.65	PASS
H	3	none	CH128	1891.00	62.72					84.4*	21.6*	PASS*
H	3	none	CH128	2190.00	38.70					84.4*	45.7*	PASS*
H	3	Horn SN6267	CH128	2472.60	46.60	34.20	-62.26	5.60	-56.66	-13.00	43.66	PASS
H	3	none	CH128	2796.00	38.88					84.4*	45.5*	PASS*
H	3	Horn SN6267	CH128	3296.80	43.73	36.10	-64.86	5.84	-59.02	-13.00	46.02	PASS
H	3	Horn SN6267	CH128	4121.00	39.68	29.30	-71.12	6.03	-65.09	-13.00	52.09	PASS
H	3	Horn SN6267	CH128	4945.20	44.78	32.60	-66.13	6.47	-59.66	-13.00	46.66	PASS
H	3	none	CH128	5271.50	47.81					84.4*	36.6*	PASS*
H	3	Horn SN6267	CH128	5769.40	42.40	28.30	-69.46	6.78	-62.68	-13.00	49.68	PASS
H	3	Horn SN6267	CH128	6593.60	46.67	31.50	-74.06	7.40	-66.66	-13.00	53.66	PASS
H	3	Horn SN6267	CH128	7417.80	46.45	28.90	-79.28	6.83	-72.45	-13.00	59.45	PASS
H	3	Horn SN6267	CH128	8245.00	46.15	27.30	-80.99	7.16	-73.83	-13.00	60.83	PASS
H	3	none	CH128	8302.50	52.56					84.4*	31.8*	PASS*
H	3	none	CH128	8374.25	54.58					84.4*	29.8*	PASS*
H	3	none	CH128	9039.25	47.54					84.4*	36.8*	PASS*
V	3	Horn SN6267	CH128	1648.40	60.03	27.90	-59.03	4.21	-54.82	-13.00	41.82	PASS
V	3	none	CH128	1879.00	61.63					84.4*	22.7*	PASS*
V	3	Horn SN6267	CH128	2027.00	38.56	27.40	-65.69	4.62	-61.07	-13.00	48.07	PASS
V	3	Horn SN6267	CH128	2472.60	51.70	39.30	-54.42	5.60	-48.82	-13.00	35.82	PASS
V	3	none	CH128	2629.00	44.27					84.4*	40.1*	PASS*
V	3	none	CH128	2686.00	40.63					84.4*	43.7*	PASS*
V	3	Horn SN6267	CH128	3296.80	51.63	44.00	-56.29	5.84	-50.45	-13.00	37.45	PASS
V	3	Horn SN6267	CH128	4121.00	43.08	32.70	-64.98	6.03	-58.95	-13.00	45.95	PASS
V	3	Horn SN6267	CH128	4945.20	53.78	41.60	-54.80	6.47	-48.33	-13.00	35.33	PASS
V	3	none	CH128	5266.25	47.80					84.4*	36.6*	PASS*
V	3	Horn SN6267	CH128	5769.40	46.20	32.10	-63.01	6.78	-56.23	-13.00	43.23	PASS
V	3	Horn SN6267	CH128	6593.60	46.37	31.20	-64.77	7.40	-57.37	-13.00	44.37	PASS
V	3	Horn SN6267	CH128	7417.80	45.95	28.40	-67.27	6.83	-60.44	-13.00	47.44	PASS
V	3	Horn SN6267	CH128	8242.00	46.00	27.10	-68.20	7.16	-61.04	-13.00	48.04	PASS
V	3	none	CH128	9352.50	48.30					84.4*	36.1*	PASS*

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

Note:-

NOTE:  
The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

## Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) =  $\text{EIRP (dBm)} - \text{ERF Emission Level (dBm)} + \text{Theoretical Limit (dBv/m)} - \text{Corrected Field Strength (dBu)}$

<b>Applicant:</b>	<b>ITRONIX Corporation</b>	<b>FCC ID:</b>	<b>KBCIX325A775IWLB</b>	<b>IC ID:</b>	<b>1943A-IX325e</b>	 <b>ITRONIX</b>
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>		<b>Model:</b>	<b>IX325A775IWLB</b>			
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 37 of 69	



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Channel 190

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBd	ERP Emission Level dBm	Limit dBm or dBuV/m*	Margin dB	Pass/Fail
H	3	Horn SN6267	CH190	1685.00	59.74	27.40	-55.97	4.25	-51.73	-13.00	38.73	PASS
H	3	Horn SN6267	CH190	2511.00	46.06	33.50	-63.21	5.66	-57.55	-13.00	44.55	PASS
H	3	none	CH190	2665.00	39.31					84.4*	45.1*	PASS*
H	3	none	CH190	2671.00	39.15					84.4*	45.2*	PASS*
H	3	Horn SN6267	CH190	3346.40	44.08	36.30	-64.72	5.87	-58.85	-13.00	45.85	PASS
H	3	Horn SN6267	CH190	4183.00	42.53	32.00	-68.02	6.12	-61.90	-13.00	48.90	PASS
H	3	Horn SN6267	CH190	5019.60	48.20	35.90	-58.90	6.46	-52.44	-13.00	39.44	PASS
H	3	none	CH190	5273.25	47.87					84.4*	36.5*	PASS*
H	3	Horn SN6267	CH190	5856.20	44.92	30.60	-66.07	6.89	-59.18	-13.00	46.18	PASS
H	3	Horn SN6267	CH190	6692.80	45.49	30.10	-70.20	7.34	-62.86	-13.00	49.86	PASS
H	3	Horn SN6267	CH190	7529.40	47.23	29.40	-67.05	6.78	-60.27	-13.00	47.27	PASS
H	3	none	CH190	8302.50	52.46					84.4*	31.9*	PASS*
H	3	Horn SN6267	CH190	8366.00	46.92	28.10	-63.84	7.16	-56.68	-13.00	43.68	PASS
H	3	none	CH190	8372.50	54.29					84.4*	30.1*	PASS*
H	3	none	CH190	9366.50	47.65					84.4*	36.7*	PASS*
V	3	Horn SN6267	CH190	1673.20	59.47	27.20	-55.36	4.23	-51.13	-13.00	38.13	PASS
V	3	none	CH190	1896.00	62.36					84.4*	22.0*	PASS*
V	3	Horn SN6267	CH190	2511.00	52.56	40.00	-55.47	5.66	-49.81	-13.00	36.81	PASS
V	3	none	CH190	2633.00	41.69					84.4*	42.7*	PASS*
V	3	none	CH190	2681.00	40.61					84.4*	43.8*	PASS*
V	3	none	CH190	2744.00	39.34					84.4*	45.0*	PASS*
V	3	Horn SN6267	CH190	3346.40	53.28	45.50	-53.97	5.87	-48.10	-13.00	35.10	PASS
V	3	Horn SN6267	CH190	4183.00	42.83	32.30	-66.32	6.12	-60.20	-13.00	47.20	PASS
V	3	Horn SN6267	CH190	5019.60	42.90	30.60	-65.41	6.46	-58.95	-13.00	45.95	PASS
V	3	none	CH190	5264.50	48.24					84.4*	36.1*	PASS*
V	3	none	CH190	5766.75	52.38					84.4*	32.0*	PASS*
V	3	Horn SN6267	CH190	5856.20	45.62	31.30	-67.03	6.89	-60.14	-13.00	47.14	PASS
V	3	Horn SN6267	CH190	6692.80	48.49	33.10	-62.27	7.34	-54.93	-13.00	41.93	PASS
V	3	Horn SN6267	CH190	7529.40	46.98	29.15	-66.27	6.78	-59.49	-13.00	46.49	PASS
V	3	Horn SN6267	CH190	8366.00	47.25	28.43	-69.73	7.16	-62.57	-13.00	49.57	PASS
V	3	none	CH190	9203.75	53.72					84.4*	30.7*	PASS*

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

## Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – ERP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLB	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem			Model:	IX325A775IWLB		
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.			Page 38 of 69		



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Channel 251

Polarity	Distance	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	ERP Carrier Level	Limit	Margin	Pass/Fail
m				MHz	dBuV/m	dBuV	dBm	dBd	dBm	dBm or dBuV/m*	dB	
H	3	Horn SN6267	CH251	1699.00	60.33	27.90	-55.86	4.26	-51.60	-13.00	38.60	PASS
H	3	none	CH251	2303.39	37.70					84.4*	46.7*	PASS*
H	3	none	CH251	2493.00	52.09					84.4*	32.3*	PASS*
H	3	Horn SN6267	CH251	2546.24	48.01	35.30	-60.51	5.66	-54.85	-13.00	41.85	PASS
H	3	Horn SN6267	CH251	3395.20	45.77	37.80	-62.76	5.90	-56.86	-13.00	43.86	PASS
H	3	Horn SN6267	CH251	4244.00	43.92	33.40	-67.71	6.20	-61.51	-13.00	48.51	PASS
H	3	Horn SN6267	CH251	5092.80	45.61	33.00	-63.04	6.46	-56.58	-13.00	43.58	PASS
H	3	none	CH251	5271.00	44.31					84.4*	40.1*	PASS*
H	3	Horn SN6267	CH251	5641.60	46.00	32.10	-65.04	6.63	-58.41	-13.00	45.41	PASS
H	3	none	CH251	5766.75	48.08					84.4*	36.3*	PASS*
H	3	Horn SN6267	CH251	6790.40	47.24	31.50	-65.33	7.29	-58.04	-13.00	45.04	PASS
H	3	Horn SN6267	CH251	7639.20	51.11	33.00	-57.49	6.87	-50.62	-13.00	37.62	PASS
H	3	none	CH251	8302.50	52.46					84.4*	31.9*	PASS*
H	3	none	CH251	8374.25	54.98					84.4*	29.4*	PASS*
H	3	Horn SN6267	CH251	8488.00	51.49	32.40	-52.69	7.16	-45.53	-13.00	32.53	PASS
V	3	Horn SN6267	CH251	1696.00	60.21	27.80	-55.48	4.26	-51.22	-13.00	38.22	PASS
V	3	Horn SN6267	CH251	2546.21	53.71	41.00	-53.23	5.66	-47.57	-13.00	34.57	PASS
V	3	none	CH251	2685.20	51.03					84.4*	33.3*	PASS*
V	3	none	CH251	2743.00	47.53					84.4*	36.8*	PASS*
V	3	none	CH251	2796.00	47.28					84.4*	37.1*	PASS*
V	3	Horn SN6267	CH251	3395.20	54.97	47.00	-50.70	5.90	-44.80	-13.00	31.80	PASS
V	3	Horn SN6267	CH251	4244.00	43.62	33.10	-67.67	6.20	-61.47	-13.00	48.47	PASS
V	3	Horn SN6267	CH251	5092.80	50.51	37.90	-58.42	6.46	-51.96	-13.00	38.96	PASS
V	3	none	CH251	5252.25	47.27					84.4*	37.1*	PASS*
V	3	none	CH251	5761.50	53.04					84.4*	31.3*	PASS*
V	3	Horn SN6267	CH251	5941.60	49.06	34.50	-60.92	6.99	-53.93	-13.00	40.93	PASS
V	3	Horn SN6267	CH251	6790.40	48.04	32.30	-61.22	7.29	-53.93	-13.00	40.93	PASS
V	3	Horn SN6267	CH251	7639.20	51.51	33.40	-56.78	6.87	-49.91	-13.00	36.91	PASS
V	3	none	CH251	8374.25	48.88					84.4*	35.5*	PASS*
V	3	Horn SN6267	CH251	8488.00	51.89	32.80	-54.18	7.16	-47.02	-13.00	34.02	PASS

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

Note:

NOTE: The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

## Formulae:

ERP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – ERP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLB	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem			Model:	IX325A775IWLB		
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 39 of 69	



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### F.10. PASS/FAIL

In reference to the results outlined in F.9, the DUT passes the requirements as stated in the reference standards.

(e) Out of Band Emissions. The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by: at least  $43 + 10 \log P$  dB

The results set forth in this section meet the requirement with a margin of at least 21.6 dB

#### F.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 40 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix G - PCS Band Conducted TX RF Output Power Measurement

### G.1. REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §2.1046
<b>Procedure Reference</b>	FCC CFR 47 §2.1046

### G.2. LIMITS

FCC CFR 47 §2.1046 (a)	For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedures to give the values of current and voltage on the circuit elements specified in §2.1033(c) (8).
------------------------	--

\*EIRP limits are specified in Appendix J.

### G.3. ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	25 +/- 2 °C
<b>Humidity</b>	35 +/- 4 %
<b>Barometric Pressure</b>	96 kPa

### G.4. EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
00102	Pasternack	PE7014-30	30dB attenuator	8Jun04	8Dec05
na	ltronix	na	Cable & SMA adapter	na	na*

\*Cable and attenuator verified with power meter prior to use

Applicant:	Itronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 41 of 69




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### G.5. MEASUREMENT EQUIPMENT SETUP

<b>Measurement Equipment Connections</b>	The equipment was connected as shown in the setup drawing in G.6.
<b>Measurement Equipment Settings</b>	Power Meter Settings: Mode - BAP Frequency compensation set for carrier frequency Offset set appropriately to compensate for any attenuator or cable losses
<b>Measurement Procedure</b>	The RF conducted power levels were measured at the DUT antenna connector port using a Gigatronics 8652A Universal Power Meter in burst average power (BAP) mode. An offset was entered into the power meter to correct for the losses of the attenuator and cable installed between the output port and the power sensor input. The DUT test software was used to set it to transmit in the maximum power control mode defined by the manufacturer.

#### G.6. SETUP DRAWING

Figure G.6-1 - Setup Drawing

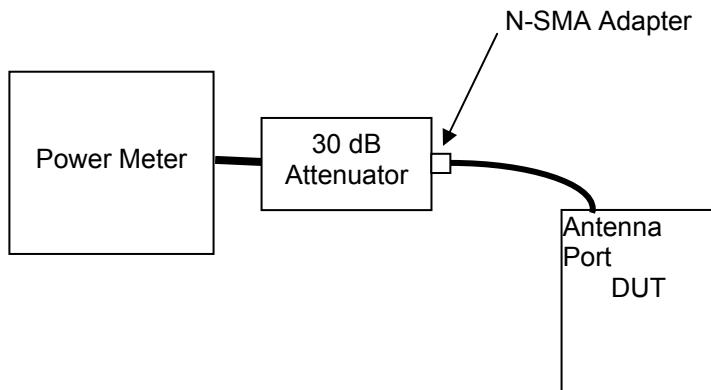

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 42 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### G.7. DUT OPERATING DESCRIPTION

Power measurements were made for each of the three PCS test channels (Channel 512, 661 & 810), with the AirCard 775 modem set appropriately as described in section 5.7.

#### G.8. TEST RESULTS

Mode	Channel	Frequency	Conducted Power	
PCS GSM	512	1850.20 MHz	+29.10 dBm	0.813 Watts
	661	1880.00 MHz	+29.05 dBm	0.804 Watts
	810	1909.80 MHz	+29.20 dBm	0.832 Watts

#### G.9. PASS/FAIL

There is no pass/fail criterion for this measurement. The EIRP values, applied to appropriate regulatory requirements are outlined in Appendix J.

#### G.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

24May05  
Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						ITRONIX
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 43 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix H - PCS Band Conducted TX Spurious Emissions Measurement

### H.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §24.238(a)
Procedure Reference	FCC CFR 47 §24.238(b)

### H.2. LIMITS

FCC CFR 47 §24.238	(a) <i>Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</i>
--------------------	---

### H.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### H.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00015	Agilent	E4408B	Spectrum Analyzer	24Jan05	24Jan06
2	00102	Pasternack	PE7015-3030	30dB attenuator	na	na*
3	na	Ittronix	na	Cable & SMA adapter	na	na*

\*Verified with VNA

### H.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in H.6.				
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:				
	Frequency Range	RBW	VBW	Offset	Detector
	MHz	kHz	kHz	dB	
	Between Block edge and 1 MHz from Block edges	3 *	3 *	-31.0	Peak
	Beyond 1MHz from Block edges	1000	1000		


\*Specified BW of 1% of EBW within Block and 1 MHz of each edge.

Applicant:	Ittronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 44 of 69

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## H.6. SETUP DRAWING

Figure H.6-1 - Setup Drawing

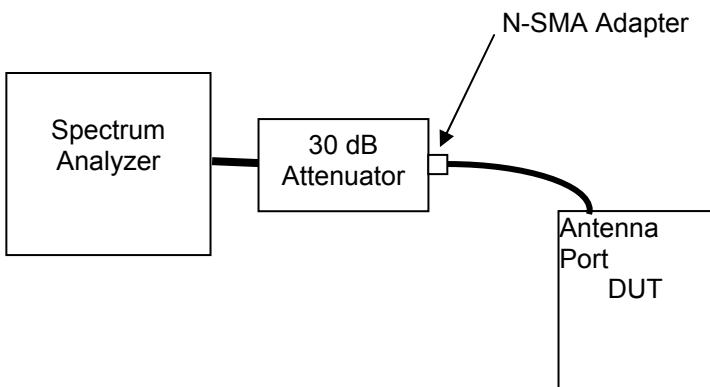

## H.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT transmitting at maximum power in the PCS band, in a configuration as described in Section 5 of this report. The block edge measurements were made with the DUT transmitting on the channel closest to the edge under investigation (CH512 & CH810). The remaining spurious measurements were made on each of the three channels, Low (CH512), Mid (CH661) and High (CH810).




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## H.8. TEST RESULTS

The spurious measurements detailed in this section are referenced to the conducted carrier levels set forth in Appendix G of this report:

### H.8.1. Spurious Emissions within 1MHz of Block Edge

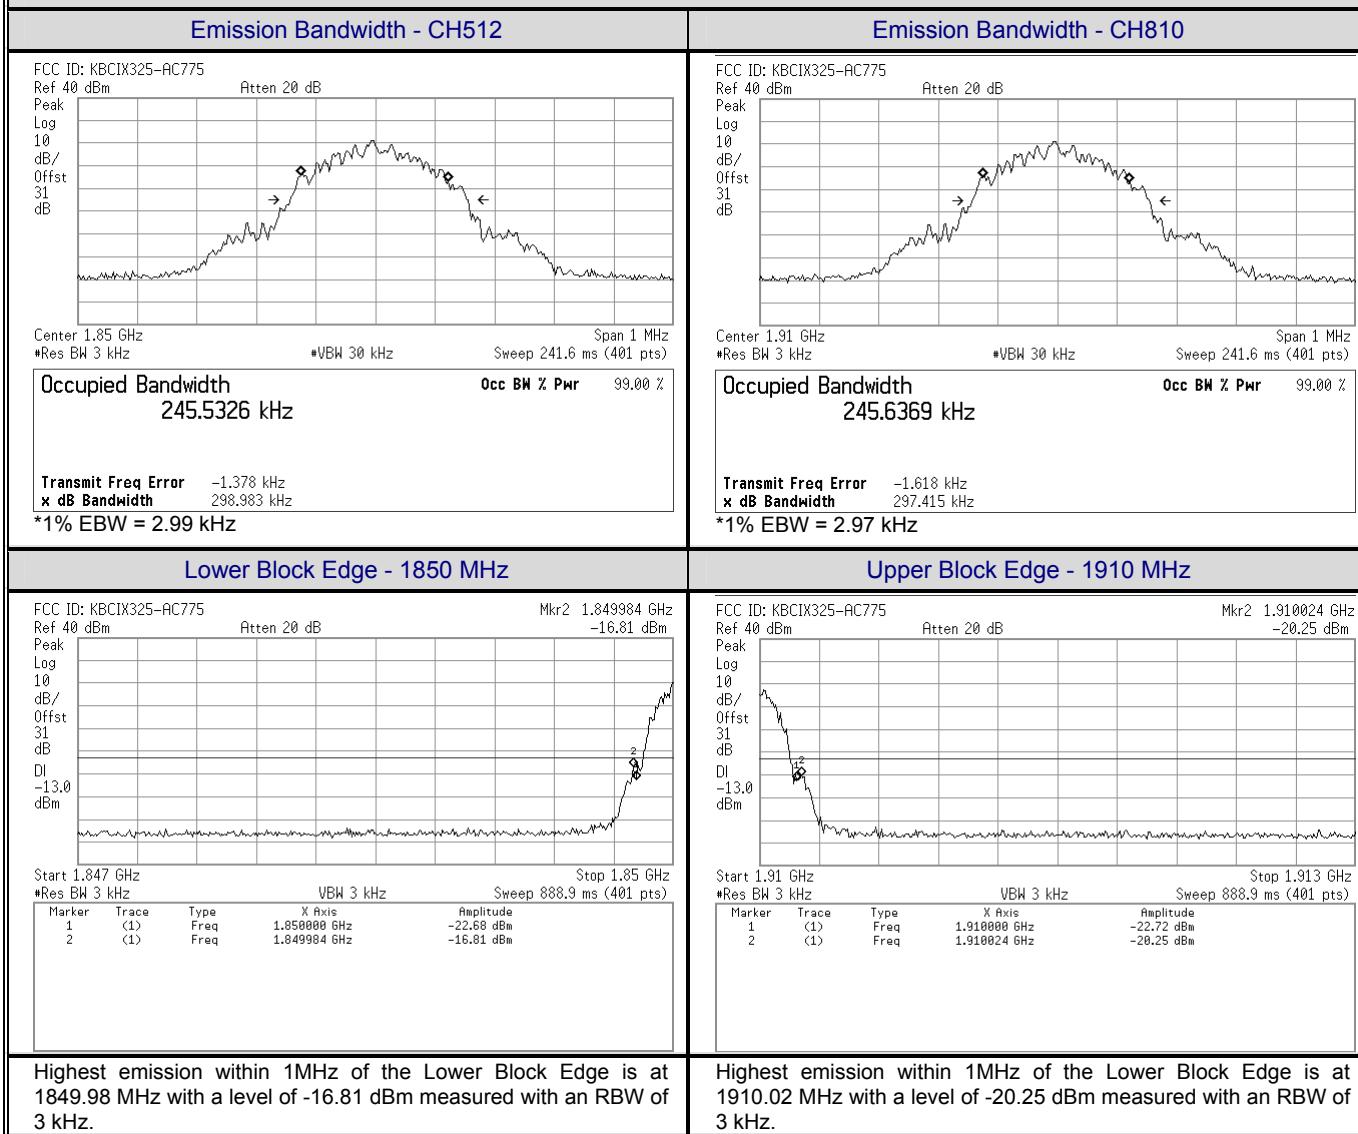

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 69	




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	


### H.8.2. Spurious Emissions removed by more than 1MHz from Block Edge

#### Channel 512


##### Band 1

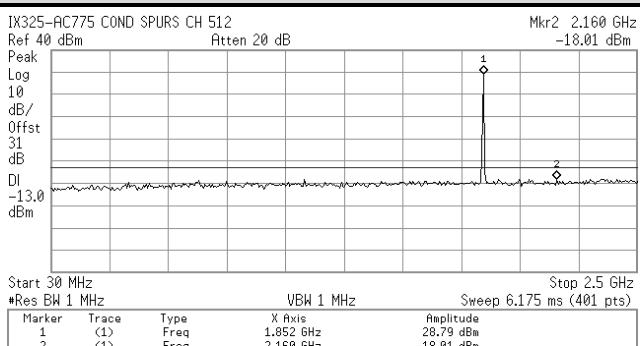


##### Band 2

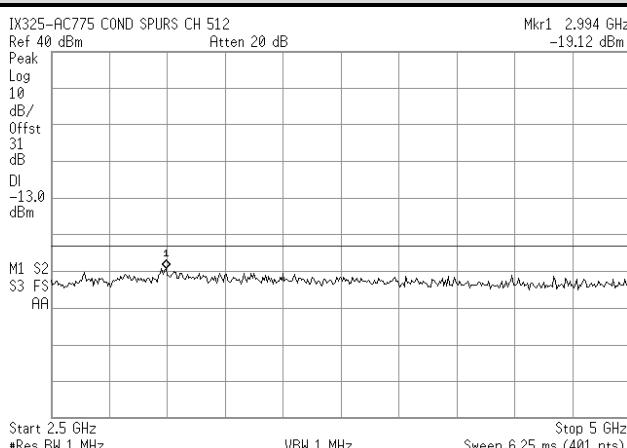


##### Band 3

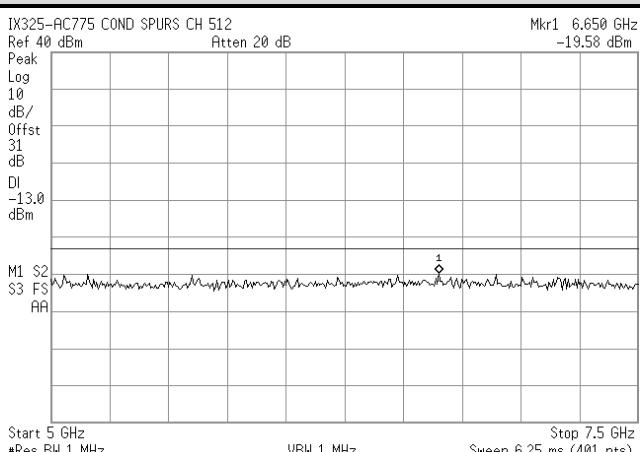


##### Band 4

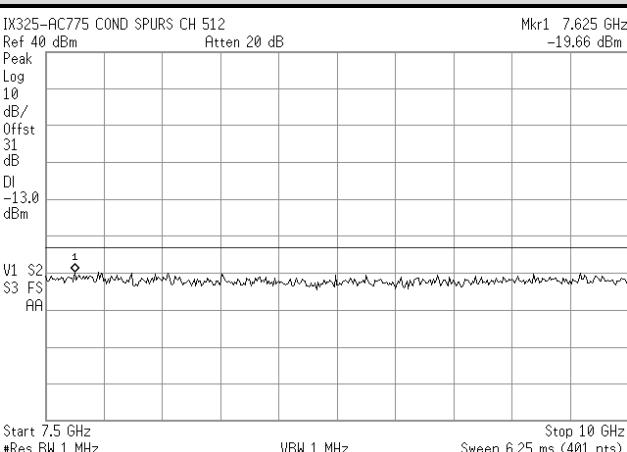

##### Band 5

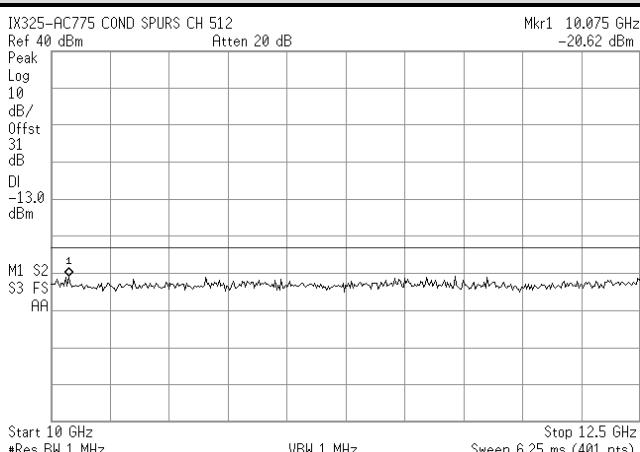



##### Band 6

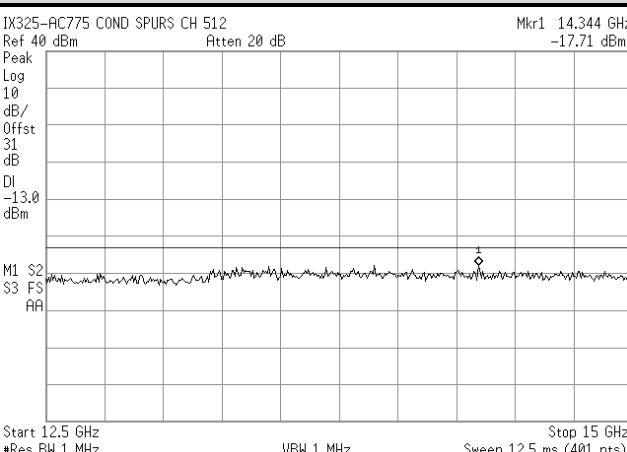

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 47 of 69




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

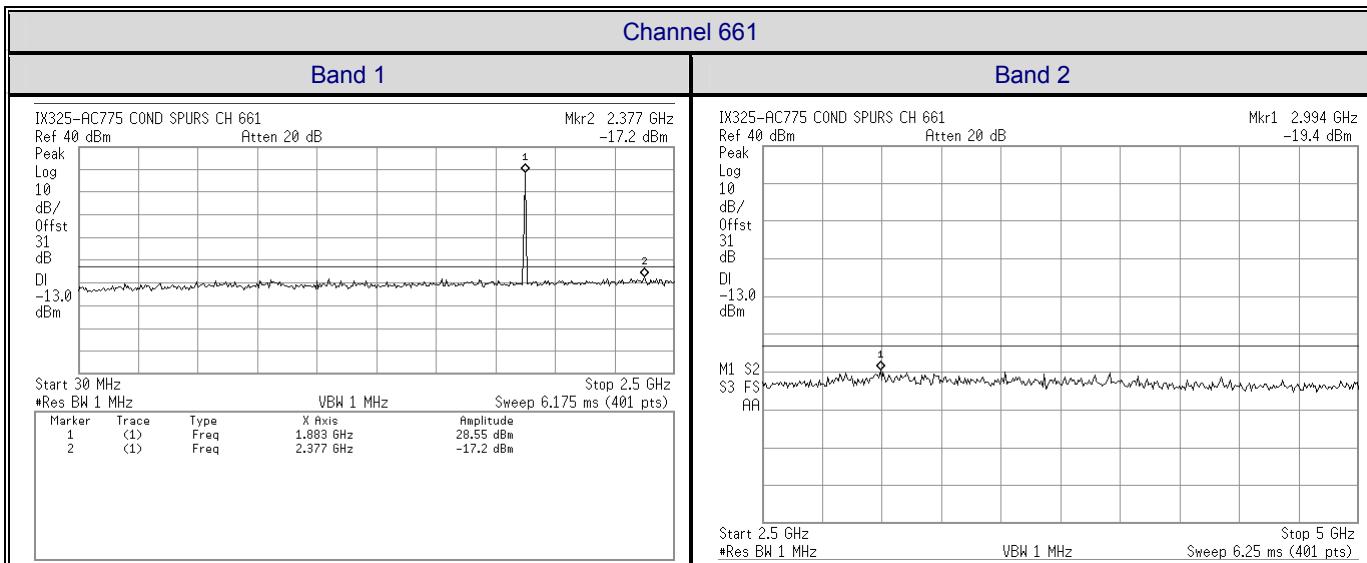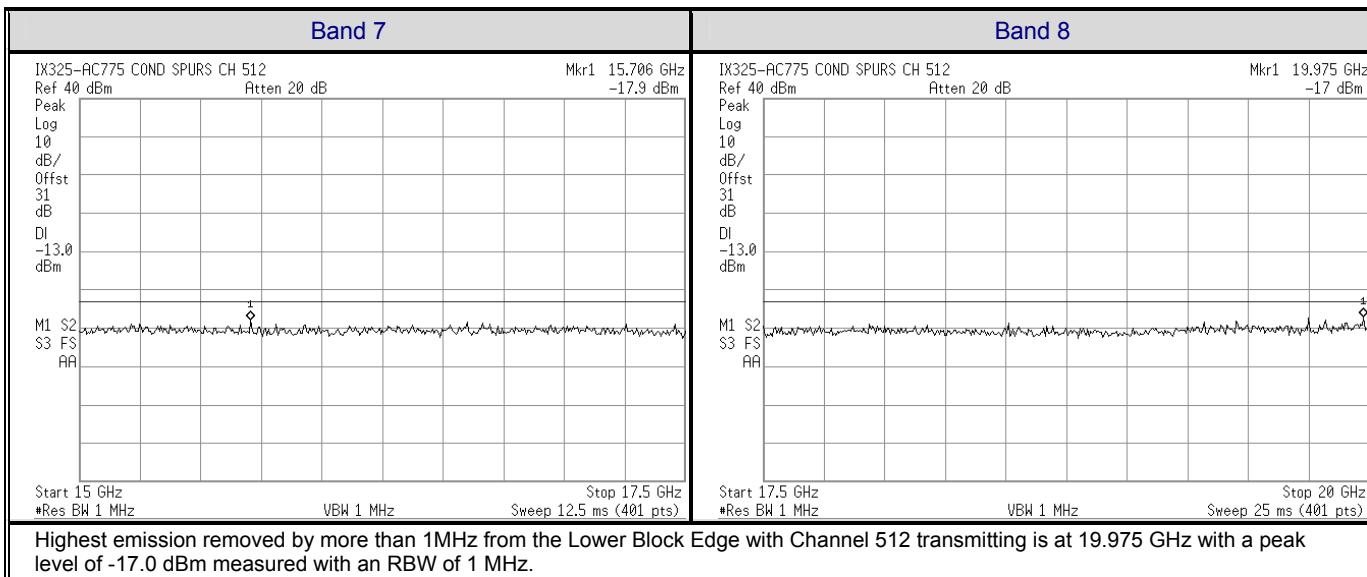

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						Model: IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 48 of 69					




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

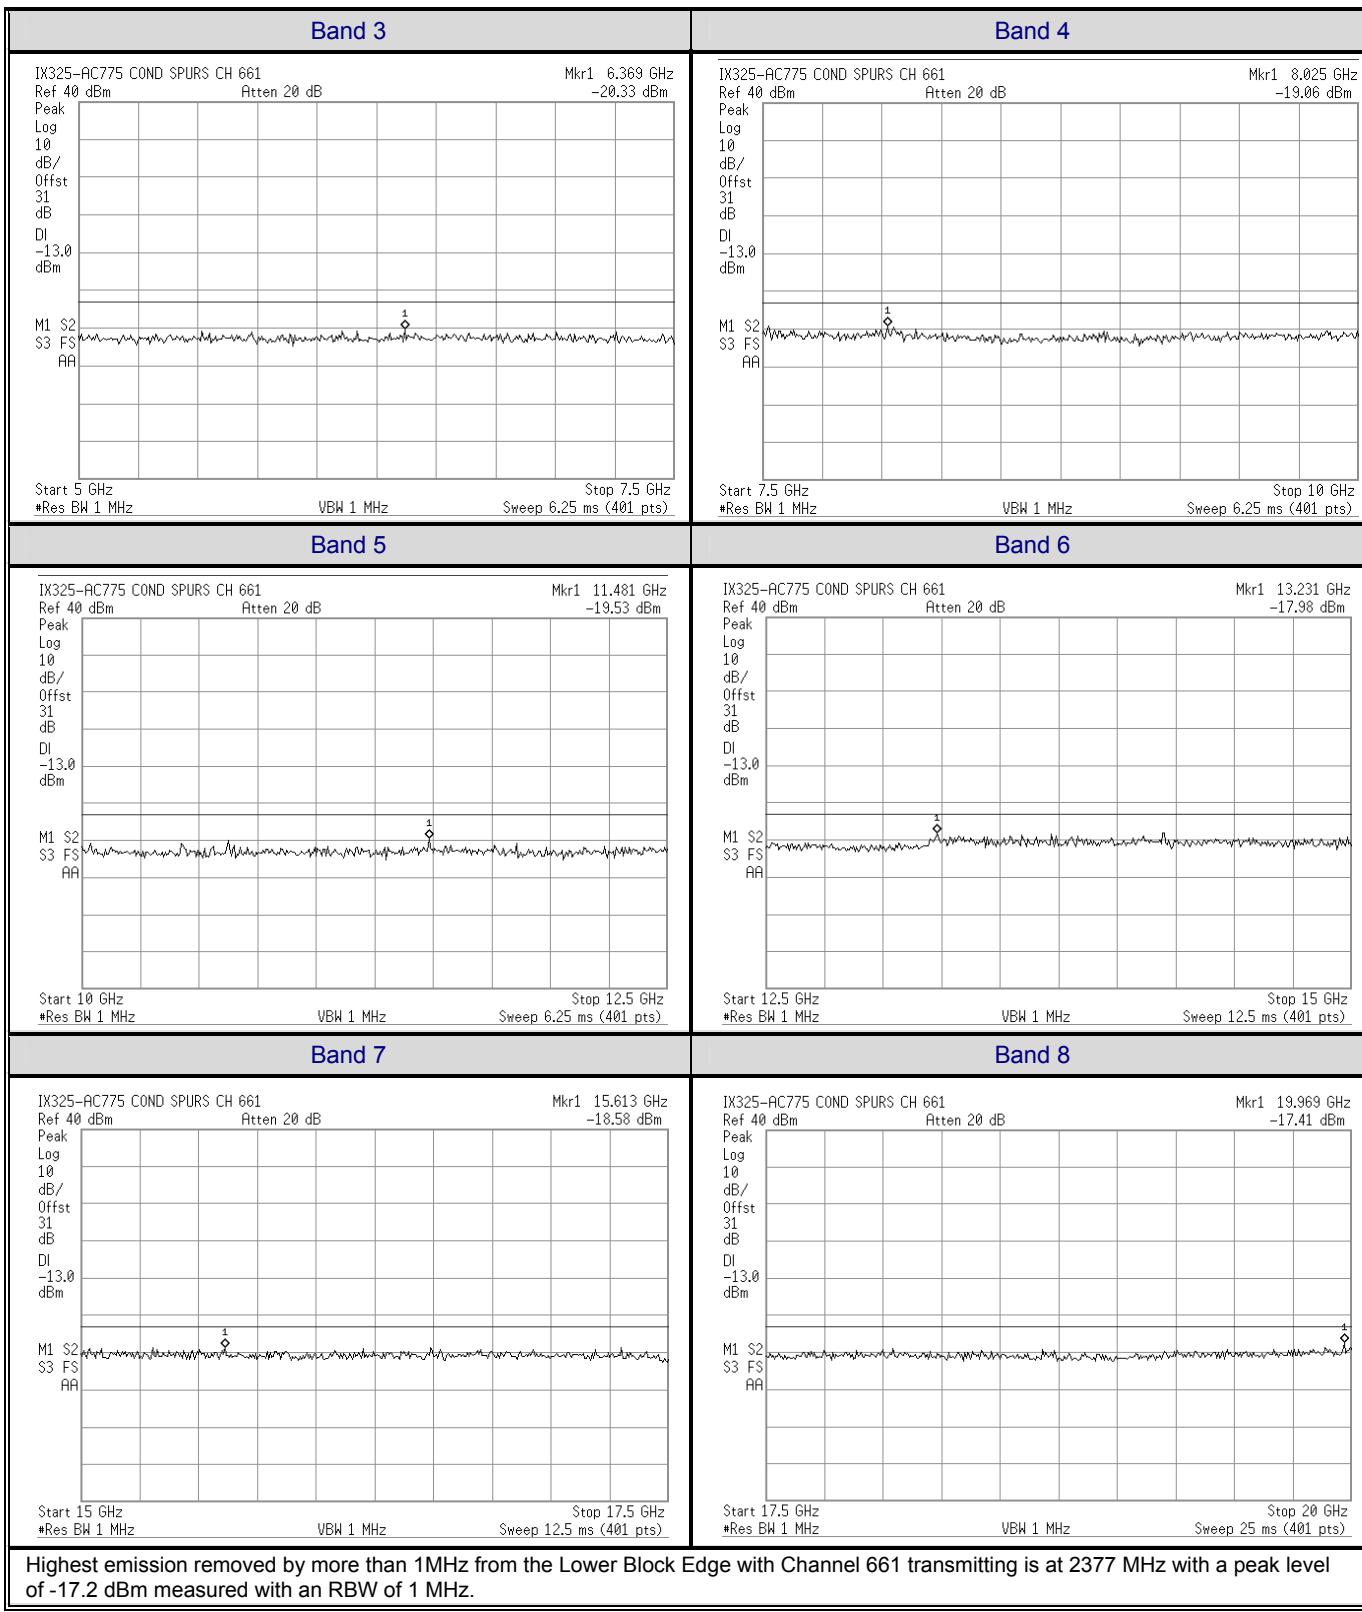

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 49 of 69					




<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

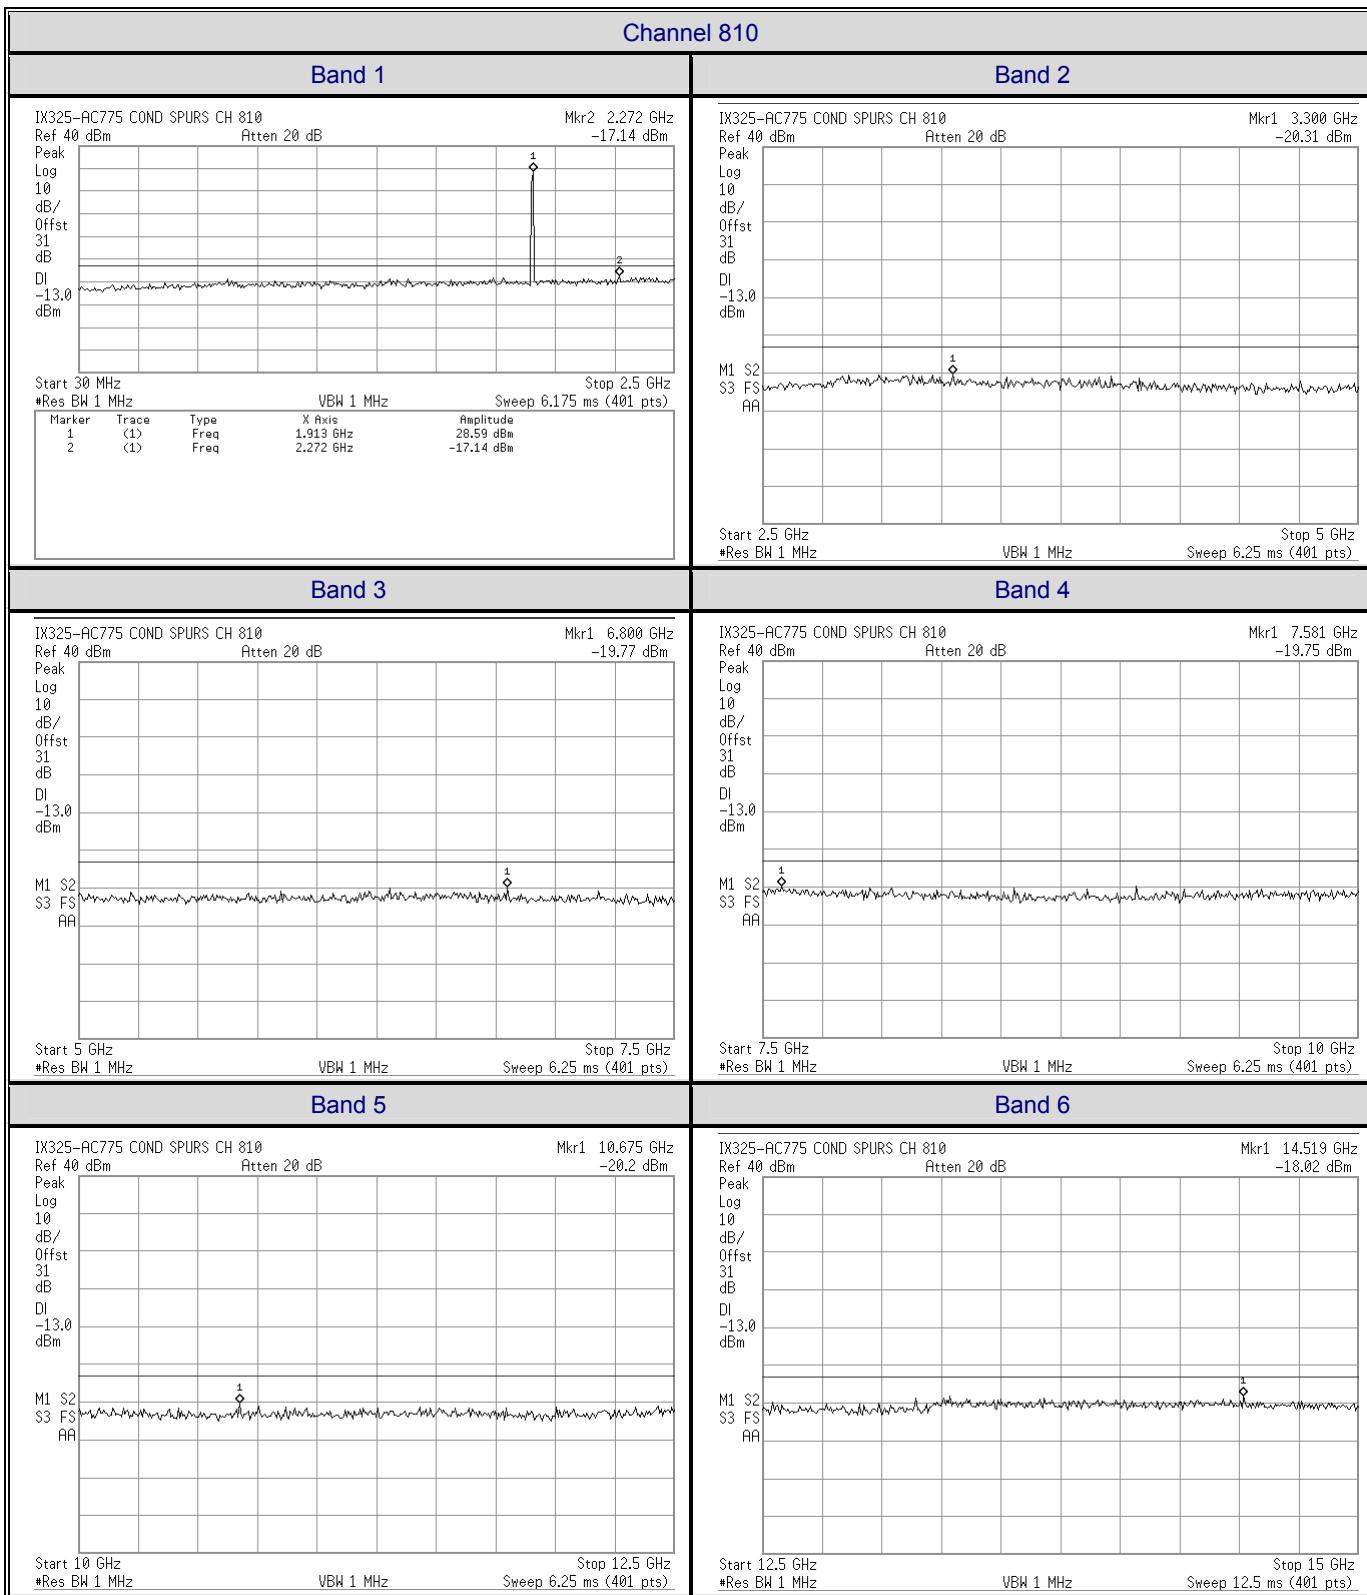

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						<b>Model:</b> IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 50 of 69					



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

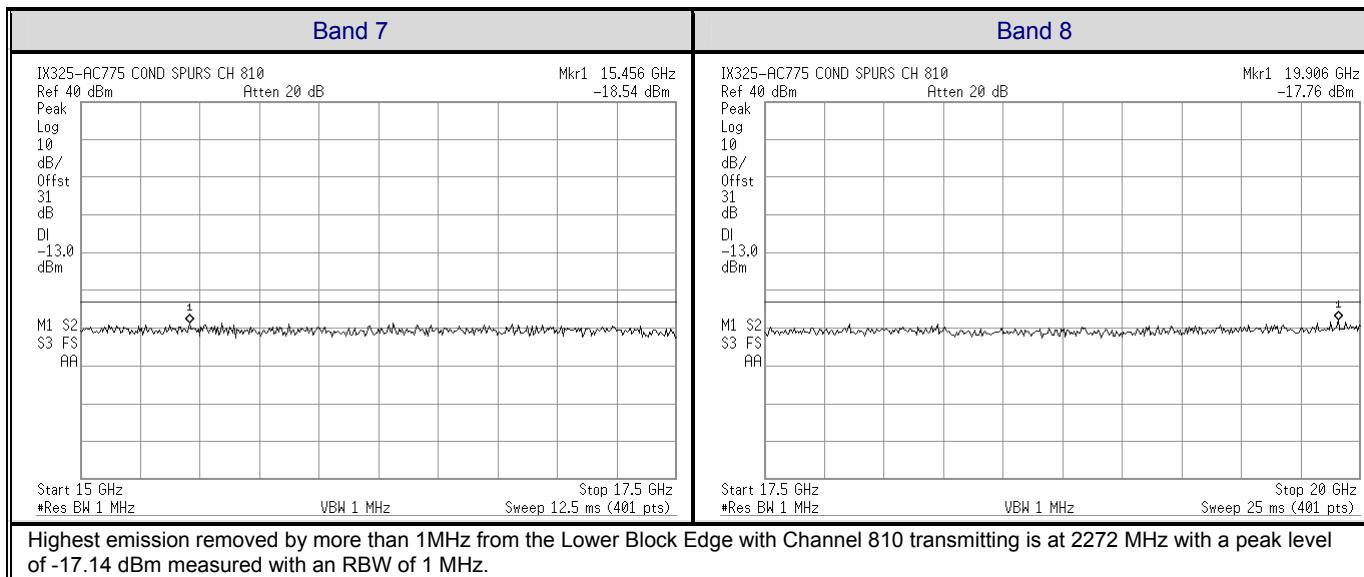

#### H.9. PASS/FAIL

In reference to the results outlined in H.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 4.00 dB (-17.0 dBm @ 19.975 vs a limit of -13 dBm)

#### H.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

25May05

Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 51 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix I - PCS Band Conducted RX Spurious Emissions Measurement

### I.1. REFERENCES

Normative Reference Standard	IC RSS-133 §6.7 (b)
Procedure Reference	IC RSS-133 §4.5

### I.2. LIMITS

IC RSS-133 §6.7	(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4 kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz.
-----------------	---

### I.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### I.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00015	Agilent	E4408B	Spectrum Analyzer	24Jan05	24Jan06
2	na	Itronix	na	Cable & SMA adapter	na	na*

\*Verified with VNA

### I.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in I.6.				
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:				
Frequency Range	RBW	VBW	Detector		
MHz	kHz	kHz			
30 MHz - 3 x F <sub>c</sub>	4*	4*	Peak		


Note: 4 kHz RBW & VBW are not attainable with equipment used and 3 kHz will be used. A bandwidth correction factor of  $10 * \log (4 \text{ kHz} / 3 \text{ kHz})$ , (1.25 dB) will be added to the final results.

Applicant:	Itronix Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.
						Page 52 of 69

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## I.6. SETUP DRAWING

Figure I.6-1 - Setup Drawing

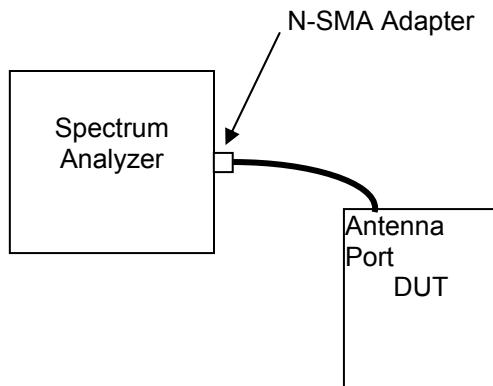


## I.7. DUT OPERATING DESCRIPTION

Measurements were made with the DUT in the receive mode for the PCS band mid channel (CH661 1880 MHz)

## I.8. TEST RESULTS

### I.8.1. Receiver Spurious Emissions

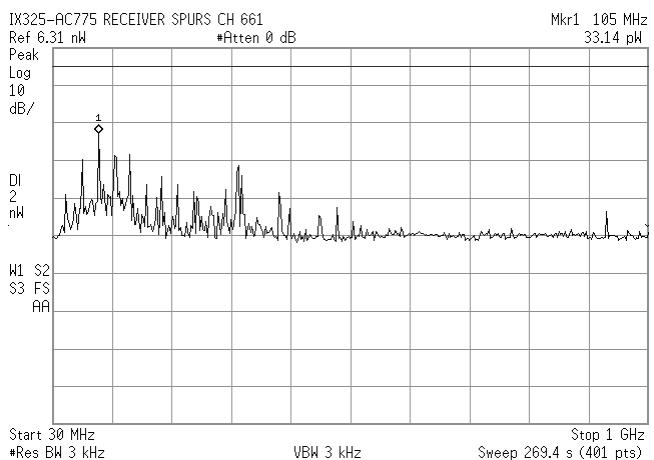

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 33.14 pW with RBW of 3 kHz:


$$\text{Corrected Peak Emission (pW)} = 33.14 \text{ pW} * 4/3$$

$$= 44.18 \text{ pW for RBW of 4 kHz}$$

$$= 0.0442 \text{ nW}$$

$$\text{Margin (nW)} = 2 \text{ nW} - .044 \text{ nW}$$

$$= 1.956 \text{ nW}$$

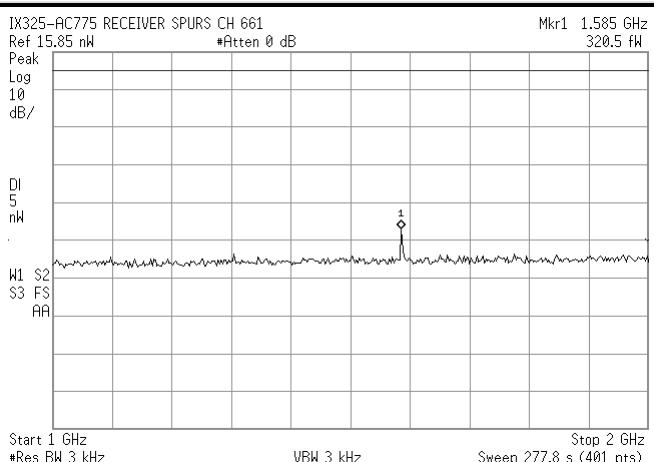

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 320.5 fW with RBW of 3 kHz:


$$\text{Corrected Peak Emission} = 320.5 \text{ fW} * 4/3$$

$$= 427.3 \text{ fW for RBW of 4 kHz}$$

$$= 0.00043 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0004 \text{ nW}$$

$$= 4.9996 \text{ nW}$$

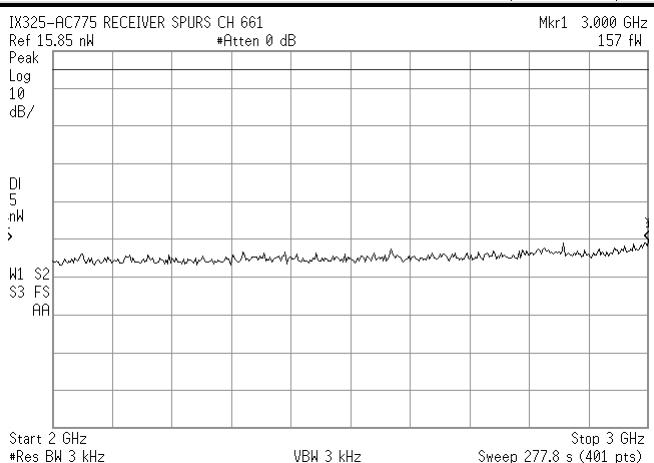

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 157 fW with RBW of 3 kHz:

$$\text{Corrected Peak Emission (pW)} = 157 \text{ fW} * 4/3$$

$$= 209 \text{ fW for RBW of 4 kHz}$$


$$= 0.00021 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0002 \text{ nW}$$

$$= 4.9998 \text{ nW}$$



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

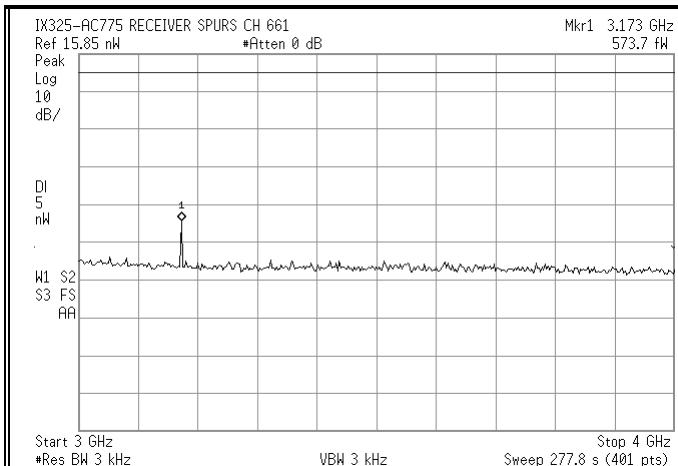

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 573.7 fW with RBW of 3 KHz:


$$\text{Corrected Peak Emission (pW)} = 573.7 \text{ fW} * 4/3$$

$$= 764.9 \text{ fW for RBW of 4 kHz}$$

$$= 0.00077 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0008 \text{ nW}$$

$$= 4.9992 \text{ nW}$$

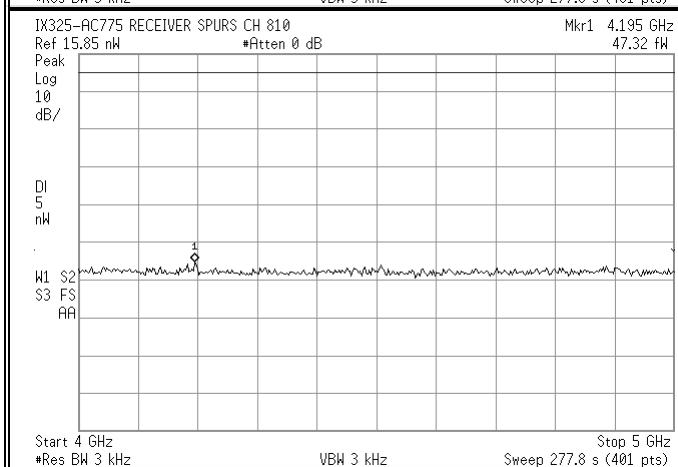

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 47.32 fW with RBW of 3 KHz:


$$\text{Corrected Peak Emission (pW)} = 47.32 \text{ fW} * 4/3$$

$$= 63.09 \text{ fW for RBW of 4 kHz}$$

$$= 0.00006 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0001 \text{ nW}$$

$$= 4.9999 \text{ nW}$$

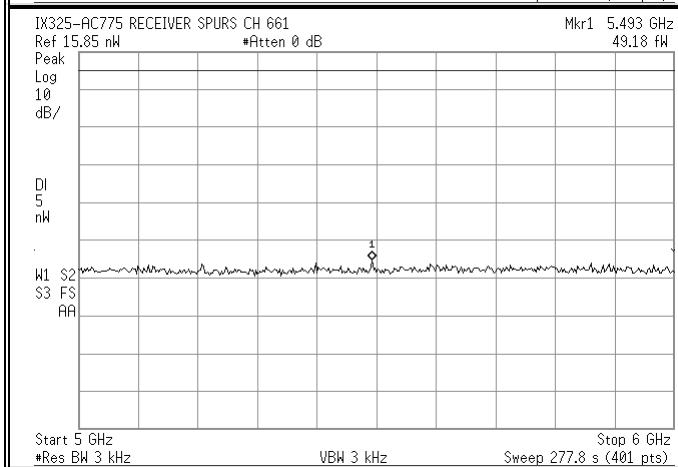

#### Calculations

$$\text{Emission (dBm)} = 10 * \log (\text{Emission (mW)})$$

$$\text{BW Correction} = 10 * \log (4 \text{ kHz} / 3 \text{ kHz})$$

In linear terms:

$$\text{Emission (pW)} = \text{Emission (pW)} * (4 \text{ kHz} / 3 \text{ kHz})$$

For a Peak Emission of 49.18 fW with RBW of 3 KHz:

$$\text{Corrected Peak Emission} = 49.18 \text{ fW} * 4/3$$

$$= 65.6 \text{ fW for RBW of 4 kHz}$$

$$= 0.00007 \text{ nW}$$

$$\text{Margin (nW)} = 5 \text{ nW} - .0001 \text{ nW}$$

$$= 4.9999 \text{ nW}$$

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 55 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### I.9. PASS/FAIL

In reference to the results outlined in I.9, the DUT passes the requirements as stated in the reference standards.

IC RSS-133 §6.7 (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per 4kHz spurious frequency in the band 30 – 1000 MHz or 5 nanowatts above 1 GHz.

The results set forth in this section meet the requirement with a margin of at least 1.96 nW.

#### I.10. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

26May05

Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 56 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix J - PCS Band Effective Isotropic Radiated Power Measurement

## J.1. REFERENCES

<b>Normative Reference Standard</b>	FCC CFR 47 §24.232(b)
<b>Procedure Reference</b>	ANSI/TIA/EIA-603-C

## 1.2 LIMITS

FCC CFR 47  
§24.232 (b) *(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.*

### 1.3 ENVIRONMENTAL CONDITIONS

<b>Temperature</b>	27 +/- 2 °C
<b>Humidity</b>	33 +/- 2 %
<b>Barometric Pressure</b>	96 +/- 0.2 kPa

#### 1.4 EQUIPMENT LIST

## RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00072	EMCO	2075	Mini-mast	na	na
2	00073	EMCO	2080	Turn Table	na	na
3	00071	EMCO	2090	Multi-Device Controller	na	na
4	00035	ETS	3115	Double Ridged Guide Antenna (Rx)	24Mar04	24Mar06
5	00051	HP	8566B	Spectrum Analyzer	12Apr05	12Apr06
6	00047	HP	85685A	Preselector	13Apr05	13Apr06
7	00120	Celltech	n/a	Microwave Cable (RX)	25Mar05	25Mar06
8	00121	Andrew	FSJ4-50B	Microwave Cable (RX)	25Mar05	25Mar06
9	00130	Andrew	FSJ1-50A	Microwave Cable (RX)	25Mar05	25Mar06

#### ADDITIONAL SUBSTITUTION EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
10	00034	ETS	3115	Horn Antenna (Tx)	24Mar04	24Mar06
11	00131	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
12	00127	Andrew	FSJ4-50B	Microwave Cable (TX)	na	na
13	00131	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
14	00006	R & S	SMR-20	Signal Generator	12Apr05	12Apr06
15	00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
16	00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
17	00013	Gigatronics	80701A	Power Sensor	11Oct04	11Oct05
18	00102	Pasternack	PE7015-3110	30 dB attenuator	na*	na*
19	00078	Pasternack	PE2214-20	Directional Coupler	na*	na*
20	00142	HP	8491A	20 dB attenuator	na*	na*

\*Attenuation offset in power meter setup

<b>Applicant:</b>	<b>ITRONIX Corporation</b>	<b>FCC ID:</b>	<b>KBCIX325A775IWLB</b>	<b>IC ID:</b>	<b>1943A-IX325e</b>	 <b>ITRONIX</b>
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>		<b>Model:</b>	<b>IX325A775IWLB</b>			
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					Page 57 of 69

### J.5. MEASUREMENT EQUIPMENT SETUP

MEASUREMENT EQUIPMENT CONNECTIONS	The measurement equipment was connected as shown in J.6.			
MEASUREMENT EQUIPMENT SETTINGS	The spectrum analyzer was set to the following settings:			
	Frequency Range	RBW	VBW	Detector
	MHz	MHz	MHz	
	1000 - 2000	1	1	Peak

### J.6. SETUP DRAWING

Figure J.6-1 - Field Strength Setup Drawing


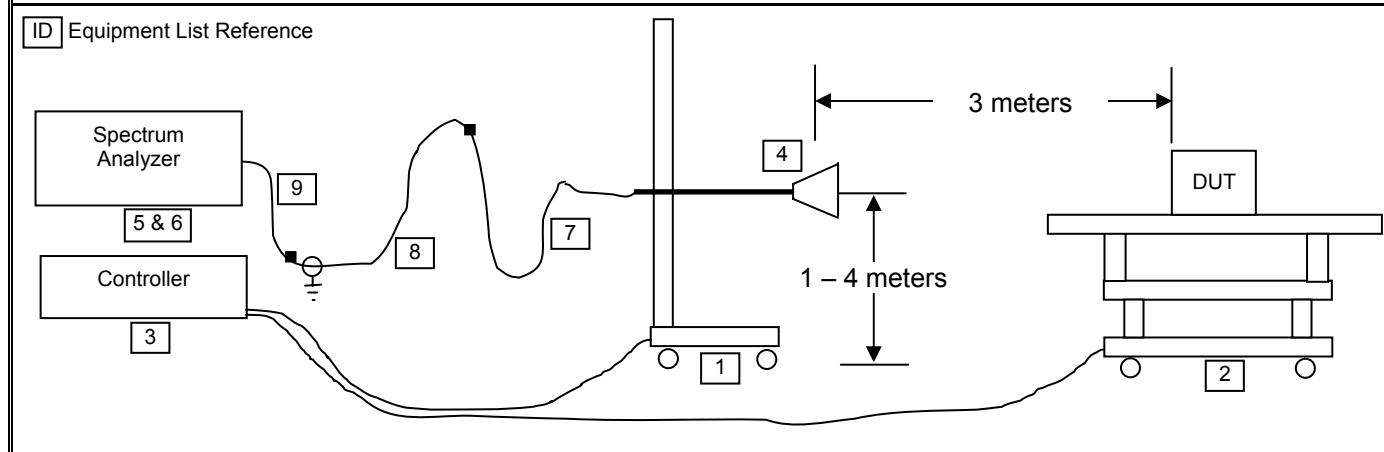


Figure J.6-2 - Substitution Setup Drawing

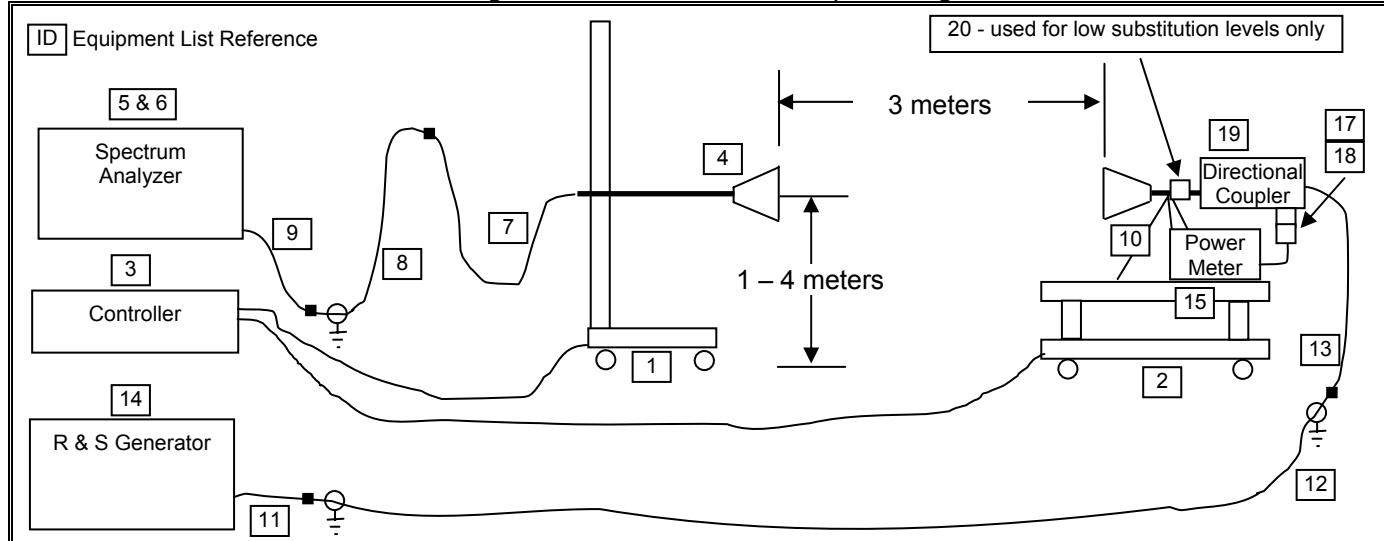

<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### J.7. SETUP PHOTOGRAPHS

Photograph J.7-1 - DUT in Highest PCS Carrier Configuration



#### J.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the PCS band at maximum power levels, and the DUT configured as described in Section 5 of this report.



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### J.9. TEST RESULTS

Celltech		Project Number: 040505KBC-T628-E24G		Standard: FCC24.232b								
Company: Itronix		Test Start Date: 26-May-05		Test End Date: 27-Jun-05								
IX325 with AC775 Carrier Field Strengths												
Polarity	Distance	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	Carrier EIRP Level	EIRP Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	Watts	dBm	dB
H	3	Horn SN6267	512	1850.20	131.06	97.72	24.47	6.55	31.02	1.26	33.01	2.00
V	3	Horn SN6267	512	1850.20	123.88	90.54	18.22	6.55	24.77	0.300	33.01	2.00
H	3	Horn SN6267	661	1880.00	128.84	95.30	22.70	6.58	29.28	0.847	33.01	2.00
V	3	Horn SN6267	661	1880.00	123.38	89.84	18.32	6.58	24.90	0.309	33.01	2.00
H	3	Horn SN6267	810	1909.80	128.55	94.84	22.72	6.61	29.33	0.857	33.01	2.00
V	3	Horn SN6267	810	1909.80	123.15	89.44	17.99	6.61	24.60	0.288	33.01	2.00

Note:  
Double Ridged Guide Antenna used for substitution

Formulae:  
EIRP Level (dBm) = Power Applied to Antenna (dBm) + Antenna Gain (dBi)  
Margin (dB) = Limit (dBm) – Level (dBm)

### J.10. PASS/FAIL

In reference to the results outlined in J.9, the DUT passes the requirements as stated in the reference standards as follows:

FCC 24.232 (b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.....

A maximum EIRP of 31.02 dBm (1.26 Watts) was measured when Channel 512 was transmitting through the attached swivel monopole antenna.

### J.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

Applicant:	ITRONIX	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 60 of 69



Test Report Serial No.:	060605KBC-T646-E24G	Report Rev. No.:	Revision 0
Test Date(s):	24May05 - 27Jun05	Report Issue Date:	07Dec05
Test Standard(s):	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
Lab Registration(s):	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## Appendix K - PCS Band Radiated TX Spurious Emissions Measurement

### K.1. REFERENCES

Normative Reference Standard	FCC CFR 47 §24.238(a)
Procedure Reference	ANSI/TIA/EIA-603-C

### K.2. LIMITS

FCC CFR 47 §24.238	(a) <i>Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</i>
--------------------	---

### K.3. ENVIRONMENTAL CONDITIONS

Temperature	27 +/- 2 °C
Humidity	33 +/- 2 %
Barometric Pressure	96 +/- 0.2 kPa

### K.4. EQUIPMENT LIST

#### RECEIVING EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
1	00072	EMCO	2075	Mini-mast	na	na
2	00073	EMCO	2080	Turn Table	na	na
3	00071	EMCO	2090	Multi-Device Controller	na	na
4	00035	ETS	3115	Double Ridged Guide Antenna (Rx)	24Mar04	24Mar06
5	00161/00166	Waveline	899/801-KF	Standard Gain Horn Antenna (Rx)	n/a	n/a
6	00015	HP	E4408B	Spectrum Analyzer	24Jan05	24Jan06
7	00051	HP	8566B	Spectrum Analyzer	12Apr05	12Apr06
8	00047	HP	85685A	Preselector	13Apr05	13Apr06
9	00120	Celltech	n/a	Microwave Cable (RX)	25Mar05	25Mar06
10	00121	Andrew	FSJ4-50B	Microwave Cable (RX)	25Mar05	25Mar06
11	00130	Andrew	FSJ1-50A	Microwave Cable (RX)	25Mar05	25Mar06
12	00115	Miteq	JS4-00102600-35-5A	Low Noise Amplifier	08Jun05	08Jun06
13	00093	Microtronics	HPM50111	High Pass Filter	8Jun04	8Jun06
14	00119	INMAT	18AH-10	10dB attenuator	8Jun04	8Jun06

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.						This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.
						Page 61 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### ADDITIONAL SUBSTITUTION EQUIPMENT

ID	ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	LAST CAL	CAL DUE
15	00034	ETS	3115	Horn Antenna (Tx)	24Mar04	24Mar06
16	00162/00165	Waveline	899/801-KF	Standard Gain Horn Antenna (Tx)	na	na
17	00131	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
18	00127	Andrew	FSJ4-50B	Microwave Cable (TX)	na	na
19	00133	Andrew	FSJ1-50A	Microwave Cable (TX)	na	na
20	00006	R & S	SMR-20	Signal Generator	12Apr05	12Apr06
21	00007	Gigatronics	8652A	Power Meter	18Oct04	18Oct05
22	00011	Gigatronics	80701A	Power Sensor	08Oct04	08Oct05
23	00013	Gigatronics	80701A	Power Sensor	11Oct04	11Oct05
24	00102	Pasternack	PE7015-3110	30 dB attenuator	na*	na*
25	00078	Pasternack	PE2214-20	Directional Coupler	na*	na*
26	00142	HP	8491A	20 dB attenuator	na*	na*

\* Attenuation offset in power meter setup

#### K.5. MEASUREMENT EQUIPMENT SETUP

<b>MEASUREMENT EQUIPMENT CONNECTIONS</b>	The measurement equipment was connected as shown in K.6. A number of measurement equipment configurations were used to cover the applicable frequency ranges. The configurations for each range are as follows:				
	Frequency Range	LNA Asset #	Filter/Attenuator Asset #	Rx Antenna Asset #	Tx Antenna Asset #
	1 GHz – 2 GHz	none	none	00035	00034
	2 GHz – 3 GHz	00115	00119	00035	00034
	3 GHz – 18 GHz	00115	00093	00035	00034
<b>MEASUREMENT EQUIPMENT SETTINGS</b>	18 GHz – 25 GHz	00115	none	000161/00166	000162/00165
	The spectrum analyzer was set to the following settings:				
	Frequency Range	RBW	VBW	Detector	
	MHz	kHz	kHz		
	1 GHz – 25 GHz	1000	1000	Peak	

<b>Applicant:</b>	ITRONIX Corporation	<b>FCC ID:</b>	KBCIX325A775IWLBT	<b>IC ID:</b>	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>				<b>Model:</b>	IX325A775IWLBT	
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 62 of 69

## K.6. SETUP DRAWING

Figure K.6-1 - Field Strength Setup Drawing


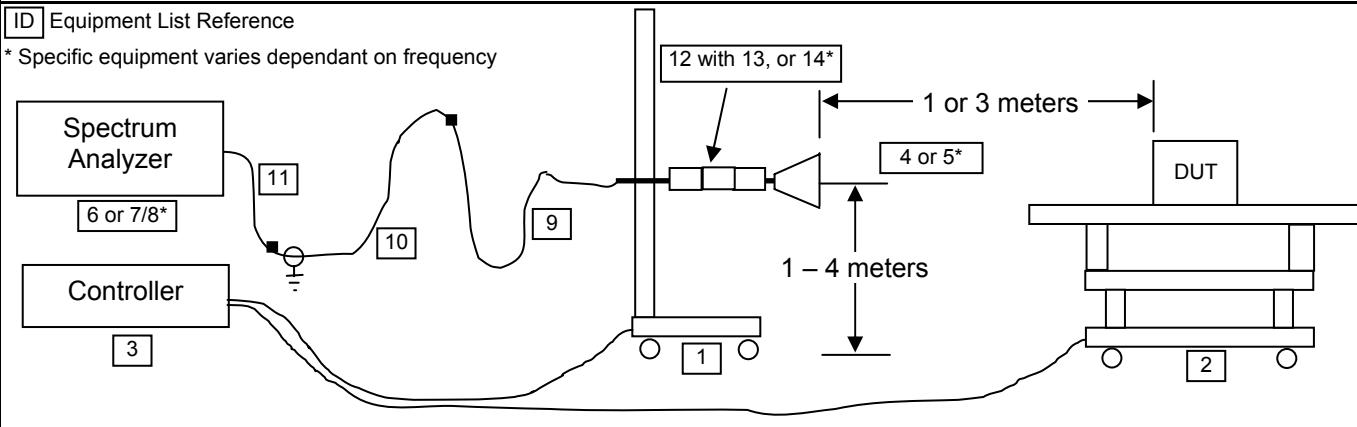


Figure K.6-2 - Signal Substitution Setup Drawing



### K.7. SETUP PHOTOGRAPHS

Photograph K.7-1 - Vertical Bilog PCS Band Radiated Emissions 3-meter Setup

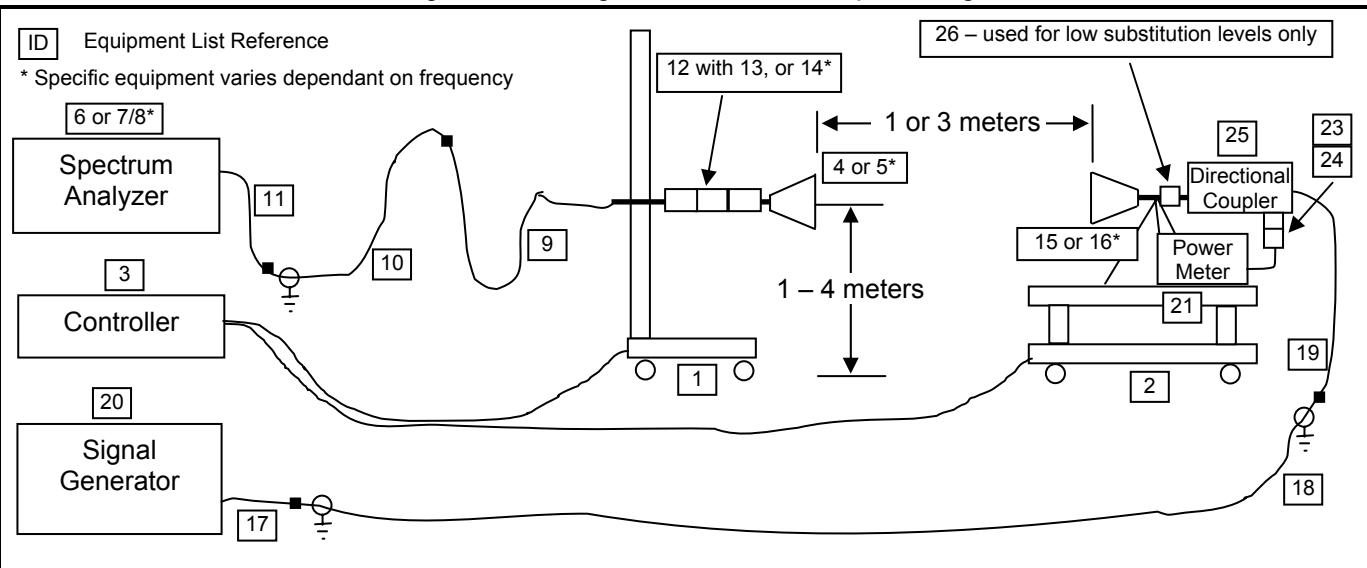

Photograph K.7-2 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 3-meter Setup



Photograph K.7-3 - Vertical 3115 Horn and LNA PCS Band Radiated Emissions 1-meter Setup



### K.8. DUT OPERATING DESCRIPTION

Measurements were made for the low, mid and high GSM channels transmitting in the PCS band at maximum power levels as described in Section 5 of this report. During these measurements, the antenna was replaced with a 50-ohm load. The conducted emissions described in Appendix H supplement the results described in this appendix.



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## K.9. TEST RESULTS

The spurious measurements detailed in this section are referenced to the carrier levels set forth in Appendix E of this report:

### K.9.1. Spurious Emissions

## Channel 512

Polarity	Distance m	Substitution Antenna Type	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Signal Level (uncorrected) dBuV	Power Applied to Antenna dBm	Antenna Gain dBi	EIRP Emission Level dBm	Limit dBm or dBuV/m*	Margin dB	Pass/Fail
H	3	Horn SN6267	CH512	2329.00	47.90	35.90	-60.52	7.42	-53.10	-13.00	40.10	PASS
H	3	none	CH512	2494.00	48.80					82.2*	33.4*	PASS*
H	3	none	CH512	3169.75	40.55					82.2*	41.7*	PASS*
H	3	none	CH512	4762.25	44.72					82.2*	37.5*	PASS*
H	3	none	CH512	5273.25	59.97					82.2*	22.3*	PASS*
H	3	Horn SN6267	CH512	3700.00	56.35	47.20	-57.21	8.06	-49.15	-13.00	36.15	PASS
H	3	Horn SN6267	CH512	5549.75	47.25	33.50	-68.54	8.66	-59.88	-13.00	46.88	PASS
H	3	Horn SN6267	CH512	7399.50	57.73	40.10	-52.43	8.98	-43.45	-13.00	30.45	PASS
H	3	Horn SN6267	CH512	9251.00	56.38	35.40	-48.94	9.05	-39.89	-13.00	26.89	PASS
H	1	Horn SN6267	CH512	11101.20	72.25	43.80	-43.09	10.44	-32.65	-13.00	19.65	PASS
H	1	Horn SN6267	CH512	12951.40	68.47	43.00	-39.57	10.65	-28.92	-13.00	15.92	PASS
H	1	Horn SN6267	CH512	14801.60	73.12	41.10	-51.76	11.06	-40.70	-13.00	27.70	PASS
H	1	none	CH512	18502.00	72.35					91.8*	19.4*	PASS*
V	3	Horn SN6267	CH512	1121.00	62.11	32.00	-47.13	4.31	-42.83	-13.00	29.83	PASS
V	3	none	CH512	1132.00	67.46					82.2*	14.8*	PASS*
V	3	none	CH512	1586.00	67.75					82.2*	14.5*	PASS*
V	3	none	CH512	2625.00	67.95					82.2*	14.3*	PASS*
V	3	Horn SN6267	CH512	2685.00	53.83	40.50	-63.15	7.80	-55.35	-13.00	42.35	PASS
V	3	none	CH512	3169.75	39.85					82.2*	42.4*	PASS*
V	3	none	CH512	4762.25	44.22					82.2*	38.0*	PASS*
V	3	none	CH512	9251.00	71.58					82.2*	10.6*	PASS*
V	3	Horn SN6267	CH512	3700.40	51.96	42.80	-57.89	8.06	-49.83	-13.00	36.83	PASS
V	3	Horn SN6267	CH512	7400.80	56.03	38.40	-59.06	8.98	-50.08	-13.00	37.08	PASS
V	3	Horn SN6267	CH512	5550.60	51.86	38.10	-55.18	8.66	-46.52	-13.00	33.52	PASS
V	1	Horn SN6267	CH512	9251.00	71.58	50.60	-23.86	9.05	-14.81	-13.00	1.81	PASS
V	1	Horn SN6267	CH512	11101.20	68.55	40.10	-47.04	10.44	-36.60	-13.00	23.60	PASS
V	1	Horn SN6267	CH512	12951.40	69.67	44.20	-41.90	10.65	-31.25	-13.00	18.25	PASS
V	1	Horn SN6267	CH512	14801.60	72.62	40.60	-51.24	11.06	-40.18	-13.00	27.18	PASS
V	1	none	CH512	18502.00	70.60					91.8*	21.2*	PASS*

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

## Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) = SQRT(30 \* P / r<sup>2</sup>) where P is the total transmitted power (W), r is measurement distance (m)

Applicant:	ITronix Corporation	FCC ID:	KBCIX325A775IWLB	IC ID:	1943A-IX325e	 <b>ITRONIX</b>
			Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem	Model:	IX325A775IWLB	
2005 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 65 of 69	



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### Channel 661

Polarity	Distance	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Emission Level	Limit	Margin	Pass/Fail
H	3	Horn SN6267	CH661	2326.00	47.39	35.40	-62.67	7.42	-55.25	-13.00	42.25	PASS
H	3	none	CH661	2629.00	52.67					82.2*	29.6*	PASS*
H	3	Horn SN6267	CH661	3759.96	53.36	44.00	-51.00	8.05	-42.95	-13.00	29.95	PASS
H	3	Horn SN6267	CH661	5639.89	44.22	30.30	-69.40	8.77	-60.63	-13.00	47.63	PASS
H	3	Horn SN6267	CH661	7521.20	54.52	36.60	-67.08	8.92	-58.16	-13.00	45.16	PASS
H	3	Horn SN6267	CH661	9400.16	60.46	39.10	-49.10	9.20	-39.90	-13.00	26.90	PASS
H	3	none	CH661	3177.16	40.17					82.2*	42.1*	PASS*
H	3	none	CH661	4759.48	44.91					82.2*	37.3*	PASS*
H	3	none	CH661	5269.20	68.65					82.2*	13.6*	PASS*
H	1	Horn SN6267	CH661	11280.00	71.81	42.10	-44.51	10.69	-33.82	-13.00	20.82	PASS
H	1	Horn SN6267	CH661	13160.00	67.39	41.60	-36.27	10.70	-25.57	-13.00	12.57	PASS
H	1	Horn SN6267	CH661	15040.00	77.55	42.75	-26.48	11.29	-15.19	-13.00	2.19	PASS
H	1	Horn SN6267	CH661	16920.00	67.95	37.00	-51.33	11.91	-39.42	-13.00	26.42	PASS
H	1	3160-09	CH661	18800.00	72.49	45.45	-45.45	15.42	-30.03	-13.00	17.03	PASS
V	3	none	CH661	2628.00	58.26					82.2*	24.0*	PASS*
V	3	Horn SN6267	CH661	2686.00	52.03	38.70	-59.28	7.80	-51.48	-13.00	38.48	PASS
V	3	Horn SN6267	CH661	3760.00	59.86	50.50	-48.04	8.05	-39.99	-13.00	26.99	PASS
V	3	Horn SN6267	CH661	5640.00	46.82	32.90	-66.54	8.77	-57.77	-13.00	44.77	PASS
V	3	Horn SN6267	CH661	7520.00	53.43	35.50	-74.56	8.92	-65.64	-13.00	52.64	PASS
V	3	Horn SN6267	CH661	9400.00	55.87	34.50	-46.27	9.20	-37.07	-13.00	24.07	PASS
V	3	none	CH661	4319.50	48.36					82.2*	33.9*	PASS*
V	3	none	CH661	4764.00	51.98					82.2*	30.3*	PASS*
V	3	none	CH661	5763.25	63.00					82.2*	19.2*	PASS*
V	3	none	CH661	3171.50	52.90					82.2*	29.3*	PASS*
V	1	Horn SN6267	CH661	11280.00	69.51	39.80	-46.86	10.69	-36.17	-13.00	23.17	PASS
V	1	Horn SN6267	CH661	13160.00	66.29	40.50	-41.90	10.70	-31.20	-13.00	18.20	PASS
V	1	Horn SN6267	CH661	15040.00	77.25	42.45	-24.97	11.29	-13.68	-13.00	0.68	PASS
V	1	Horn SN6267	CH661	16920.00	68.05	37.10	-46.93	11.91	-35.02	-13.00	22.02	PASS
V	1	3160-09	CH661	18800.00	72.29	45.25	-45.25	15.42	-29.83	-13.00	16.83	PASS

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 66 of 69					



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

### Channel 810

Polarity	Distance	Substitution Antenna Type	Carrier Channel	Frequency	Corrected Field Strength	Substituted SA Signal Level (uncorrected)	Power Applied to Antenna	Antenna Gain	EIRP Carrier Level	Limit	Margin	Pass/Fail
	m			MHz	dBuV/m	dBuV	dBm	dBi	dBm	dBm or dBuV/m*	dB	
H	3	none	CH810	2899.00	58.71					82.2*	23.5*	PASS*
H	3	Horn SN6267	CH810	2326.00	47.79	35.80	-60.62	7.42	-53.20	-13.00	40.20	PASS
H	3	Horn SN6267	CH810	3819.60	56.11	46.50	-51.75	8.04	-43.71	-13.00	30.71	PASS
H	3	Horn SN6267	CH810	5729.40	47.40	33.40	-57.87	8.88	-48.99	-13.00	35.99	PASS
H	3	Horn SN6267	CH810	7639.20	57.16	39.05	-51.16	9.01	-42.15	-13.00	29.15	PASS
H	3	Horn SN6267	CH810	9549.00	57.50	35.90	-40.28	9.36	-30.92	-13.00	17.92	PASS
H	3	none	CH810	4762.25	50.92					82.2*	31.3*	PASS*
H	3	none	CH810	5273.25	55.37					82.2*	26.9*	PASS*
H	3	none	CH810	5768.50	53.19					82.2*	29.0*	PASS*
H	1	Horn SN6267	CH810	11458.80	67.37	38.50	-48.18	10.94	-37.24	-13.00	24.24	PASS
H	1	Horn SN6267	CH810	13368.60	68.90	40.80	-36.81	10.82	-25.99	-13.00	12.99	PASS
H	1	Horn SN6267	CH810	15278.40	79.49	41.20	-60.73	12.44	-48.29	-13.00	35.29	PASS
H	1	Horn SN6267	CH810	17188.20	71.91	42.20	-27.56	11.10	-16.46	-13.00	3.46	PASS
H	1	3160-09	CH810	19098.00	72.40	45.35	-45.35	15.56	-29.79	-13.00	16.79	PASS
V	3	Horn SN6267	CH810	2629.00	47.07	34.00	-64.03	7.80	-56.23	-13.00	43.23	PASS
V	3	none	CH810	2681.00	54.61					82.2*	27.6*	PASS*
V	3	none	CH810	2738.00	48.00					82.2*	34.2*	PASS*
V	3	Horn SN6267	CH810	3819.60	58.96	49.35	-48.71	8.04	-40.67	-13.00	27.67	PASS
V	3	Horn SN6267	CH810	5729.40	56.10	42.10	-57.04	8.88	-48.16	-13.00	35.16	PASS
V	3	Horn SN6267	CH810	7639.20	56.66	38.55	-54.02	9.01	-45.01	-13.00	32.01	PASS
V	3	Horn SN6267	CH810	9549.00	57.20	35.60	-43.16	9.36	-33.80	-13.00	20.80	PASS
V	3	none	CH810	4762.25	52.12					82.2*	30.1*	PASS*
V	3	none	CH810	5766.75	57.83					82.2*	24.4*	PASS*
V	3	none	CH810	6342.50	57.38					82.2*	24.8*	PASS*
V	1	Horn SN6267	CH810	11458.80	70.82	41.95	-40.80	10.94	-29.86	-13.00	16.86	PASS
V	1	Horn SN6267	CH810	13368.60	70.75	42.65	-37.02	10.82	-26.20	-13.00	13.20	PASS
V	1	Horn SN6267	CH810	15278.40	79.59	41.30	-60.62	12.44	-48.18	-13.00	35.18	PASS
V	1	Horn SN6267	CH810	17188.20	72.41	42.70	-26.19	11.10	-15.09	-13.00	2.09	PASS
V	1	3160-09	CH810	19098.00	72.30	45.25	-45.25	15.56	-29.69	-13.00	16.69	PASS

\*Margin and Pass/Fail based on measured field strengths applied against a theoretical field strength limit.

#### Note:

The emissions reported above represent the highest emissions or noise floor measured within the frequency band of 30MHz and the 10<sup>th</sup> harmonic of the carrier with field strengths within 20 dB of the theoretical limit. All other emissions attributed to the EUT had field strengths greater than 20 dB below the theoretical limit and substitutions were not made.

#### Formulae:

EIRP Emission Level (dBm) = Power applied to antenna (dBm) + Antenna Gain (dBi)

Margin (dB) = Limit (dBm) – EIRP Emission Level (dBm) or Theoretical Limit (dBuV/m) – Corrected Field Strength (dBuV/m)

Theoretical Limit (V/m) =  $\text{SQRT}(30 * P / r^2)$  where P is the total transmitted power (W), r is measurement distance (m)

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem				Model:	IX325A775IWLBT	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 67 of 69					



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

#### K.10. PASS/FAIL

In reference to the results outlined in K.9, the DUT passes the requirements as stated in the reference standards.

FCC CFR 4 §24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The results set forth in this section meet the requirement with a margin of at least 0.68 dB.

#### K.11. SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.

Russell Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.

27Jun05

Date

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem						
2005 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 68 of 69



<b>Test Report Serial No.:</b>	060605KBC-T646-E24G	<b>Report Rev. No.:</b>	Revision 0
<b>Test Date(s):</b>	24May05 - 27Jun05	<b>Report Issue Date:</b>	07Dec05
<b>Test Standard(s):</b>	FCC §2, §22H, §24E	Industry Canada RSS-132, 133	
<b>Lab Registration(s):</b>	FCC Lab Reg. #714830	Industry Canada Lab File #3874	

## END OF DOCUMENT

Applicant:	ITRONIX Corporation	FCC ID:	KBCIX325A775IWLBT	IC ID:	1943A-IX325e	
<b>Rugged Tablet PC with Sierra Wireless AirCard 775 Dual-Band GSM Modem</b>						Model: IX325A775IWLBT
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 69 of 69