



Hermon Laboratories Ltd.  
66 HaTachana str., P.O. Box 23, Binyamina  
3055001, Israel  
Tel. +972 4628 8001  
Fax. +972 4628 8277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (FHSS),  
RSS-247 Issue 3:2023, RSS-Gen Issue 5

FOR:

**Paradox Security Systems  
LTD**

**Door Contact**

**Model: DCT10M**

**FCC ID: KDYDCT10M**

**IC: 2438A-DCT10M**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Test configuration .....	5
6.3	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements .....	7
7.1	20 dB bandwidth .....	7
7.2	Carrier frequency separation .....	10
7.3	Number of hopping frequencies .....	12
7.4	Average time of occupancy .....	18
7.5	Peak output power .....	21
7.6	Field strength of spurious emissions .....	26
7.7	Band edge radiated emissions .....	43
7.8	Antenna requirements .....	47
8	Unintentional emissions .....	48
8.1	Radiated emission measurements .....	48
9	APPENDIX A Test equipment and ancillaries used for tests .....	52
10	APPENDIX B Test equipment correction factors .....	53
11	APPENDIX C Measurement uncertainties .....	56
12	APPENDIX D Test laboratory description .....	57
13	APPENDIX E Specification references .....	58
14	APPENDIX F Abbreviations and acronyms .....	59

## 1 Applicant information

**Client name:** Paradox Security Systems LTD  
**Address:** 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada  
**Telephone:** 450-491-7444  
**Fax:** 450-497-1095  
**E-mail:** alexc@paradox.com  
**Contact name:** Mr. Alex Chaplik

## 2 Equipment under test attributes

**Product name:** Door Contact  
**Product type:** Transceiver  
**Model(s):** DCT10M  
**Serial number:** RYU9MD  
**Hardware version:** 312-4004-140  
**Software release:** V1.00  
**Receipt date** 30-Jul-24

## 3 Manufacturer information

**Manufacturer name:** Paradox Security Systems LTD  
**Address:** 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada  
**Telephone:** 450-491-7444  
**Fax:** 450-497-1095  
**E-Mail:** alexc@paradox.com  
**Contact name:** Mr. Alex Chaplik

## 4 Test details

**Project ID:** 54962  
**Location:** Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 08-Sep-24  
**Test completed:** 11-Nov-24  
**Test specification(s):** FCC 47CFR part 15 subpart C §15.247 (FHSS), RSS-247 Issue 3:2023, RSS-Gen Issue 5

## 5 Tests summary

Test	Status
Section 15.247(a1) / RSS-247 section 5.1(c), 20 dB bandwidth	Pass
Section 15.247(b) / RSS-247 section 5.4(a), Peak output power	Pass
Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
Section 15.247(a1) / RSS-247 section 5.1(b), Frequency separation	Pass
Section 15.247(a1) / RSS-247 section 5.1(c), Number of hopping frequencies	Pass
Section 15.247(a1) / RSS-247 section 5.1(c), Average time of occupancy	Pass
Section 15.247(i)5 / RSS-102 section 2.5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(d) / RSS-247 section 5.5, Emissions at band edges	Pass
Section 15.203 / RSS-Gen section 8.3, Antenna requirements	Pass
Section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required
<b>Unintentional emissions</b>	
Section 15.107/ ICES-003 section 6.1, Class B, Conducted emission at AC power port	Not required
Section 15.109 RSS-Gen section 7.3/ ICES-003 section 6.2, Class B, Radiated emission	Pass

Testing was completed against the relevant requirements of the test standard. The results obtained indicate that the product under test complies with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Sugatov, test engineer, EMC & Radio	08-Sep-24 – 11-Nov-24	
	Mr. M. Filobodchenko, test engineer, EMC & Radio	07-Nov-24 – 11-Nov-24	
	Mrs. N. Lenkina, test engineer, EMC and Radio	10-Oct-24	
Reviewed by:	Mrs. N. Green, test engineer, EMC and Radio	14-Jan-25	
Approved by:	Mr. M. Nikishin, EMC and Radio group leader	21-Jan-25	


## 6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

### 6.1 General information

The EUT is a wireless Door Contact used for alarm system. The EUT operates in 902.25 - 927.55 MHz range. The EUT is powered from internal batteries of 3VDC (2 x 1.5VDC).

### 6.2 Test configuration

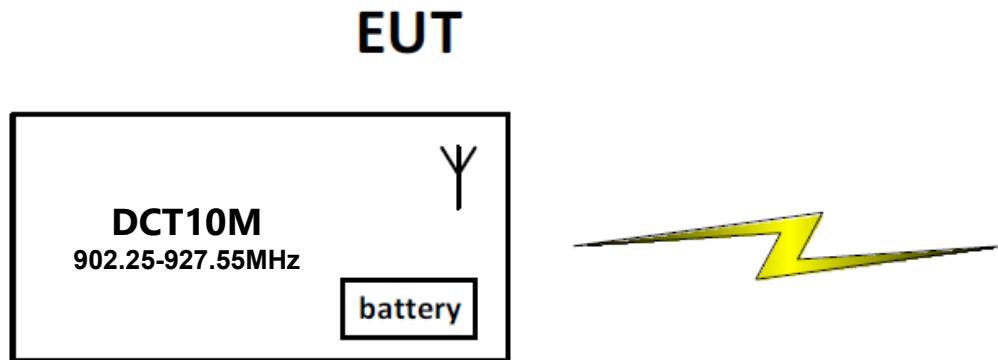



HERMON LABORATORIES

### 6.3 Transmitter characteristics

Type of equipment							
V	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Assigned frequency ranges		902 – 928 MHz					
Operating frequencies		902.25-927.55 MHz					
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm		
		Peak output power			25.20 dBm		
Is transmitter output power variable?		V	No				
		Yes		continuous variable			
				stepped variable with stepsize			
				dB			
				minimum RF power			
				dBm			
				maximum RF power			
Antenna connection							
unique coupling		standard connector		V	integral		
				V	with temporary RF connector		
				V	without temporary RF connector		
Antenna/s technical characteristics							
Type	Manufacturer		Model number		Gain		
Internal	KEXIN		KX-NZTH9141A		0dBi *		
Internal	ONYX		1250868200		0dBi		
Transmitter aggregate data rate/s		19.2 kbps					
Type of modulation		GFSK					
Modulating test signal (baseband)							
Transmitter power source							
V	Battery	Nominal rated voltage	3.0VDC	Battery type	CR123 Lithium		
	DC	Nominal rated voltage					
	AC mains	Nominal rated voltage		Frequency			
Common power source for transmitter and receiver		V	yes		no		
Spread spectrum technique used		V	Frequency hopping (FHSS)				
			Digital transmission system (DTS)				
			Hybrid				
Spread spectrum parameters for transmitters tested per FCC 15.247 only							
FHSS	Total number of hops		50				
	Bandwidth per hop		78.59kHz				
	Max. separation of hops		99.86kHz				

\*Alternativity antenna variant with the same antenna characteristics and only different manufacturer



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth</b>		
<b>Test procedure:</b>	ANSI C63.10, section 7.8.7		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	15-Sep-24		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 41 %	<b>Air Pressure:</b> 1006 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

### 7.1 20 dB bandwidth

#### 7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.
- 7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth								
Test procedure:	ANSI C63.10, section 7.8.7							
Test mode:	Compliance				Verdict:		PASS	
Date(s):	15-Sep-24							
Temperature: 23 °C	Relative Humidity: 41 %			Air Pressure: 1006 hPa	Power: 3.0 VDC			
Remarks:								

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902.0 – 928.0 MHz  
 DETECTOR USED: Peak  
 SWEEP TIME: Auto  
 VIDEO BANDWIDTH: >RBW  
 MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc  
 MODULATING SIGNAL: PRBS  
 FREQUENCY HOPPING: Disabled


Carrier frequency, MHz	Type of modulation	Data rate, kbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	99% occupied bandwidth kHz	Limit, kHz	Margin, kHz	Verdict
<b>Low frequency</b>								
902.25	GFSK	19.2	N/A	78.59	77.403	250	-171.41	Pass
<b>Mid frequency</b>								
914.95	GFSK	19.2	N/A	78.55	77.354	250	-171.45	Pass
<b>High frequency</b>								
927.55	GFSK	19.2	N/A	77.58	76.492	250	-172.42	Pass

## Reference numbers of test equipment used

HL 4136	HL 5376	HL 5645	HL 5838	HL 5933			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

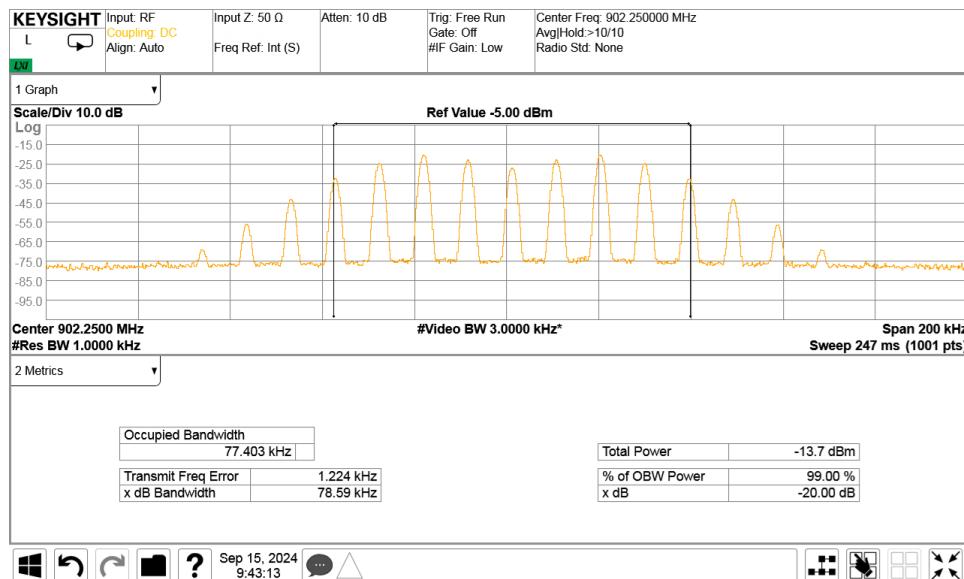




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2


Date of Issue: 10-Apr-25

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth			
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance		
Date(s):	15-Sep-24		
Temperature: 23 °C	Relative Humidity: 41 %	Air Pressure: 1006 hPa	Power: 3.0 VDC
Remarks:			

### Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

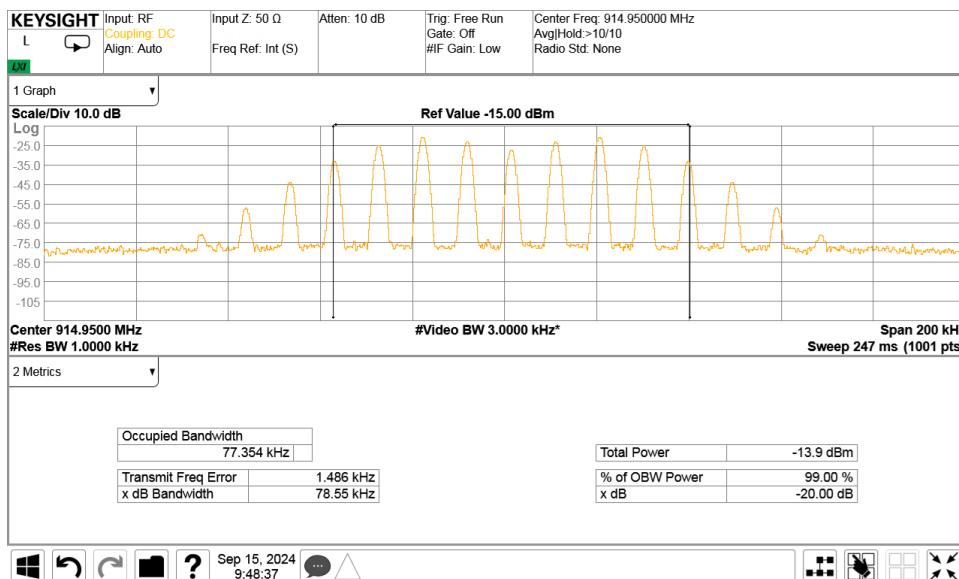

### Plot 7.1.3 The 20 dB bandwidth test result at high frequency

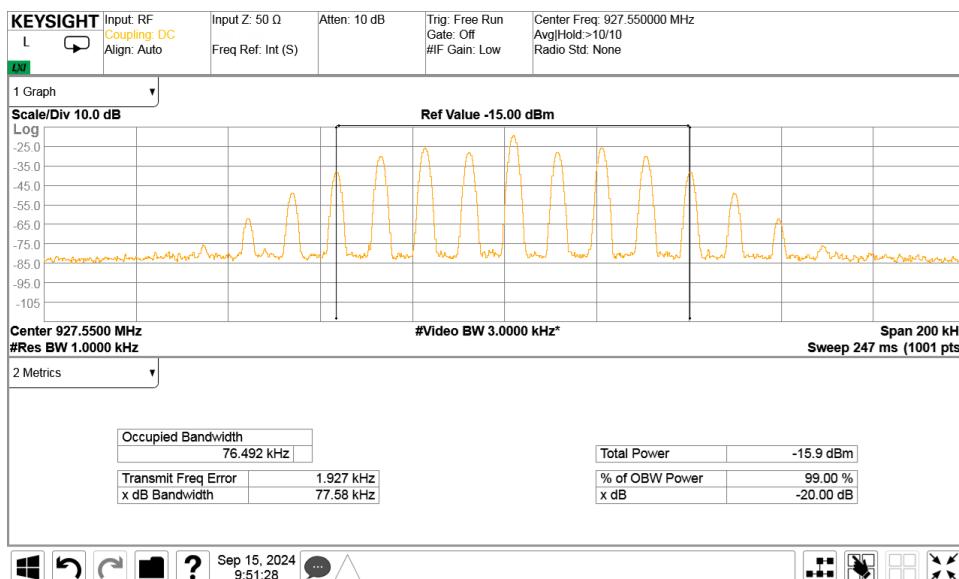



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation			
<b>Test procedure:</b> ANSI C63.10, section 7.8.2"			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 30-Oct-24			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

## 7.2 Carrier frequency separation

### 7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation	
	Output power 30 dBm	Output power 21 dBm
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5		
5725.0 – 5850.0		

### 7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2  
Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation			
<b>Test procedure:</b> ANSI C63.10, section 7.8.2"			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 30-Oct-24			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

**Table 7.2.2 Carrier frequency separation test results**

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz  
 MODULATION: GFSK  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH:  $\geq 1\%$  of the span  
 VIDEO BANDWIDTH:  $\geq$  RBW  
 FREQUENCY HOPPING: Enabled  
 20 dB BANDWIDTH: 78.59 kHz


Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
99.86	78.6	-21.26	Pass

\* - Margin = Carrier frequency separation – specification limit.

#### Reference numbers of test equipment used

HL 4135	HL 4355					
---------	---------	--	--	--	--	--

Full description is given in Appendix A.

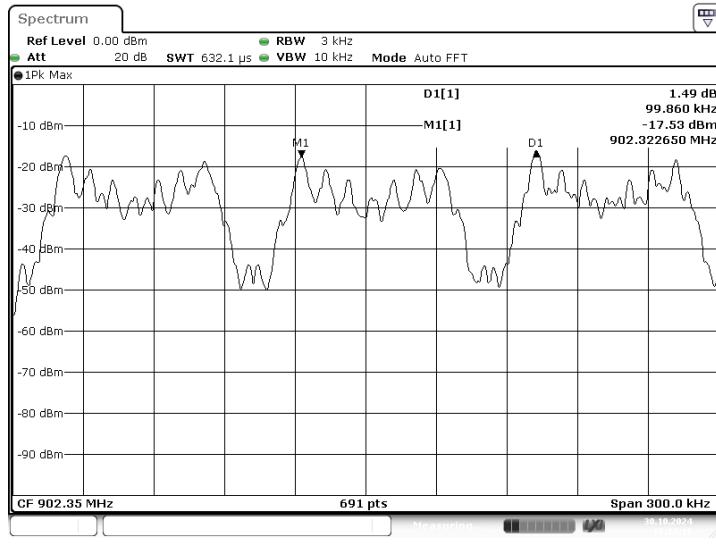**Plot 7.2.1 Carrier frequency separation**



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies</b>		
<b>Test procedure:</b>	ANSI C63.10, section 7.8.2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	30-Oct-24		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

## 7.3 Number of hopping frequencies

### 7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
<b>Test procedure:</b> ANSI C63.10, section 7.8.2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 30-Oct-24			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

**Table 7.3.2 Hopping frequencies test results**

**ASSIGNED FREQUENCY:** 902.0 – 928.0 MHz  
**MODULATION:** GFSK  
**DETECTOR USED:** Peak  
**RESOLUTION BANDWIDTH:**  $\geq 1\%$  of the span  
**VIDEO BANDWIDTH:**  $\geq$  RBW  
**FREQUENCY HOPPING:** Enabled


Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
254	50	-204	Pass

\* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

**Reference numbers of test equipment used**

HL 4135	HL 4355					
---------	---------	--	--	--	--	--

Full description is given in Appendix A.

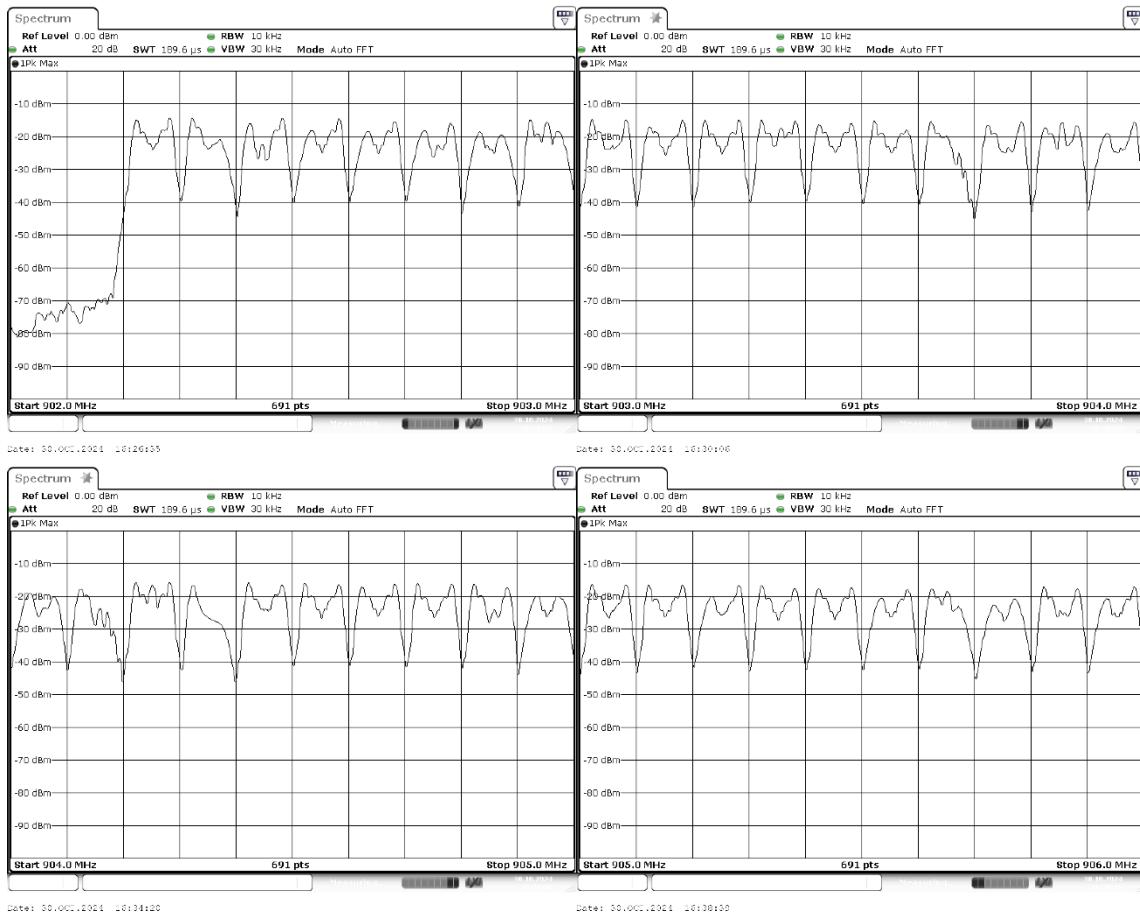**Plot 7.3.1 Number of hopping frequencies**




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance		
Date(s):	30-Oct-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1009 hPa	Power: 3.0 VDC
Remarks:			

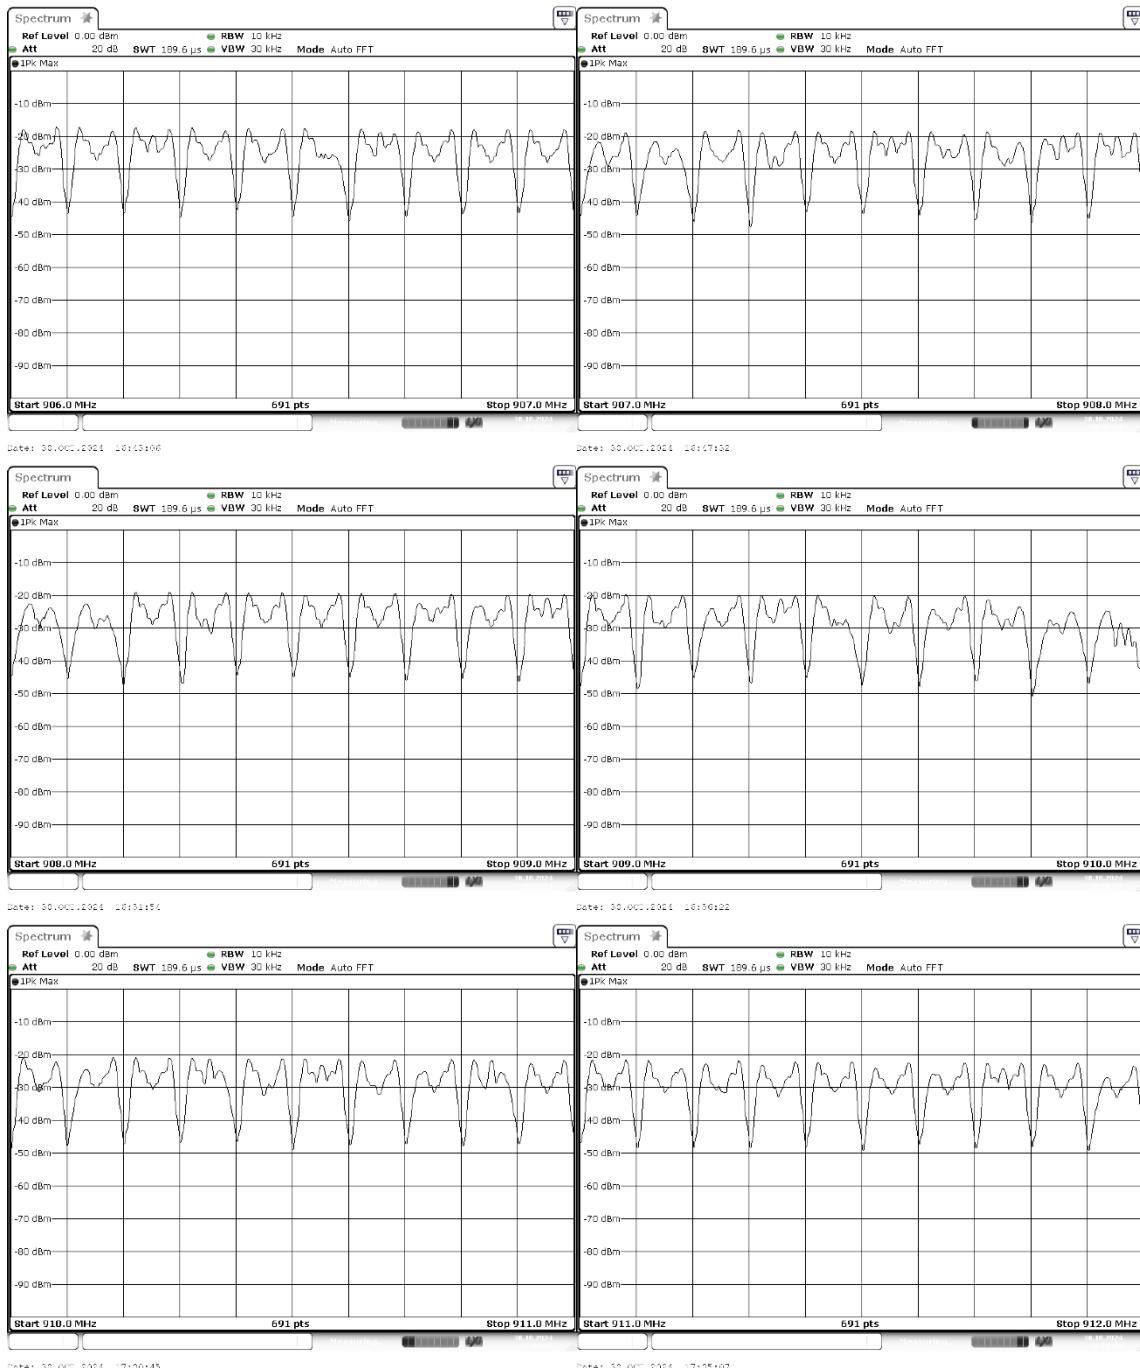




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies			
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance		
Date(s):	30-Oct-24		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1009 hPa	Power: 3.0 VDC
Remarks:			

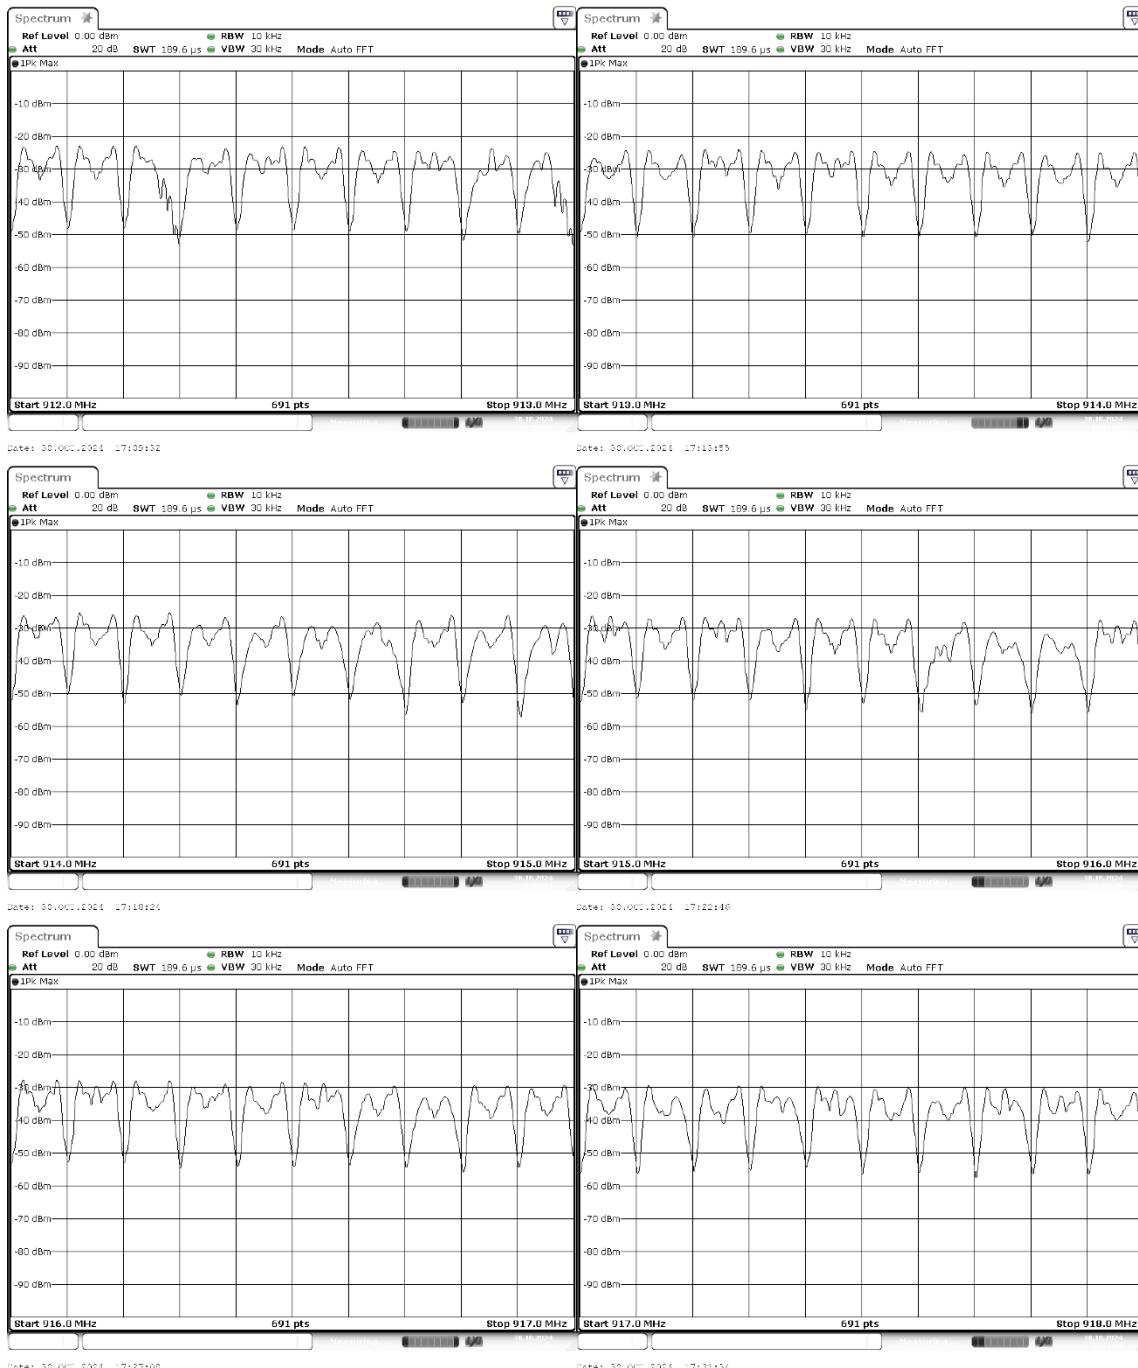




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies</b>			
<b>Test procedure:</b>	ANSI C63.10, section 7.8.2		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	30-Oct-24		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

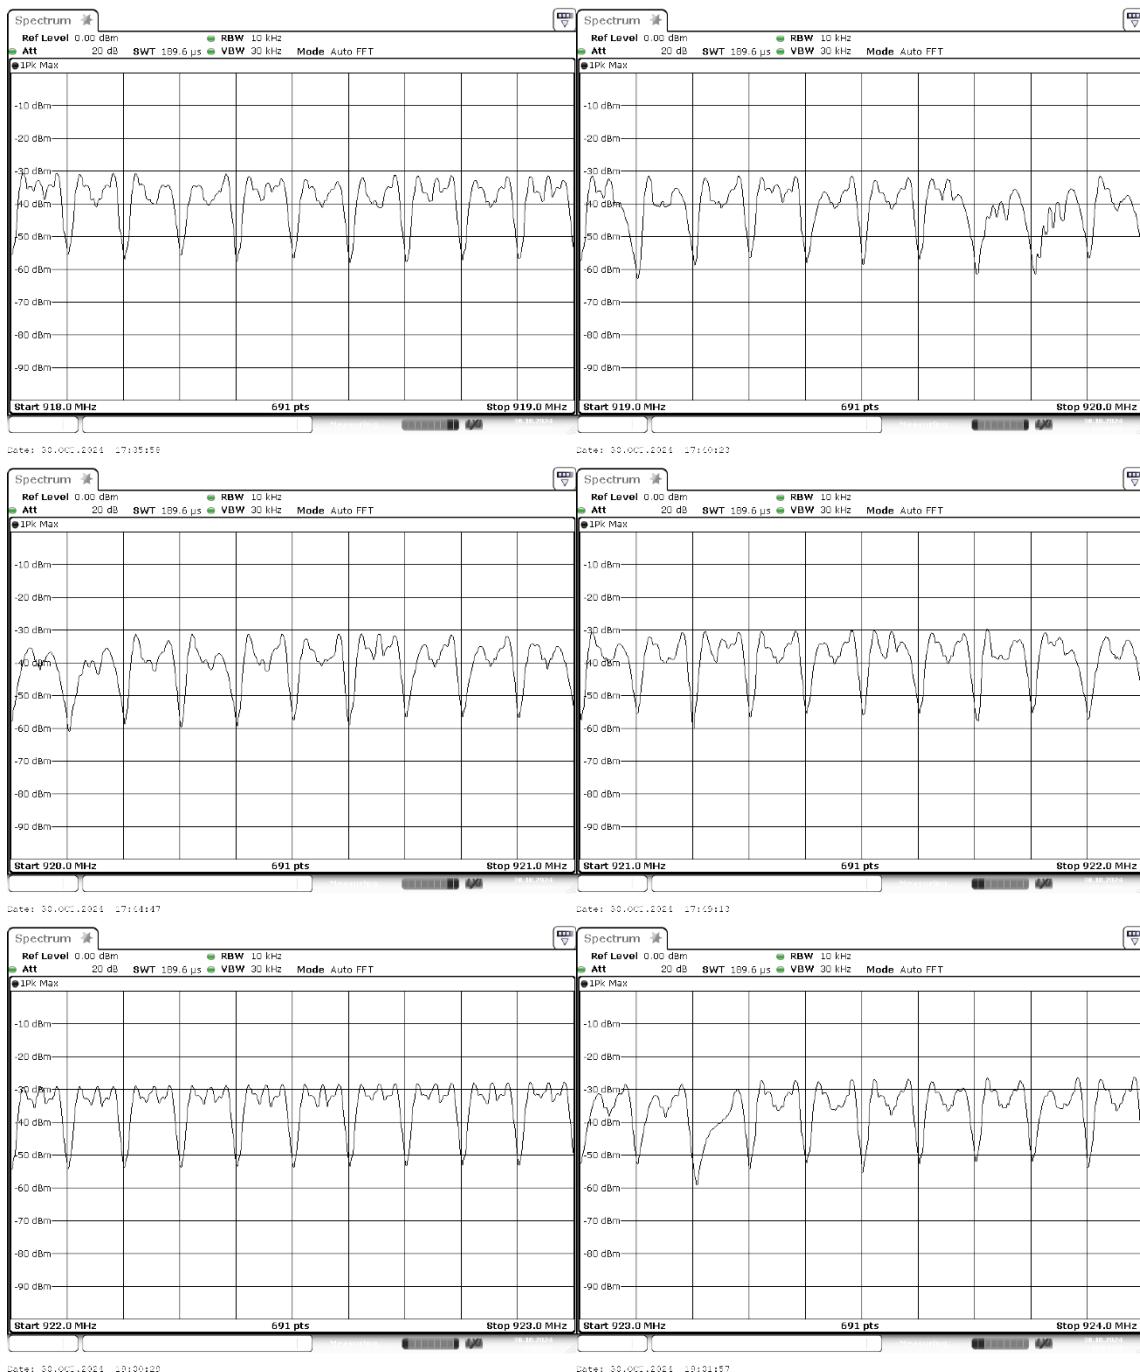




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies				
<b>Test procedure:</b> ANSI C63.10, section 7.8.2				
<b>Test mode:</b> Compliance			<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 30-Oct-24				
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 3.0 VDC	
<b>Remarks:</b>				

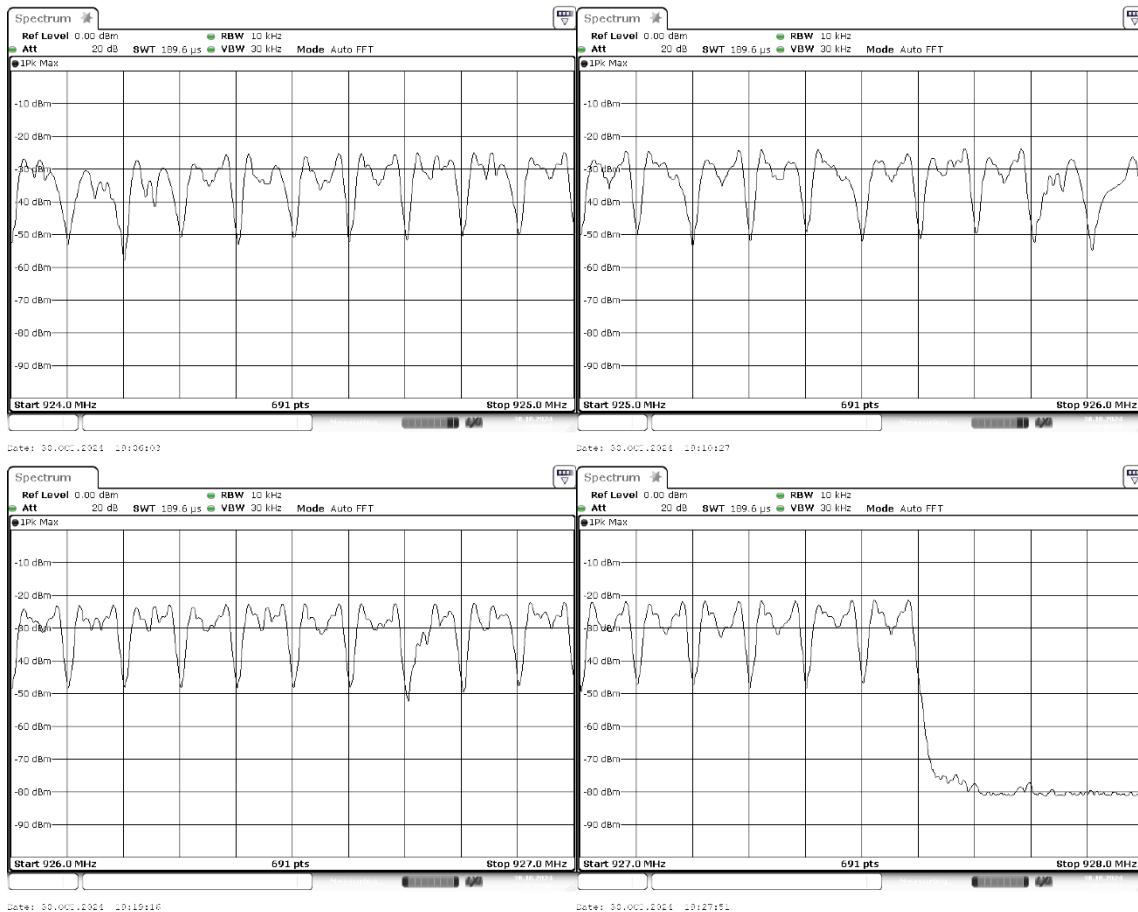



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy			
<b>Test procedure:</b> ANSI C63.10, section 7.8.4			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 11-Nov-24			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1017 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

## 7.4 Average time of occupancy

### 7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

### 7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in and associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy	
<b>Test procedure:</b> ANSI C63.10, section 7.8.4	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 11-Nov-24	
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %
<b>Air Pressure:</b> 1017 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>	

**Table 7.4.2 Average time of occupancy test results**

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz

MODULATION: GFSK

DETECTOR USED: Peak

NUMBER OF HOPPING FREQUENCIES: 254

INVESTIGATED PERIOD: 20 s

FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, s	Number of transmission during investigation period	Average time of occupancy*, s	Bit rate, kbps	Symbol rate, Msymbol/s	Limit, s	Margin, s**	Verdict
902.25	0.01155	1	0.01155	19.2	N/A	0.4	-0.38845	Pass


\* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

\*\* - Margin = Average time of occupancy – specification limit.

**Reference numbers of test equipment used**

HL 4135	HL 4355	HL 5636	HL 5838				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

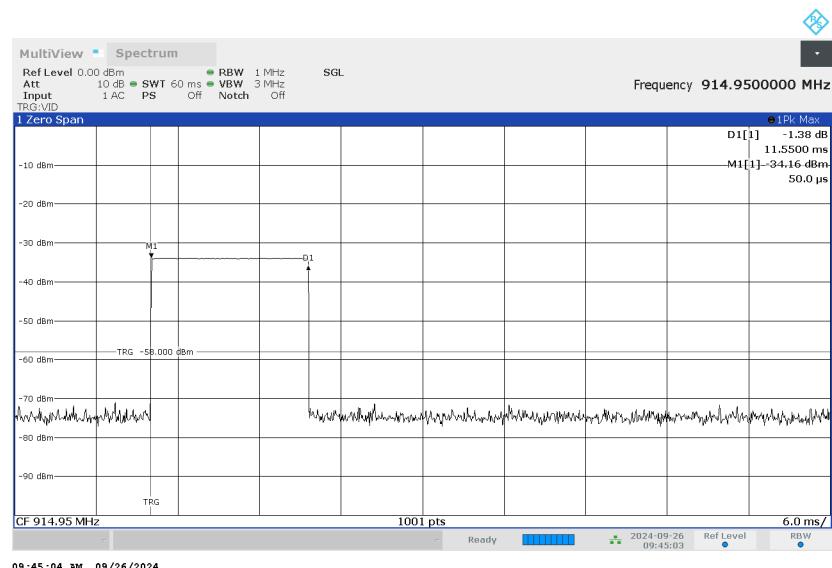**Plot 7.4.1 Single transmission duration**




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy			
<b>Test procedure:</b>	ANSI C63.10, section 7.8.4		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	11-Nov-24		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 45 %	<b>Air Pressure:</b> 1017 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

### Plot 7.4.2 Single transmission period

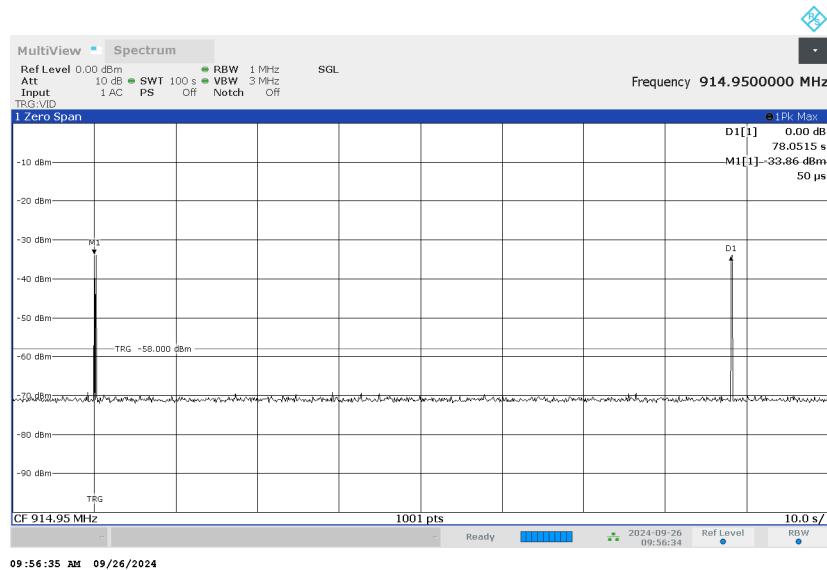



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(b) , RSS-247 section 5.4(a), Peak output power			
<b>Test procedure:</b> ANSI C63.10, section 7.8.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 08-Sep-24			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7.5 Peak output power

### 7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels) 1.0 (≥50 hopping channels)	24.0(<50 hopping channels) 30.0 (≥50 hopping channels)	125.2 (<50 hopping channels) 131.2 (≥50 hopping channels)	6.0*

\*- Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

\*\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.**

### 7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(b) , RSS-247 section 5.4(a), Peak output power			
<b>Test procedure:</b> ANSI C63.10, section 7.8.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b>	08-Sep-24	<b>Air Pressure:</b>	1007 hPa
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %	<b>Power:</b>	3 VDC
<b>Remarks:</b>			

Figure 7.5.1 Setup for carrier field strength measurements

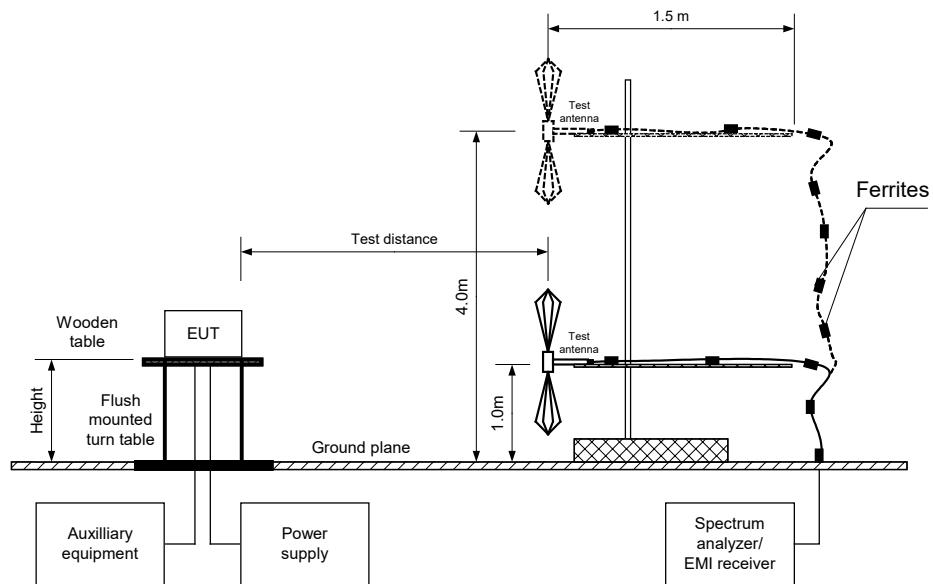



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(b) , RSS-247 section 5.4(a), Peak output power	
<b>Test procedure:</b> ANSI C63.10, section 7.8.5	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 08-Sep-24	
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %
	<b>Air Pressure:</b> 1007 hPa
<b>Remarks:</b>	<b>Power:</b> 3 VDC

**Table 7.5.2 Peak output power test results**

ASSIGNED FREQUENCY:	902-928 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	0.8 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)
MODULATION:	GFSK
BIT RATE:	19.2 kbps
EUT 20 dB BANDWIDTH:	78.59 kHz
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
FREQUENCY HOPPING:	Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS:	254

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
902.25	120.40	Horizontal	1.0	-92	0	25.20	30	-4.80	Pass
914.95	117.78	Horizontal	1.0	-95	0	22.58	30	-7.42	Pass
927.55	115.13	Horizontal	1.0	-91	0	19.93	30	-10.07	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\*- Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*\*- Margin = Peak output power – specification limit.

**Reference numbers of test equipment used**

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

Test specification: Section 15.247(b) , RSS-247 section 5.4(a), Peak output power			
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance		
Date(s):	08-Sep-24		
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

## Plot 7.5.1 Field strength of carrier at low frequency

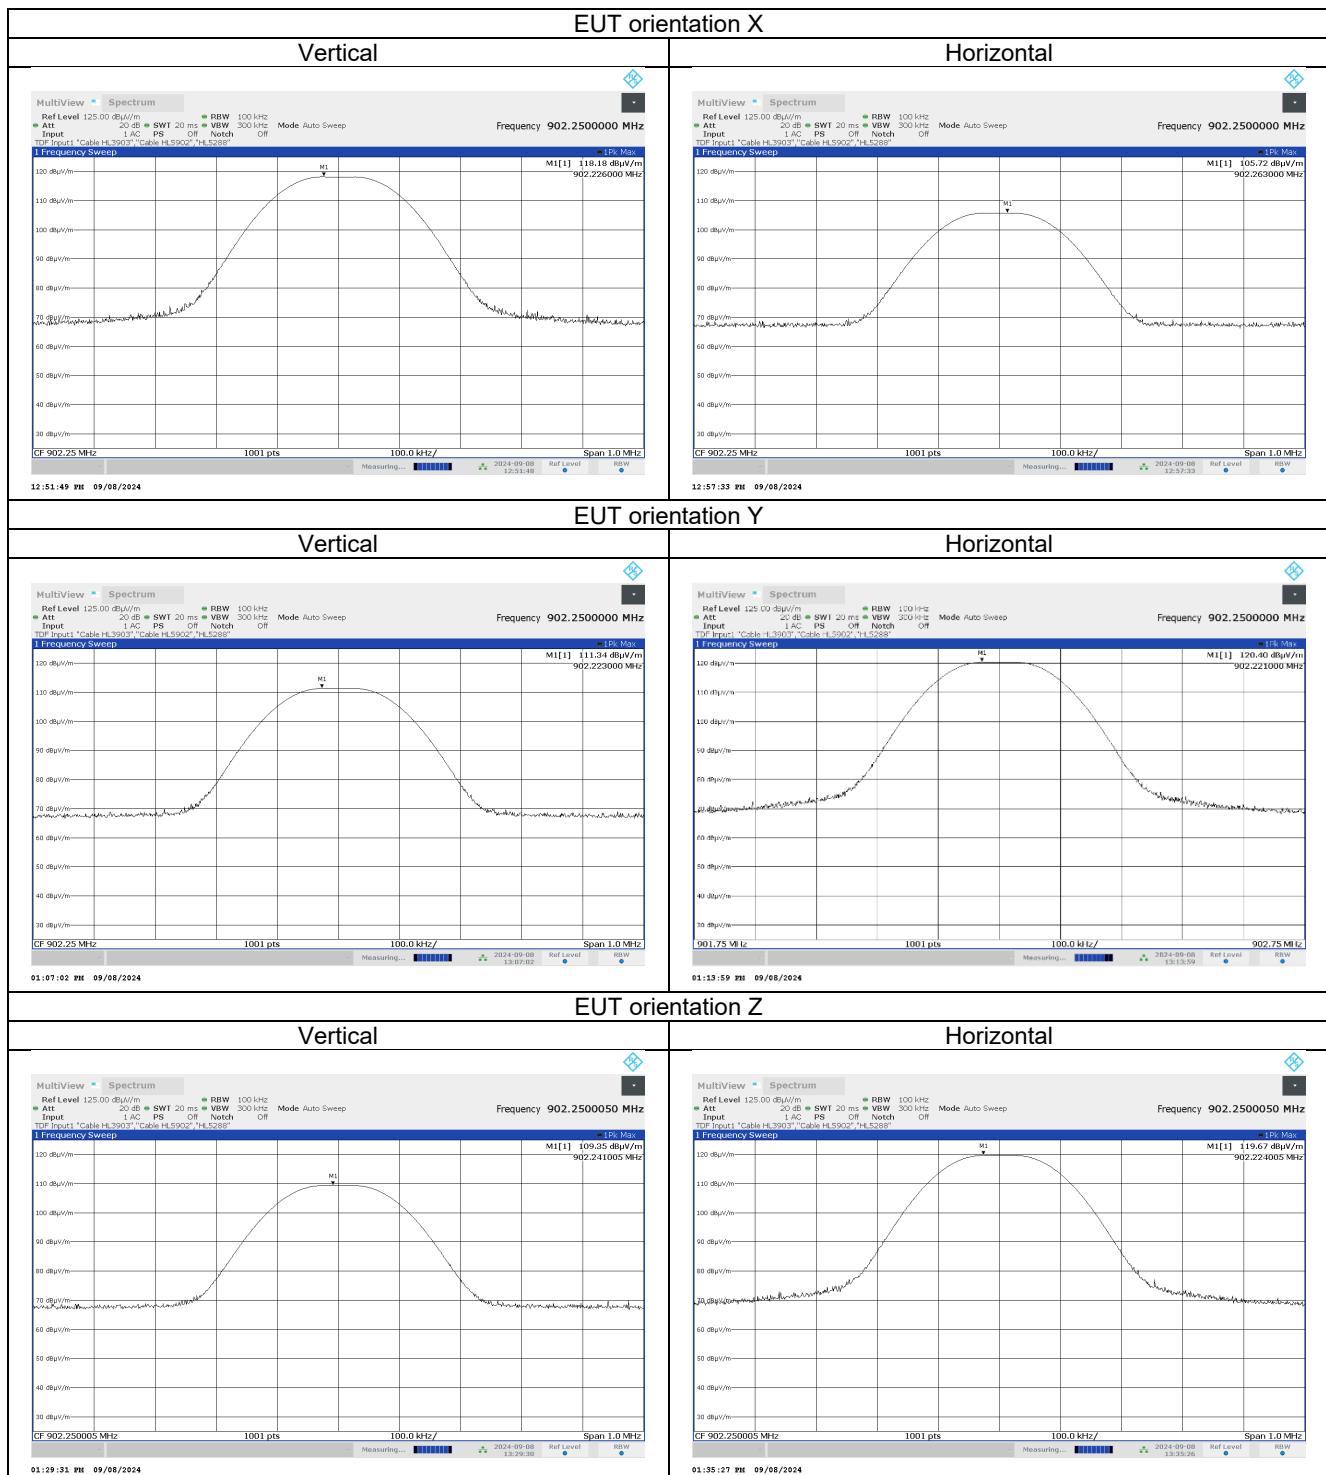




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2


Date of Issue: 10-Apr-25

Test specification: Section 15.247(b) , RSS-247 section 5.4(a), Peak output power			
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance		
Date(s):	08-Sep-24		
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

### Plot 7.5.2 Field strength of carrier at mid frequency

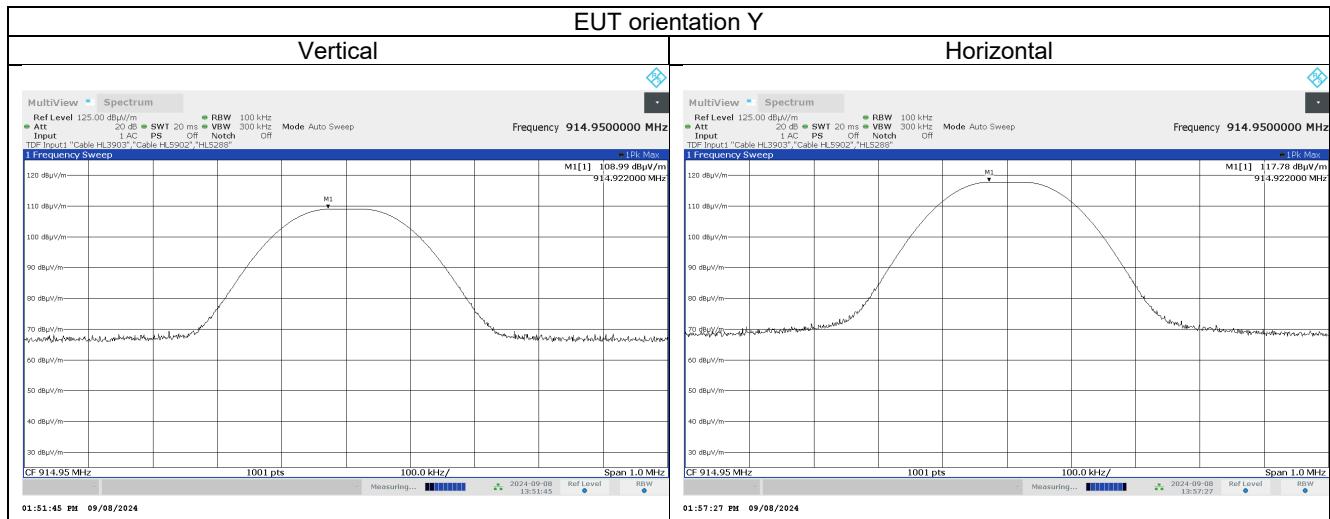

### Plot 7.5.3 Field strength of carrier at high frequency

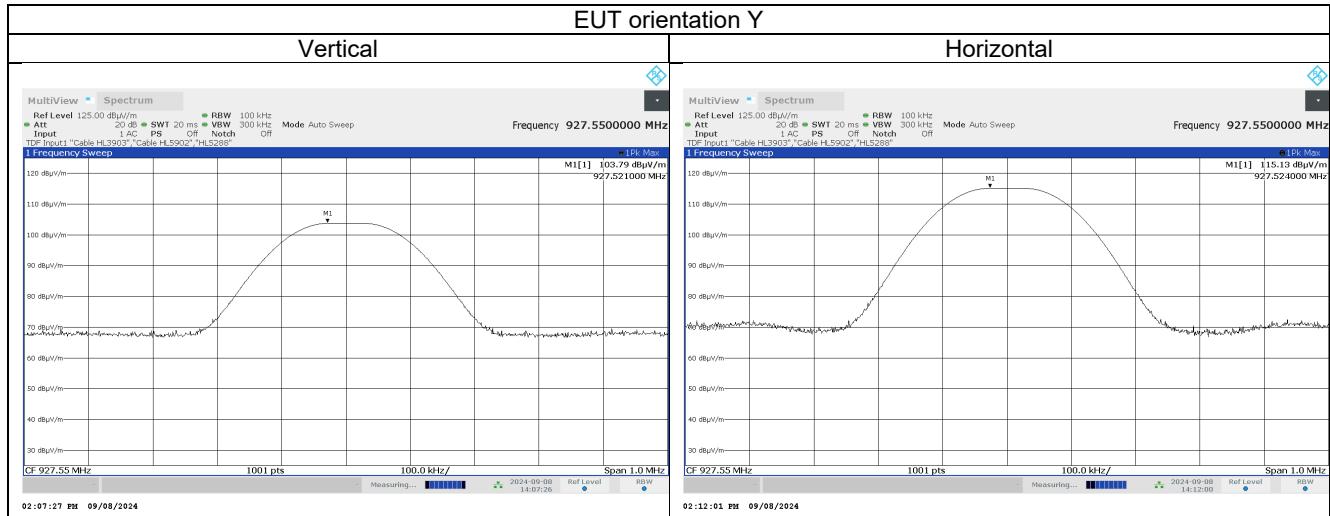



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1018 hPa	Power: 3 VDC
<b>Remarks:</b>			

## 7.6 Field strength of spurious emissions

### 7.6.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lims}_2 = \text{Lims}_1 + 40 \log (S_1/S_2),$$

where S<sub>1</sub> and S<sub>2</sub> – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.6.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and the performance check was conducted.

7.6.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.6.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.6.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.6.3.1 The EUT was set up as shown in Figure 7.6.2, Figure 1.1.3, energized and the performance check was conducted.

7.6.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.6.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Figure 7.6.1 Setup for spurious emission field strength measurements below 30 MHz**

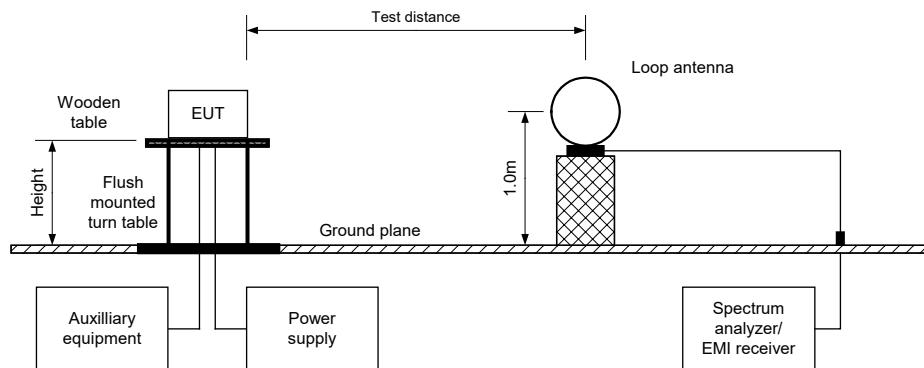



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

Figure 7.6.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz


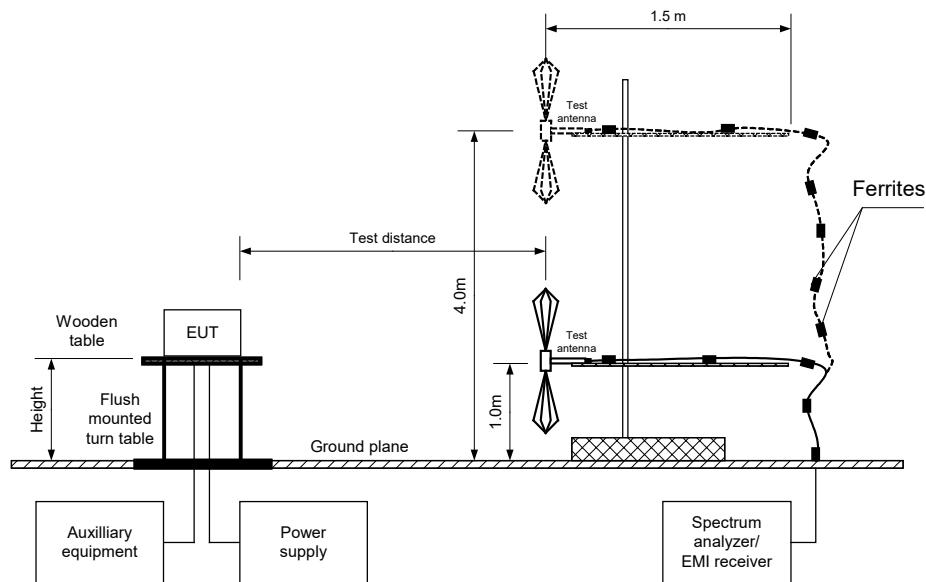


Figure 7.6.3 Setup for spurious emission field strength measurements above 1000 MHz



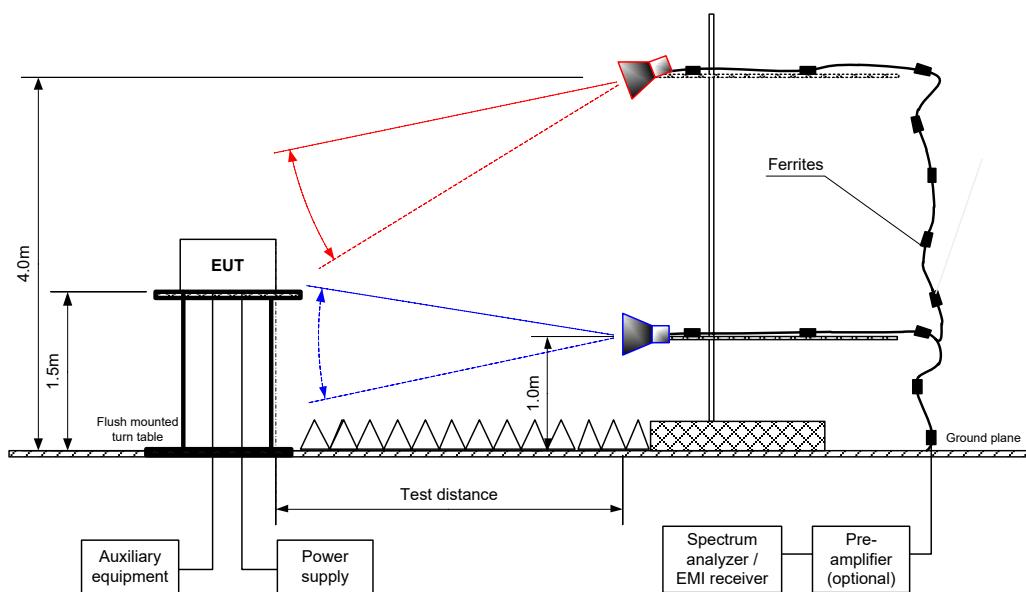

HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions	
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24	
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %
	<b>Air Pressure:</b> 1018 hPa
	<b>Power:</b> 3 VDC
<b>Remarks:</b>	

**Table 7.6.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 9500MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER:	25.20 dBm at low carrier frequency 22.58 dBm at mid carrier frequency 19.93 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency (902.25 MHz)</b>									
870.24	44.51	Horizontal	1.00	-120	120.40	70.62	20.0	-50.62	Pass
934.23	44.23	Horizontal	1.00	-60		70.90		-50.90	
7218.00	58.00	Vertical	3.02	141		62.40		-42.40	
<b>Mid carrier frequency (914.95 MHz)</b>									
882.98	44.70	Horizontal	1.00	-120	117.48	70.43	20.0	-50.43	Pass
946.94	41.45	Horizontal	1.00	60		73.68		-53.68	
1829.9	50.18	Horizontal	2.11	-48		67.30		-47.30	
<b>High carrier frequency (927.55 MHz)</b>									
895.56	44.73	Horizontal	1.0	60	115.13	70.40	20.0	-50.40	Pass
928.89	47.05	Horizontal	1.0	-60		68.08		-48.08	
959.58	36.42	Horizontal	1.0	-60		78.71		-58.71	
9275.5	55.95	Horizontal	1.0	-139		59.18		-39.18	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = specification limit- Attenuation below carrier.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance		
Date(s):	07-Nov-24 - 11-Nov-24		
Temperature: 24 °C	Relative Humidity: 42 %	Air Pressure: 1018 hPa	Power: 3 VDC
Remarks:			

Table 7.6.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	1000 - 9500MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER:	25.20 dBm at low carrier frequency 22.58 dBm at mid carrier frequency 19.93 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1000 kHz
TEST ANTENNA TYPE:	Double ridged guide
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
<b>Low carrier frequency (902.25 MHz)</b>											
2706.75	Horizontal	1.56	-36	56.20	74	-17.80	56.2	37.5	54	-16.5	Pass
3609.00	Horizontal	1.20	-29	56.12	74	-17.88	56.12	37.42	54	-16.58	
4511.25	Vertical	3.03	0	64.62	74	-9.38	64.62	45.92	54	-8.08	
8120.25	Horizontal	4.00	-130	58.05	74	-15.95	58.05	39.35	54	-14.65	
9022.50	Vertical	3.39	60	57.93	74	-16.07	57.93	39.23	54	-14.77	
<b>Mid carrier frequency (914.95 MHz)</b>											
2744.85	Horizontal	1.20	-33	56.76	74	-17.24	56.76	38.06	54	-15.94	Pass
3659.80	Horizontal	1.02	-30	52.96	74	-21.04	52.96	34.26	54	-19.74	
4574.75	Vertical	3.02	7	65.60	74	-8.40	65.6	46.9	54	-7.1	
7319.60	Horizontal	4.00	-98	57.80	74	-16.20	57.8	39.1	54	-14.9	
8234.55	Horizontal	2.84	-131	57.24	74	-16.76	57.24	38.54	54	-15.46	
9149.50	Horizontal	1.00	-142	56.32	74	-17.68	56.32	37.62	54	-16.38	
<b>High carrier frequency (927.55 MHz)</b>											
2782.65	Horizontal	1.61	-30	56.02	74	-17.98	56.02	37.32	54	-16.68	Pass
4637.75	Vertical	2.66	10	66.02	74	-7.98	66.02	47.32	54	-6.68	
7420.40	Horizontal	3.44	168	55.56	74	-18.44	55.56	36.86	54	-17.14	
8347.95	Horizontal	4.00	-144	55.00	74	-19.00	55	36.3	54	-17.7	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Measured field strength - specification limit.

\*\*\*- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.6.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number pulses during 100 ms	Duration, ms	Period, ms		
11.55	1	NA	NA	NA	-18.7

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Table 7.6.5 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER:	25.20 dBm at low carrier frequency 22.58 dBm at mid carrier frequency 19.93 dBm at high carrier frequency
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low ,Mid, High carrier frequency		No signals were found						Pass

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions					
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6					
<b>Test mode:</b>	Compliance			<b>Verdict:</b>	PASS
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24				
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %		<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC	
<b>Remarks:</b>					

**Table 7.6.6 Restricted bands according to FCC section 15.205**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

**Table 7.6.7 Restricted bands according to RSS-Gen**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

**Reference numbers of test equipment used**

HL 0446	HL 3903	HL 4339	HL 4933	HL 5288	HL 5902	HL 7585	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
Temperature: 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


**Plot 7.6.1 Radiated emission measurements from 0.09 to 30 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

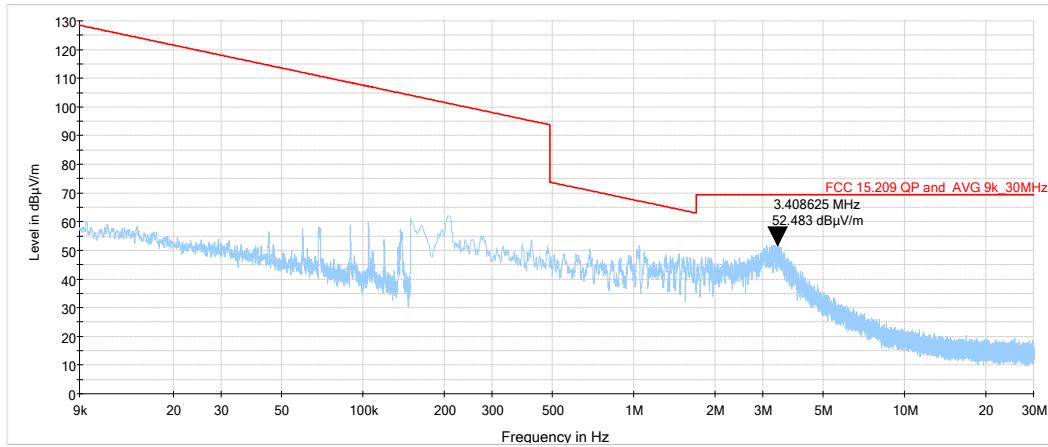

**Plot 7.6.2 Radiated emission measurements from 0.09 to 30 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

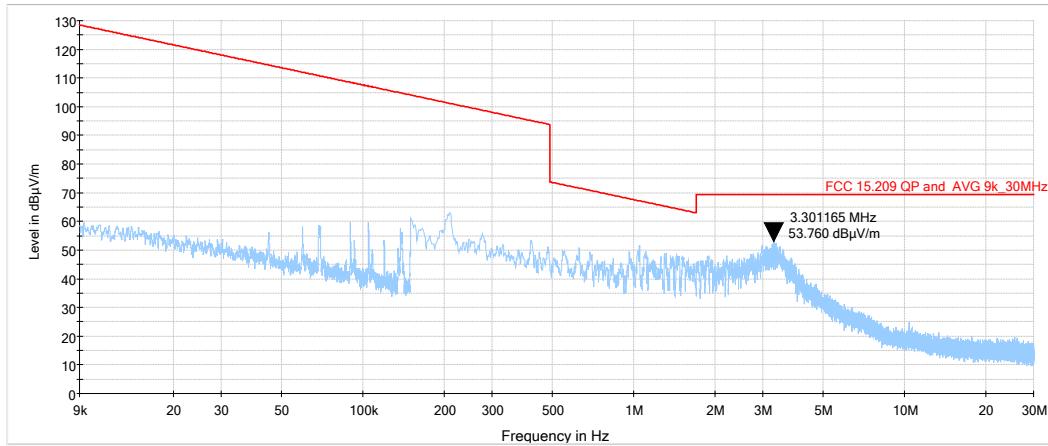



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
Temperature: 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.3 Radiated emission measurements from 0.09 to 30 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

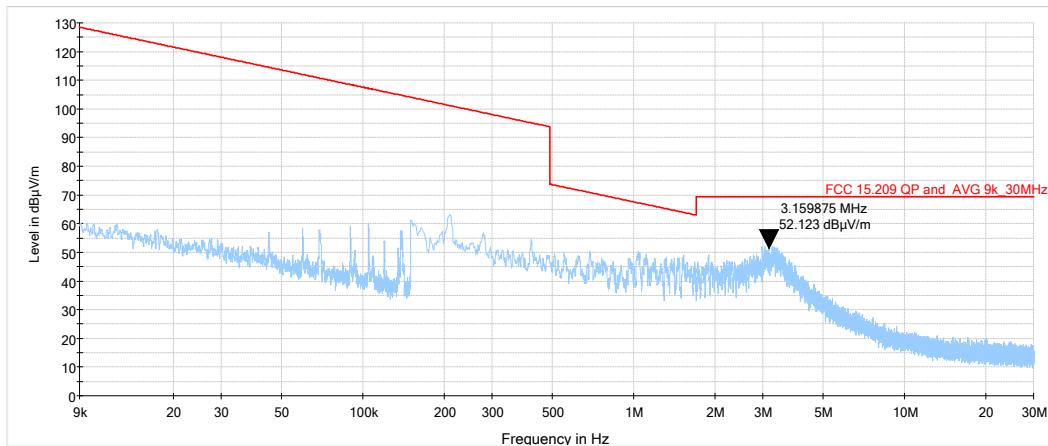



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25


<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.4 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

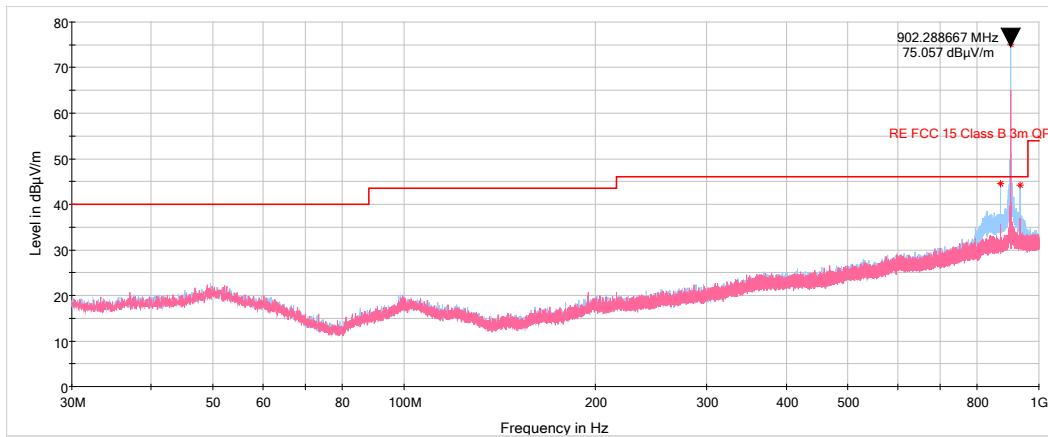

With filter HL 6252 (Stop band 800-1000 MHz)

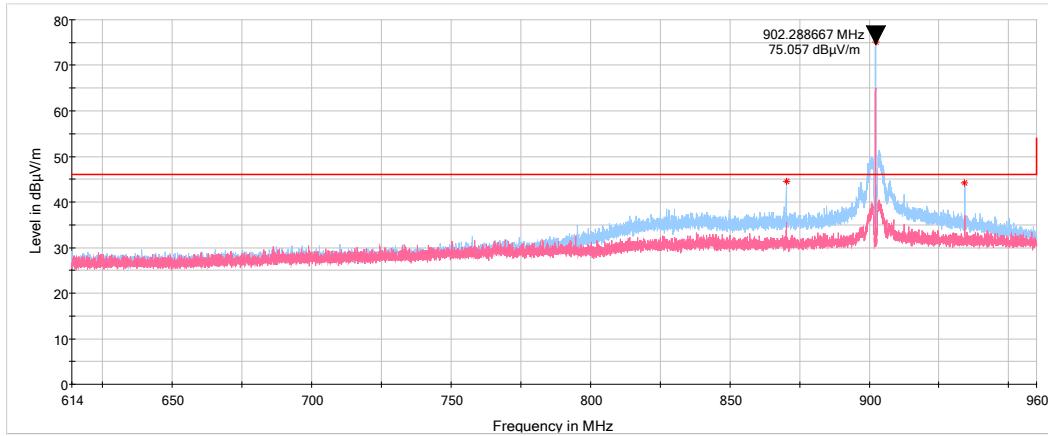



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25


<b>Test specification:</b>	<b>Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.5 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

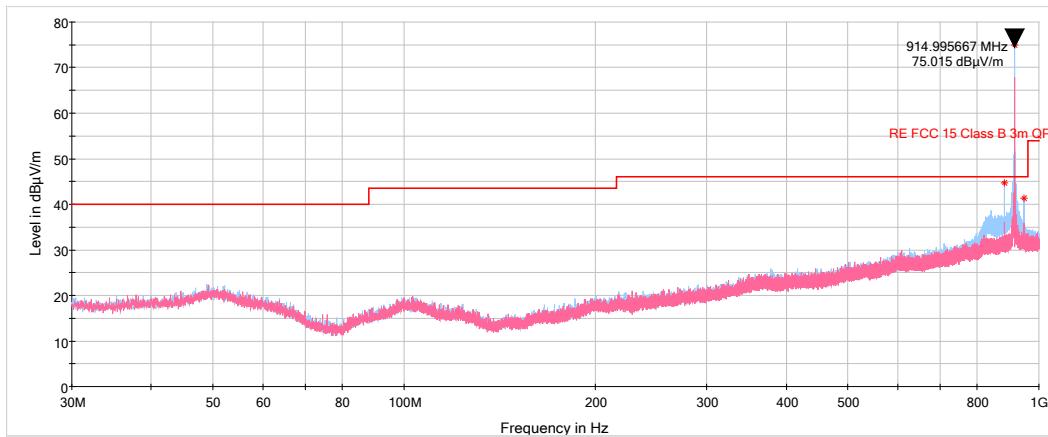

With filter HL 6252 (Stop band 800-1000 MHz)

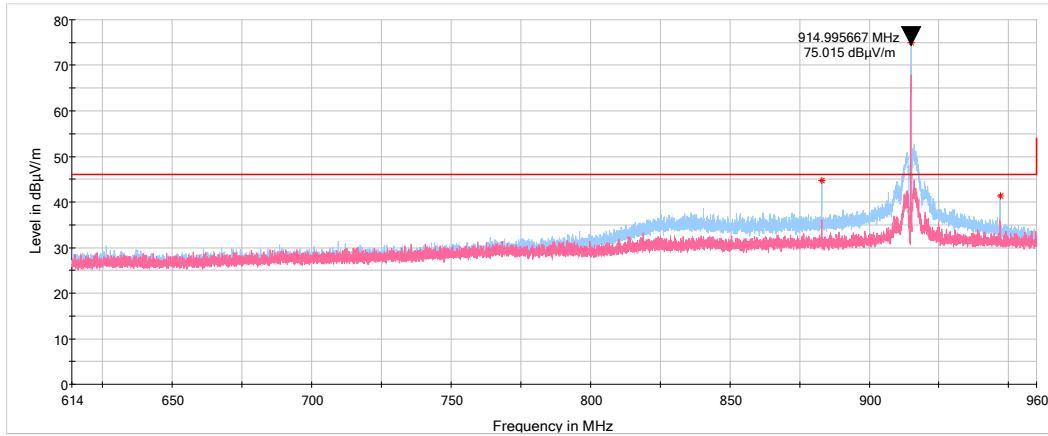



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25


<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
Temperature: 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.6 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

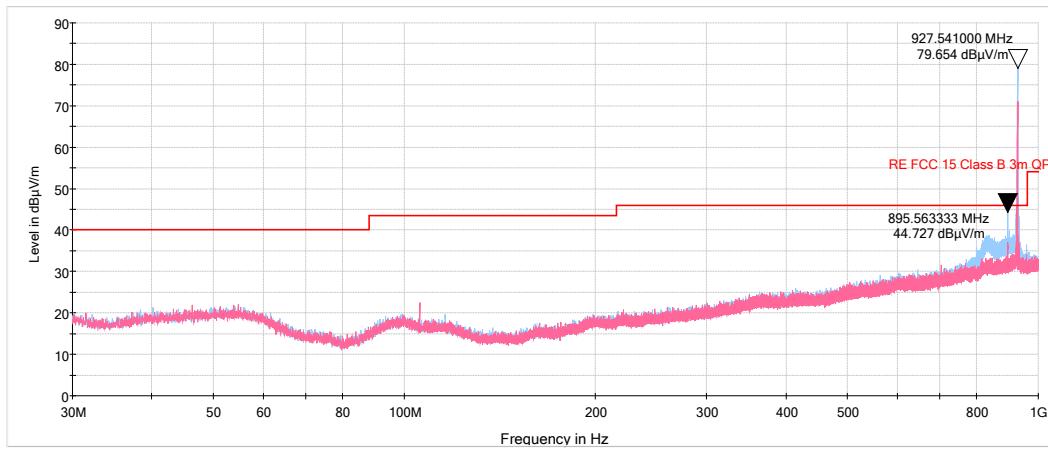

With filter HL 6252 (Stop band 800-1000 MHz)

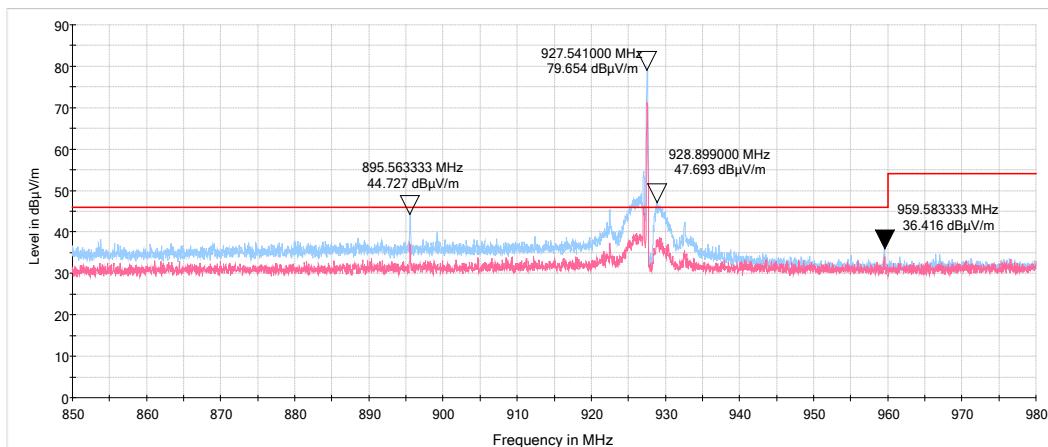



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
Temperature: 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


**Plot 7.6.7 Radiated emission measurements from 1000 to 9500 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

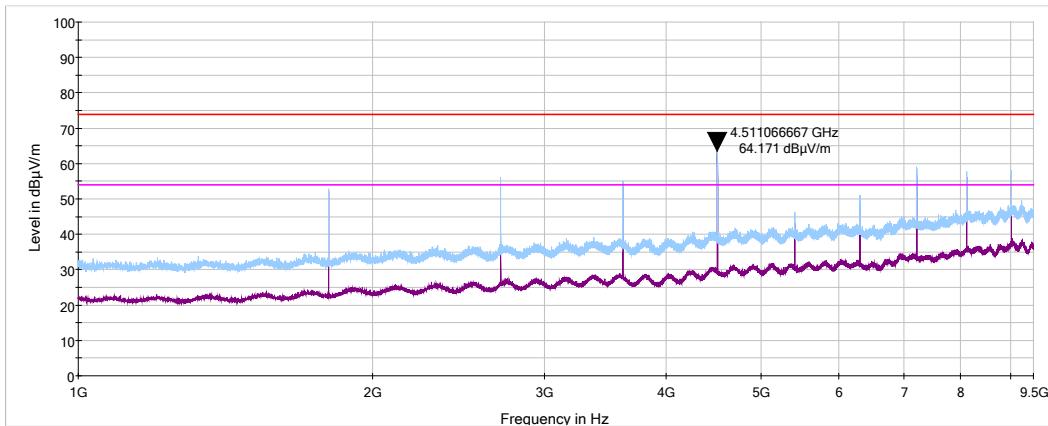

**Plot 7.6.8 Radiated emission measurements from 1000 to 9500 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

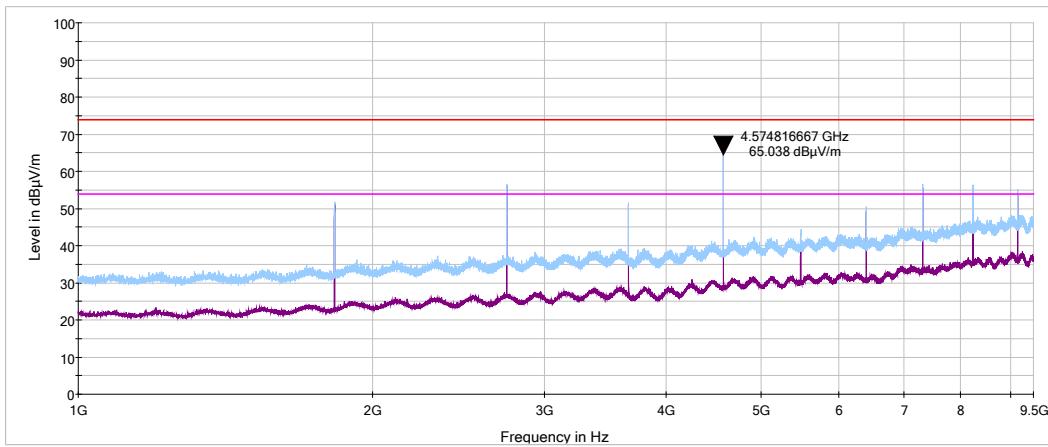



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.9 Radiated emission measurements from 1000 to 9500 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

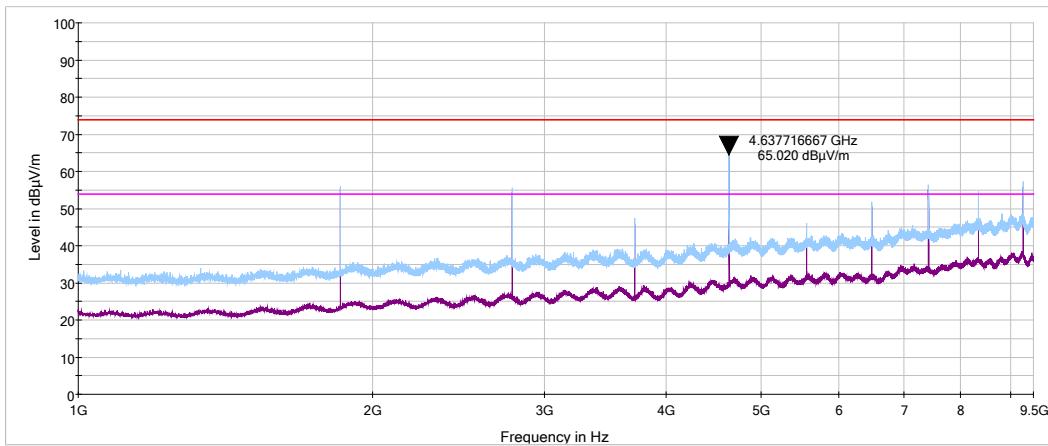



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


#### Plot 7.6.10 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

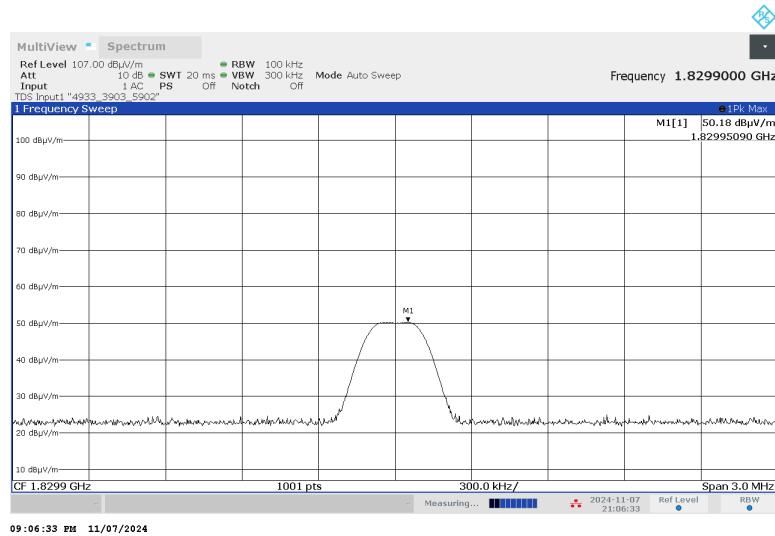

#### Plot 7.6.11 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

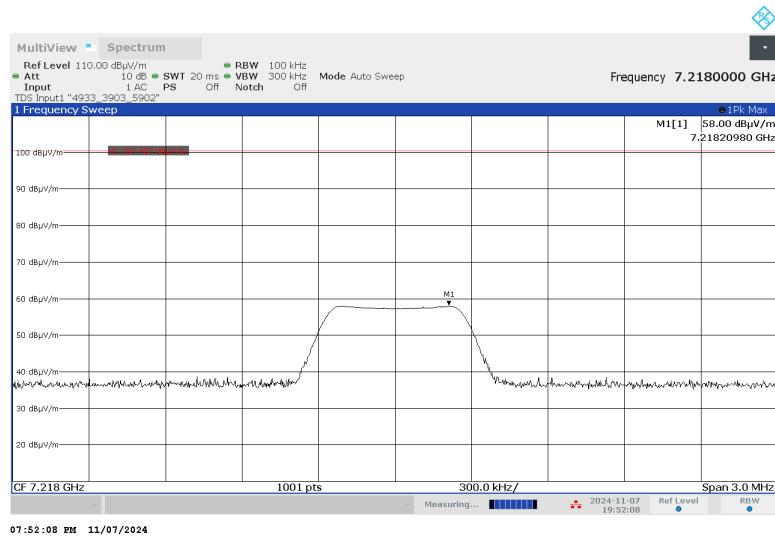



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b>	ANSI C63.10, sections 6.5, 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	07-Nov-24 - 11-Nov-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.12 Radiated emission measurements at the tenth harmonic of high carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

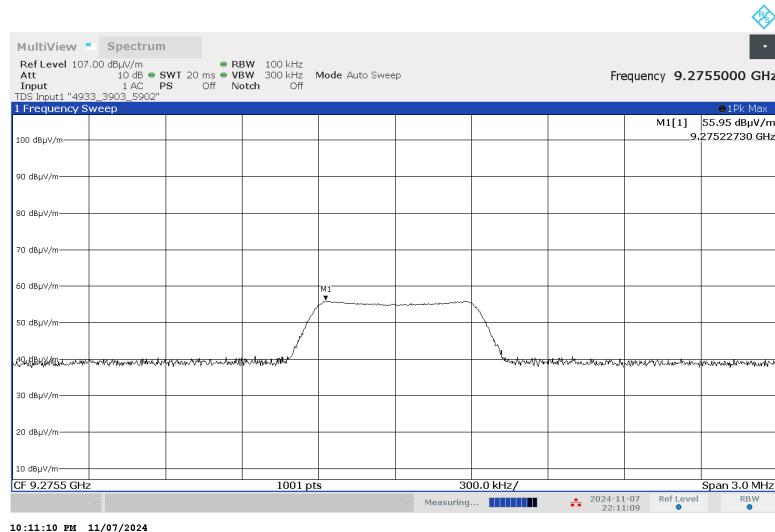




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2


Date of Issue: 10-Apr-25

<b>Test specification: Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10, sections 6.5, 6.6			
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>	
<b>Date(s):</b> 07-Nov-24 - 11-Nov-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1018 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.6.13 Transmission pulse duration**

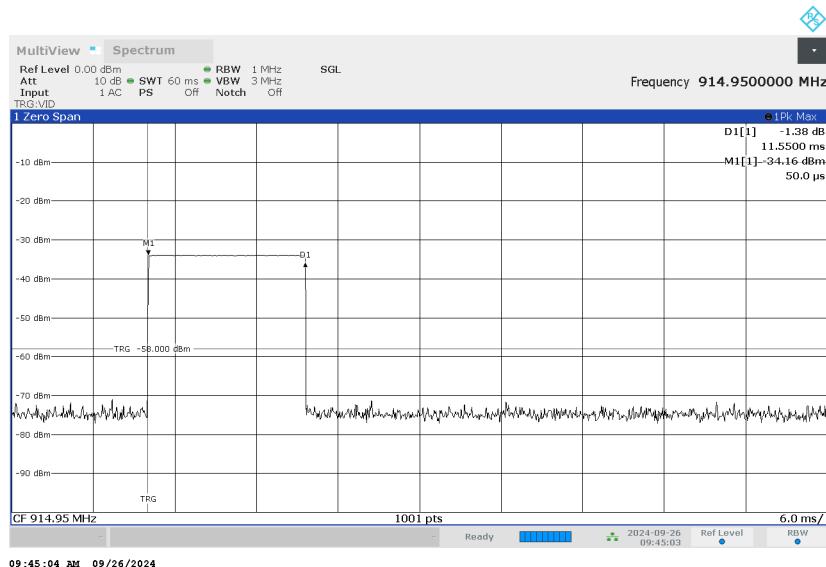

**Plot 7.6.14 Transmission pulse period**

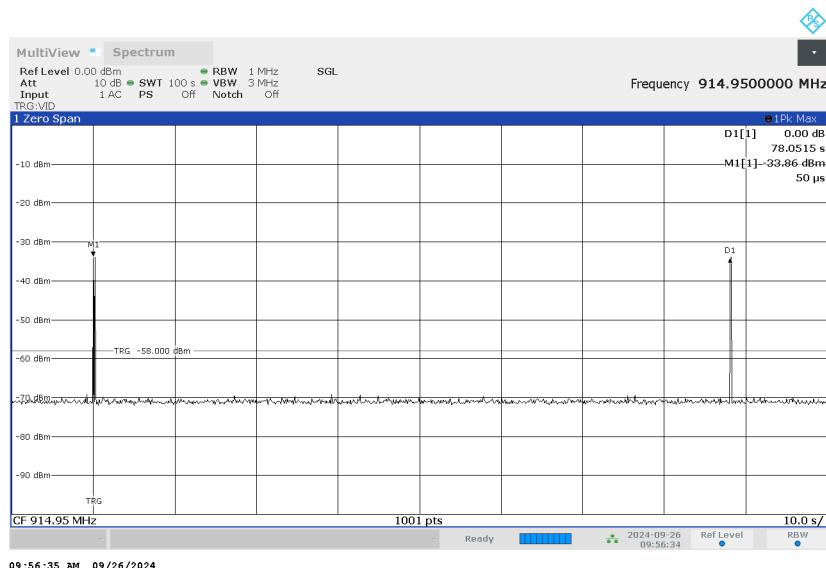



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c), RSS-247 section 5.5, Emissions at band edges			
<b>Test procedure:</b>	ANSI C63.10, section 7.8.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	08-Sep-24	<b>Verdict:</b>	PASS
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7.7 Band edge radiated emissions

### 7.7.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0

\* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

### 7.7.2 Test procedure

- 7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.7.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.7.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.7.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.7.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.7.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.7.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.7.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.7.1 Band edge emission test setup





HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c), RSS-247 section 5.5, Emissions at band edges	
<b>Test procedure:</b> ANSI C63.10, section 7.8.6	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 08-Sep-24	
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %
	<b>Air Pressure:</b> 1007 hPa
<b>Power:</b> 3 VDC	
<b>Remarks:</b>	

**Table 7.7.2 Band edge emission test results**

ASSIGNED FREQUENCY RANGE:	902 – 928 MHz
DETECTOR USED:	Peak
MODULATION:	GFSK
BIT RATE:	19.2 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	25.20 dBm at low carrier frequency (measured) 19.93 dBm at high carrier frequency (measured)
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
<b>Frequency hopping disabled</b>						
902.250	76.37	120.31	43.94	20.0	23.94	Pass
927.550	71.51	115.17	43.66	20.0	23.66	Pass
<b>Frequency hopping enabled</b>						
902.250	76.46	120.31	43.85	20.0	23.85	Pass
927.550	70.11	115.17	45.06	20.0	25.06	Pass

\*- Margin = Attenuation below carrier – specification limit.

**Reference numbers of test equipment used**

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2


Date of Issue: 10-Apr-25

Test specification: Section 15.247(c), RSS-247 section 5.5, Emissions at band edges			
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance		
Date(s):	08-Sep-24		
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1007 hPa	Power: 3 VDC
Remarks:			

### Plot 7.7.1 The highest emission level within the assigned band at low carrier frequency

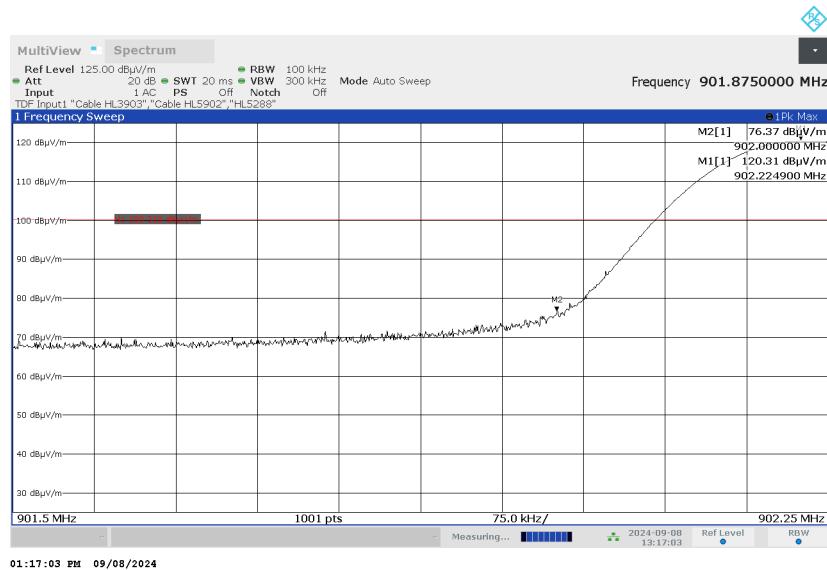

### Plot 7.7.2 The highest emission level within the assigned band at high carrier frequency

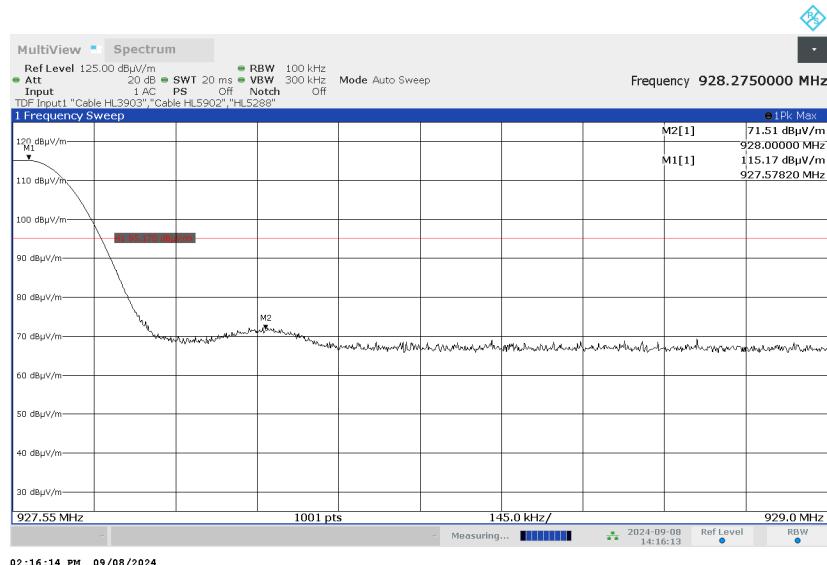




HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2  
Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.247(c), RSS-247 section 5.5, Emissions at band edges			
<b>Test procedure:</b> ANSI C63.10, section 7.8.6			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 08-Sep-24			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1007 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.7.3 The highest emission level within the assigned band at low carrier frequency (Hopping enabled)**

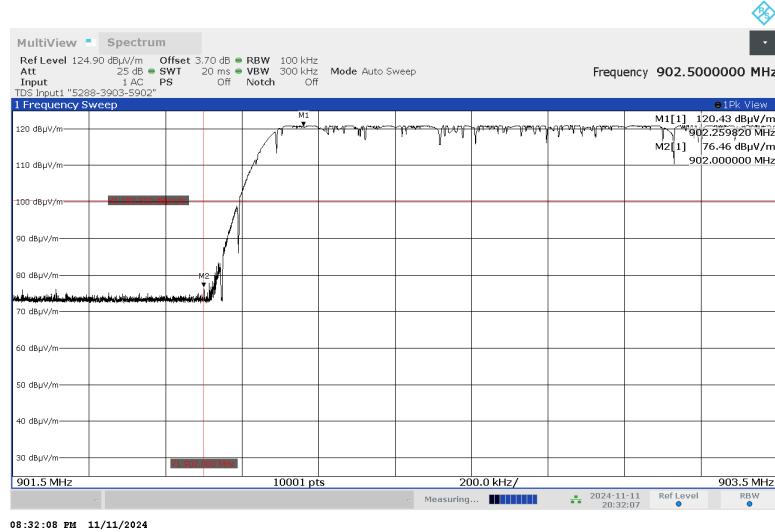

**Plot 7.7.4 The highest emission level within the assigned band at high carrier frequency (Hopping enabled)**

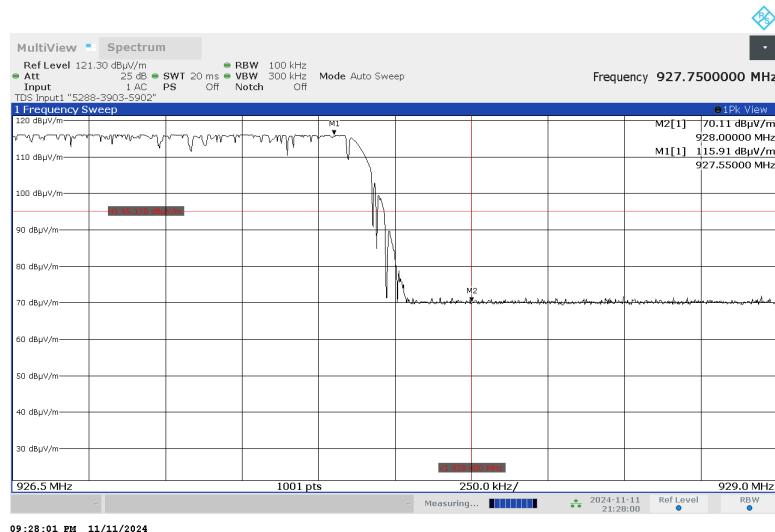



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>FCC Section 15.203/ RSS-Gen, Section 7.1.4, Antenna requirement</b>		
<b>Test procedure:</b>	Visual inspection / supplier declaration		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	15-Sep-24		
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 41 %	<b>Air Pressure:</b> 1006 hPa	<b>Power:</b> 3.0 VDC
<b>Remarks:</b>			

## 7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

**Table 7.8.1 Antenna requirements**

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 10-Oct-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1002 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 8 Unintentional emissions

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
FCC 47 CFR, Section 15.109				
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*
ICES-003, Section 3.2.2				
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
1000 - 40000	---	74 (Peak)	54 (AVR)	80 (Peak)
Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lims_2 = Lims_1 + 20 \log (S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

#### 8.1.2 Test procedure for measurements in semi-anechoic chamber

- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1002 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment


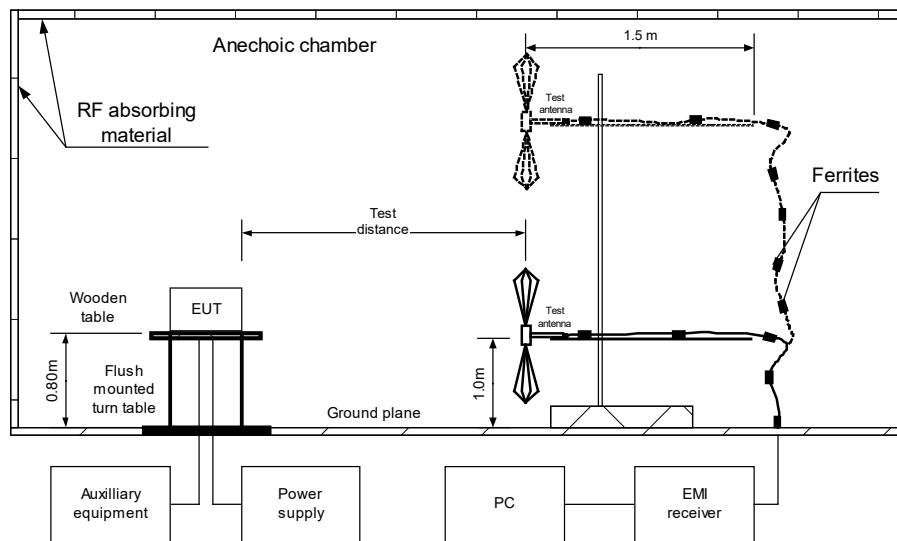


Figure 8.1.2 Setup for radiated emission measurements in 1000 – 6000 MHz range, table-top EUT



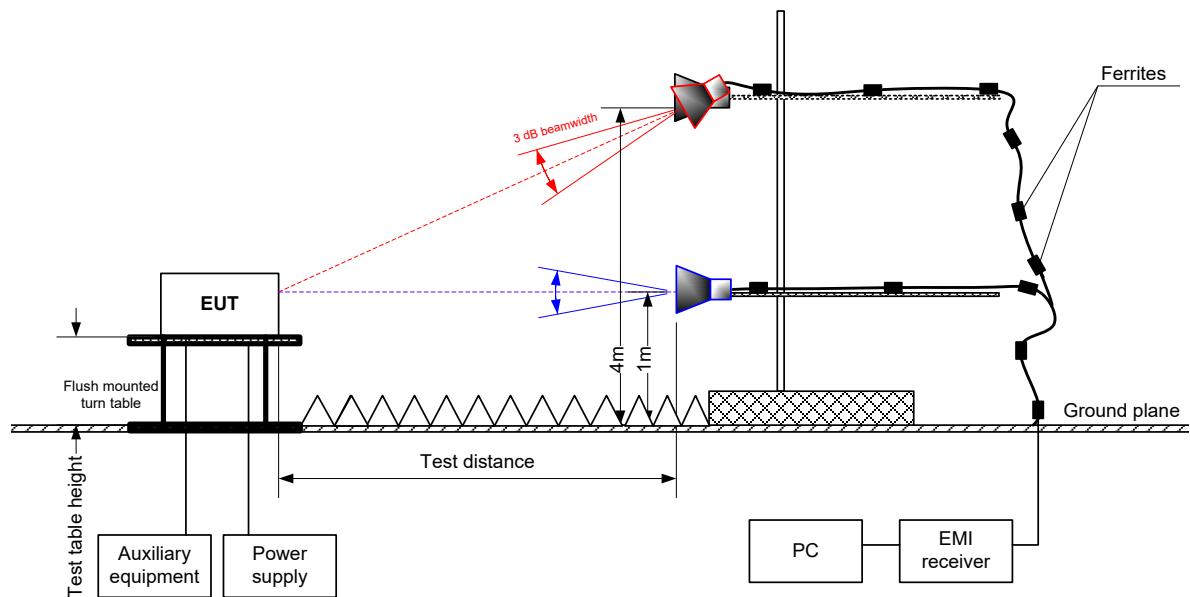

HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b> Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 10-Oct-24			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1002 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / QUASI-PEAK  
 FREQUENCY RANGE: 30 MHz – 1000 MHz  
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								

TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / AVERAGE  
 FREQUENCY RANGE: 1000 MHz – 4500 MHz  
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 7585	HL 3903	HL 5902	HL 5288	HL 4933			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

<b>Test specification:</b>	<b>Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	10-Oct-24		
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1002 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

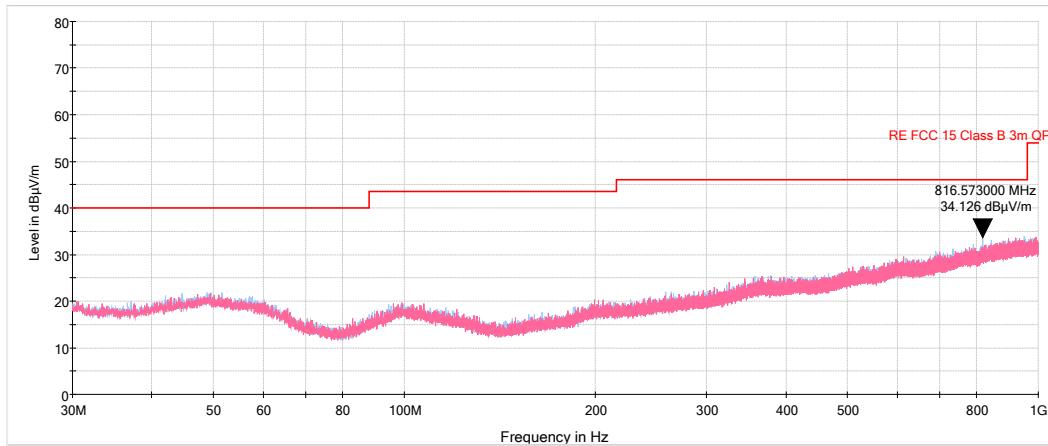

**Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

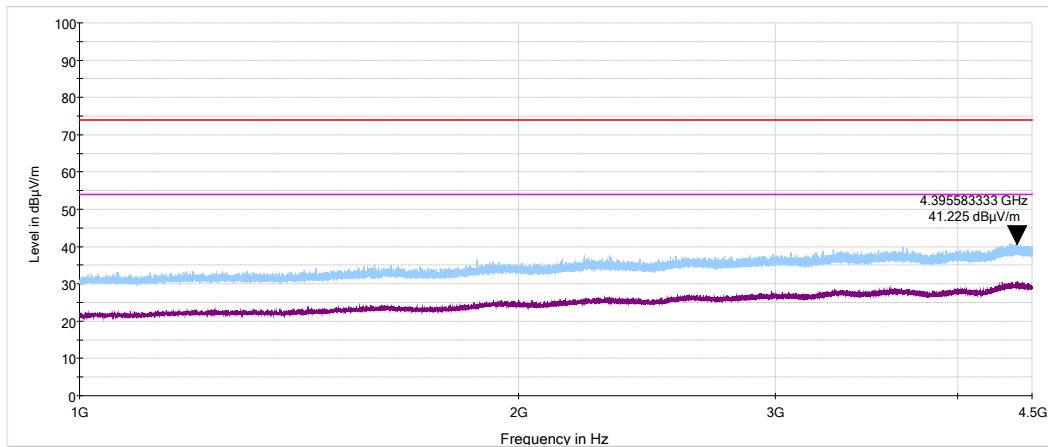



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	29-Feb-24	28-Feb-25
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-May-24	06-May-25
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 136	20-May-24	20-May-25
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 137	20-May-24	20-May-25
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM5011 5-02	001	21-Jun-23	21-Jun-25
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	19-Jun-24	19-Jun-25
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	20-Feb-24	20-Feb-25
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	24-Mar-22	24-Mar-25
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY574704 04	08-Jan-24	08-Jan-25
5636	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT-SMSM+	NA	16-Nov-23	16-Nov-24
5645	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT-SMSM+	NA	20-May-24	20-May-25
5838	Set near field probes	COM-POWER CORPORATION	PS-400	151724	04-Jul-24	04-Jul-26
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	19-Nov-23	19-Nov-24
5933	Thermometer Hygrometer , (0 to +50) deg., (20-95) % RH	Kkmoon	Dyimore	NA	15-May-24	15-May-25
6252	Tunable Bandreject Filter 800-1000 MHz	K&L Microwave Inc.	3TNF-800/1000-0.2-N/N	336	07-Nov-23	07-Jun-25
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	21-Sep-23	21-Sep-24
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	24-Sep-24	24-Sep-25



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2  
Date of Issue: 10-Apr-25

## 10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna  
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dB <sub>S</sub> /m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dB <sub>S</sub> /m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB<sub>μ</sub>V to obtain field strength in dB<sub>μ</sub>A/m.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

HL 4933: Active Horn Antenna  
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

**HL 5288: Trilog Antenna**  
**Frankonia, model: ALX-8000E, s/n: 00809**  
**30-1000 MHz**

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.

**above 1000 MHz**

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

## 11 APPENDIX C Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2

Date of Issue: 10-Apr-25

## 12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



HERMON LABORATORIES

Report ID: PARRAD\_FCC.54962\_TR\_Rev2  
Date of Issue: 10-Apr-25

## 13 APPENDIX E

### Specification references

FCC 47CFR part 15: 2022	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247 Issue 3: 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 with_amendment_1_2: 2021	General Requirements and Information for the Certification of Radiocommunication Equipment
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ICES-003: 2020, Issue 7	Information Technology Equipment (Including Digital Apparatus)



HERMON LABORATORIES

## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
Cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μV)	decibel referred to one microvolt
dB(μV/m)	decibel referred to one microvolt per meter
dB(μA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
Ppm	part per million (10-6)
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT