

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (FHSS),
RSS-247 Issue 3:2023, RSS-Gen Issue 5

FOR:

**Paradox Security Systems
LTD.**

Control Panel

Models:

M25-9C

M25LTE-9C

FCC ID: KDYM25

IC: 2438A-M25

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Auxiliary equipment	5
6.4	Test configuration	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	10
7.3	Number of hopping frequencies	12
7.4	Average time of occupancy	17
7.5	Peak output power	20
7.6	Peak output power, M25LTE-9C model	24
7.7	Field strength of spurious emissions	28
7.8	Band edge radiated emissions	39
7.9	Conducted emissions	43
7.10	Antenna requirements	46
8	Unintentional emissions	47
8.1	Conducted emissions	47
8.2	Radiated emission measurements	50
9	APPENDIX A Test equipment and ancillaries used for tests	55
10	APPENDIX B Test equipment correction factors	56
11	APPENDIX C Measurement uncertainties	59
12	APPENDIX D Test laboratory description	60
13	APPENDIX E Specification references	60
14	APPENDIX F Abbreviations and acronyms	61
15	APPENDIX G Manufacturer's declaration	62

1 Applicant information

Client name: Paradox Security Systems LTD.
Address: 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik

2 Equipment under test attributes

Product name: Control Panel
Product type: Transceiver
Models: M25-9C Note
M25LTE-9C Note
Hardware version: 900-3005-996
Software release: V1.00
Receipt date: 05-Jun-24

Note: The following data in this clause is provided by the customer and represents his sole responsibility. According to manufacturer's declaration provided in Appendix G of the test report, control panel models M25-9C and M25LTE-9C are identical and differ only in backup LTE module, the operation is identical and no difference in output power and emissions between models with and without LTE module. That's why the model M25-9C was tested fully. Peak output power test was repeated for the model M25LTE-9C. Model name M25PEF-9 was replaced by M25-9C for marketing reasons.

3 Manufacturer information

Manufacturer name: Paradox Security Systems LTD
Address: 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik

4 Test details

Project ID: 54136
Location: Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel
Test started: 05-Jun-24
Test completed: 27-Jun-25
Test specifications: FCC 47CFR part 15 subpart C §15.247 (FHSS), RSS-247 Issue 3:2023, RSS-Gen Issue 5

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1 / RSS-247 section 5.1(c), 20 dB bandwidth	Pass
Section 15.247(b) / RSS-247 section 5.4(a), Peak output power	Pass
Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
Section 15.247(a)1 / RSS-247 section 5.1(b), Frequency separation	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Number of hopping frequencies	Pass
Section 15.247(a)1 / RSS-247 section 5.1(c), Average time of occupancy	Pass
Section 15.247(i)5 / RSS-102 section 2.5, RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(d) / RSS-247 section 5.5, Emissions at band edges	Pass
Section 15.203 / RSS-Gen section 8.3, Antenna requirements	Pass
Section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Pass*
Unintentional emissions	
Section 15.107 / ICES-003 section 3.2.1, Class B, Conducted emission at AC power port	Pass*
Section 15.109 / RSS-Gen section 7.3 / ICES-003 section 3.2.2, Class B, Radiated emission	Pass

* The test was performed at AC power port of the auxiliary power supply of PoE to demonstrate compliance with the conducted limits according to FCC 47CFR part 15.207(c) & 15.107(d) requirements.

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

Revision history:

Date	File No.	Change Description
20-Jul-25	PARRAD_FCC.54136_TR_rev1	Title page, Section 2 "Equipment under test attributes" updated for model names Section 6.1 "General information" updated Section 7.6 "Peak output power, M25LTE-9C model" added APPENDIX A "Test equipment and ancillaries used for tests" updated APPENDIX G "Manufacturer's declaration" added
29-Apr-25	PARRAD_FCC.54136_TR	Original report

This test report supersedes the previously issued test report Doc ID: PARRAD_EN.54136.

	Name and Title	Date	Signature
Tested by:	Mr. S. Sugatov, test engineer, EMC & Radio	27-Jun-25	
Reviewed by:	Ms. N. Averin, Certification Specialist, EMC & Radio	14-Jul-25	
Approved by:	Mr. M. Nikishin, EMC and Radio group leader	20-Jul-25	

6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility.

6.1 General information

The EUT is a control panel operating in 902.25 - 927.55 MHz range, powered from 48 VDC obtained via PoE and equipped with backup battery. The model M25-9C has built-in approved Wi-Fi module, manufactured by Espressif Systems (Shanghai) Co. Ltd, model ESP32-WROOM-32UE, FCC ID: 2AC7Z-ESPWROOM32UE, IC: 21098-ESPWROOMUE. The model M25LTE-9C has built-in approved Wi-Fi module, manufactured by Espressif Systems (Shanghai) Co. Ltd, model ESP32-WROOM-32UE, FCC ID: 2AC7Z-ESPWROOM32UE, IC: 21098-ESPWROOMUE and built-in CE approved LTE module, manufactured by Quectel, model EC200-EU.

According to manufacturer's declaration provided in Appendix G of the test report, control panel models M25-9C and M25LTE-9C are identical and differ only in backup LTE module, the operation is identical and no difference in output power and emissions between models with and without LTE module. That's why the model M25-9C was tested fully. Peak output power test was repeated for the model M25LTE-9C. Model name M25PEF-9 was replaced by M25-9C for marketing reasons.

6.2 Ports and lines


Port type	Port description	Connected		Qty.	Cable type	Cable length	Indoor / outdoor
		From	To				
Signal and power	PoE	Control panel	Switch/POE	1	Unshielded	3 m*	Indoor

* Always shorter than 30 m.

6.3 Auxiliary equipment

Description	Manufacturer	Model number
Switch/PoE (conducted emissions tests)	TP-Link	TL-SG1005P
Router (Ethernet switch)	TP-Link	ArcherMR400
AC/DC adapter (conducted emissions tests)	TP-Link	T535131-2-DT
Switch/PoE (radiated emissions tests)	AXIS	T8123

6.4 Test configuration

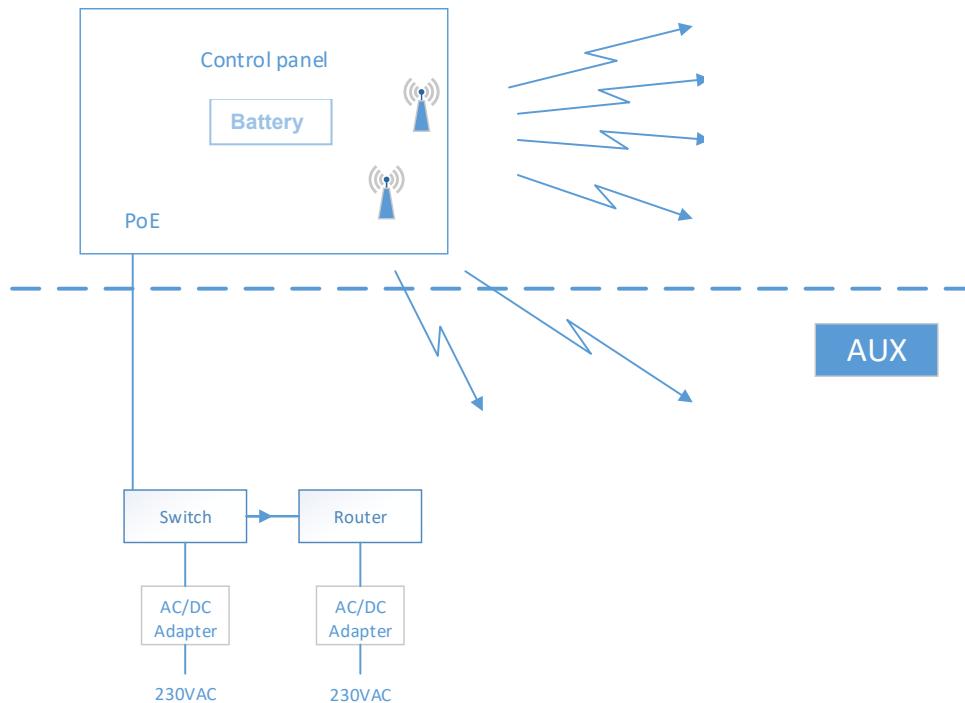

6.5 Transmitter characteristics

Type of equipment						
<input checked="" type="checkbox"/> V	Stand-alone (Equipment with or without its own control provisions)					
Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
Plug-in card (Equipment intended for a variety of host systems)						
Assigned frequency ranges		902 – 928 MHz				
Operating frequencies		902.25-927.55 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm	
		Peak output power			18.81 dBm	
Is transmitter output power variable?		<input checked="" type="checkbox"/> V	No			
		<input checked="" type="checkbox"/> Yes		continuous variable		
				stepped variable with stepsize		dB
				minimum RF power		dBm
				maximum RF power		dBm
Antenna connection						
unique coupling	standard connector		<input checked="" type="checkbox"/> V	integral	with temporary RF connector	
			<input checked="" type="checkbox"/> V	without temporary RF connector		
Antenna/s technical characteristics						
Type	Manufacturer		Model number		Gain	
Internal	KEXIN		KX-NZTH914		0dBi	
Transmitter aggregate data rate/s		19.2 kbps				
Type of modulation		GFSK				
Modulating test signal (baseband)						
Transmitter power source						
<input checked="" type="checkbox"/> V	Battery (backup)	Nominal rated voltage	3.7VDC	Battery type	Lithium-ion	
<input checked="" type="checkbox"/> V	DC	Nominal rated voltage	48 VDC			
	AC mains	Nominal rated voltage		Frequency		
Common power source for transmitter and receiver			<input checked="" type="checkbox"/> V	yes	no	
Spread spectrum technique used			<input checked="" type="checkbox"/> V	Frequency hopping (FHSS)		
				Digital transmission system (DTS)		
				Hybrid		
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
FHSS	Total number of hops		254			
	Bandwidth per hop		78.92kHz			
	Max. separation of hops		99.86kHz			

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jan-25		
Temperature: 23 °C	Relative Humidity: 33 %	Air Pressure: 1021 hPa	Power: 48 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.
- 7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jan-25		
Temperature: 23 °C	Relative Humidity: 33 %	Air Pressure: 1021 hPa	Power: 48 VDC
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz

DETECTOR USED: Peak

SWEEP TIME: Auto

VIDEO BANDWIDTH: 3 kHz

MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc

MODULATING SIGNAL: PRBS

FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, kbps	99% bandwidth, kHz	20 dB bandwidth, kHz	Limit, kHz	Margin*, kHz	Verdict
Low frequency							
902.25	GFSK	19.2	77.523	78.720	250	-171.28	Pass
Mid frequency							
914.95	GFSK	19.2	77.323	78.920	250	-171.08	Pass
High frequency							
927.55	GFSK	19.2	77.323	78.720	250	-171.28	Pass

* - Margin = 20 dB bandwidth – specification limit.

Reference numbers of test equipment used

HL 0337	HL 4135	HL 4355	HL 5643	HL 5933			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc


Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), 20 dB bandwidth		
Test procedure:	ANSI C63.10, section 7.8.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jan-25		
Temperature: 23 °C	Relative Humidity: 33 %	Air Pressure: 1021 hPa	Power: 48 VDC
Remarks:			


Plot 7.1.1 The 20 dB bandwidth test result at low frequency

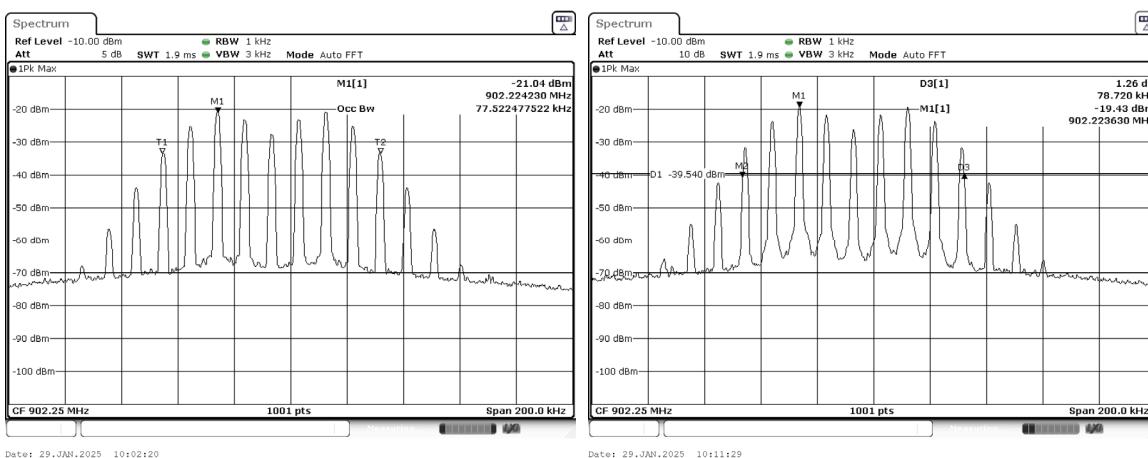

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

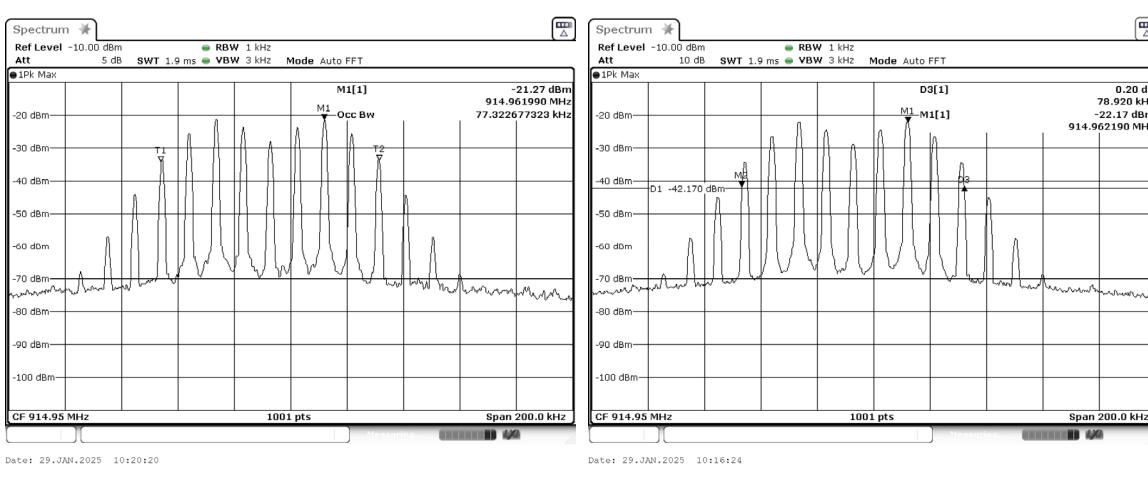

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

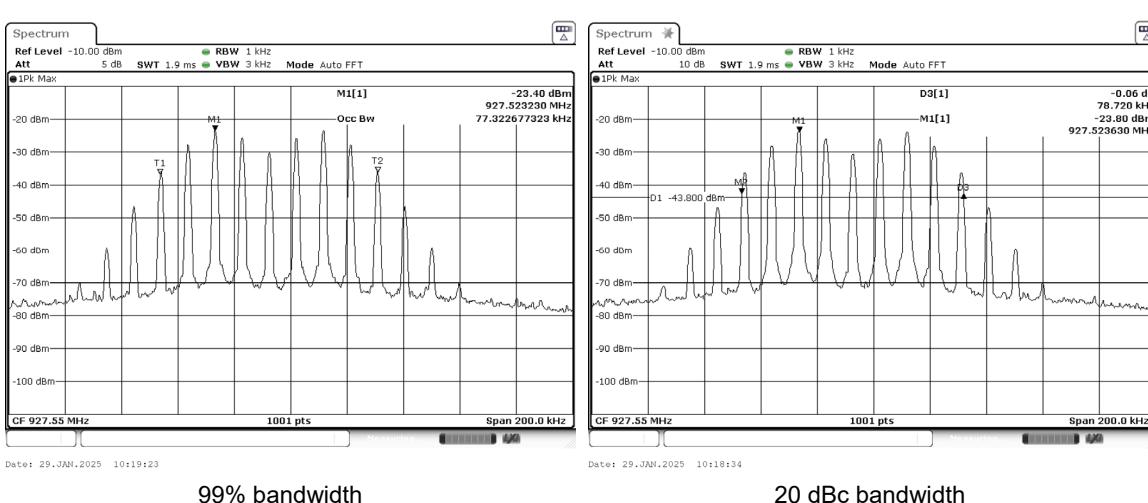

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jan-25		
Temperature: 23 °C	Relative Humidity: 33 %	Air Pressure: 1021 hPa	Power: 48 VDC
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation	
	Output power 30 dBm	Output power 21 dBm
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5		
5725.0 – 5850.0		

7.2.2 Test procedure

The EUT was set up as shown in

- 7.2.2.1 Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(b), Frequency separation		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jan-25		
Temperature: 23 °C	Relative Humidity: 33 %	Air Pressure: 1021 hPa	Power: 48 VDC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
 MODULATION: GFSK
 BIT RATE: 19.2 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: 78.92 kHz


Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
99.86	78.92	20.94	Pass

* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 4355	HL 4135	HL 5638	HL 6105			
---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.

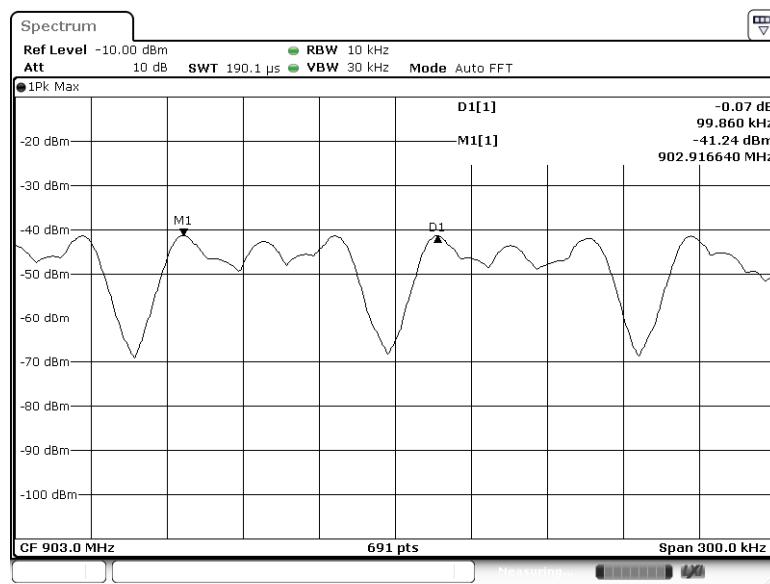Plot 7.2.1 Carrier frequency separation

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Feb-25		
Temperature: 21 °C	Relative Humidity: 43 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Feb-25		
Temperature: 21 °C	Relative Humidity: 43 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902.0 – 928.0 MHz
MODULATION: GFSK
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
254	50	-204	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 4355	HL 4135	HL 5638	HL 6105				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25


Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Feb-25		
Temperature: 21 °C	Relative Humidity: 43 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.1 Number of hopping frequencies



Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Feb-25		
Temperature: 21 °C	Relative Humidity: 43 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.2 Number of hopping frequencies (continuation)

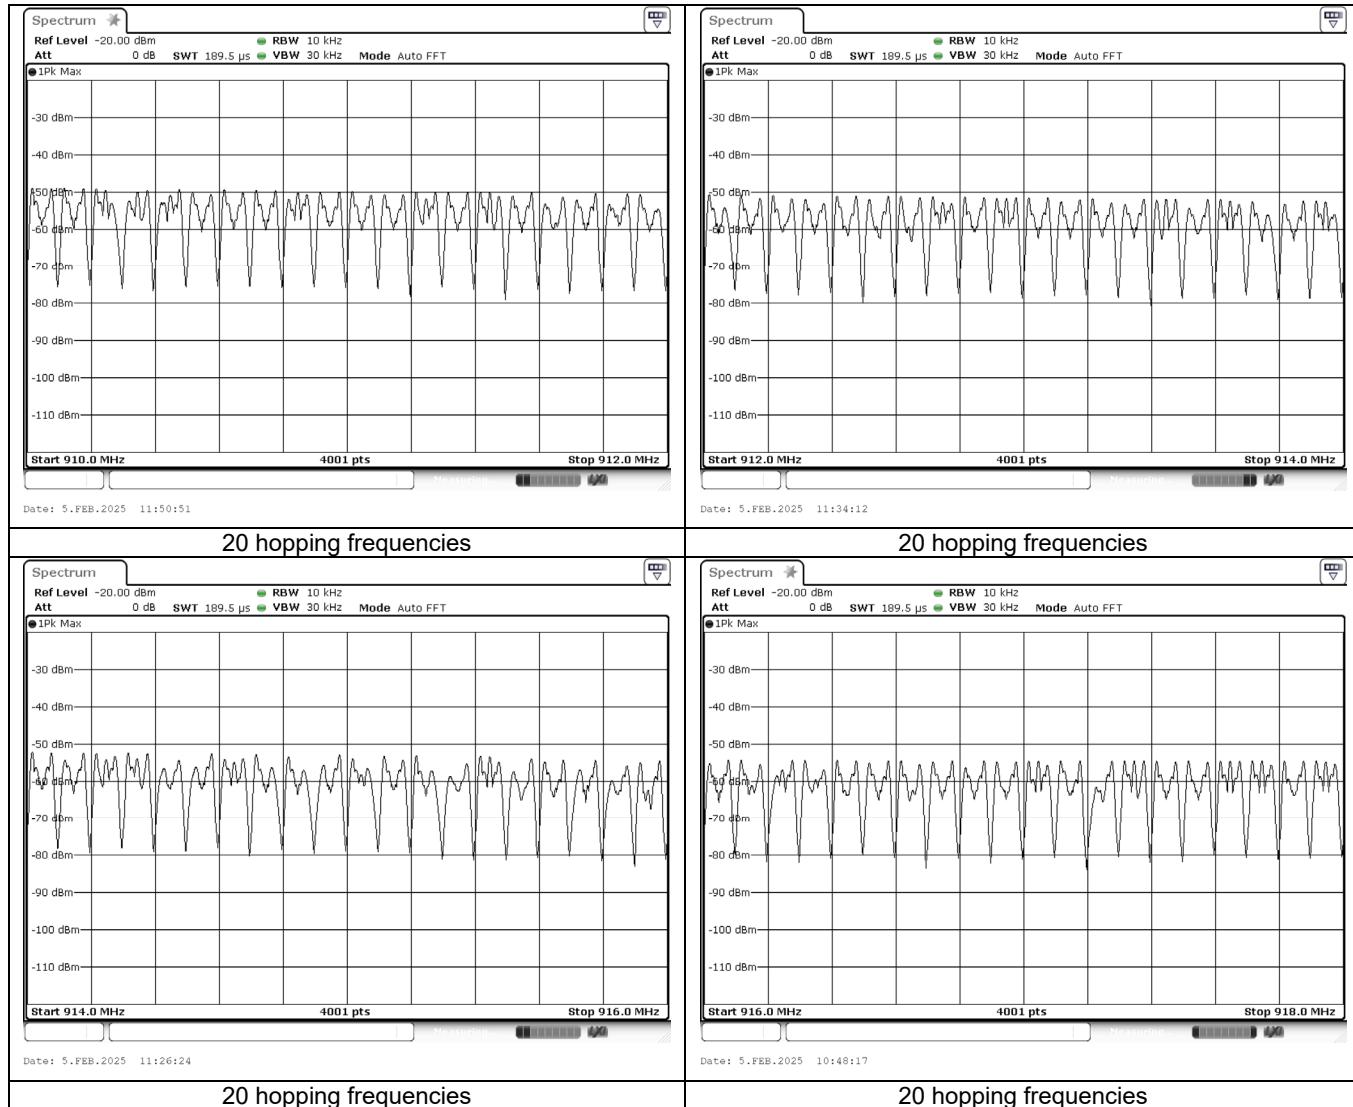




HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Number of hopping frequencies		
Test procedure:	ANSI C63.10, section 7.8.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Feb-25		
Temperature: 21 °C	Relative Humidity: 43 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Plot 7.3.3 Number of hopping frequencies (continuation)

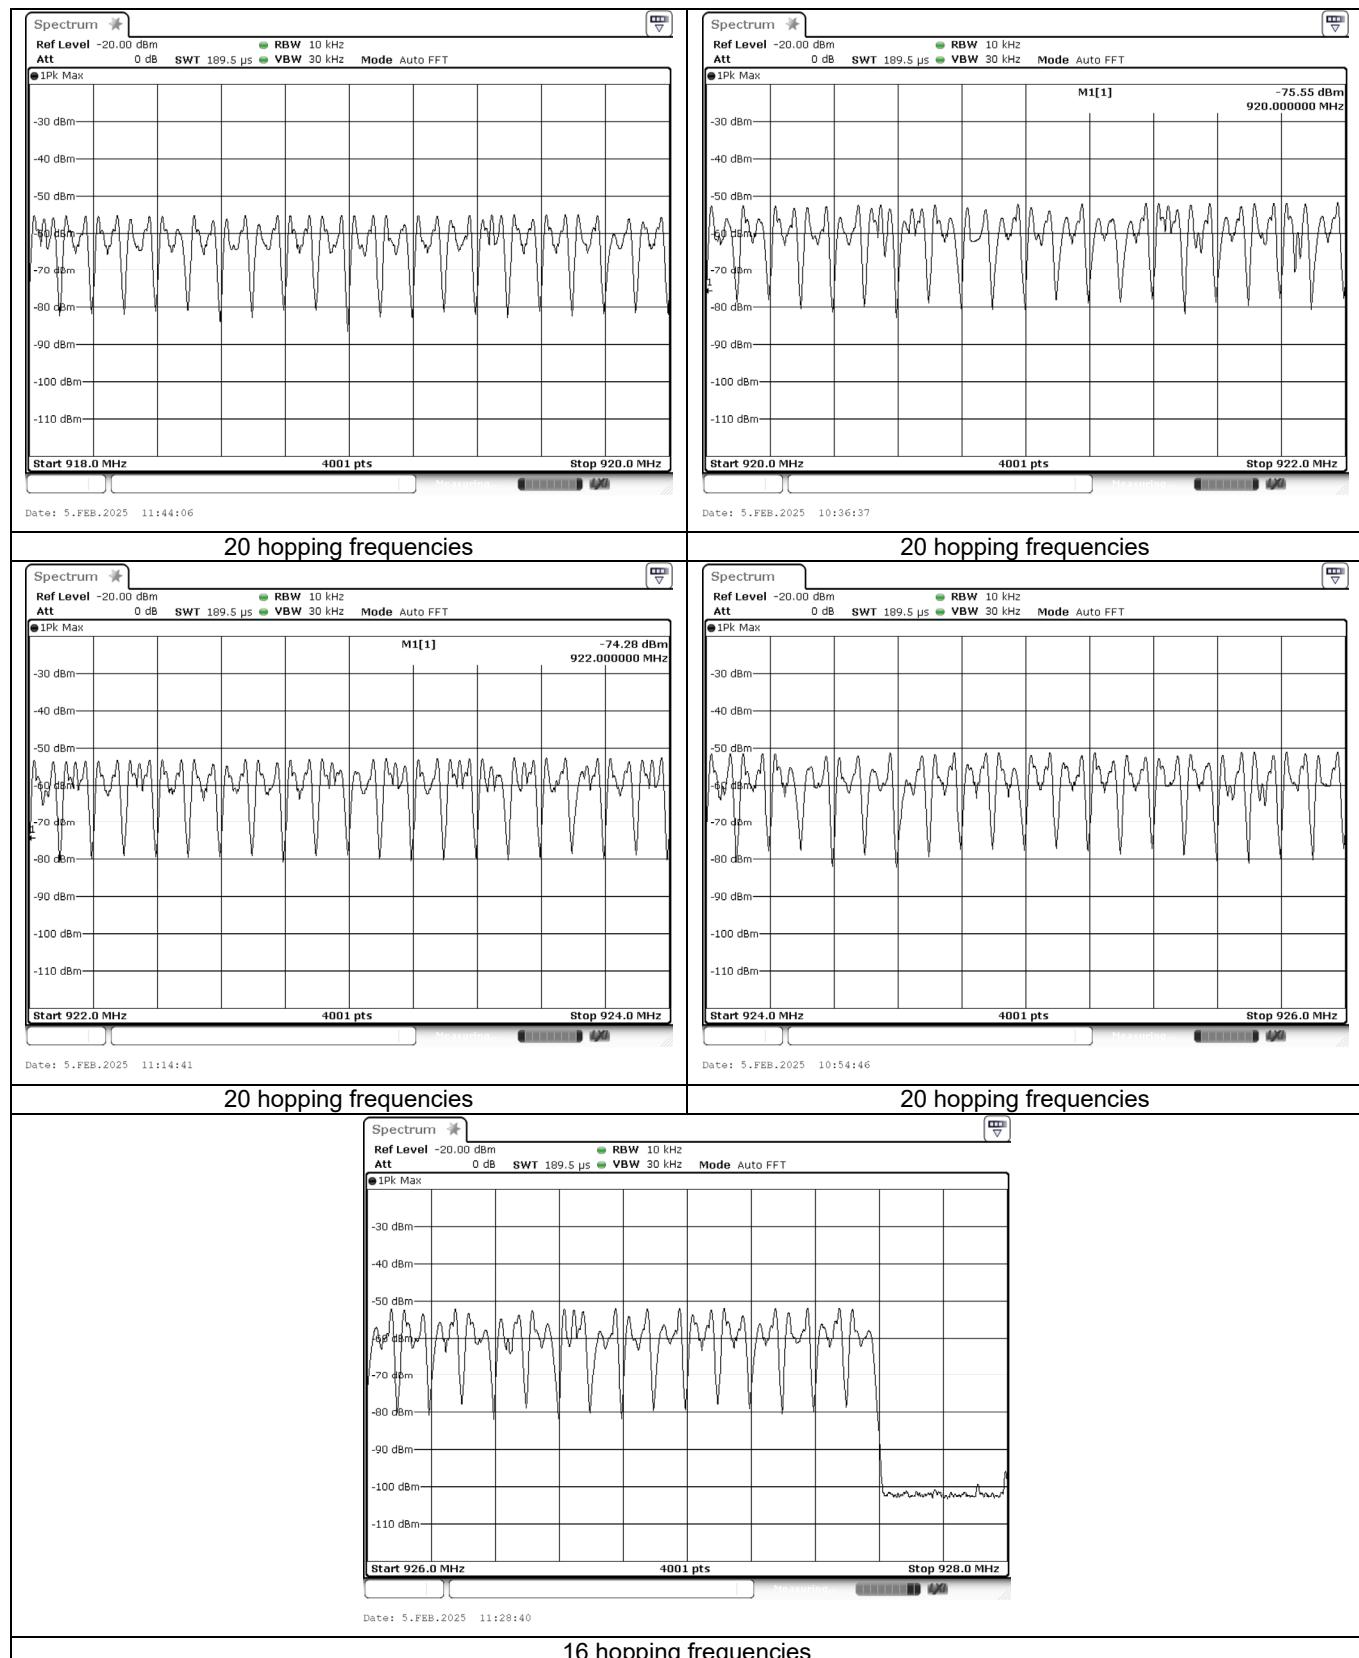

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy		
Test procedure:	ANSI C63.10, section 7.8.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Jun-24		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 996 hPa	Power: 48 VDC
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy		
Test procedure:	ANSI C63.10, section 7.8.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Jun-24		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 996 hPa	Power: 48 VDC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 DETECTOR USED: Peak
 NUMBER OF HOPPING FREQUENCIES: 254
 INVESTIGATED PERIOD: 20 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, ms	Number of transmission during investigation period	Average time of occupancy*, s	Bit rate, kbps	Symbol rate, Msymbol/s	Limit, s	Margin, s**	Verdict
915.0	9.0	5	0.045	19.2	NA	0.4	-0.355	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

** - Margin = Average time of occupancy – specification limit.


Reference numbers of test equipment used

HL 4355	HL 4136	HL 5589	HL 6105				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:	Section 15.247(a)1, RSS-247 section 5.1(c), Average time of occupancy		
Test procedure:	ANSI C63.10, section 7.8.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Jun-24		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 996 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.1 Single transmission duration

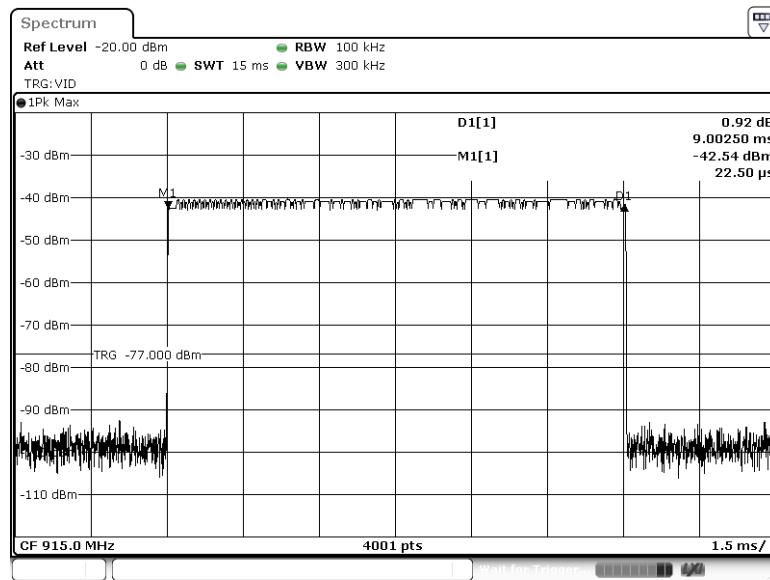

Plot 7.4.2 Single transmission period





Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels) 1.0 (≥50 hopping channels)	24.0(<50 hopping channels) 30.0 (≥50 hopping channels)	125.2 (<50 hopping channels) 131.2 (≥50 hopping channels)	6.0*

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

**- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

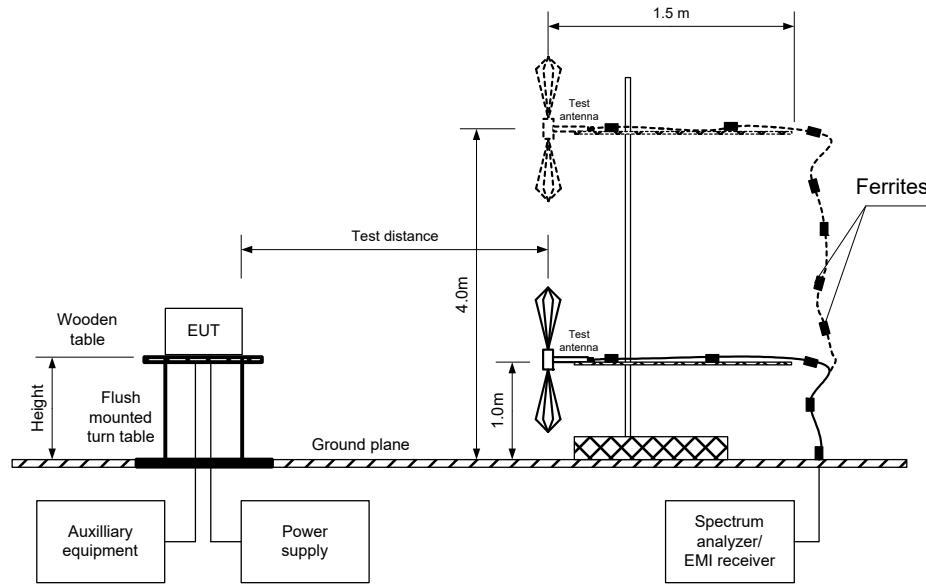



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY:	902-928 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	0.8 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
DETECTOR USED:	Peak
EUT 20 dB BANDWIDTH:	78.92 kHz
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
FREQUENCY HOPPING:	Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS:	254

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
902.25	114.01	Horizontal	1.59	7	0	18.81	30	-11.19	Pass
914.95	111.29	Horizontal	1.59	7	0	16.09	30	-13.91	Pass
927.55	109.57	Vertical	1.19	-78	0	14.37	30	-15.63	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Report ID: PARRAD_FCC.54136_TR_rev1.doc
Date of Issue: 20-Jul-25

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			


Plot 7.5.1 Field strength of carrier at low frequency

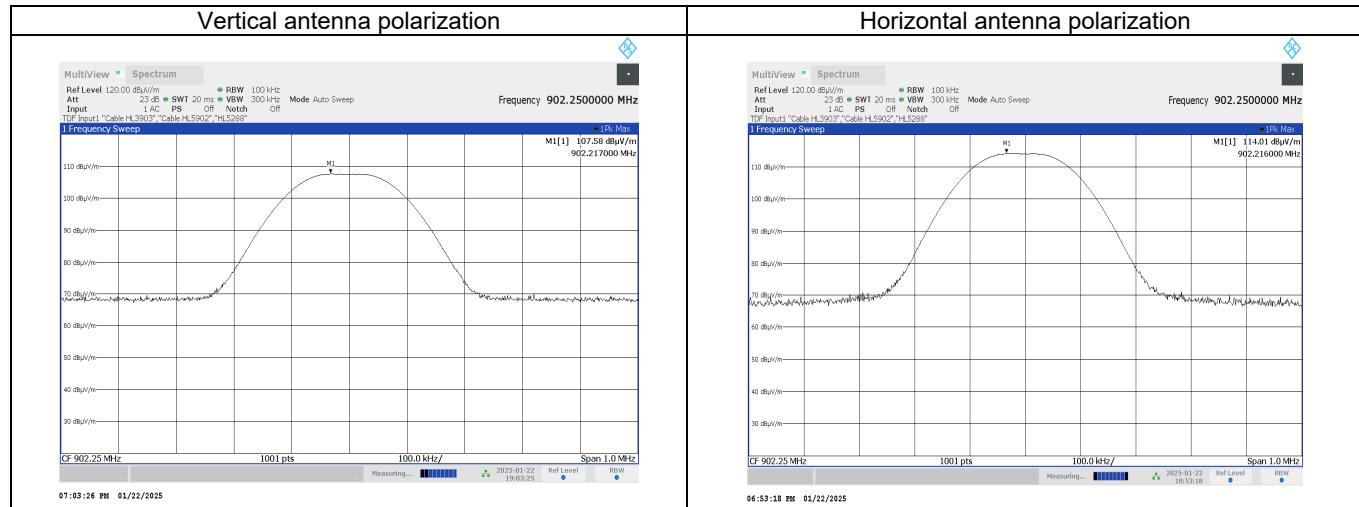

Plot 7.5.2 Field strength of carrier at mid frequency

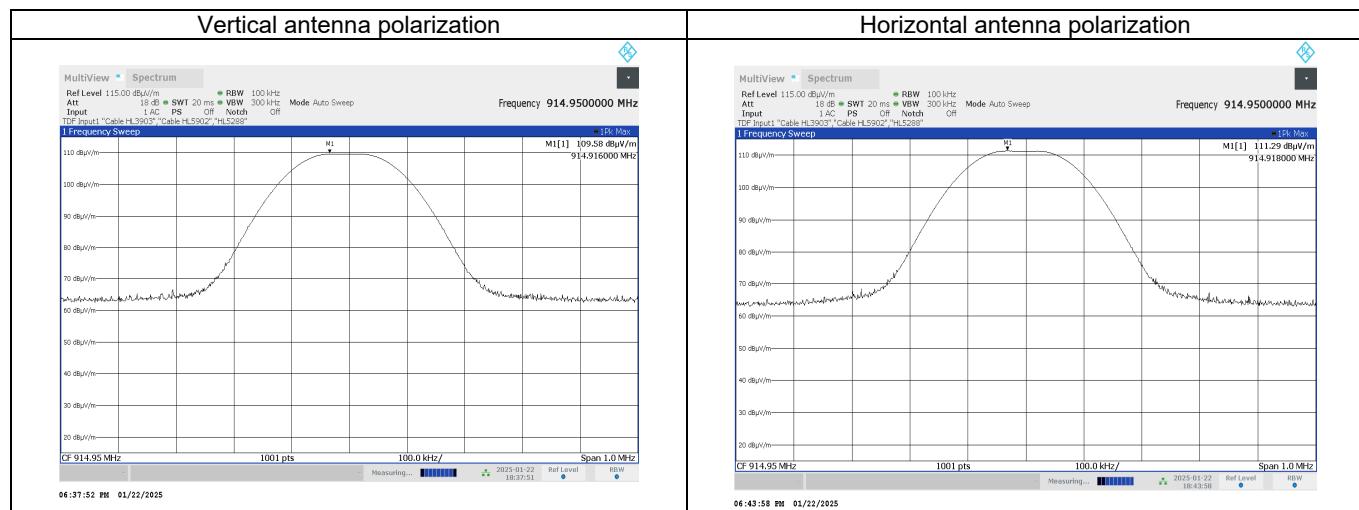

Plot 7.5.3 Field strength of carrier at high frequency

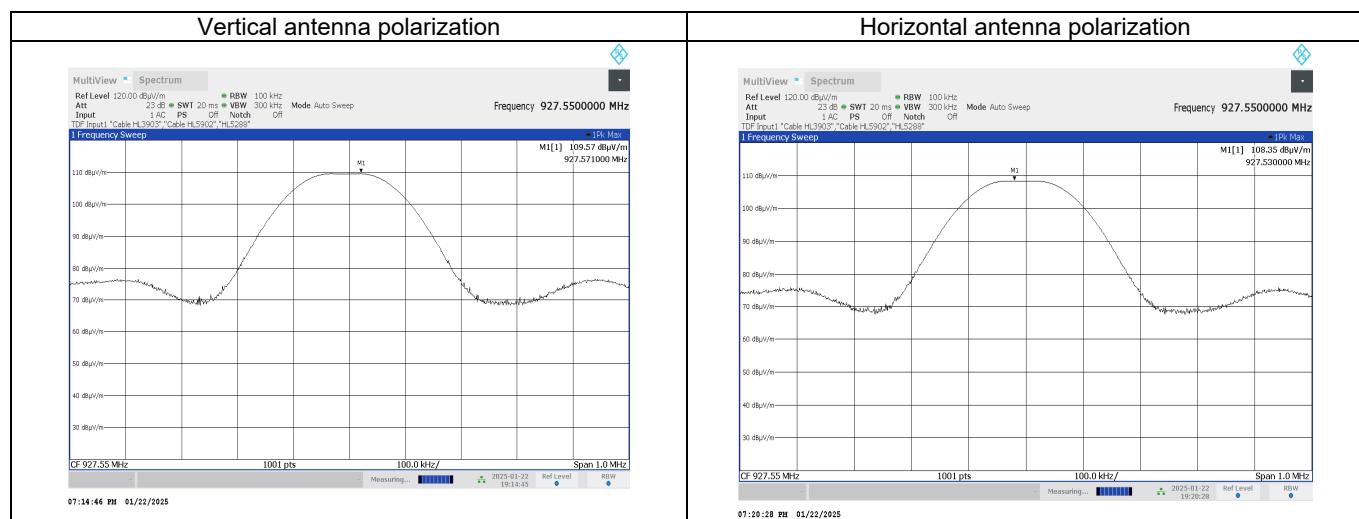



Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Jun-25		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:	M25LTE-9C model		

7.6 Peak output power, M25LTE-9C model

7.6.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels) 1.0 (≥50 hopping channels)	24.0(<50 hopping channels) 30.0 (≥50 hopping channels)	125.2 (<50 hopping channels) 131.2 (≥50 hopping channels)	6.0*

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

**- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.6.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.6.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.6.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.6.2.6 The worst test results (the lowest margins) were recorded in Table 7.6.2.

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Jun-25		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks: M25LTE-9C model			

Figure 7.6.1 Setup for carrier field strength measurements

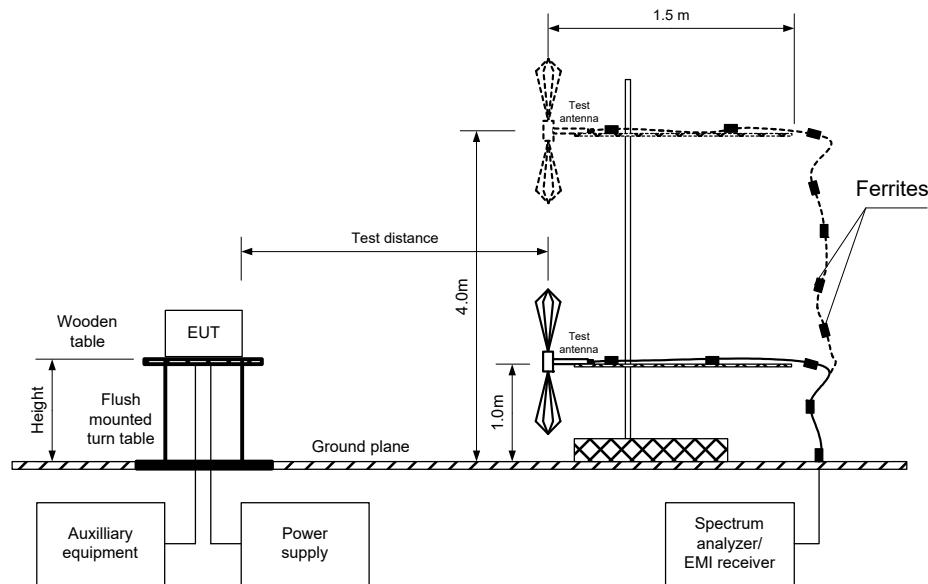



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Jun-25		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:	M25LTE-9C model		

Table 7.6.2 Peak output power test results

ASSIGNED FREQUENCY:	902-928 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	0.8 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
DETECTOR USED:	Peak
EUT 20 dB BANDWIDTH:	78.92 kHz
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
FREQUENCY HOPPING:	Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS:	254

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
902.25	111.29	Horizontal	1.41	21	0	16.09	30	-13.91	Pass
914.85	113.86	Horizontal	1.41	11	0	18.66	30	-11.34	Pass
927.55	115.34	Horizontal	1.41	11	0	20.14	30	-9.86	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc


Date of Issue: 20-Jul-25

Test specification:	Section 15.247(b) , RSS-247 section 5.4(a), Peak output power		
Test procedure:	ANSI C63.10, section 7.8.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Jun-25		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks: M25LTE-9C model			


Plot 7.6.1 Field strength of carrier at low frequency

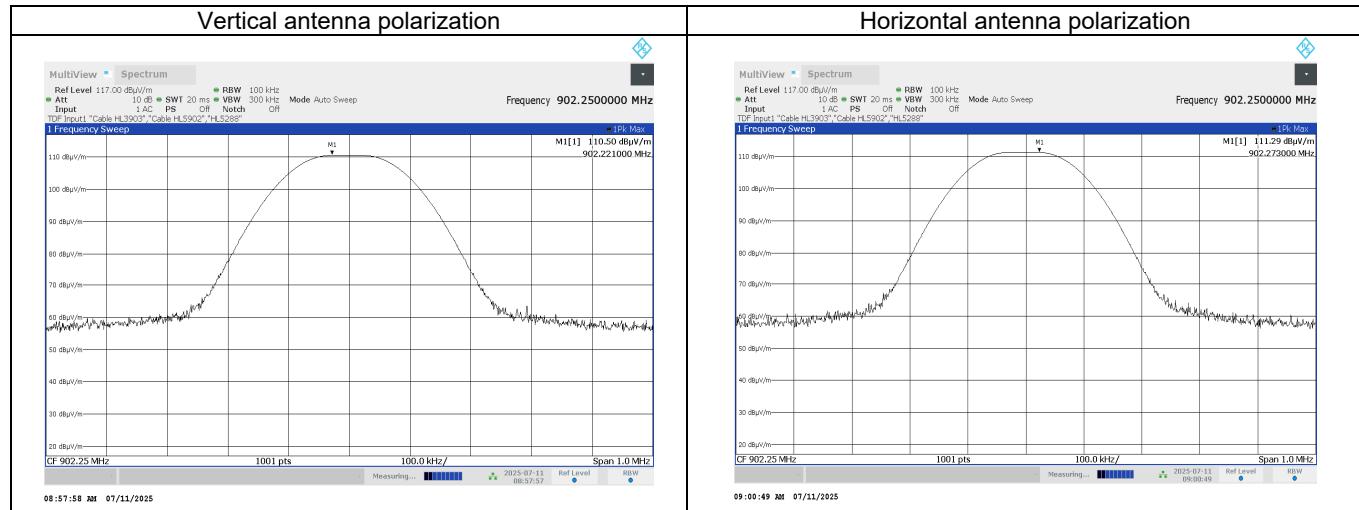

Plot 7.6.2 Field strength of carrier at mid frequency

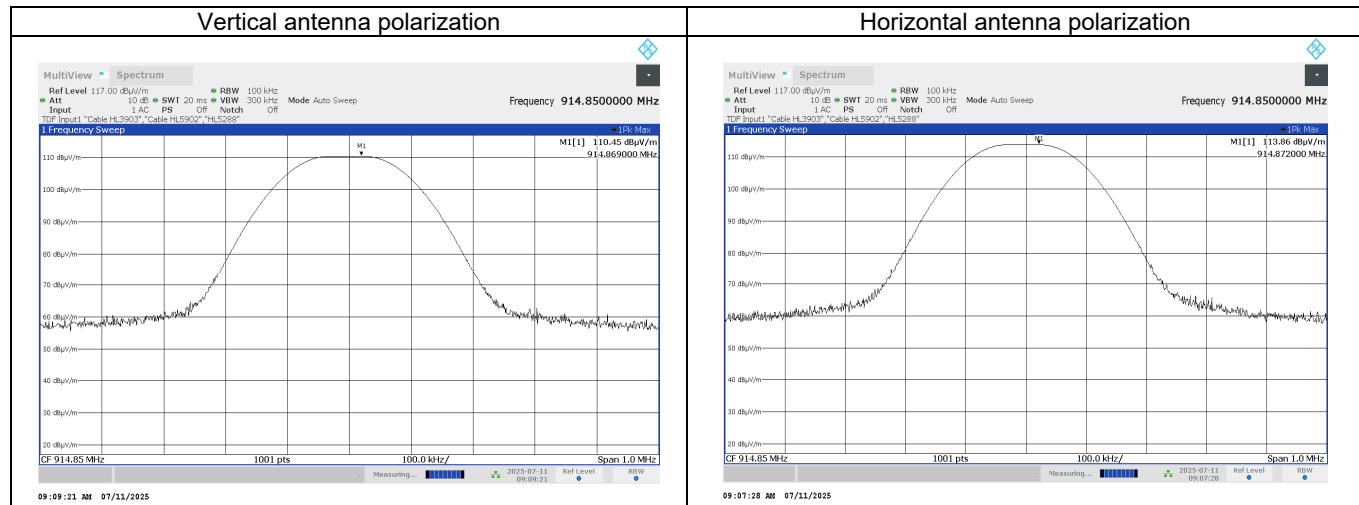

Plot 7.6.3 Field strength of carrier at high frequency

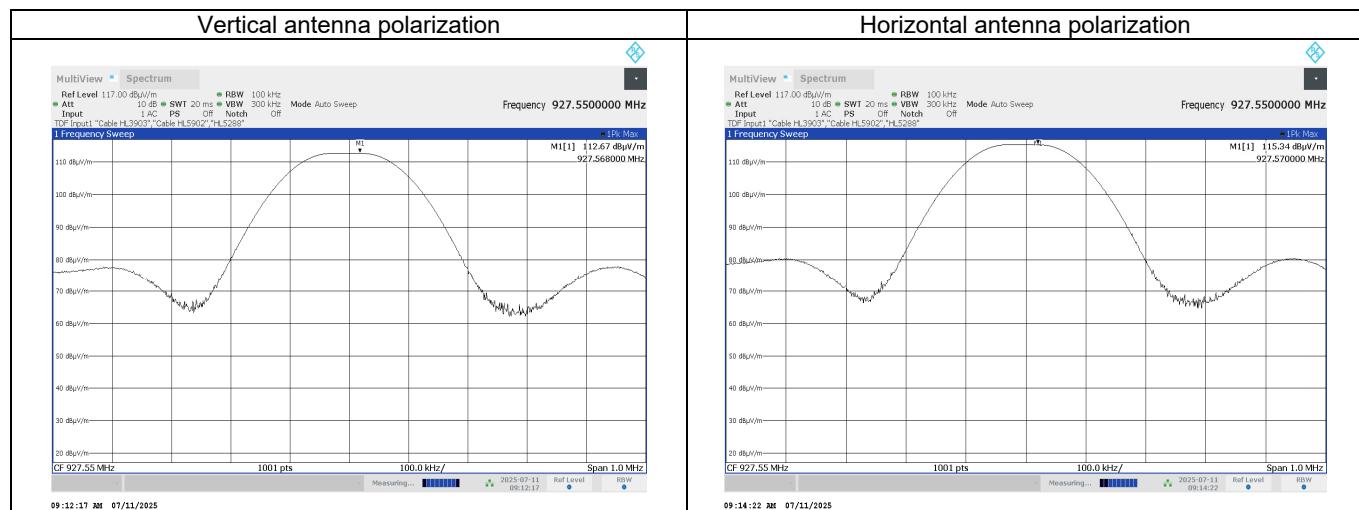



Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	20.0
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$L_{m2} = L_{m1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz


7.7.3.1 The EUT was set up as shown in Figure 7.7.2, Figure 7.7.3, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz

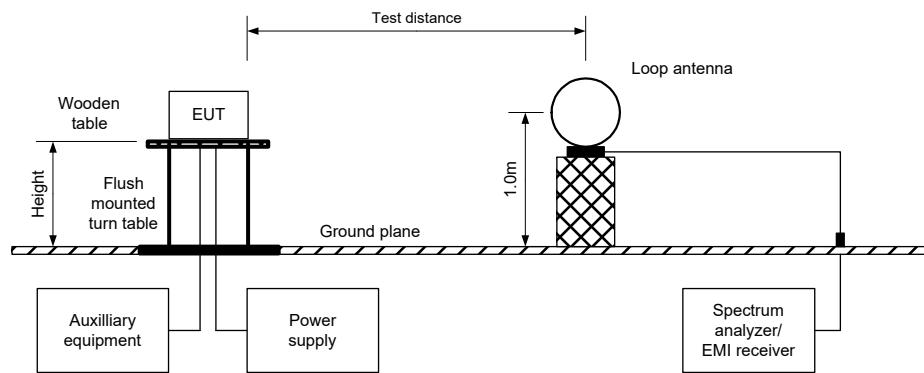

Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Figure 7.7.2 Setup for spurious emission field strength measurements from 30 to 1000 MHz


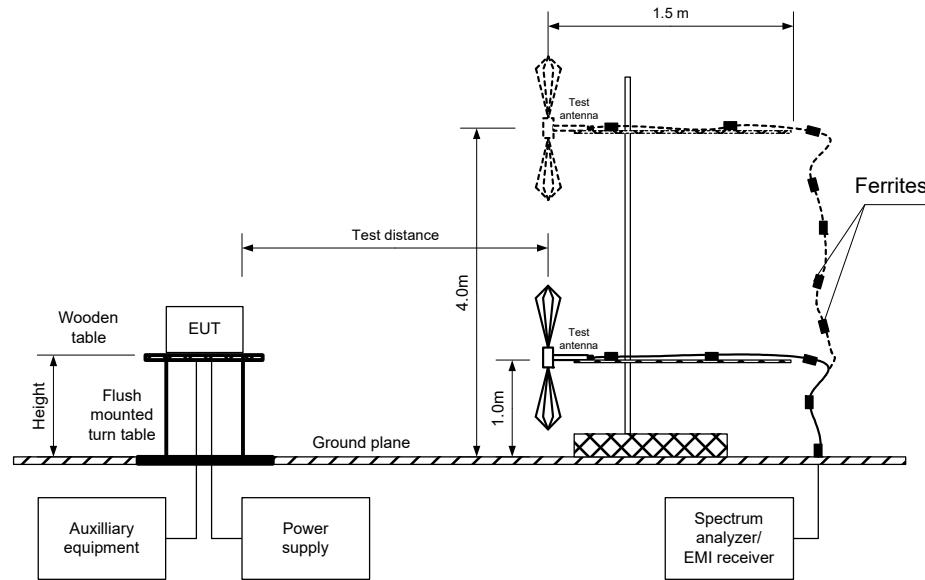


Figure 7.7.3 Setup for spurious emission field strength measurements above 1000 MHz



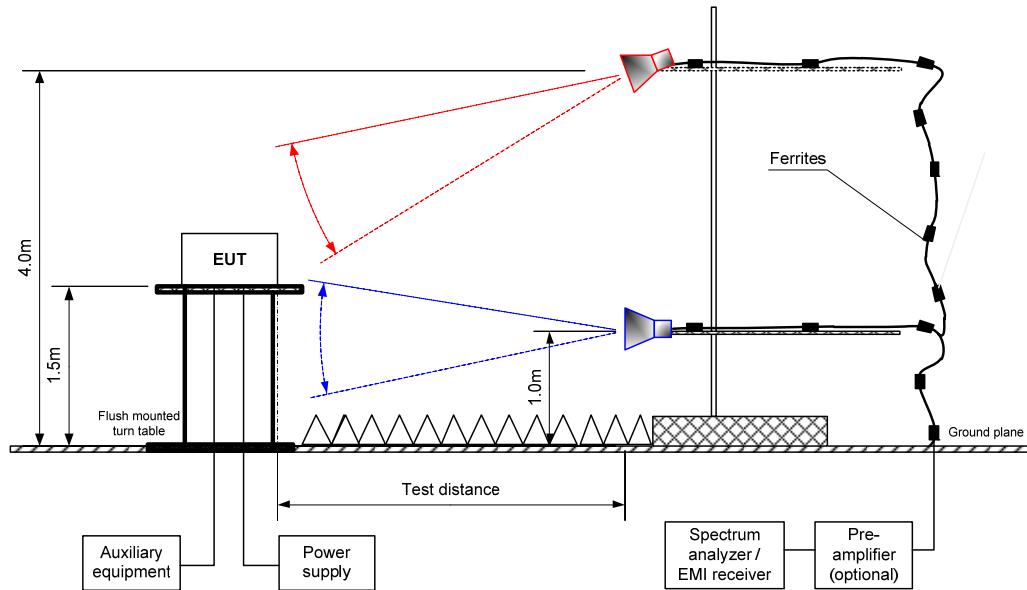

Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 95000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.81 dBm at low carrier frequency 16.09 dBm at mid carrier frequency 14.37 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency (902.25 MHz)									
34.462	41.13	Vertical	1.00	-111	114.01	72.88	20.0	-52.88	Pass
500.006	44.39	Vertical	1.63	44		69.62		-49.62	
600.004	45.76	Vertical	1.40	-39		68.25		-48.25	
1804.500	43.84	Horizontal	1.65	-6		70.17		-50.17	
6315.75	48.88	Horizontal	1.10	-53		65.13		-45.13	
7218.00	47.88	Horizontal	1.24	-62		66.13		-46.13	
Mid carrier frequency (914.95 MHz)									
33.204	34.56	Vertical	1.00	-74	111.29	76.73	20.0	-56.73	Pass
49.993	38.81	Vertical	1.21	-98		72.48		-52.48	
499.997	43.99	Horizontal	1.80	34		67.30		-47.30	
599.972	45.08	Vertical	1.25	-51		66.21		-46.21	
882.928	49.90	Horizontal	1.40	-16		61.39		-41.39	
1829.90	57.40	Vertical	1.30	-59		53.89		-33.89	
5489.70	50.10	Vertical	1.30	16		61.19		-41.19	
6404.65	55.20	Horizontal	1.65	-53		56.09		-36.09	
High carrier frequency (927.55 MHz)									
36.108	36.91	Vertical	2.61	180	109.57	72.66	20.0	-72.66	Pass
46.599	37.40	Vertical	1.00	-99		72.17		-52.17	
499.977	43.41	Horizontal	1.79	33		66.16		-46.16	
600.004	46.54	Horizontal	1.24	44		63.03		-43.03	
750.000	46.76	Horizontal	1.00	-37		62.81		-42.81	
895.522	50.25	Horizontal	1.41	-16		59.32		-39.32	
1855.10	53.44	Horizontal	2.30	-5		56.13		-36.13	
5565.30	50.33	Vertical	1.10	16		59.24		-39.24	
6492.85	44.65	Horizontal	1.00	-53		64.92		-44.92	
9275.50	53.20	Vertical	2.00	48		56.37		-36.37	

* EUT front panel refers to 0 degrees position of turntable.

** Margin = Specification limit – attenuation below carrier



Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	1000 -9500 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.81 dBm at low carrier frequency 16.09 dBm at mid carrier frequency 14.37 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1000 kHz
TEST ANTENNA TYPE:	Double ridged guide
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Low carrier frequency (902.25 MHz)										
2706.75	Vertical	1.45	0	57.5	74	-16.5	57.5	36.5	54	-17.5
3609.00	Vertical	1.05	-23	52.2	74	-21.8	52.2	31.2	54	-22.8
4511.25	Vertical	1.65	48	54.6	74	-19.4	54.6	33.6	54	-20.4
5413.50	Vertical	1.66	16	48.8	74	-25.2	48.8	27.8	54	-26.2
9022.50	Vertical	1.40	8	49.0	74	-25.0	49.0	28.0	54	-26.0
Mid carrier frequency (914.95 MHz)										
2744.85	Vertical	1.35	0	60.1	74	-13.9	60.1	39.1	54	-14.9
3659.80	Vertical	1.10	-11	58.8	74	-15.2	58.8	37.8	54	-16.2
4574.75	Vertical	1.80	46	55.8	74	-18.2	55.8	34.8	54	-19.2
7319.60	Horizontal	1.87	-50	50.3	74	-23.7	50.3	29.3	54	-24.7
8234.55	Horizontal	2.10	-4	51.4	74	-22.6	51.4	30.4	54	-23.6
9149.50	Horizontal	2.30	-57	55.2	74	-18.8	55.2	34.2	54	-19.8
High carrier frequency (927.55 MHz)										
2782.65	Vertical	1.93	-25	63.8	74	-10.2	63.8	42.8	54	-11.2
3710.20	Vertical	1.15	40	64.7	74	-9.3	64.7	43.7	54	-10.3
4637.75	Vertical	1.44	21	52.6	74	-21.4	52.6	31.6	54	-22.4
7420.40	Horizontal	1.87	-52	54.3	74	-19.7	54.3	33.3	54	-20.7

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number pulse during 100 ms	Duration, ms	Period, ms		
9	1	NA	NA	NA	-21.0

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	19.2 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.81 dBm at low carrier frequency 16.09 dBm at mid carrier frequency 14.37 dBm at high carrier frequency
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak		Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)					
Low carrier frequency (902.25 MHz)								
249.986	38.11	33.88	46.00	-12.12	Horizontal	1.00	69	Pass
399.982	42.46	38.50	46.00	-7.50	Vertical	1.00	-3	
Mid carrier frequency (914.95 MHz)								
249.986	38.98	35.04	46.00	-10.96	Horizontal	1.00	68	Pass
324.984	38.39	33.00	46.00	-13.00	Horizontal	1.00	55	
400.010	40.81	34.24	46.00	-11.76	Horizontal	1.00	-62	
High carrier frequency (927.55 MHz)								
250.014	38.39	34.49	46.00	-11.51	Horizontal	1.01	-99	Pass
400.010	41.48	36.51	46.00	-9.49	Horizontal	1.00	43	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions				
Test procedure:	ANSI C63.10, sections 6.5, 6.6				
Test mode:	Compliance			Verdict:	PASS
Date(s):	13-Mar-25				
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa			Power: 48 VDC
Remarks:					

Table 7.7.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.7.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 5288	HL 4933	HL 5902	HL 3903	HL 7585	HL 4339	
---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.



Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			


Plot 7.7.1 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

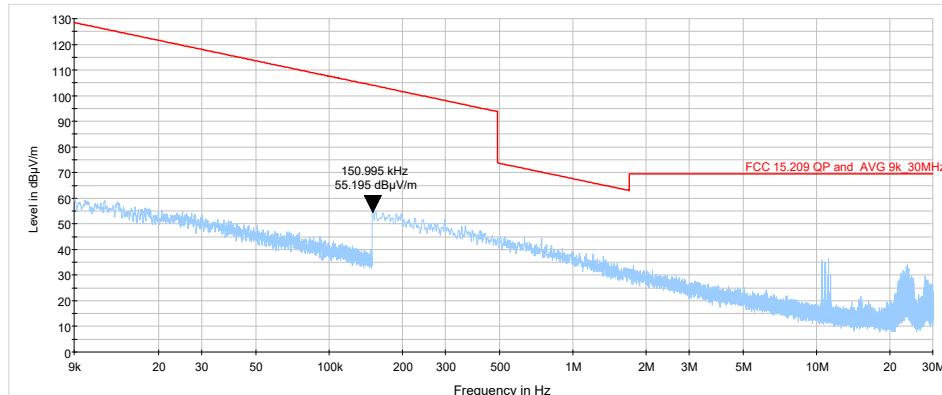


Plot 7.7.2 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

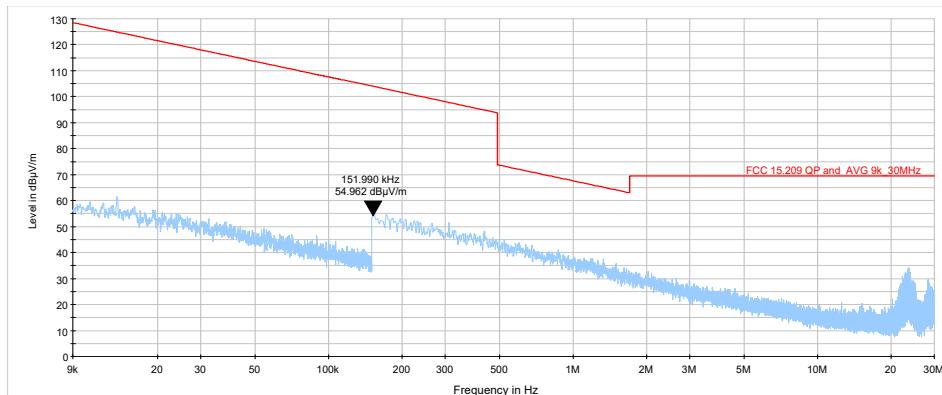

Plot 7.7.3 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

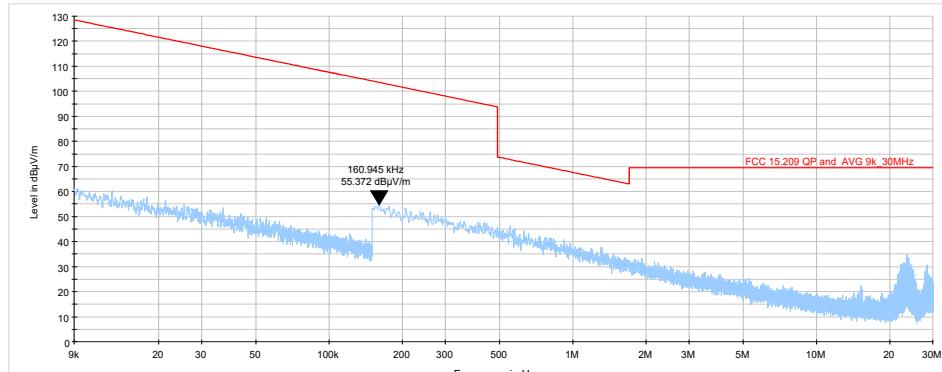




Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			


Plot 7.7.4 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

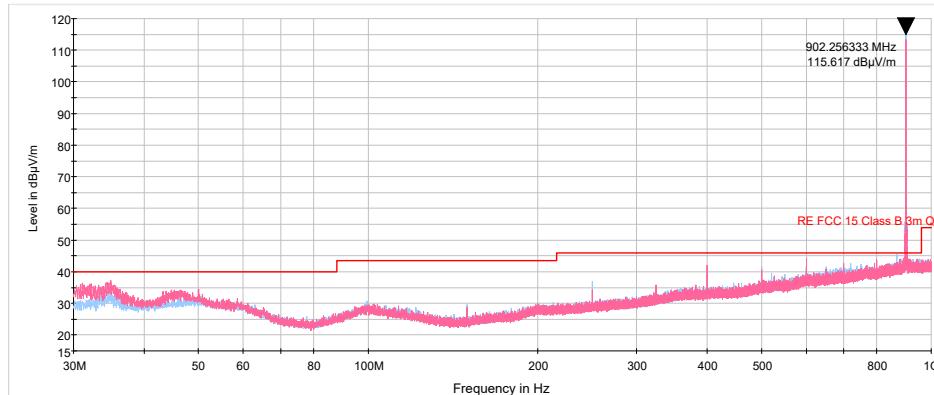


Plot 7.7.5 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

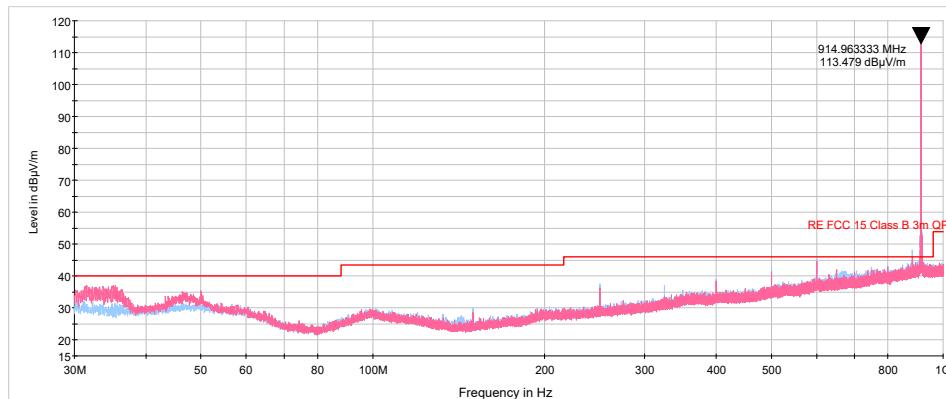

Plot 7.7.6 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

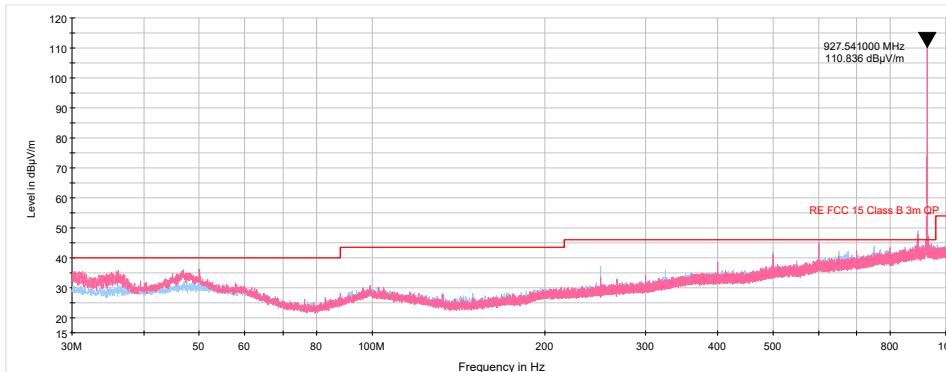




Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			


Plot 7.7.7 Radiated emission measurements from 1 to 9.5 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

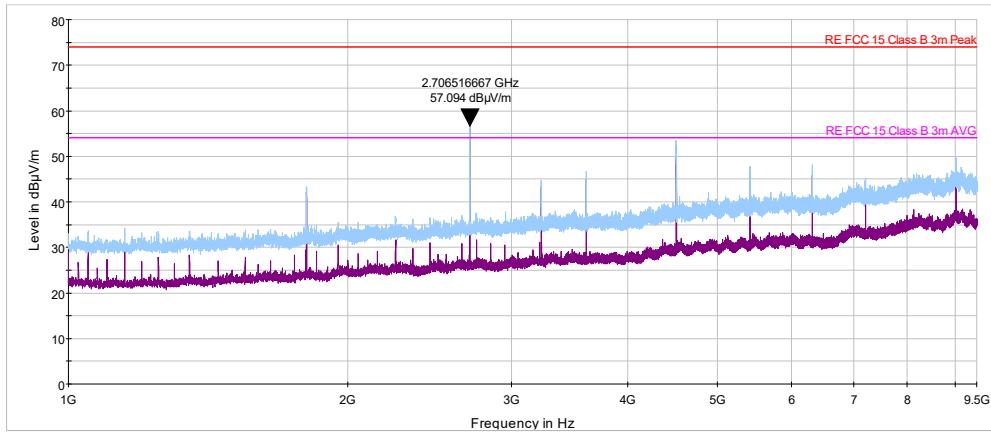


Plot 7.7.8 Radiated emission measurements from 1 to 9.5 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

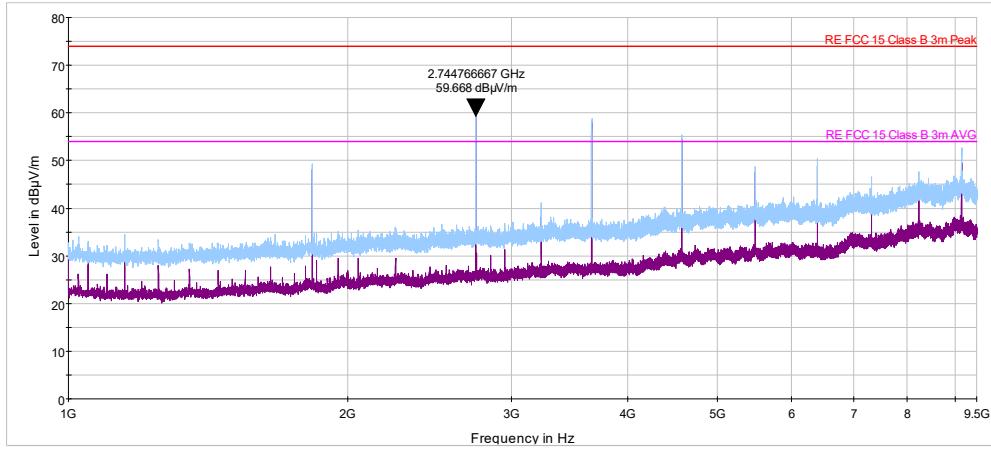

Plot 7.7.9 Radiated emission measurements from 1 to 9.5 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

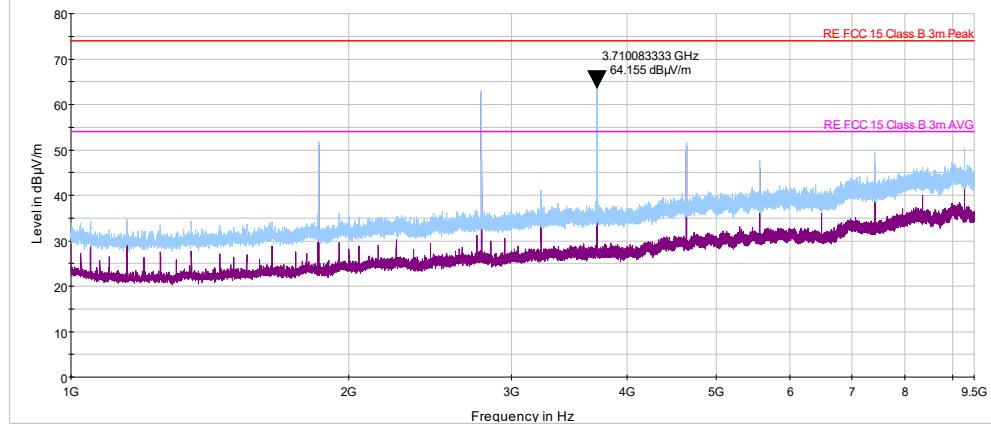





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(c) , RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10, sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	13-Mar-25		
Temperature: 25 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 48 VDC
Remarks:			

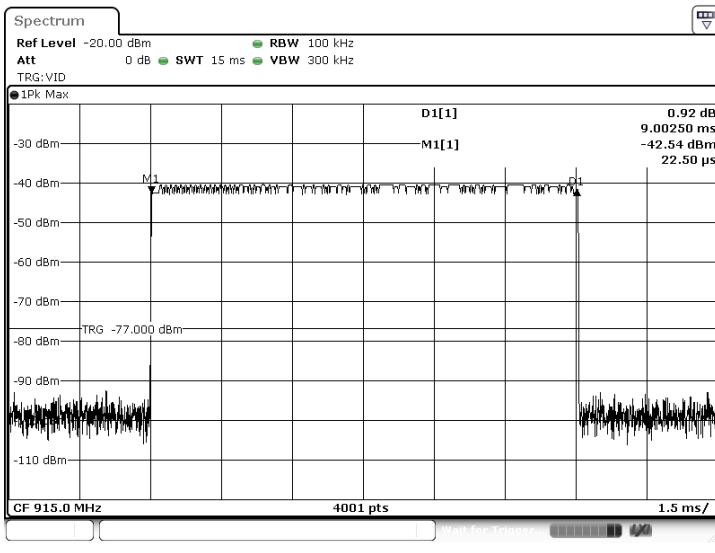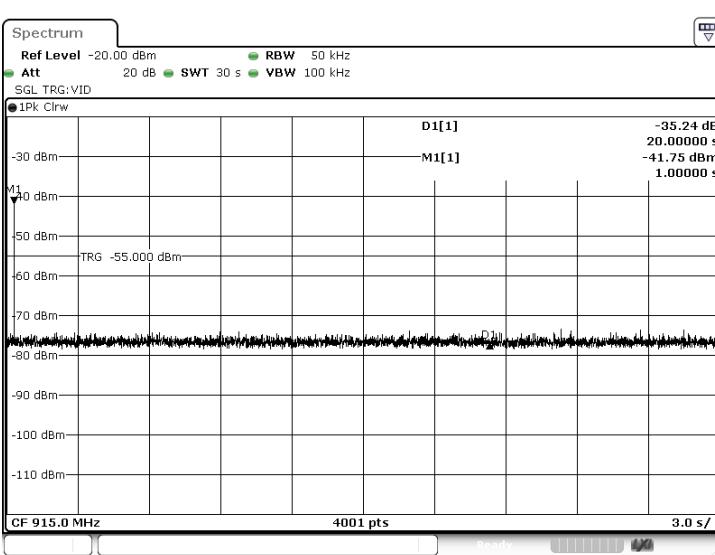Plot 7.7.10 Transmission pulse duration**Plot 7.7.11 Number of pulses during 100 msec**



Test specification:	Section 15.247(c), RSS-247 section 5.5, Emissions at band edges		
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

7.8 Band edge radiated emissions

7.8.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.8.1.

Table 7.8.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.8.2 Test procedure

- 7.8.2.1 The EUT was set up as shown in Figure 7.8.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.8.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.8.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.8.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.8.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.8.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.8.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.8.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.8.1 Band edge emission test setup





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(c), RSS-247 section 5.5, Emissions at band edges		
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

Table 7.8.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 19.2 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 TRANSMITTER OUTPUT POWER: 18.81 dBm at low carrier frequency (measured)
 14.37 dBm at high carrier frequency (measured)
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902.221	71.53	114.15	42.62	20.0	22.62	Pass
927.516	75.98	109.52	33.54		13.54	
Frequency hopping enabled						
902.274	68.40	114.76	46.36	20.0	26.36	Pass
927.575	74.53	109.83	35.30		15.30	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3903	HL 5288	HL 5902	HL 7585				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(c), RSS-247 section 5.5, Emissions at band edges		
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

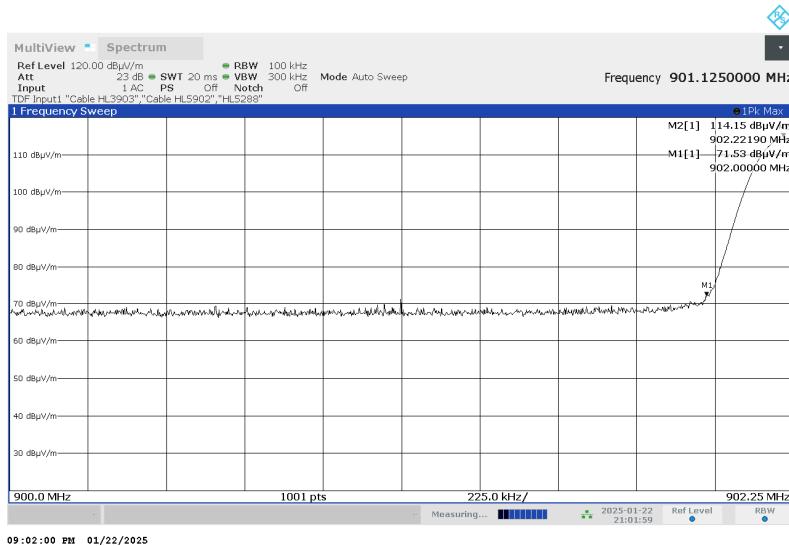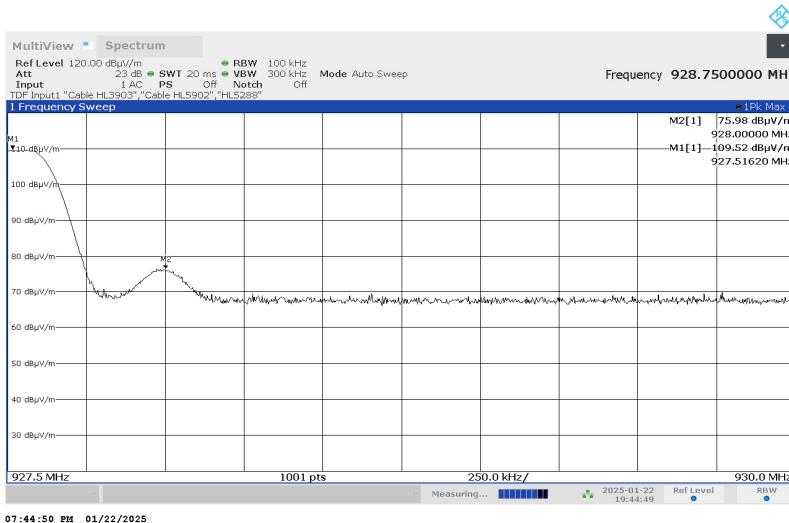Plot 7.8.1 The highest band edge emission at low carrier frequency with hopping function disabled**Plot 7.8.2 The highest band edge emission at high carrier frequency with hopping function disabled**





HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.247(c), RSS-247 section 5.5, Emissions at band edges		
Test procedure:	ANSI C63.10, section 7.8.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

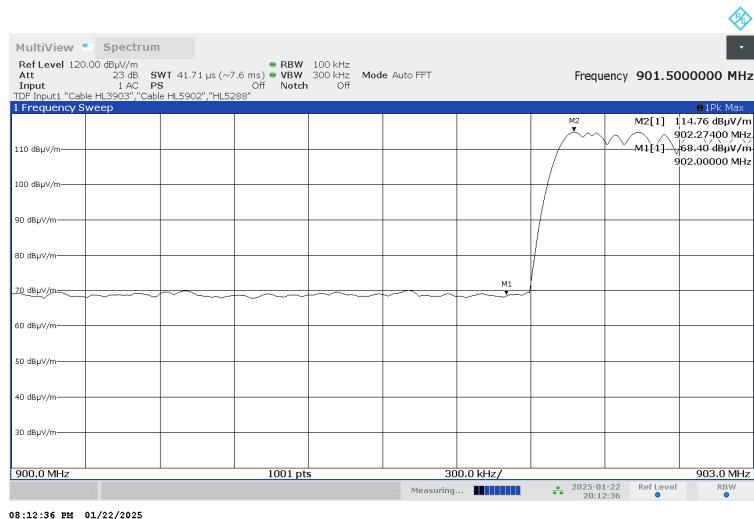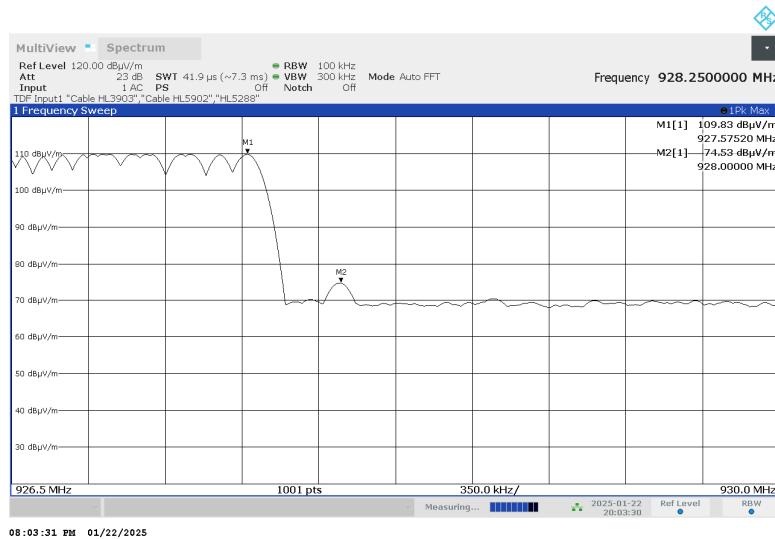Plot 7.8.3 The highest band edge emission at low carrier frequency with hopping function enabled**Plot 7.8.4 The highest band edge emission at high carrier frequency with hopping function enabled**

Test specification:	FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission		
Test procedure:	ANSI C63.4, Section 11.8		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 110 VAC, 60 Hz
Remarks:			

7.9 Conducted emissions

7.9.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.9.1.

Table 7.9.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.9.2 Test procedure

- 7.9.2.1 The EUT was set up as shown in Figure 7.9.1, energized and the performance check was conducted.
- 7.9.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.9.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.9.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.9.2.4 The worst test results (the lowest margins) were recorded in Table 7.9.2 and shown in the associated plots.

Figure 7.9.1 Setup for conducted emission measurements, table-top equipment

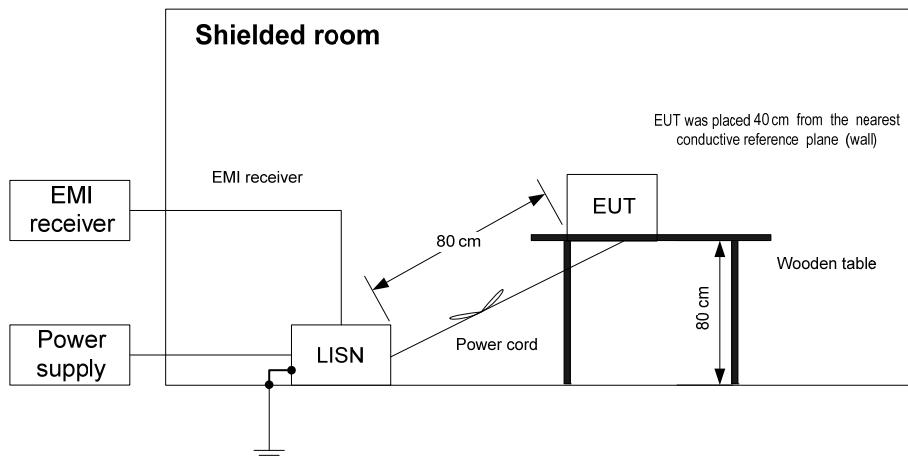



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission				
Test procedure:	ANSI C63.4, Section 11.8				
Test mode:	Compliance			Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24				
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa		Power: 110 VAC, 60 Hz	
Remarks:					

Table 7.9.2 Conducted emission test results

LINE:

AC mains input of PoE power adapter

EUT OPERATING MODE:

Transceive

EUT SET UP:

TABLE-TOP

TEST SITE:

SHIELDED ROOM

DETECTORS USED:

PEAK / QUASI-PEAK / AVERAGE

FREQUENCY RANGE:

150 kHz - 30 MHz

RESOLUTION BANDWIDTH:

9 kHz

Frequency, MHz	Quasi-peak			Average			Line ID	Verdict
	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.504	50.19	56.00	-5.81	33.14	46.00	-12.86	L1	Pass
0.506	50.30	56.00	-5.70	33.29	46.00	-12.71		
0.508	50.21	56.00	-5.79	33.21	46.00	-12.79		
0.510	50.03	56.00	-5.97	33.06	46.00	-12.94		
0.526	49.82	56.00	-6.18	33.08	46.00	-12.92		
0.528	49.92	56.00	-6.08	33.22	46.00	-12.78		
0.502	49.57	56.00	-6.43	32.62	46.00	-13.38		
0.504	49.98	56.00	-6.02	32.85	46.00	-13.15		
0.506	50.03	56.00	-5.97	32.98	46.00	-13.02		
0.508	49.99	56.00	-6.01	32.96	46.00	-13.04		
0.510	49.79	56.00	-6.21	32.73	46.00	-13.27		
0.526	49.51	56.00	-6.49	32.28	46.00	-13.72		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0787	HL 1501	HL 2874	HL 3016	HL 5476	HL 5707		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



Test specification:	FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission		
Test procedure:	ANSI C63.4, Section 11.8		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 110 VAC, 60 Hz
Remarks:			


Plot 7.9.1 Conducted emission measurements, AC mains input of PoE power adapter

LINE: L1
 EUT OPERATING MODE: Transceive
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK, QUASI-PEAK, AVERAGE



Plot 7.9.2 Conducted emission measurements, AC mains input of PoE power adapter

LINE: L2
 EUT OPERATING MODE: Transceive
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK, QUASI-PEAK, AVERAGE

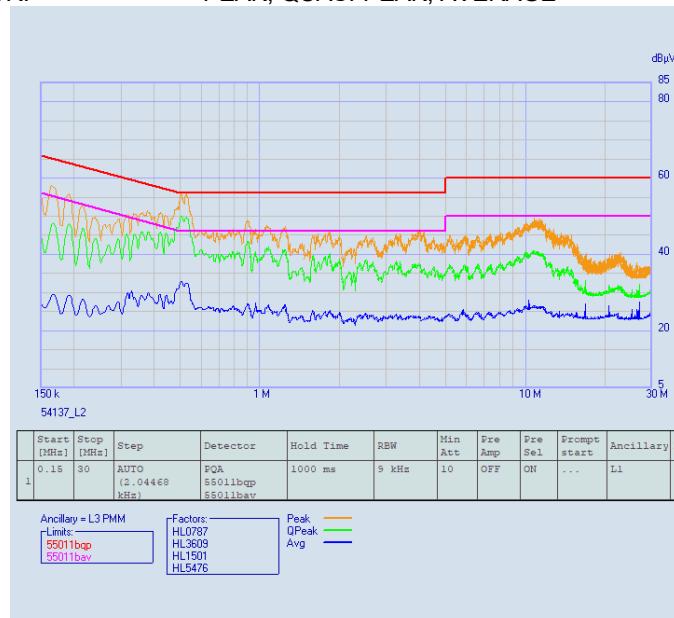



Test specification:	FCC Section 15.203/ RSS-Gen, Section 7.1.4, Antenna requirement		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	22-Jan-25		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: 48 VDC
Remarks:			

7.10 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.10.1.

Table 7.10.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Supplier declaration	

Test specification:	Section 15.107, RSS-Gen section 7.1.6, ICES-003, Conducted emission		
Test procedure:	ANSI C63.4, Section 11.8		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 110 VAC, 60 Hz
Remarks:			

8 Unintentional emissions

8.1 Conducted emissions

8.1.1 General

This test was performed to measure the common mode conducted emissions at the EUT power port. The specification test limits are given in Table 8.1.1.

Table 8.1.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* - The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure

- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1, energized and the EUT performance was checked.
- 8.1.2.2 The measurements were performed at the EUT power terminals with the LISN connected to the EMI receiver in the frequency range referred to in Table 8.1.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.
- 8.1.2.3 The position of the EUT cables was varied to find the highest emission.
- 8.1.2.4 The worst test results with respect to the limits were recorded in Table 8.1.2 and shown in the associated plots.

Figure 8.1.1 Setup for conducted emission measurements, table-top EUT

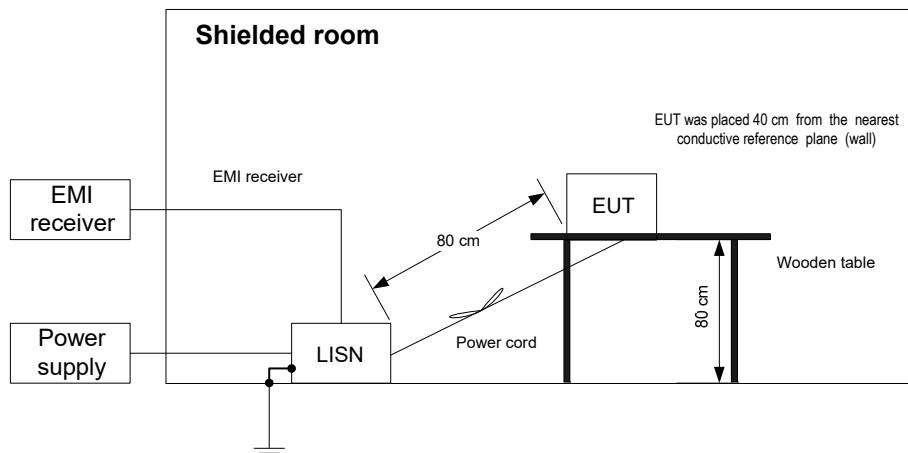



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.107, RSS-Gen section 7.1.6, ICES-003, Conducted emission		
Test procedure:	ANSI C63.4, Section 11.8		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Table 8.1.2 Conducted emission test results

LINE:

AC mains input of PoE power adapter

EUT OPERATING MODE:

Transceive

EUT SET UP:

TABLE-TOP

TEST SITE:

SHIELDED ROOM

DETECTORS USED:

PEAK / QUASI-PEAK / AVERAGE

FREQUENCY RANGE:

150 kHz - 30 MHz

RESOLUTION BANDWIDTH:

9 kHz

Frequency, MHz	Quasi-peak			Average			Line ID	Verdict
	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.504	50.19	56.00	-5.81	33.14	46.00	-12.86	L1	Pass
0.506	50.30	56.00	-5.70	33.29	46.00	-12.71		
0.508	50.21	56.00	-5.79	33.21	46.00	-12.79		
0.510	50.03	56.00	-5.97	33.06	46.00	-12.94		
0.526	49.82	56.00	-6.18	33.08	46.00	-12.92		
0.528	49.92	56.00	-6.08	33.22	46.00	-12.78		
0.502	49.57	56.00	-6.43	32.62	46.00	-13.38	L2	Pass
0.504	49.98	56.00	-6.02	32.85	46.00	-13.15		
0.506	50.03	56.00	-5.97	32.98	46.00	-13.02		
0.508	49.99	56.00	-6.01	32.96	46.00	-13.04		
0.510	49.79	56.00	-6.21	32.73	46.00	-13.27		
0.526	49.51	56.00	-6.49	32.28	46.00	-13.72		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL 0787	HL 1501	HL 2874	HL 3016	HL 5476	HL 5707		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.

Test specification:	Section 15.107, RSS-Gen section 7.1.6, ICES-003, Conducted emission		
Test procedure:	ANSI C63.4, Section 11.8		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jun-24 – 07-Jul-24		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 8.1.1 Conducted emission measurements, AC mains input of PoE power adapter

LINE: L1
 EUT OPERATING MODE: Transceive
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK, QUASI-PEAK, AVERAGE

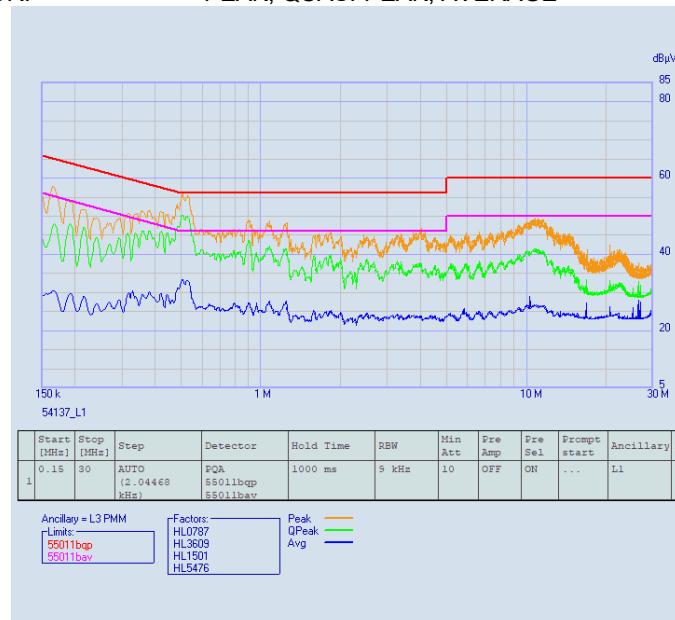
Plot 8.1.2 Conducted emission measurements, AC mains input of PoE power adapter

LINE: L2
 EUT OPERATING MODE: Transceive
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK, QUASI-PEAK, AVERAGE





Test specification:	Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.9 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	23-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 48 VDC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
FCC 47 CFR, Section 15.109				
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*
ICES-003, Section 3.2.2				
30 - 88	30.0	40.0	40.0	50.0
88 - 216	33.1	43.5	43.5	54.0
216 - 230	35.6	46.0	46.4	56.9
230 - 960	37.0	47.0	47.0	57.0
960 - 1000	43.5	54.0	49.5	60.0
1000 - 40000	---	74 (Peak) 54 (AVR)	---	80 (Peak) 60 (AVR)

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $L_{m2} = L_{m1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.2.2 Test procedure for measurements in semi-anechoic chamber

- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1, Figure 8.2.2, energized and the performance check was conducted.
- 8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.

Test specification:	Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.9 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	23-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 48 VDC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements below 1 GHz, table-top EUT


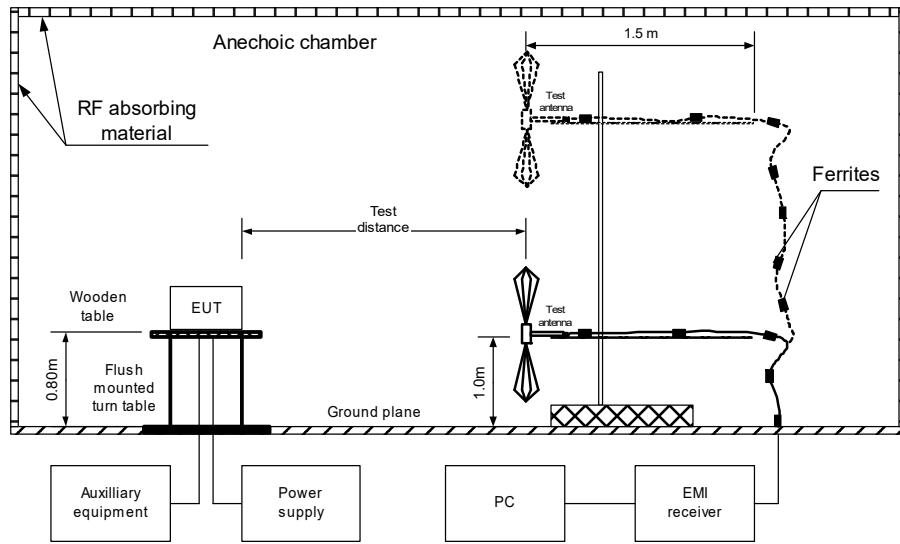


Figure 8.1.2 Setup for radiated emission measurements above 1 GHz, table-top EUT



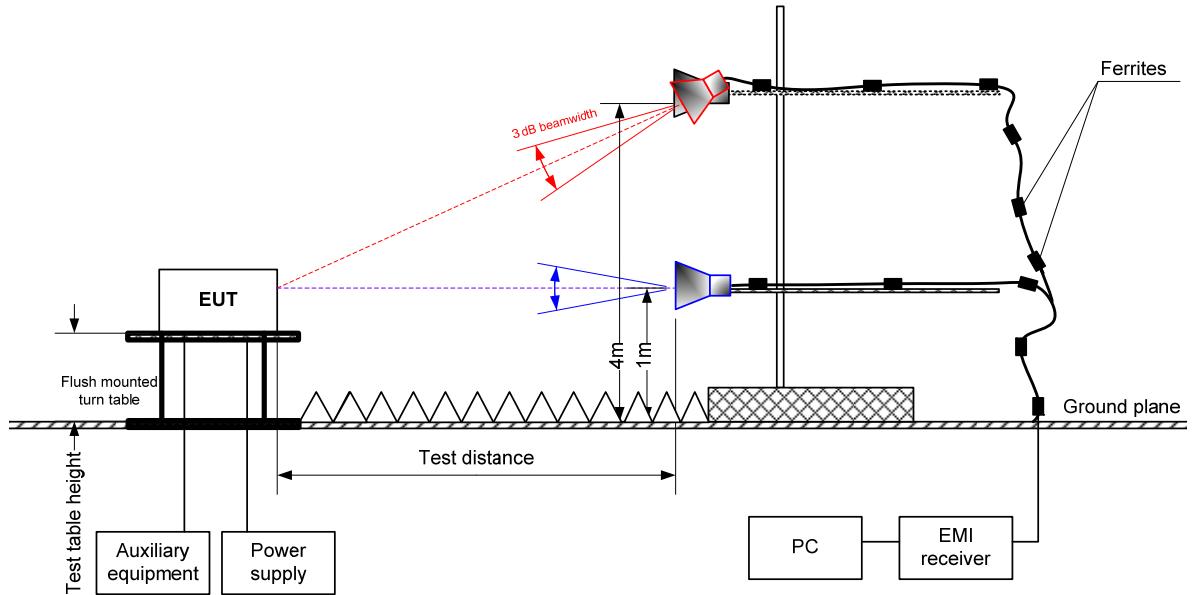

HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

Test specification:	Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.9 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	23-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 48 VDC
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP:

TABLE-TOP

LIMIT:

Class B

EUT OPERATING MODE:

Receive

TEST SITE:

SEMI ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / QUASI-PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
36.663	34.11	30.62	40.00	-9.38	Vertical	1.00	180	Pass
49.993	40.16	37.60	40.00	-2.40	Vertical	1.00	164	
249.986	35.65	33.81	46.00	-12.19	Horizontal	1.00	57	
299.983	39.58	38.22	46.00	-7.78	Horizontal	1.00	-62	
400.010	46.53	45.03	46.00	-0.97	Vertical	1.00	-3	
450.008	41.44	39.88	46.00	-6.12	Horizontal	2.00	-62	
549.975	42.80	41.18	46.00	-4.82	Vertical	1.00	-75	

TEST SITE:

SEMI ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / AVERAGE

FREQUENCY RANGE:

1000 MHz – 9500 MHz

RESOLUTION BANDWIDTH:

1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
1050.120	37.20	74.00	-36.80	29.98	54.00	-24.02	Vertical	1.73	58	Pass
1150.130	37.43	74.00	-36.57	32.14	54.00	-21.86	Horizontal	1.00	24	
4895.270	44.12	74.00	-29.88	34.61	54.00	-19.39	Horizontal	4.00	-62	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4338	HL 5288	HL 5902	HL 7585	HL 4933		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25


Test specification:	Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.9 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	23-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 48 VDC
Remarks:			

Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

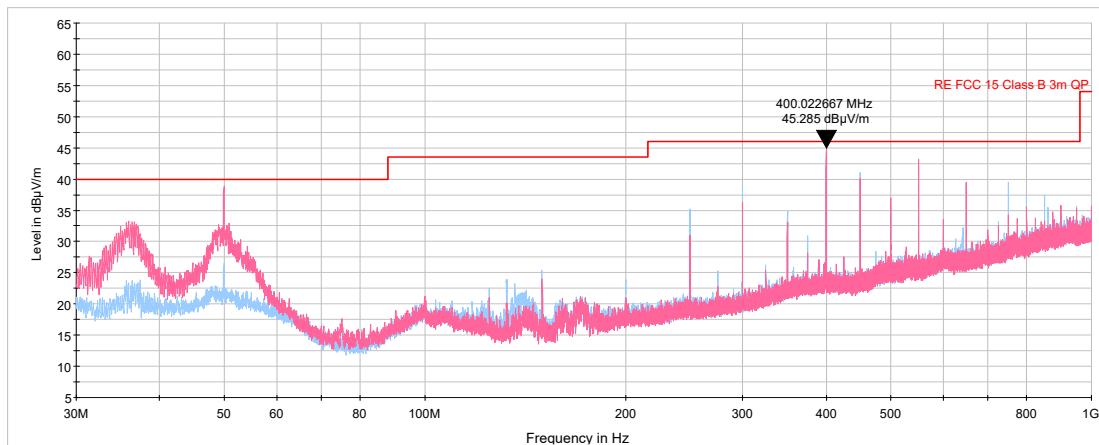**Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

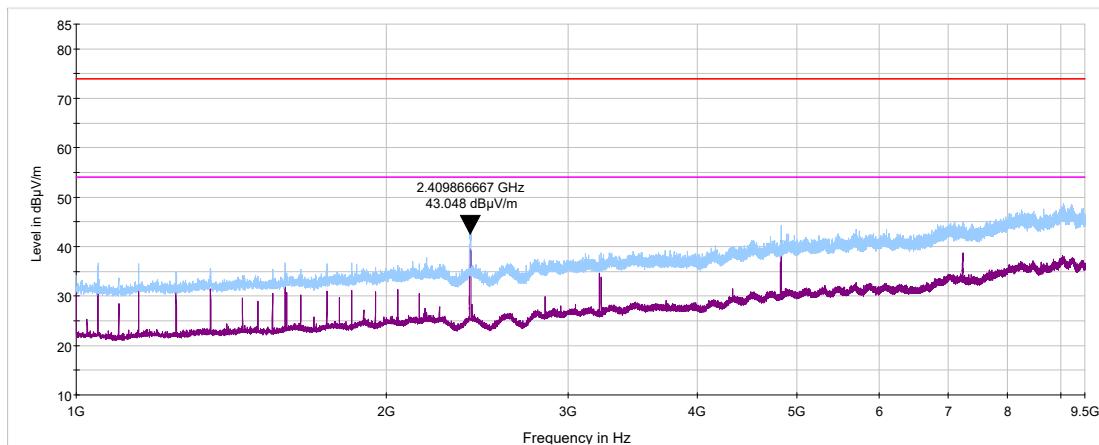

Carrier of Wi-Fi is presented on the plot and suppressed by filter HL 4338.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc


Date of Issue: 20-Jul-25

Test specification:	Section 15.109, RSS-Gen section 7.3, ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.9 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	23-Jan-25		
Temperature: 23 °C	Relative Humidity: 45 %	Air Pressure: 1019 hPa	Power: 48 VDC
Remarks:			


Plot 8.2.3 Radiated emission measurements in 2000 - 3000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
 LIMIT: B
 TEST DISTANCE: 3 m
 EUT OPERATING MODE: Receive

Vertical antenna polarization

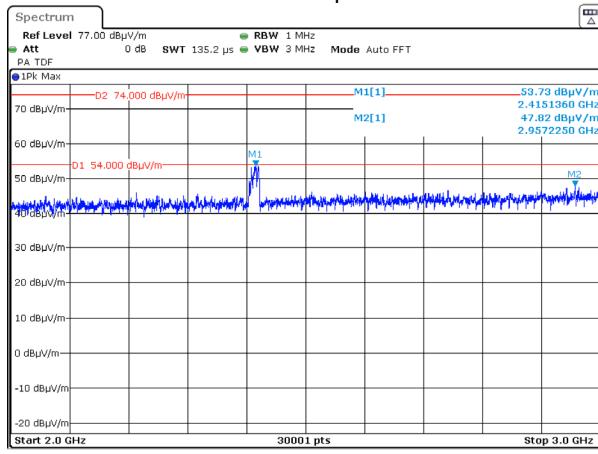

Horizontal antenna polarization

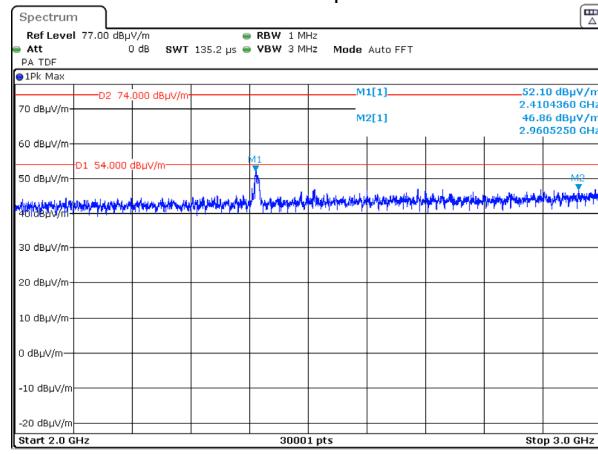

Date: 29.APR.2025 15:57:40

Date: 29.APR.2025 16:06:00

Carrier of Wi-Fi is presented on the plot without filter HL 4338.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	08-Jul-25	08-Jul-26
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	18-Feb-25	18-Feb-26
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A01877	12-Sep-24	12-Sep-25
1501	Cable RF, 6 m, BNC/BNC	Belden	M17/167 MIL-C-17	1501	08-May-25	08-May-26
2874	Life - Guard Extreme Isolation Transformer, 230/230, 50 Hz, 1Phase, 1.8 kVA	Taiyo Yuden, Inc.	LGY1.8k-21	FI0412	25-Feb-25	25-Feb-26
3016	LISN, Two-line V-network, 9 kHz to 30 MHz, (50 uH+5 Ohm), CISPR16-1, MIL-461E	Rohde & Schwarz	ESH 3-Z5	892239/002	13-Jan-25	13-Jan-26
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1226/2A	10-Jun-25	10-Jun-26
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A00013 6	18-May-25	18-May-26
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A00013 7	18-May-25	18-May-26
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	BRM 50702-02	023	10-Jul-24	10-Jul-26
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM50115-02	001	05-Jun-25	05-Jun-27
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	19-Jun-24	19-Jun-25
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	19-Feb-25	19-Feb-26
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Apr-25	08-Apr-27
5476	Cable, BNC/BNC, 10.5 m	Western wire	MIL-C-17G	NA	08-May-25	08-May-26
5589	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/N	Mini Circuits	CBL-6FT-SMNM+	NA	26-Jan-25	26-Jan-26
5638	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT-SMSM+	NA	17-Nov-24	17-Nov-25
5643	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT-SMSM+	NA	12-Feb-25	12-Feb-26
5707	EMI receiver	PMM / Narda	PMM 9010F	060WW9110 1	02-Jul-25	02-Jul-26
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11 N/11N/6000	NA	24-Apr-25	24-Apr-26
5933	Thermometer Hygrometer, (0 to +50) deg., (20-95) % RH	Kkmoon	Dyimore	NA	23-Apr-25	23-Apr-26
6105	Field Probe Set, 5 un	NA	NA	NA	05-Sep-24	05-Sep-25
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	24-Sep-24	24-Sep-25

10 APPENDIX B Test equipment correction factors

HL 3016: Line impedance stabilization network
Rhode&Schwarz, model: ESH 3-Z5, s/n 892239/002

Voltage division factor (insertion loss)

Frequency, kHz	L1, with limiter, dB	L2 (N), with limiter, dB	Uncertainty, dB
10	11.17	11.23	±0.12
15	11.28	11.30	±0.12
20	10.99	11.00	±0.12
25	10.75	10.74	±0.12
30	10.57	10.57	±0.08
40	10.36	10.35	±0.08
50	10.25	10.25	±0.08
60	10.19	10.18	±0.09
70	10.15	10.14	±0.09
80	10.12	10.11	±0.09
90	10.10	10.09	±0.09
100	10.09	10.08	±0.09
150	10.06	10.05	±0.09
170	10.05	10.04	±0.09
200	10.05	10.04	±0.09
250	10.04	10.03	±0.09
300	10.05	10.04	±0.09
350	10.04	10.04	±0.09
400	10.04	10.04	±0.09
500	10.05	10.04	±0.09
600	10.05	10.04	±0.09
700	10.06	10.05	±0.09
800	10.06	10.05	±0.09
900	10.06	10.05	±0.09
1000	10.06	10.06	±0.09
1200	10.07	10.06	±0.16
1500	10.08	10.07	±0.16
2000	10.09	10.08	±0.16
2500	10.11	10.10	±0.16
3000	10.13	10.11	±0.16
4000	10.16	10.13	±0.16
5000	10.21	10.17	±0.16
7000	10.33	10.28	±0.16
10000	10.45	10.35	±0.16
15000	10.77	10.65	±0.16
20000	10.98	10.78	±0.16
30000	11.39	10.94	±0.32

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Report ID: PARRAD_FCC.54136_TR_rev1.doc

Date of Issue: 20-Jul-25

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

13 APPENDIX E Specification references

FCC 47CFR part 15: 2023	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247 Issue 3: 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 with_amendment_1_2: 2021	General Requirements and Information for the Certification of Radiocommunication Equipment
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ICES-003: 2020, Issue 7	Information Technology Equipment (Including Digital Apparatus)

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
Cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
Ppm	part per million (10-6)
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration

Note: The following data in this clause is provided by the customer and represents his sole responsibility.

PARADOX

To: Hermon Labs

Manufacturer Declaration of Similarity

We, Paradox Security Systems Ltd. located in 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3, Canada declare under our sole responsibility that Alarm Control Panel, model M25PEF-8 operates on 868MHz band and model M25PEF-9 operates on 915MHz band.

M25PEFL-8 is a variant model of M25PEF-8 and M25PEFL-9 is a variant model of M25PEF-9

Both models share the same layout, mechanical enclosure, hardware and firmware.

The difference is in backup LTE module (addition of "L" in the model's name), the operation is identical and no impact on EMC, ENV and Safety tests.

There is no difference in output power (868MHz or 915MHz bands) and immunity/emissions between models with and without LTE module.

In M25PEFL-8 and M25PEFL-9 models installed LTE module by Quectel (model EC200-EU).

In all models installed WI-FI module by Espressif (ESP32-WROOM-32UE).

For marketing reasons model name M25PEF was replaced by M25 and model name M25PEFL was replaced by M25LTE.

"-9C" added for both models (M25 and M25LTE) for US, Canada and some Latin America countries.

July-13-2025

Alex Chaplik



Certification Manager

Ref: M25_Similarity_Declaration_Rev3

END OF DOCUMENT