



Appendix B

Detailed Test Results

1. GFSK
914.85MHz for Body





Test Laboratory: LCS-SAR Lab

914.85MHz Rear side 0mm

DUT: 5-Button Remote ; Type: REM2M ; Serial: A250604074-1

Communication System: UID 0, Bluetooth (0); Frequency: 914.85 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 914.85 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 41.796$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.08, 9.08, 9.08); Calibrated: 2025/2/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2025/2/17
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.27 W/kg



Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.49 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.828 W/kg

SAR(1 g) = 0.735 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

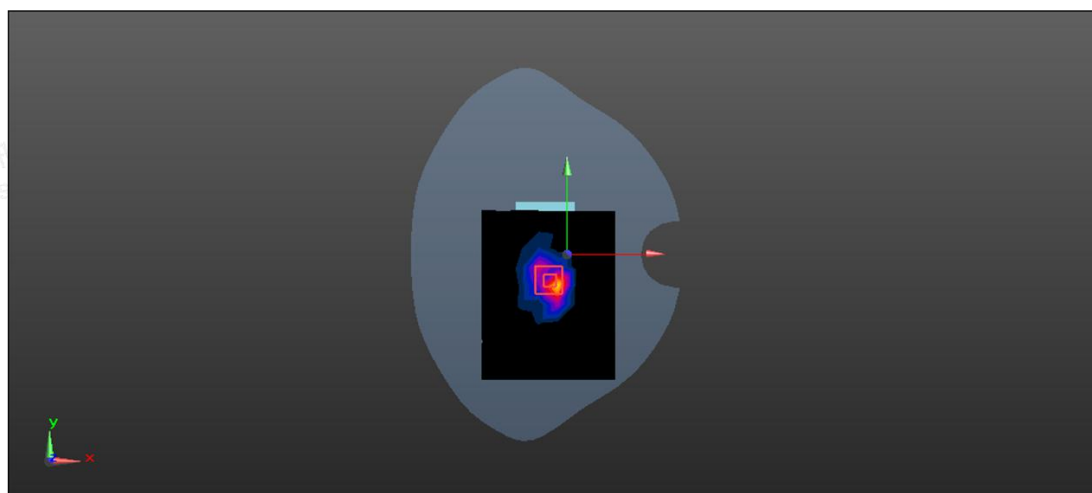

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity