

TEST REPORT

**ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B;
RSS-210 issue 9 Annex A; RSS-Gen issue 5,
ICES-003 Issue 6:2016**

FOR:

**Paradox Security Systems Ltd.
Water Flood Detector
Model:WD1
FCC ID:KDYWD1
IC:2438A-WD1**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements.....	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions.....	9
7.3	Occupied bandwidth test.....	20
7.4	Antenna requirements	23
8	Unintentional emissions	24
8.1	Radiated emission measurements	24
9	APPENDIX A Test equipment and ancillaries used for tests.....	29
10	APPENDIX B Measurement uncertainties.....	30
11	APPENDIX C Test laboratory description	31
12	APPENDIX D Specification references	31
13	APPENDIX E Test equipment correction factors.....	32
14	APPENDIX F Abbreviations and acronyms.....	38
15	APPENDIX G Manufacturer's declaration about periodic operation.....	39



1 Applicant information

Client name: Paradox Security Systems Ltd.
Address: 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik

2 Equipment under test attributes

Product name: Water Flood Detector
Product type: Transceiver
Model(s): WD1
Serial number: 116159
Hardware version: 458-0000-997
Software release: V1.01
Receipt date 16-Dec-18

3 Manufacturer information

Manufacturer name: Paradox Security Systems Ltd.
Address: 780 Industrial Boulevard St.Eustache, Quebec J7R 5V3 Canada
Telephone: 450-491-7444
Fax: 450-497-1095
E-Mail: alexc@paradox.com
Contact name: Mr. Alex Chaplik

4 Test details

Project ID: 31929
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 17-Dec-18
Test completed: 28-Mar-19
Test specification(s): FCC 47CFR part 15, subpart C, §15.231; subpart B;
RSS-210 issue 9 Annex A; RSS-Gen issue 5, ICES-003 issue 6:2016



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(a) / RSS-210, Section A1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / ICES-003, Section 6.1, Class B, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Section 6.2, Class B Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.


	Name and Title	Date	Signature
Tested by:	Mrs. E.Pitt, test engineer Mr. A. Morozov, test engineer	March 28, 2019	A handwritten signature in black ink, appearing to read 'E. Pitt'.
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	April 22, 2019	A handwritten signature in black ink, appearing to read 'M. Cherniavsky'.
Approved by:	Mr. K. Zushchyk, Projects & Customer Manager, EMC & Radio	April 22, 2019	A handwritten signature in blue ink, appearing to read 'K. Zushchyk'.

6 EUT description

6.1 General information

The EUT, model WD1, is a Water Flood Detector operating at 433.92 MHz. The EUT is powered from internal 1.5V battery.

6.2 Test configuration

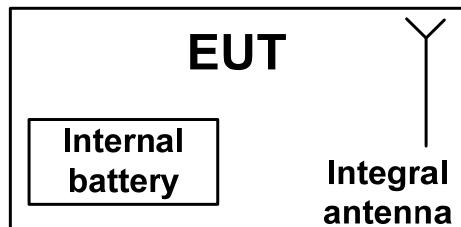

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment							
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Operating frequency		433.92 MHz					
Maximum rated output power		At transmitter 50 Ω RF output connector					
		Field strength at 3 m distance			93.56 dB(µV/m) – peak 76.96 dB(µV/m) -average		
Is transmitter output power variable?		X	No				
		Yes	continuous variable				
				stepped variable with stepsize			
			minimum RF power	dB			
				dBm			
		maximum RF power			dBm		
Antenna connection							
unique coupling	standard connector		X	integral	with temporary RF connector X without temporary RF connector		
Antenna/s technical characteristics							
Type	Manufacturer		Model number		Gain		
Integral (printed)	Paradox		TRACE 10.6mm/433MHz		0 dBi		
Transmitter aggregate data rate/s	1.67 kbps						
Type of modulation	OOK						
Modulating test signal (baseband)	ID code						
Transmitter power source							
X	Battery	Nominal rated voltage	1.5 VDC	Battery type	Alkaline type AA		
	DC	Nominal rated voltage					
	AC mains	Nominal rated voltage		Frequency			
Common power source for transmitter and receiver			X	yes	no		



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance		
Date(s):	24-Dec-18	Verdict:	PASS
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

Figure 7.1.1 Setup for transmitter shut down test





HERMON LABORATORIES

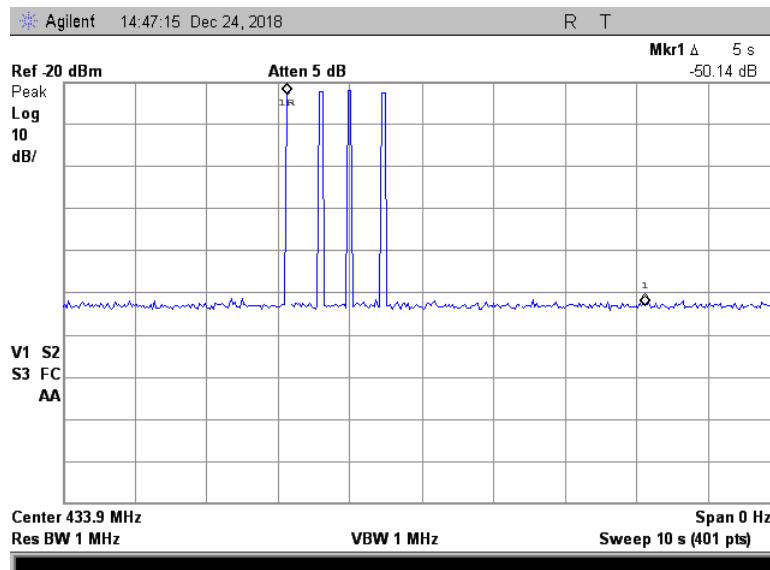
Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance			Verdict: PASS
Date(s): 24-Dec-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration*	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration*	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

* Provided in Appendix G.

Plot 7.1.1 Transmitter shut down test result

**Reference numbers of test equipment used**

HL 2909							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	PASS
Date(s): 02-Jan-19		
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa
Remarks:		

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
433.9185	100.8	80.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)			
	Within restricted bands			Outside restricted bands
	Peak	Quasi Peak	Average	Peak
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6	
Test mode:	Compliance	Verdict: PASS
Date(s):	02-Jan-19	
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa
Remarks:		


7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.4, Table 7.2.5, Table 7.2.7 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.
- 7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.4, Table 7.2.5, Table 7.2.7 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

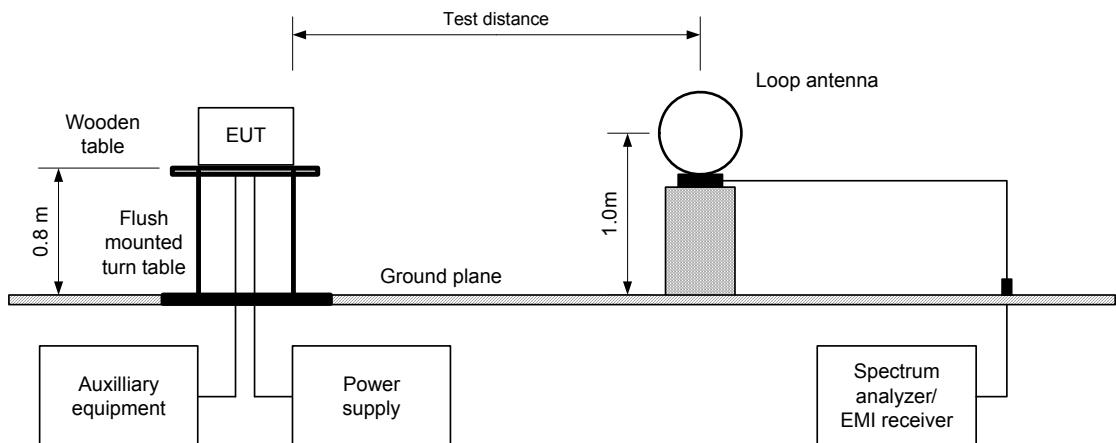



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 02-Jan-19		
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa
Power: Battery		
Remarks:		

Figure 7.2.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


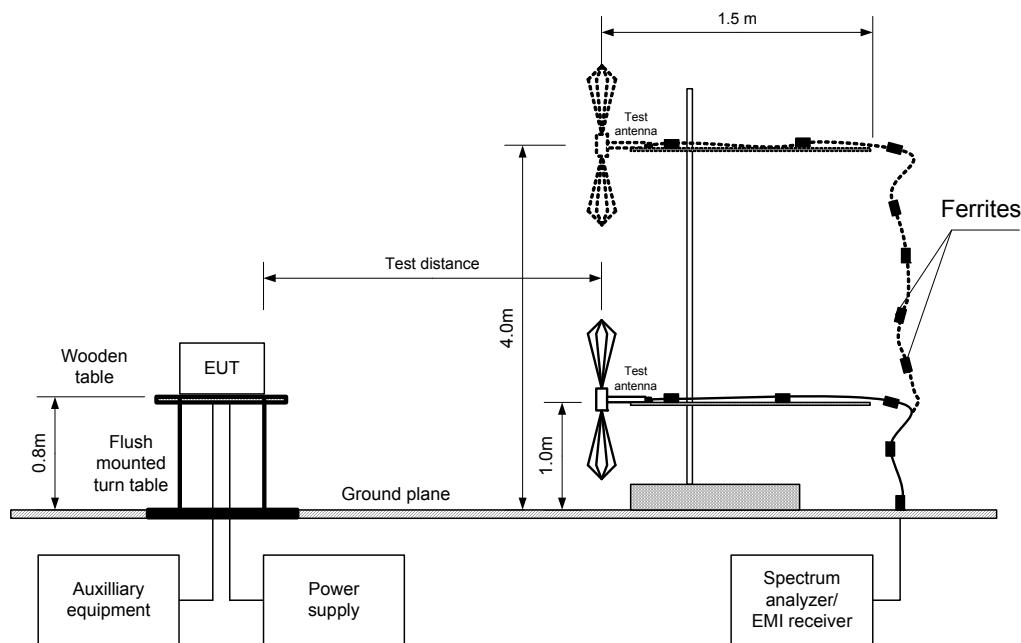


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz



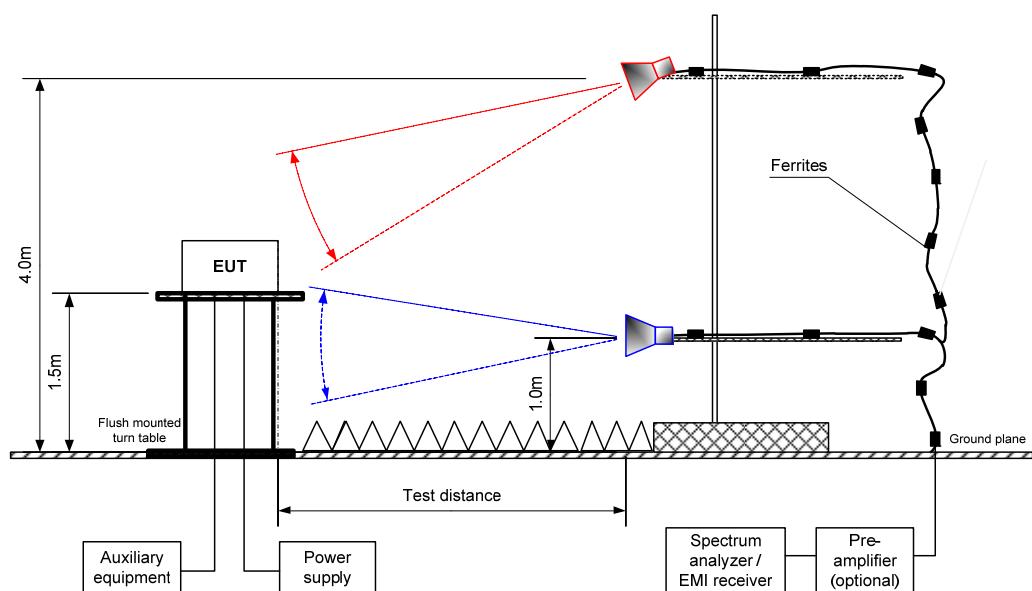

HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions	
Test procedure:	ANSI C63.10 sections 6.5, 6.6
Test mode:	Compliance
Date(s):	02-Jan-19
Temperature: 23 °C	Relative Humidity: 42 %
	Air Pressure: 1022 hPa
	Power: Battery
Remarks:	

Table 7.2.3 Field strength of fundamental emission

TEST DISTANCE: 3 m
 EUT POSITION: Typical (Horizontal)
 MODULATION: OOK
 BIT RATE: 1.67 kbps
 INVESTIGATED FREQUENCY RANGE: 0.009 – 4500 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict	
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
433.898	H	2.36	136.0	93.56	100.8	-7.24	93.56	76.96	80.8	-3.84	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

Table 7.2.4 Spurious emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical
 MODULATION: OOK
 BIT RATE: 1.67 kbps
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
240.005	29.04	26.49	46.0	-19.51	Horizontal	102	81	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification:		FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure:		ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance		Verdict:	
Date(s):	02-Jan-19		PASS	
Temperature: 23 °C	Relative Humidity: 42 %		Air Pressure: 1022 hPa	Power: Battery
Remarks:				

Table 7.2.5 Spurious emission above 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: Typical
 MODULATION: OOK
 BIT RATE: 1.67 kbps
 INVESTIGATED FREQUENCY RANGE: 0.009 – 4500 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1.0 MHz (above 1000 MHz)
 VIDEO BANDWIDTH: ≥ Resolution bandwidth
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
1301.625	H	1.81	71.0	59.92	74.0	-14.08	59.45	42.85	54.0	-11.15
3905.538	H	3.43	6.0	51.52	74.0	-22.48	48.60	32.00	54.0	-22.00
4339.338	H	3.16	-151.0	42.67	74.0	-31.33	38.57	21.97	54.0	-32.03

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

Table 7.2.6 Average factor calculation

Transmission burst		Average factor, dB
Duration, ms	Number burst during 100 msec	
1x0.856 + 1x1.239 + 37x0.247 + 8x0.445	1	-16.60

AVR Factor=20 Log (14.794/100) = -16.60 dB



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions	
Test procedure: ANSI C63.10 sections 6.5, 6.6	
Test mode: Compliance	Verdict: PASS
Date(s): 02-Jan-19	
Temperature: 23 °C	Relative Humidity: 42 %
Air Pressure: 1022 hPa	
Power: Battery	
Remarks:	

Table 7.2.7 Spurious emission outside restricted bands

TEST DISTANCE:	3 m
EUT POSITION:	Typical
MODULATION:	OOK
BIT RATE:	1.67 kbps
INVESTIGATED FREQUENCY RANGE:	0.009 – 4500 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
1735.613	49.70	Horizontal	2.90	-36.0	93.56	43.86	20.0	23.86	Pass
2169.763	47.93	Vertical	2.96	-54.0	93.56	45.63	20.0	25.63	
2603.750	42.56	Vertical	2.87	129.0	93.56	51.00	20.0	31.00	
3037.563	49.05	Horizontal	2.08	125.0	93.56	44.51	20.0	24.51	
3471.050	44.46	Horizontal	2.07	-87.0	93.56	49.10	20.0	29.10	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 0446	HL 3903	HL 4360	HL 4933	HL 5288	HL 5405		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions					
Test procedure: ANSI C63.10 sections 6.5, 6.6					
Test mode: Compliance			Verdict: PASS		
Date(s): 02-Jan-19					
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa	Power: Battery		
Remarks:					

Table 7.2.8 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.9 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Jan-19			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa	Power: Battery
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

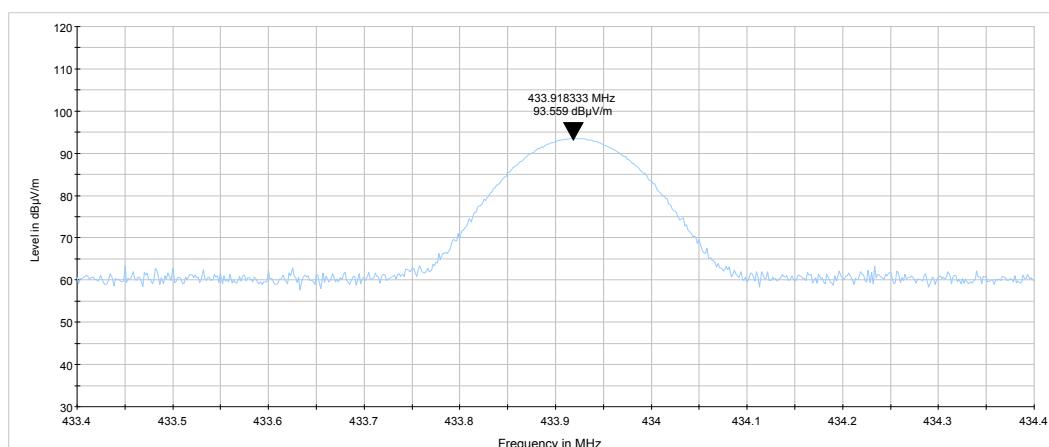

Plot 7.2.2 Radiated emission measurements from 9kHz to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Horizontal)

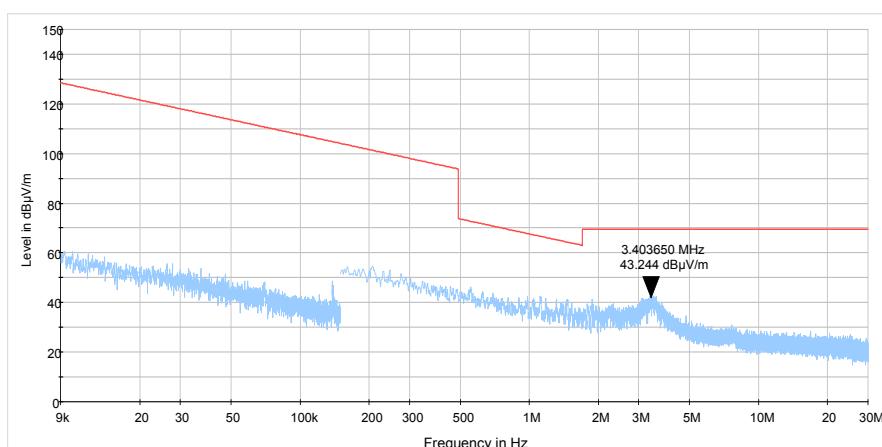




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance			Verdict: PASS
Date(s): 02-Jan-19			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa	Power: Battery
Remarks:			


Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

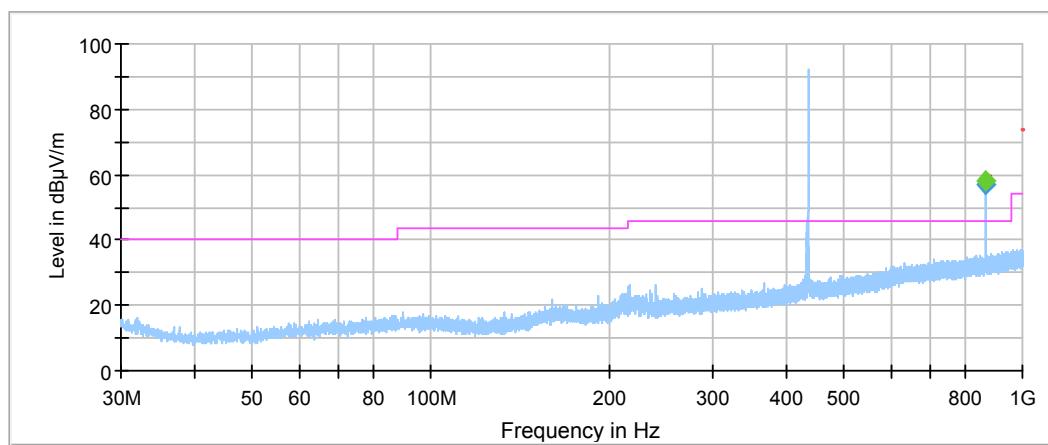

Plot 7.2.4 Radiated emission measurements from 1000 to 4500 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Horizontal)

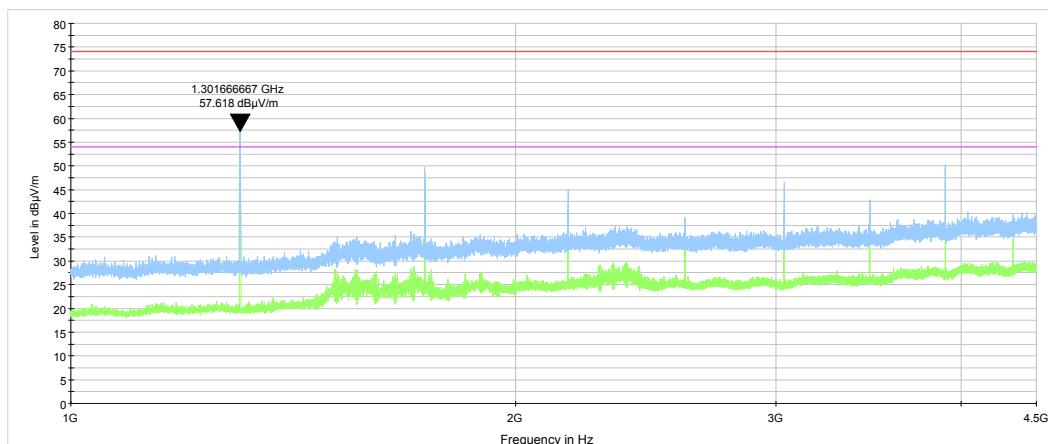




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	PASS
Date(s): 02-Jan-19		
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa
Remarks:		

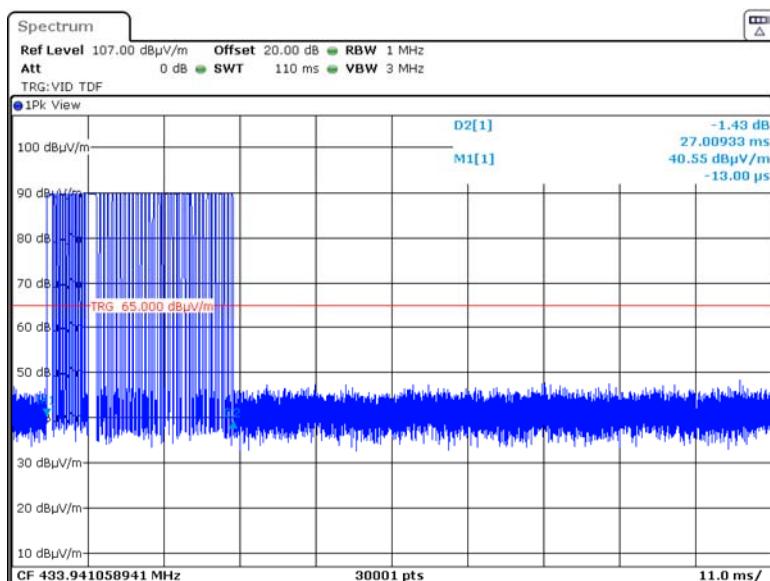Plot 7.2.5 Transmission train duration

Date: 7.JAN.2019 15:20:15

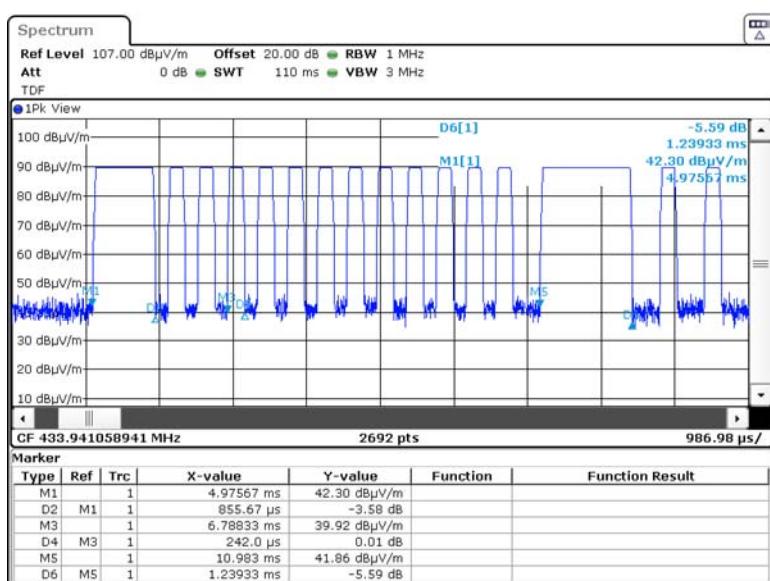Plot 7.2.6 Transmission train first part zoom


Date: 7.JAN.2019 18:39:12

1 pulse with duration 0.856 ms
1 pulse with duration 1.239 ms
14 pulses with duration 0.247 ms




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 02-Jan-19		
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1022 hPa
Remarks:		

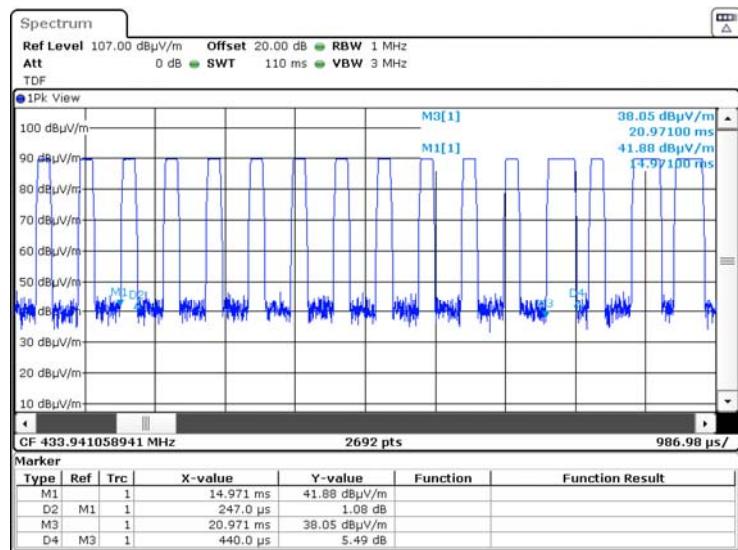Plot 7.2.7 Transmission train second part zoom

Date: 7.JAN.2019 18:41:39

13 pulses with duration 0.247 ms
3 pulses with duration 0.445 ms

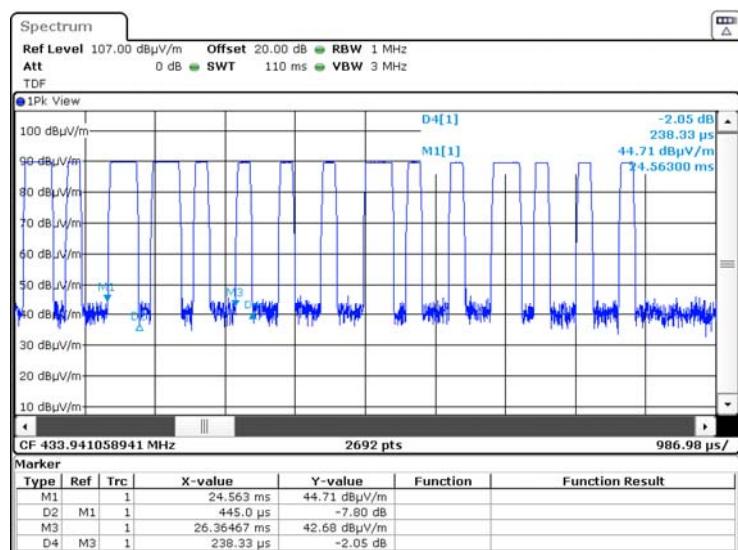Plot 7.2.8 Transmission train third part zoom

Date: 7.JAN.2019 18:43:41

5 pulses with duration 0.445 ms
10 pulses with duration 0.247 ms



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth		
Test procedure: ANSI C63.10 section 6.9.2		
Test mode: Compliance		Verdict: PASS
Date(s): 22-Jan-19 - 07-Feb-19		
Temperature: 23.4 °C	Relative Humidity: 47 %	Air Pressure: 1009 hPa
Power: Battery		
Remarks:		

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900		0.25
Above 900	20.0	0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit modulated carrier.
- 7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth		
Test procedure: ANSI C63.10 section 6.9.2		
Test mode: Compliance	Verdict: PASS	PASS
Date(s): 22-Jan-19 - 07-Feb-19		
Temperature: 23.4 °C	Relative Humidity: 47 %	Air Pressure: 1009 hPa
Remarks:		

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 1 kHz
 VIDEO BANDWIDTH: 3 kHz
 MODULATION: OOK
 MODULATING SIGNAL: ID code
 BIT RATE: 1.67 kbps

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	3.422	0.25	1084.8	- 1081.38	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	3.089	0.25	1084.8	- 1081.71	Pass

Reference numbers of test equipment used

HL 0337	HL 3818	HL 4275					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth		
Test procedure: ANSI C63.10 section 6.9.2		
Test mode: Compliance		Verdict: PASS
Date(s): 22-Jan-19 - 07-Feb-19		
Temperature: 23.4 °C	Relative Humidity: 47 %	Air Pressure: 1009 hPa
Remarks:		

Plot 7.3.1 Occupied bandwidth test result

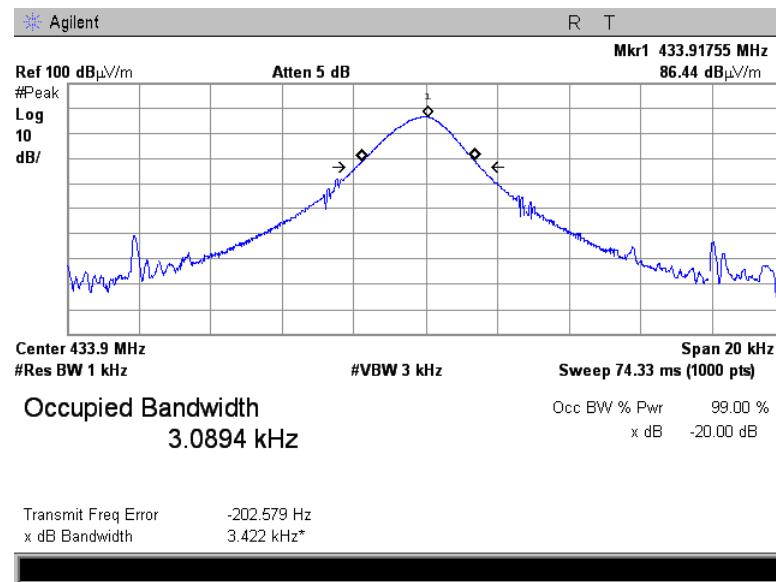



HERMON LABORATORIES

Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements		
Test procedure: Visual inspection / supplier declaration		
Test mode: Compliance		Verdict: PASS
Date(s): 28-Mar-19		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa
Power: Battery		
Remarks:		

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Radiated emission		
Test procedure: ANSI C63.4, Section 8.3, 12.2.5		
Test mode: Compliance	Verdict: PASS	
Date(s): 17-Dec-18		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa
Power: Battery		
Remarks:		

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, Table 8.1.2.

Table 8.1.1 Radiated emission limits

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S2} = Lim_{S1} + 20 \log (S_1/S_2)$,
where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen, Section 7.3

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5 th harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.




HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Radiated emission		
Test procedure: ANSI C63.4, Section 8.3, 12.2.5		
Test mode: Compliance	Verdict: PASS	
Date(s): 17-Dec-18		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa
Power: Battery		
Remarks:		

Figure 8.1.1 Setup for radiated emission measurements, table-top equipment

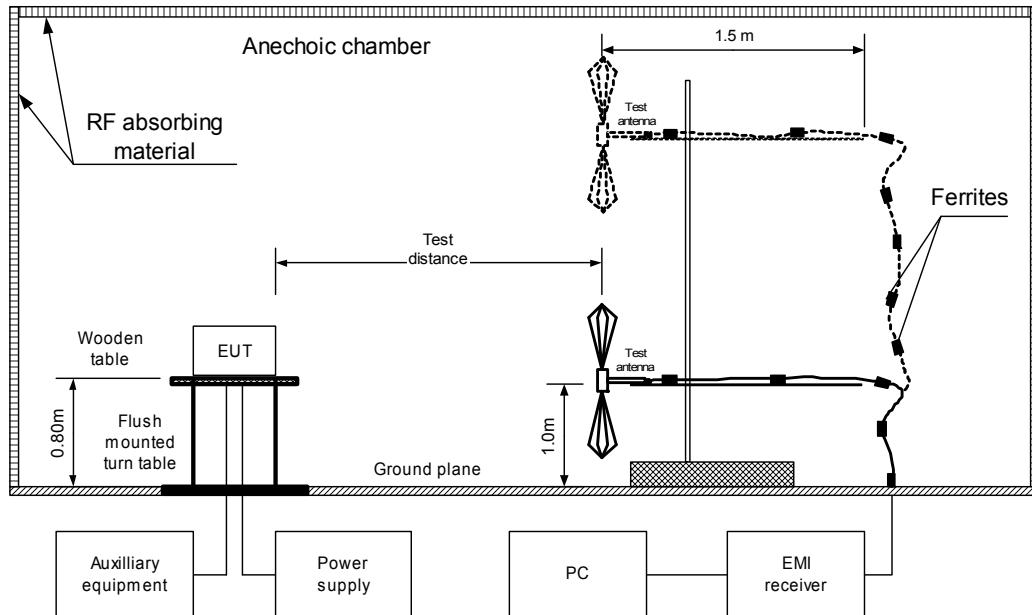

Photograph 8.1.1 Setup for radiated emission measurements

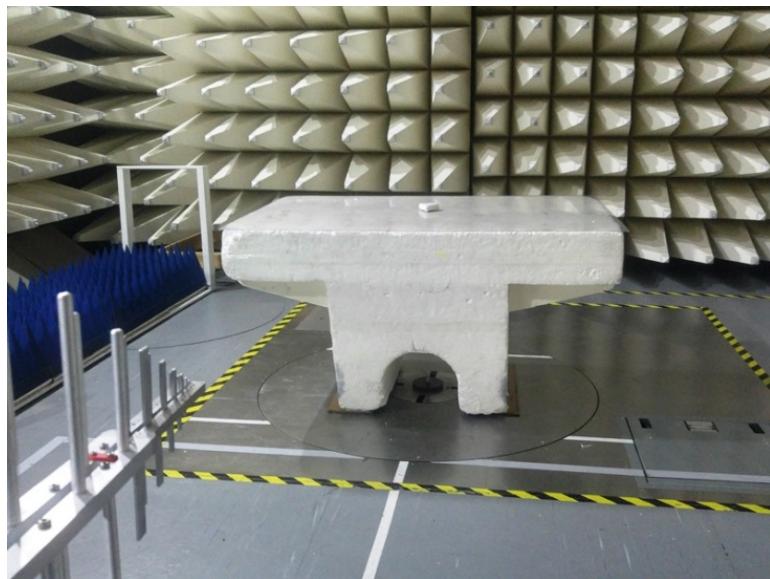




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Section 8.3, 12.2.5		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Dec-18		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa	Power: Battery
Remarks:			

Photograph 8.1.2 Setup for radiated emission measurements

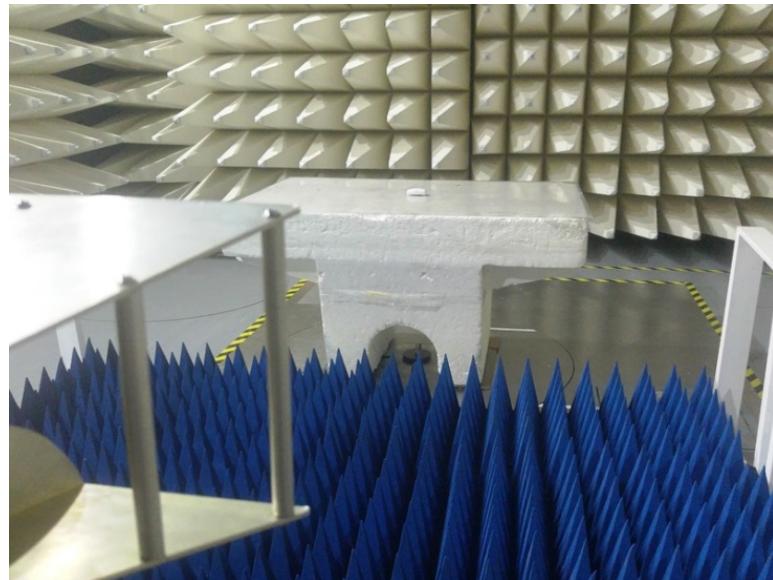

Photograph 8.1.3 Setup for radiated emission measurements, EUT close view





HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Radiated emission	
Test procedure: ANSI C63.4, Section 8.3, 12.2.5	
Test mode: Compliance	Verdict: PASS
Date(s): 17-Dec-18	
Temperature: 24 °C	Relative Humidity: 45 %
Air Pressure: 1017 hPa	
Power: Battery	
Remarks:	

Table 8.1.3 Radiated emission test results

EUT SET UP: TABLE-TOP
 LIMIT: Class B
 EUT OPERATING MODE: Stand-by and Receive
 TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
215.577	26.67	20.21	43.5	-23.29	Horizontal	134	-77	Pass
240.033	27.36	23.13	46.0	-22.87	Horizontal	102	84	

TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz – 2500 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
1550.275	41.86	74.0	-32.14	29.85	54.0	-24.15	Horizontal	206	-94	Pass
1706.256	42.68	74.0	-31.32	33.36	54.0	-20.64	Horizontal	160	-112	

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3903	HL 4360	HL 4933	HL 5288	HL 5405			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.3 / ICES-003, Radiated emission		
Test procedure: ANSI C63.4, Section 8.3, 12.2.5		
Test mode: Compliance	Verdict: PASS	PASS
Date(s): 17-Dec-18		
Temperature: 24 °C	Relative Humidity: 45 %	Air Pressure: 1017 hPa
Remarks:		


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

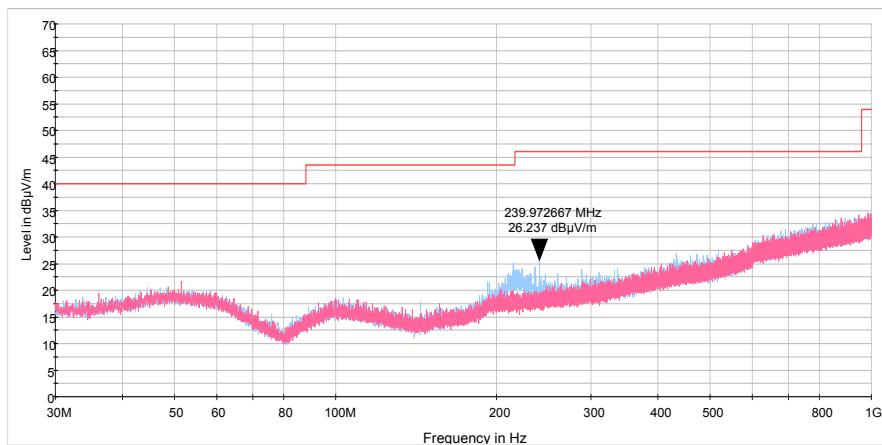

Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

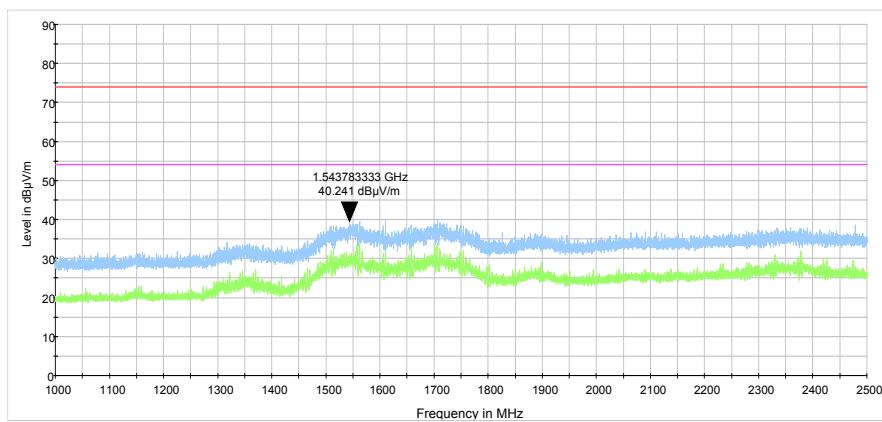

Comment



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	03-Jun-18	03-Jun-19
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-19	24-Feb-20
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	04-Apr-19	04-Apr-20
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	28-May-18	28-May-19
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	07-Apr-19	07-Apr-20
4275	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70050	28-Mar-18	28-Mar-19
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	31-Dec-18	31-Dec-19
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	06-Jan-19	06-Jan-20
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11 N(x2)	500023/11 8	01-Aug-18	01-Aug-19



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

12 APPENDIX D Specification references

47CFR part 15:2018	Radio Frequency Devices.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Issue 9:2016	Licence- Exempt Radio Apparatus:Category I Equipment
RSS-Gen Issue 5: 2018	General Requirements for Compliance of Radio Apparatus



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Measured antenna factor, dBs/m
0.009	-32.5
0.010	-33.4
0.020	-37.9
0.050	-40.6
0.075	-41.0
0.100	-41.2
0.150	-41.2
0.250	-41.2
0.500	-41.3
0.750	-41.3
1.000	-41.4
2.000	-41.4
3.000	-41.4
4.000	-41.5
5.000	-41.5
10.000	-41.8
15.000	-42.2
20.000	-42.9
25.000	-43.9
30.000	-45.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor

Trilog antenna

Model ALX-8000E, Frankonia, S/N 00809, HL 5288, 30-1000 MHz

Frequency, MHz	Antenna factor, dB/m		
	Vert Up	Vert Down	Delta
30	-51.19	-51.28	0.09
35	-44.03	-44.12	0.09
40	-43.07	-43.12	0.05
45	-39.61	-39.79	0.18
50	-37.84	-38.14	0.3
60	-34.93	-34.9	0.03
70	-29.76	-29.66	0.1
80	-27.69	-27.82	0.13
90	-29.05	-29.07	0.02
100	-31.19	-31.19	0
120	-31.61	-31.6	0.01
140	-28.13	-28.06	0.07
160	-27.71	-27.75	0.04
180	-26.19	-26.15	0.04
200	-28.2	-28.15	0.05
250	-27.45	-27.47	0.02
300	-29.61	-29.63	0.02
400	-31.77	-31.78	0.01
500	-32.81	-32.81	0
600	-33.64	-33.61	0.03
700	-34.21	-34.21	0
800	-35.66	-35.66	0
900	-36.99	-36.91	0.08
1000	-38	-37.91	0.09

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Active Horn Antenna,
Com-Power Corporation, model: AHA-118, s/n 701046, HL 4933

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 70050, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4275

Frequency, MHz	Cable loss, dB						
10	0.08	5000	1.71	10200	2.64	15400	3.46
30	0.11	5100	1.73	10300	2.65	15500	3.47
50	0.14	5200	1.75	10400	2.66	15600	3.52
100	0.21	5300	1.76	10500	2.67	15700	3.55
200	0.30	5400	1.77	10600	2.70	15800	3.55
300	0.37	5500	1.82	10700	2.71	15900	3.55
400	0.43	5600	1.84	10800	2.72	16000	3.61
500	0.49	5700	1.86	10900	2.73	16100	3.62
600	0.54	5800	1.86	11000	2.75	16200	3.63
700	0.58	5900	1.89	11100	2.77	16300	3.62
800	0.62	6000	1.94	11200	2.78	16400	3.66
900	0.66	6100	1.95	11300	2.80	16500	3.71
1000	0.70	6200	1.96	11400	2.82	16600	3.71
1100	0.74	6300	1.97	11500	2.83	16700	3.67
1200	0.78	6400	2.01	11600	2.84	16800	3.69
1300	0.81	6500	2.03	11700	2.86	16900	3.74
1400	0.84	6600	2.02	11800	2.88	17000	3.73
1500	0.88	6700	2.02	11900	2.89	17100	3.71
1600	0.91	6800	2.05	12000	2.90	17200	3.73
1700	0.94	6900	2.06	12100	2.92	17300	3.77
1800	0.97	7000	2.07	12200	2.93	17400	3.77
1900	1.00	7100	2.07	12300	2.94	17500	3.76
2000	1.02	7200	2.08	12400	2.96	17600	3.76
2100	1.05	7300	2.11	12500	2.98	17700	3.78
2200	1.07	7400	2.13	12600	2.99	17800	3.80
2300	1.10	7500	2.15	12700	3.01	17900	3.79
2400	1.13	7600	2.16	12800	3.03	18000	3.78
2500	1.15	7700	2.18	12900	3.05		
2600	1.18	7800	2.21	13000	3.07		
2700	1.20	7900	2.24	13100	3.09		
2800	1.24	8000	2.25	13200	3.12		
2900	1.26	8100	2.26	13300	3.13		
3000	1.28	8200	2.29	13400	3.14		
3100	1.30	8300	2.31	13500	3.16		
3200	1.33	8400	2.33	13600	3.18		
3300	1.36	8500	2.33	13700	3.19		
3400	1.37	8600	2.34	13800	3.21		
3500	1.39	8700	2.36	13900	3.23		
3600	1.42	8800	2.38	14000	3.25		
3700	1.45	8900	2.39	14100	3.26		
3800	1.46	9000	2.40	14200	3.27		
3900	1.48	9100	2.42	14300	3.30		
4000	1.50	9200	2.45	14400	3.32		
4100	1.53	9300	2.46	14500	3.33		
4200	1.55	9400	2.48	14600	3.34		
4300	1.57	9500	2.50	14700	3.36		
4400	1.59	9600	2.52	14800	3.39		
4500	1.61	9700	2.54	14900	3.40		
4600	1.64	9800	2.56	15000	3.41		
4700	1.66	9900	2.58	15100	3.41		
4800	1.67	10000	2.60	15200	3.44		
4900	1.69	10100	2.61	15300	3.46		



HERMON LABORATORIES

Report ID: PARRAD_FCC.31929.docx
Date of Issue: 22-Apr-19

Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m,
SF118/11N(x2), S/N 500023/118
HL 5405

5405

Specific Test Report



Frequency Range [GHz]	IL min S21 [dB]	IL min S12 [dB]	RL max S11 [dB]	RL max S22 [dB]	Type:	SF118/11N/11N/6000MM
0.040 - 1.836	-1.431	-1.431	-37.037	-37.704	Sales no.:	10497130
1.836 - 3.632	-2.062	-2.066	-33.573	-32.848	Serial no.:	500023/118
3.632 - 5.428	-2.576	-2.576	-28.548	-29.602	PA no.:	1956306
5.428 - 7.224	-3.013	-3.014	-30.738	-32.523	Ring no.:	
7.224 - 9.020	-3.415	-3.416	-33.728	-32.257	Cable length:	6 m
9.020 - 10.816	-3.772	-3.772	-29.302	-30.735	Test length:	
10.816 - 12.612	-4.138	-4.138	-28.768	-26.255	Connector 1:	SF_11_N-656
12.612 - 14.408	-4.456	-4.462	-27.109	-26.151	Connector 2:	SF_11_N-656
14.408 - 16.204	-4.786	-4.786	-26.056	-27.116	Cable:	SUCOFLEX_118
16.204 - 18.000	-5.111	-5.111	-27.762	-28.508	Meas. System:	N5230C, MY49001834, A.09.42.22
					Time:	7:04:21 AM
					Date:	6/6/2018
					Inspected by:	AZ/111
					Start Freq.:	0.04000 GHz
					Stop Freq.:	18.00000 GHz
					Meas Points:	801
					Source Power:	-5 dBm



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration about periodic operation

P  R  D O X™

April 18th, 2019

To: Hermon Laboratories

Attention: Mr. Michael Nikishin and Ms. Ella Pitt

Manufacturer's Declaration

We, Paradox Security Systems Ltd. located in 780 Industrial Boulevard St-Eustache, Quebec J7R 5V3, Canada declare under our sole responsibility that the product Wireless Water Detector WD1 is operate on 433.92 MHz and designed to comply and satisfy periodic operational requirements.

Wireless Water Detector WD1 does not allow continuous transmitting (such as voice, video and radio control).

The Wireless Water Detector WD1 are not manually operated devices.

The transmissions of WD1 are not periodical and occur upon intrusion only.

WD1 module is an intrusion alarm system device and will send automatically its supervision status to control panel in a certain interval. This interval will be randomly selected between 17 minutes and 20 minutes.

Since, there is no periodical behavior except synchronization transmissions, there are no predetermined intervals of any kind included in device's algorithm.



Alex Chaplik
Certification Manager

END OF DOCUMENT