



Plot 1

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/8/2009 3:59:15 PM	DUT Battery Model/No:	
Filename:	back0mm.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	LXE, Case1	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	9.00 mm
DUT Position:	Back 0mm	Max SAR Y-axis Location:	-23.00 mm
Antenna Configuration:	Integral	Max E Field:	2.62 V/m
Test Frequency:	2437MHz	SAR 1g:	0.004 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	0.000 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/24/09
Input Power Level:	1MBPS	Extrapolation:	poly4

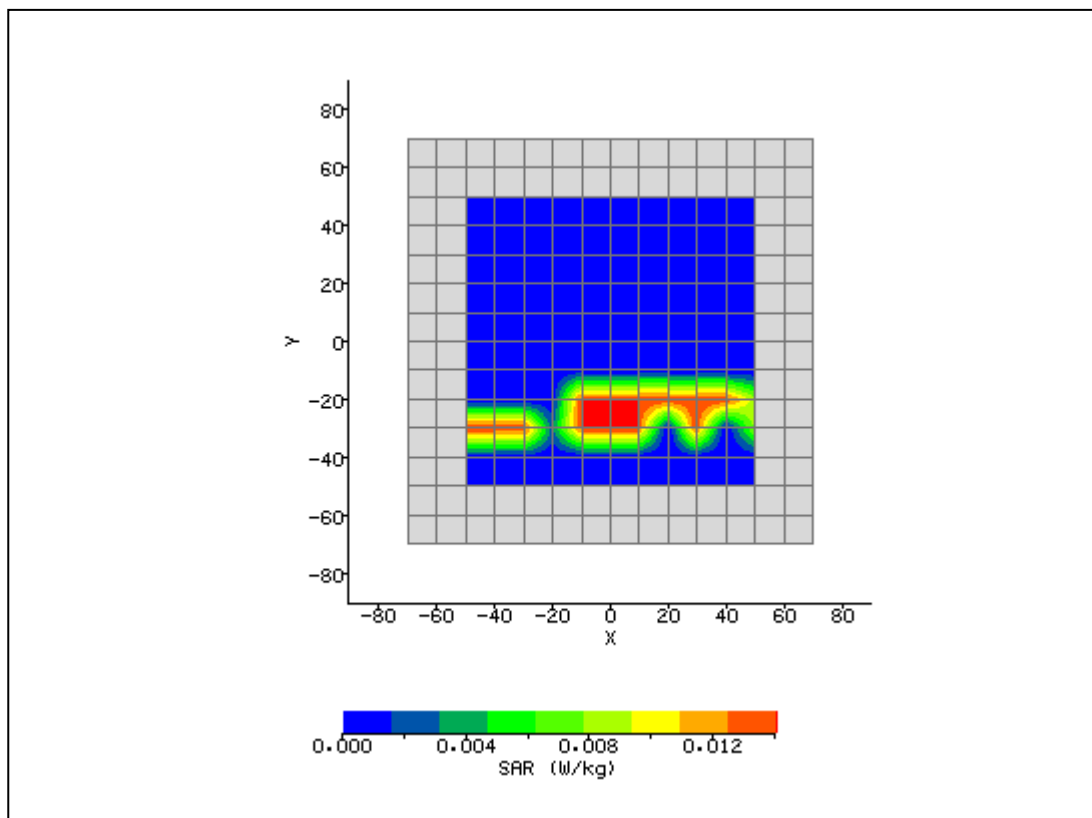

Plot 2

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/8/2009 4:20:14 PM	DUT Battery Model/No:	
Filename:	back0mm_case2.txt	Probe Serial Number:	M0024
Ambient Temperature:	22°C	Liquid Simulant:	2450
Device Under Test:	LXE, Case2	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Back 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	internal	Max E Field:	2.53 V/m
Test Frequency:	2437MHz	SAR 1g:	0.002 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	0.000 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/24/09
Input Power Level:	1MBPS	Extrapolation:	poly4

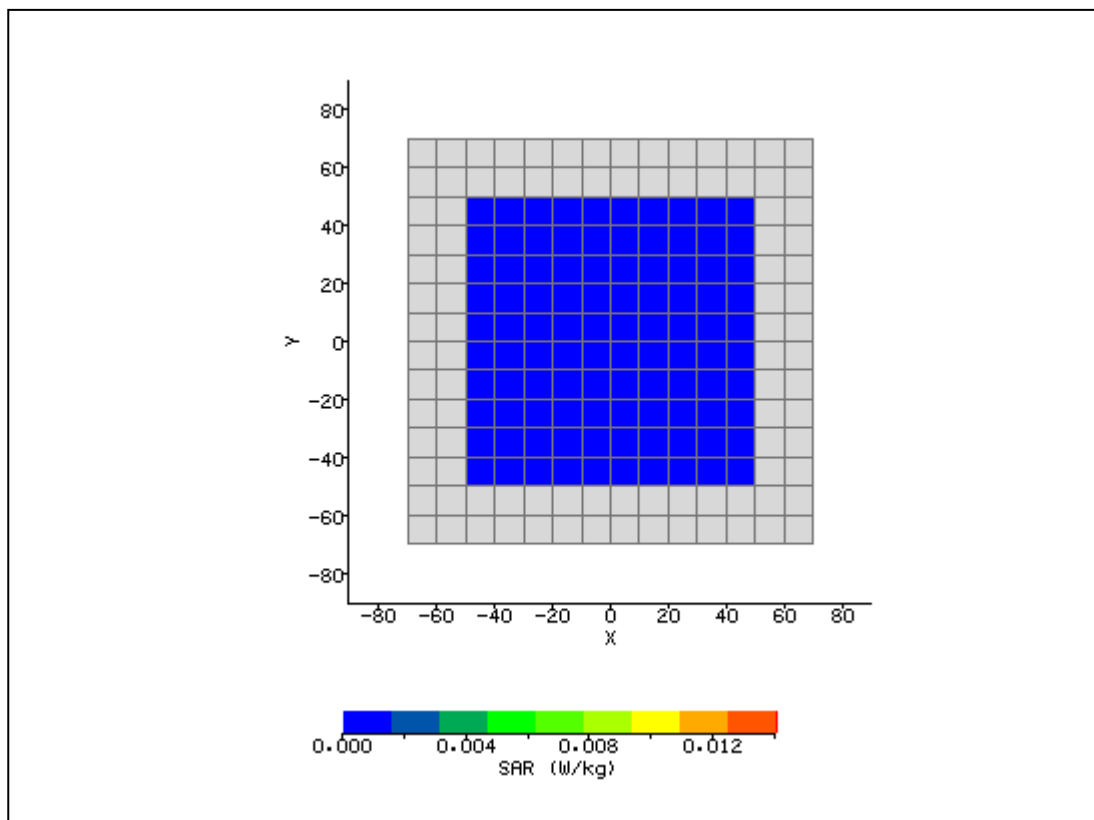

Plot 3

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/8/2009 3:23:23 PM	DUT Battery Model/No:	
Filename:	back0mm.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	0.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Dipole	Max E Field:	153.15 V/m
Test Frequency:	2450MHz	SAR 1g:	54.722 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	23.829 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	5.143 W/kg
Type of Modulation:		SAR End:	5.311 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/24/09
Input Power Level:	1 W	Extrapolation:	poly4

