


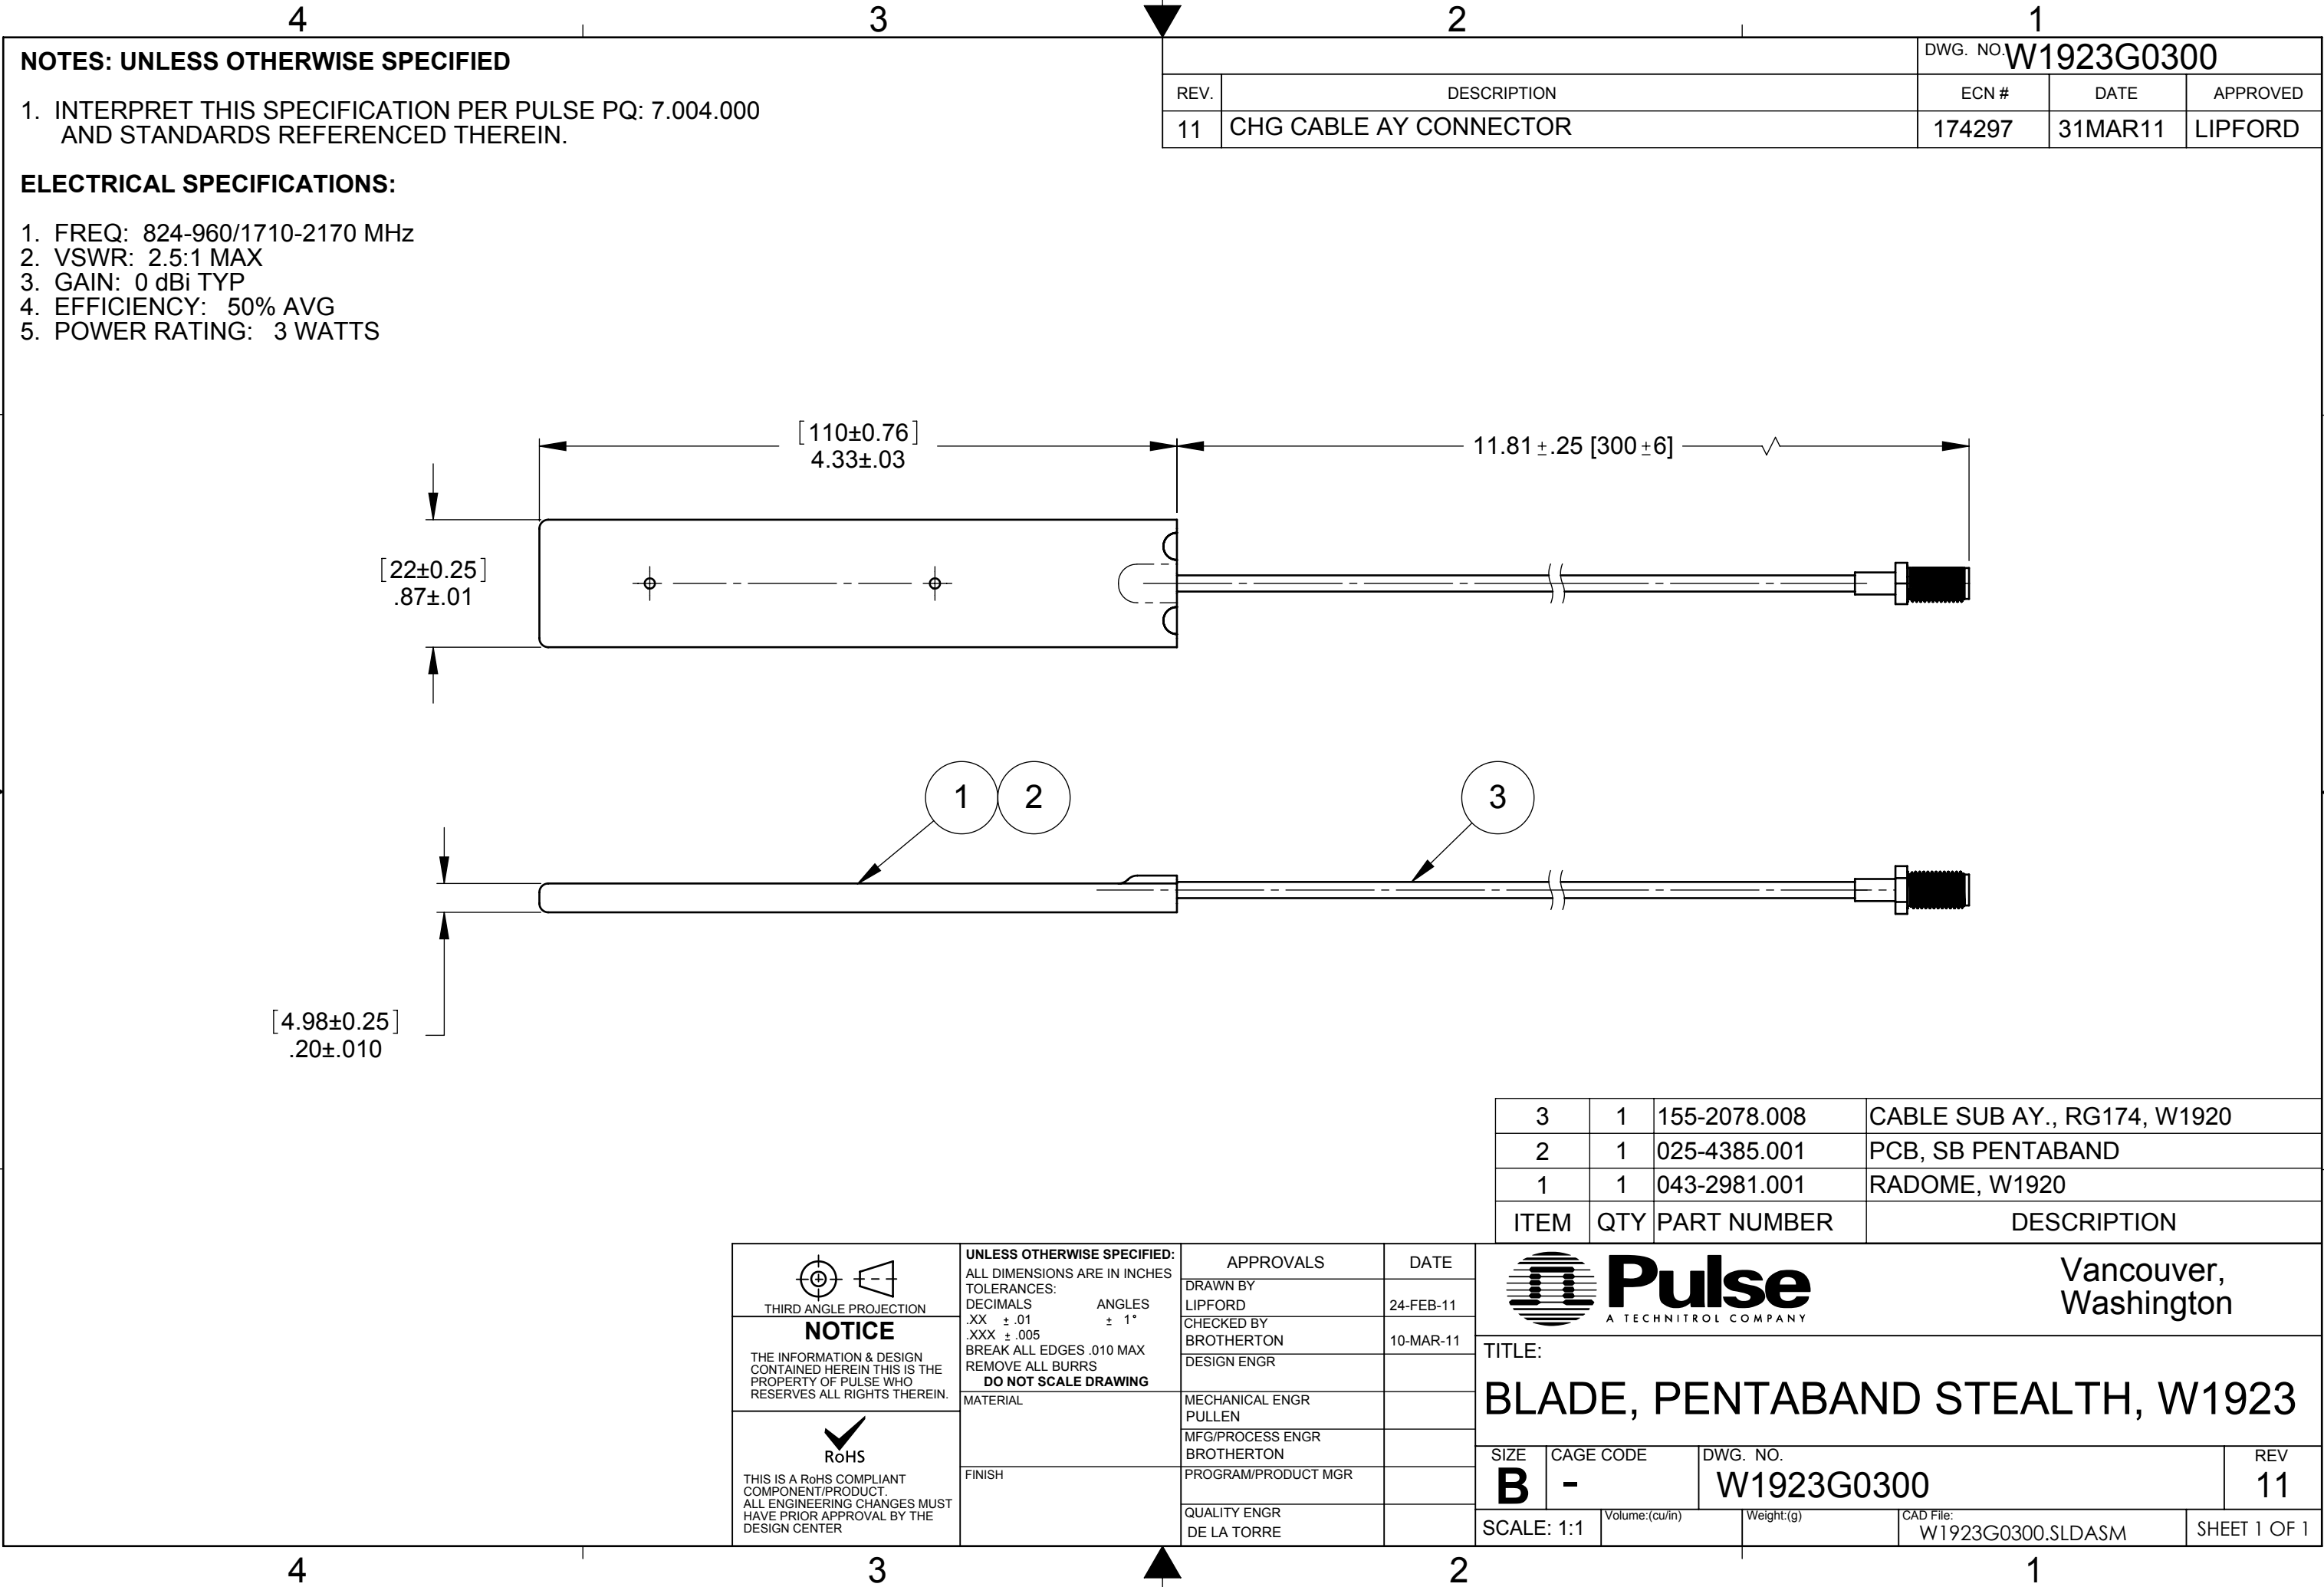

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. INTERPRET THIS SPECIFICATION PER PULSE PQ: 7.004.000 AND STANDARDS REFERENCED THEREIN.

ELECTRICAL SPECIFICATIONS:

- 1. FREQ: 824-960/1710-2170 MHz
- 2. VSWR: 2.5:1 MAX
- 3. GAIN: 0 dBi TYP
- 4. EFFICIENCY: 50% AVG
- 5. POWER RATING: 3 WATTS

REV.		DESCRIPTION	ECN #	DATE	APPROVED
11		CHG CABLE AY CONNECTOR	174297	31MAR11	LIPFORD

DWG. NO:W1923G0300

3	1	155-2078.008	CABLE SUB AY., RG174, W1920
2	1	025-4385.001	PCB, SB PENTABAND
1	1	043-2981.001	RADOME, W1920
ITEM	QTY	PART NUMBER	DESCRIPTION

THIRD ANGLE PROJECTION

RoHS

THE INFORMATION & DESIGN CONTAINED HEREIN THIS IS THE PROPERTY OF PULSE WHO RESERVES ALL RIGHTS THEREIN.

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
DECIMALS ANGLES
.XX ± .01 ± 1°
.XXX ± .005
BREAK ALL EDGES .010 MAX
REMOVE ALL BURRS
DO NOT SCALE DRAWING

MATERIAL

FINISH

APPROVALS

DATE

DRAWN BY
LIPFORD

CHECKED BY
BROTHERTON

DESIGN ENGR

MECHANICAL ENGR
PULLEN

MFG/PROCESS ENGR
BROTHERTON

PROGRAM/PRODUCT MGR

QUALITY ENGR
DE LA TORRE

24-FEB-11

10-MAR-11

Vancouver, Washington

TITLE:
BLADE, PENTABAND STEALTH, W1923

SIZE
B

CAGE CODE
-

DWG. NO.
W1923G0300

REV
11

SCALE: 1:1

Volume:(cu/in)

Weight:(g)

CAD File:
W1923G0300.SLDASM

SHEET 1 OF 1