

PEP Testing Laboratory

REPORT NO. : 990437

RFI / EMI TEST REPORT

APPLICANT : RUBY TECH CORP.
E. U. T. : USB Ethernet Adapter
TRADE NAME : N/A
FCC ID : KFWP1UE100JK200
REGULATION : CFR 47 , Part 15 Subpart B , Class B
TEST SITE : PEP Testing Laboratory
TEST ENGINEER : *Tony Way*
TEST DATE : *7/20/1999*
ISSUED DATE : AUG. / 20 / 1999
REPORT No. : 990437

FEDERAL COMMUNICATIONS COMMISSION
Laboratory Division
7435 Oakland Mills Road
Columbia, MD. 21046

May 25, 1999

Registration Number: 90868

PEP Testing Laboratory
12-3 Fl., No. 27-1, Lane 169
Kang-Ning St., Hsi-chi Town
Taipei Hsien
Taiwan, R.O.C.
Attention: M. Tsui


Re: Measurement facility located at Hsi-chi
3 & 10 meter site
Date of Listing: May 25, 1999

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, Electronic Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips
Electronics Engineer

PEP Testing Laboratory

REPORT NO.: 990437

VERIFICATION

WE HEREBY VERIFY THAT:

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass FCC Class B limitations.

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4 - 1992.

Any data in this RFI report is "reference" only.

APPLICANT : RUBY TECH CORP.*

PRODUCT : USB Ethernet Adapter*

FCC ID : KFWP1UE100JK200*

MODEL : UE-100*

M. Y. Tsui
M. Y. TSUI / Manager

PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chih, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-26922097 FAX : 886-2-26956236

PEP Testing Laboratory

REPORT NO.: 990437

TABLE OF CONTENTS

<u>1. GENERAL</u>	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
<u>2. CONDUCTED EMISSIONS TEST</u>	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
<u>3. RADIATED EMISSIONS TEST</u>	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
<u>4. DESCRIPTION FOR EUT TESTING CONFIGURATION</u>	11
<u>5. SUPPORTING DEVICES TO TEST</u>	12
<u>6. TEST CONFIGURATION</u>	15
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
<u>7. APPENDIX</u>	
A. Photos of EUT Appearance	29
B. List of Test Equipment	30

PEP Testing Laboratory

REPORT NO.: 990437

1. GENERAL

1.1 GENERAL INFORMATION:

APPLICANT : RUBY TECH CORP.

4F, NO. 31, PAOTSING STREET,
TAIPEI, TAIWAN, R. O. C.

MANUFACTURER : RUBY TECH CORP.

4F, NO. 31, PAOTSING STREET,
TAIPEI, TAIWAN, R. O. C.

MEASUREMENT PROCEDURE : ANSI C63,4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR
Part 15, Subpart B, Class B


1.2 PLACE OF MEASUREMENT PEP Testing Laboratory

PEP Testing Laboratory

REPORT NO. : 990437

1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

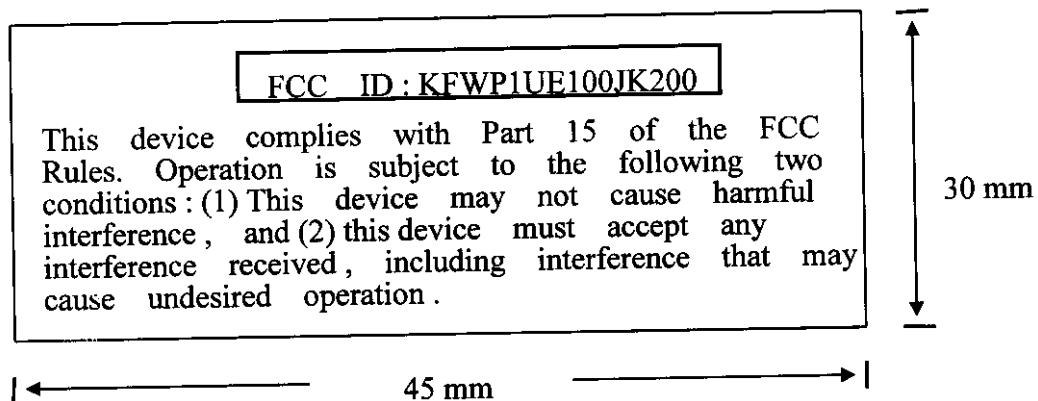

PEP Testing Laboratory

REPORT NO. : 990437

1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.


You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

PEP Testing Laboratory

REPORT NO.: 990437

2. CONDUCTION EMISSIONS TEST

2.1 GENERAL SETUP OF THE TEST FACILITIES

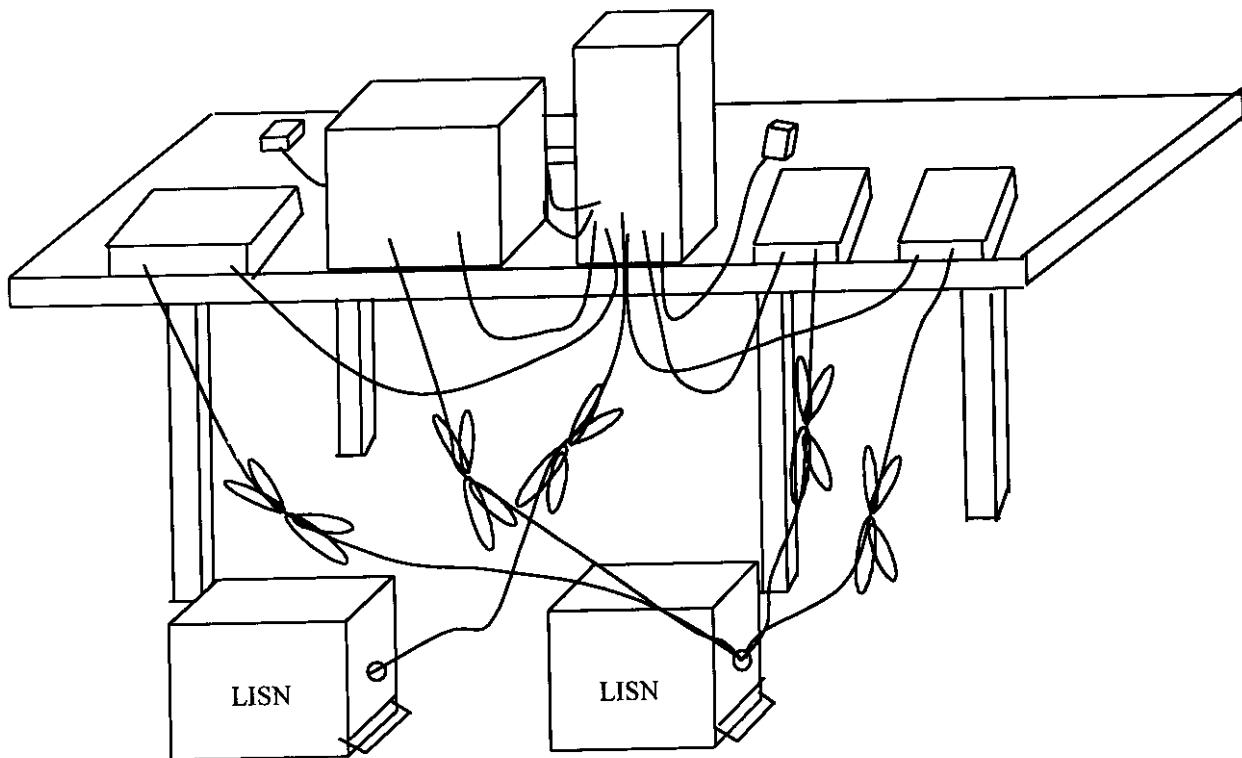

PEP Testing Laboratory

REPORT NO.: 990437

2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.


The highest emissions were recorded in the RFI test report.

PEP Testing Laboratory

REPORT NO.: 990437

3. RADIATED EMISSIONS TEST

3.1 GENERAL SETUP OF THE FACILITIES

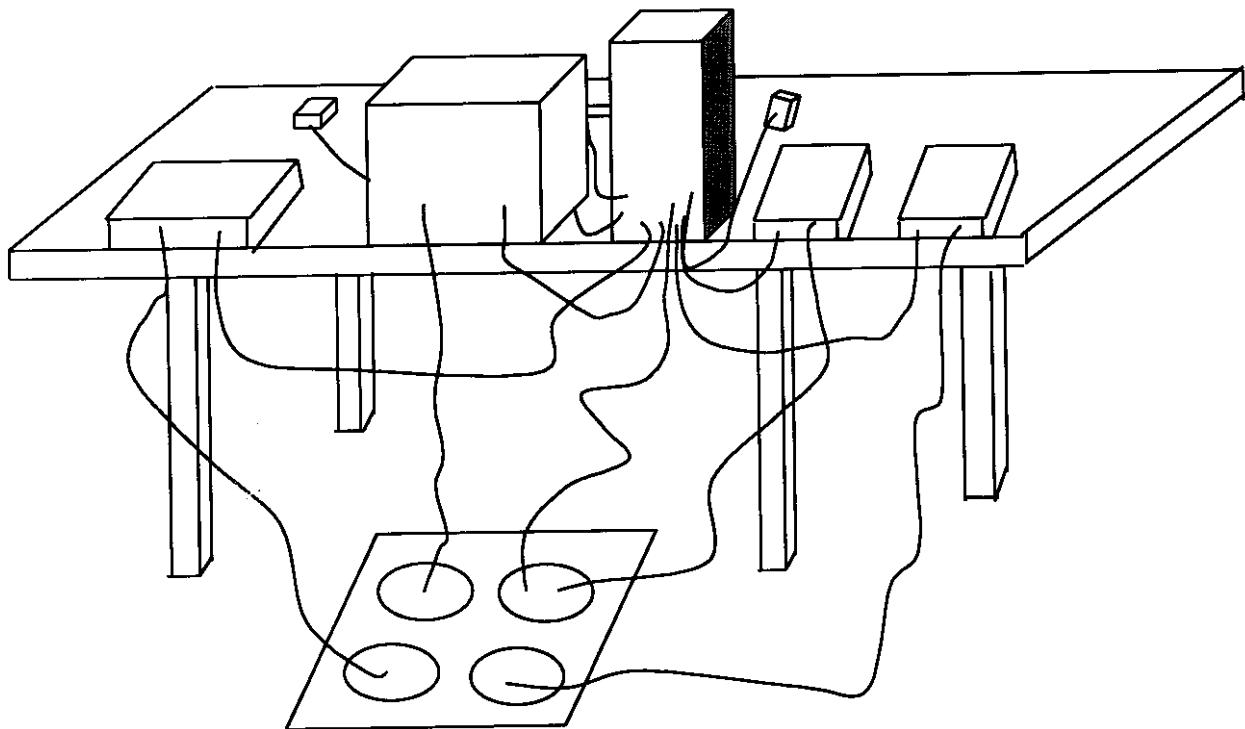

PEP Testing Laboratory

REPORT NO.: 990437

3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software.

- a. setting up the EUT under normally position, and scanning it from 30 MHz to 1000 MHz, then recording those narrow band noises which cannot be 6 dBuV below lower bound. Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height, and turntable rotate 360 degrees.
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height. We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters, then rotated the turntable simultaneously.
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position, and routine steps a. b. c.

The highest emissions were recorded in the RFI test report.

PEP Testing Laboratory

REPORT NO. : 990437

4. DESCRIPTION FOR EUT TESTING CONFIGURATION

**** TEST PROCESURE ----**

- (A) The EUT is USB Ethernet adapter , FCC ID: KFWP1UE100JK200 , for more detail information about the EUT , please refer user's manual .
- (B) Test method : put EUT on turn table and remote PC with Ethernet card set away from the EUT about 30 meters , EUT's input port connected to USB port on the host PC and enabled by data exchanging between both PCs .
We provided the worst case data (100 bps) in this report .
- (C) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data and radiated emission test data.

PEP Testing Laboratory

REPORT NO.: 990437

5. SUPPORTING DEVICES TO TEST

SUPPORT UNIT 1. ---- PERSONAL COMPUTER x 2

Manufacturer : ASUS INC.
Model Number : P2L97
Power Supply Type : Switching
Power Cord : Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1.2m
FCC ID : Declaration of Conformity (DoC)

SUPPORT UNIT 2. ---- MONITOR x 2

Manufacturer : Acer Peripherals Inc.
Model Number : 1455
Power Supply Type : Switching
Power Cord : Shielded, Detachable, 1.2m
Data Cable : Shielded, Undetachable, 1m
FCC ID : JVP7234E

SUPPORT UNIT 3. ---- PRINTER

Manufacturer : Hewlett-Packard Singapore Pte Ltd.
Model Number : HP400
Power Supply Type : Linear
Power Cord : Non-Shielded, Detachable, 1.2m
Data Cable : Shielded, Detachable, 1m. 2464
FCC ID : B94C2642X

PEP Testing Laboratory

REPORT NO. : 990437

SUPPORT UNIT 4. ----MODEM x 2

Manufacturer : ACEEX

Model Number : 1414

Power Supply Type : Linear

Power Cord : Non-Shielded, Detachable, 1.2m

Data Cable : Shielded, Detachable, 1m

FCC ID : IFAXDM1414

SUPPORT UNIT 5. ---- KEYBOARD x 2

Manufacturer : Acer Peripherals Inc.

Model Number : 6311-C4C

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetectable, 1.2m

FCC ID : Declaration of Conformity (DoC)

SUPPORT UNIT 6. ---- MOUSE x 2

Manufacturer : ACER

Model Number : M-S34

Power Supply Type : N/A

Power Cord : N/A

Data Cable : Shielded, Undetectable, 1.2m

FCC ID : DZL211029

PEP Testing Laboratory

REPORT NO.: 990437

SUPPORT UNIT 7. ----LAN CARD

Manufacturer : RUBY TECH CORP.

Model Number : FE-1430TX

Power Supply Type : N/A

Power Cord : N/A

Data Cable : N/A

FCC ID : N/A

EQUIPMENT UNDER TEST ---- USB Ethernet Adapter

Manufacturer : RUBY TECH CORP.

Model Number : UE-100

Data Cable : Shielded, Detachable, 1.5m

FCC ID : KFWP1UE100JK200

PEP Testing Laboratory

REPORT NO.: 990437

6. TEST CONFIGURATION

Radiated emission detector function :

(1) 30MHZ~1GHZ : Quasi-Peak Value
Resolution BW : 120KHZ Video BW : 300KHZ

(2) above 1GHZ : Quasi-Peak value and Average Value
Resolution BW : 1MHZ Video BW : 1MHZ
* either Q. P. or average value will be recorded
in the report

Conducted emission detector function :

(1) 150KHZ~30MHZ : Quasi-Peak Value
Resolution BW : 9KHZ Video BW : 30KHZ

The else descriptions : N/A

Conducted Emission Test Photo. : Page 16

Test Data : Hot 18, 19, 20, 21
Neutral 22, 23, 24, 25

Radiated Emission Test Photo. : Page 26

Test Data : Horizontal 27
Vertical 28

PEP Testing Laboratory

REPORT NO. : 990437

CONDUCTED EMISSIONS TEST DATA


Model No. : UE-100
Frequency range : 150KHz to 30MHz
Detector : Quasi-peak Value
Temperature : 28 °C
Humidity : 60 %

Test Data : # 2849 # 872 < LINE >
2844 # 867 < NEUTRAL >

※ Note 1. Level = Meter read + Cable Loss + LISN Factor
2. Margin = Level - Limit
3. LISN = AMN

Data#: 2849 File#: cispr22b.EMI

Date: 1999-08-06 Time: 16:12:01

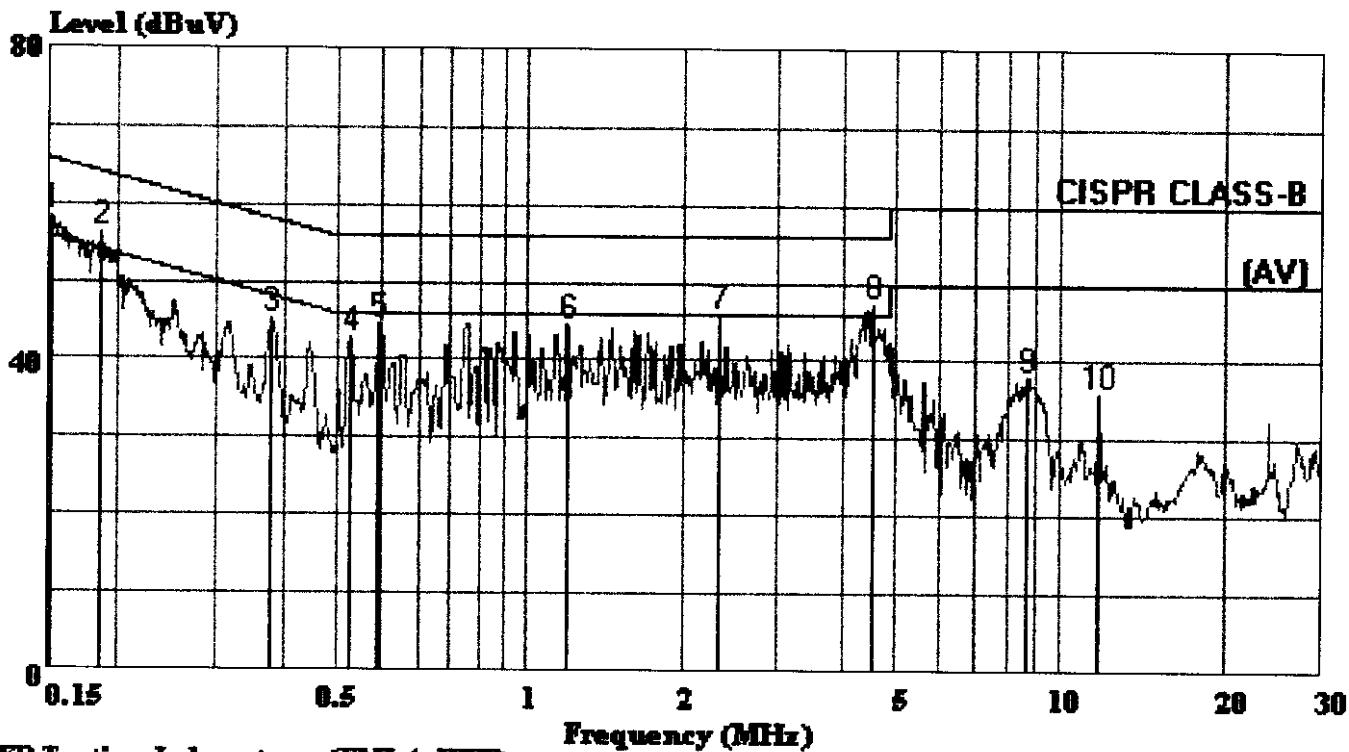**PEP Testing Laboratory (EMI 4:JEFF)**

Trace: 2848

Ref Trace:

Condition: CISPR CLASS-B LISN.L LINE

EUT : UE-100

Power: AC 115V/60Hz

Memo : Quasi Peak Value

PEP Testing Laboratory

Date of test: 8/6/1999

Data # : 2849

EUT Mode : UE-100

Phase : LINE

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.152	0.73	0.71	57.00	58.44	65.87	-7.43
0.186	0.73	0.78	55.00	56.51	64.20	-7.69
0.381	0.73	0.90	43.80	45.43	58.25	-12.82
0.529	0.73	0.90	41.20	42.83	56.00	-13.17
0.595	0.73	0.90	43.20	44.83	56.00	-11.17
1.303	0.71	0.94	43.00	44.65	56.00	-11.35
2.448	0.70	1.00	44.40	46.10	56.00	-9.90
4.647	0.68	1.00	45.60	47.28	56.00	-8.72
8.822	0.66	0.92	36.39	37.97	60.00	-22.03
11.870	0.65	0.80	34.60	36.05	60.00	-23.95


Note: LISN Factor means LISN insertion loss .



PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.
TEL: 886-2-6922097 FAX: 886-2-6956236

Data#: 872 File#: cispr22b.AV.EMI Date: 1999-08-06 Time: 16:18:29

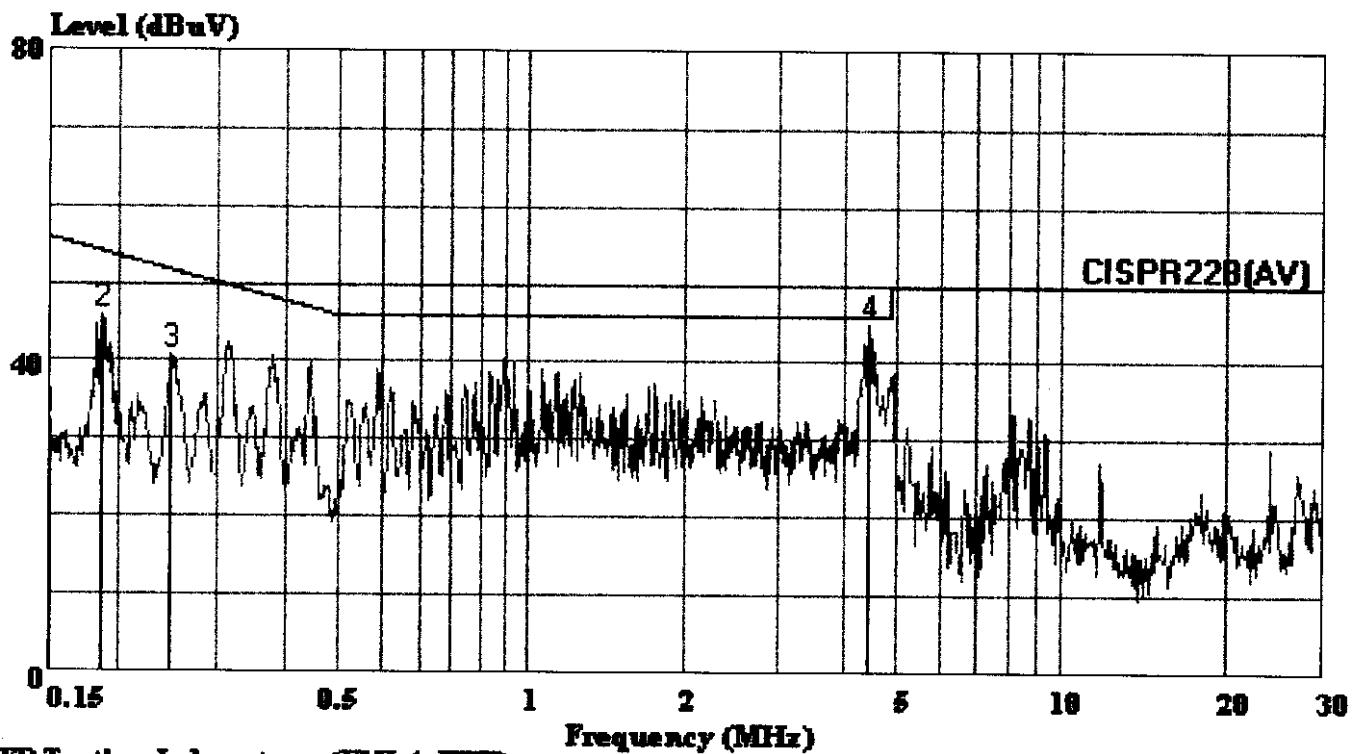

Trace: 871
Condition: CISPR22B(AV) LISN.L LINE
EUT Model: UE-100
Power : AC 115V/60Hz
Memo : Average Value

Ref Trace:

PEP Testing Laboratory

Date of test: 8/6/1999

Data # : 872

EUT Mode : UE-100

Phase : LINE

Detector : A.V.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.151	0.73	0.70	31.21	32.64	55.96	-23.32
0.186	0.73	0.78	44.60	46.11	54.20	-8.09
0.248	0.73	0.80	39.40	40.93	51.82	-10.89
4.549	0.68	1.00	43.20	44.88	46.00	-1.12

Note: LISN Factor means LISN insertion loss .




PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.
TEL: 886-2-6922097 FAX: 886-2-6956236

Data#: 2844 File#: cispr22b.EMI

Date: 1999-08-06 Time: 15:59:36

Level (dBuV)

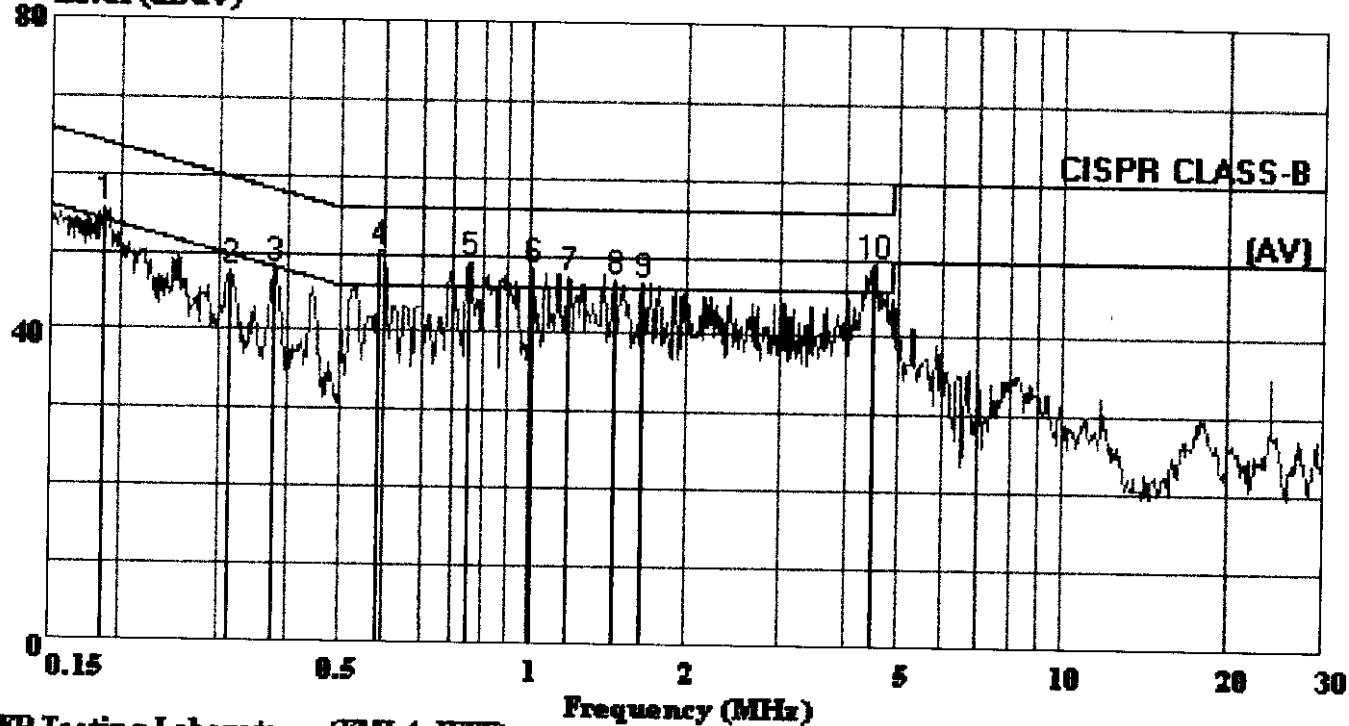

PEP Testing Laboratory (EMI 4:JEFF)

Trace: 2843

Ref Trace:

Condition: CISPR CLASS-B LISN.N NEUTRAL

EUT : UE-100

Power: AC 115V/60Hz

Memo : Quasi Peak Value

PEP Testing Laboratory

Date of test: 8/6/1999

Data # : 2844

EUT Mode : UE-100

Phase : NEUTRAL

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.186	0.73	0.78	54.40	55.91	64.20	-8.29
0.315	0.73	0.90	46.20	47.83	59.84	-12.01
0.379	0.73	0.90	46.40	48.03	58.30	-10.27
0.589	0.73	0.90	48.80	50.43	56.00	-5.57
0.853	0.72	0.90	47.60	49.22	56.00	-6.78
1.117	0.72	0.92	46.79	48.43	56.00	-7.57
1.296	0.71	0.94	45.80	47.45	56.00	-8.55
1.560	0.71	0.96	45.60	47.27	56.00	-8.73
1.762	0.70	0.98	45.21	46.89	56.00	-9.11
4.574	0.67	1.00	47.80	49.47	56.00	-6.53


Note: LISN Factor means LISN insertion loss .



PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.
TEL: 886-2-6922097 FAX: 886-2-6956236

Data#: 867 File#: cispr22b.AV.EMI Date: 1999-08-06 Time: 16:07:20

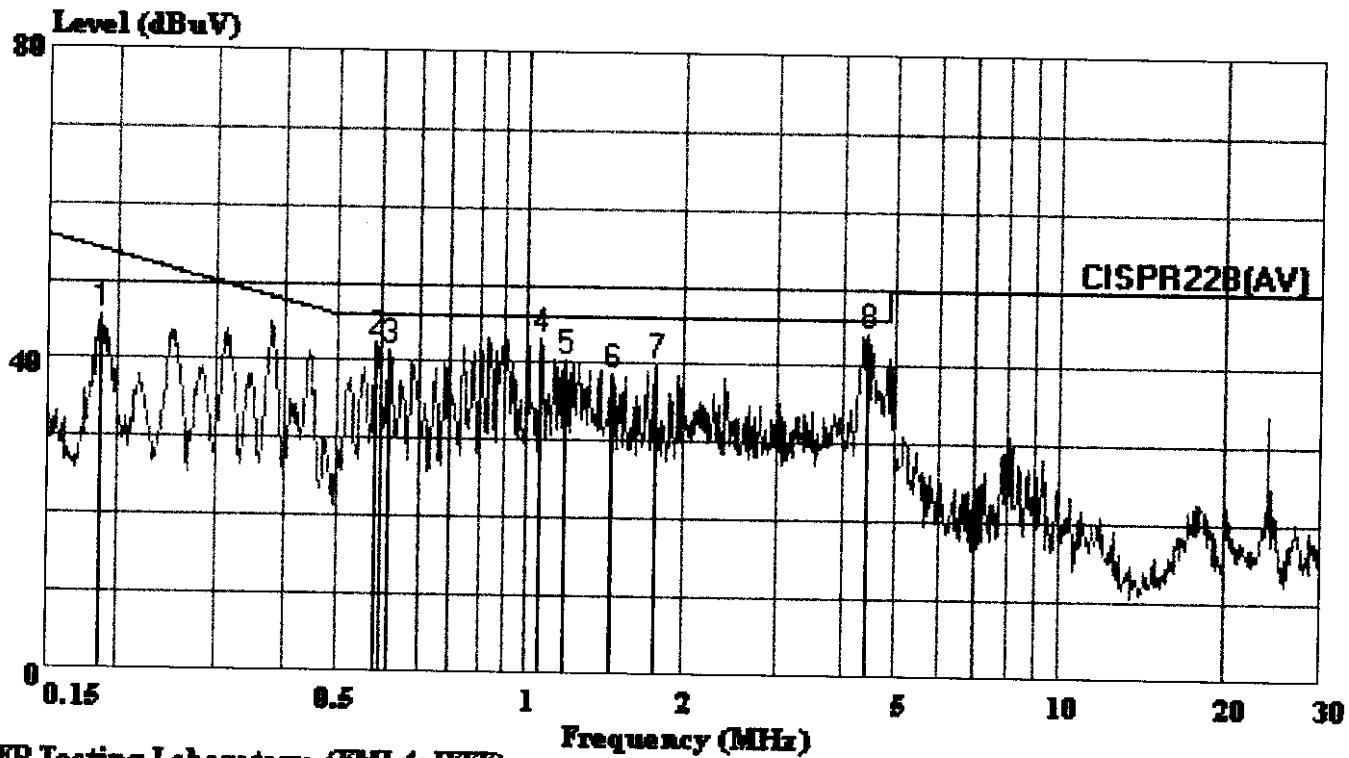

Trace: 866

Ref Trace:

Condition: CISPR22B (AV) LISN.N NEUTRAL

EUT Model: UE-100

Power : AC 115V/60Hz

Memo : Average Value

PEP Testing Laboratory

Date of test: 8/6/1999

Data # : 867

EUT Mode : UE-100

Phase : NEUTRAL

Detector : A.V.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.185	0.73	0.78	44.19	45.70	54.24	-8.54
0.589	0.73	0.90	41.00	42.63	46.00	-3.37
0.621	0.73	0.90	39.80	41.43	46.00	-4.57
1.166	0.72	0.92	41.80	43.44	46.00	-2.56
1.296	0.71	0.94	38.80	40.45	46.00	-5.55
1.560	0.71	0.96	37.00	38.67	46.00	-7.33
1.878	0.70	0.99	38.40	40.09	46.00	-5.91
4.549	0.67	1.00	42.80	44.47	46.00	-1.53

Note: LISN Factor means LISN insertion loss .

PEP Testing Laboratory

REPORT NO. : 990437

RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 10 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
120.00	24.45	- 5.55	30.00	31.34	11.51	1.60	20.00
144.01	26.00	- 4.00	30.00	31.57	12.59	1.84	20.00
168.01	21.63	- 8.37	30.00	27.00	12.48	2.15	20.00
216.01	19.55	-10.45	30.00	27.68	9.45	2.43	20.00
240.00	24.55	-12.45	37.00	31.10	10.84	2.62	20.00
336.00	21.56	-15.44	37.00	24.80	13.49	3.27	20.00
350.00	23.95	-13.05	37.00	26.88	13.77	3.30	20.00
360.00	22.54	-14.46	37.00	25.19	14.03	3.32	20.00
400.00	24.83	-12.17	37.00	26.55	14.88	3.40	20.00
525.02	25.86	-11.14	37.00	24.62	17.39	3.85	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

PEP Testing Laboratory

REPORT NO. : 990437

RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 10 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
125.00	25.93	- 4.07	30.00	32.67	11.66	1.60	20.00
144.00	25.59	- 4.41	30.00	31.16	12.59	1.84	20.00
150.00	25.12	- 4.88	30.00	30.11	13.11	1.90	20.00
216.00	21.95	- 8.05	30.00	30.08	9.45	2.43	20.00
240.00	28.93	- 8.07	37.00	35.48	10.84	2.62	20.00
312.00	23.36	-13.64	37.00	27.23	12.91	3.22	20.00
336.00	24.34	-12.66	37.00	27.58	13.49	3.27	20.00
350.00	19.40	-17.60	37.00	32.33	13.77	3.30	20.00
450.00	22.86	-14.14	37.00	23.00	16.26	3.60	20.00
525.00	26.24	-10.76	37.00	25.00	17.39	3.85	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

PEP Testing Laboratory

REPORT NO. : 990437

List of Test Equipment

Instrument	Model No.	Cal. Due Date	S/N
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 15, 2000	863342/012
R&S Receiver	ESBI (20~5GHZ)	Apr. 15, 2000	845658/003
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Apr. 15, 2000	91720076
MEB L. I. S. N	NNB-4/63T1(10K~30MHz)	Feb. 12, 2000	98008
Anritsu Pre-Amp	3825/2 (10K~30MHZ)	Sep. 20, 1999	M40076
R & S Pre-Amp	ESMI-Z7(100K~1.4GHZ)	Feb. 12, 2000	6/2278/011
COM-Power Horn Antenna	AH-118 (1G~18GHZ)	Feb. 20, 2001	10056
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 2000	N/A