



FCC CFR47 PART 15 CERTIFICATION

TEST REPORT

FOR

BLUETOOTH PROTOCOL ANALYZER and TEST GENERATOR

MODEL: BT004APA-X

FCC ID: KH7BT004APA-X

REPORT NUMBER: 02U1444-1

ISSUE DATE: AUGUST 9, 2002

Prepared for

**COMPUTER ACCESS TECHNOLOGY CORPORATION
2403 WALSH AVENUE
SANTA CLARA, CA 95051
USA**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561 F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENT

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	4
4. TEST FACILITY	4
5. ACCREDITATION AND LISTING	4
5.5. LABORATORY ACCREDITATIONS AND LISTINGS	5
6. CALIBRATION AND UNCERTAINTY	6
6.1. MEASURING INSTRUMENT CALIBRATION.....	6
6.2. MEASUREMENT UNCERTAINTY	6
6.3. TEST AND MEASUREMENT EQUIPMENT	7
7. SUPPORT EQUIPMENT / EUT SETUP.....	7
8. APPLICABLE RULES	10
9. TEST SETUP, PROCEDURE AND RESULT	15
9.1. HOPPING FREQUENCY SEPARATION	15
9.2. NUMBER OF HOPPING FREQUENCIES.....	17
9.3. 20 DB BANDWIDTH MEASUREMENT	20
9.4. TIME OF OCCUPANCY.....	24
9.5. PEAK POWER OUTPUT	28
9.6. CONDUCTED SPURIOUS EMISSION	32
9.7. PEAK POWER SPECTRAL DENSITY.....	36
9.8. RADIATED EMISSION	40
9.8.1. RADIATED EMISSION AND RESTRICTED BAND EDGE	40
9.9. POWER LINE CONDUCTED EMISSION.....	53
9.10. SETUP PHOTOS	55

1. TEST RESULT CERTIFICATION

COMPANY NAME: COMPUTER ACCESS TECHNOLOGY CORPORATION
2403 WALSH AVENUE
SANTA CLARA, CA 95051 USA

CONTACT PERSON: KEN KIMURA / MGF. ENGINEERING MANAGER

TELEPHONE NO: (408) 727-6600

EUT DESCRIPTION: BLUETOOTH PROTOCOL ANALYZER AND TEST GENERATOR

MODEL NAME: BT004APA-X

DATE TESTED: AUGUST 5 - 7, 2002

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	2.4GHz TRANSCEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 15 Subpart C

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirement set forth in CFR 47, PART 15 Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.


Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



THU CHAN
SENIOR EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



KERWIN CORPUZ
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The CATC BTTracer/Trainer is a combination of Bluetooth Protocol Analyzer and Test Generator. This product is a wireless Frequency Hopping Spread Spectrum that operates on the 2400 – 2483.5 MHz band. BTTracer/Trainer is a development and test tool for products using the Bluetooth wireless technology. This unit provides a power output of –1.55 dBm (0.700 mW) and includes a 2.4 GHz OMNI Directional external antenna with a 2 dBi gain.

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

4. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

5.5. Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

*No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government

6. CALIBRATION AND UNCERTAINTY

6.1. Measuring Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9

Any results falling within the above values are deemed to be marginal.

6.3. Test and Measurement Equipment

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
Spectrum Analyzer	HP	8566B	2140A01296	5/23/03
Preamplifier	HP	8447D	2944A06589	8/10/02
Bilog Antenna	Chase	CBL6112B	2586	4/1/03
Line Filter	Lindgren	LMF-3489	497	N.C.R.
LISN	Fisher Custom Communication	LISN-50/250-25-2	2023	4/25/03
EMI Test Receiver	Rohde & Schwarz	ESHS 20	827129/006	4/17/03
Spectrum Analyzer	HP	8593EM	3710A00205	6/11/03
Preamplifier (1 - 26.5GHz)	MITEQ	NSP2600-44	646456	4/26/03
Horn Antenna (1 - 18GHz)	EMCO	3115	6717	1/31/03
Horn Antenna (18 - 26GHz)	Antenna Research Associates	MWH 1826/B	1013	Extended to 9/26/02
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	003	N.C.R.

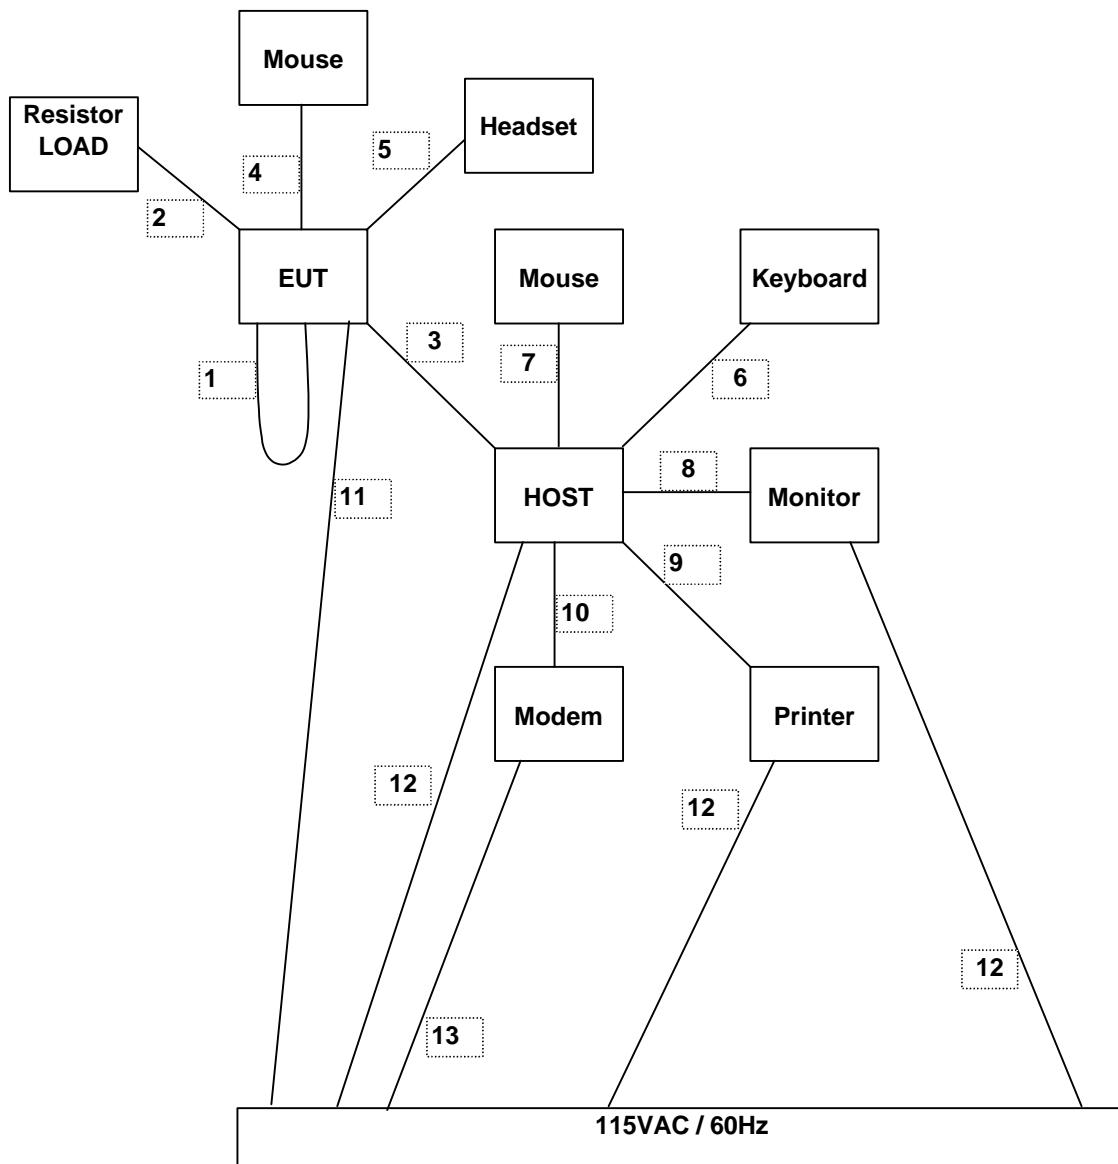
7. SUPPORT EQUIPMENT / EUT SETUP

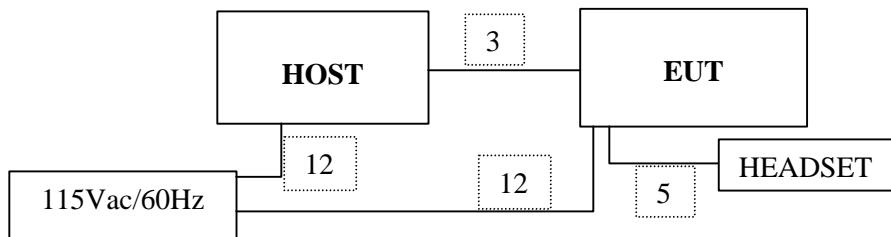
The following peripheral support equipment was utilized to operate the equipment under test:

* Was use for ITE devices minimum configuration requirement:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
PC Tower	Computer Systems	N/A	COMP0206	N/A
Headset	GN	N/A	N/A	N/A
Monitor	DELL	E551	A-12330	DoC
Keyboard	Zenith	KB-5923	TBCM6701389	E8HKB-5923
PS/2 Mouse	HP	M-S34	LZB75062022	DZL211029
*USB Mouse	Logitech	M-BD89	LNA20305660	DoC
* Modem	HAYES	07-00038	A30200153492	BFJ9D907-00038
* Printer	JCM Gold	GP965	20001149	DoC

The following setup was used to operate the equipment under test:

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

SETUP DIAGRAM FOR TRANSMITTER TESTSI/O CABLESTEST I/O CABLES

Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	I/O	1	BNC	Shielded	1m	Yes	No	N/A
2	LOAD	1	DB25	Shielded	1m	Yes	No	N/A
3	USB	1	USB	Shielded	1m	Yes	No	N/A
4	Mouse	1	USB	Drain Wire	1.5m	Yes	No	N/A
5	Headset	1	PhoneJack	Un-Shielded	1.2m	No	No	N/A
6	Keyboard	1	PS/2	Shielded	1m	Yes	No	cable is coiled
7	Mouse	1	PS/2	Drain Wire	1.5m	Yes	No	N/A
8	Monitor	1	DSUB15	Shielded	1.5m	Yes	No	ferrite at connector end
9	Printer	1	DB25	Shielded	1.7m	No	No	N/A
10	Modem	1	RS232	Shielded	1m	No	No	N/A
11	AC	1	USA type	Un-Shielded	1.8m	No	Yes	bundled during LC test
12	AC	1	USA type	Un-Shielded	1.8m	No	No	N/A
13	AC/DC	1	USA type	Un-Shielded	2m	No	No	N/A

8. APPLICABLE RULES

§15.247 (a) (1) – HOPPING FREQUENCY SEPERATION

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Spec limit: >866 kHz (20 dB bandwidth)

§15.247 (a) (1) (ii) – NUMBER OF HOPPING FREQUENCIES

Frequency hopping should be at least 15 non-over-lapping channels with 75 MHz bandwidth minimum.

Inquiry Sequence with 32 hopping frequency.

Data Mode with 79 hopping frequency.

§15.247 (a) (1) (ii) - BANDWIDTH LIMITATION

(a) (1) (ii) The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

Spec limit: < 1 MHz.

§15.247 (a) (1) (ii) – TIME OF OCCUPANCY

(a) (1) (ii) The average time of occupancy on any frequency shall not be greater than 0.4 seconds within 30 second period.

§15.247 (b) (1) - POWER OUTPUT

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band, and all direct sequence systems: 1 watt.

Spec limit: As specified above, 1W maximum.

§15.247 (c) – SPURIOUS EMISSION

(c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Spec limit: As specified in Section 15.209 and 15.205.

§15.247 (d) and§15.247 (f) - PEAK POWER SPECTRAL DENSITY

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

(f) The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

Spec limit: < 8dBm.

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Spec limit: As specified above.

§15.207- CONDUCTED LIMITS

(a) For an intentional radiator, which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

The frequency 0.150 - 30 MHz was investigated.

Conducted Emission Technical Requirements For Class B Device			
Frequency Range	FCC limits Quasi-Peak/dBuV	CISPR 22 limits Quasi-Peak/dBuV	CISPR 22 limits Average/dBuV
450kHz-0.5 MHz	48	---	---
150kHz -0.5MHz	---	66-56	56-46
0.5MHz-5MHz	48	56	46
5MHz- 30MHz	48	60	50

Note: CISPR 22 limits were used for the tests documented in this report.

Spec limit: As specified above.

§15.209- RADIATED EMISSION LIMITS; GENERAL REQUIREMENTS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table below, the tighter limit applies at the band edges.

Radiated Emission Technical Requirements For Class B Device		
Frequency (MHz)	FCC limits @ 3 meter Quasi-Peak/dBuV/m	CISPR 22 limits @10 meter Quasi-Peak/dBuV/m
30 -88 **	40.0	30.0
88-216 **	43.5	30.0
216-230 **	46.0	30.0
230-960 **	46.0	37.0
960-1000	54.0	37.0
Above 1000	54.0	Not Applicable

Note: CISPR 22 limits were used for the tests documented in this report.

Spec limit: As specified above.


9. TEST SETUP, PROCEDURE AND RESULT

9.1. HOPPING FREQUENCY SEPARATION

TEST SETUP

Detector Function Setting of Test Receiver

Center Frequency (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
2441	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 kHz	<input checked="" type="checkbox"/> 100 kHz



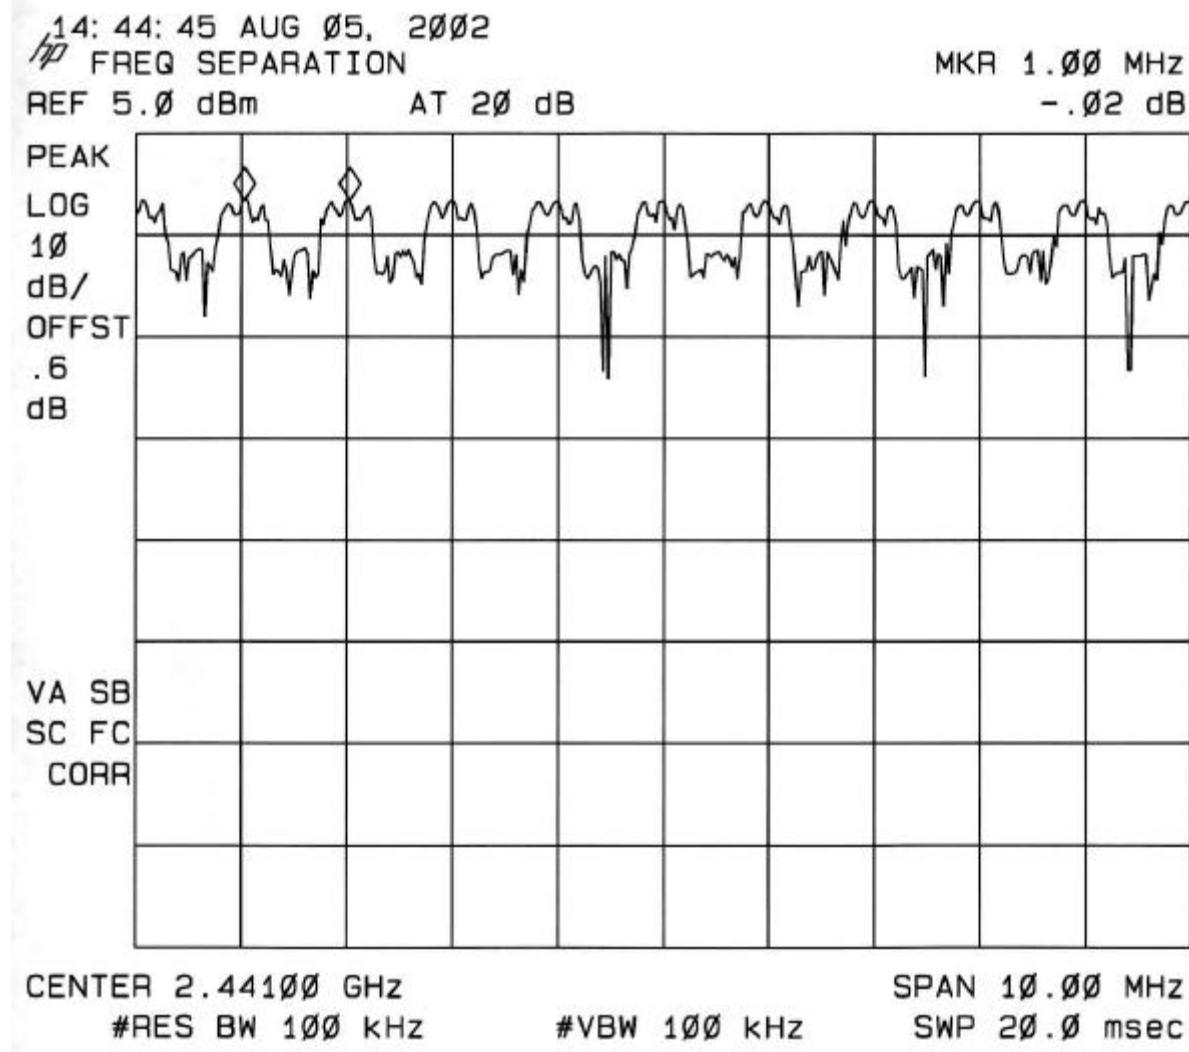
TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port.

Set frequency span to at least 10 MHz. Let EUT to complete the pseudorandom hopping frequency then set marker delta to measure the separation between each hopping frequency.

RESULT

No non-compliance noted. See plot below.




9.2. NUMBER OF HOPPING FREQUENCIES

TEST SETUP

Detector Function Setting of Test Receiver

Center Frequency (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
2441	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz



TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port.

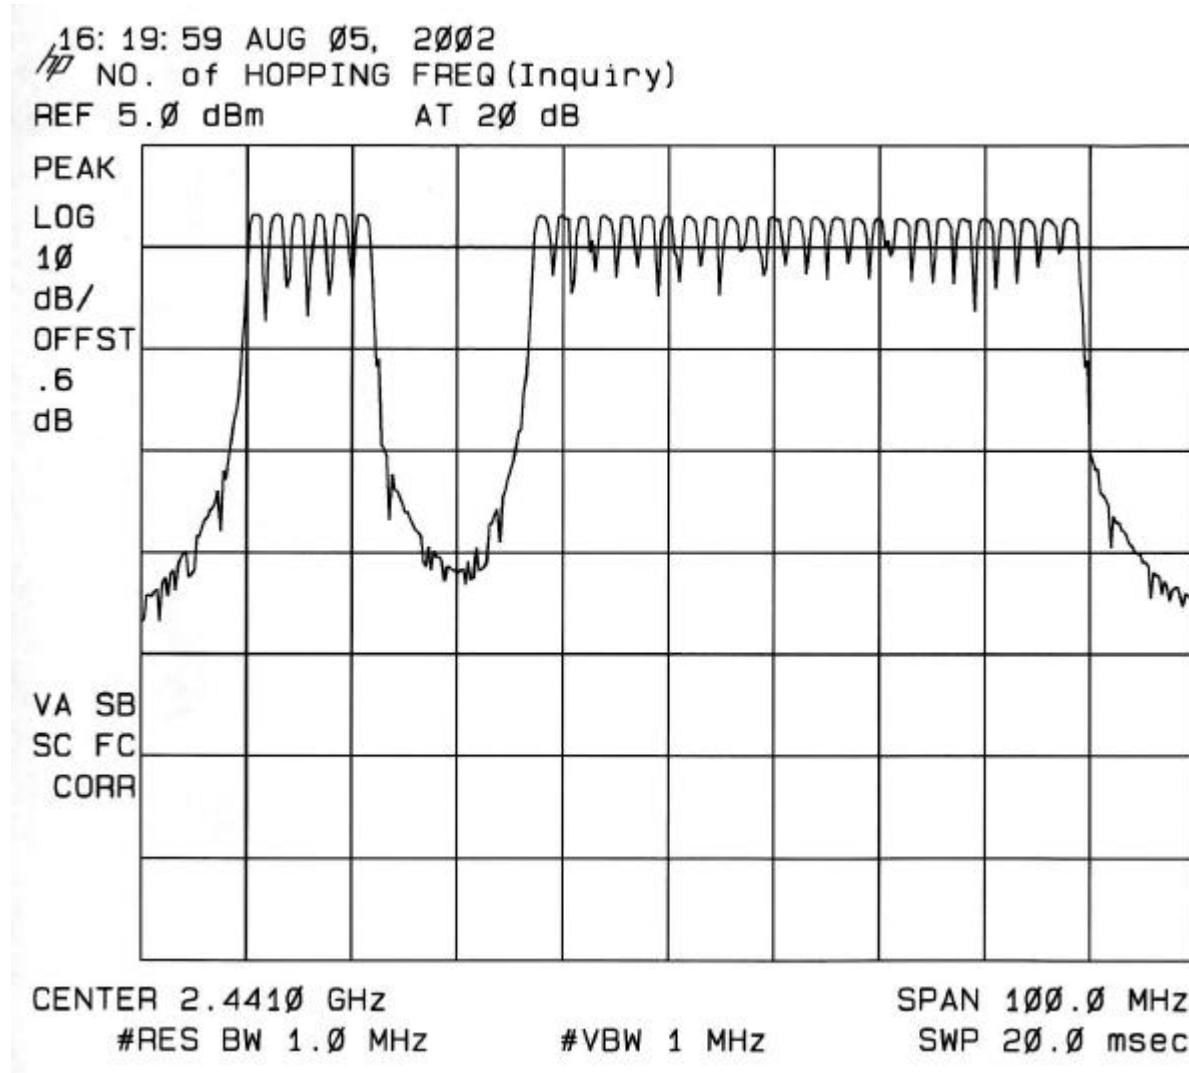
Set frequency span to at least 100 MHz. Let EUT to complete the pseudorandom hopping frequency then set trace A to maximum hold. Record data by plotting graph.

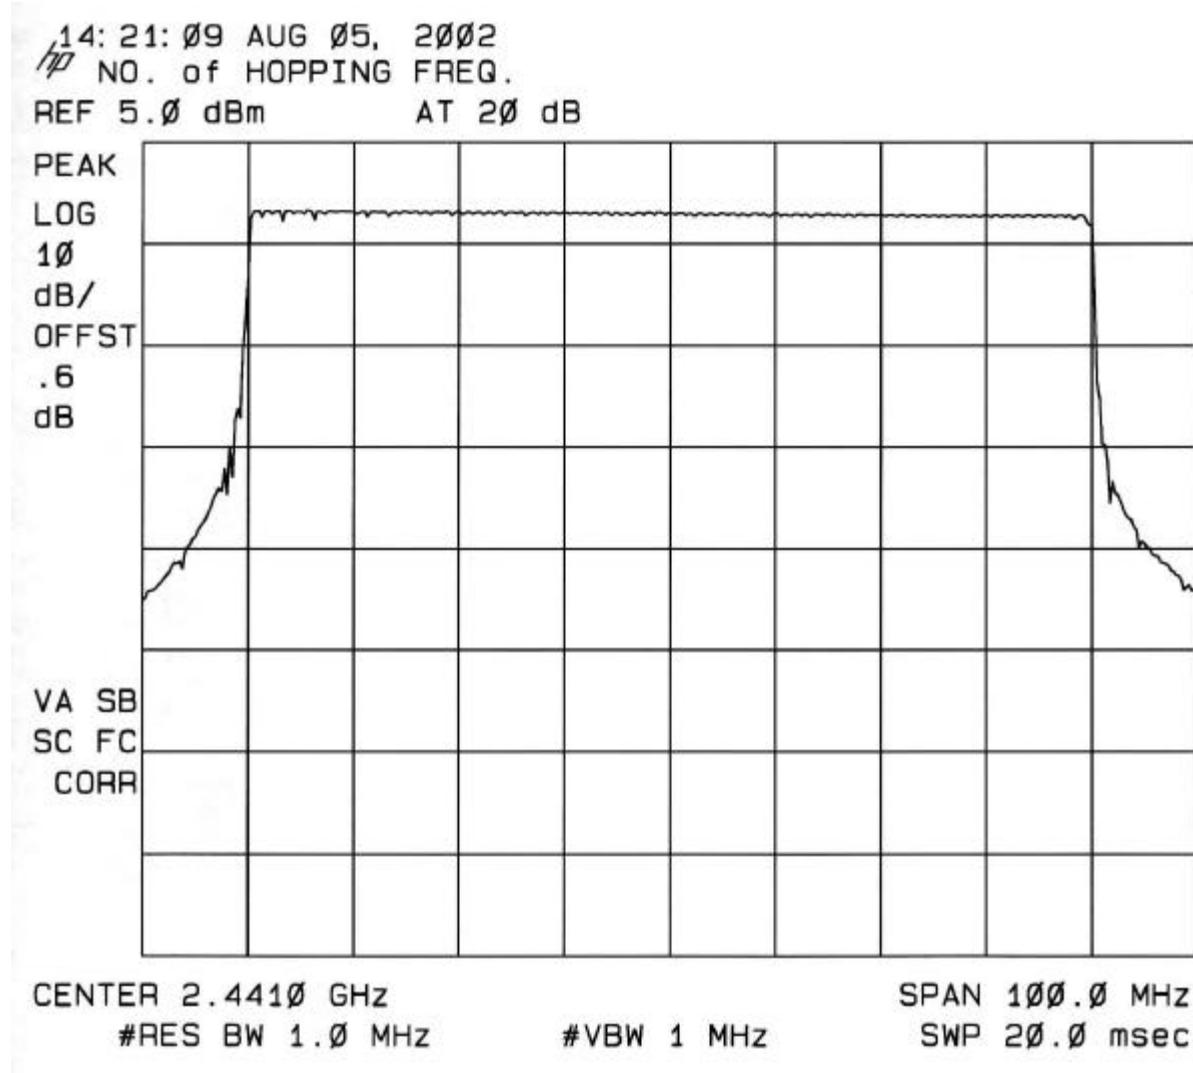
RESULT

Measured Inquiry Mode and counted 32 hopping frequencies.

Measured Data Mode and counted 79 hopping frequencies.

No non-compliance noted. See plot below.

INQUIRY MODE

DATA MODE

9.3. 20 dB BANDWIDTH MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 10 kHz	<input checked="" type="checkbox"/> 10 kHz

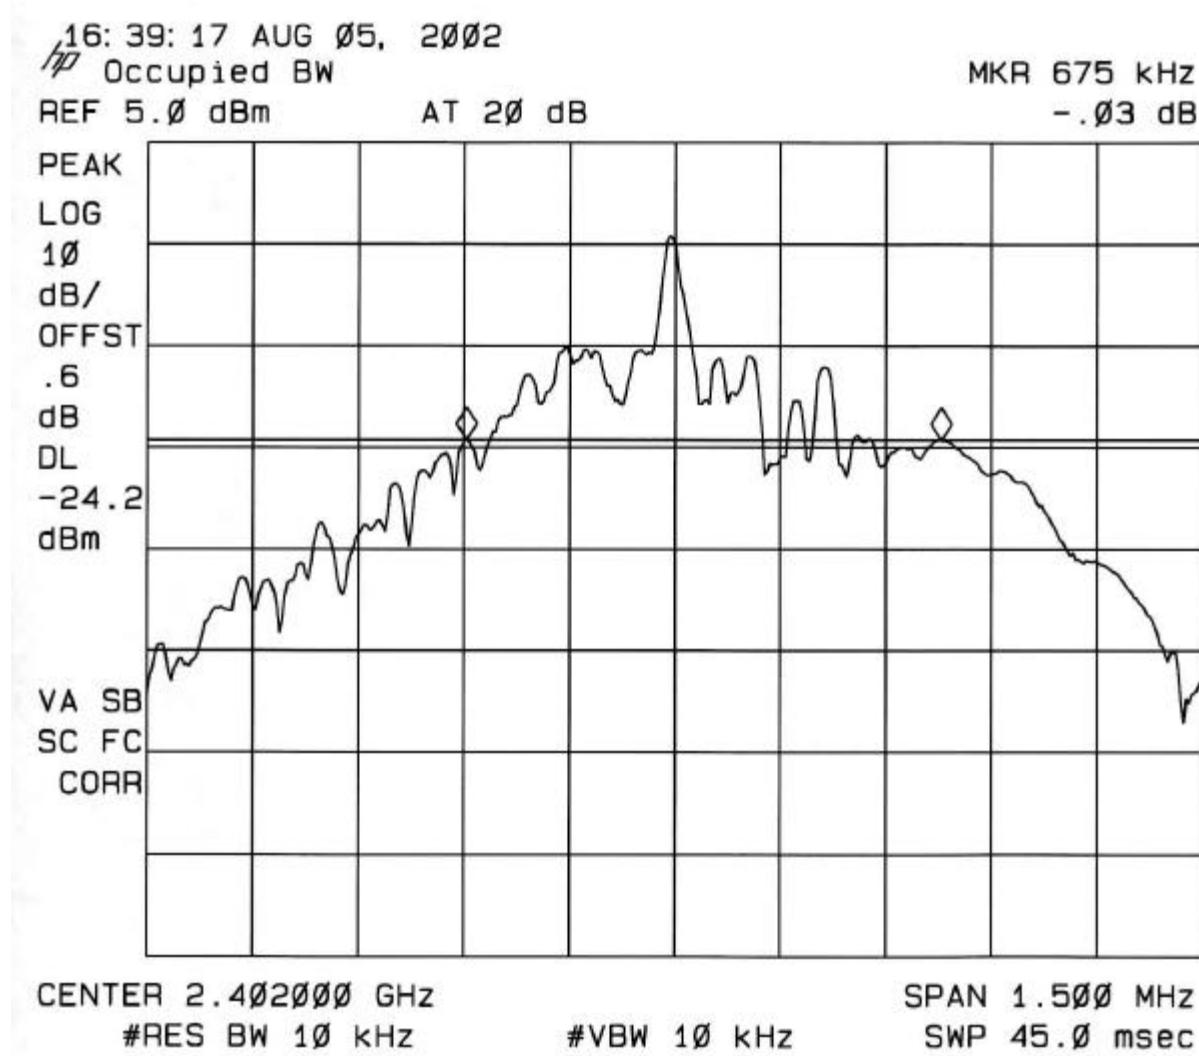


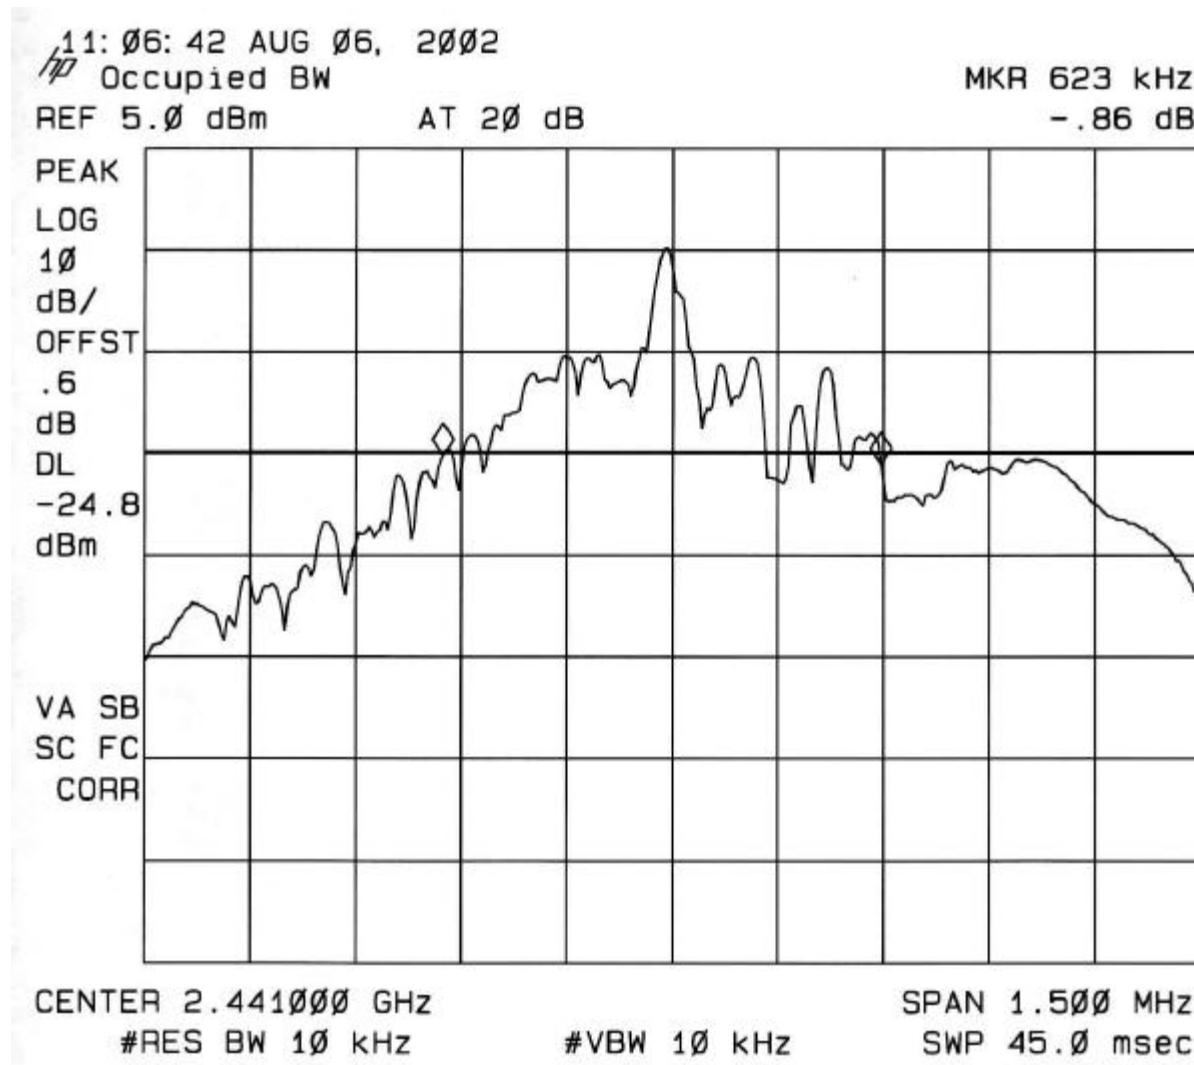
TEST PROCEDURE

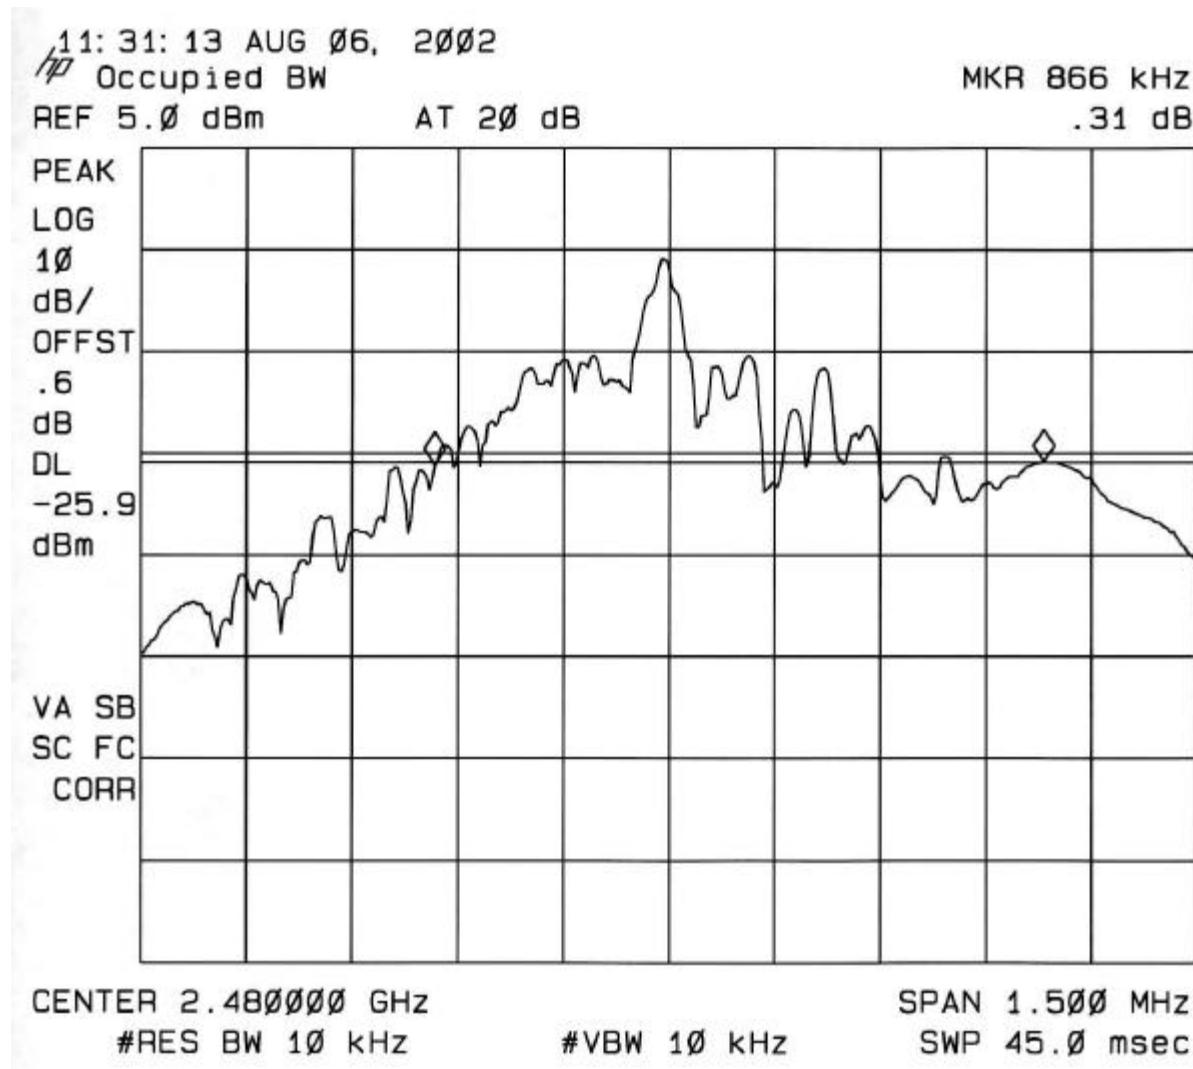
The transmitter output port was connected to the spectrum analyzer input port. The bandwidth of the fundamental frequency was measured by a spectrum analyzer with 10 kHz RBW and 10 kHz VBW.

RESULT

No non-compliance noted. See plots below.

20dB BANDWIDTH @ LOW CHANNEL

20dB BANDWIDTH @ MID CHANNEL


20dB BANDWIDTH @ HIGH CHANNEL

9.4. TIME OF OCCUPANCY

TEST SETUP

Detector Function Setting of Test Receiver

Center Frequency (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
2441	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz



TEST PROCEDURE

1. Set the transmitter to operate in its normal frequency hopping mode.
2. Set the spectrum analyzer CENTER FREQUENCY to one of the hopping channels, preferably near the center of the operating band. Set the SPAN to ZERO SPAN. Set the SWEEP TIME to 5msec. Then measure the duration of a single pulse.
3. Set the SWEEP TIME to 1 second and measure (plot).
4. Set the SWEEP TIME to 30 seconds and measure (plot).
5. Run a total of 10 different 30 second sweeps. The maximum time of channel occupancy is determined by the maximum number of transmissions detected in any 30 second period as appropriate, times the duration of each transmission.

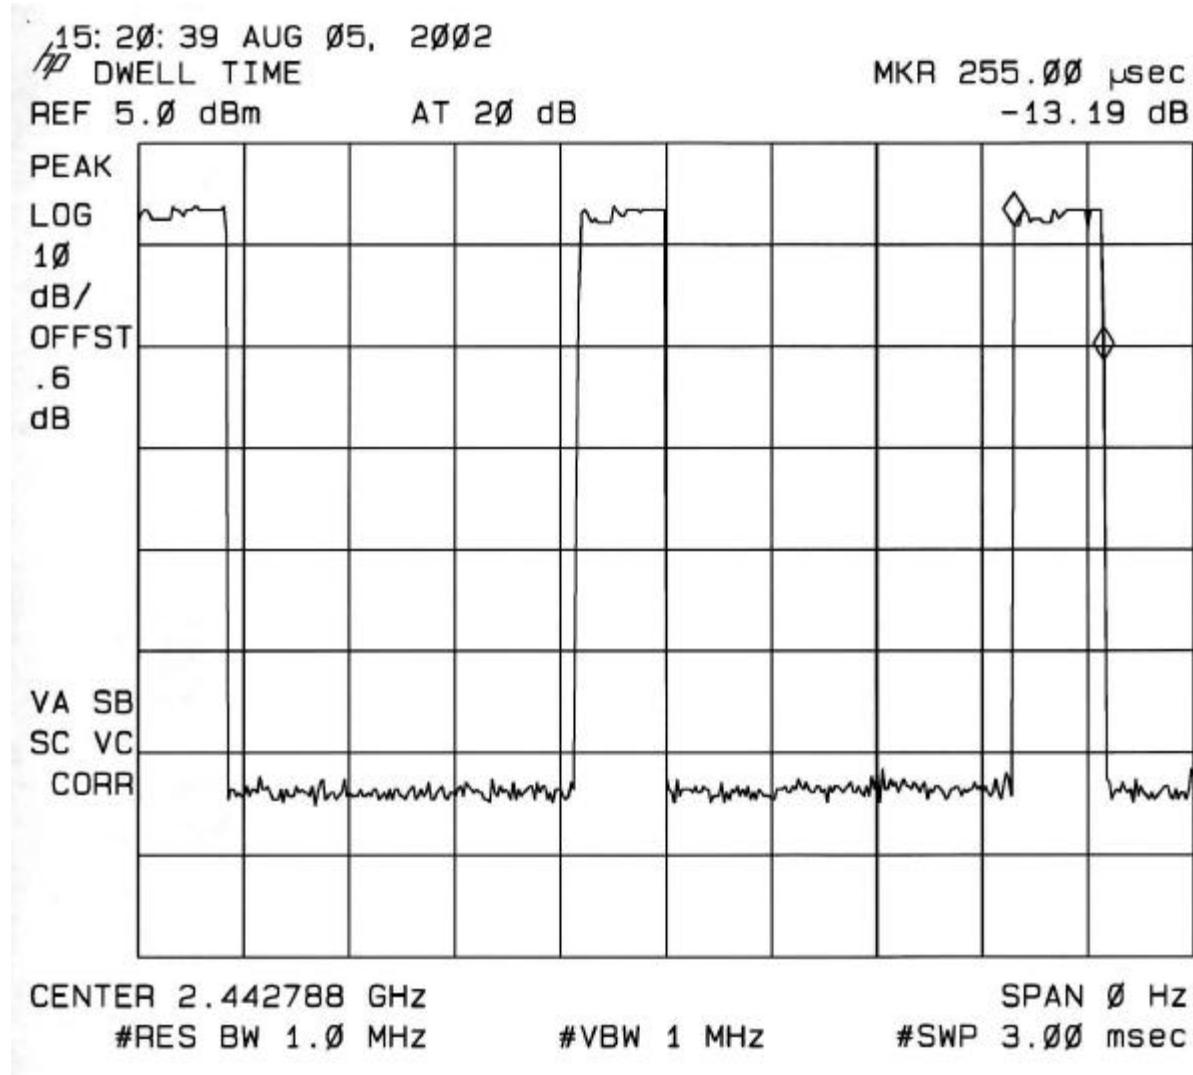
RESULT

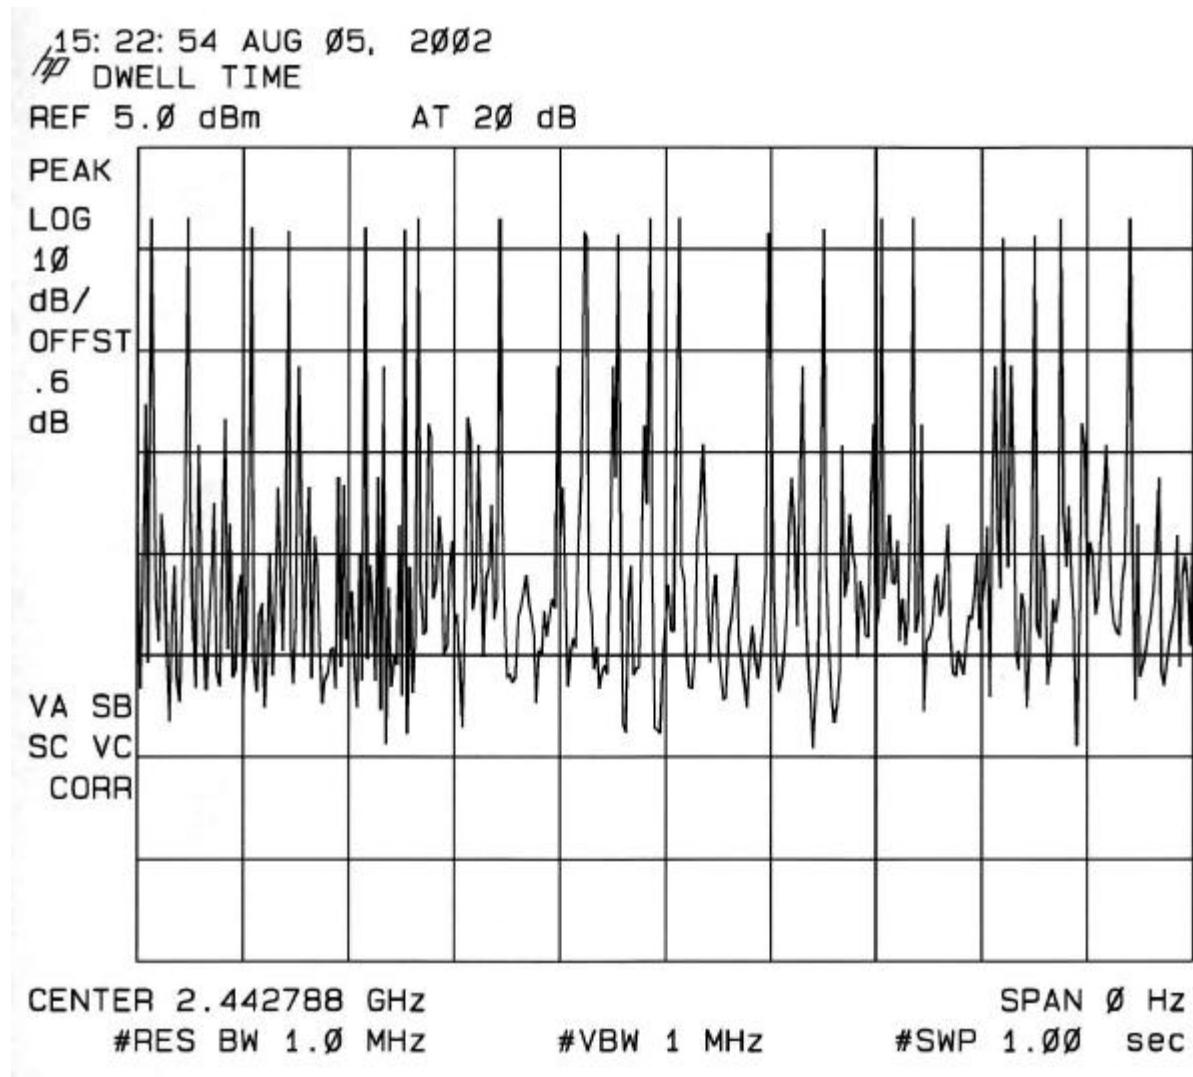
No non-compliance noted.

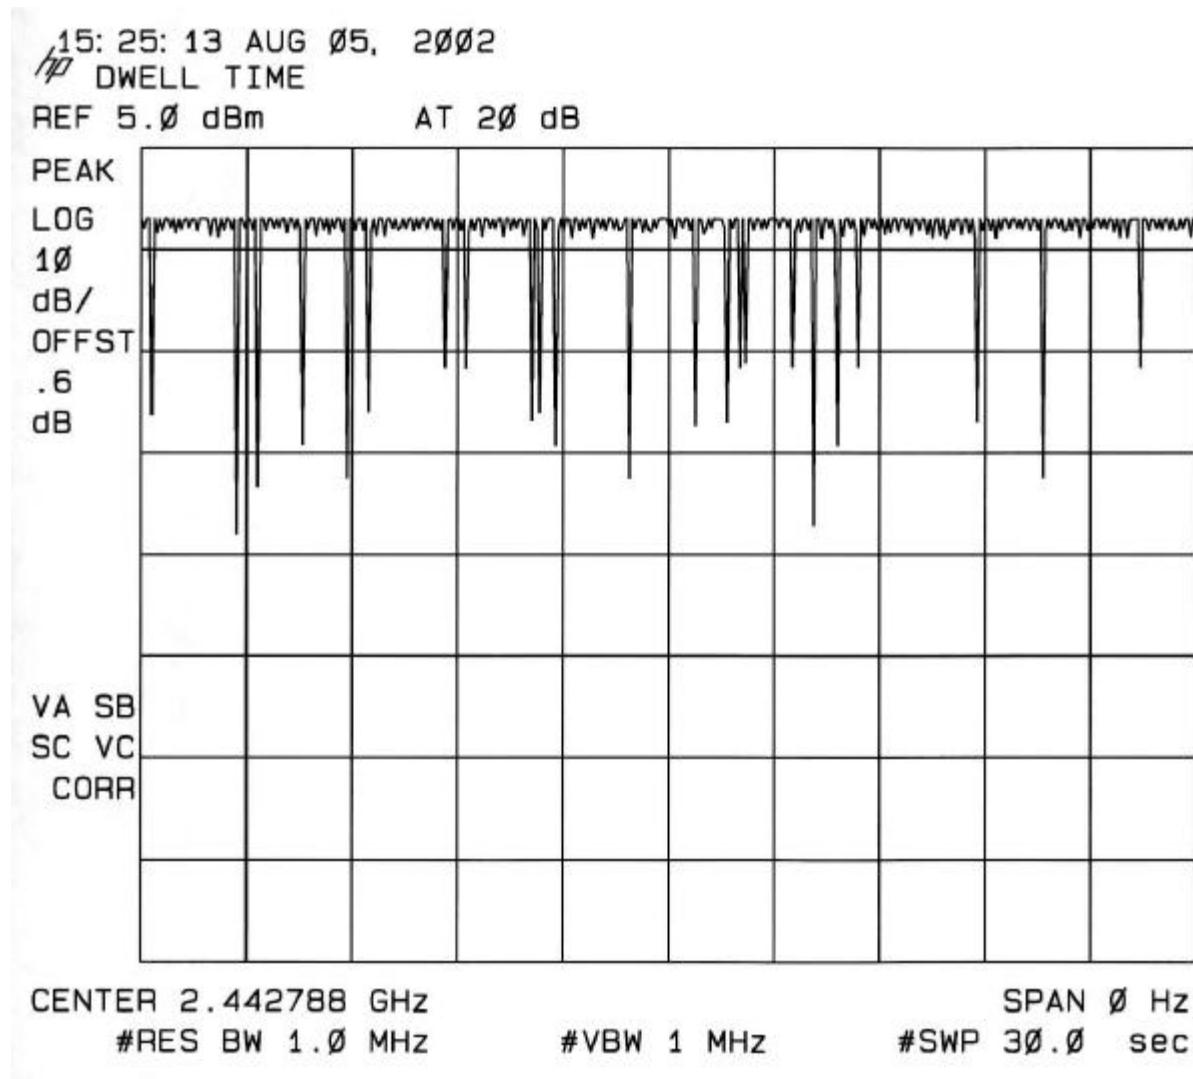
Time of Occupancy = (number of pulses in 1 sec period) * (30 sec) * (duration of a single pulse)

Limit	Number of Pulses in 1 sec	Multiply 30 sec and Number of Pulses in 1 sec	Duration of each pulse	Time of occupancy (sec)
<0.4 sec	20	600	0.255 msec	0.153

See plot below

DURATION OF EACH PULSE

NUMBER OF PULSES IN 1 SECOND


NUMBER OF PULSES IN 30 SECONDS

9.5. PEAK POWER OUTPUT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 3 MHz	<input checked="" type="checkbox"/> 3 MHz



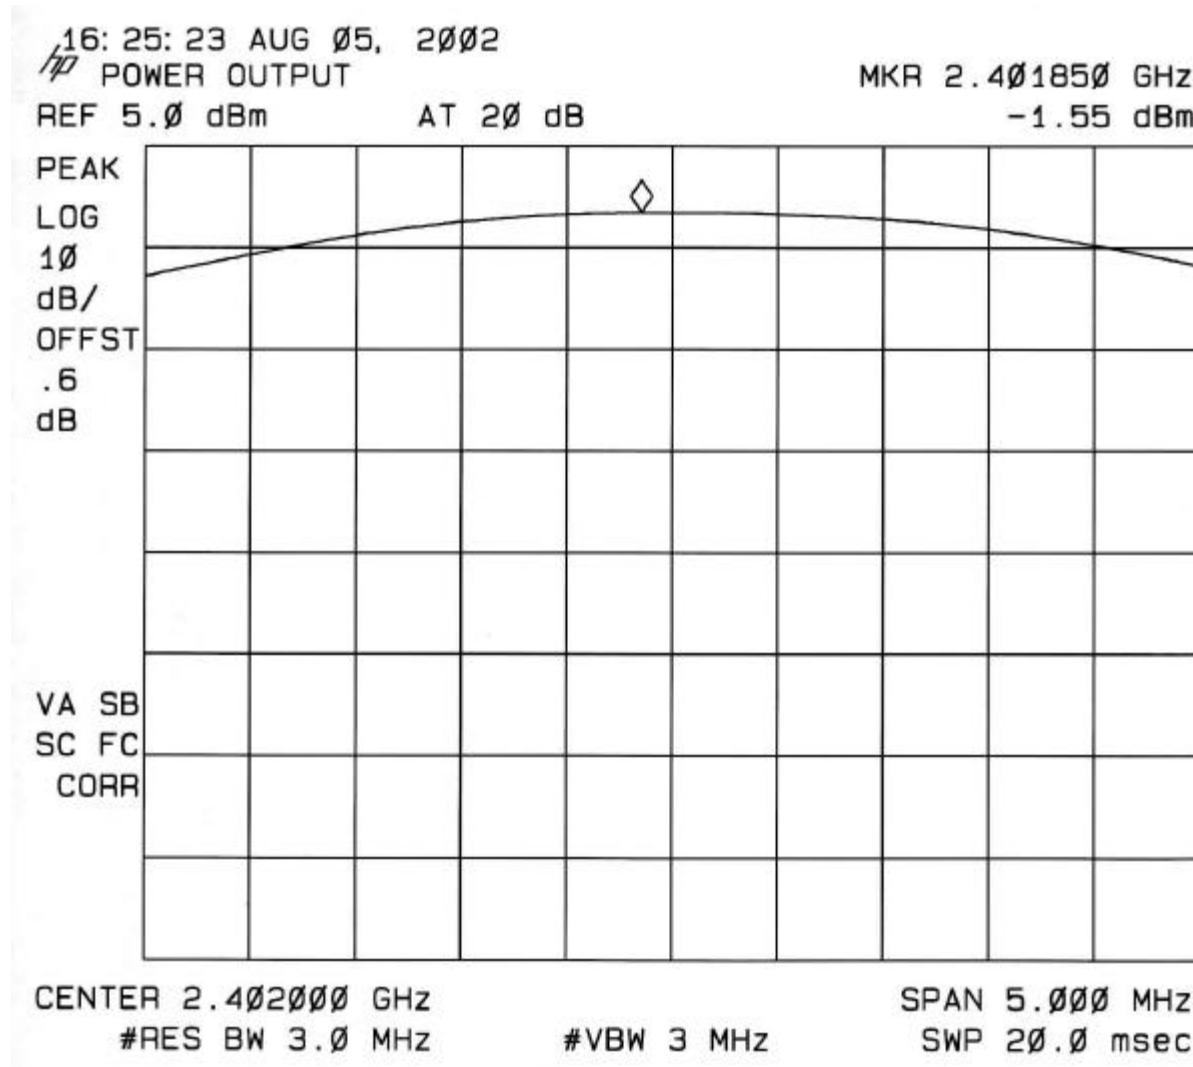
TEST PROCEDURE

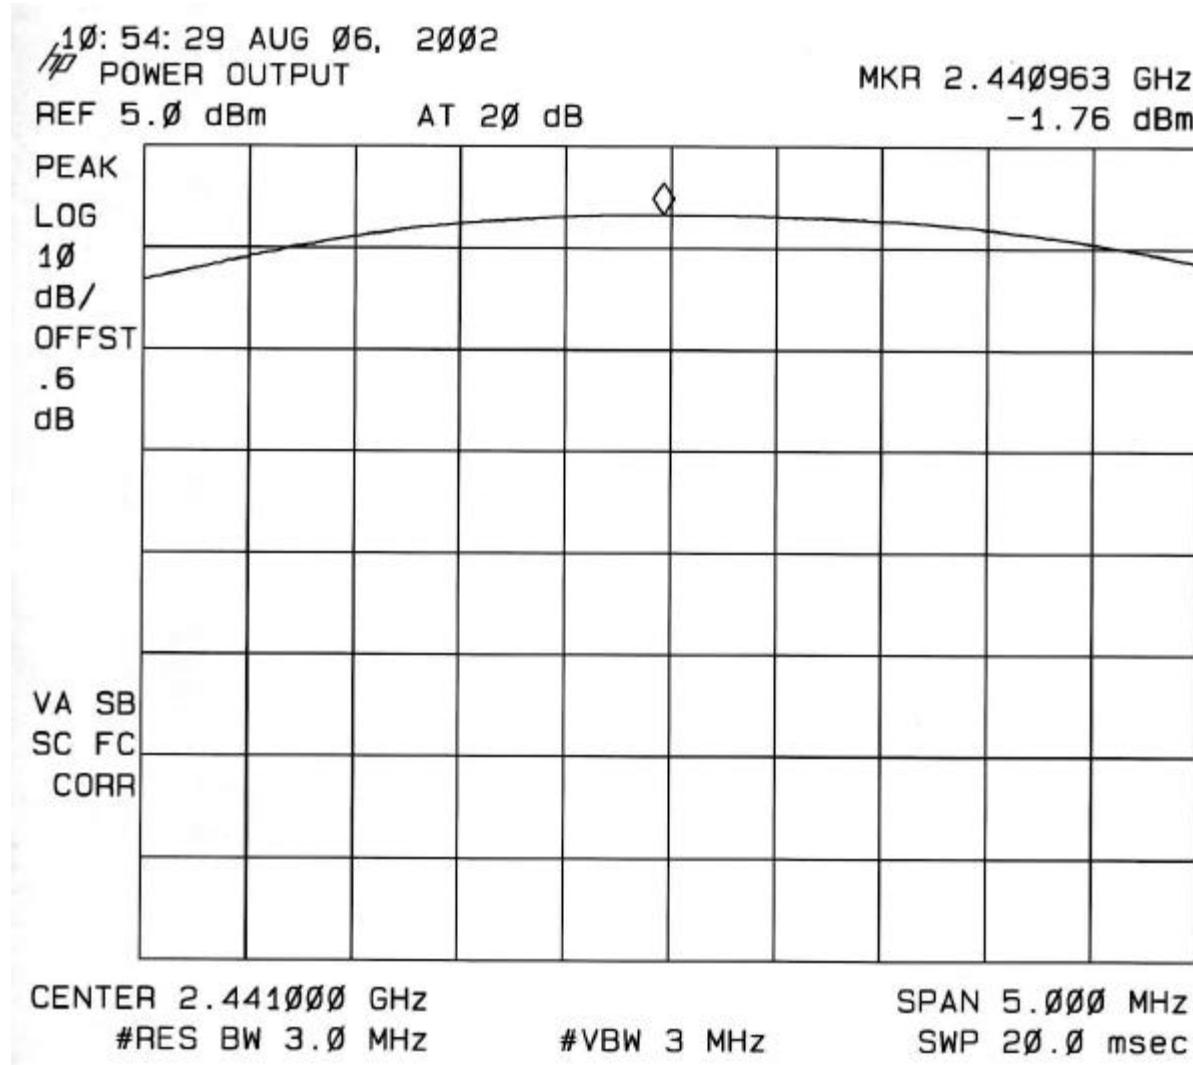
The EUT is configured on a test bench as shown above in a continuously transmitting / receiving mode. While the transceiver started, the analyzer MAX HOLD function is used to capture the emissions and a plot is made with the marker at the peak emission.

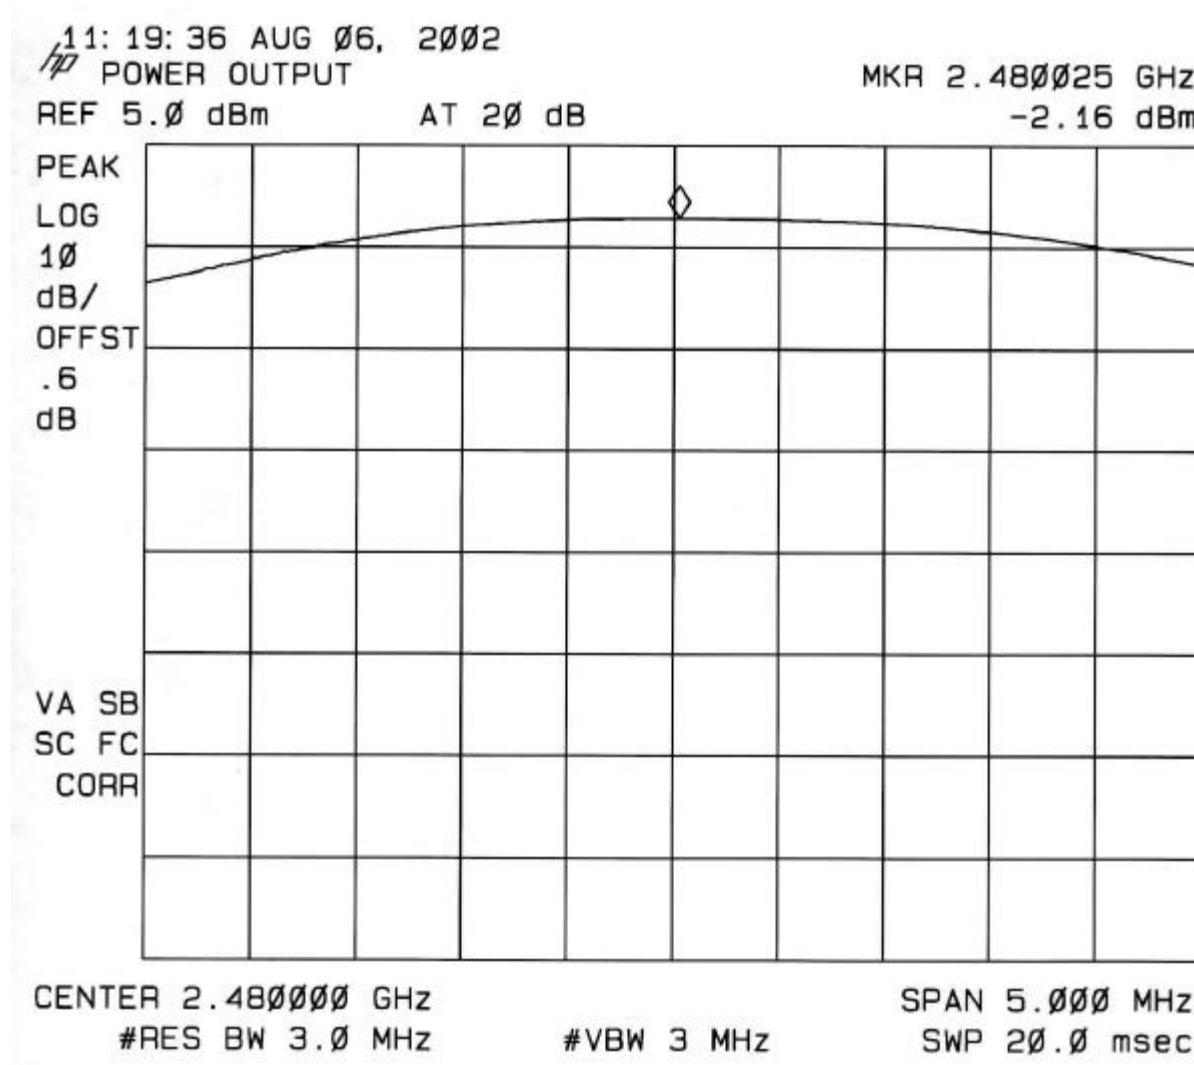
RESULT

Channel	Frequency (MHz)	Output Power (watt)
LOW	2402	0.0006998 (-1.55 dBm)
MID	2441	0.0006668 (-1.76 dBm)
HIGH	2480	0.0006081 (-2.16 dBm)

No non-compliance noted. See plots below.

POWER OUTPUT @ LOW CHANNEL

POWER OUTPUT @ MID CHANNEL

POWER OUTPUT @ HIGH CHANNEL

9.6. CONDUCTED SPURIOUS EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 - 25000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 kHz	<input checked="" type="checkbox"/> 100 kHz

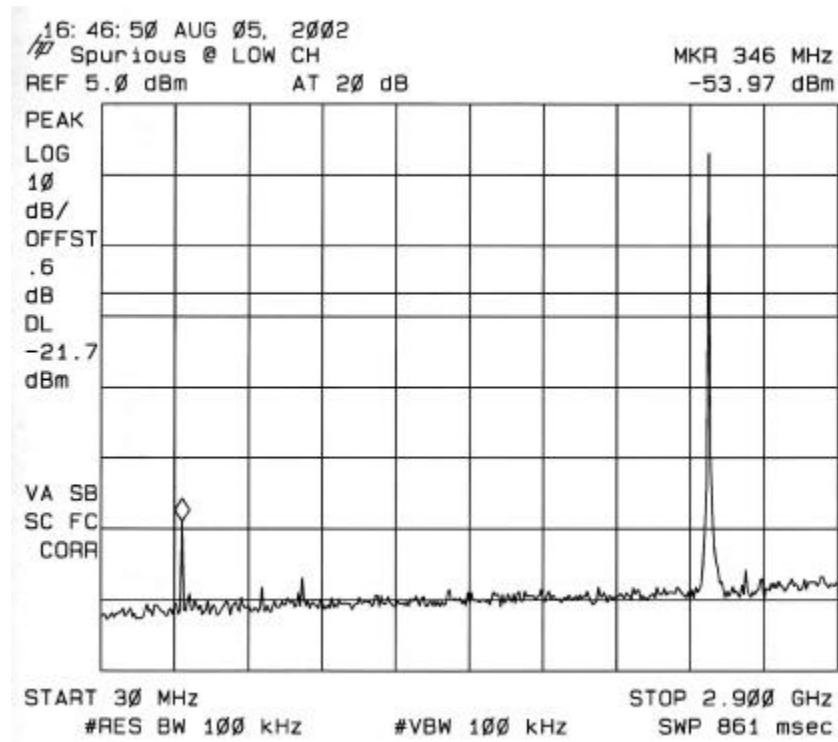


TEST PROCEDURE

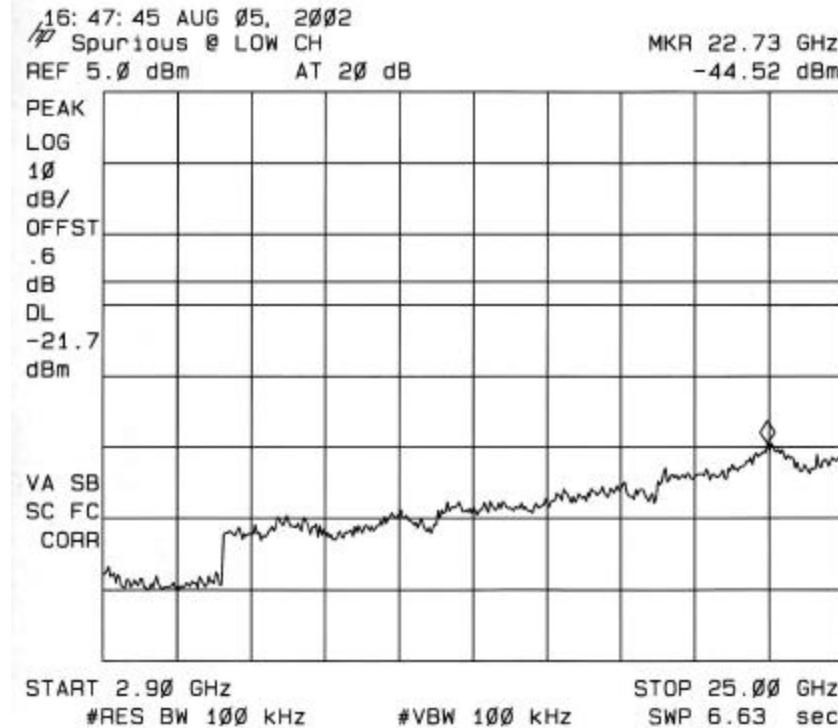
Connect the Eut's antenna port to the Spectrum Analyzer's input port. Investigate the entire frequency of the carrier frequency, up to the tenth harmonic.

RESULT

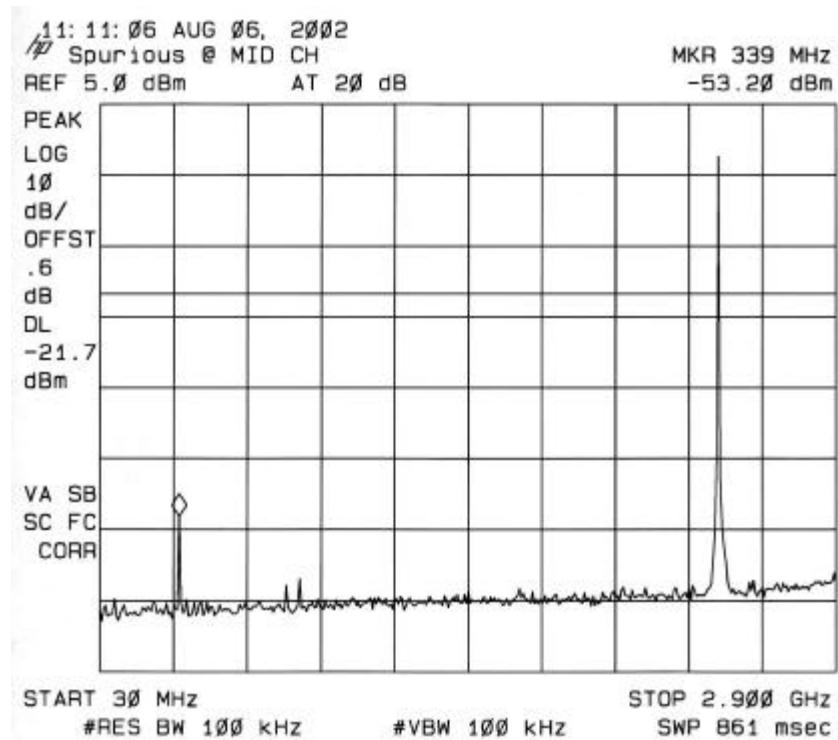
No non-compliance noted. See plots below.

SPURIOUS EMISSIONS @ LOW CHANNEL

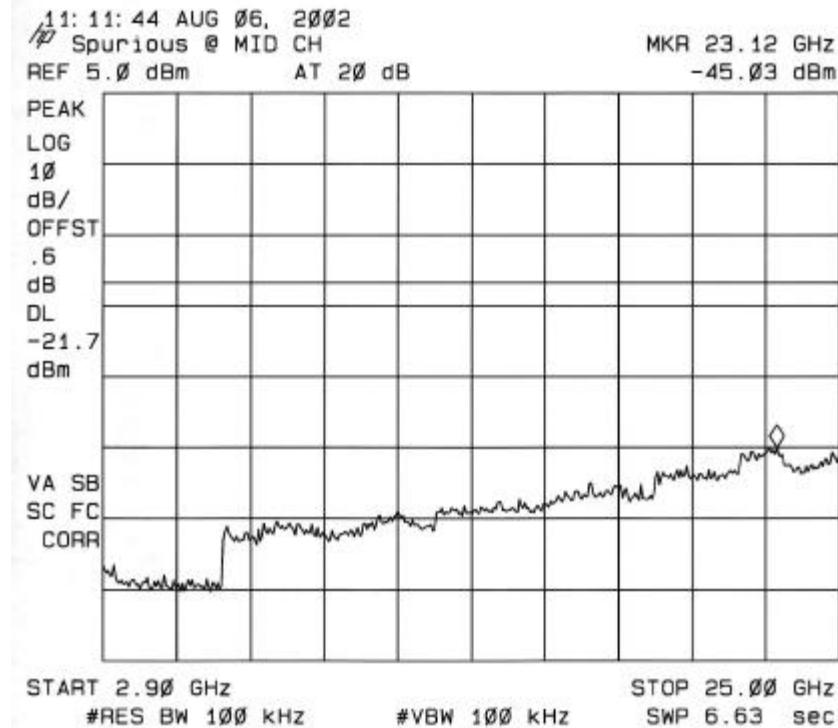
30 – 2900 MHz



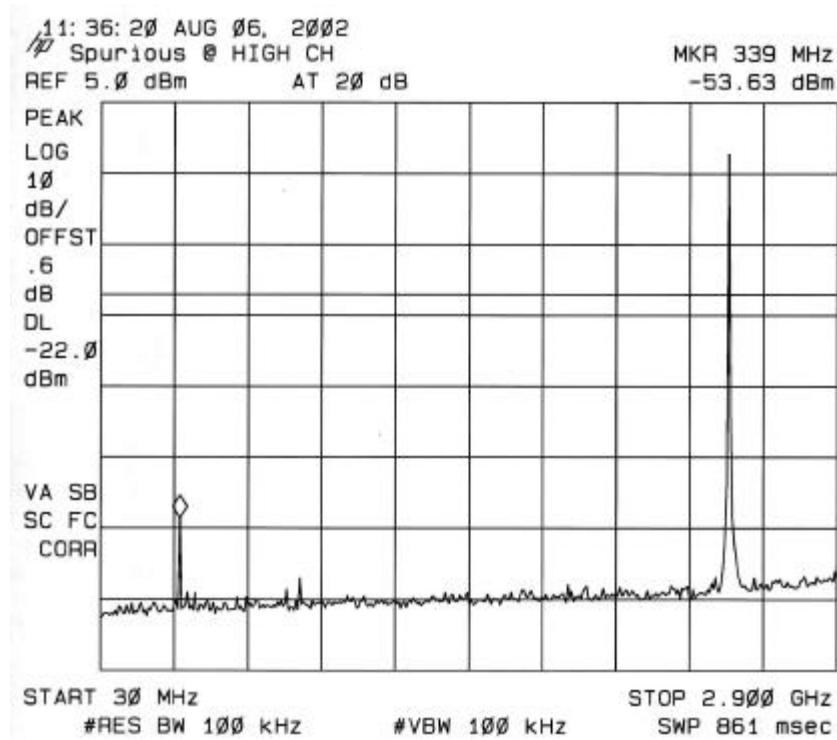
2.9 – 25 GHz

SPURIOUS EMISSIONS @ MID CHANNEL

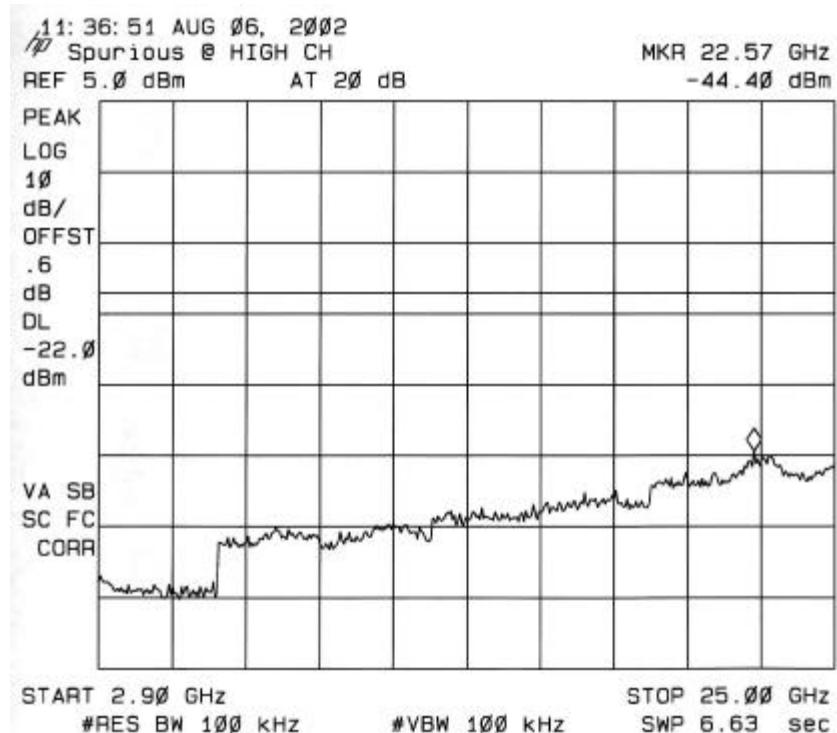
30 – 2900 MHz



2.9 – 25 GHz

SPURIOUS EMISSIONS @ HIGH CHANNEL

30 - 2900 MHz




2.9 - 25 GHz

9.7. PEAK POWER SPECTRAL DENSITY

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 3 kHz	<input checked="" type="checkbox"/> 3 kHz

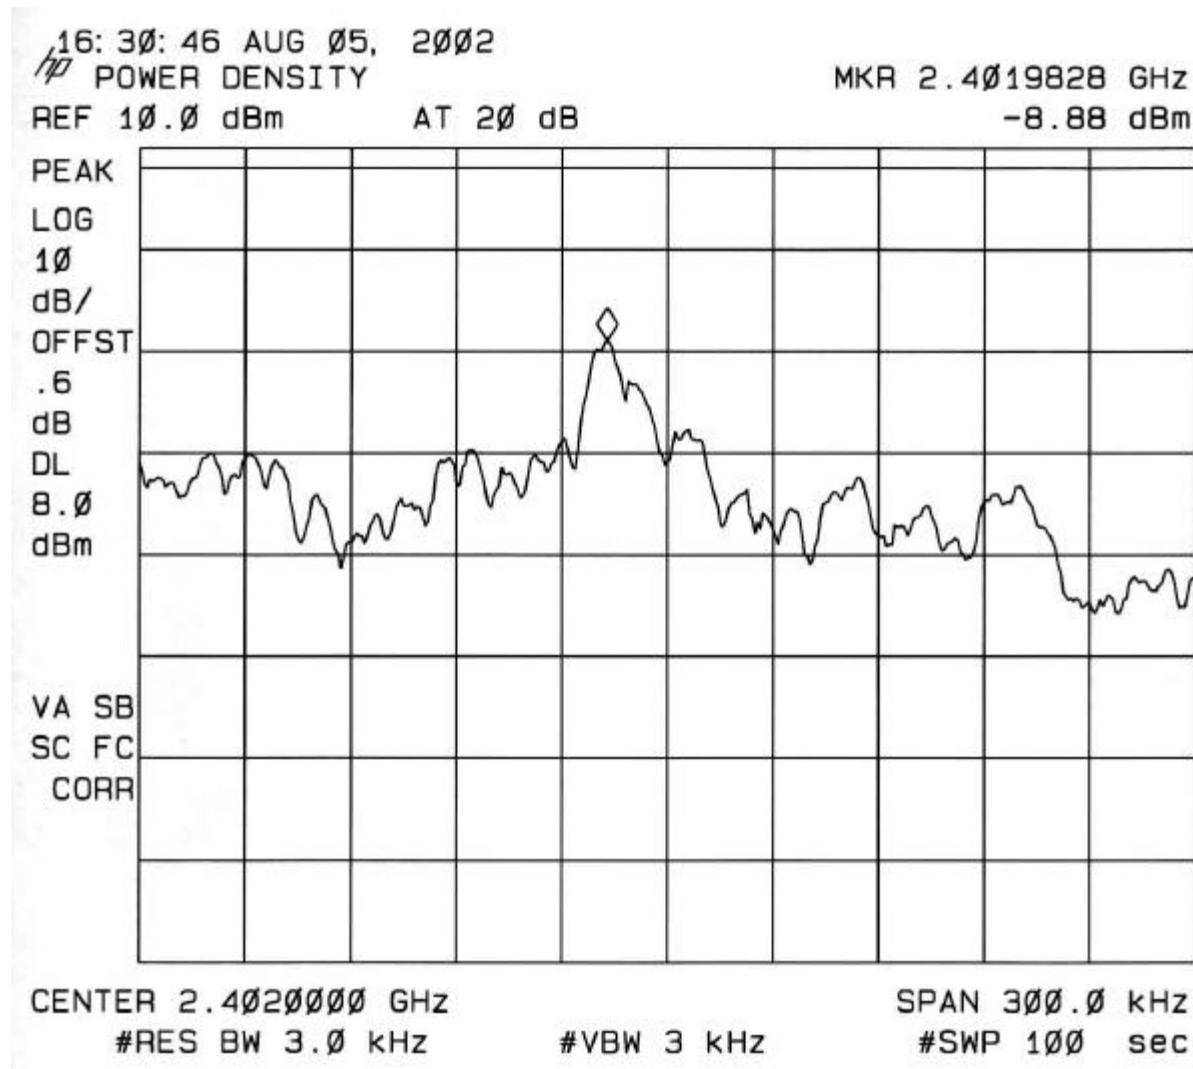


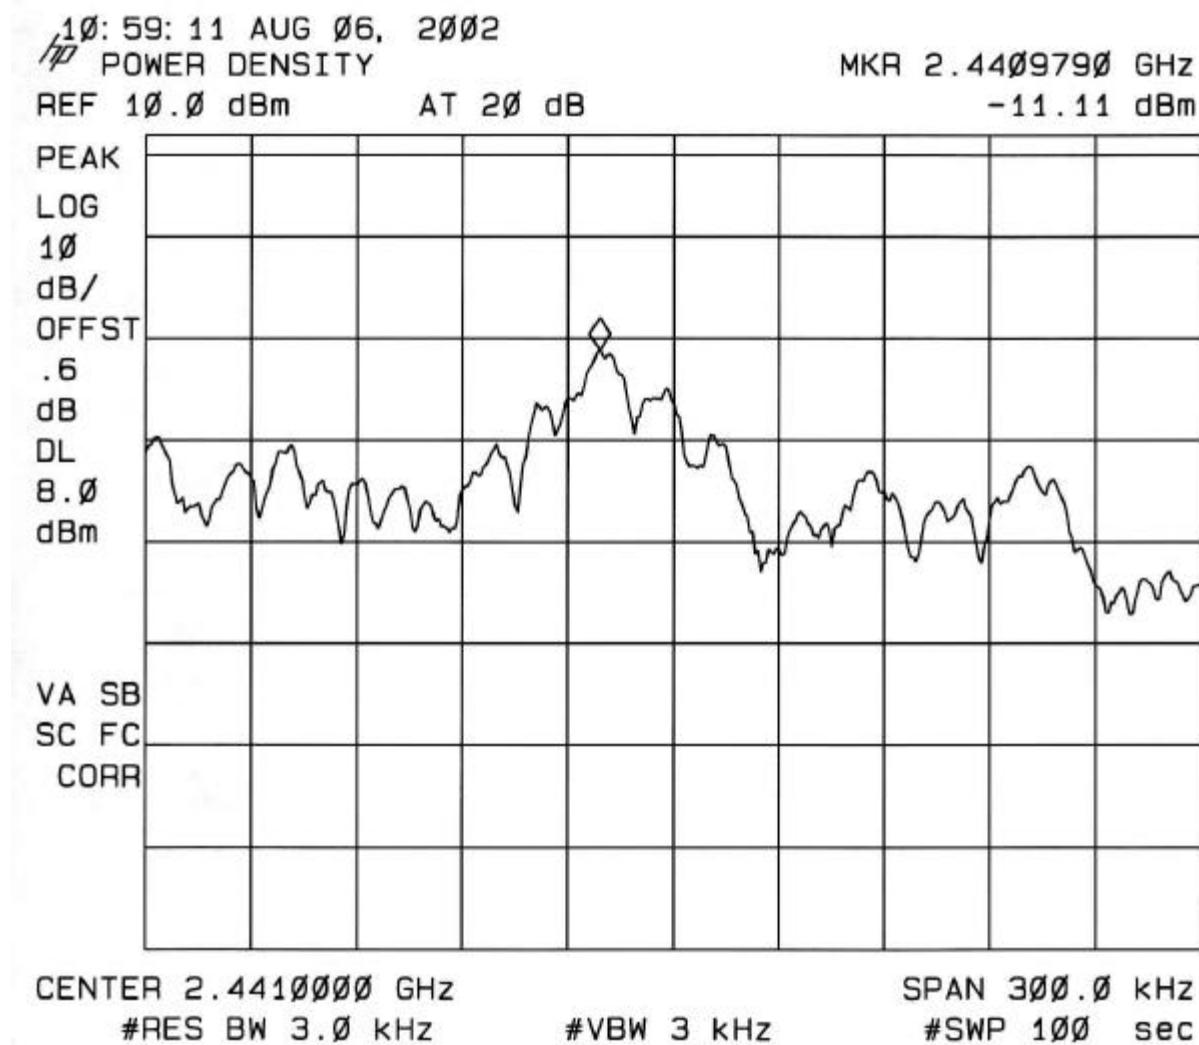
TEST PROCEDURE

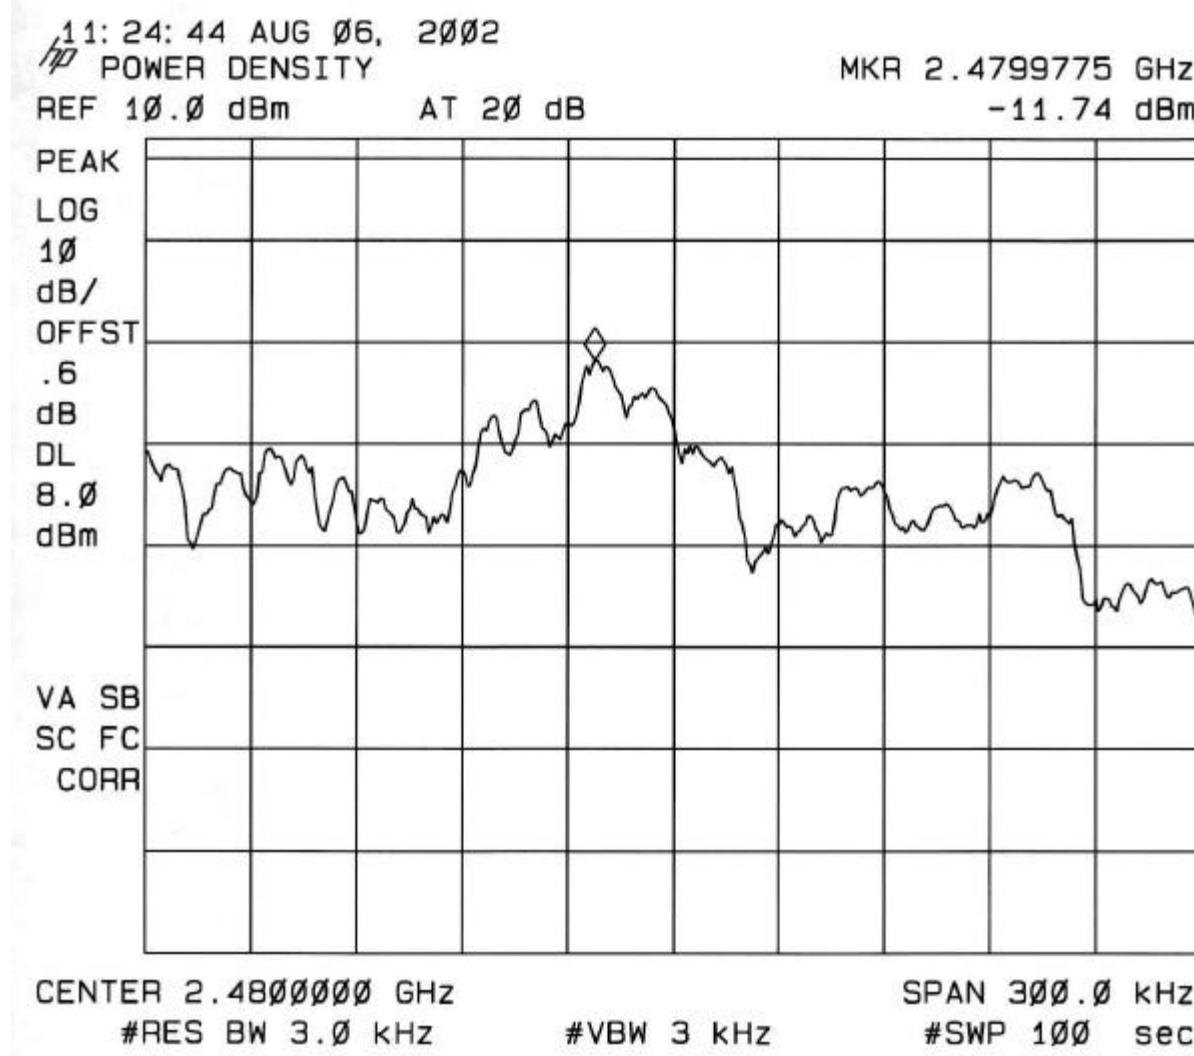
The transmitter output port was connected to the spectrum analyzer input port. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 3 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

RESULT:

No non-compliance noted. See plot below.

PEAK POWER SPECTRAL DENSITY @ LOW CHANNEL

PEAK POWER SPECTRAL DENSITY @ MID CHANNEL

PEAK POWER SPECTRAL DENSITY @ HIGH CHANNEL

9.8. RADIATED EMISSION

9.8.1. RADIATED EMISSION AND RESTRICTED BAND EDGE

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	<input type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 100 KHz <input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 100 KHz <input checked="" type="checkbox"/> 1 MHz
Above 1000	<input checked="" type="checkbox"/> Peak <input checked="" type="checkbox"/> Average	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz <input checked="" type="checkbox"/> 10 Hz

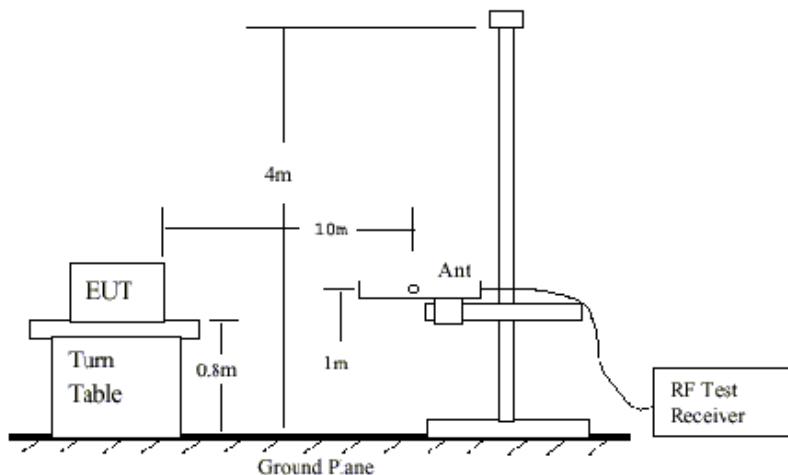


Fig 1: Radiated Emission Measurement 30 to 1000 MHz

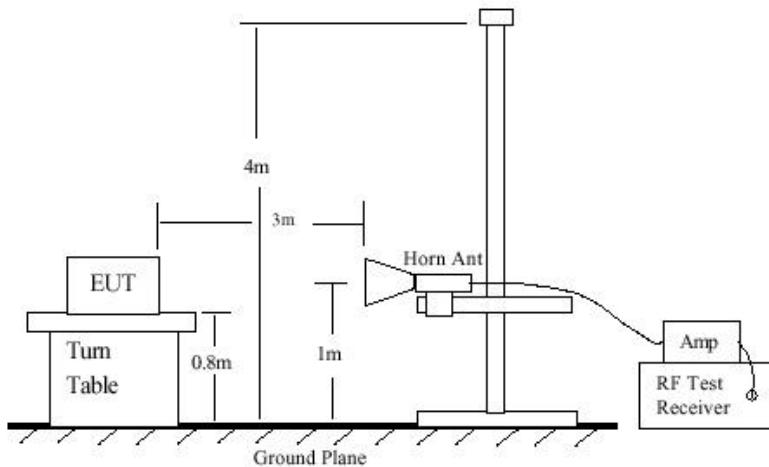


Fig 2: Radiated Emission Above 1000 MHz

TEST PROCEDURE

1. The EUT was placed on the turntable 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 100KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turntable and stop at the angle where the measurement device has maximum reading.
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak.
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak

function, set the resolution bandwidth to 100kHz and repeat the procedures (3)~(6). If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.

8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures (3)~(6) for frequency band from 1 GHz to 10 times carrier frequency.

9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 10Hz. Repeat procedures (3)~(6). If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

RESULT

No non-compliance noted. See data below.



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001
PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 02U1444-1
Report #: 020730B1
Date & Time: 07/30/02 2:45 PM
Test Engr: KERWIN CORPUZ

Company: CATC
EUT Description: Bluetooth Protocol Analyzer & Test Generator(BTTracer/Trainer)
Test Configuration : EUT/PC/Monitor/KB/2-Mouse/Printer/Modem
Type of Test: EN55022 CLASS B
Mode of Operation: Inquiry

[<< Main Sheet](#)

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit EN_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
910.00	37.00	20.35	7.46	28.87	35.94	37.00	-1.06	10mH	135.00	2.50	QP
962.00	35.80	20.67	7.69	28.66	35.50	37.00	-1.50	10mH	180.00	2.50	P
806.00	37.50	19.76	7.01	29.27	35.00	37.00	-2.00	10mV	180.00	1.00	P
600.00	40.10	18.71	5.89	29.73	34.97	37.00	-2.03	10mH	135.00	2.50	QP
390.00	44.00	15.56	4.55	29.29	34.82	37.00	-2.18	10mH	135.00	2.50	QP
857.99	36.40	20.05	7.23	29.07	34.61	37.00	-2.39	10mH	180.00	2.50	QP
6 Worst Data											

COMPLIANCE CERTIFICATION SERVICES, INC.Radiated Emissions
FCC 15.20508/07/02
Kerwin Corpuz
C-site (1.0 Meter)Computer Access Technology Corporation
2.4 GHz Bluetooth Protocol Analyzer and Test Generator (M/N: BTTracer/Trainer)***fo = 2402 MHz (low channel)******Inquiry Mode***

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	RESULT (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4804*	42.3	31	33.8	4	36.1	9.54	1	35.46	24.16	74	54	-38.5	-29.8
7206*	46.1	33.2	37.1	5	36.3	9.54	1	43.36	30.46	74	54	-30.6	-23.5
9608*	44.3	33.5	38.5	5.9	35.6	9.54	1	44.56	33.76	74	54	-29.4	-20.2
12010*	46.1	34.8	39.3	6.5	36.3	9.54	1	47.06	35.76	74	54	-26.9	-18.2
14412*	49.6	37.8	41.5	7.5	38.3	9.54	1	51.76	39.96	74	54	-22.2	-14
16814*	49.1	38.8	41.9	8.5	38.7	9.54	1	52.26	41.96	74	54	-21.7	-12
19216*	52.3	40.5	32.1	9.4	39.5	9.54	1	45.76	33.96	74	54	-28.2	-20
21618*	53.2	42.3	32.5	10.2	38.2	9.54	1	49.16	38.26	74	54	-24.8	-15.7
24020*	55.1	43	32.5	11.1	39.3	9.54	1	50.86	38.76	74	54	-23.1	-15.2

fo = 2441 MHz (mid channel)***Inquiry Mode***

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	RESULT (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4882*	42.3	31	33.8	4	36.1	9.54	1	35.46	24.16	74	54	-38.5	-29.8
7323*	46.1	33.2	37.1	5	36.3	9.54	1	43.36	30.46	74	54	-30.6	-23.5
9764*	44.3	33.5	38.5	5.9	35.6	9.54	1	44.56	33.76	74	54	-29.4	-20.2
12205*	46.1	34.8	39.3	6.5	36.3	9.54	1	47.06	35.76	74	54	-26.9	-18.2
14646*	49.6	37.8	41.5	7.5	38.3	9.54	1	51.76	39.96	74	54	-22.2	-14
17087*	49.1	38.8	41.9	8.5	38.7	9.54	1	52.26	41.96	74	54	-21.7	-12
19528*	52.3	40.5	32.1	9.4	39.5	9.54	1	45.76	33.96	74	54	-28.2	-20
21969*	53.2	42.3	32.5	10.2	38.2	9.54	1	49.16	38.26	74	54	-24.8	-15.7
24410*	55.1	43	32.5	11.1	39.3	9.54	1	50.86	38.76	74	54	-23.1	-15.2

*fo = 2480 MHz (high channel)**Inquiry Mode*

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	RESULT (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4960*	42.3	31	33.8	4	36.1	9.54	1	35.46	24.16	74	54	-38.5	-29.8
7440*	46.1	33.2	37.1	5	36.3	9.54	1	43.36	30.46	74	54	-30.6	-23.5
9920*	44.3	33.5	38.5	5.9	35.6	9.54	1	44.56	33.76	74	54	-29.4	-20.2
12400*	46.1	34.8	39.3	6.5	36.3	9.54	1	47.06	35.76	74	54	-26.9	-18.2
14880*	49.6	37.8	41.5	7.5	38.3	9.54	1	51.76	39.96	74	54	-22.2	-14
17360*	49.1	38.8	41.9	8.5	38.7	9.54	1	52.26	41.96	74	54	-21.7	-12
19840*	52.3	40.5	32.1	9.4	39.5	9.54	1	45.76	33.96	74	54	-28.2	-20
22320*	53.2	42.3	32.5	10.2	38.2	9.54	1	49.16	38.26	74	54	-24.8	-15.7
24800*	55.1	43	32.5	11.1	39.3	9.54	1	50.86	38.76	74	54	-23.1	-15.2

Spot checked Data Mode and Hopping Channels, emissions are no different from above result.

NOTE: * Measured noise floor (worse case vertical), horizontal (H) and vertical (V)

DIST: extrapolate reading from 3m specification distance to 1m measurement distance = **-9.54dB**

AF: Antenna Factor

AMP: Pre-amp gain

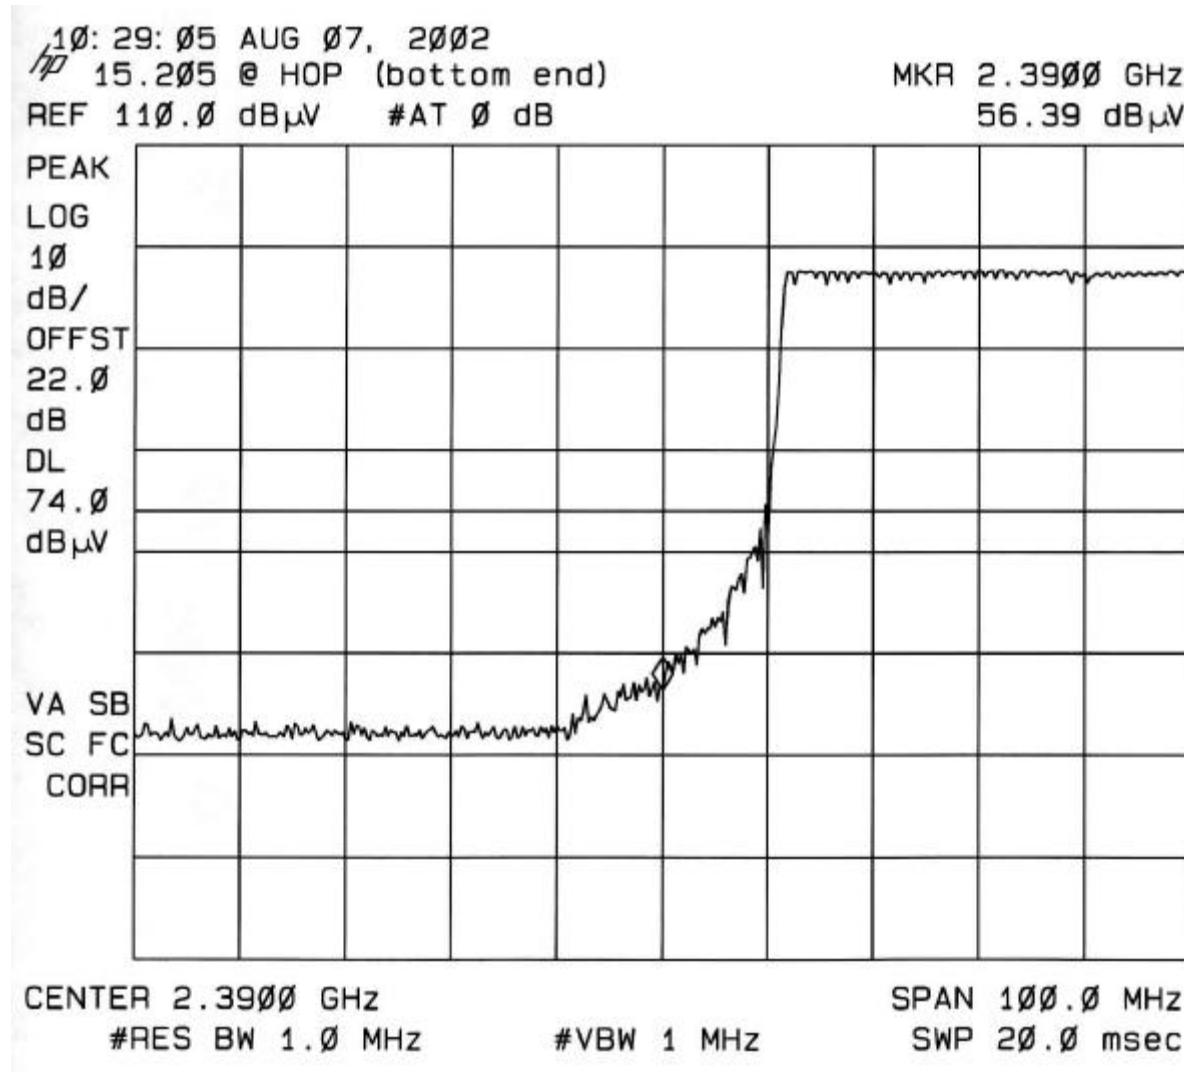
CL: SMA cable loss (12ft)

HPF: FSY High pass filter insertion loss (4.57GHz; S/N:003)

ANALYZER SETTINGS**RES BW AVG BW**

Peak(Pk): 1MHz 1MHz

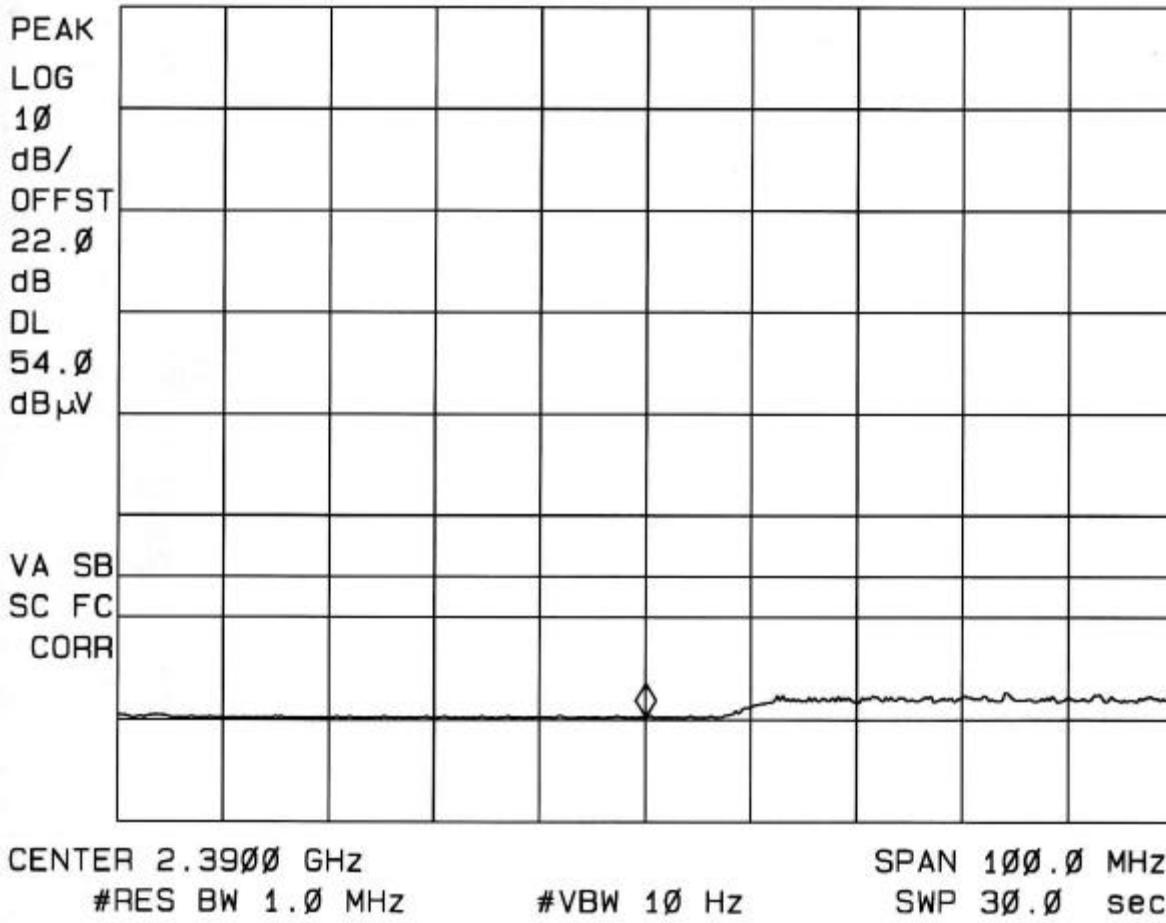
Average(Avg): 1MHz 10Hz

RESTRICTED BANDEDGE: 2310 – 2390 MHz and 2483.5 – 2500 MHzBOTTOM BANDEDGE @ HOPPING CHANNEL

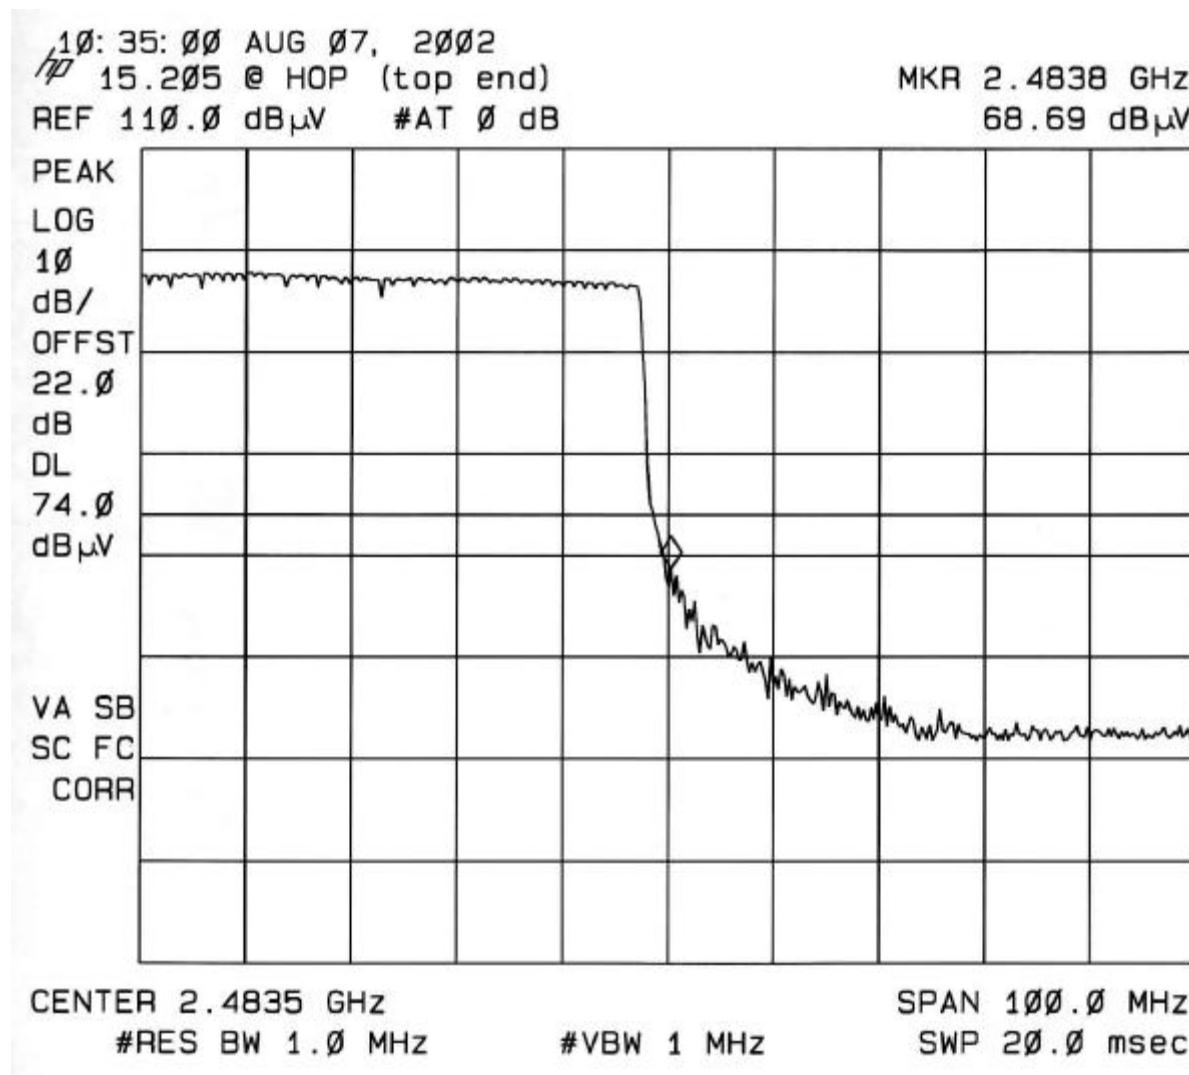
PEAK DETECTOR

10: 23: 28 AUG 07, 2002
 15.205 @ HOP (bottom end)
 REF 110.0 dB μ V #AT 0 dB

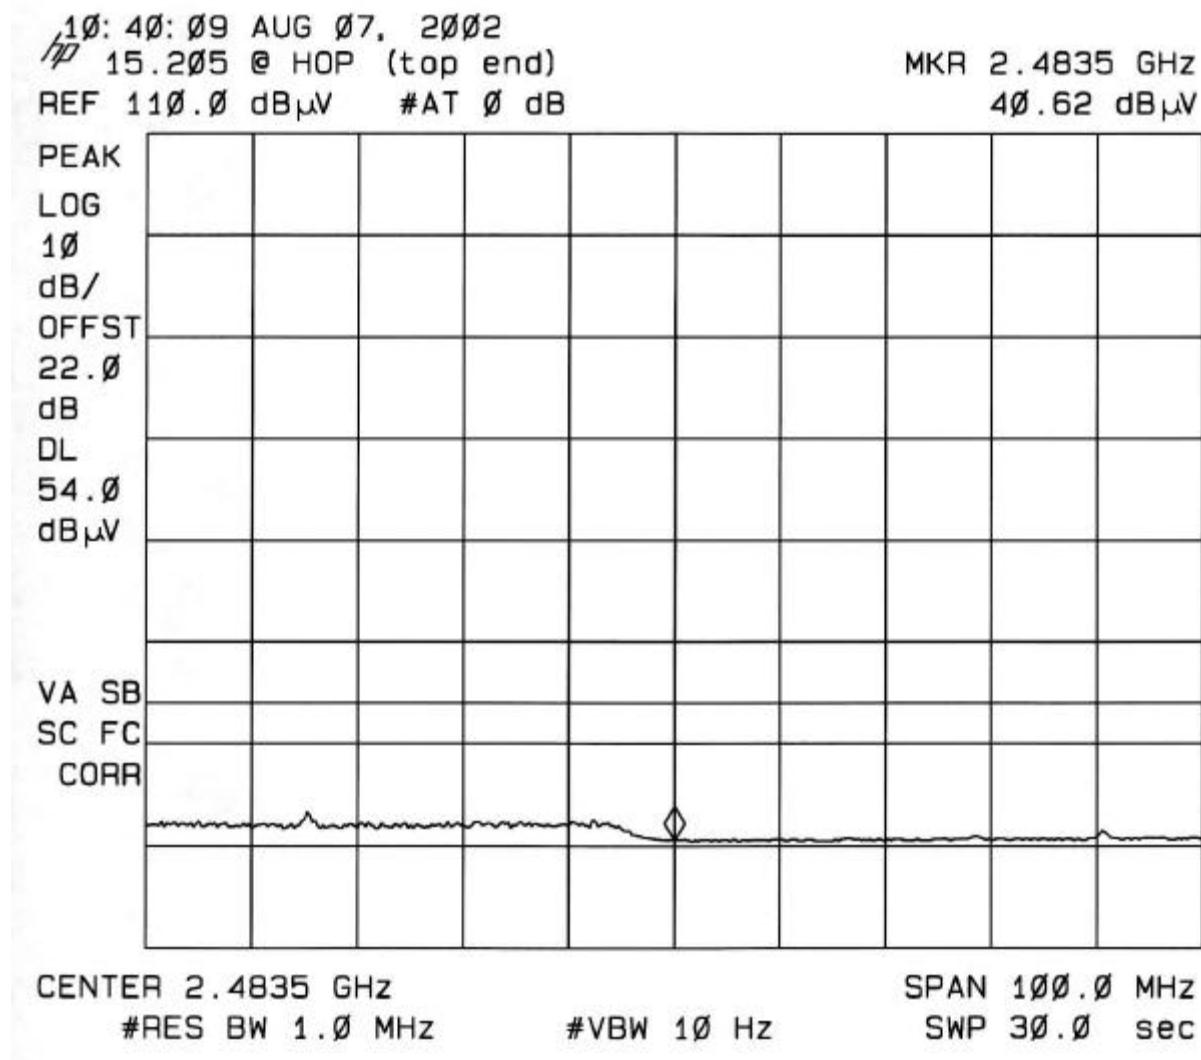
MKR 2.3900 GHz
 40.29 dB μ V



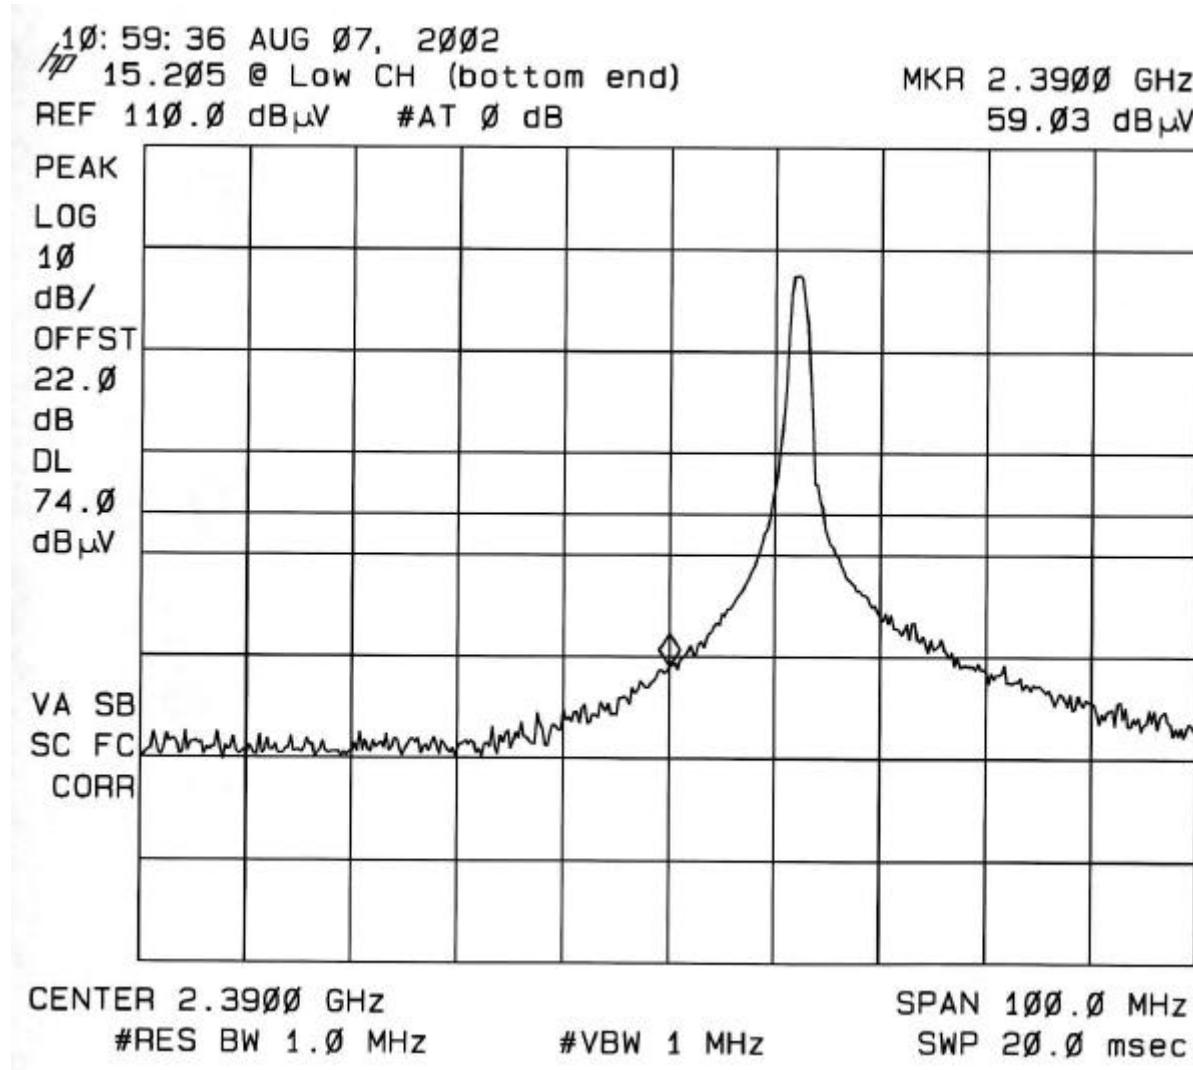
AVERAGE DETECTOR

TOP BANDEDGE @ HOPPING CHANNEL

PEAK DETECTOR



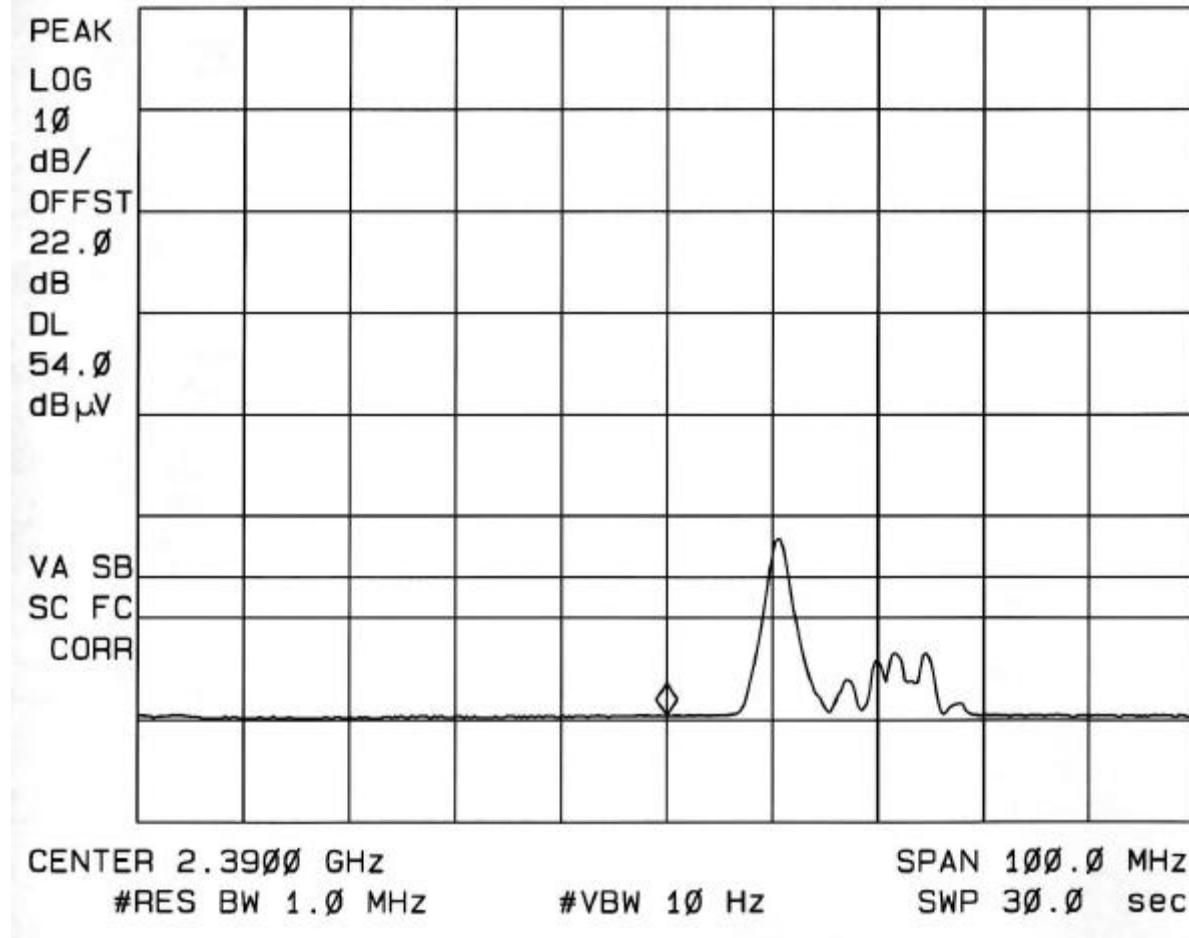
AVERAGE DETECTOR

BOTTOM BANDEDGE @ LOW CHANNEL

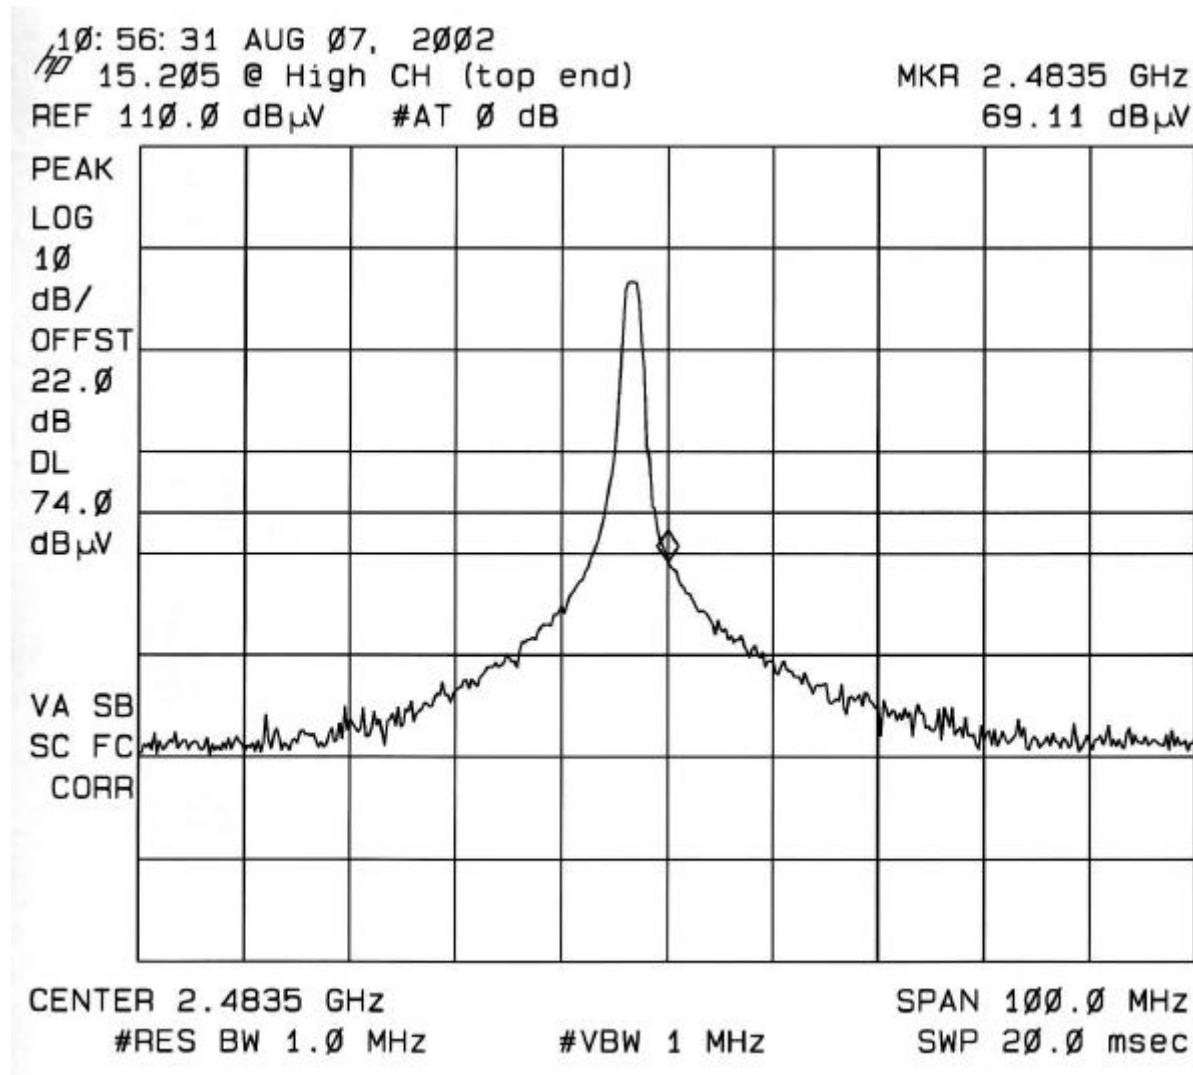
PEAK DETECTOR

11:02:25 AUG 07, 2002
 15.205 @ Low CH (bottom end)
 REF 110.0 dB μ V #AT 0 dB

MKR 2.3900 GHz
 40.44 dB μ V



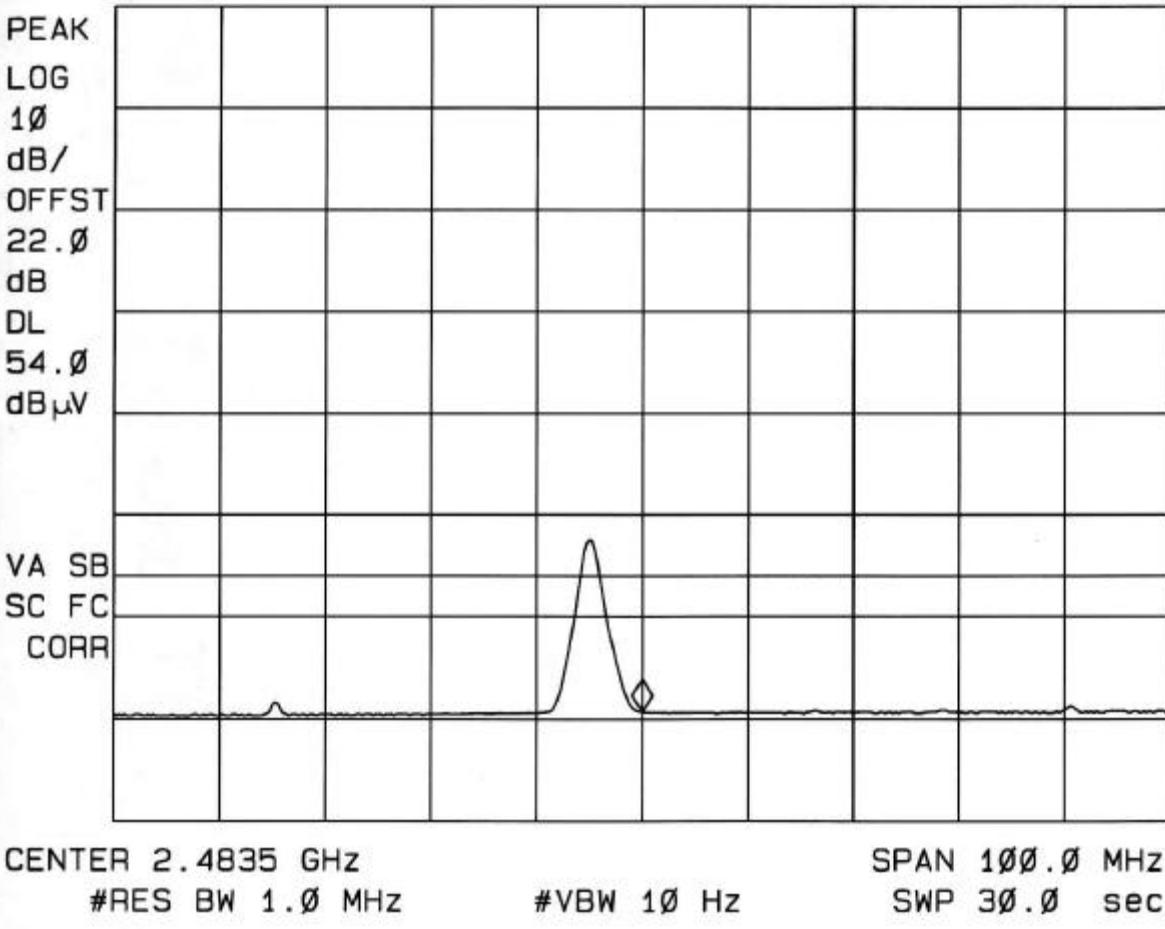
AVERAGE DETECTOR

TOP BANDEDGE @ HIGH CHANNEL

PEAK DETECTOR

10: 55: 39 AUG 07, 2002
 15.205 @ High CH (top end)
 REF 110.0 dB μ V #AT 0 dB

MKR 2.4835 GHz
 40.72 dB μ V



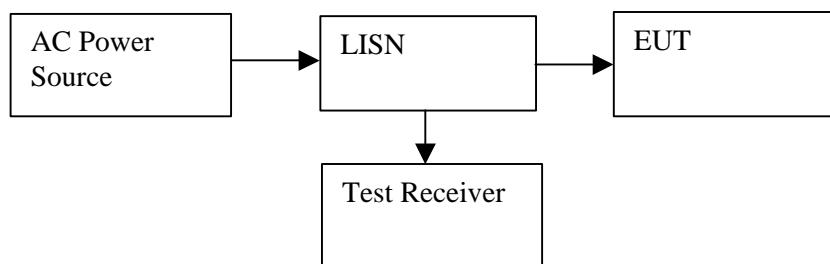
AVERAGE DETECTOR

9.9. POWER LINE CONDUCTED EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
450 KHz to 30 MHz	<input type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 10 KHz	<input checked="" type="checkbox"/> 10 KHz



TEST PROCEDURE

1. The EUT was placed on a wooden table 80 cm above the horizontal ground plane and 40 cm away from the vertical ground plane. The EUT was set to transmit / receive in a continuous mode.
2. Conducted disturbance was measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.150 - 30 MHz was investigated.

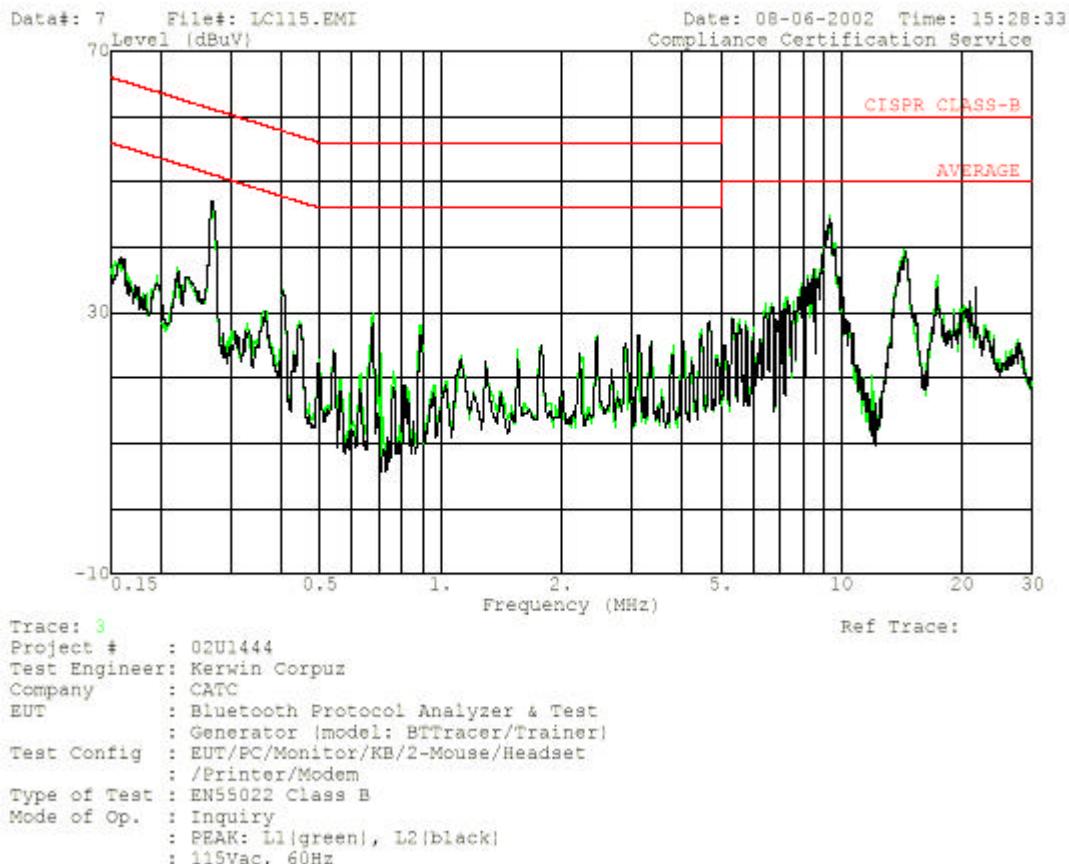
RESULT

No non-compliance noted. See Line Conduction plot

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN_B AV	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.27	46.32	--	--	0.00	62.60	52.60	-16.28	-6.28	L1
9.35	44.94	--	--	0.00	60.00	50.00	-15.06	-5.06	L1
14.29	39.74	--	--	0.00	60.00	50.00	-20.26	-10.26	L1
0.27	47.14	--	--	0.00	62.60	52.60	-15.46	-5.46	L2
9.35	44.22	--	--	0.00	60.00	50.00	-15.78	-5.78	L2
14.52	39.26	--	--	0.00	60.00	50.00	-20.74	-10.74	L2
6 Worst Data									

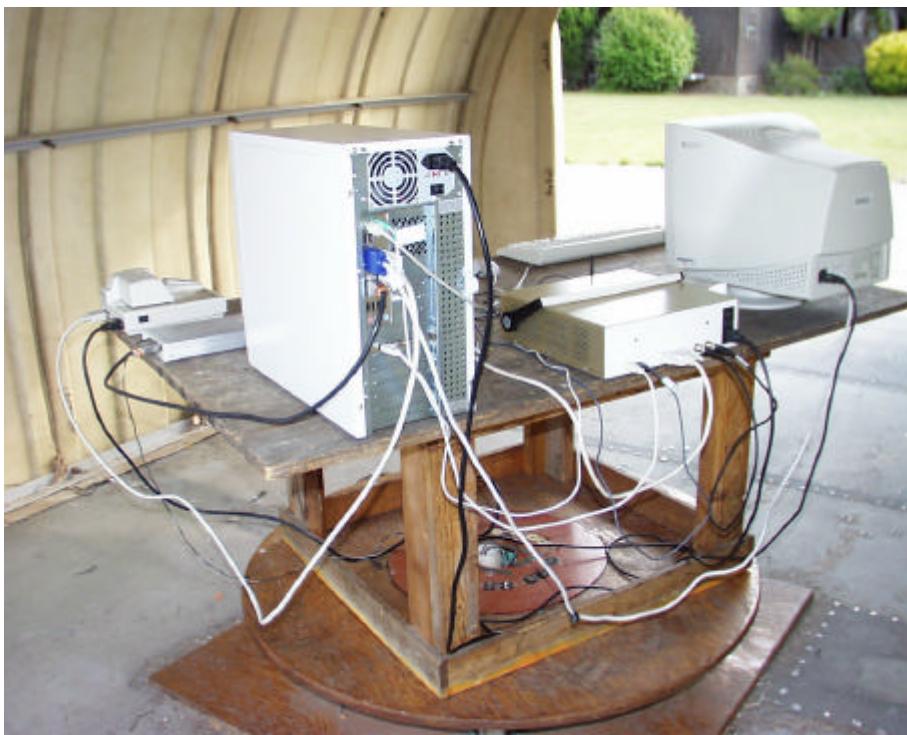


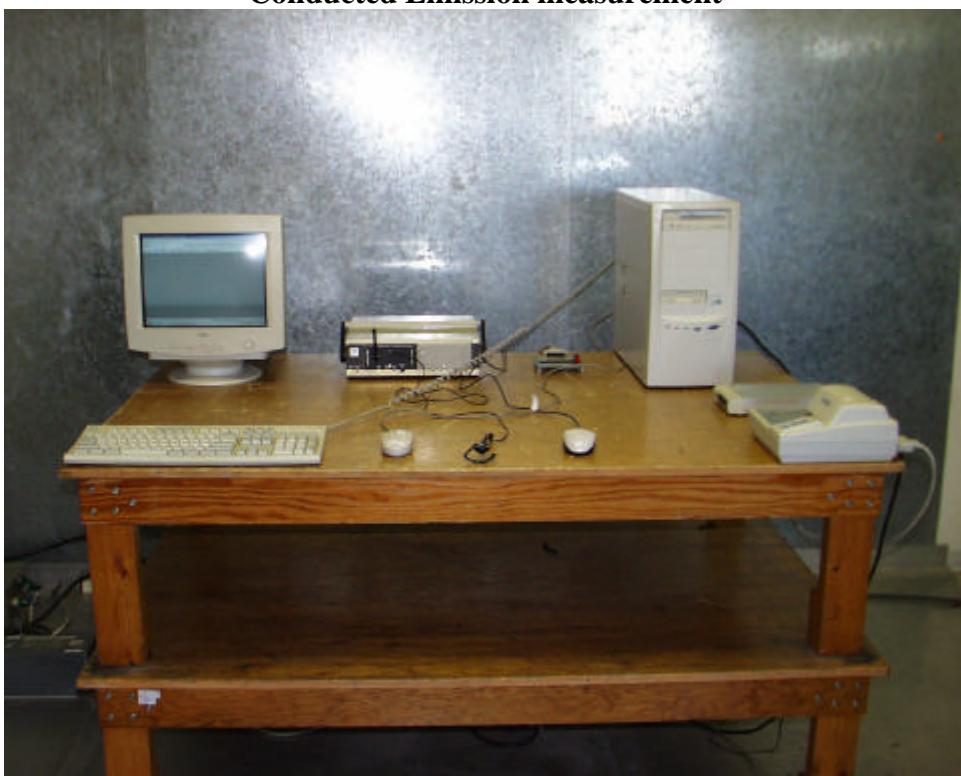
561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888



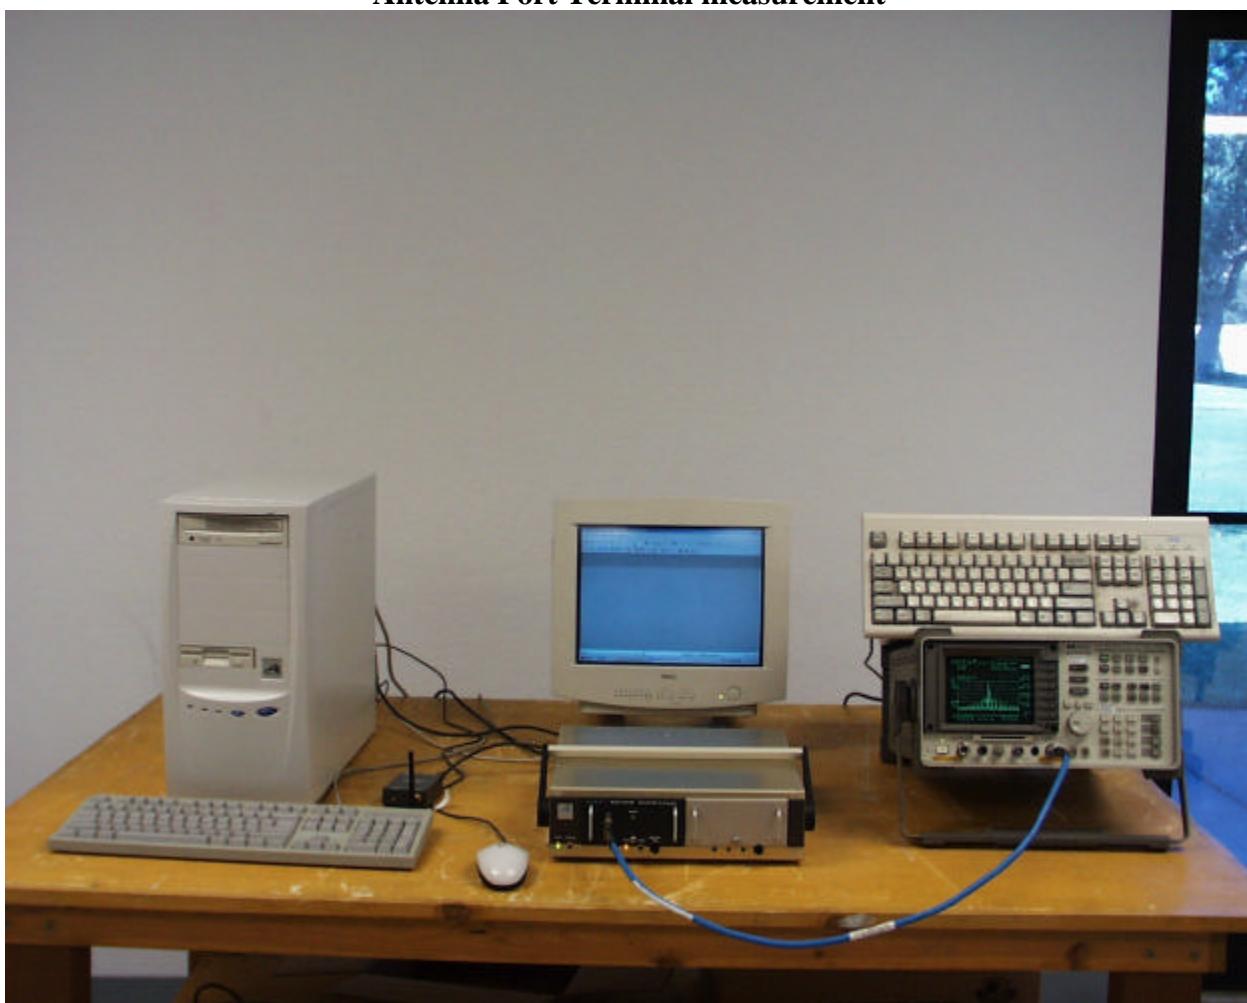
9.10. SETUP PHOTOS

Radiated Emission below 1 GHz measurement



Conducted Emission measurement

Radiated Emission above 1 GHz measurement**Radiated Emission above 18 GHz measurement**

Antenna Port Terminal measurement**END OF REPORT**