

*EMC Test Report**Application for Grant of Equipment Authorization**Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C**Model: SLZW0002*

IC CERTIFICATION #: 3288A-SLZW0002
FCC ID: KJM-SLZW0002

APPLICANT: Systech Corporation
10908 Technology Place
San Diego, CA 92127

TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-7

REPORT DATE: June 3, 2014

FINAL TEST DATES: April 14 and 15, 2014

TOTAL NUMBER OF PAGES: 36

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer



Testing Cert #0214.26

National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	June 3, 2014	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE.....	4
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DEVICES OPERATING IN THE 902 – 928 / 2400 – 2483.5 / 5725 – 5850 MHZ BANDS	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
ANTENNA SYSTEM	8
OTHER EUT INFORMATION	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT	8
EUT INTERFACE PORTS	9
EUT OPERATION	9
TEST SITE.....	10
GENERAL INFORMATION	10
CONDUCTED EMISSIONS CONSIDERATIONS	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
FILTERS/ATTENUATORS	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS	14
BANDWIDTH MEASUREMENTS	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	18
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	18
RADIATED FUNDAMENTAL & SPURIOUS EMISSIONS SPECIFICATION LIMITS – 15.249 AND RSS 210 A2.9	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	22
APPENDIX B TEST DATA	23
END OF REPORT	36

SCOPE

An electromagnetic emissions test has been performed on the Systech Corporation model SLZW0002, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2009

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Systech Corporation model SLZW0002 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Systech Corporation model SLZW0002 and therefore apply only to the tested sample. The sample was selected and prepared by Rachel Hetzel of Systech Corporation.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DEVICES OPERATING IN THE 902 – 928 / 2400 – 2483.5 / 5725 – 5850 MHz BANDS**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.249 (a)	RSS 210 A2.9 (1)	Fundamental Signal Strength	40 kbps: 88.1 dB _u V/m @ 3m (25.4mV/m)	50mV/m @ 3m	Complies
15.249 (a) / 15.209	RSS 210 A2.9 (1) & Table 2	Radiated Spurious Emissions, 30 - 9200 MHz	43.7 dB _u V/m @ 8175.6 MHz (-10.3 dB)	Harmonics 500uV/m @ 3m or general limits (see page 18)	Complies

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Integral antenna	Unique or integral antenna required	Complies
15.207	RSS GEN Table 4	AC Conducted Emissions	24.5 dB _u V @ 0.505 MHz	Refer to page 17	Complies (- 21.5 dB)
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	27.2 dB _u V/m @ 30.37 MHz	Refer to page 18	Complies (- 12.8 dB)
-	RSP 100 RSS GEN 7.1.3	User Manual		Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.2	User Manual		Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.6.1	99% Bandwidth	9.6kbps: 60kHz 40kbps: 55kHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Systech Corporation model SLZW0002 is a radio module that is designed to be installed in other equipment to provide a radio communication link. Since the EUT could be placed in any position in the end product, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 2.3-3.6 Volts DC.

The sample was received on April 1, 2014 and tested on April 14 and 15, 2014. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Systech Corporation	SLZW0002	Wireless Module	-	KJM-SLZW0002

ANTENNA SYSTEM

The antenna is integral to the device.

OTHER EUT INFORMATION

The EUT supports two different data rates, which operate at offset frequencies. Tx at 908.42MHz @ 9.6kbps, and 908.4MHz @ 40kbps.

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Phihong AC Power Supply	PSAA20R-033	AC Adapter	P10300259A1	-

No remote support equipment was used during testing.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s) Shielded or Unshielded	Length(m)
DC power	DC power supply	2 wire	Unshielded	1
AC power(DC supply)	AC mains	2 wire	Unshielded	1

EUT OPERATION

During emissions testing the EUT was transmitting continuously at maximum power, modulated.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers FCC	Designation / Registration Numbers Canada	Location
Chamber 7	US0027	2845B-7	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

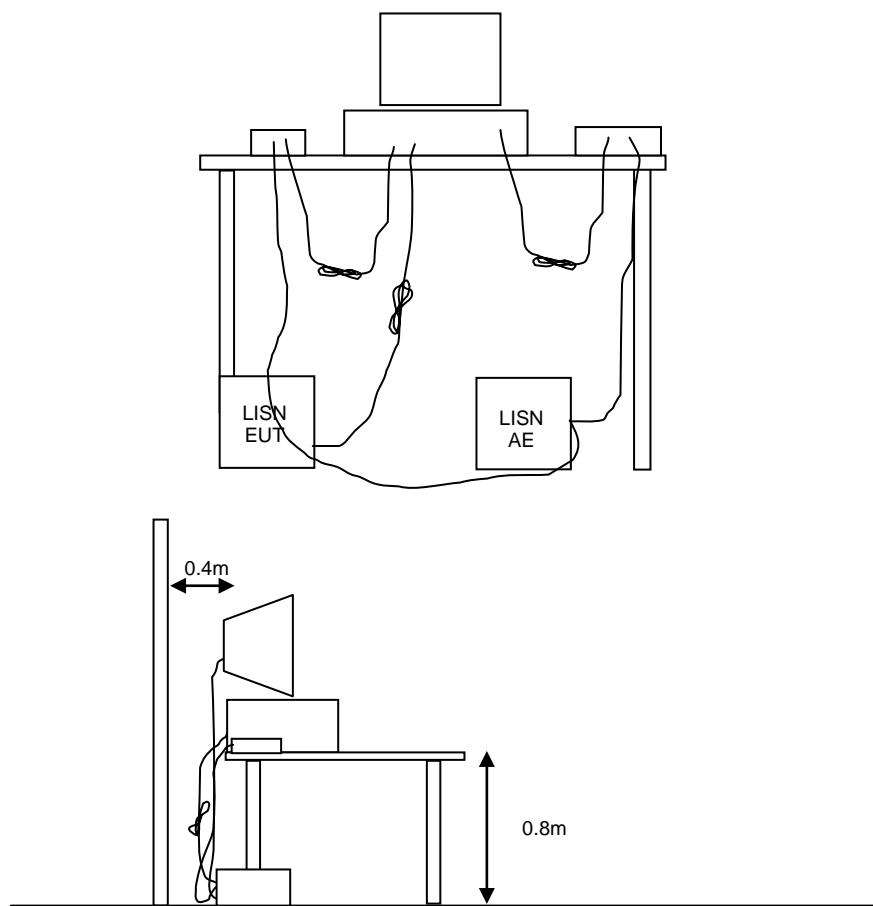


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.


When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

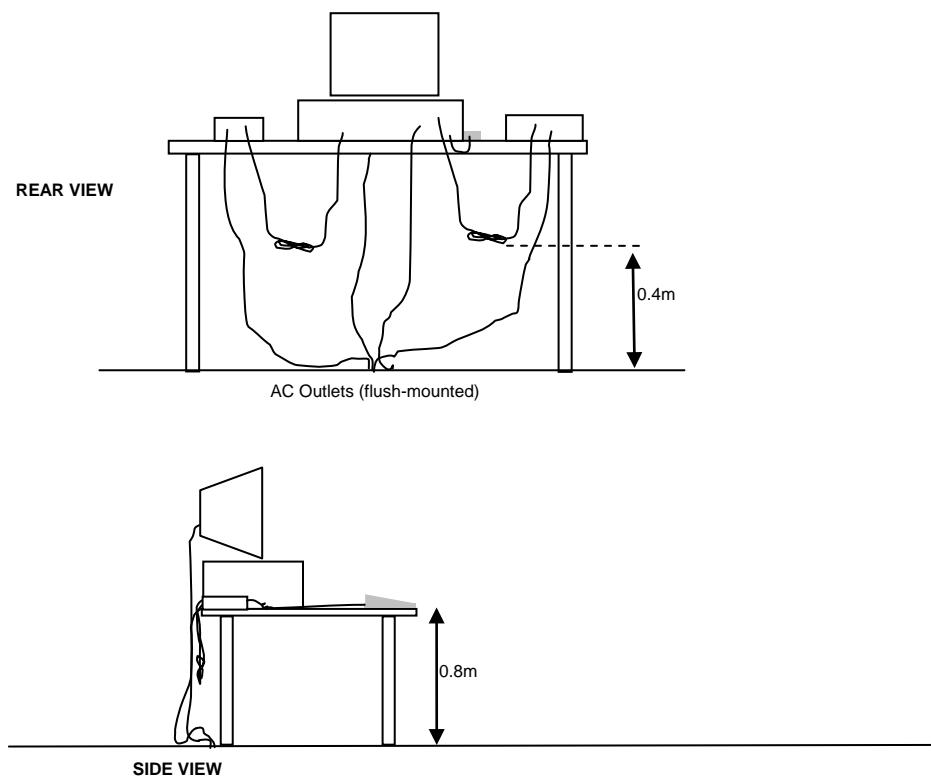


Typical Test Configuration for Radiated Field Strength Measurements

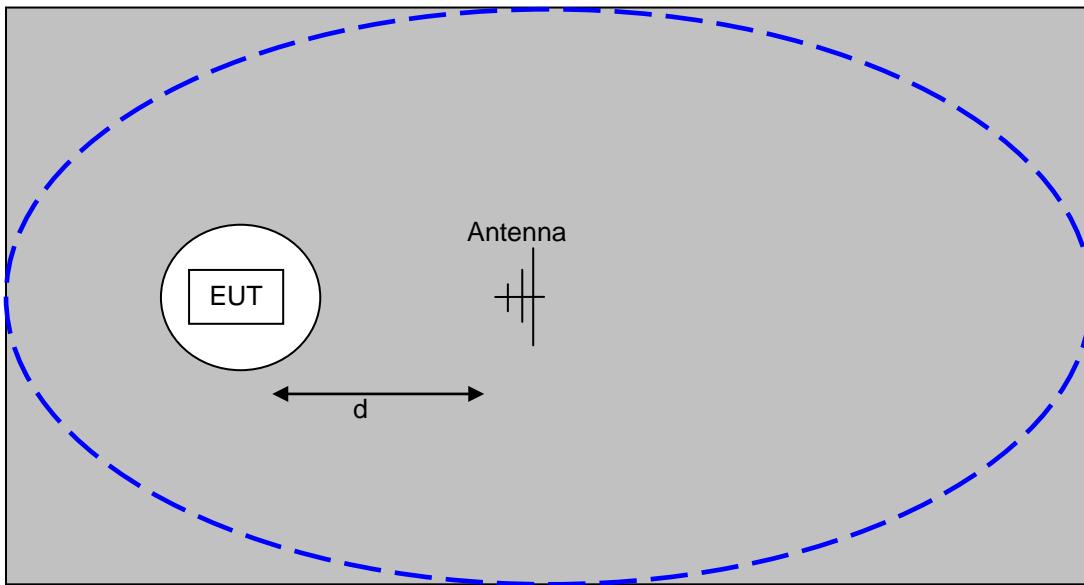

The ground plane extends beyond the ellipse defined in CISPR 16 / CISPR 22 / ANSI C63.4 and is large enough to accommodate test distances (d) of 3m and 10m. Refer to the test data tables for the actual measurement distance.

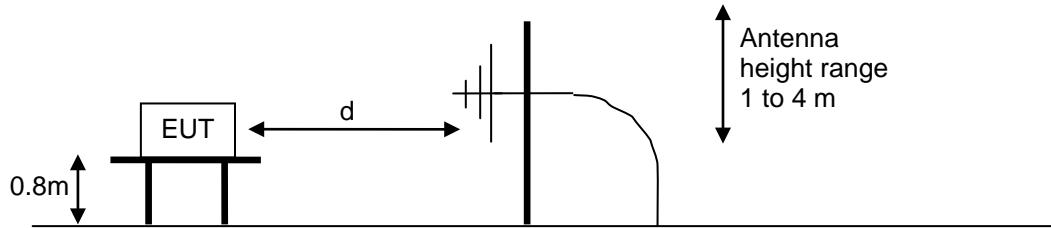


Test Configuration for Radiated Field Strength Measurements
OATS- Plan and Side Views

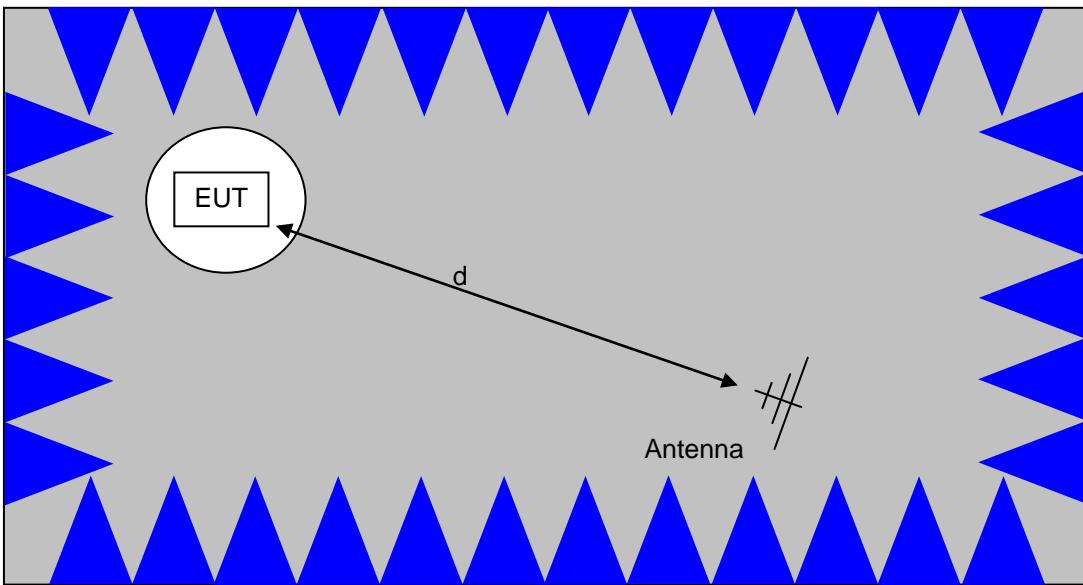

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.

Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

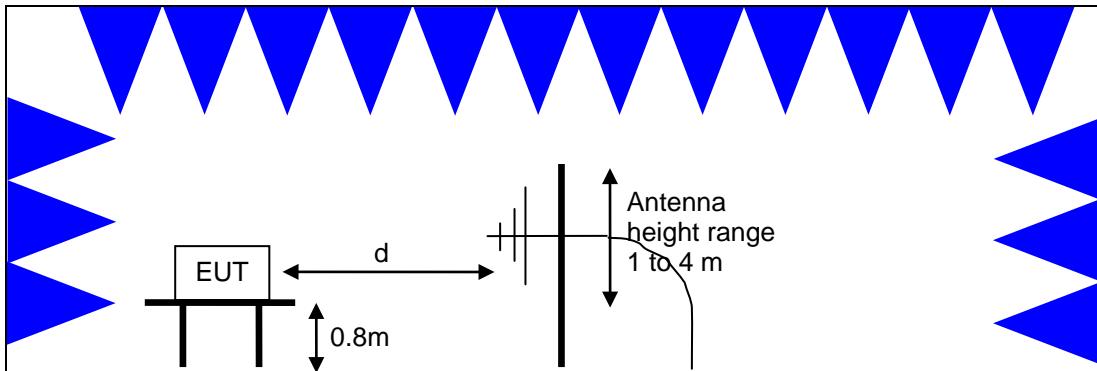

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

RADIATED FUNDAMENTAL & SPURIOUS EMISSIONS SPECIFICATION LIMITS – 15.249 and RSS 210 A2.9

The table below shows the limits for the fundamental emission and for its harmonics. Harmonics that fall in restricted bands² and all other spurious emissions are subject to the general limits of RSS 210 and FCC Part 15 Subpart C.

Frequency Range (MHz)	Limit for Fundamental @ 3m	Limit for Harmonics @ 3m
902 – 928	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m
2400 – 2483.5	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m
5725 - 5850	50,000 uV/m 94dBuV/m	500 uV/m 54dBuV/m

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

R_f = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

² The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{d} \text{ microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Radiated Emissions, 30 - 1,000 MHz Fundamental, 14-Apr-14				
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/14/2014
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	6/4/2014
Radiated Spurious Emissions, 30 - 9,500 MHz, 14-Apr-14				
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/19/2014
Filtek	Filter, 1 GHz High Pass	HP12/1000-5BA	955	5/13/2014
Filtek	Filter, 1 GHz High Pass	HP12/1000-5BA	957	5/14/2014
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	6/4/2014
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/20/2015
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	2/27/2015
Conducted Emissions - AC Power Ports, 15-Apr-14				
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	2/13/2015
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/14/2014
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	5/15/2014

Appendix B Test Data

T94263 Pages 24 - 35



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Product	SLZW0002	T-Log Number:	T94263
		Project Manager:	Christine Krebill
Contact:	Rachel Hetzel	Project Coordinator:	-
Emissions Standard(s):	FCC 15.249/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

For The

Systech Corporation

Product

SLZW0002

Date of Last Test: 4/15/2014



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

FCC 15.249 / RSS-210 Annex A2.9

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT was located on the turntable for radiated emissions testing. The EUT was tested in all three orthogonal orientations.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:	Temperature: 21-22 °C
	Rel. Humidity: 30-45 %

Summary of Results

Run #	Test Performed	Limit	Result	Value / Margin
1	Transmitter Radiated Spurious Emissions, 30 - 9200 MHz	FCC 15.209 & 15.249 RSS 210/RSS GEN	Pass	43.7 dB μ V/m @ 8175.6 MHz (-10.3 dB)
2	Fundamental Signal Field Strength	FCC 15.249 RSS 210 Annex A2.9	Pass	9 kbps: 87.8 dB μ V/m @ 3m 40 kbps: 88.1 dB μ V/m @ 3m
3	99% Bandwidth (center channel)	RSS-GEN	N/A	9.6kbps: 60kHz 40kbps: 55kHz
4	Receiver Radiated Spurious Emissions, 30 - 1820 MHz	FCC 15.109	Pass	27.2 dB μ V/m @ 30.37 MHz (-12.8 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Notes

Operation limited to: 908.42 MHz @ 9.6kbps or 908.4 MHz @ 40kbps



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

Run #1: Transmitter Spurious Emissions, 30-9200 MHz


Date of Test: 04/14/14
Test Engineer: Jack Liu & John Caizzi
Test Location: FT Chamber# 7

Config. Used: 1
Config Change: None
EUT Voltage: 120 VAC



Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 9500 MHz	3	3	0.0

Highlighted cells contain calculated values

Note:	The limit in 15.249 for a fundamental signal in the 902 - 928 MHz is 50mV/m (94.0 dBuV/m), harmonics are limited to 500uV/m (54dBuV/m) and all other spurious are required to meet 15.209 limits.
Note:	The field strength of any spurious emissions may not exceed the field strength of the fundamental signal.

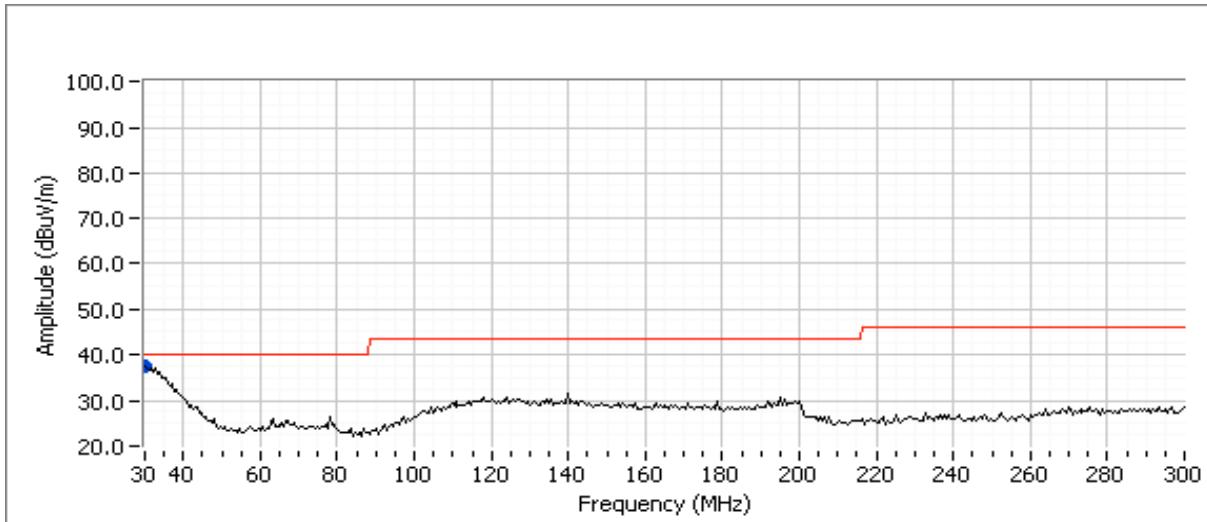

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

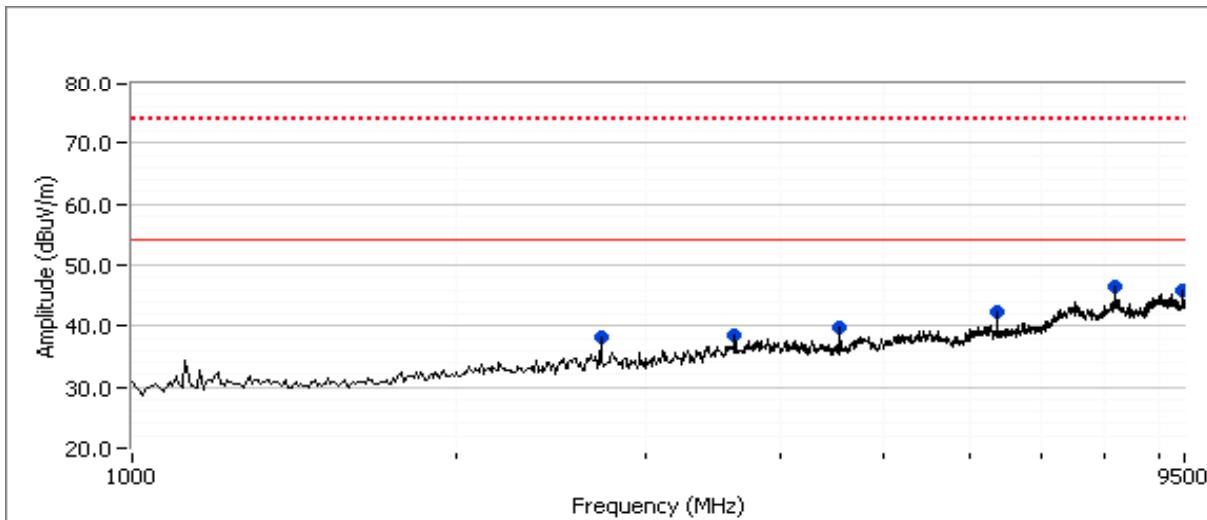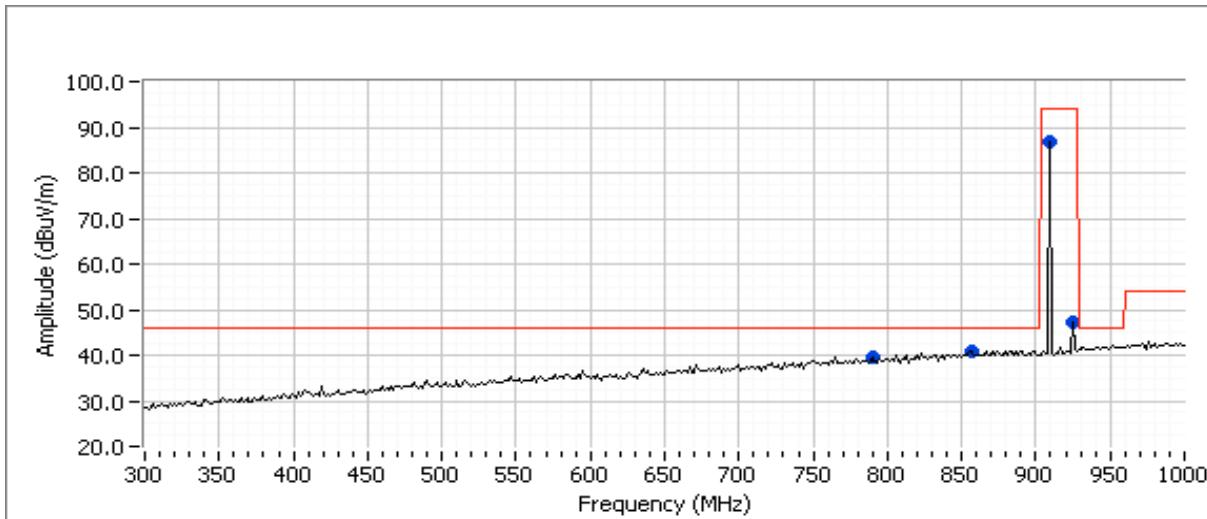



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
			Class: N/A

Tx: 908.4 MHz (40kbps) - (highest power)

Frequency	Level	Pol	RSS 210 / FCC 15.249	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
924.248	47.4	H	94.0	-46.6	Peak	66	1.5
792.011	39.4	V	46.0	-6.6	Peak	165	2.0
860.441	41.0	H	46.0	-5.0	Peak	32	1.5
908.818	87.0	V	94.0	-7.0	Peak	233	1.0
30.368	37.4	H	40.0	-2.6	Peak	335	2.0
2725.000	38.2	H	54.0	-15.8	Peak	194	1.0
3632.500	38.4	V	54.0	-15.6	Peak	164	1.0
4547.500	39.7	V	54.0	-14.3	Peak	72	1.5
6360.000	42.2	V	54.0	-11.8	Peak	308	1.0
8180.000	46.4	H	54.0	-7.6	Peak	148	1.5
9466.670	46.0	H	54.0	-8.0	Peak	20	2.5
							Above 10th harmonic.

Maximized Final Measurements

Frequency	Level	Pol	RSS 210 / FCC 15.249	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
860.441	30.5	H	46.0	-15.5	QP	32	1.50
792.011	29.2	V	46.0	-16.8	QP	165	2.01
30.368	27.2	H	40.0	-12.8	QP	335	2.01
4542.000	37.2	V	54.0	-16.8	AVG	123	2.03
4542.200	44.7	V	74.0	-29.3	PK	123	2.03
8175.620	43.7	H	54.0	-10.3	AVG	143	1.70
8175.380	51.6	H	74.0	-22.4	PK	143	1.70
3633.580	35.0	V	54.0	-19.0	AVG	162	1.00
3633.680	43.3	V	74.0	-30.7	PK	162	1.00
2725.280	38.3	H	54.0	-15.7	AVG	201	1.10
2725.270	43.9	H	74.0	-30.1	PK	201	1.10
6358.900	39.9	V	54.0	-14.1	AVG	255	1.03
6358.620	47.1	V	74.0	-26.9	PK	255	1.03

Note 1: Noise floor is high because preamp was not used, due to overloading by the fundamental. QP readings were taken, with preamp, at selected high points in the noise to show compliance and adequate noise margin.



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

Run #2: Fundamental Field Strength

Date of Test: 04/14/14
Test Engineer: Jack Liu
Test Location: FT Chamber# 7

Config. Used: 1
Config Change: None
EUT Voltage: 120 VAC

Note: The limit in 15.249 for a fundamental signal in the 902 - 928 MHz is 50mV/m (94.0 dBuV/m), harmonics are limited to 500uV/m (54dBuV/m) and all other spurious are required to meet 15.209 limits.

Tx: 908.42MHz (9.6kbps)

Fundamental Field Strength

Frequency	Level	Pol	RSS 210 / FCC 15.209	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
908.420	81.8	V	94.0	-12.2	QP	239	1.0
908.420	83.7	H	94.0	-10.3	QP	314	1.0
908.420	86.6	V	94.0	-7.4	QP	234	1.0
908.420	87.8	H	94.0	-6.2	QP	153	1.2
908.420	85.8	V	94.0	-8.2	QP	240	1.0
908.420	81.5	H	94.0	-12.5	QP	53	1.0

Tx: 908.4MHz (40kbps)

Fundamental Field Strength

Frequency	Level	Pol	RSS 210 / FCC 15.209	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
908.400	81.5	V	94.0	-12.5	QP	238	1.0
908.400	82.1	H	94.0	-11.9	QP	312	1.0
908.400	86.6	V	94.0	-7.4	QP	232	1.0
908.400	88.1	H	94.0	-5.9	QP	154	1.2
908.400	85.9	V	94.0	-8.1	QP	241	1.0
908.400	81.8	H	94.0	-12.2	QP	53	1.0



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A


Run #3: Bandwidth Measurements

Date of Test: 04/14/14
Test Engineer: Jack Liu
Test Location: FT Chamber# 7

Config. Used: 1
Config Change: None
EUT Voltage: 120 VAC

Power Setting	Frequency (MHz)	Resolution Bandwidth	Video Bandwidth	99% Bandwidth	
-	908.40	1kHz	3kHz	55 kHz	40kbps
-	908.42	1kHz	3kHz	60 kHz	9kbps


Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and between 1-5% of the signal bandwidth and VB > 3xRB

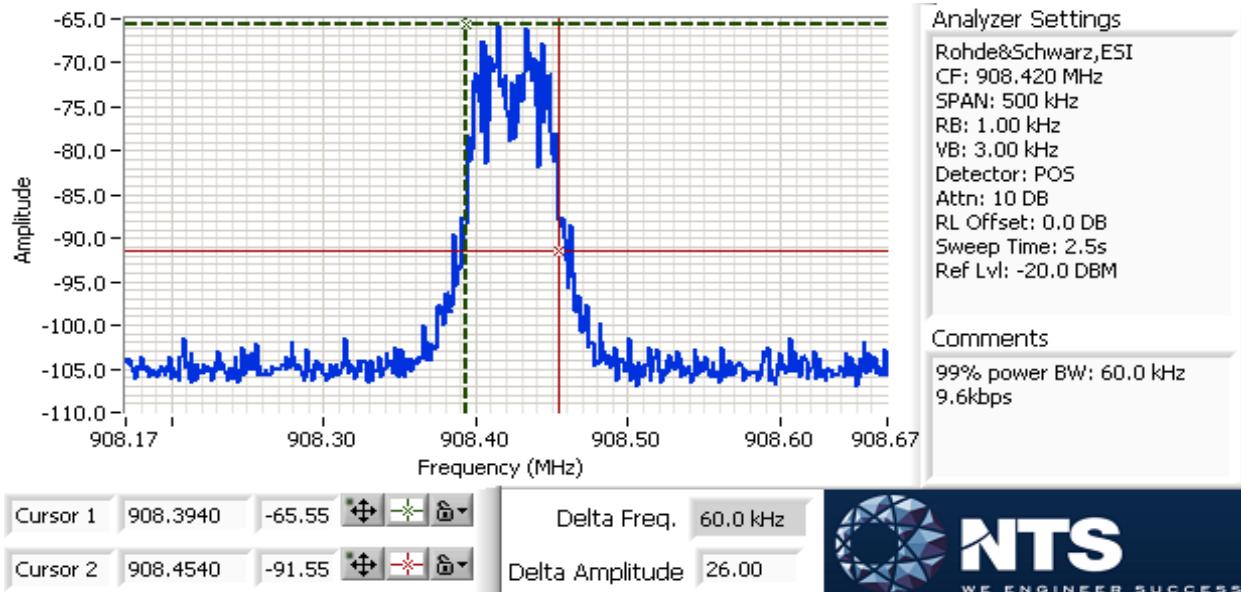



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

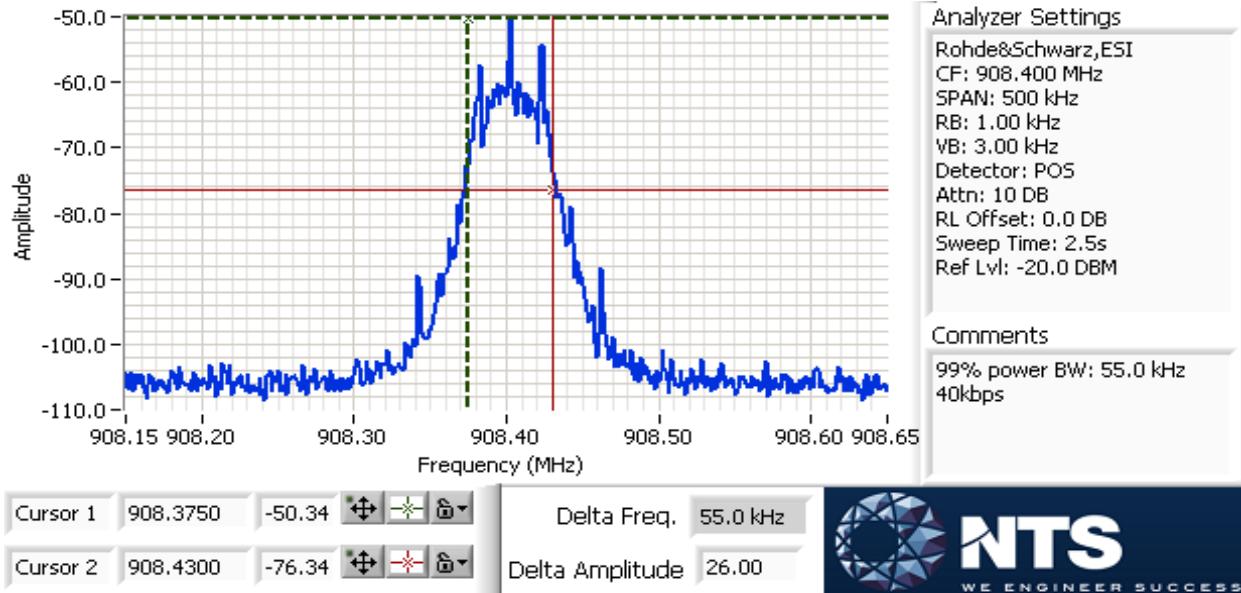



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	N/A

Run #4: Receiver Spurious Emissions

Date of Test: 4/14/2014

Config. Used: 1

Test Engineer: John Caizzi

Config Change: none

Test Location: Chamber 7

EUT Voltage: 120V / 60Hz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1900 MHz	3	3	0.0

As all the emissions observed during the test in Run #1 were below the limits for a receiver except for the Tx fundamental, a separate receive mode test was not necessary to demonstrate compliance.

Center Channel

Frequency	Level	Pol	FCC 15.109/RSS GEN	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
924.248	31.4	H	46.0	-14.6	QP	66	1.51
860.441	30.5	H	46.0	-15.5	QP	32	1.50
792.011	29.2	V	46.0	-16.8	QP	165	2.01
30.368	27.2	H	40.0	-12.8	QP	335	2.01



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	-

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 4/15/2014

Config. Used: 1

Test Engineer: Ryan Woods

Config Change: None

Test Location: Chamber 7

EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a Styrofoam table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions:

Temperature: 25 °C

Rel. Humidity: 38 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power,120V/60Hz	FCC 15.207	Pass	24.5 dB μ V @ 0.505 MHz (-21.5 dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
		Class:	-

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

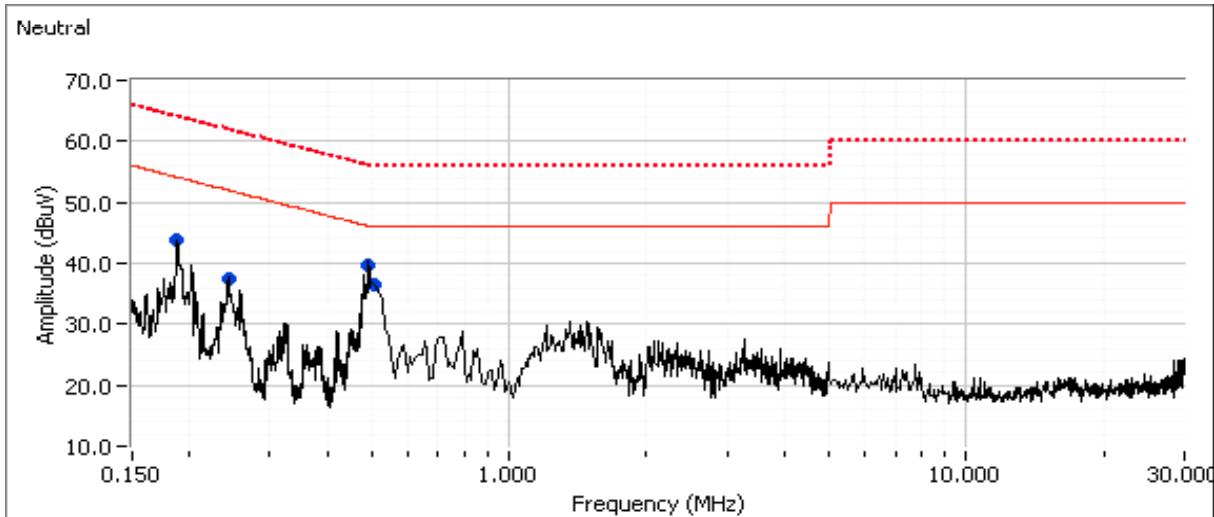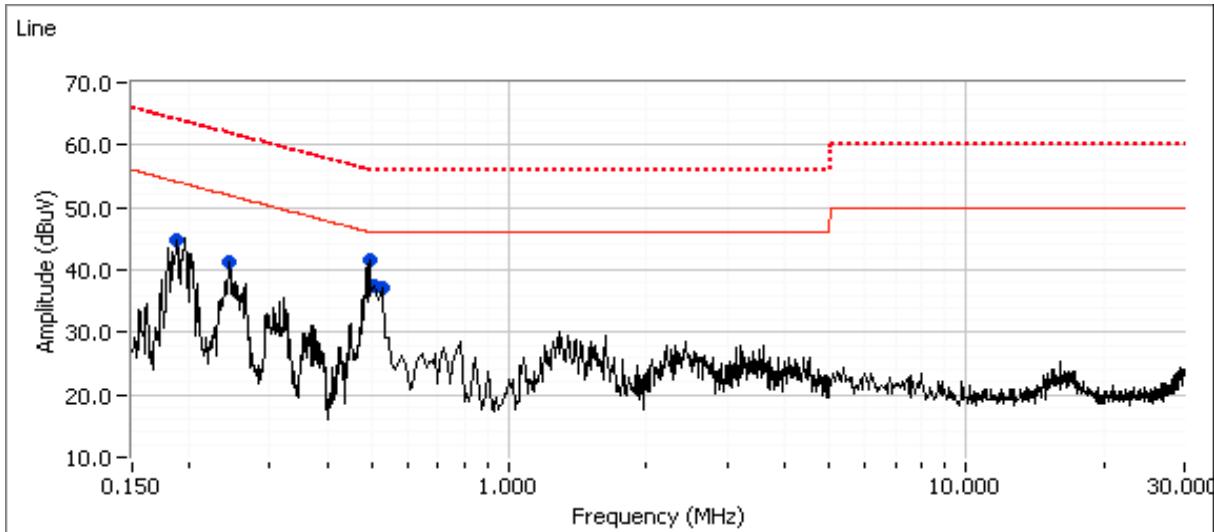



EMC Test Data

Client:	Systech Corporation	Job Number:	J94250
Model:	SLZW0002	T-Log Number:	T94263
Contact:	Rachel Hetzel	Project Manager:	Christine Krebill
Standard:	FCC 15.249/RSS-210	Project Coordinator:	-
Class:	-		

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	FCC 15.207		Detector QP/Ave	Comments
			Limit	Margin		
0.496	41.6	Line 1	46.1	-4.5	Peak	
0.505	37.5	Line 1	46.0	-8.5	Peak	
0.527	37.1	Line 1	46.0	-8.9	Peak	
0.186	44.7	Line 1	54.1	-9.4	Peak	
0.245	41.2	Line 1	51.9	-10.7	Peak	
0.497	39.7	Neutral	46.1	-6.4	Peak	
0.502	36.6	Neutral	46.0	-9.4	Peak	
0.190	43.7	Neutral	54.1	-10.4	Peak	
0.244	37.5	Neutral	52.0	-14.5	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	FCC 15.207		Detector QP/Ave	Comments
			Limit	Margin		
0.505	24.5	Line 1	46.0	-21.5	AVG	AVG (0.10s)
0.502	24.3	Neutral	46.0	-21.7	AVG	AVG (0.10s)
0.505	34.1	Line 1	56.0	-21.9	QP	QP (1.00s)
0.502	33.6	Neutral	56.0	-22.4	QP	QP (1.00s)
0.496	33.4	Line 1	56.1	-22.7	QP	QP (1.00s)
0.497	33.0	Neutral	56.0	-23.0	QP	QP (1.00s)
0.496	22.8	Line 1	46.1	-23.3	AVG	AVG (0.10s)
0.497	22.7	Neutral	46.0	-23.3	AVG	AVG (0.10s)
0.190	36.7	Neutral	64.0	-27.3	QP	QP (1.00s)
0.186	36.8	Line 1	64.2	-27.4	QP	QP (1.00s)
0.190	23.4	Neutral	54.0	-30.6	AVG	AVG (0.10s)
0.186	22.0	Line 1	54.2	-32.2	AVG	AVG (0.10s)

End of Report

This page is intentionally blank and
marks the last page of this test report.