



FCC/IC RADIO TEST REPORT

Issued to

SHENZHEN XINZHONGXIN TECHNOLOGY.CO.,LTD.

For

Bluetooth module

Model Name: F-3056
 Trade Name: XINZHONGXIN
 Brand Name: XINZHONGXIN
 FCC ID: KKI-F-3056
 IC Number: 11051A-F3056
 Standard: 47 CFR Part 15 Subpart C
 RSS-GEN
 RSS-210
 Test date: 2013-6-24 to 2013-8-16
 Issue date: 2013-8-16

By
Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Nie Quan
 Nie Quan
 (Test Engineer)
 Date 2013.8.16

Approved by Zeng Dexin
 Zeng Dexin
 (Chief Engineer)
 Date 2013.8.16

Review by Qiu Xiaojun
 Qiu Xiaojun
 (Project Manager)
 Date 2013.8.16



CTIA Authorized Test Lab
 LAB CODE 20081223-00
 IEEE 1725

OFTA
 電訊管理局



TAF
 Testing Laboratory
 2010

GCF
 Official Observer of
 Global Certification Forum

Bluetooth
 BQTF

FCC
 Reg. No.
 695796

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Facilities and Accreditations	5
2. 47 CFR PART 15C AND RSS-210 REQUIREMENTS.....	6
2.1. Antenna requirement.....	6
2.2. Number of Hopping Frequency	6
2.3. Peak Output Power.....	11
2.4. 20dB & 99% Bandwidth	13
2.5. Carried Frequency Separation.....	25
2.6. Time of Occupancy (Dwell time)	28
2.7. Conducted Spurious Emissions and Band Edge	40
2.8. Restricted Frequency Bands.....	53
2.9. Conducted Emission	63
2.10. Radiated Emission.....	65
2.11. RF exposure evaluation.....	84

Change History		
Issue	Date	Reason for change
1.0	August 16, 2013	First edition

1. General Information

1.1. EUT Description

EUT Type: Bluetooth module
 Serial No.....: (n.a, marked #1 by test site)
 Hardware Version.....: 1.0
 Software Version: 1.0
 Applicant.....: SHENZHEN XINZHONGXIN TECHNOLOGY.CO.,LTD.
 5F,No.C Blv.,Zhuan Bian Industrail Park, Gu Shu De Xi Xiang
 Town, Bao'an District, Guang Dong China
 Manufacturer.....: SHENZHENSIXINZHONGXIN TECHNOLOGY.CO.,LTD
 Shenzhen City manhole town Nanpu road and East Ring Road
 Interchange Dong Industrial Zone A3
 Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at
 intervals of 1MHz);
 The frequency block is 2400MHz to 2483.5MHz.
 Modulation Type.....: Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps),
 8-DPSK(EDR 3Mbps))
 Antenna Type.....: PCB Antenna
 Antenna Gain.....: 0dBi

Note 1: The EUT is a Bluetooth module, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: a. When power on, the EUT will scan the whole frequency until a Connection command from the other BT devices.

b. When receiving the signal from the other BT devices, The EUT transmit a response signal.

c. The other devices receive the response signal and recognize it, then send a connection command to establish the connection.

d. After the connection establish successfully, the data transmission is beginning. At the same time, the both devices will shift frequencies in synchronization per a same pseudo randomly ordered list of hopping frequencies, the hopping rate is 1600 times per second. This device conforms to the criteria in FCC Public Notice DA 00-705.

e. The bandwidth of the receiver, which is set to a fixed width by the software.

Note 4: Bluetooth signal has 9 packages DH1, DH3, DH5, 3DH1, 3DH3, 3DH5, 5DH1, 5DH3, 5DH5, DH5 package is largest, we are testing DH5 in the document.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC/IC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-GEN:Issue 3, December 2010	General Requirements and Information for the Certification of Radio Apparatus
3	RSS-210: Issue 8, December 2010	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Section in RSS-GEN , RSS-210	Description	Result
1	15.203	7.1.4	Antenna Requirement	PASS
2	15.247(a)	A8.1 (d)	Number of Hopping Frequency	PASS
3	15.247(b)	A8.4 (2)	Peak Output Power	PASS
4	15.247(a)	A8.1 (a)	20dB Bandwidth	PASS
5	15.247(a)	A8.1 (b)	Carrier Frequency Separation	PASS
6	15.247(a)	A8.1 (d)	Time of Occupancy (Dwell time)	PASS
7	15.247(d)	A8.1 (d)	Conducted Spurious Emission and Band Edge	PASS
8	15.247(d)	A8.5	Restricted Frequency Bands	PASS
9	15.207	7.2.2	Conducted Emission	N/A
10	15.209 15.247(c)	A8.5	Radiated Emission	PASS
11	15.247(i). § 1.1307&2.1093	RSS-102	RF exposure evaluation	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C and RSS-210 Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

This Bluetooth module has a special pin feet used to connect dedicated antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (d), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

2.2.2. Test Description

Test Setup:

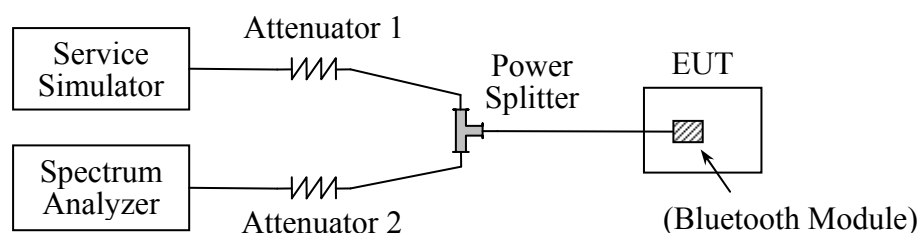

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS



B. Test Plots:

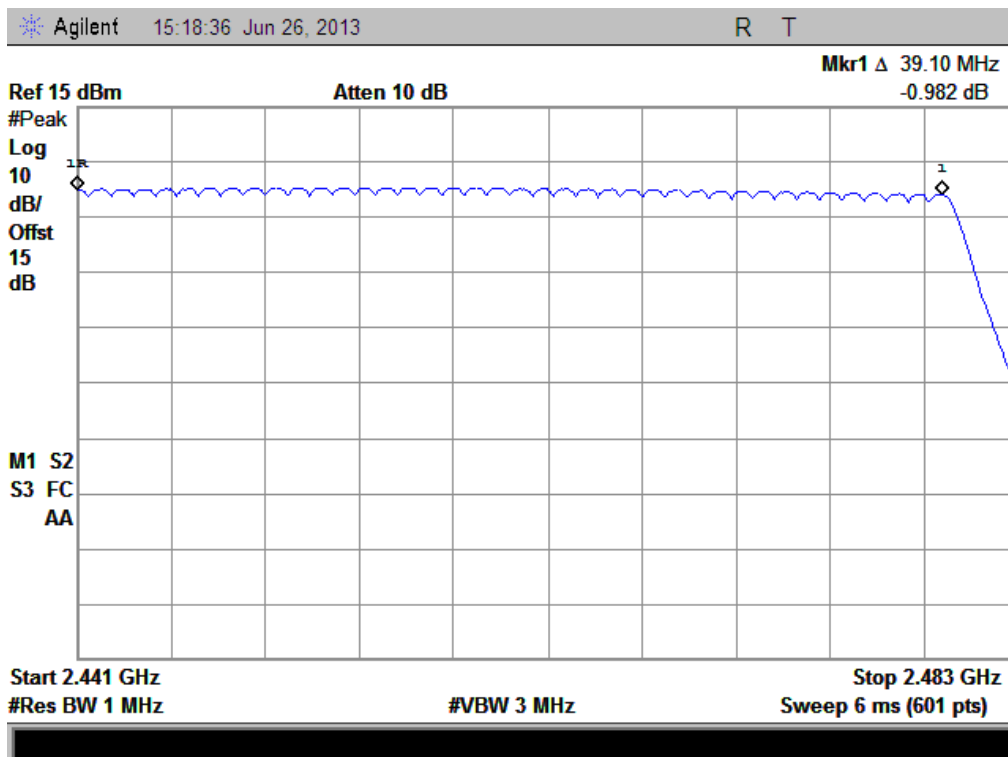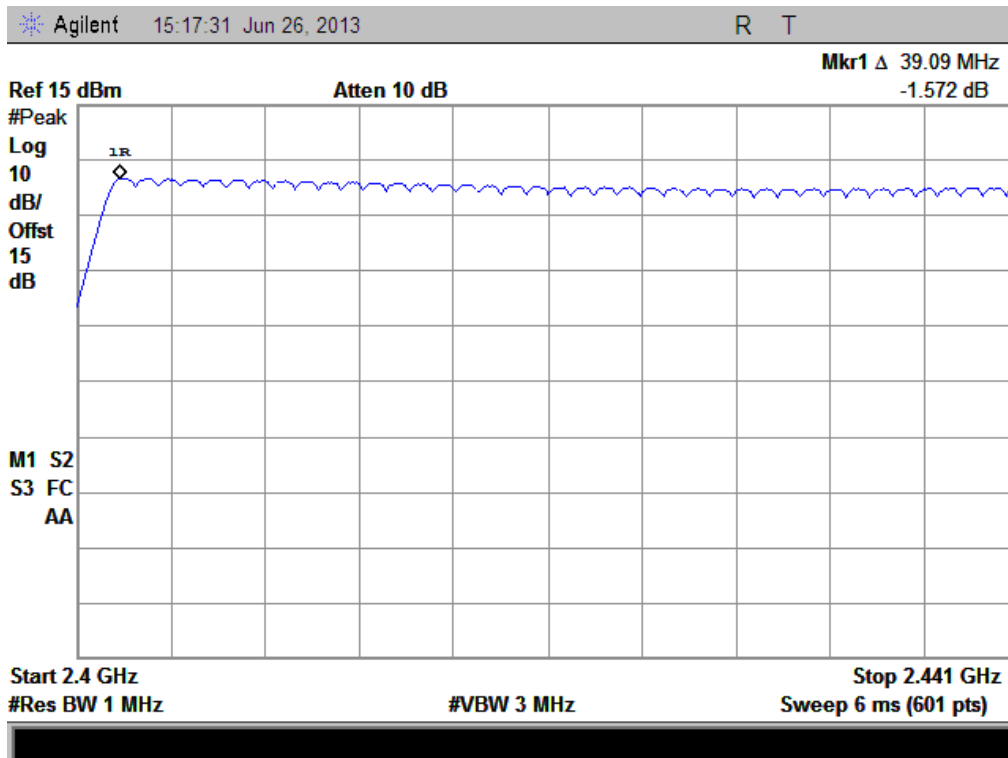

(Plot A: GFSK)

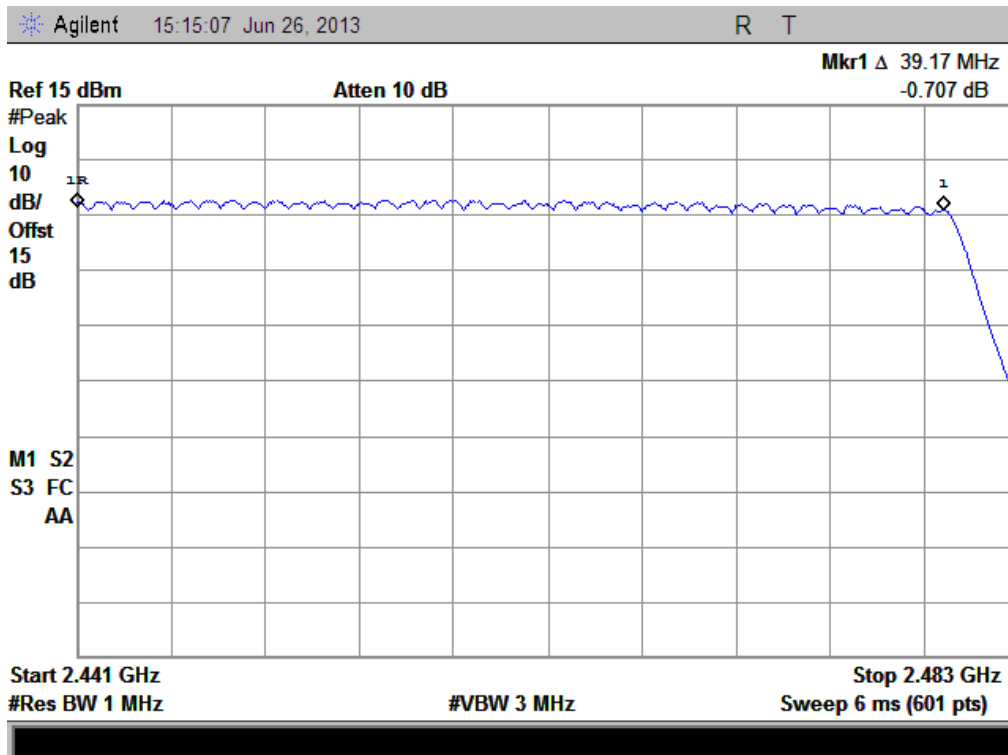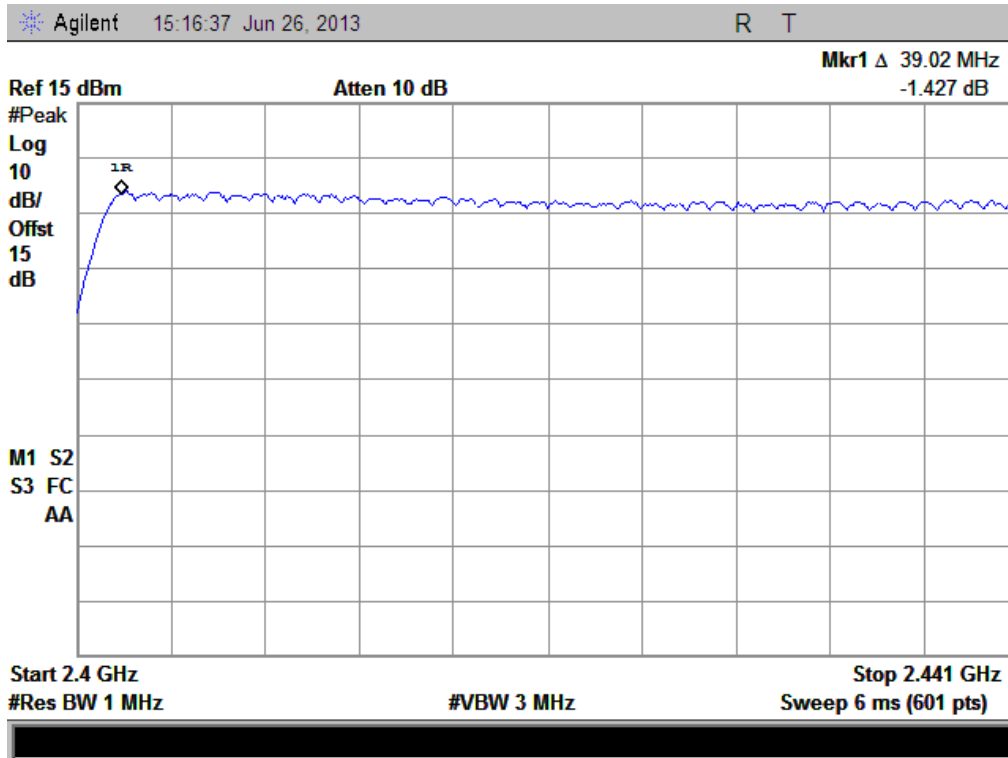

(Plot B: $\Pi/4$ -DQPSK)

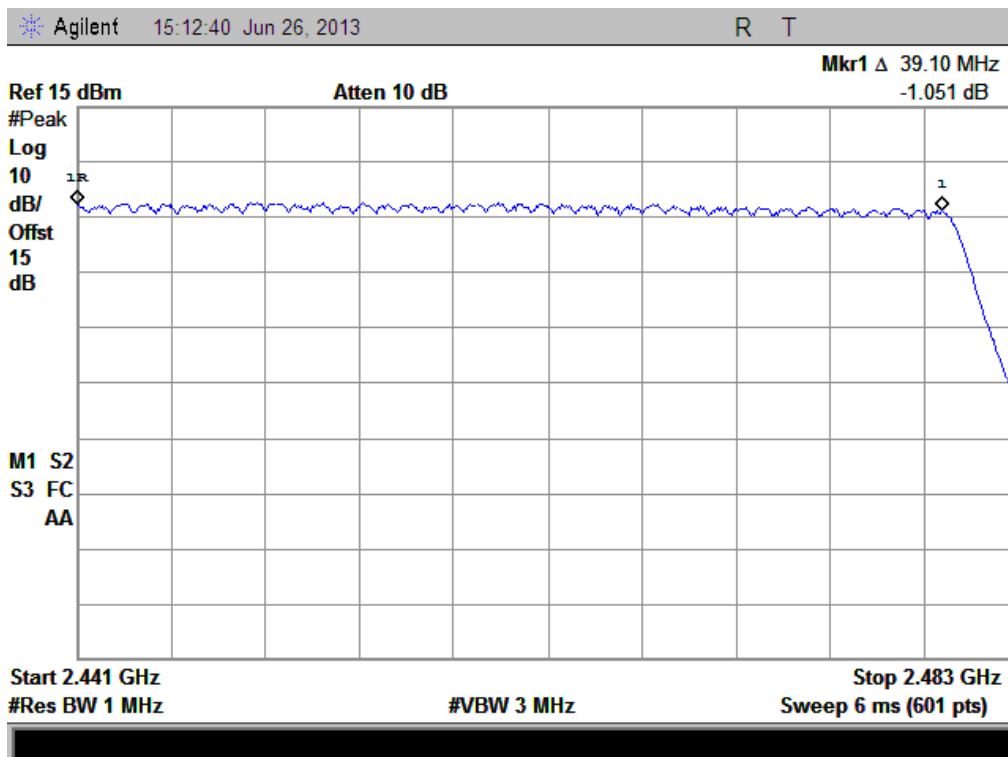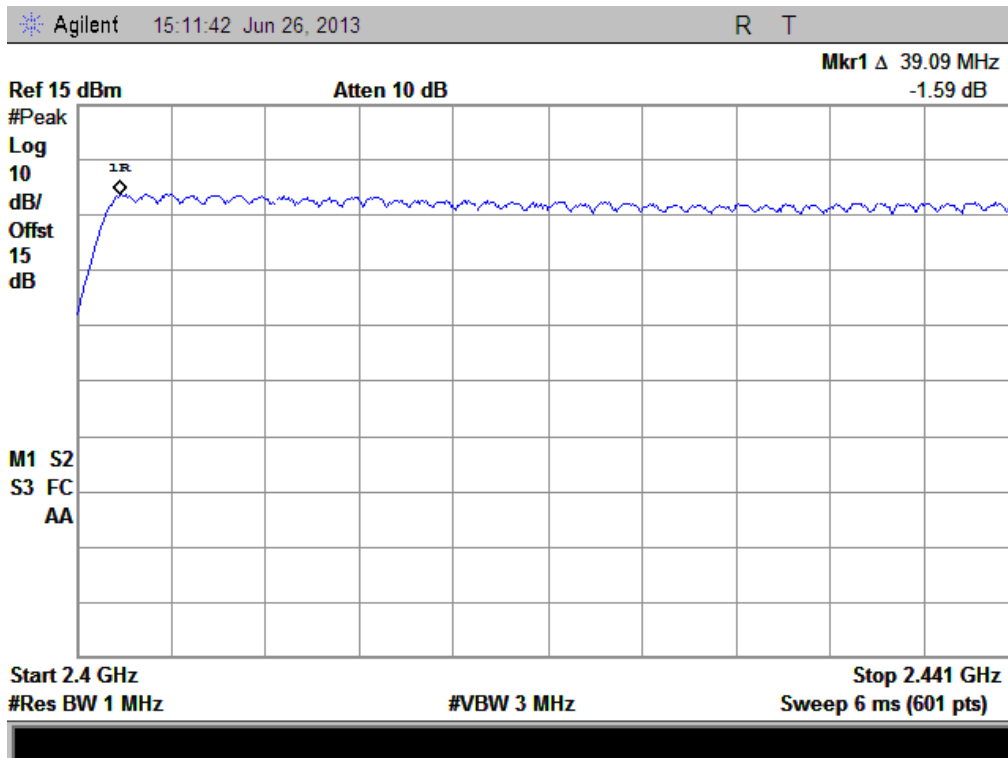

(Plot C: 8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1) and RSS-210 A8.4 (2), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

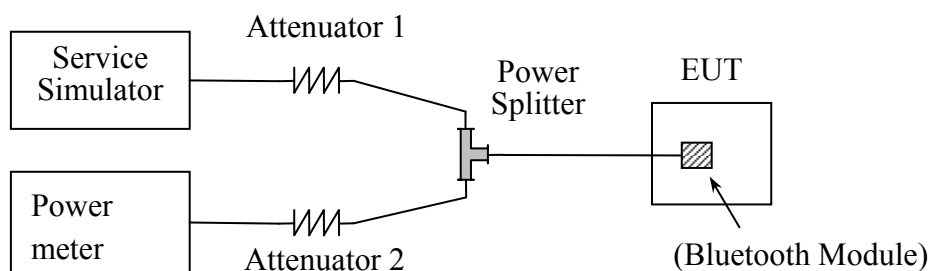

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Power meter	Agilent	E4418B	GB44318055	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Power Sensor	Agilent	8482A	MY41091706	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. The lowest, middle and highest channel were tested by Power meter.

2.3.3.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	2.635	0.001834	30	1	PASS
39	2441	0.784	0.001198			PASS
78	2480	-0.254	0.000943			PASS

2.3.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-0.050	0.000989	30	1	PASS
39	2441	-1.865	0.000651			PASS
78	2480	-2.927	0.000510			PASS

2.3.3.3. 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-0.111	0.000975	30	1	PASS
39	2441	-1.908	0.000644			PASS
78	2480	-2.932	0.000509			PASS


2.4. 20dB & 99% Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1(a), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

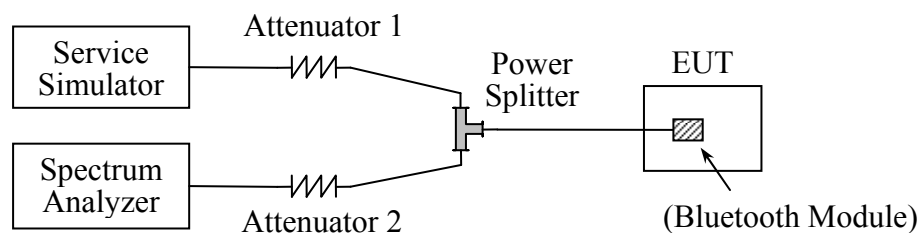

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.4.1. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.2. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


2.4.2.1. GFSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 0.9547MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Refer to Plot
0	2402	0.9547	0.9659	Plot A
39	2441	0.9215	0.8618	Plot B
78	2480	0.9403	0.8763	Plot C

B. Test Plots:

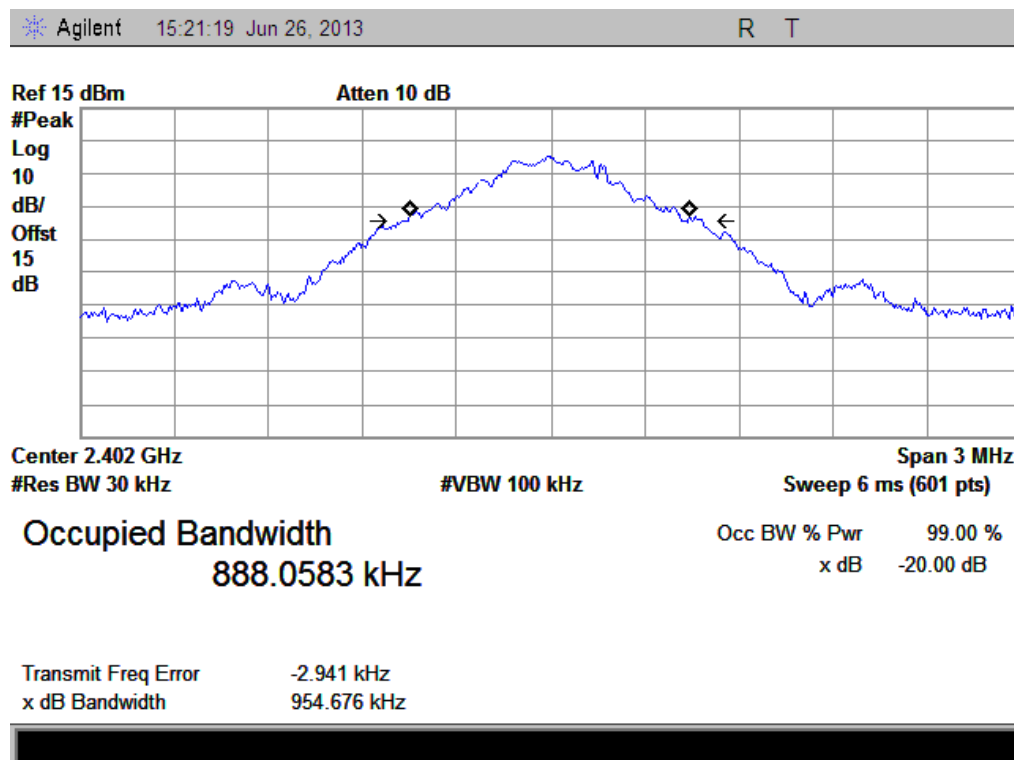


(20dB Bandwidth)

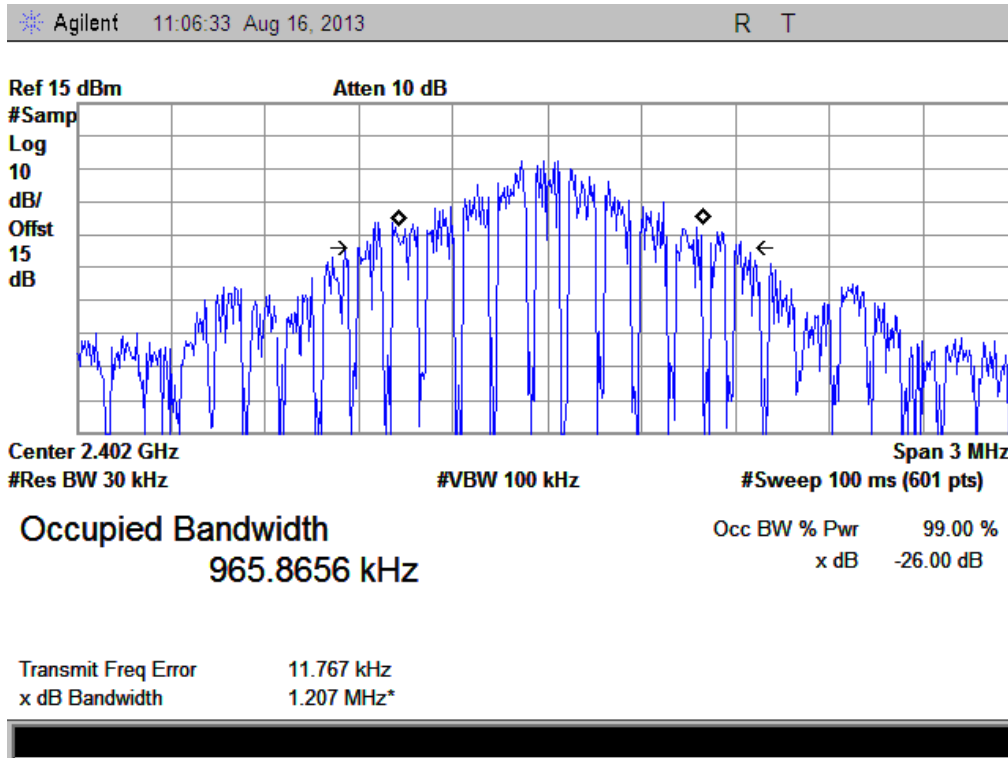


(99% Bandwidth)

(Plot A: Channel = 2402 @ GFSK)

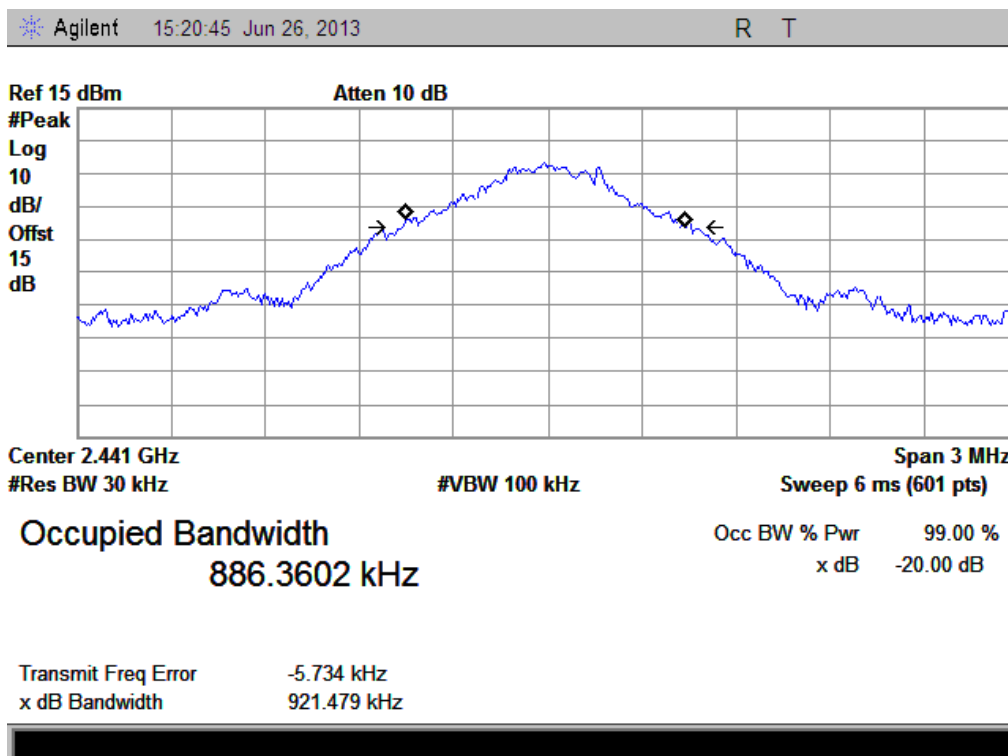


(20dB Bandwidth)

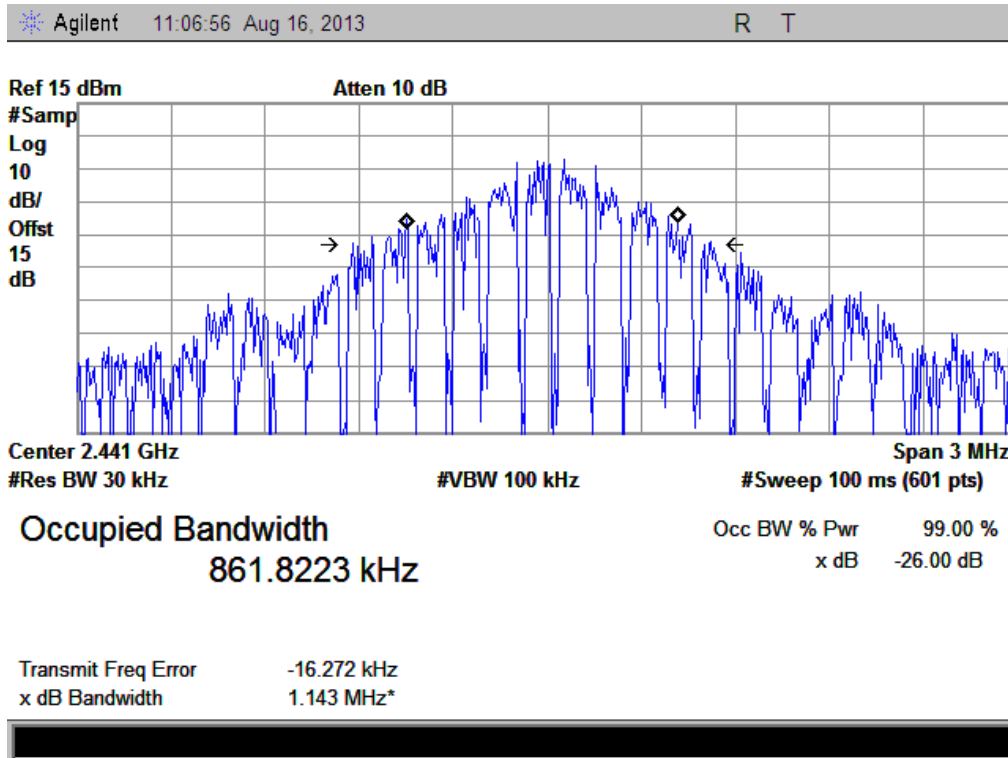


(99% Bandwidth)

(Plot B: Channel = 2441 @ GFSK)

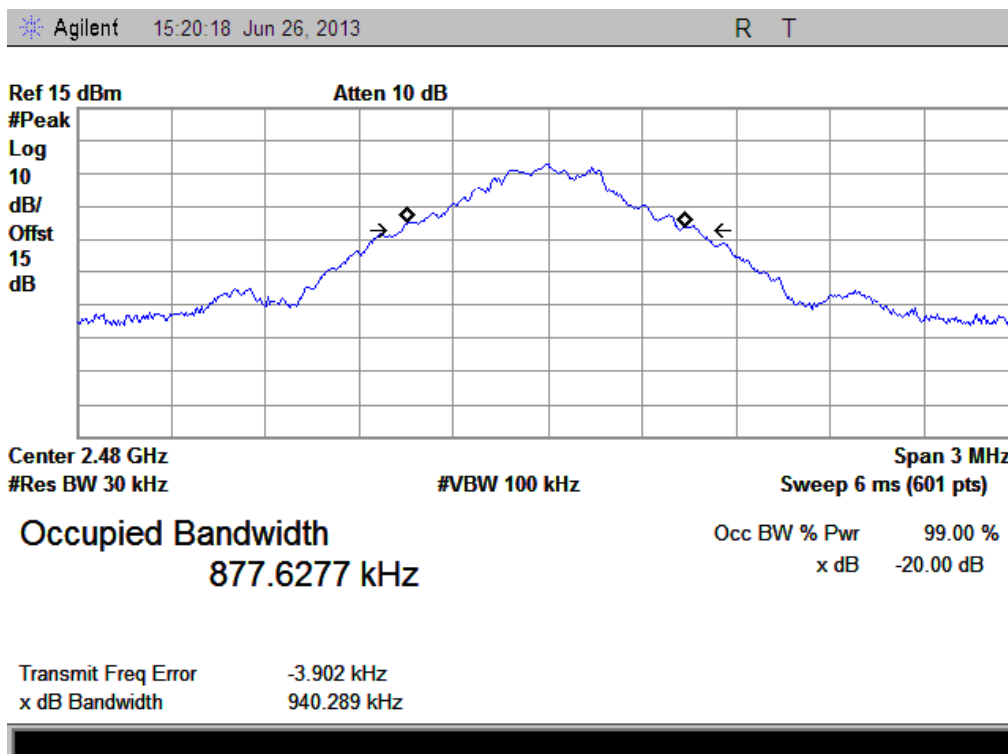

(20dB Bandwidth)

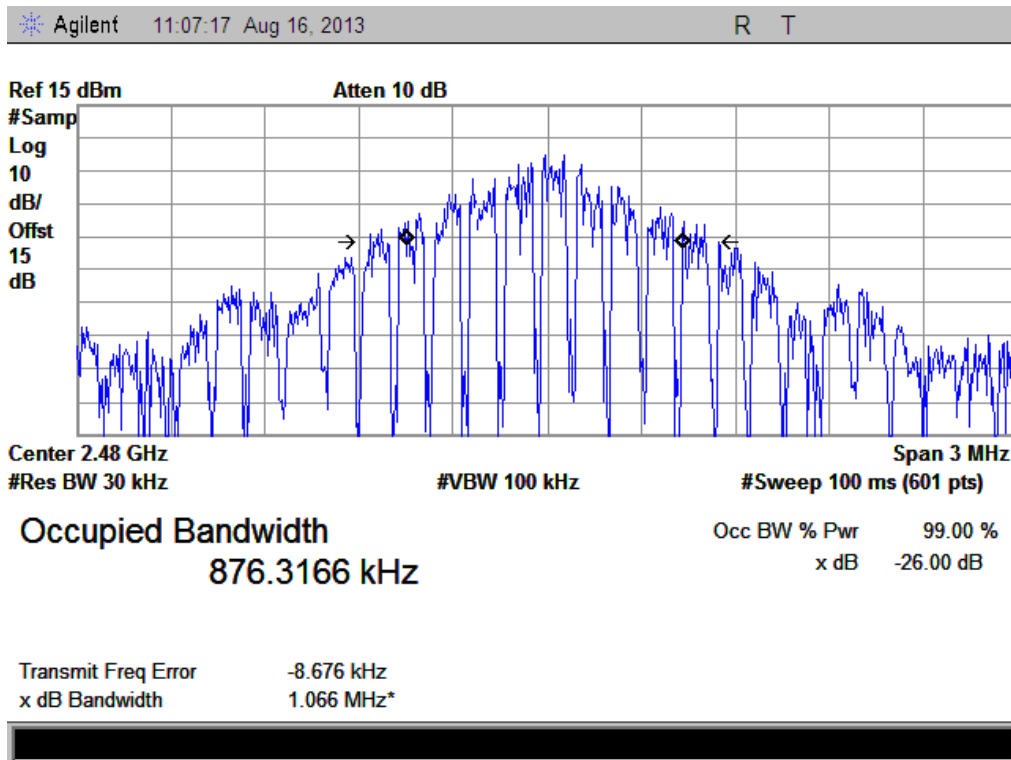

(99% Bandwidth)

(Plot C: Channel = 2480 @ GFSK)


2.4.2.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.2570MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Refer to Plot
0	2402	1.2500	1.2179	Plot A
39	2441	1.2570	1.1574	Plot B
78	2480	1.2410	1.1822	Plot C

B. Test Plots:

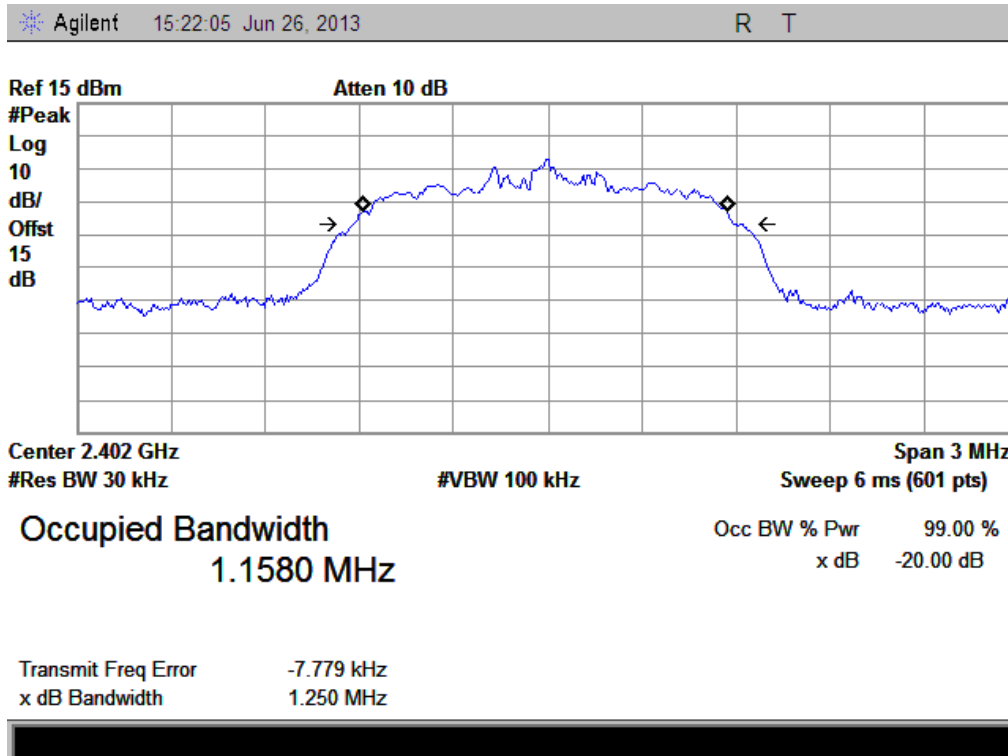


(20dB Bandwidth)

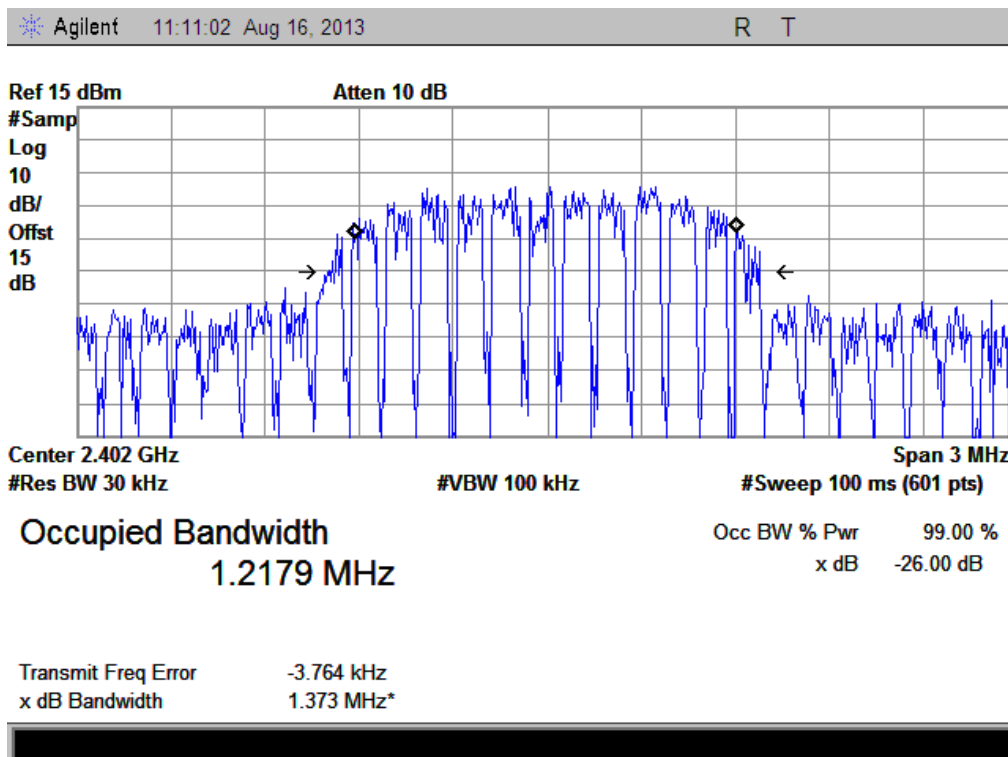


(99% Bandwidth)

(Plot D: Channel = 2402 @ 11/4-DQPSK)

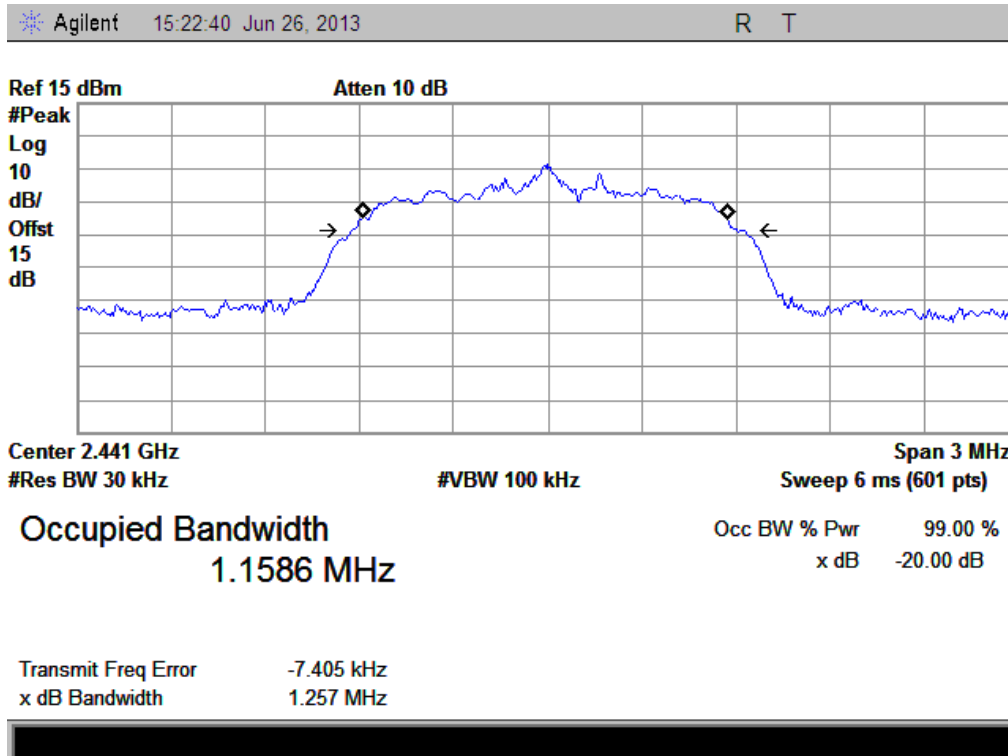


(20dB Bandwidth)

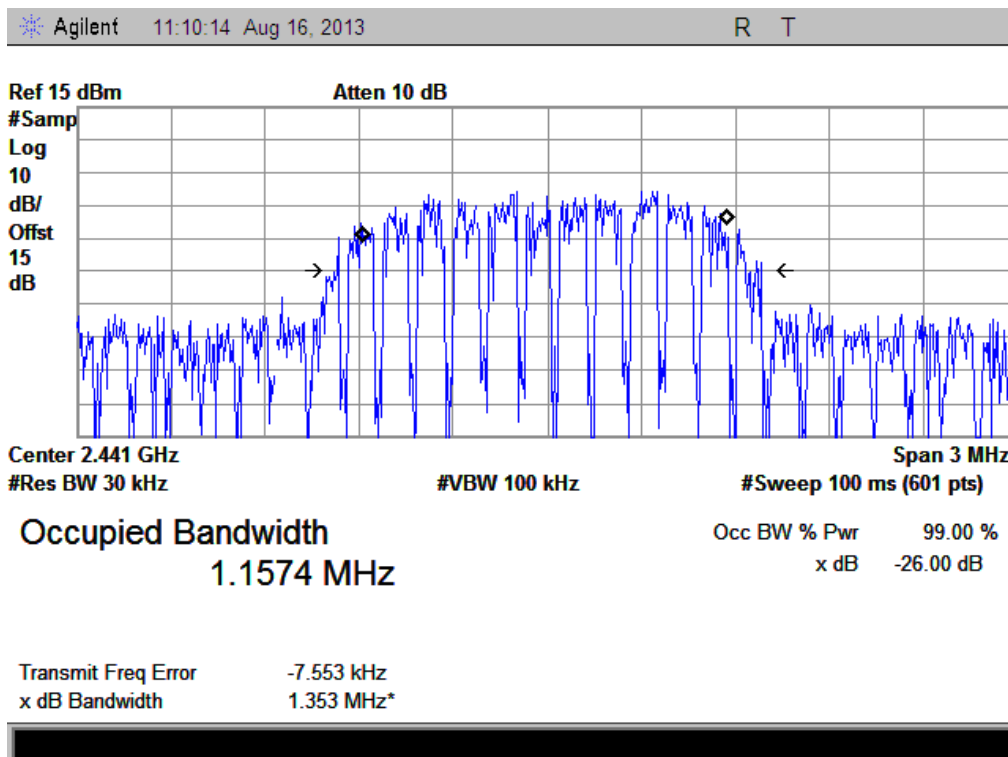

(99% Bandwidth)

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

Agilent 15:23:22 Jun 26, 2013 R T

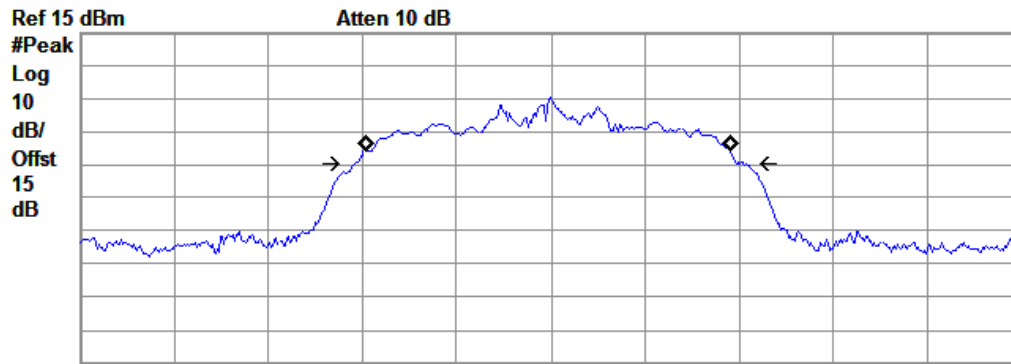

Center 2.48 GHz Span 3 MHz
#Res BW 30 kHz #VBW 100 kHz Sweep 6 ms (601 pts)


Occupied Bandwidth
1.1542 MHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -8.452 kHz
x dB Bandwidth 1.241 MHz

(20dB Bandwidth)

Agilent 11:09:41 Aug 16, 2013 R T

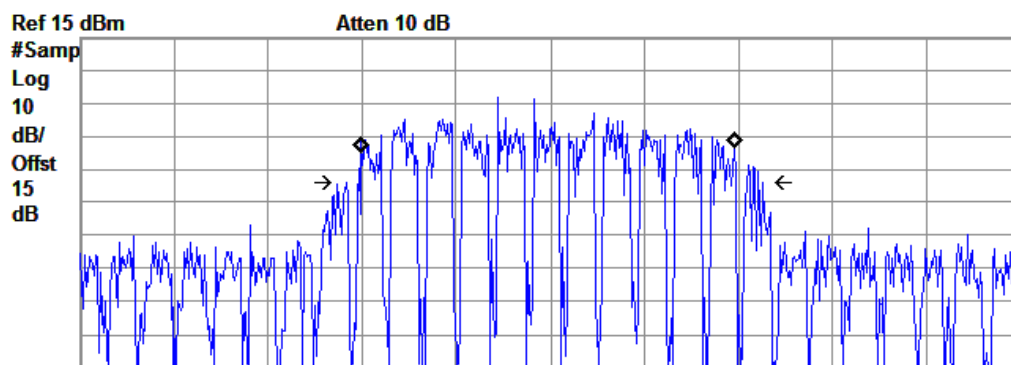

Center 2.48 GHz Span 3 MHz
#Res BW 30 kHz #VBW 100 kHz #Sweep 100 ms (601 pts)

Occupied Bandwidth
1.1822 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -6.564 kHz
x dB Bandwidth 1.318 MHz*

(99% Bandwidth)

(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)


2.4.2.3. 8-DPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.2640MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Refer to Plot
0	2402	1.2640	1.1847	Plot A
39	2441	1.2640	1.2287	Plot B
78	2480	1.1583	1.2068	Plot C

B. Test Plots:

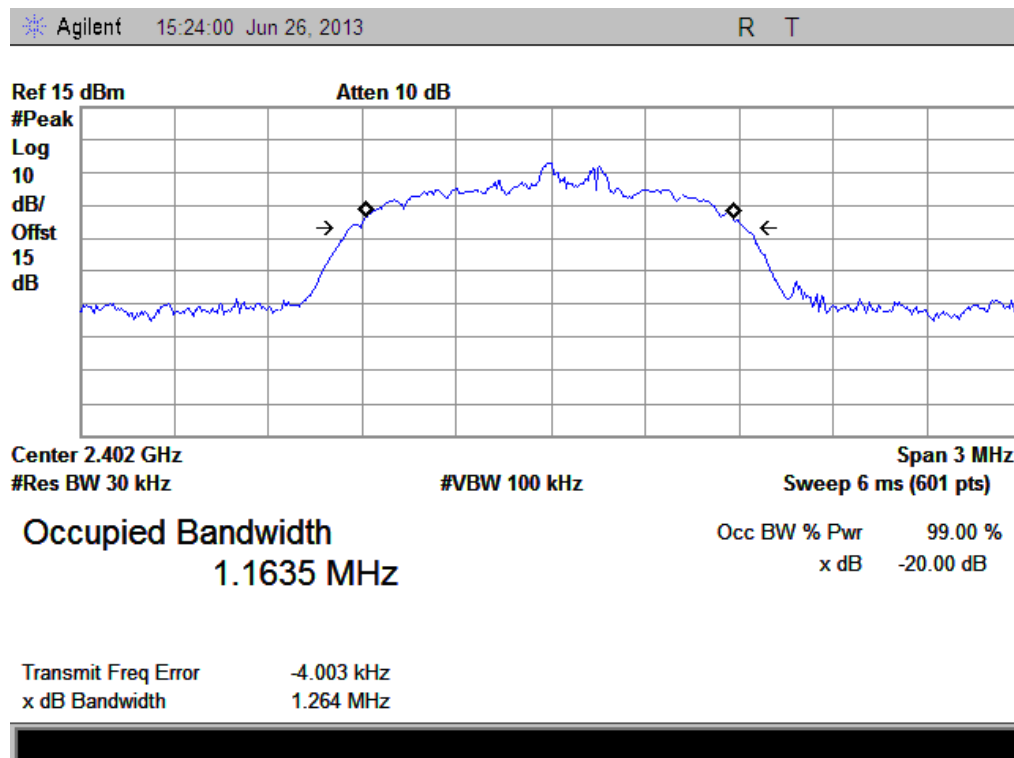


(20dB Bandwidth)

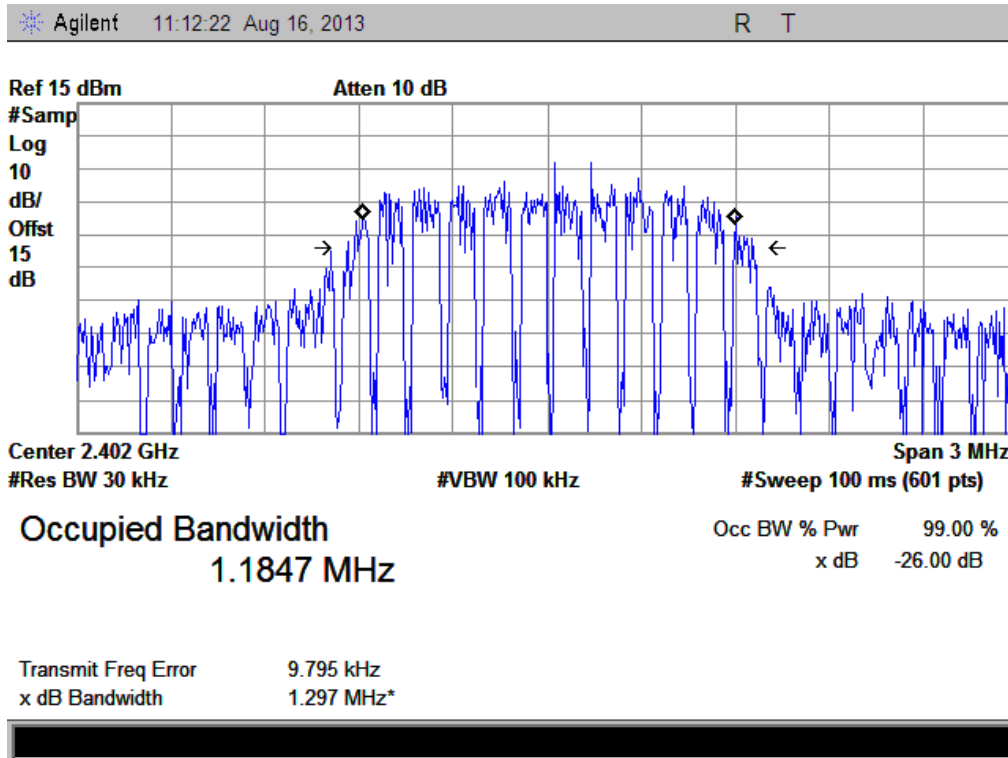


(99% Bandwidth)

(Plot G: Channel = 2402 @ 8-DPSK)

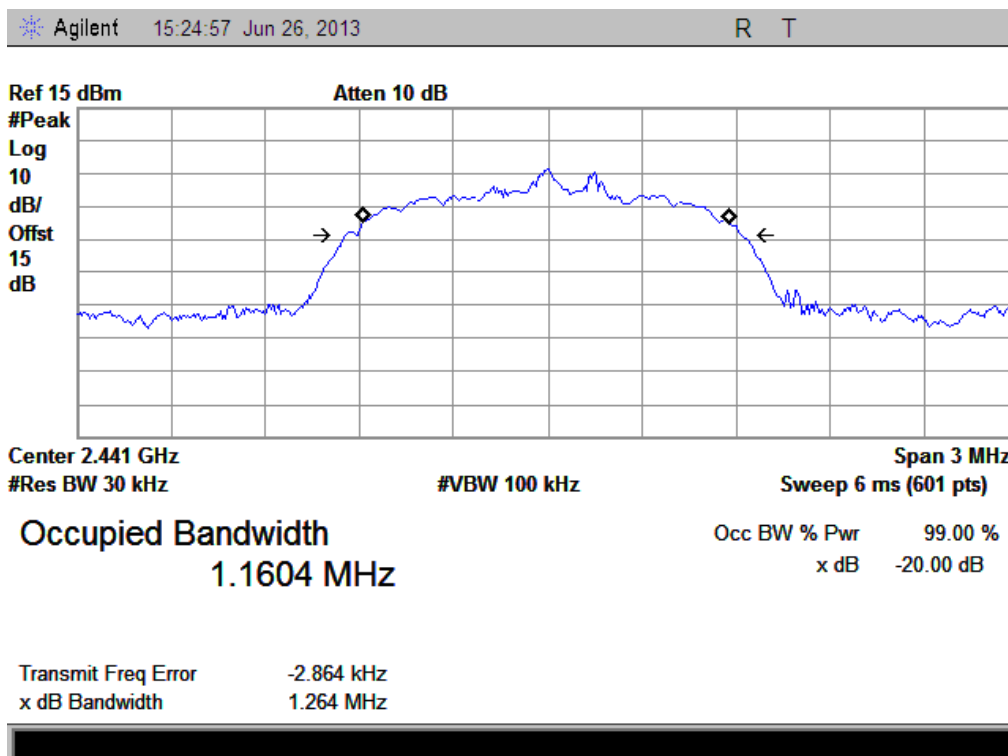


(20dB Bandwidth)

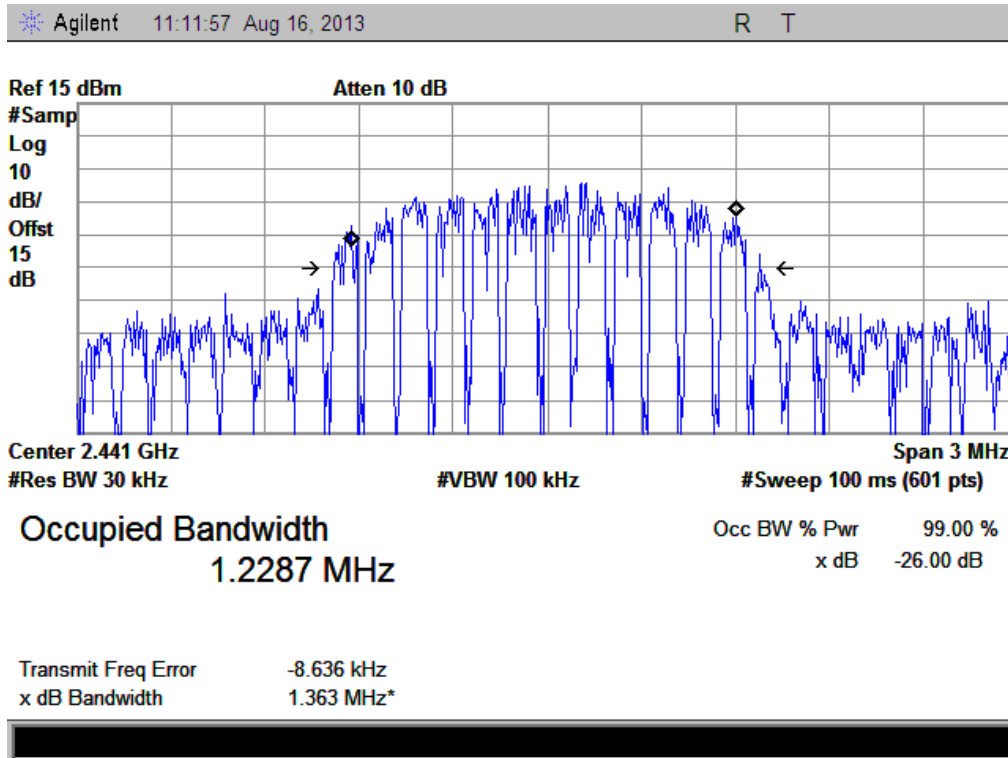


(99% Bandwidth)

(Plot H: Channel = 2441 @ 8-DPSK)

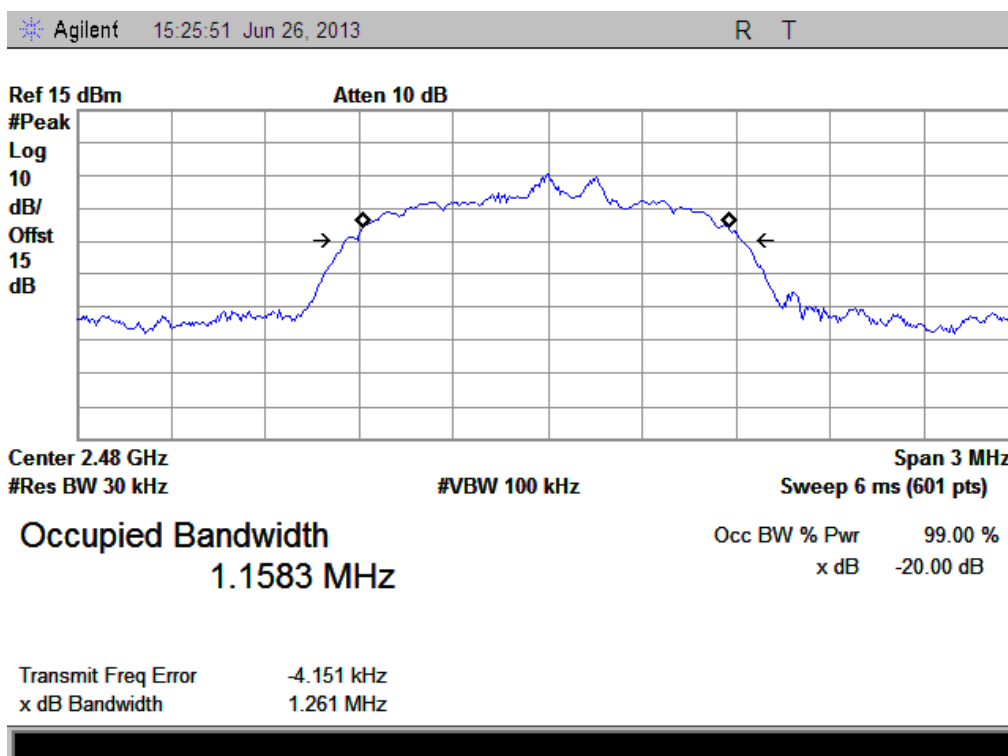

(20dB Bandwidth)

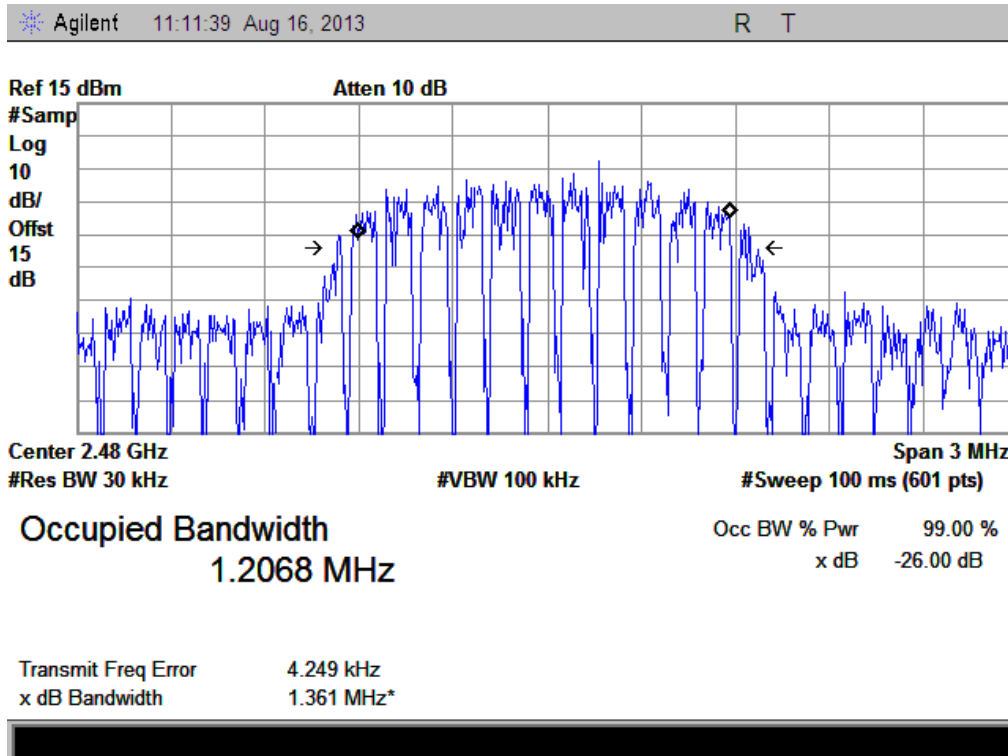

(99% Bandwidth)

(Plot I: Channel = 2480 @ 8-DPSK)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (b), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

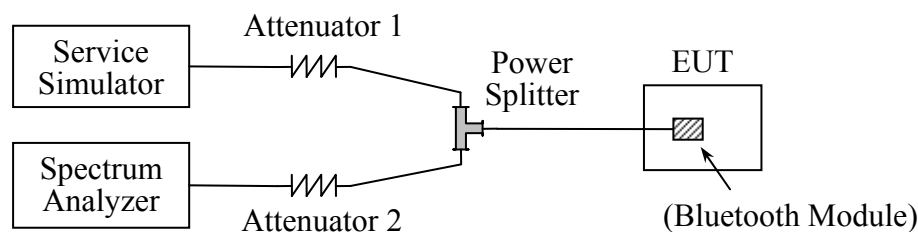

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (0.9547MHz for GFSK mode, 1.2570MHz for $\pi/4$ -DQPSK mode and 1.2640MHz for 8-DPSK mode, refer to section 2.4.1), whichever is greater. So, the verdict is PASSING

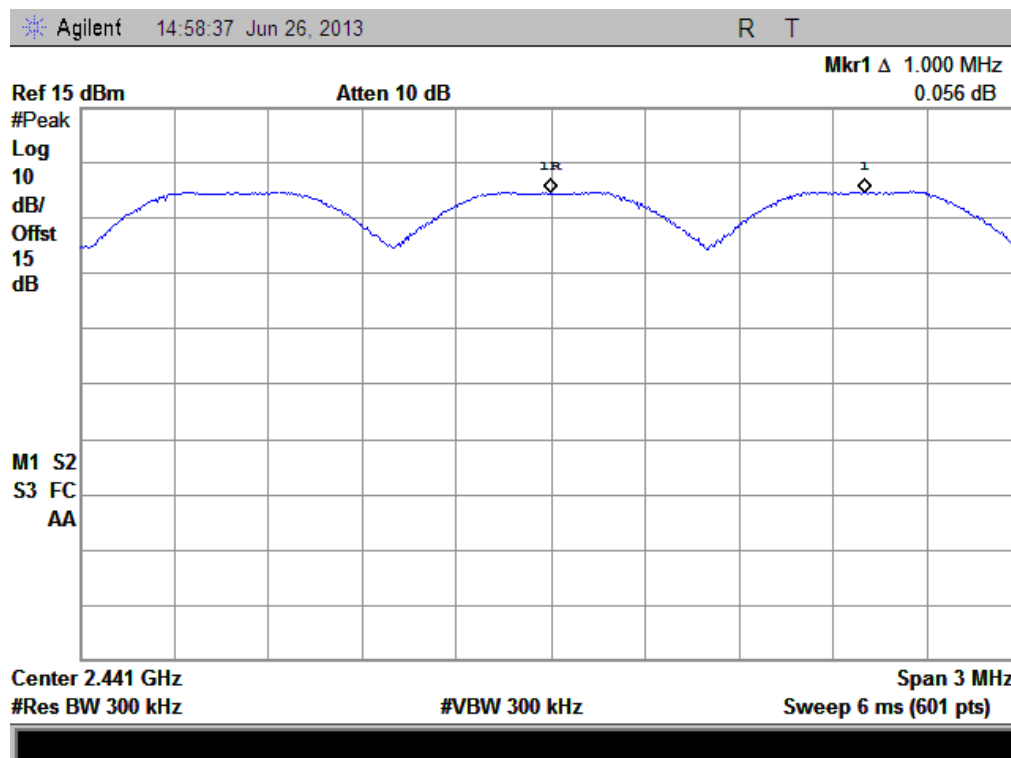

(Plot A: GFSK)

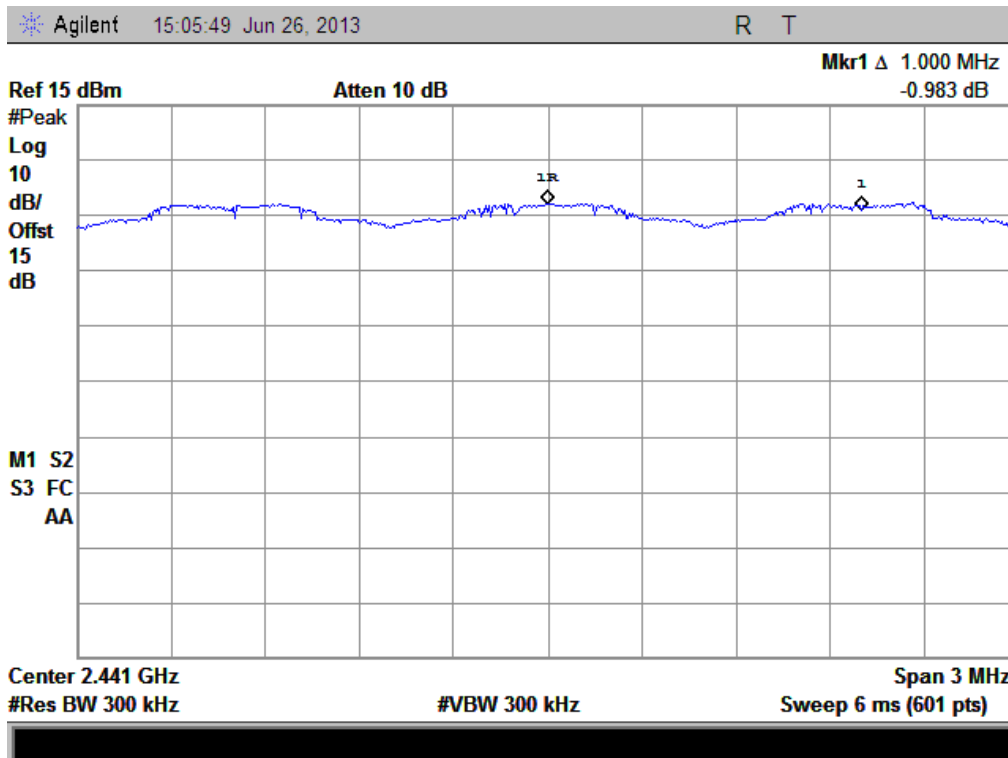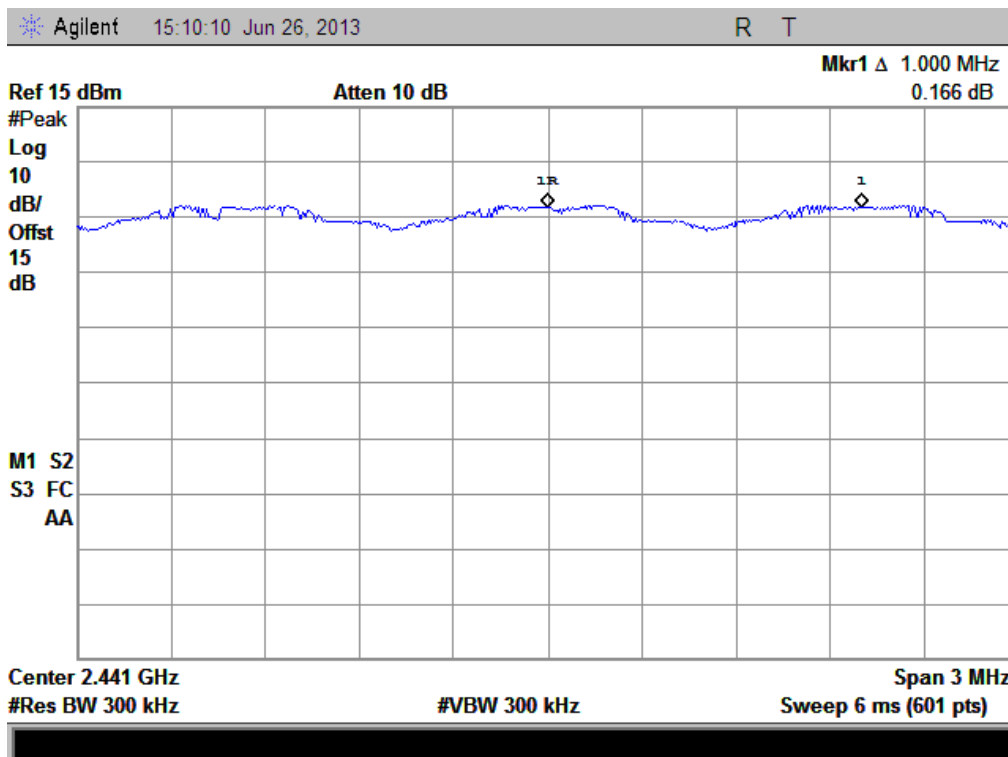
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii) and RSS-210 A8.1 (d), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

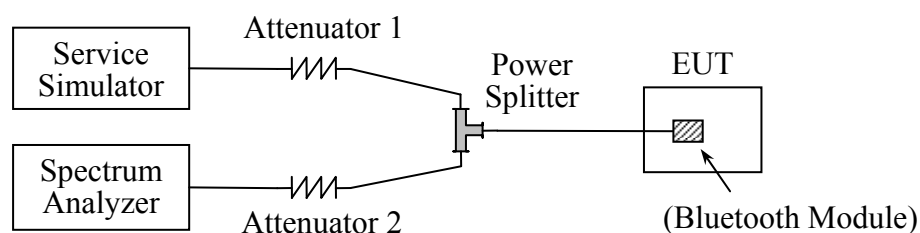

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


2.6.4. Test Result


2.6.4.1. GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.400	32	Plot A	0.128	0.4	PASS
DH3	1.650	12	Plot B	0.198		PASS
DH5	2.917	9	Plot C	0.263		PASS


B. Test Plots:

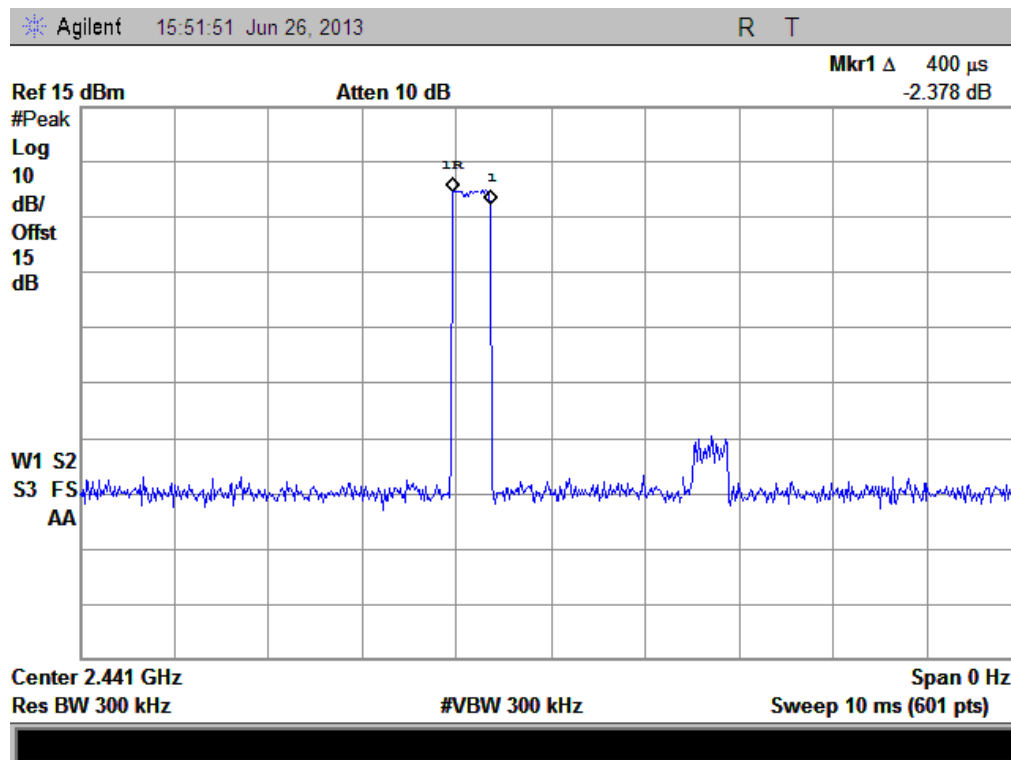

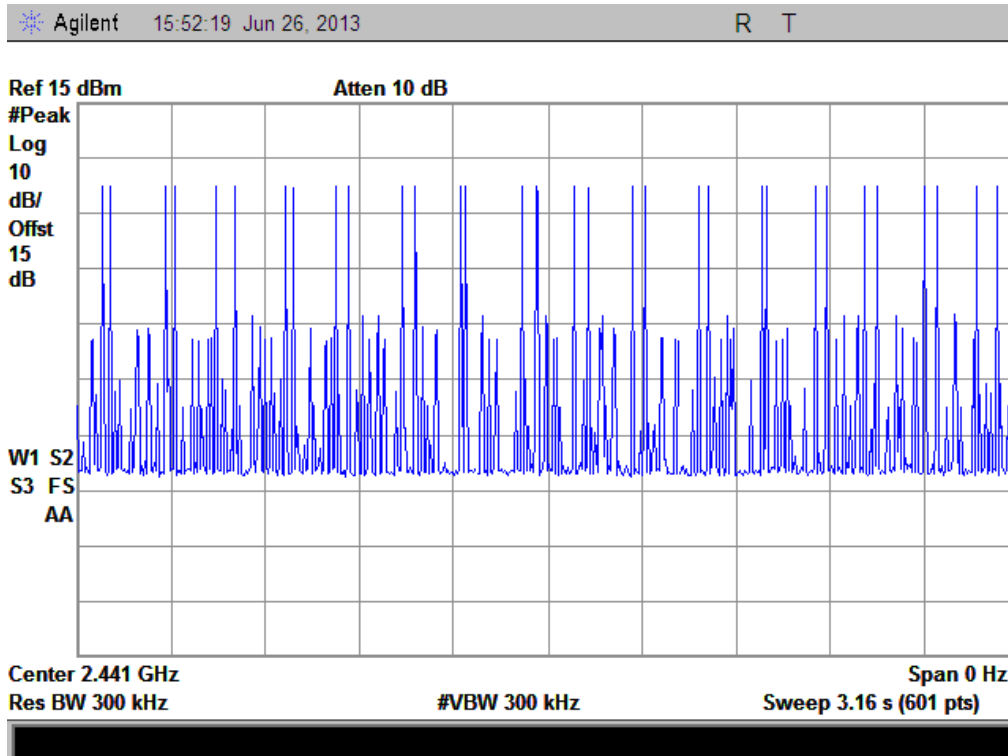



(Plot A: DH1 @ GFSK)

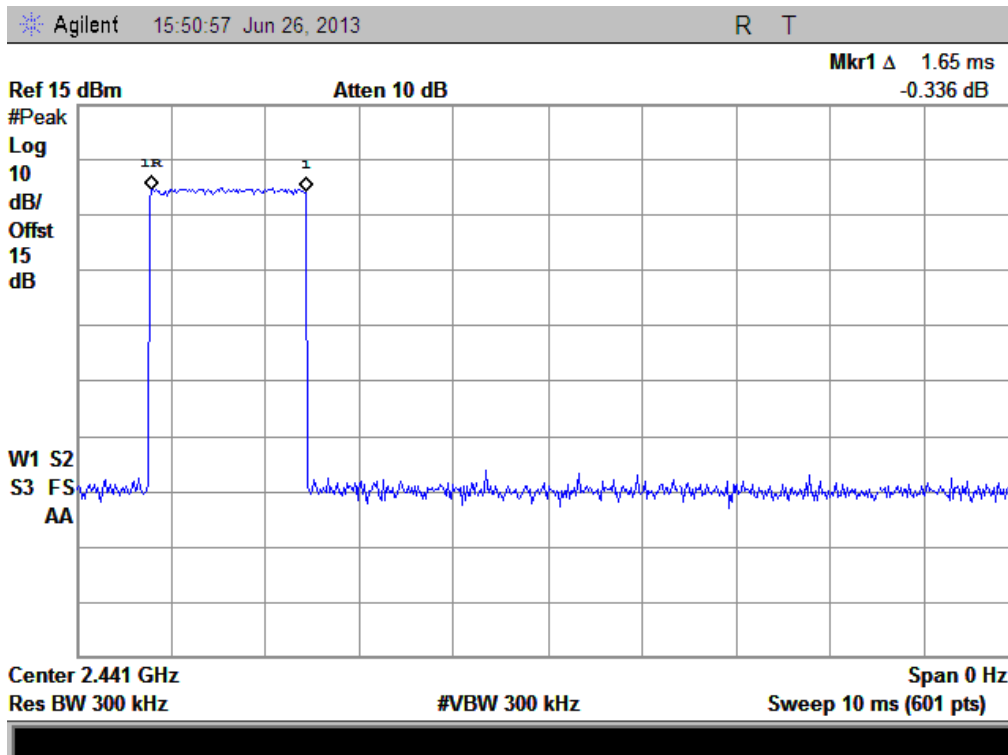

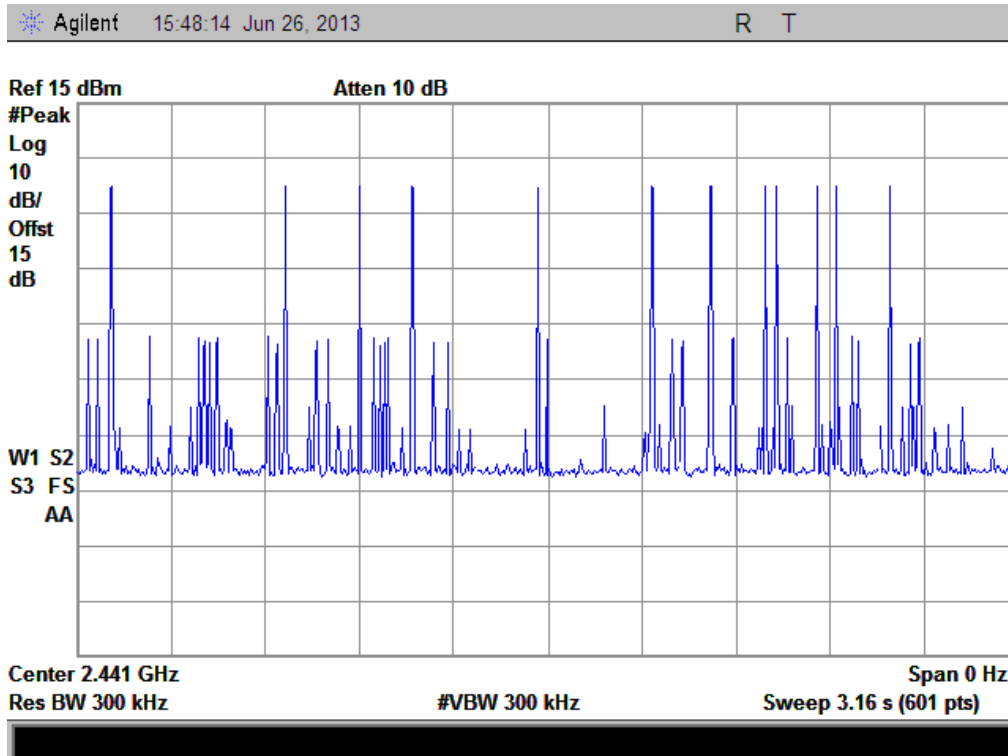

(Plot B: DH3 @ GFSK)

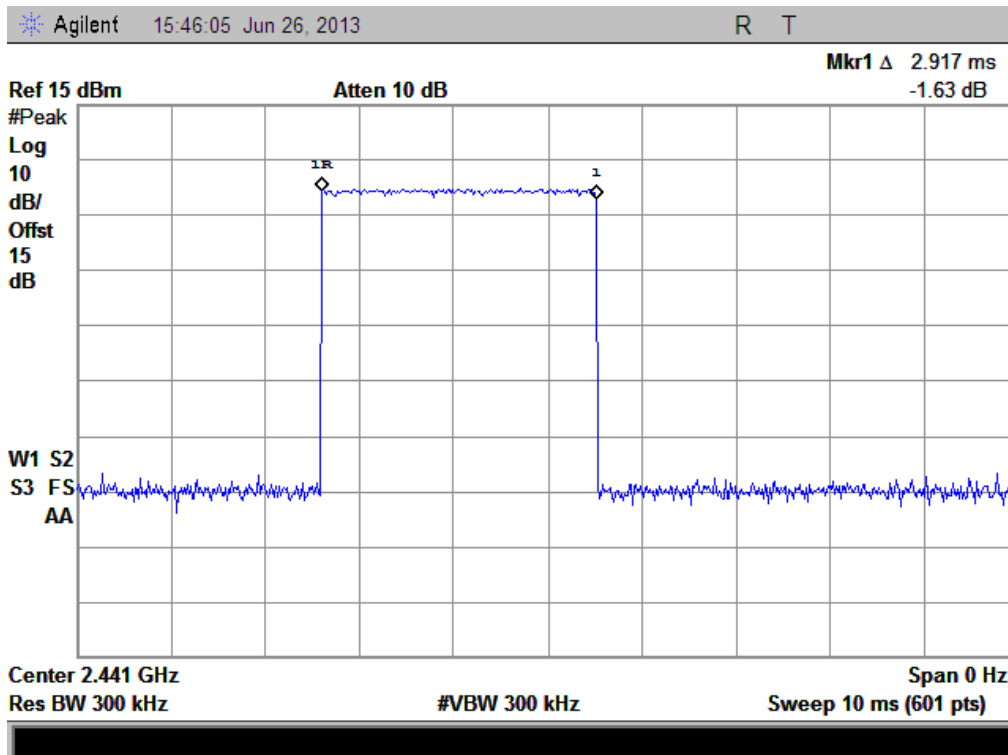

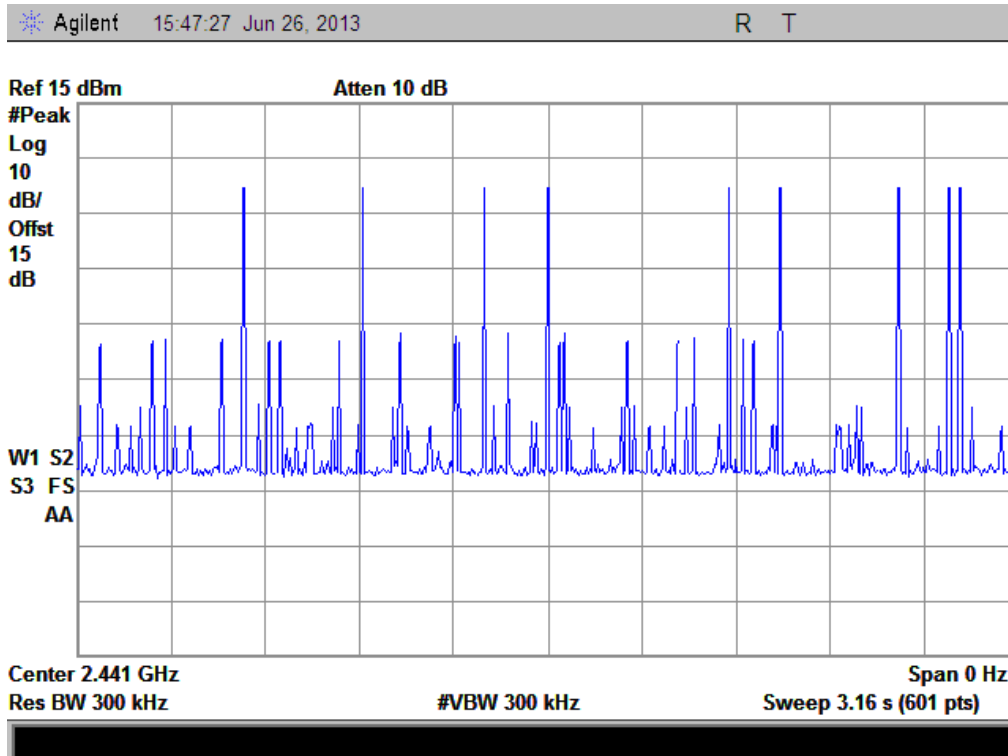

(Plot C: DH5 @ GFSK)



2.6.4.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:



DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.400	32	Plot A	0.128	0.4	PASS
DH3	1.667	12	Plot B	0.200		PASS
DH5	2.900	10	Plot C	0.290		PASS

B. Test Plots:



Note: the following plots record the Pulse Time of the Module carrier.

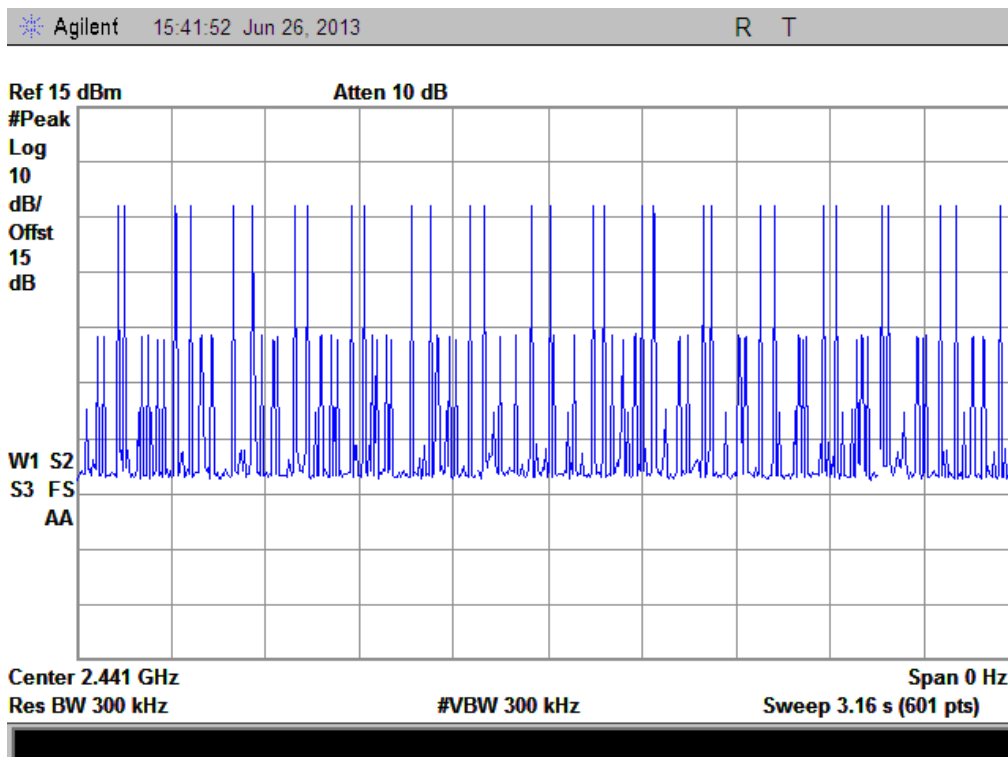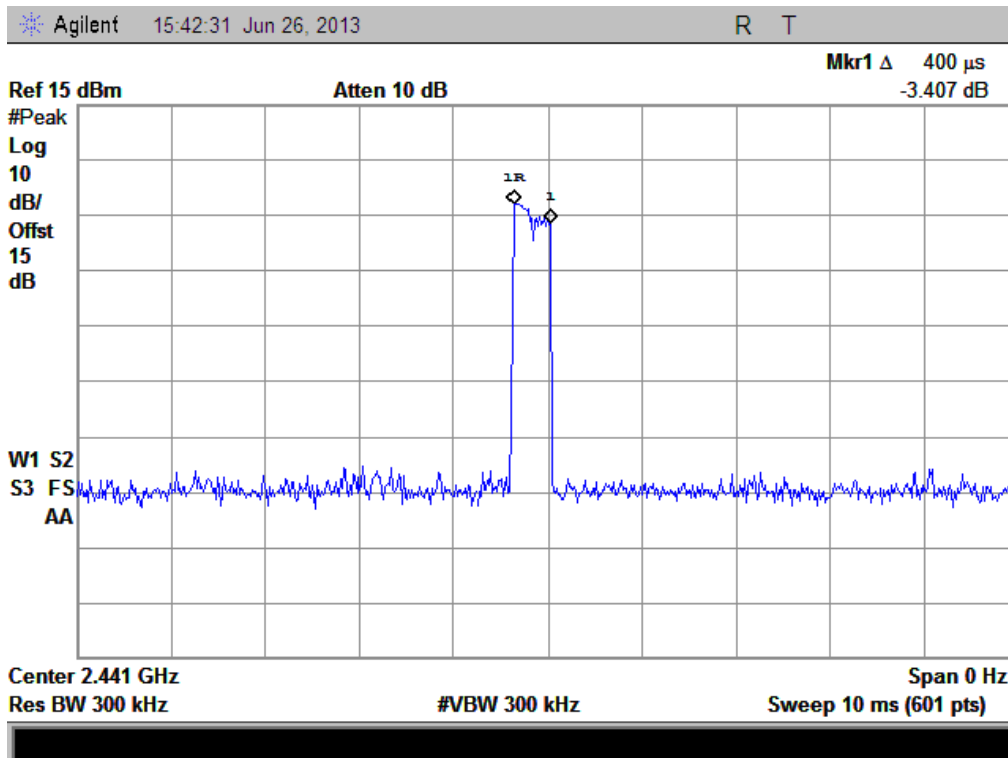

(Plot D: DH1 @ $\pi/4$ -DQPSK)

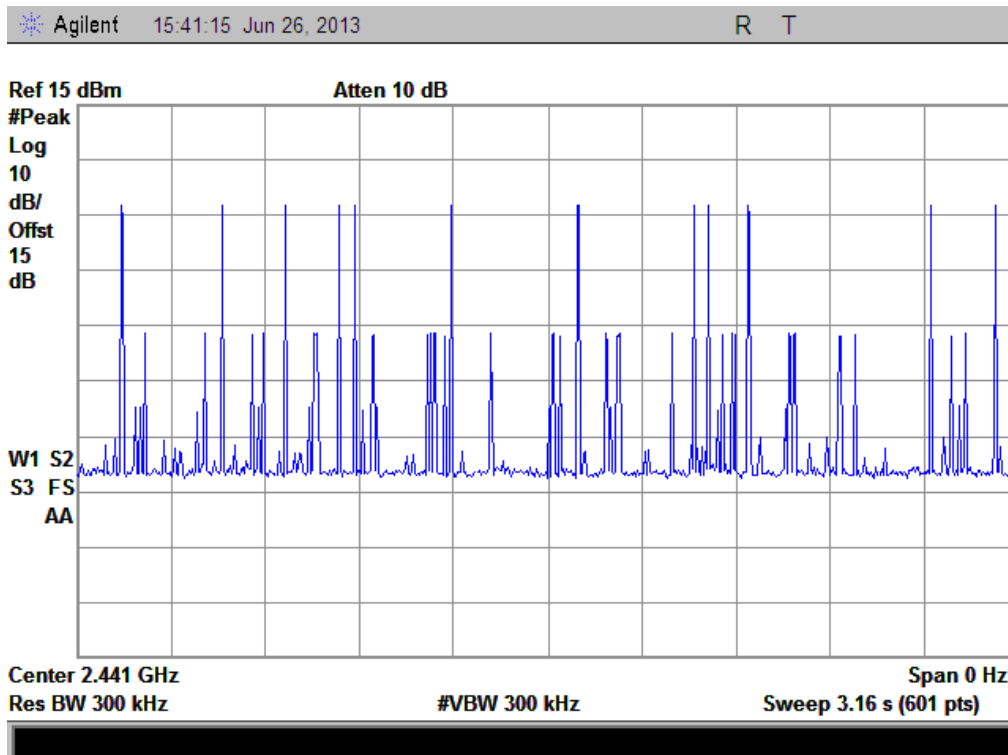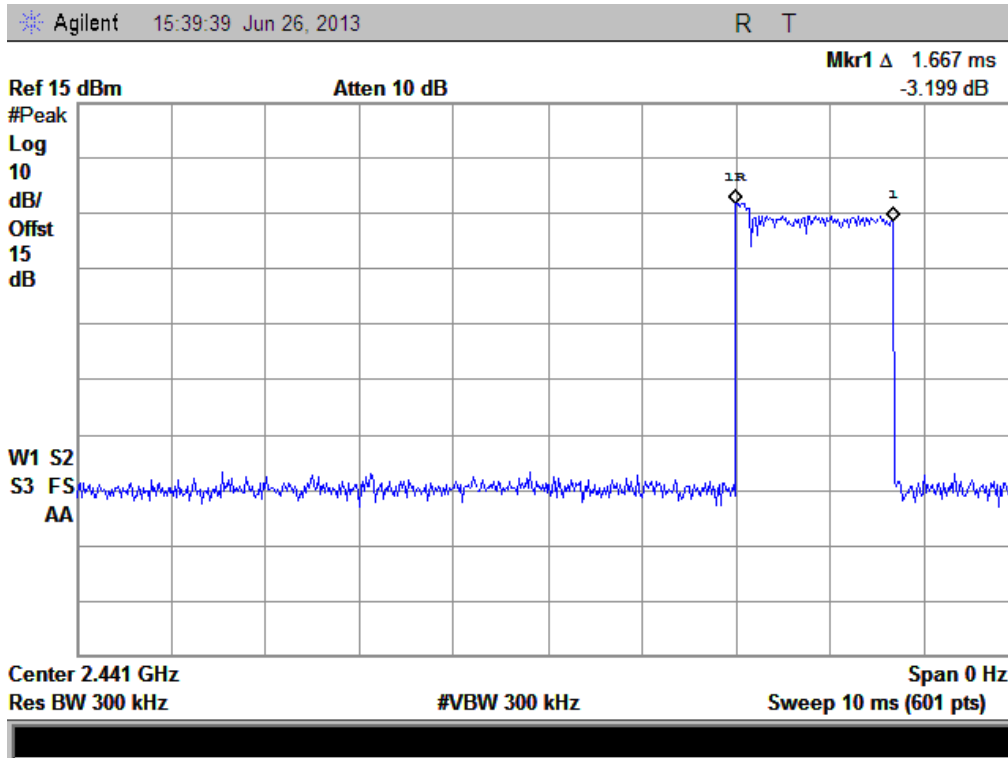

(Plot E: DH3 @ $\pi/4$ -DQPSK)

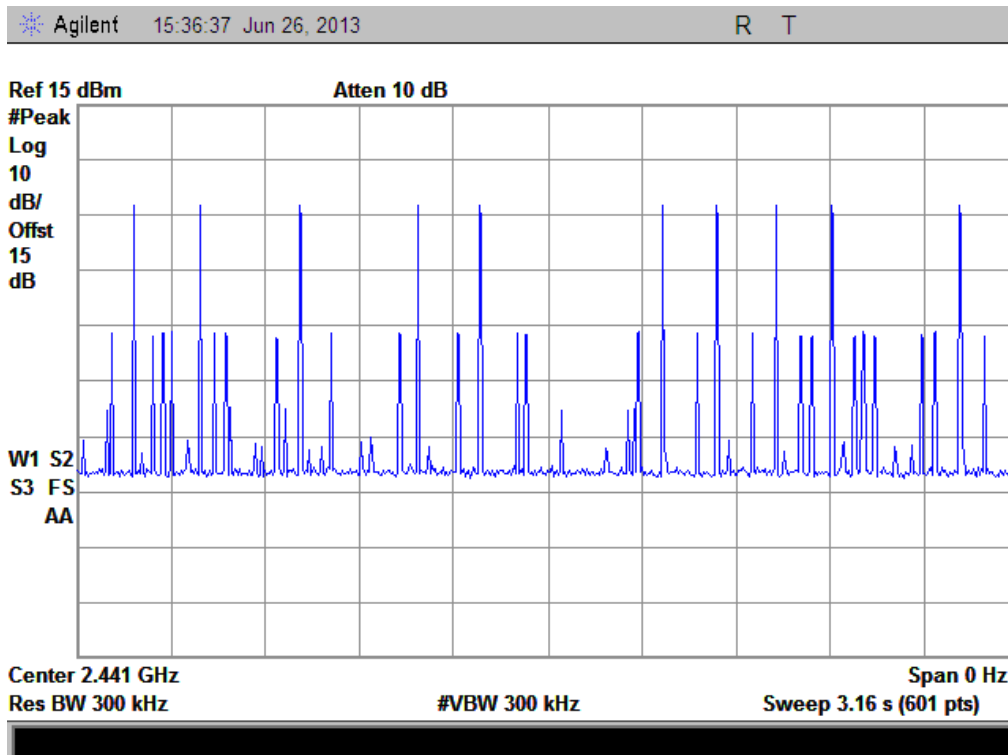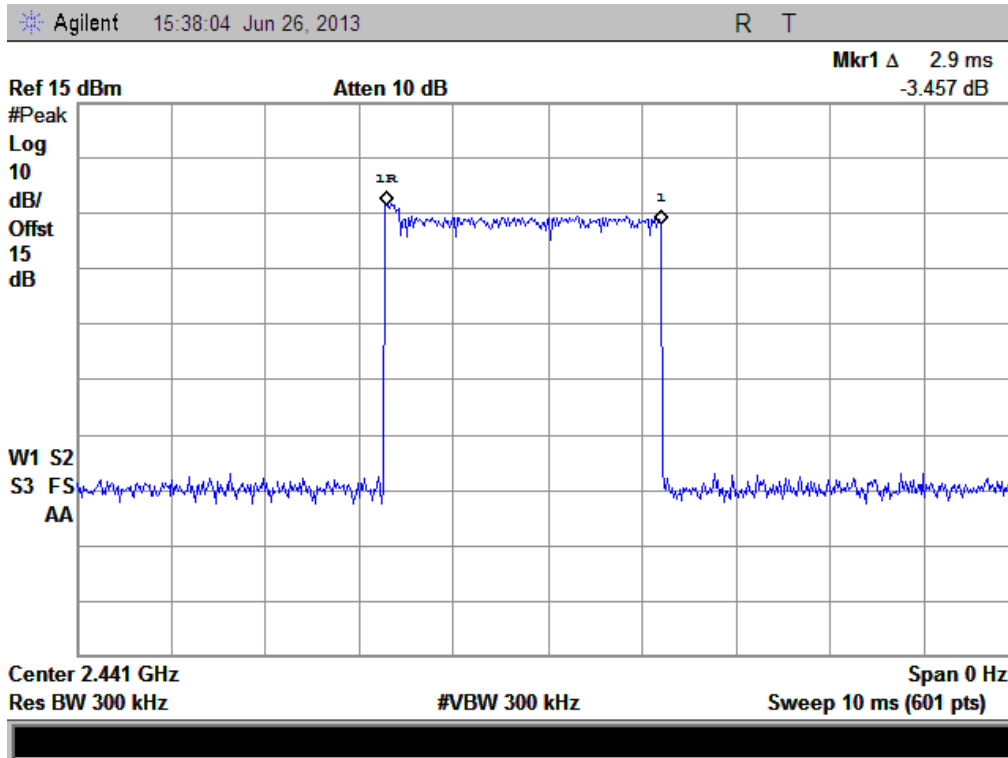

(Plot F: DH5 @ $\pi/4$ -DQPSK)


2.6.4.3. 8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.417	32	Plot A	0.133	0.4	PASS
DH3	1.667	12	Plot B	0.200		PASS
DH5	2.933	9	Plot C	0.264		PASS


B. Test Plots:


Note: the following plots record the Pulse Time of the Module carrier.

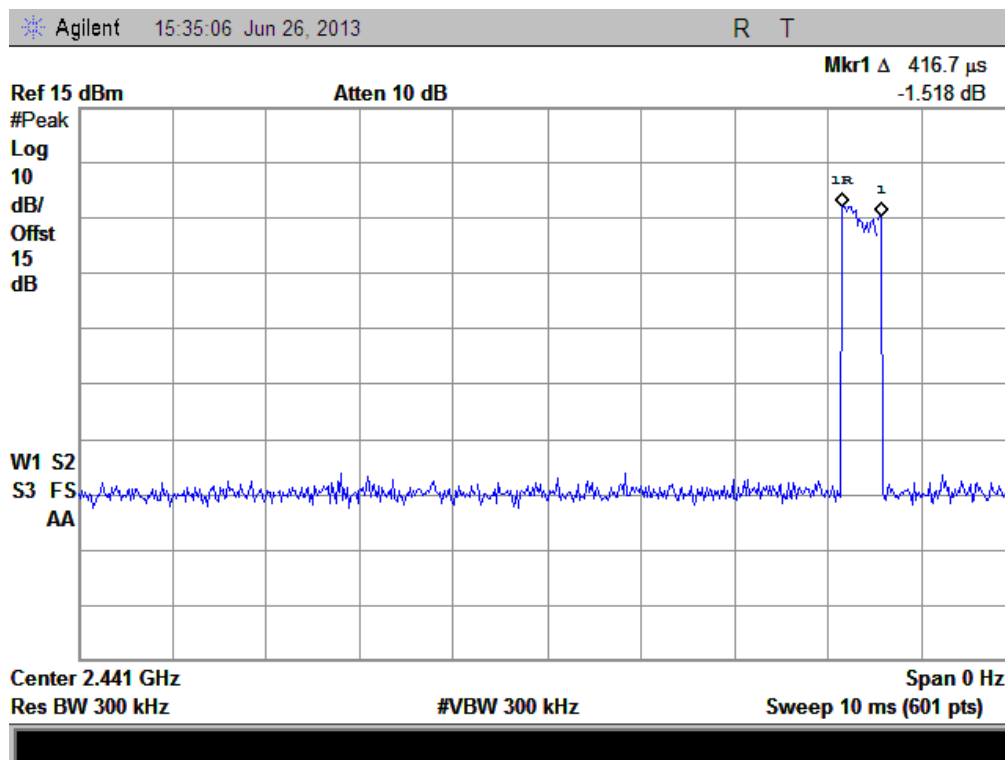

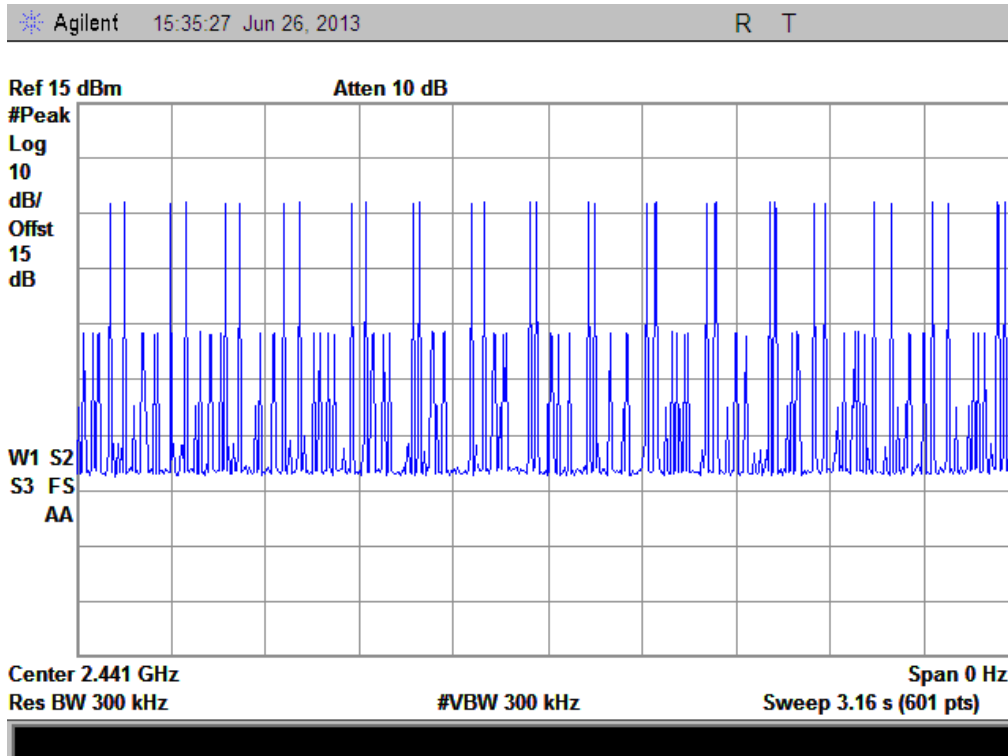



(Plot G: DH1 @ 8-DPSK)

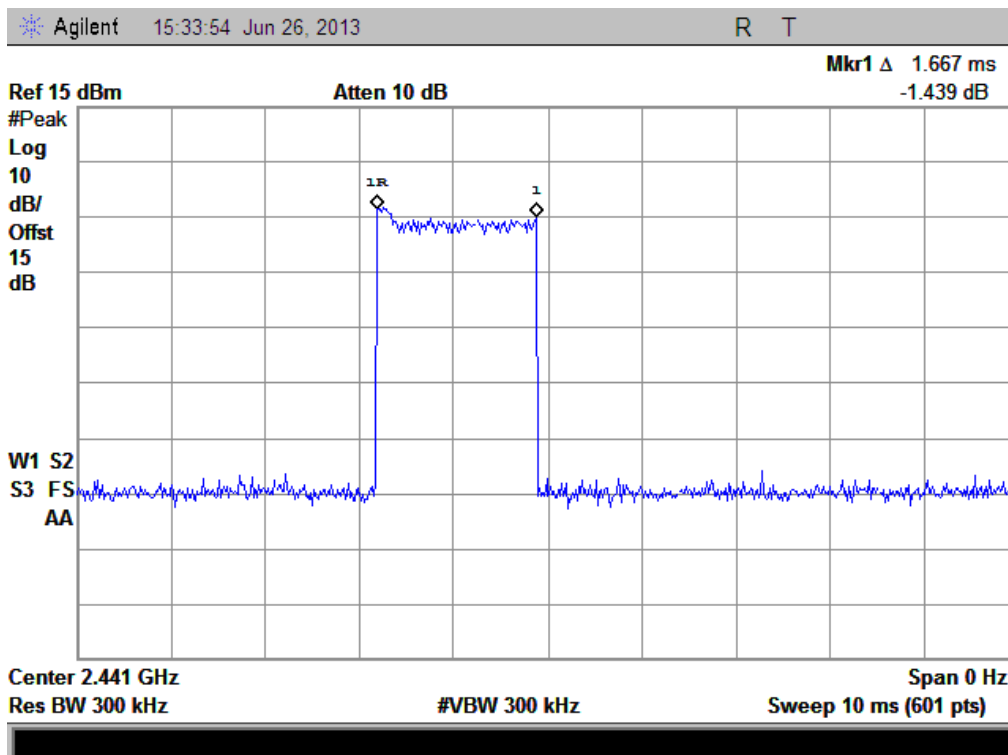

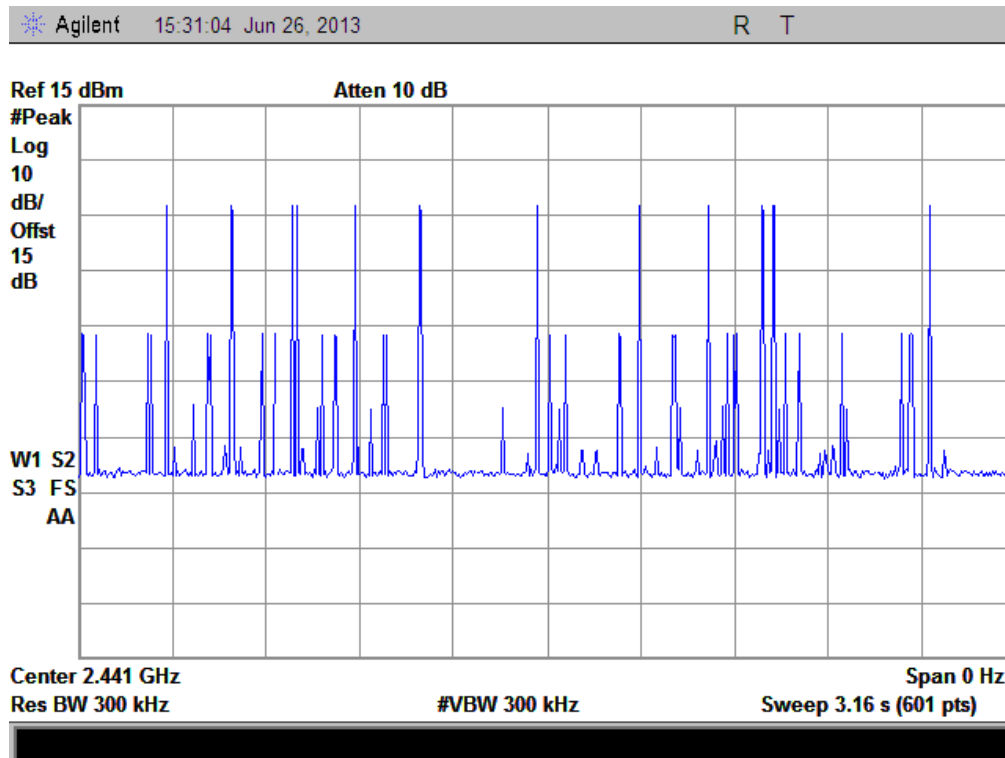

(Plot H: DH3 @ 8-DPSK)

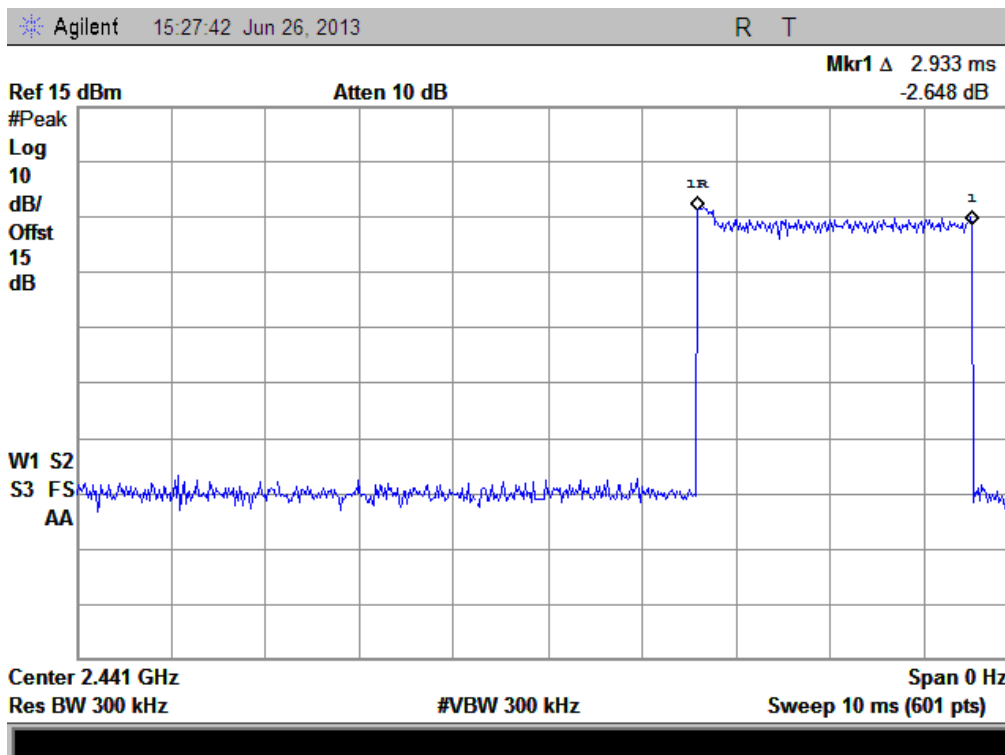

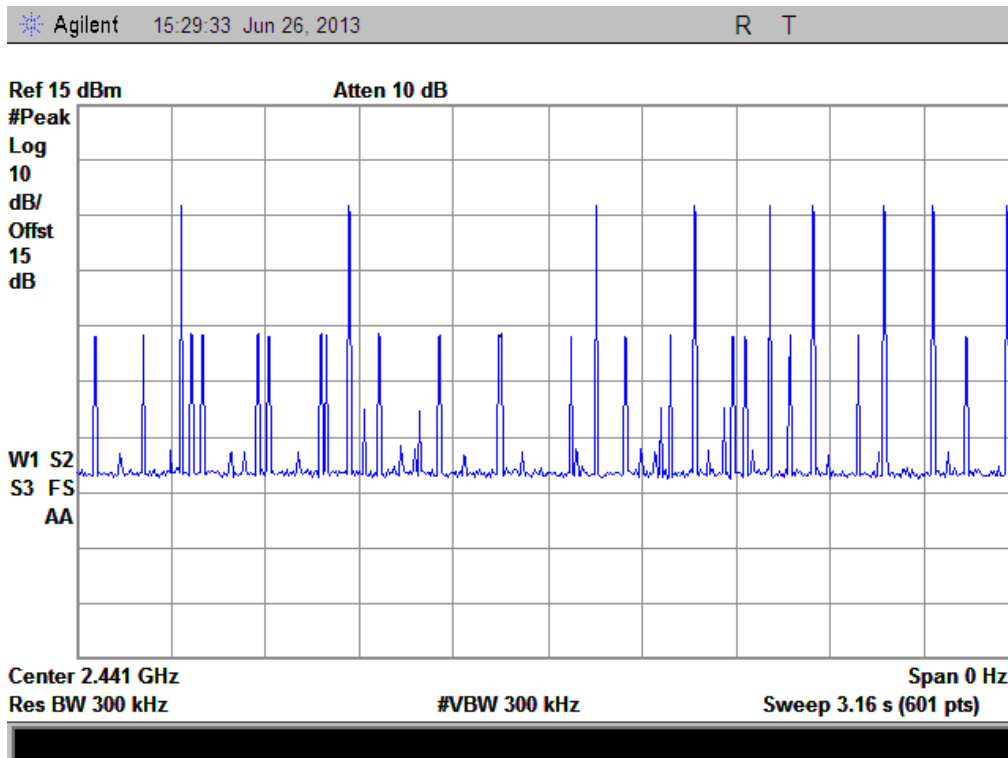

(Plot I: DH5 @ 8-DPSK)


2.7. Conducted Spurious Emissions and Band Edge

2.7.1. Requirement

According to FCC §15.247(d) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

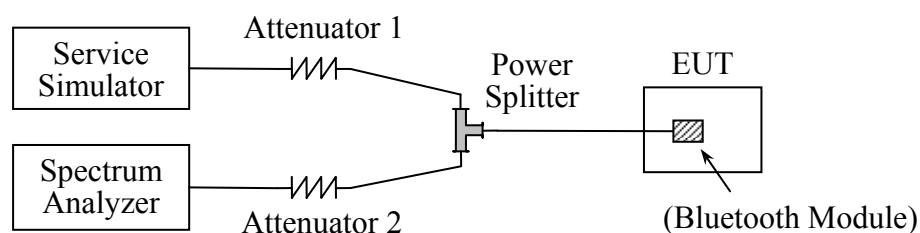

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Anritsu	MT8852B	6K00006210	2013.05.12	2014.05.11
Spectrum Analyzer	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Power Splitter	Weinschel	1506A	NW521	2013.05.12	2014.05.11
Attenuator 1	Resnet	20dB	(n.a.)	2013.05.12	2014.05.11
Attenuator 2	Resnet	3dB	(n.a.)	2013.05.12	2014.05.11

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1. GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-35.08	Plot A.1	0.923	-19.0	PASS
39	2441	-35.12	Plot B.1	-1.097	-21.1	PASS
78	2480	-35.07	Plot C.1	-2.009	-22.0	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

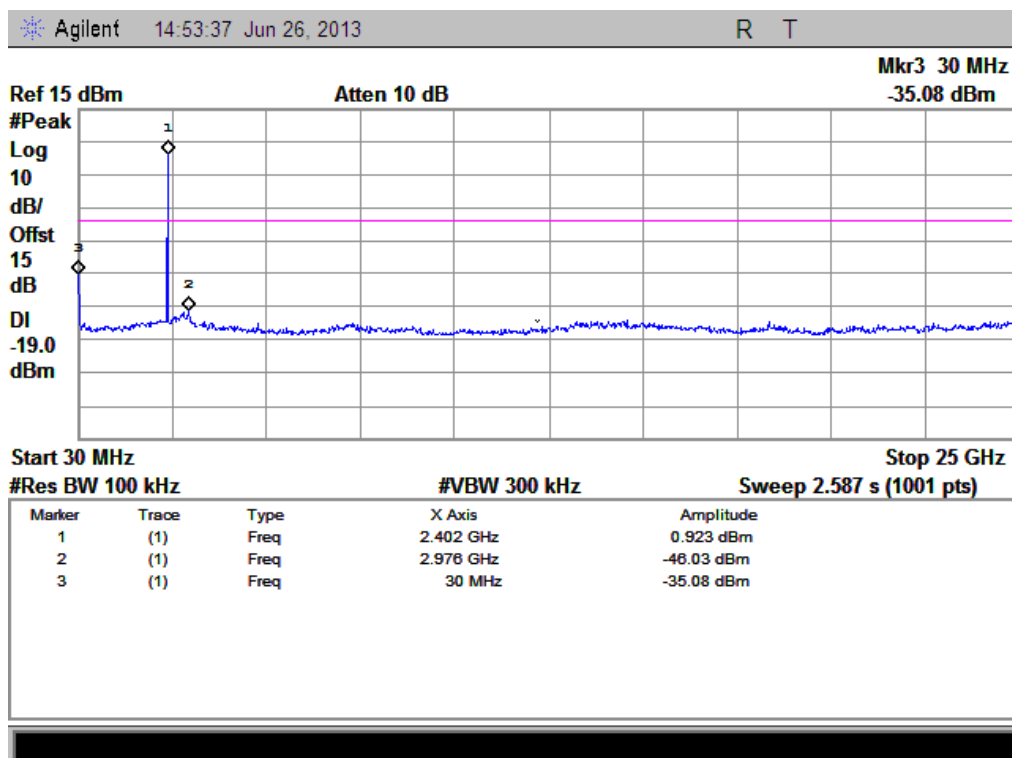


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

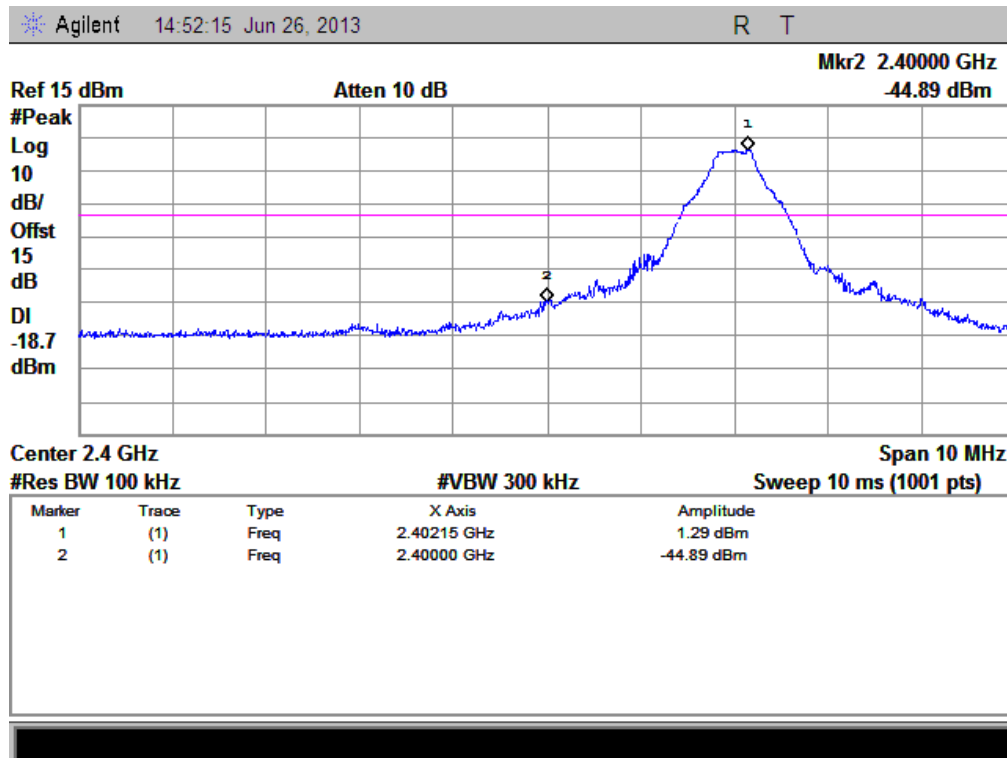


(Channel = 0, Band Edge with hopping off @ GFSK Mode)

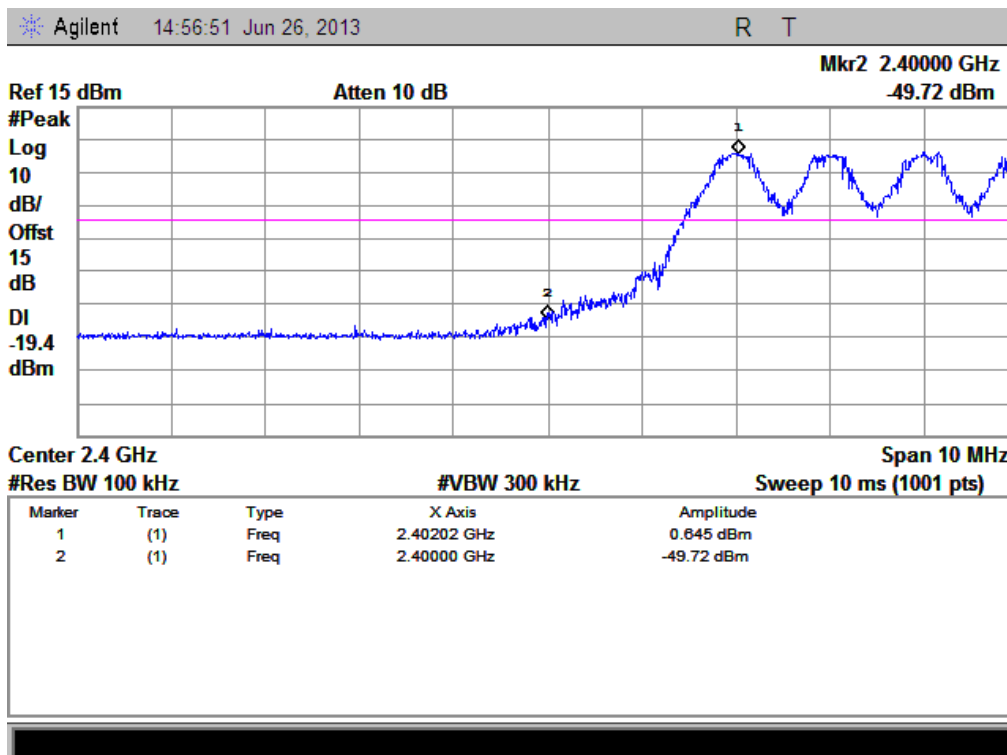


(Channel = 0, Band Edge with hopping on @ GFSK Mode)

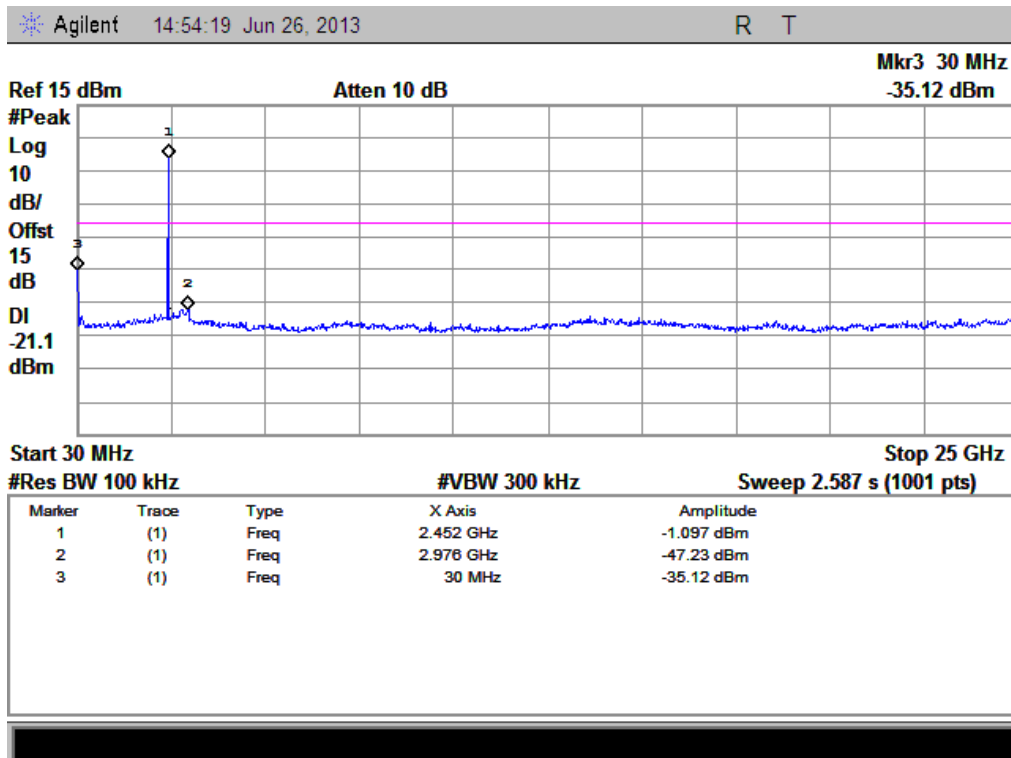


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

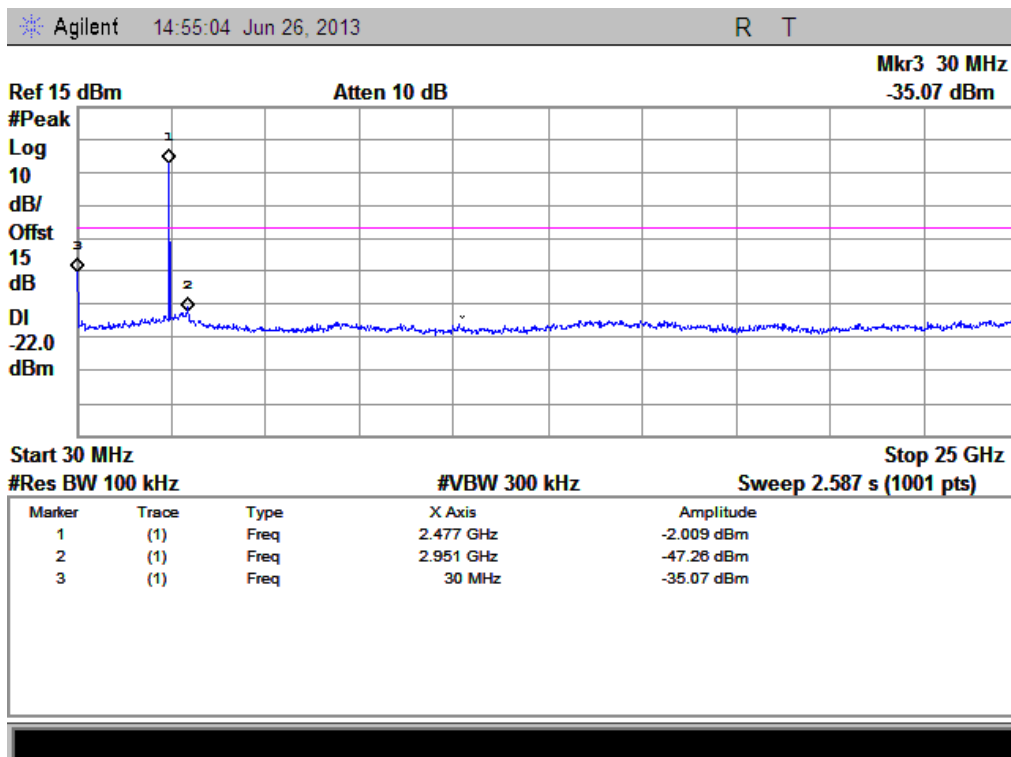

(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

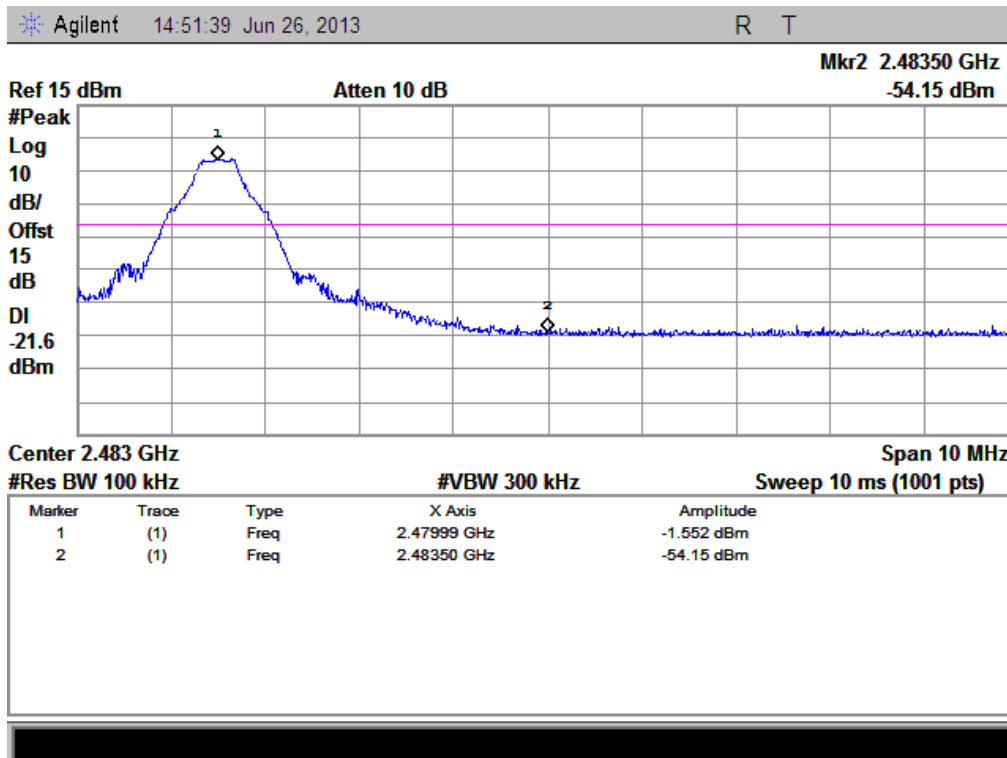

(Channel = 78, Band Edge with hopping off @ GFSK Mode)

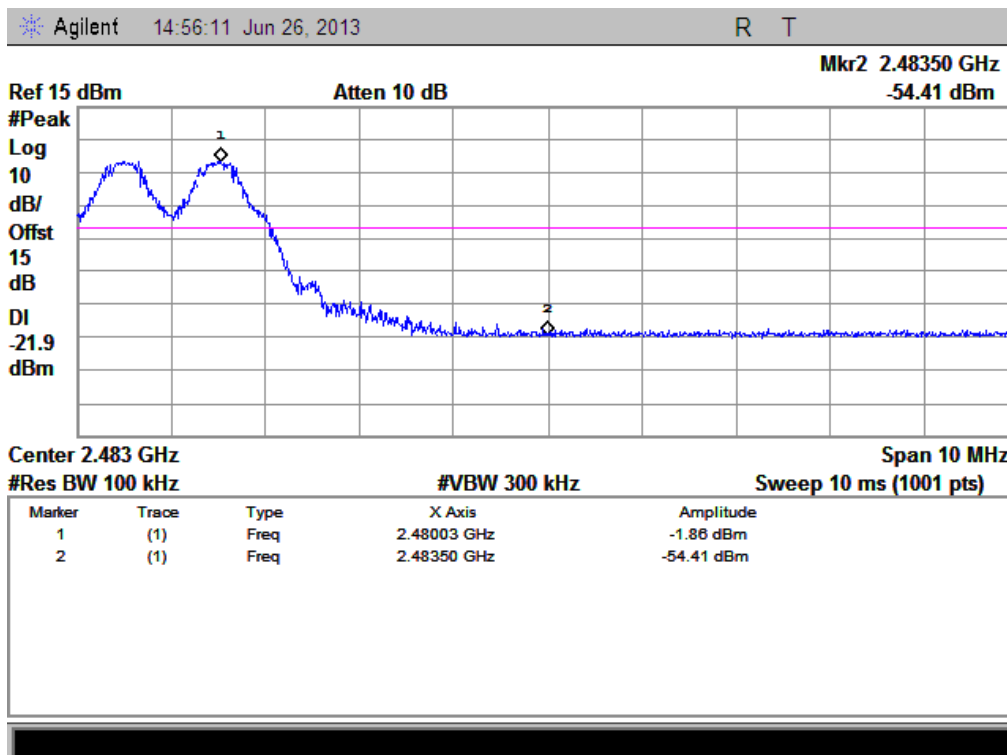

(Channel = 78, Band Edge with hopping on @ GFSK Mode)


2.7.4.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-47.44	Plot D.1	-4.609	-24.6	PASS
39	2441	-47.14	Plot E.1	-2.949	-22.9	PASS
78	2480	-35.32	Plot F.1	-5.171	-25.2	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

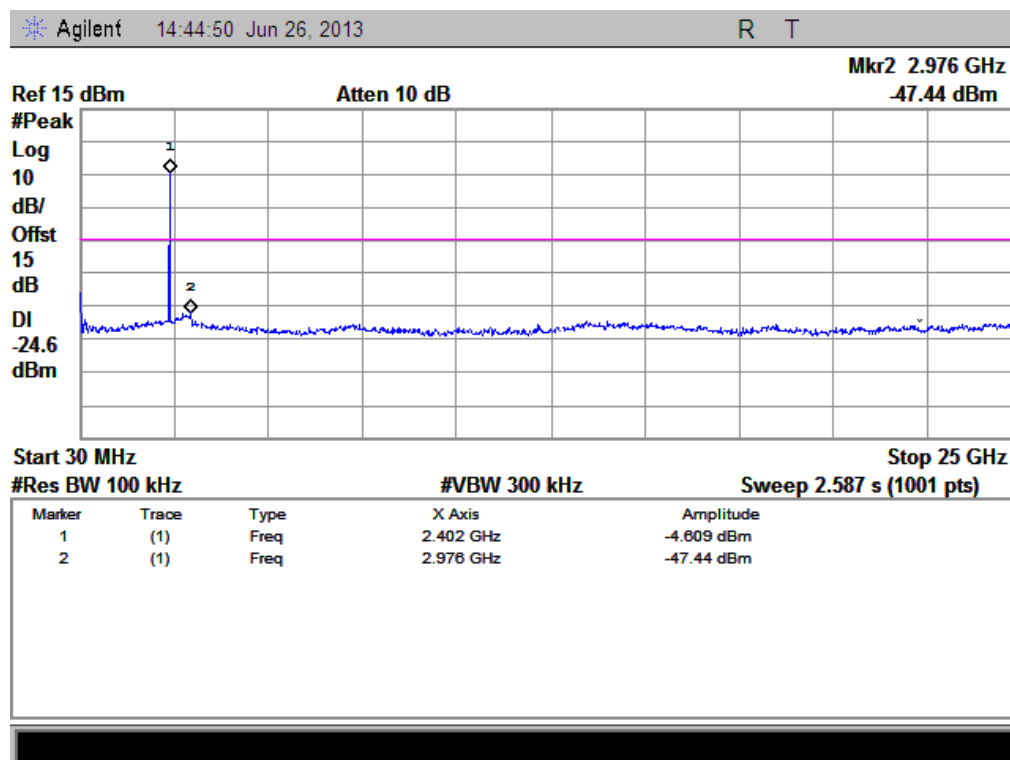


(Plot D.1: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

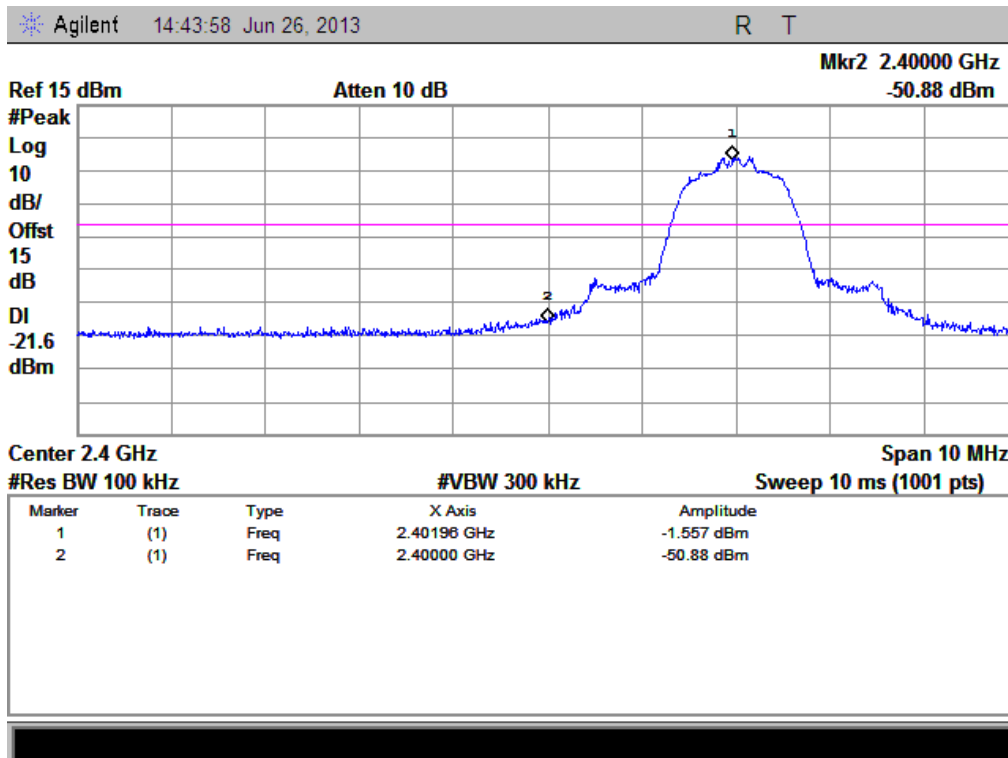


(Channel = 0, Band Edge with hopping off @ $\pi/4$ -DQPSK)

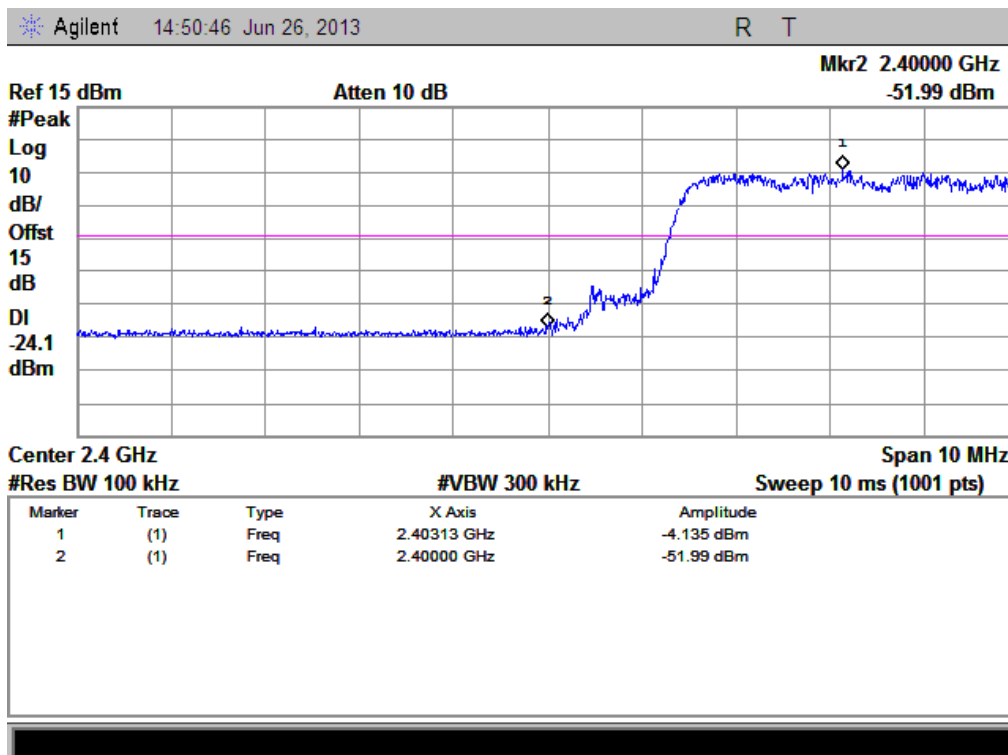


(Channel = 0, Band Edge with hopping on @ $\pi/4$ -DQPSK)

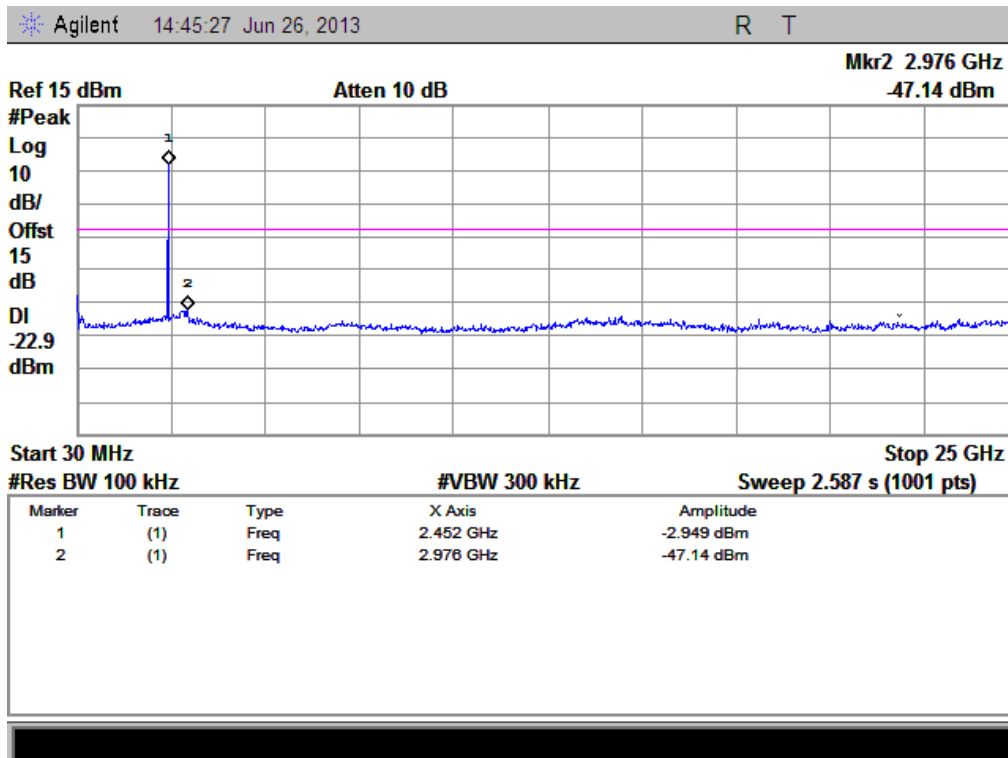


(Plot E.1: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

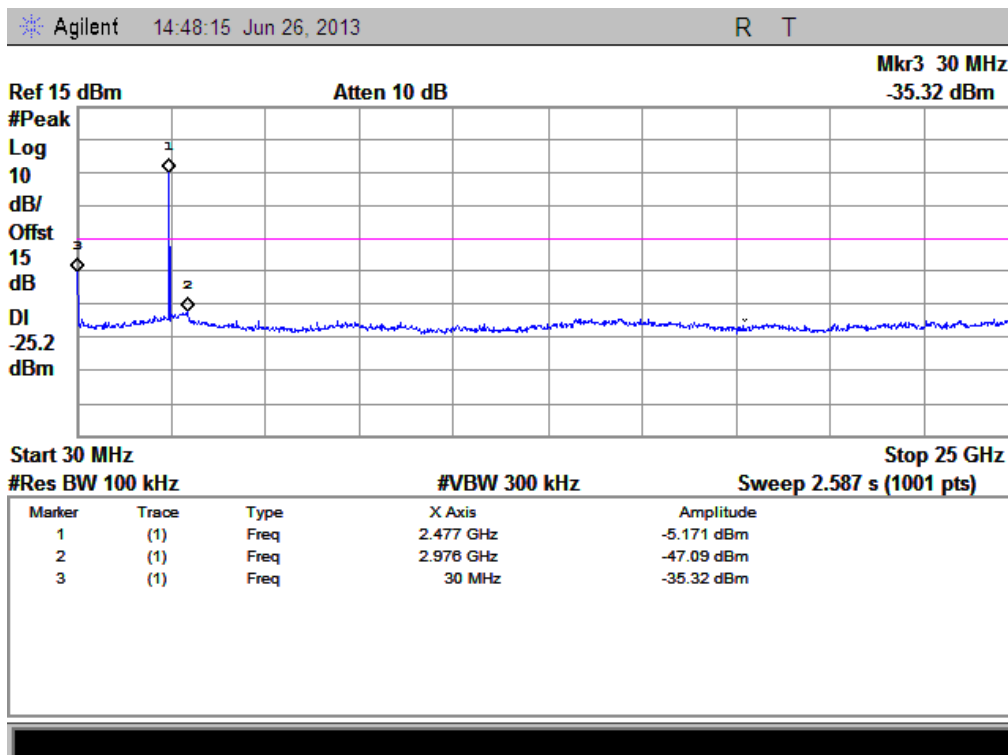

(Plot F.1: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

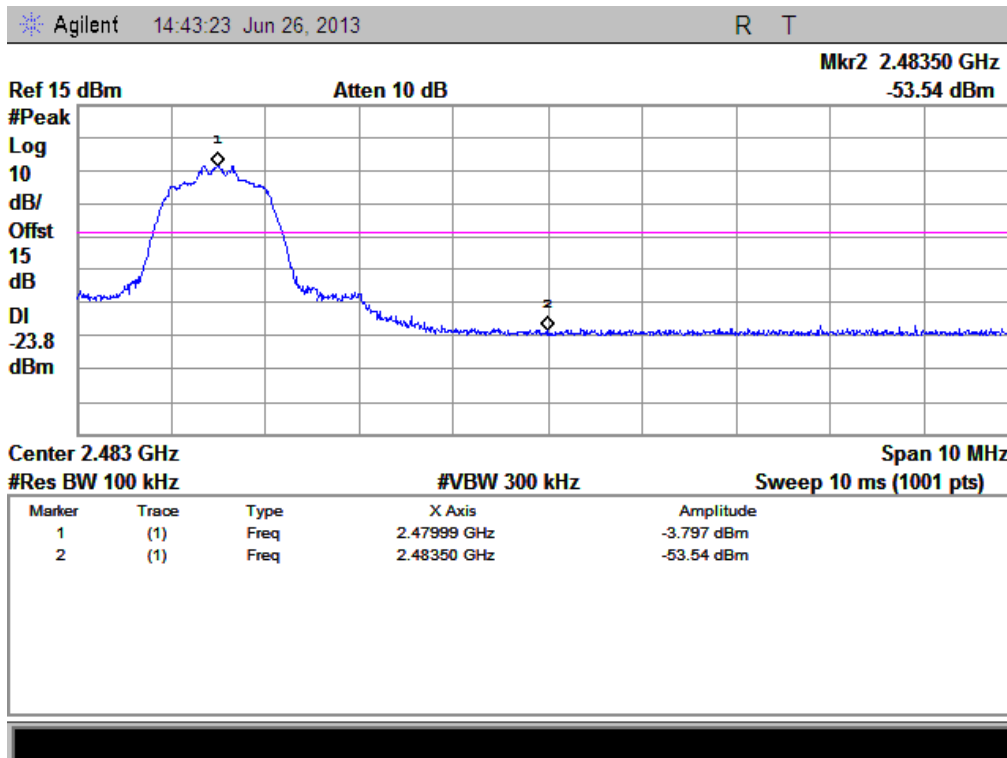

(Channel = 78, Band Edge with hopping off @ $\pi/4$ -DQPSK)

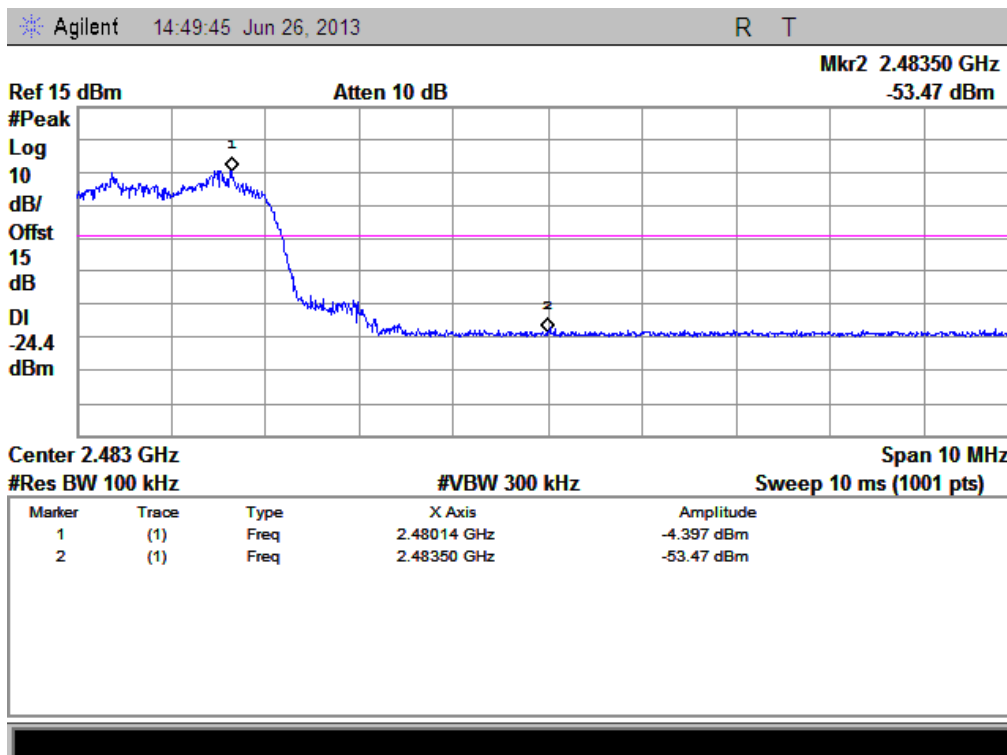

(Channel = 78, Band Edge with hopping on @ $\pi/4$ -DQPSK)


2.7.4.3. 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-47.08	Plot G.1	-4.195	-24.2	PASS
39	2441	-46.75	Plot H.1	-2.622	-22.6	PASS
78	2480	-46.49	Plot I.1	-3.995	-24.0	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

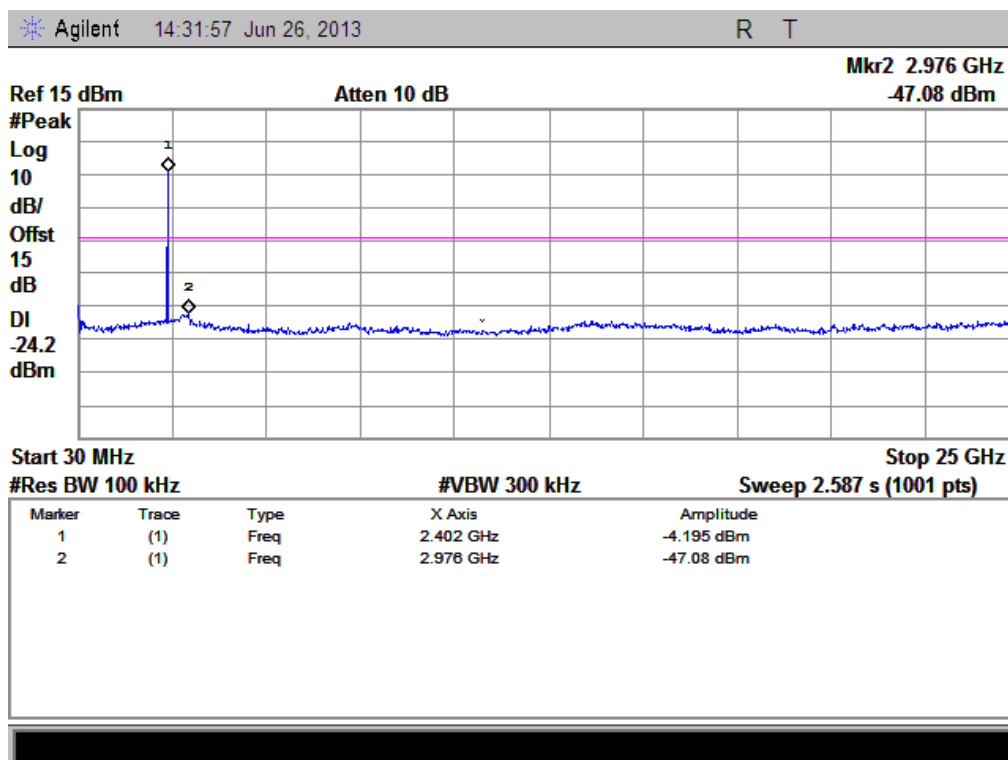


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)

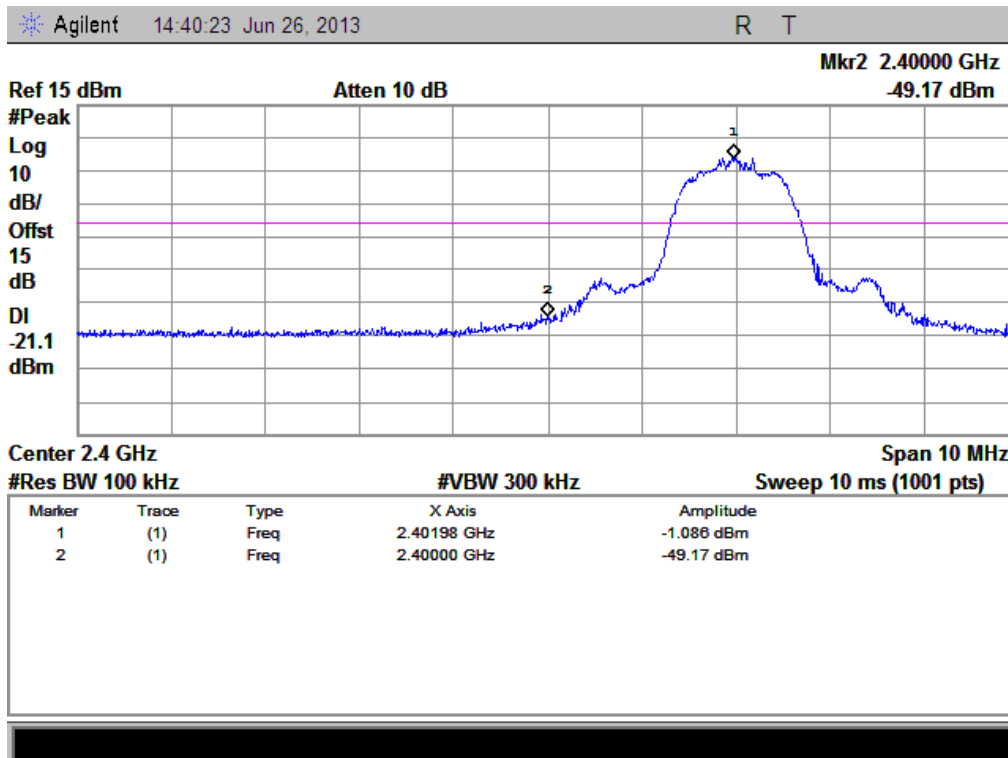


(Channel = 0, Band Edge with hopping off @ 8-DPSK)

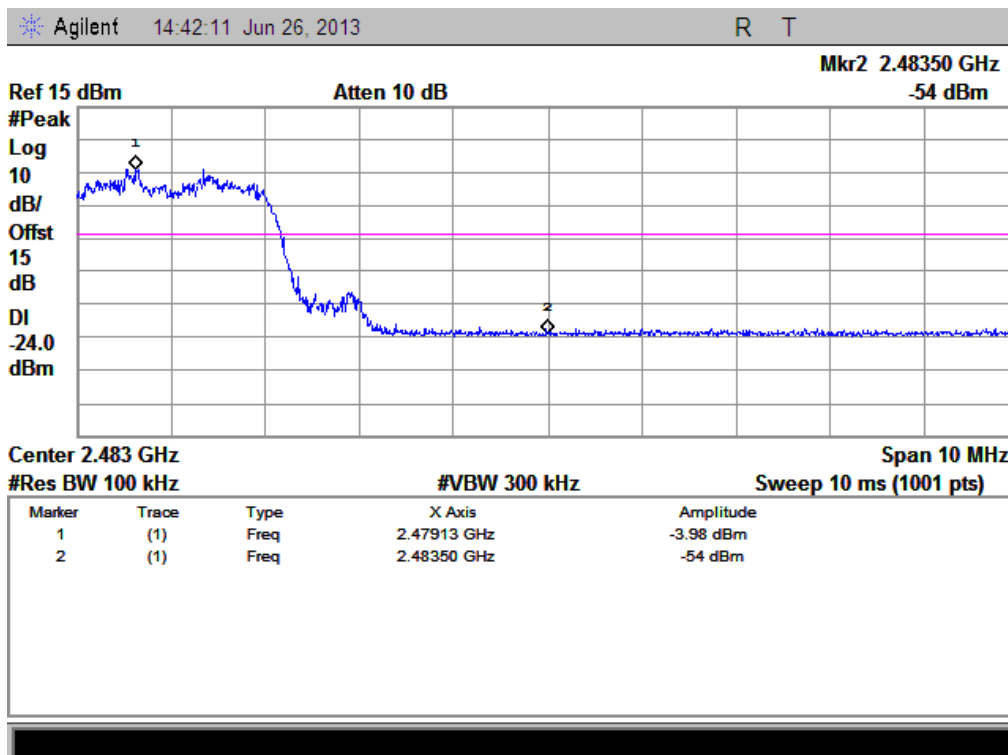


(Channel = 0, Band Edge with hopping on @ 8-DPSK)

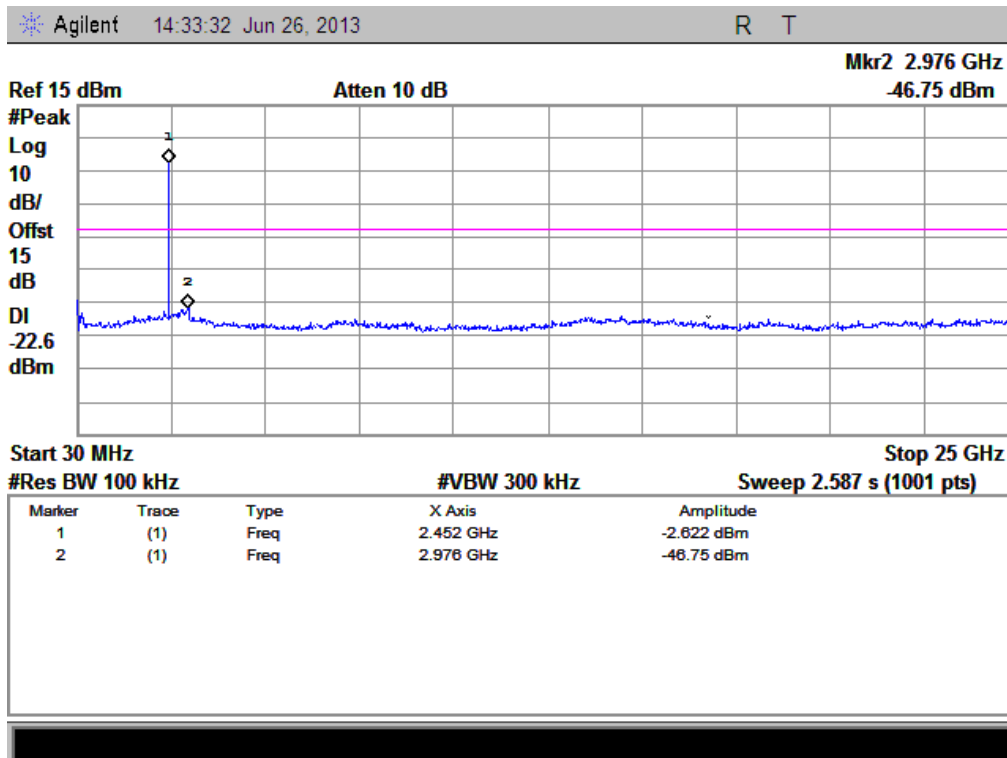


(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

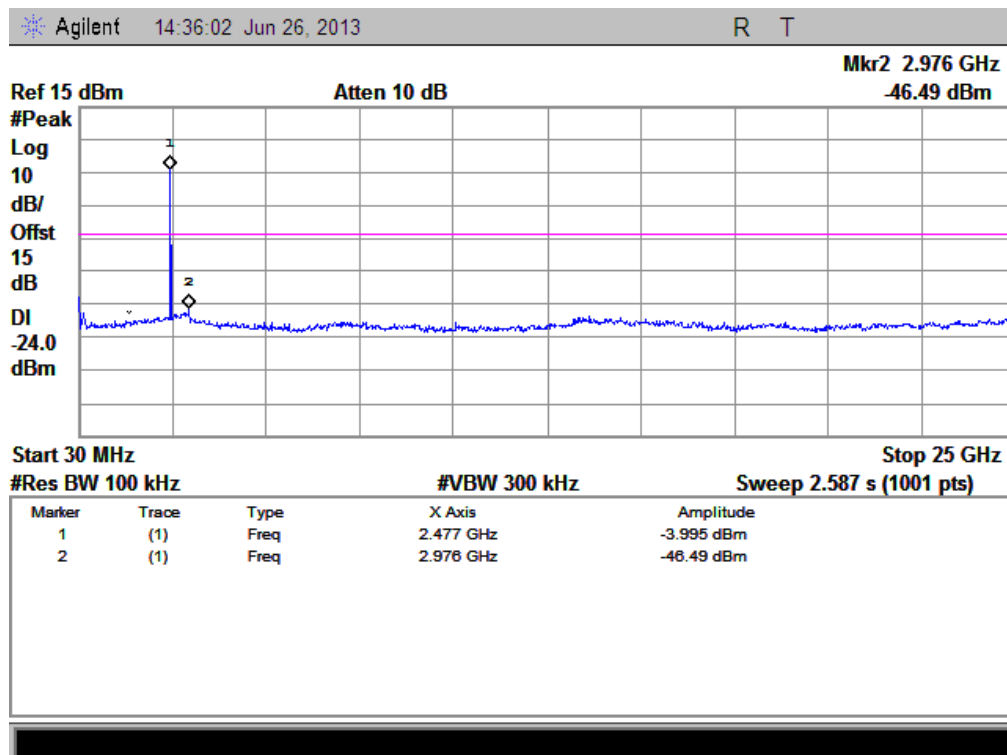

(Plot I.1: Channel = 78, 30MHz to 25GHz @ 8-DPSK)

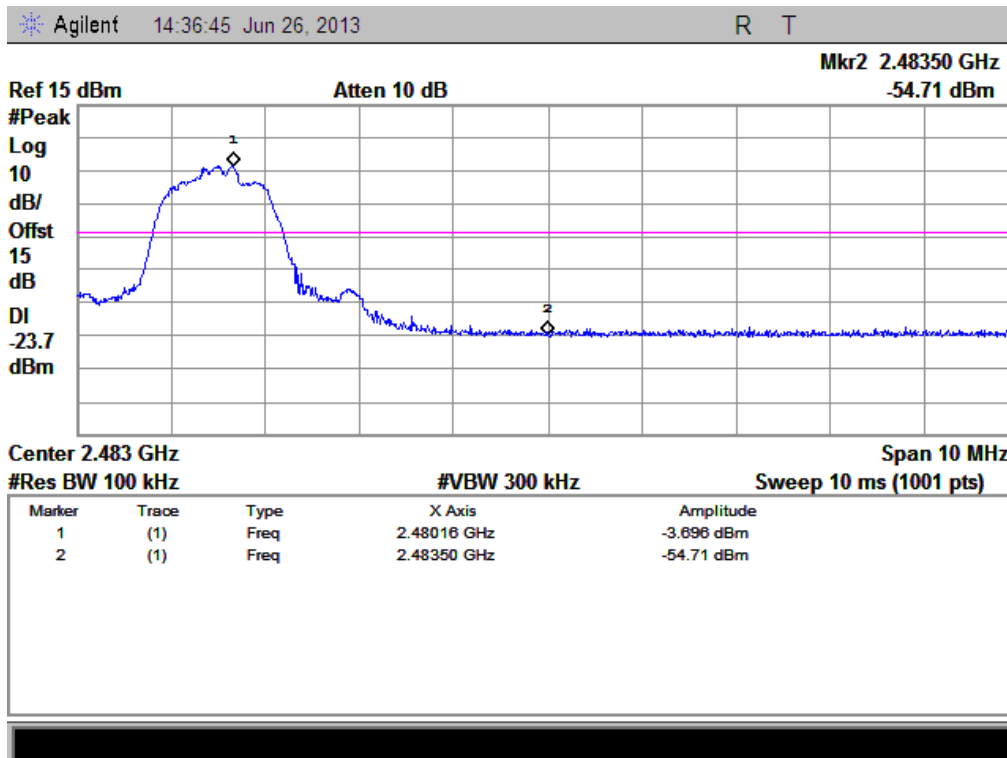

(Channel = 78, Band Edge with hopping off @ 8-DPSK)

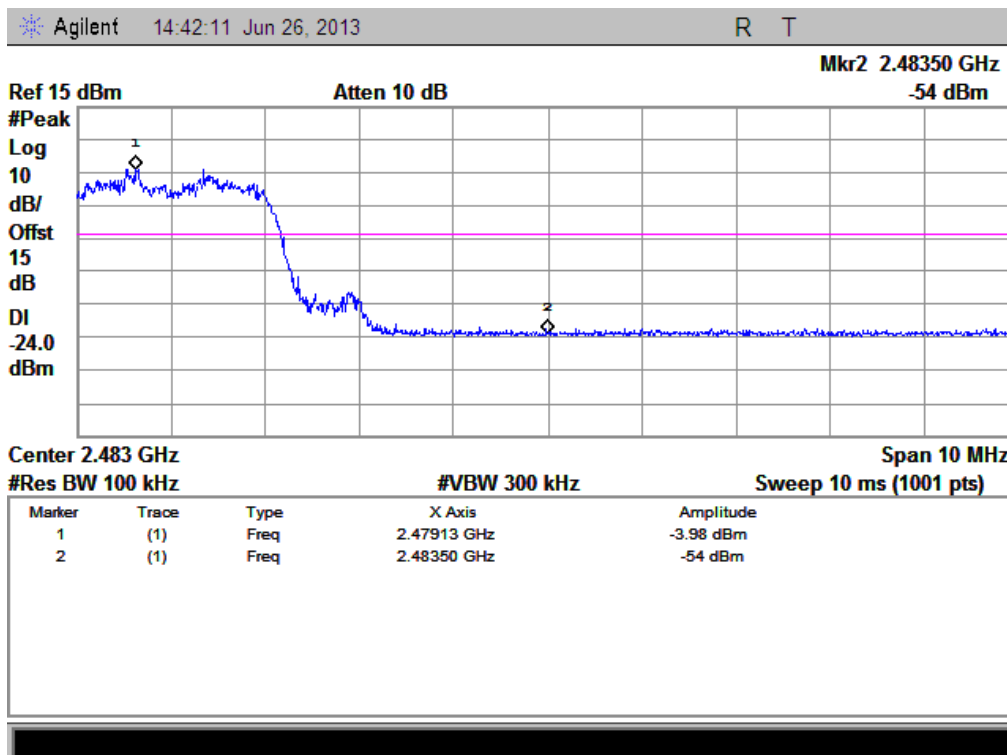

(Channel = 78, Band Edge with hopping on @ 8-DPSK)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup:

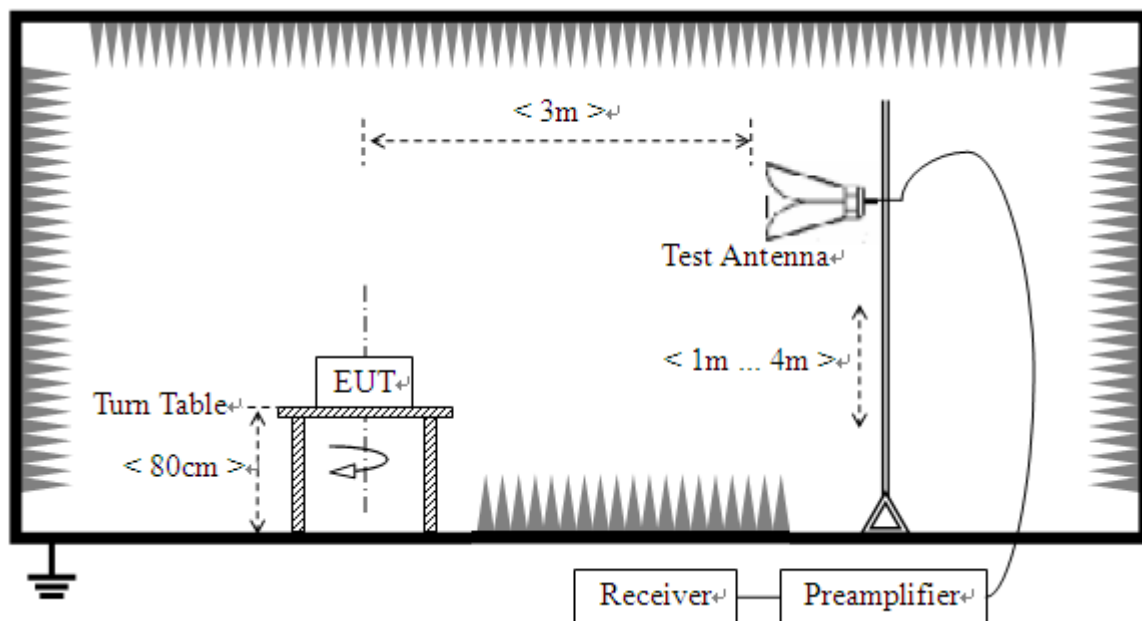

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2013.05.12	2014.05.11
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2013.05.12	2014.05.11
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2013.05.12	2014.05.11

2.8.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB } \mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.8.3.1. GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2372.54	PK	49.67	-30.93	32.56	51.30	74	Pass
0	2439.80	AV	41.23	-30.93	32.56	42.86	54	Pass
78	2487.74	PK	44.87	-29.05	32.50	48.32	74	Pass
78	2488.62	AV	33.57	-29.05	32.50	37.02	54	Pass


B. Test Plots:

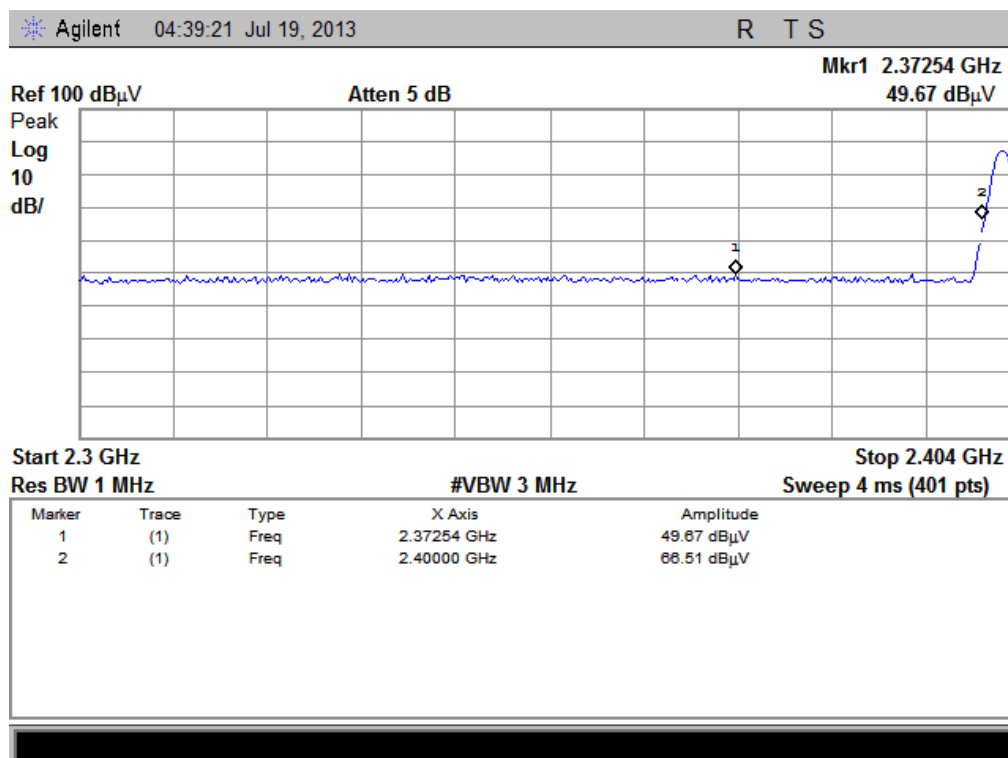


(Plot A1: Channel = 0 PEAK @ GFSK)

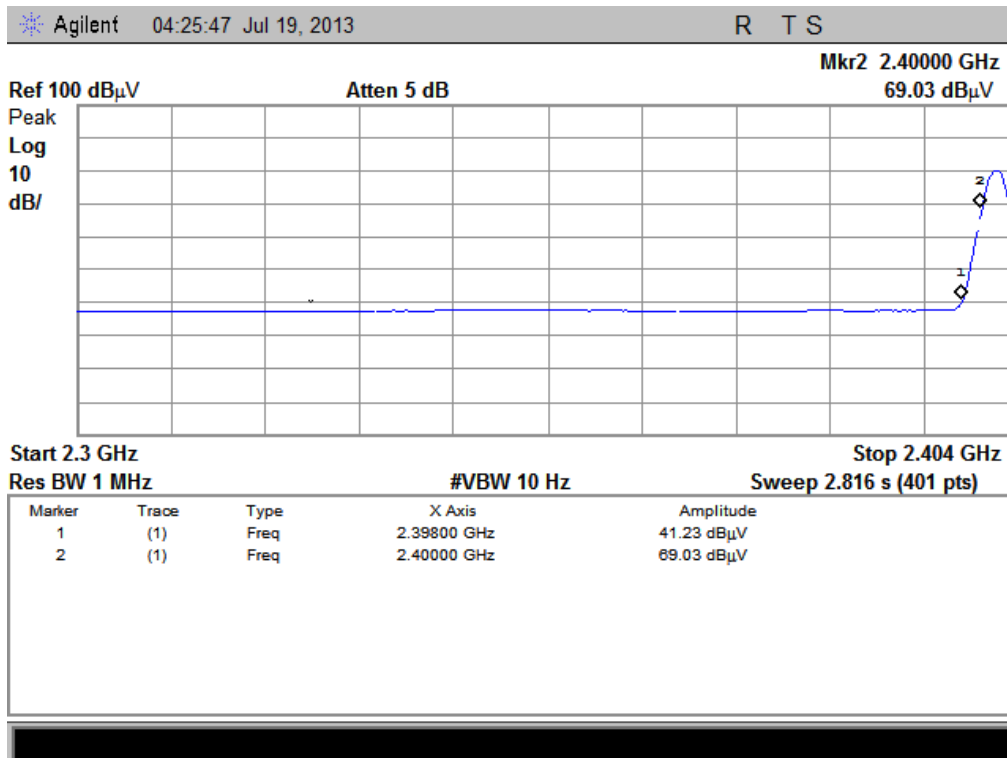

(Plot A2: Channel = 0 AVERAGE @ GFSK)

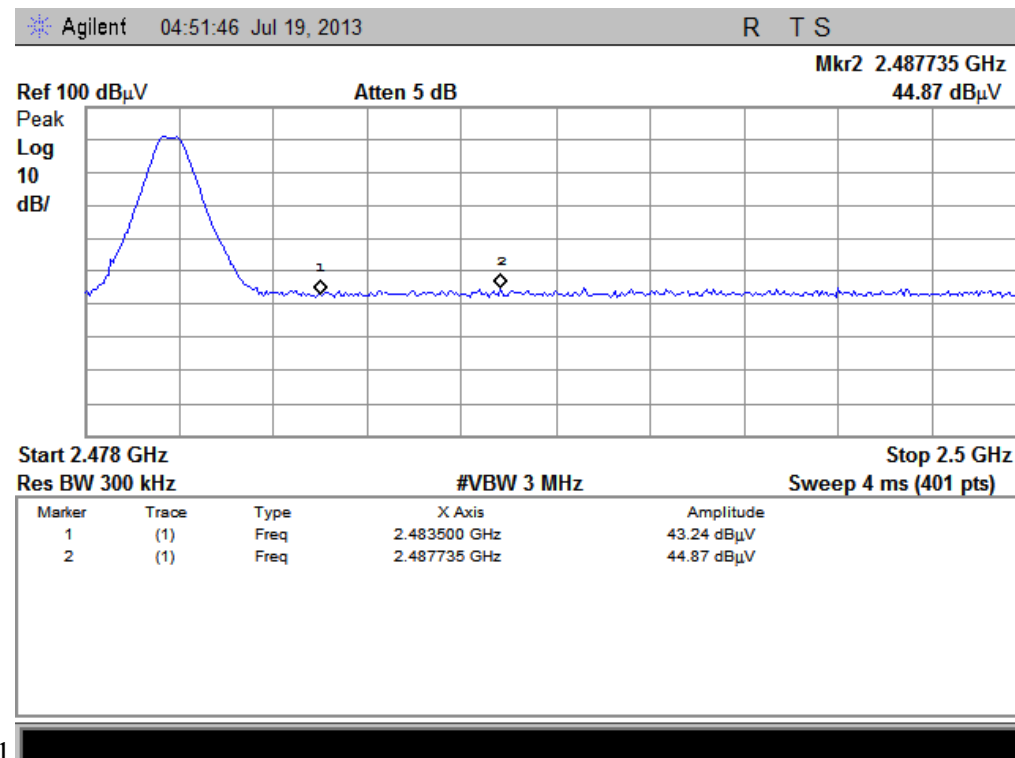

(Plot B1: Channel = 78 PEAK @ GFSK)

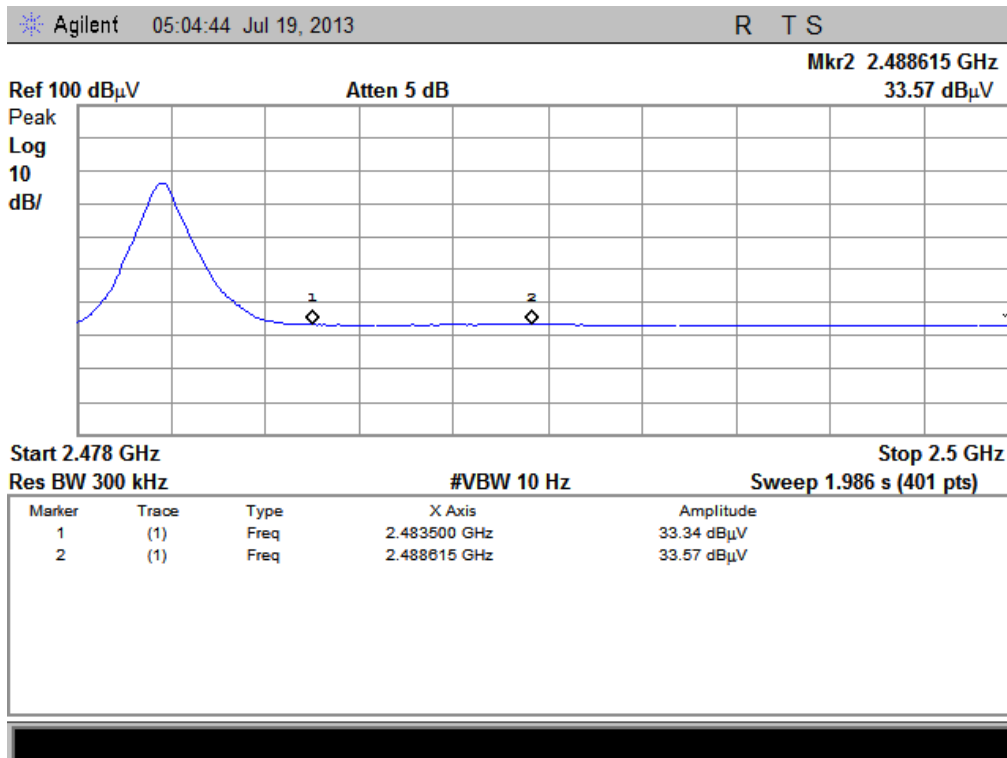


(Plot B2: Channel = 78 AVERAGE @ GFSK)

2.8.3.2. $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2328.34	PK	50.14	-30.93	32.56	51.77	74	Pass
0	2398.00	AV	41.35	-30.93	32.56	42.98	54	Pass
78	2488.73	PK	44.63	-29.05	32.50	48.08	74	Pass
78	2488.29	AV	33.48	-29.05	32.50	36.93	54	Pass


B. Test Plots:

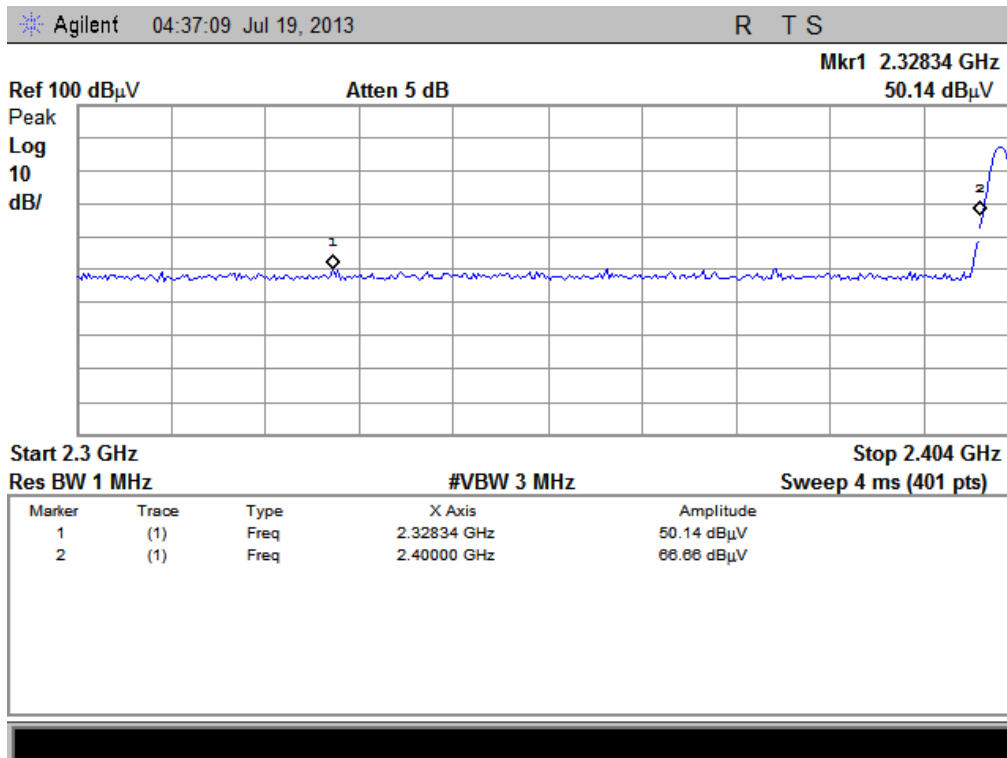


(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)

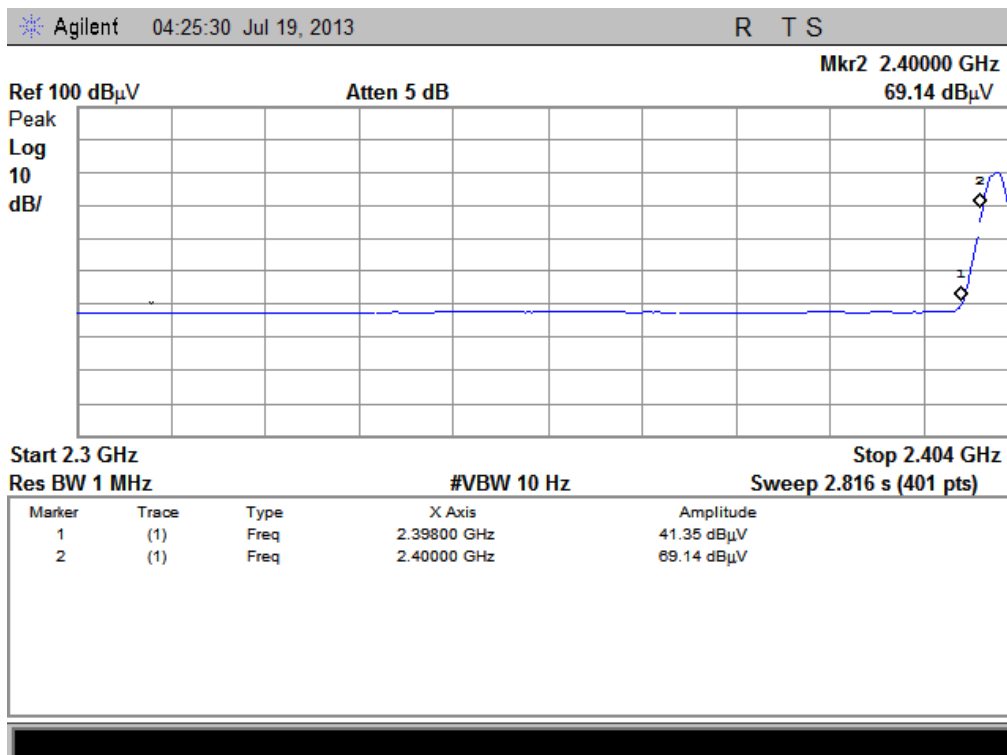

(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)

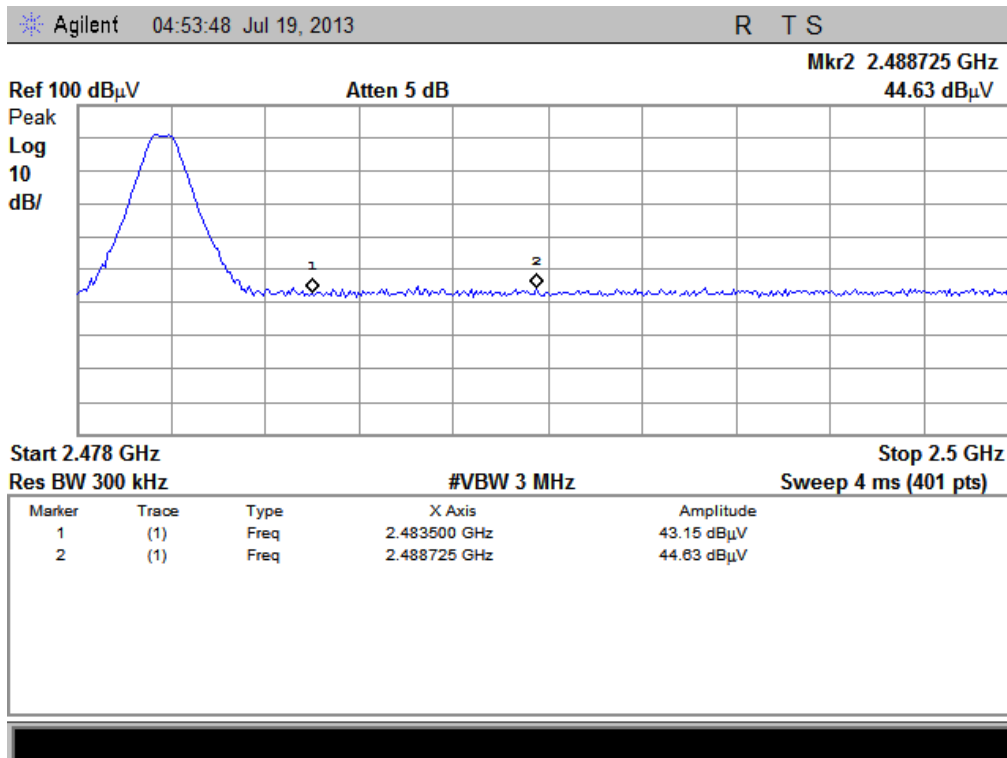

(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)

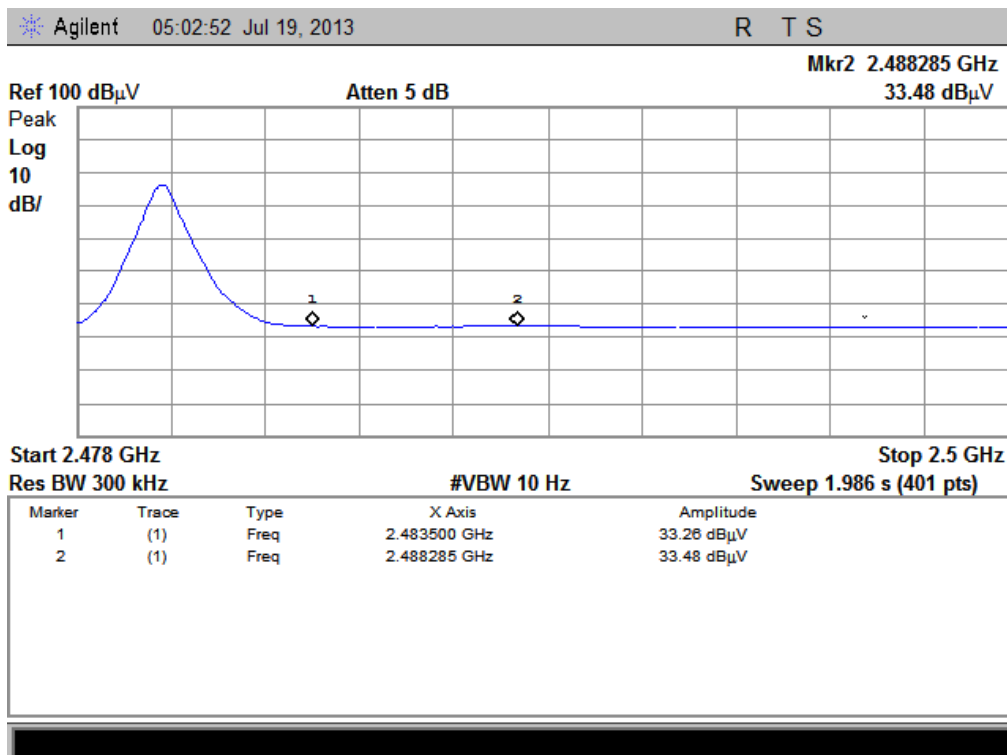


(Plot D2: Channel = 78 AVERAGE @ $\pi/4$ -DQPSK)

2.8.3.3. 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2367.34	PK	50.59	-30.93	32.56	52.22	74	Pass
0	2398.00	AV	41.20	-30.93	32.56	42.83	54	Pass
78	2486.47	PK	44.79	-29.05	32.50	48.24	74	Pass
78	2489.06	AV	33.54	-29.05	32.50	36.99	54	Pass


B. Test Plots:

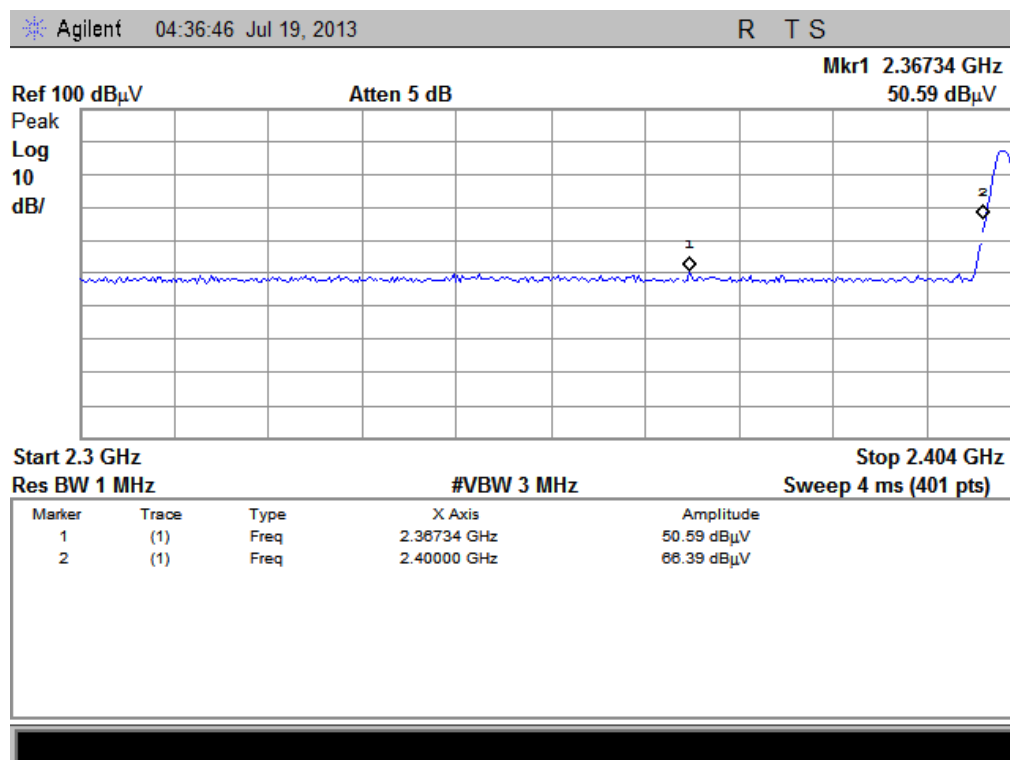


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

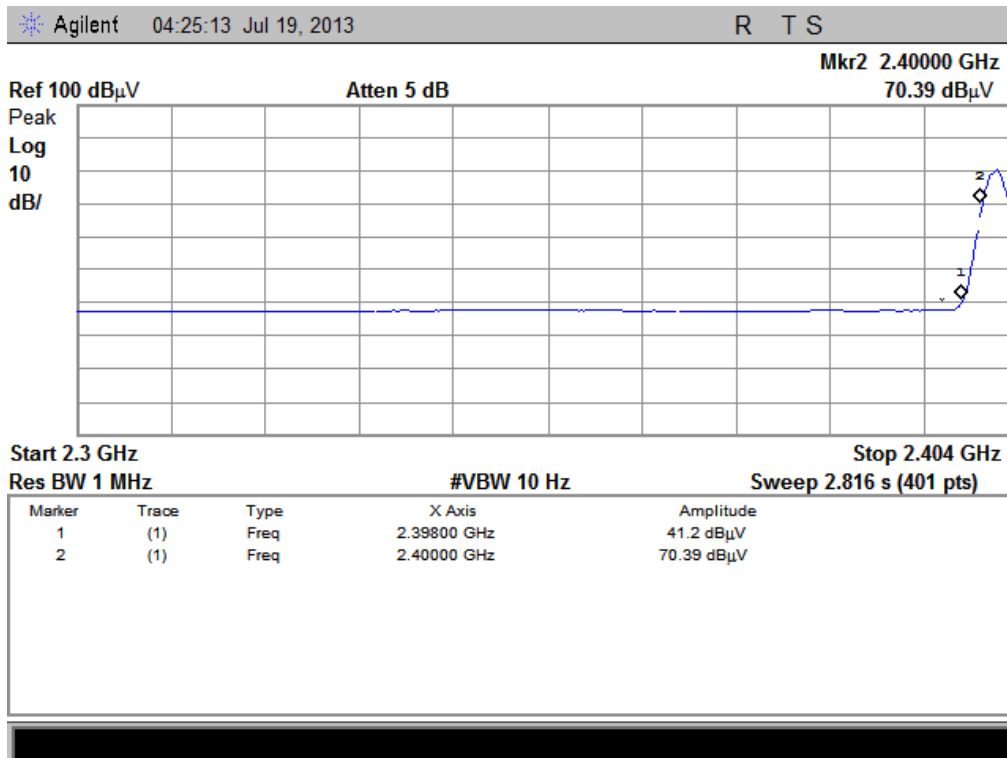

(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)

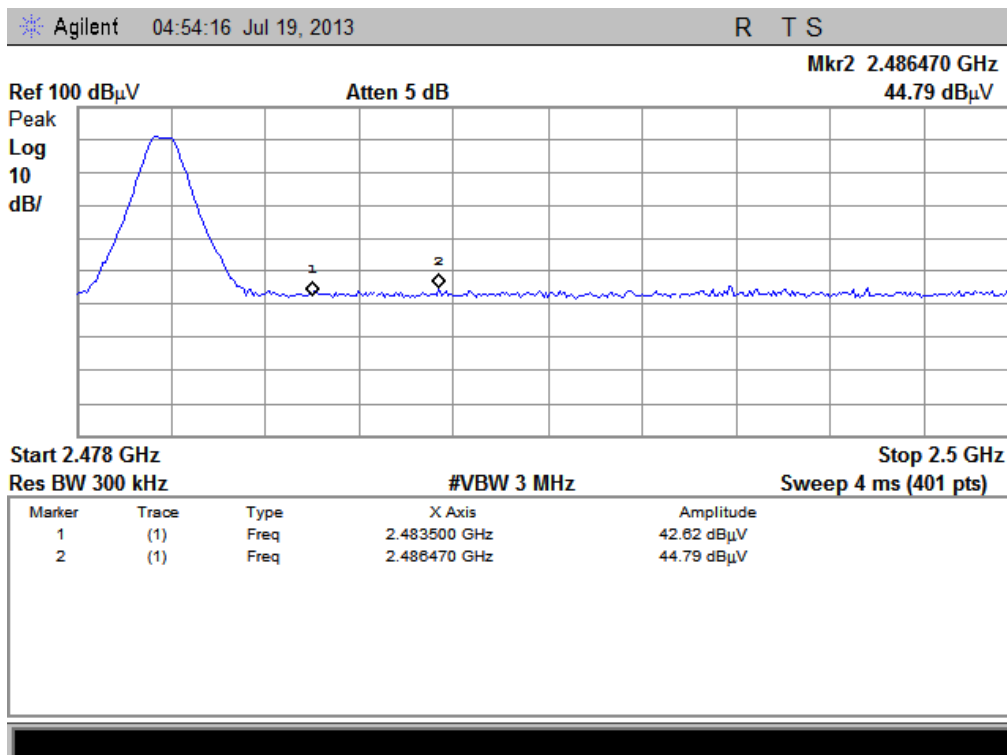

(Plot F1: Channel = 78 PEAK @ 8-DPSK Mode)

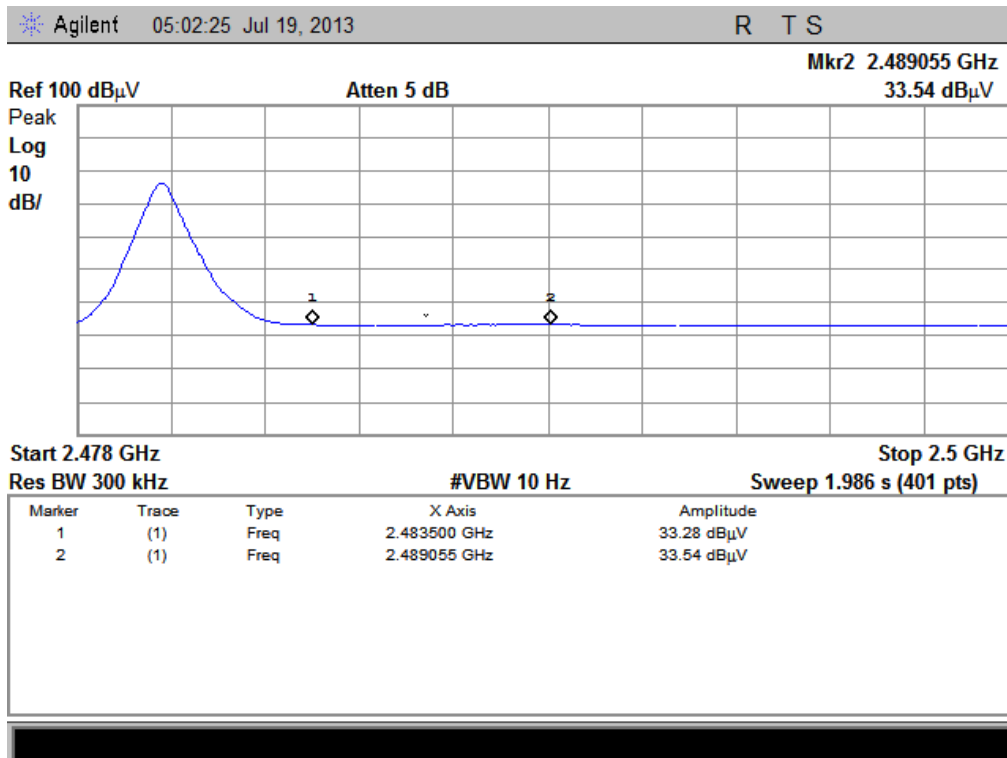

(Plot F2: Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9. Conducted Emission

2.9.1. Requirement

According to FCC section 15.207 and RSS-210 7.2.2, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

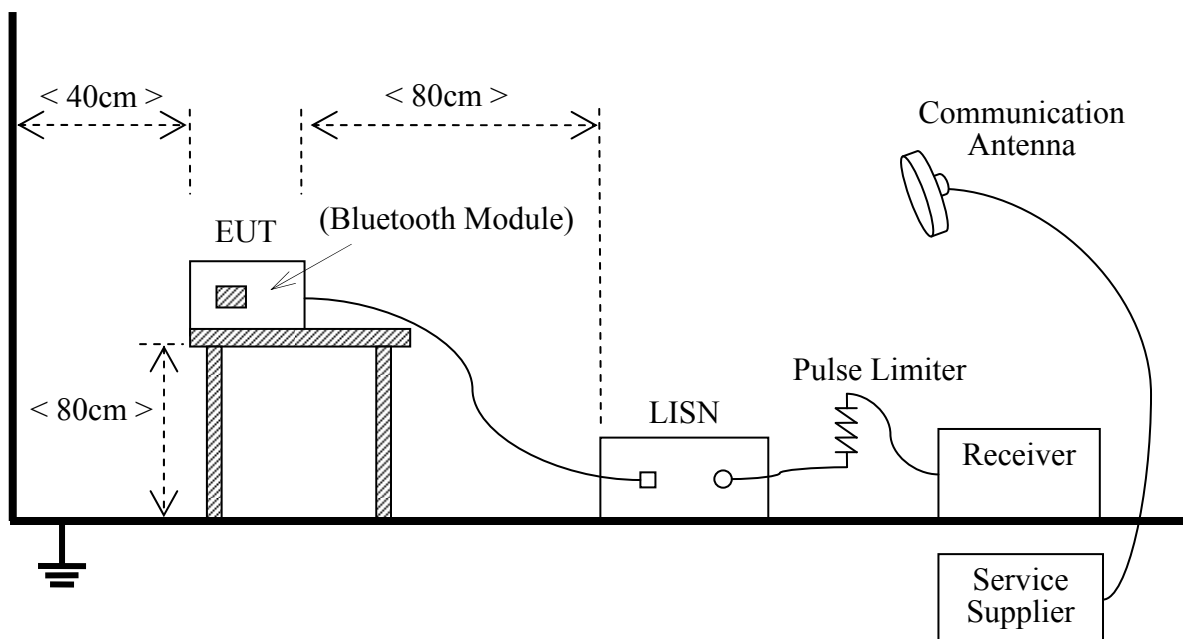

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
LISN	Schwarzbeck	NSLK 8127	812744	2013.05.12	2014.05.11
Service Supplier	R&S	CMU200	100448	2013.05.12	2014.05.11
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	2013.05.12	2014.05.11

2.9.3. Test Result

This Truck Information Terminal designed can not to be connected to the public utility (AC) power line, so conducted emission is unnecessary.

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to RSS- Gen section 7.2.3. Those emissions generated in a receiver and radiated from the receiver either via the antenna path or via the control, power, and audio cables that may be used with the receiver. All spurious emissions shall comply with the limits of next table:

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

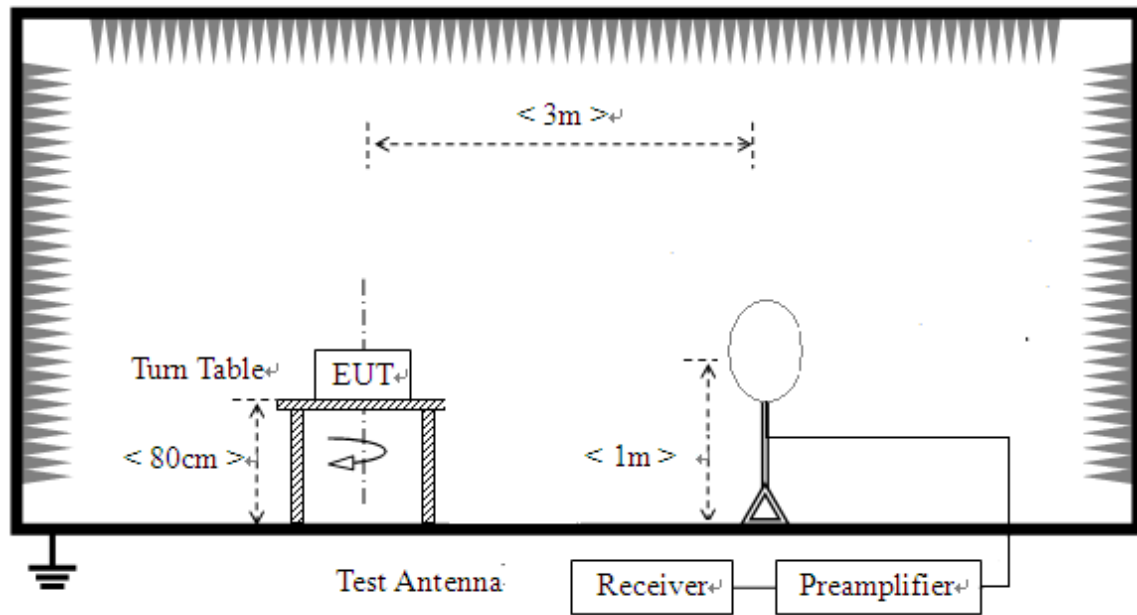

2) For radiated emissions from 30MHz to 1GHz

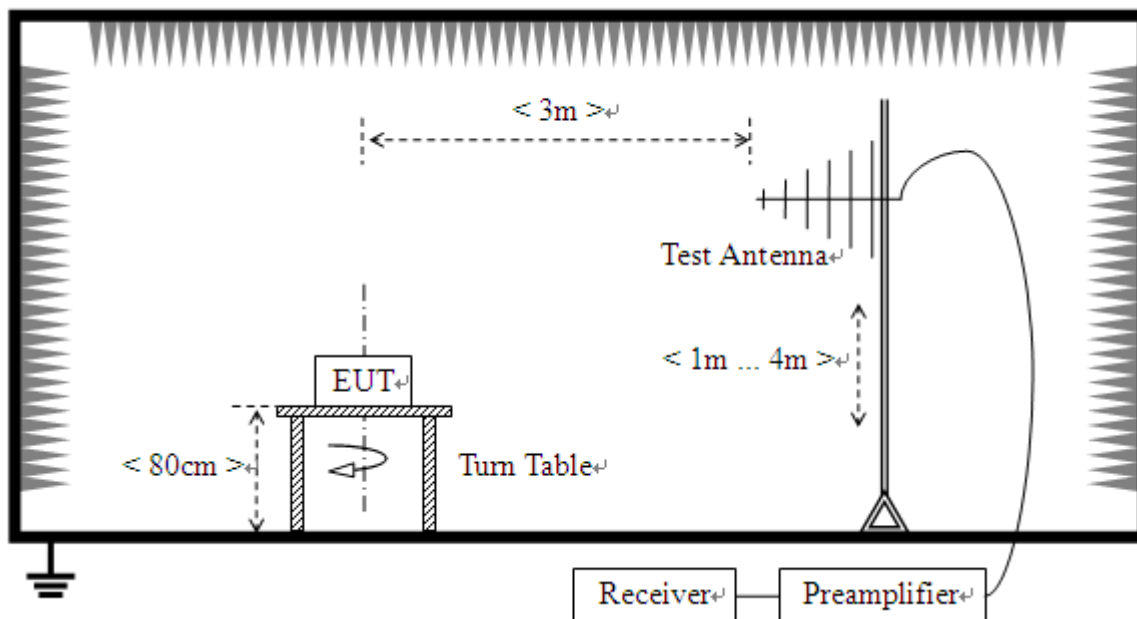

3) For radiated emissions above 1GHz

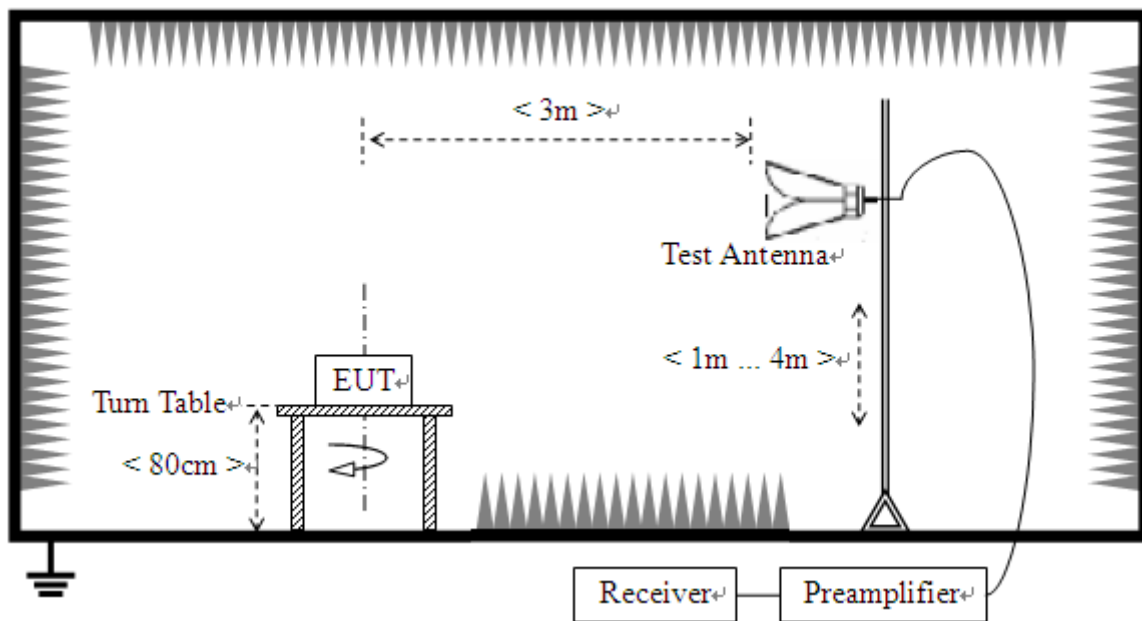

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2013.05.12	2014.05.11
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2013.05.12	2014.05.11
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2013.05.12	2014.05.11
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2013.05.12	2014.05.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Antenna - Horn	R&S	HL050S7	71688	2013.05.12	2014.05.11
Test Antenna - Loop	Schwarzbeck	FMZB 1519	1519-022	2013.05.12	2014.05.11

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB } \mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


2.10.4.1. GFSK Mode:

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

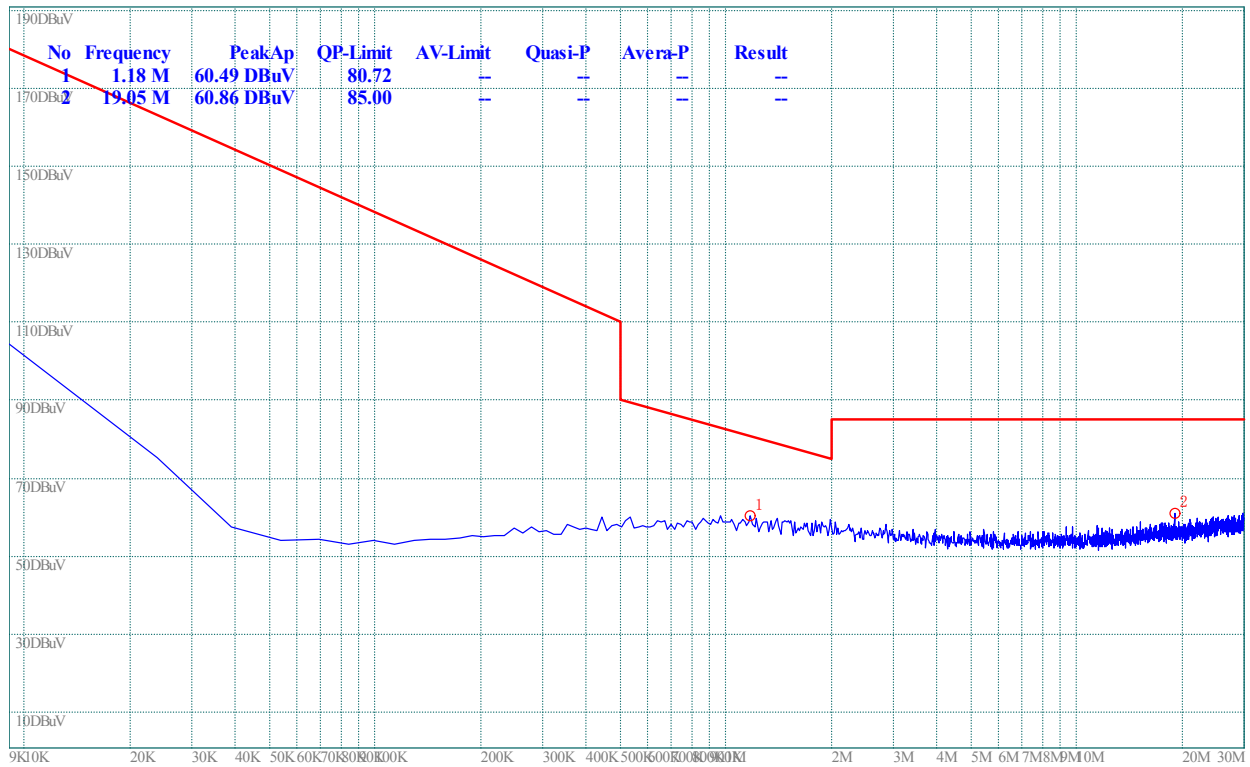


(Plot A.0: 9kHz to 30MHz @ GFSK, channel 0)

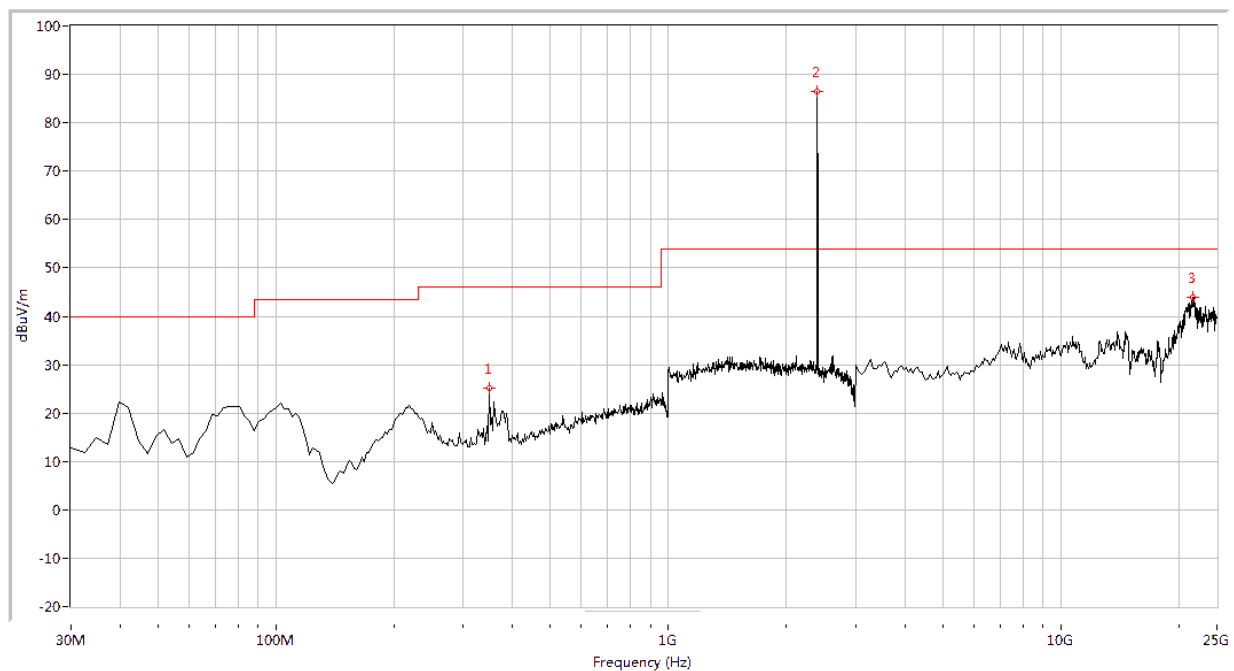

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
349.302	25.17	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2402.000	86.48	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21653.367	43.95	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)

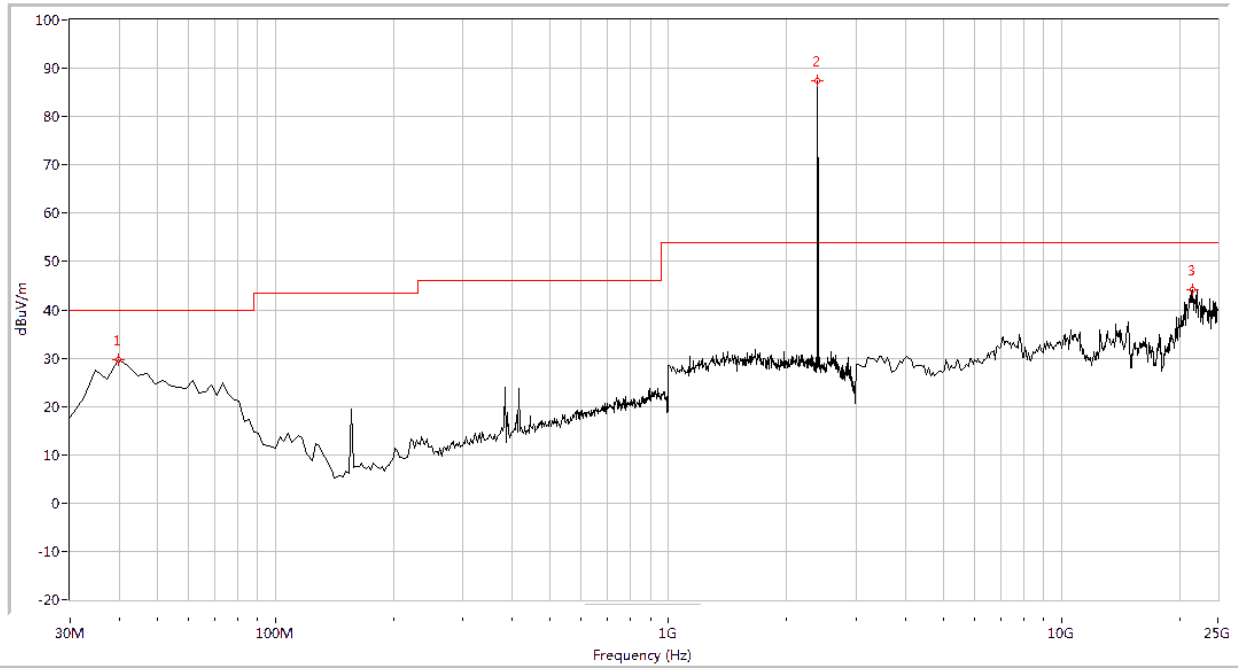


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	29.67	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2402.000	87.31	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21543.641	44.19	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)

Plot for Channel = 39

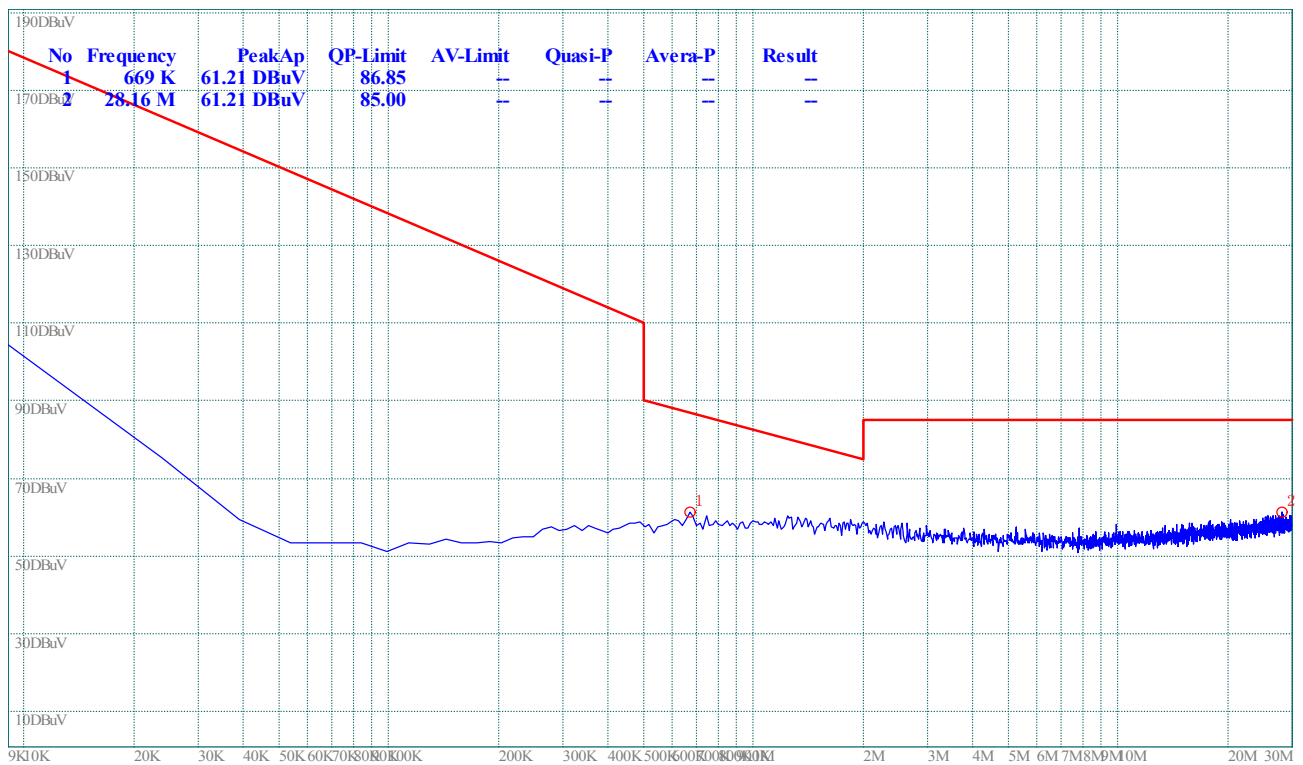


(Plot B.0: 9kHz to 30MHz @ GFSK, channel 39)

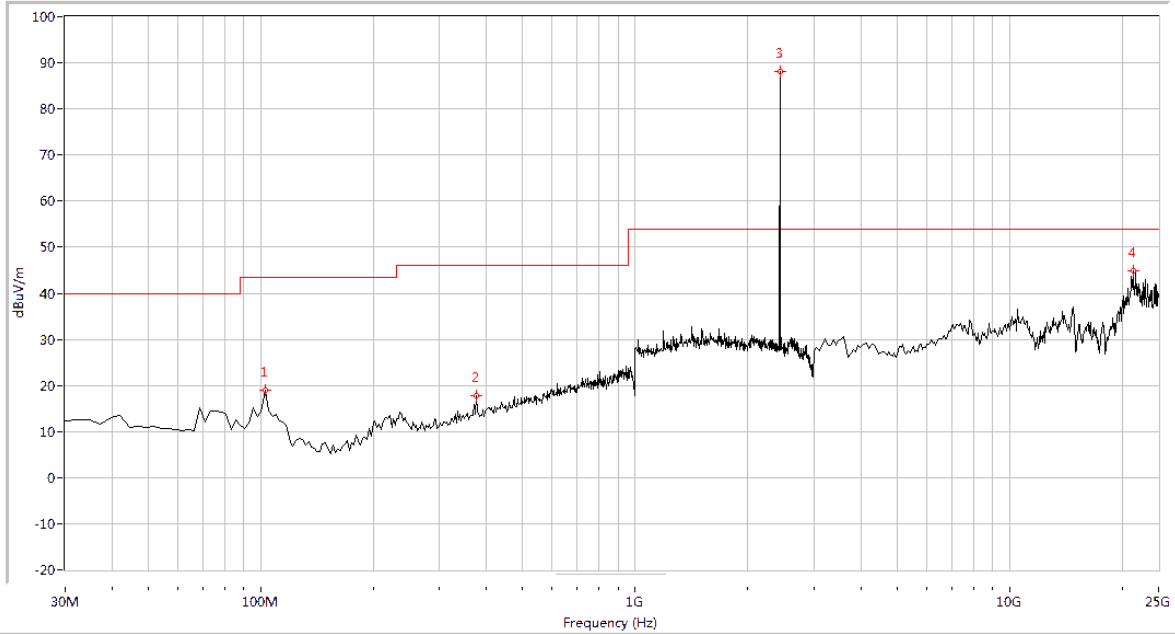

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	19.05	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
375.910	17.77	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2441.000	88.09	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21433.915	44.75	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)

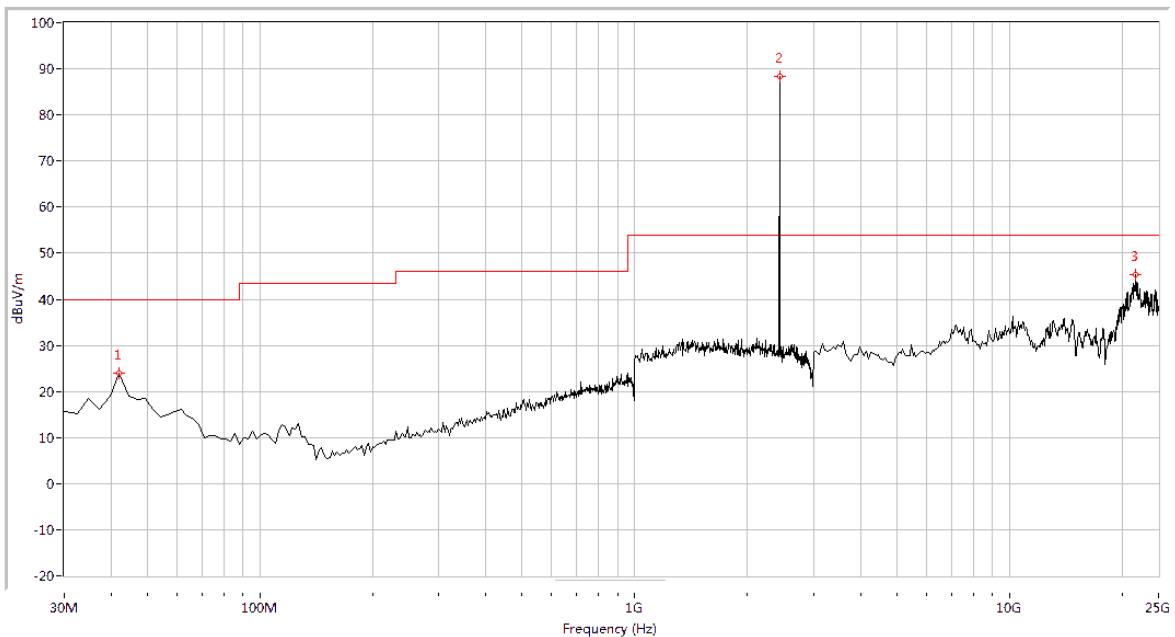


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	23.97	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2441.000	88.44	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21763.092	45.24	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)

Plot for Channel = 78

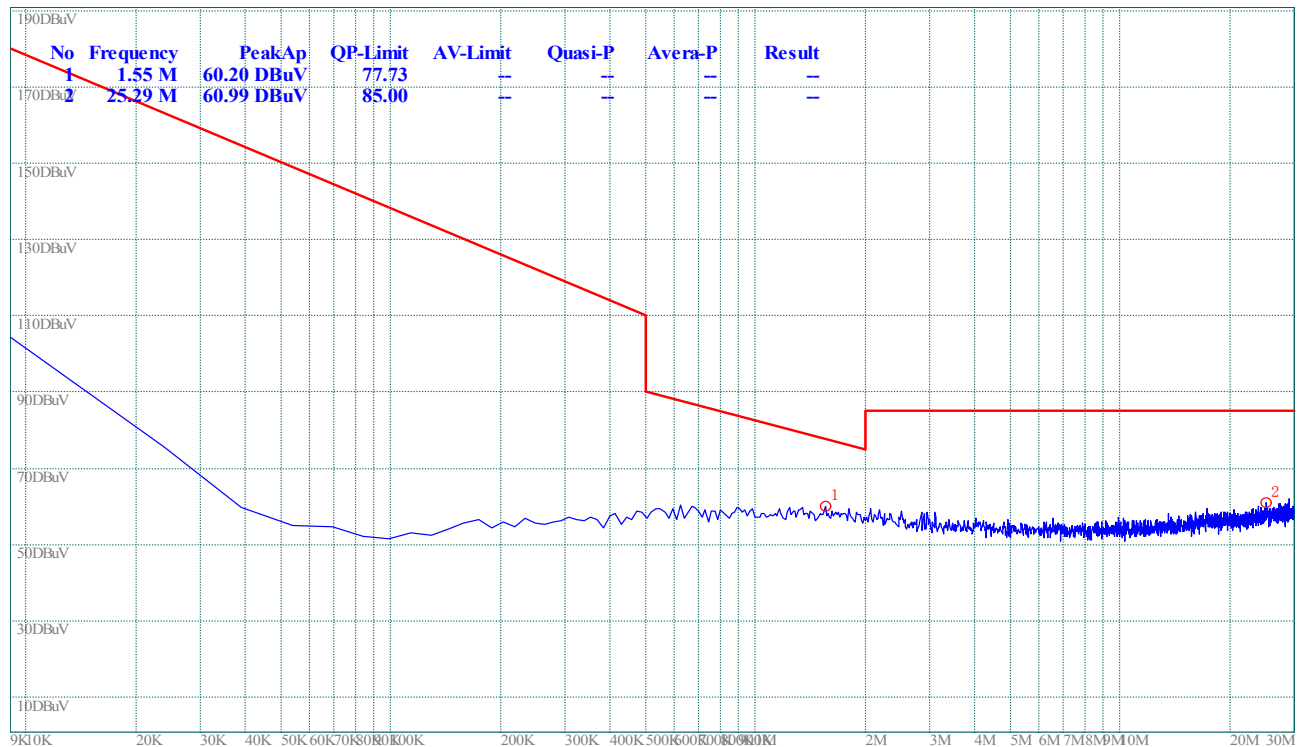


(Plot C.0: 9kHz to 30MHz @ GFSK, channel 78)

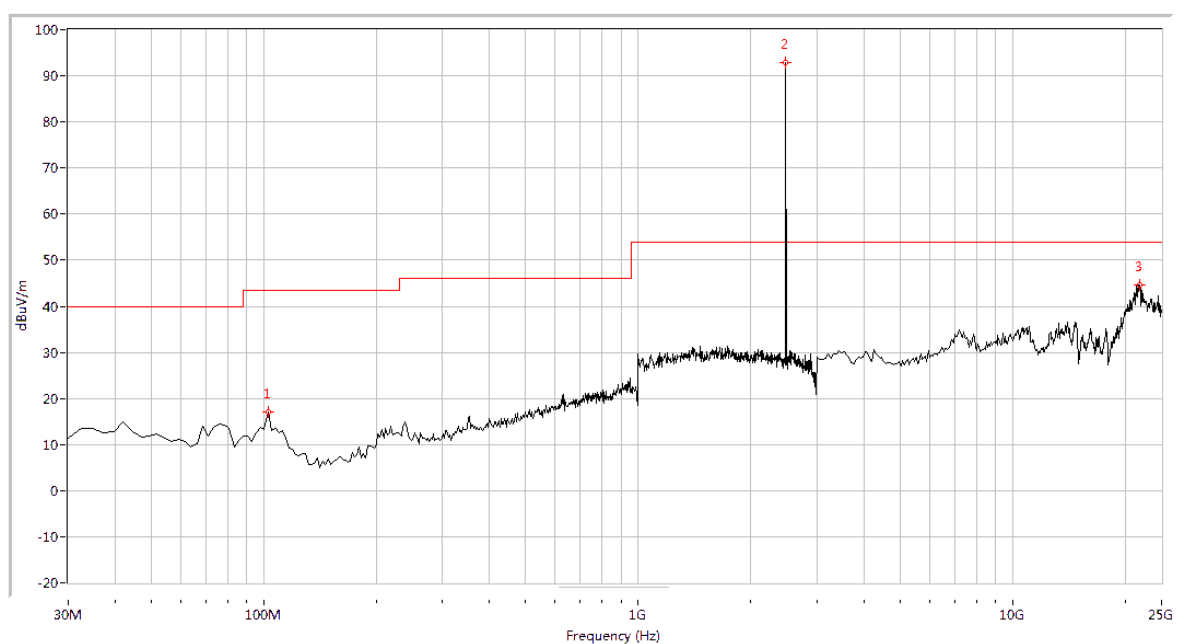

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	17.04	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2480.000	92.85	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21817.955	44.69	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

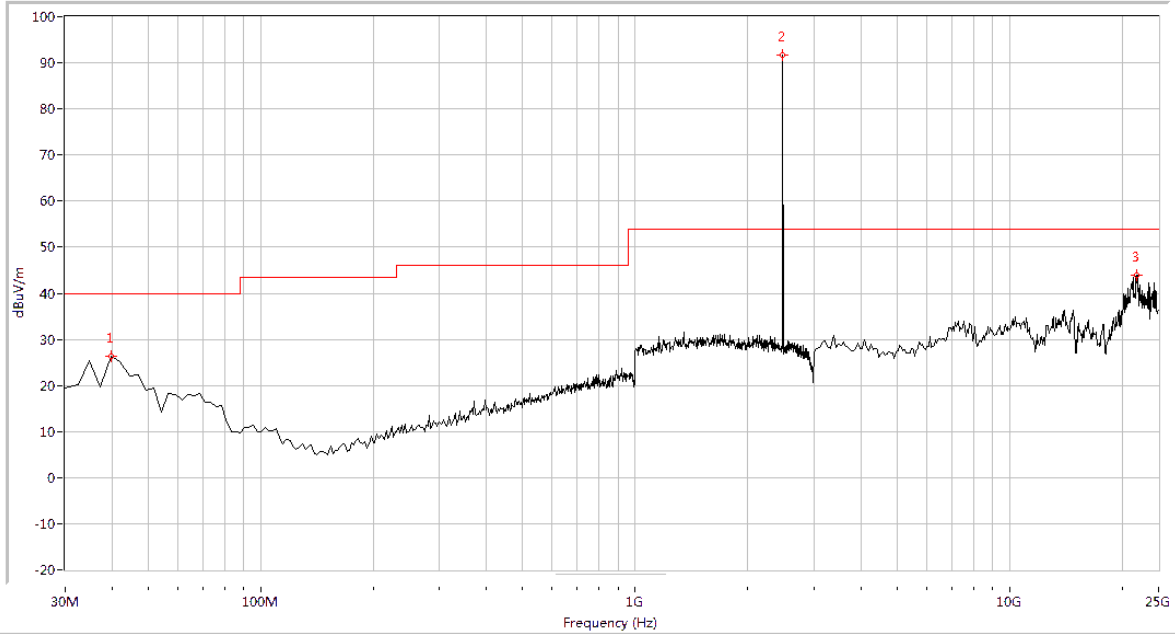

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	26.32	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2480.000	91.73	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21872.818	43.97	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)


2.10.4.2. $\pi/4$ -DQPSK Mode:

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0




(Plot A.0: 9kHz to 30MHz @ $\Pi/4$ -DQPSK, channel 0)

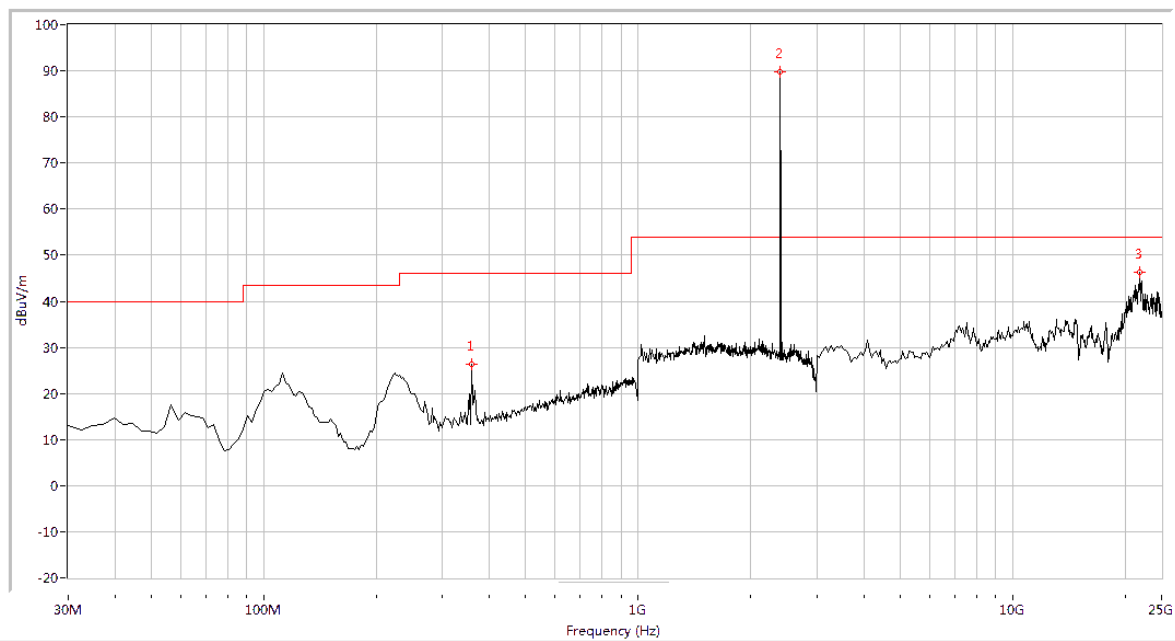

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
358.978	26.24	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2402.000	89.72	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21872.818	46.38	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @ $\Pi/4$ -DQPSK, channel 0)

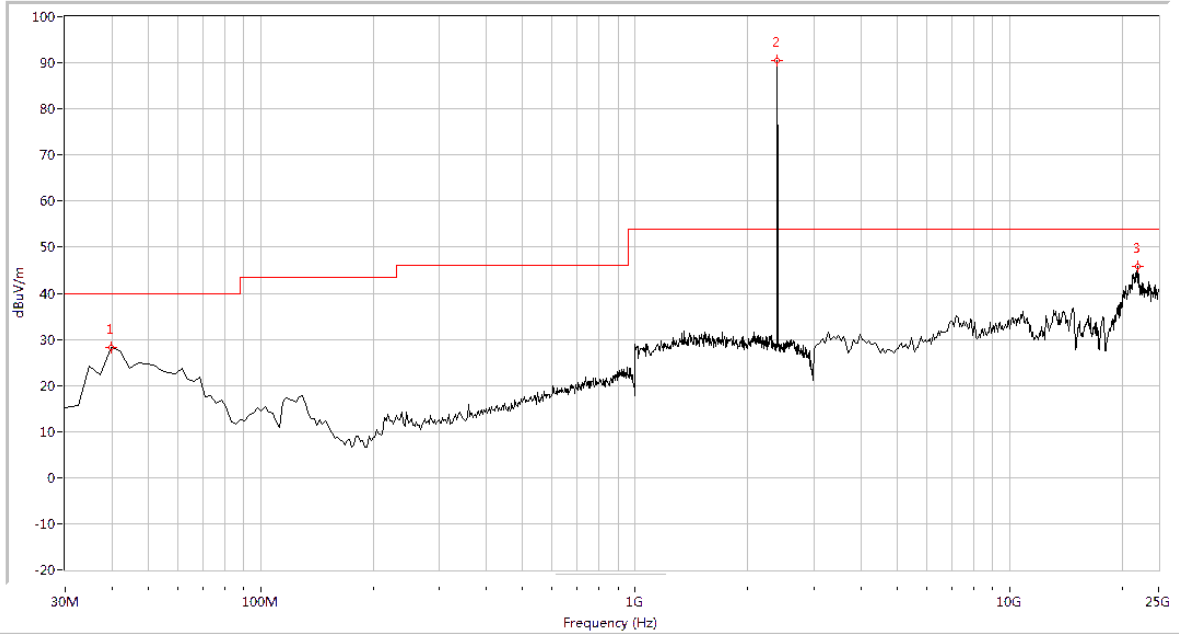


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	28.28	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2402.000	90.42	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
22037.406	45.79	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.2: 30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39




(Plot B.0: 9kHz to 30MHz @ $\pi/4$ -DQPSK, channel 39)

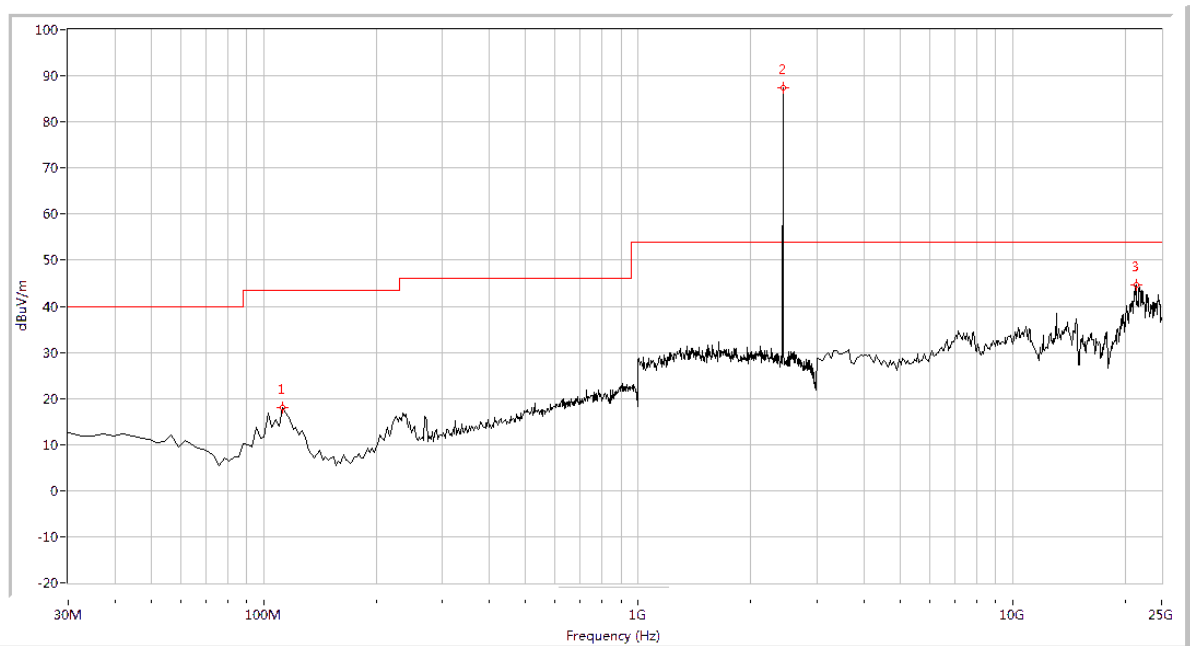

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	18.14	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2441.000	87.38	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21379.052	44.52	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

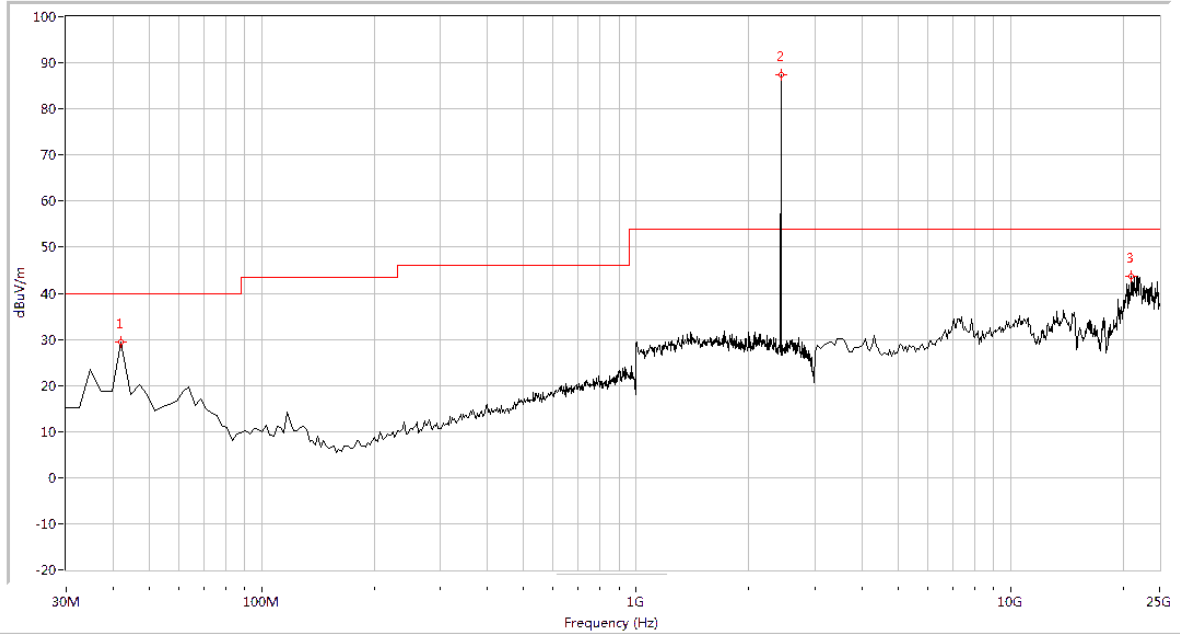


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	29.31	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2441.000	87.41	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21049.875	43.62	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78




(Plot C.0: 9kHz to 30MHz @ $\pi/4$ -DQPSK, channel 78)

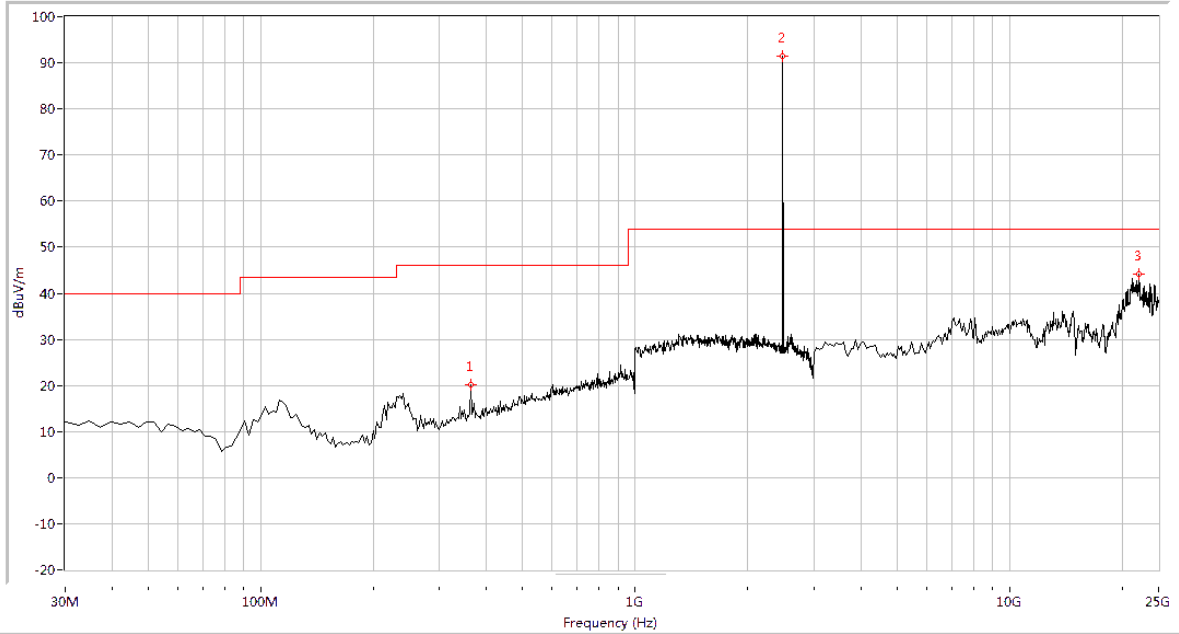

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
363.815	20.26	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2480.000	91.47	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
22092.269	44.04	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)

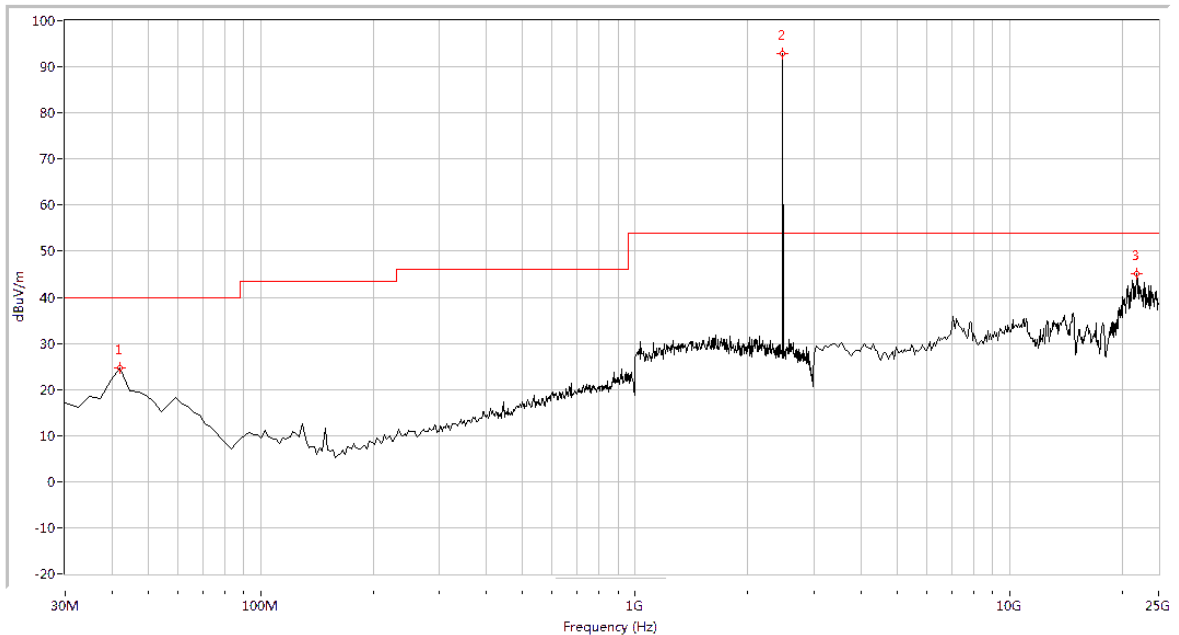

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	24.56	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2480.000	92.97	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21872.818	45.19	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)


2.10.4.3. 8-DPSK Mode:

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0




(Plot A.0: 9kHz to 30MHz @ 8-DPSK, channel 0)

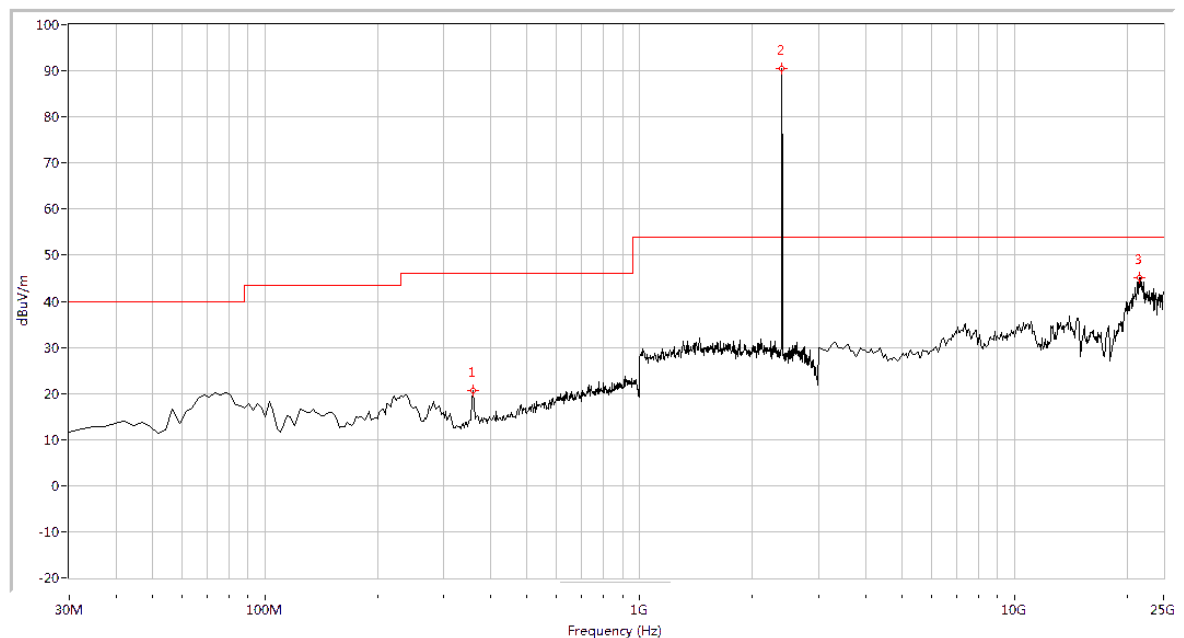

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
358.978	20.61	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2402.000	90.49	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21543.641	45.03	N.A	N.A	74.0	N.A	N.A	Horizontal	PASS


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 0)

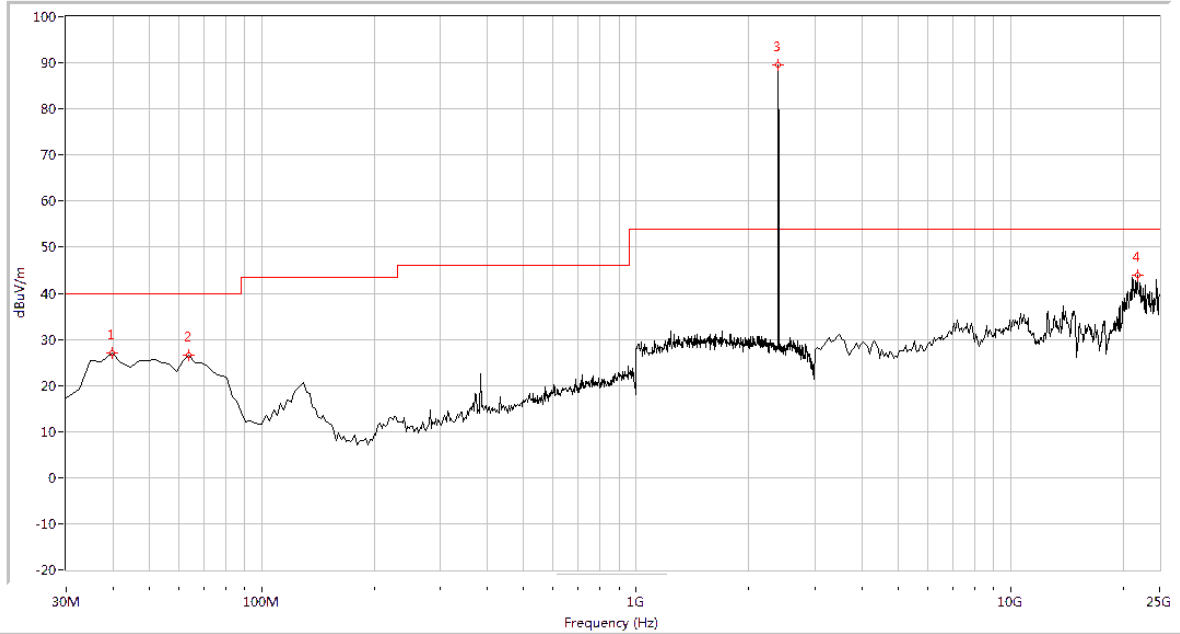


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	27.15	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
63.865	26.55	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2402.000	89.53	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21817.955	43.85	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 0)

Plot for Channel = 39

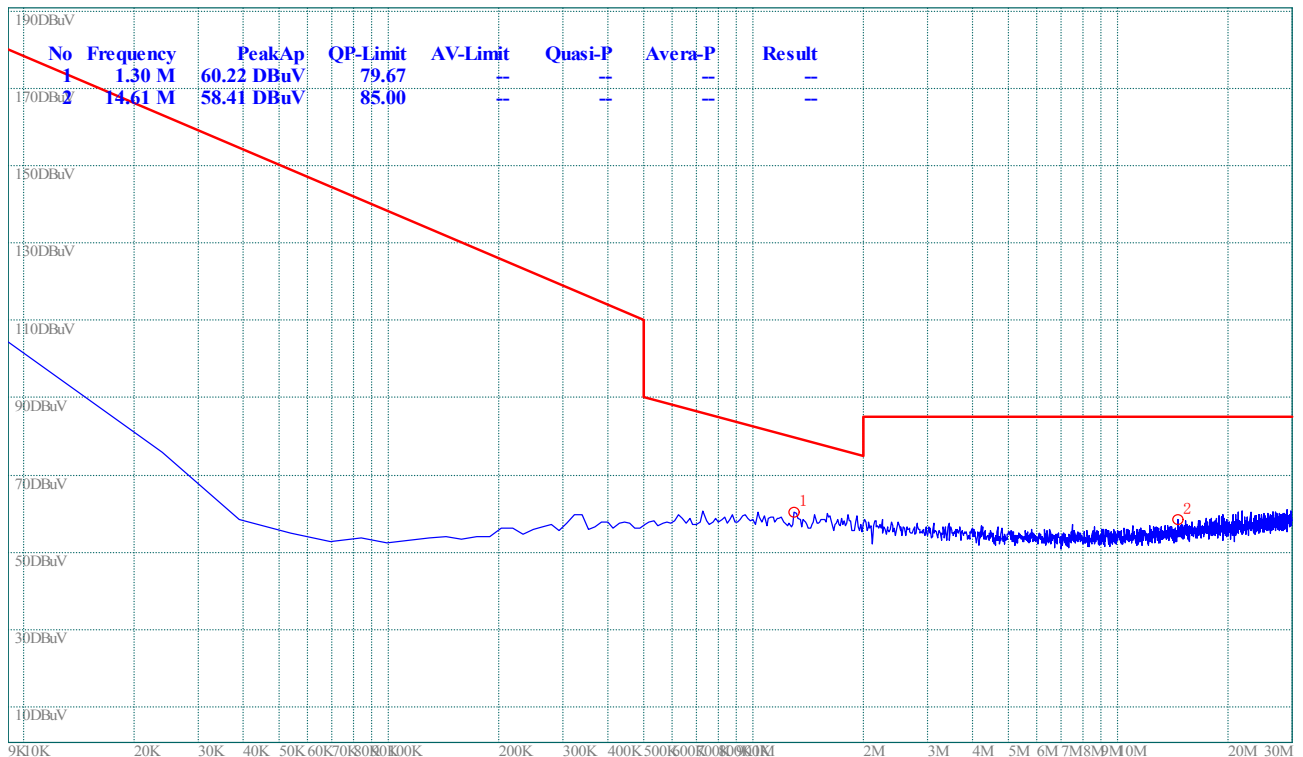


(Plot B.0: 9kHz to 30MHz @ 8-DPSK, channel 39)

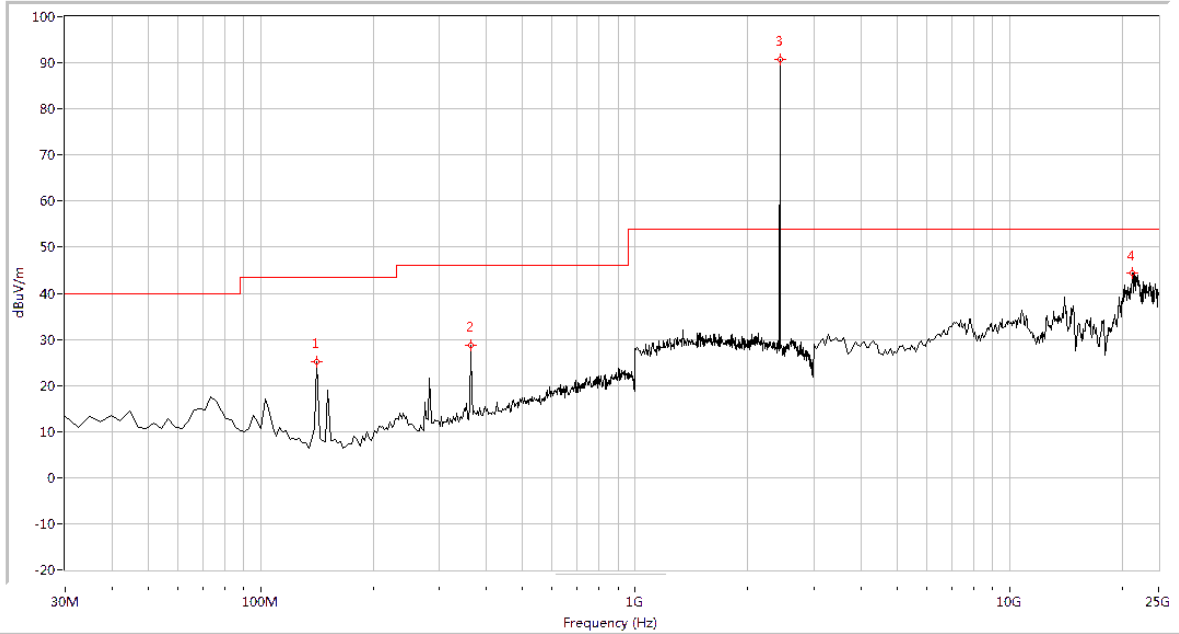

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
141.272	25.04	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
363.815	28.73	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2441.000	90.66	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21324.190	44.47	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot B.1: 30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 39)

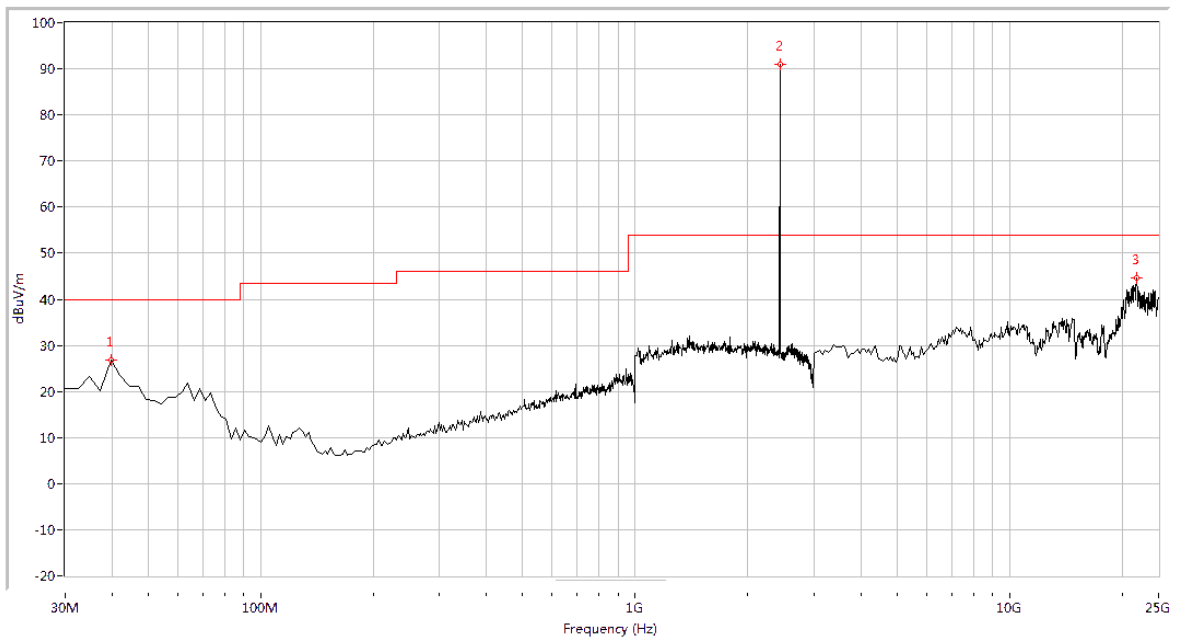


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	26.87	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2441.000	90.86	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21817.955	44.53	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 39)

Plot for Channel = 78

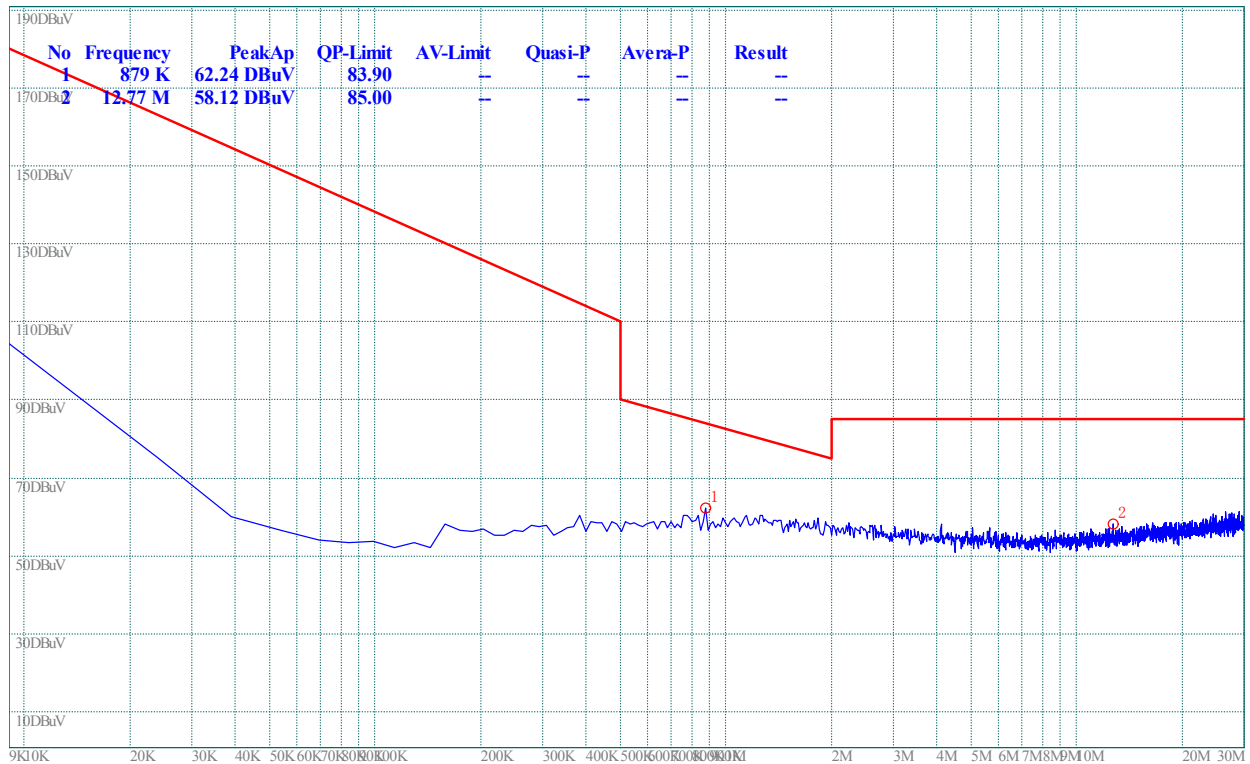


(Plot C.0: 9kHz to 30MHz @ 8-DPSK, channel 78)

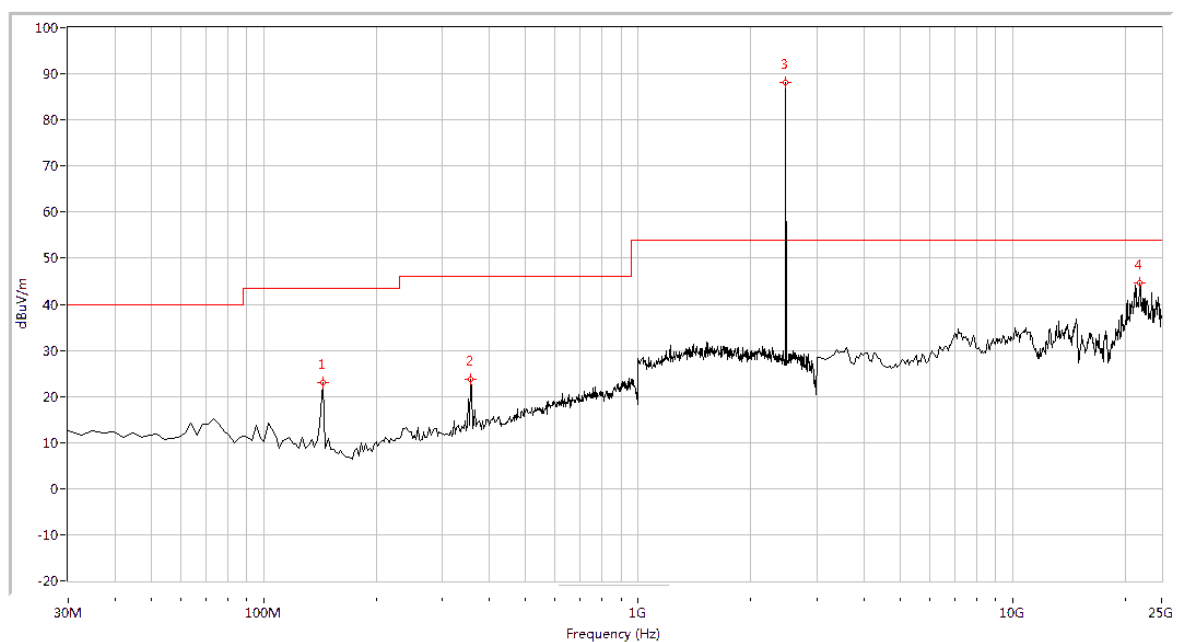

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
143.691	23.01	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
356.559	23.76	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2480.000	88.03	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
21872.818	44.71	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.1: 30MHz to 25GHz, Antenna Horizontal @ 8-DPSK, channel 78)

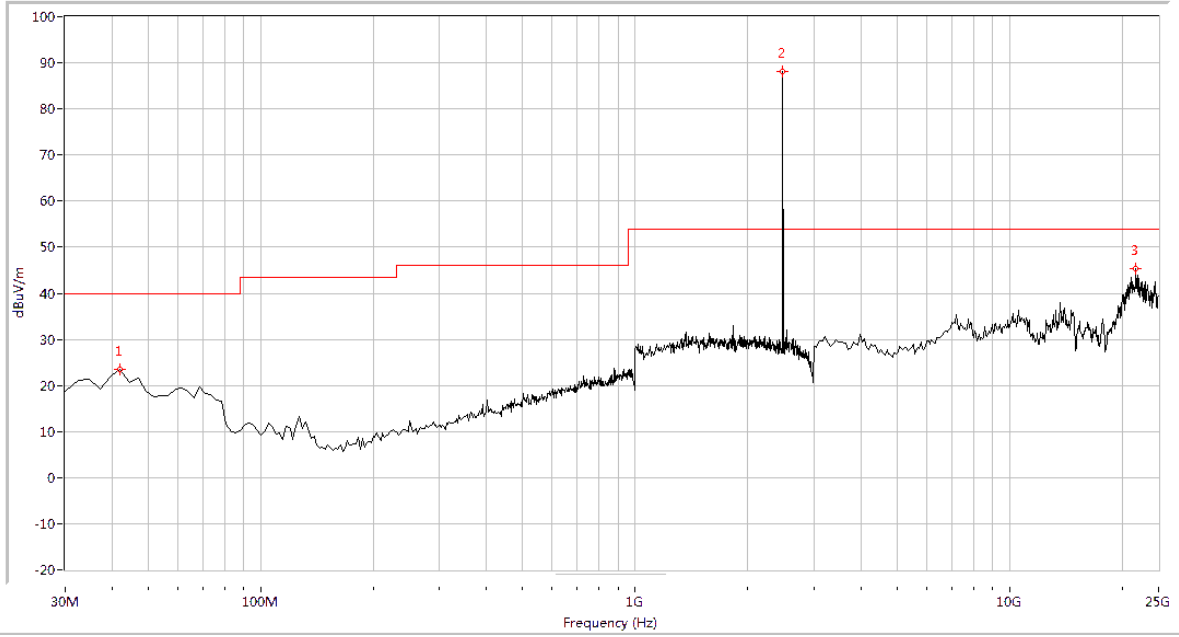

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	23.47	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
2480.000	88.23	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21708.229	45.45	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.2: 30MHz to 25GHz, Antenna Vertical @ 8-DPSK, channel 78)

2.11. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is 2.635dBm, the maximum gain of antenna is 0dBi, the maximum output power is 2.635dBm (1.834mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.

**** END OF REPORT ****