



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6) Date : 02 Sep 2013

Application No. : LR026716(0)

Applicant : ShenZhen XinZhongXin Technology Co., Ltd
5F, No.C Blv., Zhuan Bian Industrail Park, Gu Shu De Xi Xiang Tong
Bao'an District, Guang Dong, China

Client : Peak International (Hong Kong) Limited
Flat/Rm B 6/F Glory Centre, 8 Hillwood Road, Tsim Sha Tsui

Sample Description : One(1) item of submitted sample stated to be :

Sample Description	Model no.
Bluetooth Can Speaker – Emerald	4000492
Bluetooth Can Speaker - Mykonos Blue	4000489

Sample registration No. : RR030766-004
Radio Frequency : 2402MHz ~ 2480MHz Transceiver
Rating : 3.7V rechargeable battery
USB 5V
No. of submitted sample : Five (5) set (s)

Date Received : 29 Jul 2013, 02 Sep 2013

Test Period : 01 Aug 2013 to 02 Sep 2013

Test Requested : FCC Part 15 Certificate Permissive Change.

Test Method : 47 CFR Part 15 (10-1-12 Edition)
ANSI C63.4 – 2009
FCC Public Notice DA 00-705

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Assistant Manager
Electrical Division

Page 1 of 53

FCC ID: KKI-F-31B8



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6) Date : 02 Sep 2013

Test Engineer : Mr. LEUNG Shu-kan, Ken


Test Result : See attached sheet(s) from page 2 to 53.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15 Subpart B and C.

Remark : All two models are the same in circuitry and components; and therefore model 4000492 was chosen to be the representative of the test sample. The difference between the tested model and the declared model(s) is/are the model number, color and sample description.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____


Mr. WONG Lap-pong, Andrew
Assistant Manager
Electrical Division

Page 2 of 53

FCC ID: KKI-F-31B8



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

Table of Contents

1	General Information.....	4
1.1	General Description	4
1.2	Location of the test site	6
1.3	List of measuring equipment.....	7
1.4	Measurement Uncertainty	8
2	Description of the radiated emission test	9
2.1	Test Procedure	9
2.2	Test Result	10
2.3	Maximum peak output power	11
2.4	Radiated Emission Measurement Data	13
3	Description of the Line-conducted Test.....	15
3.1	Test Procedure	15
3.2	Test Result	15
3.3	Graph and Table of Conducted Emission Measurement Data	15
4	Photograph	16
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission	16
4.2	Photographs of the External and Internal Configurations of the EUT.....	16
5	Supplementary document.....	17
5.1	Bandwidth.....	17
5.2	Duty cycle	18
5.3	Transmission time.....	18
5.4	Power Spectral Density	18
5.5	Hopping sequence	18
5.6	Average on time	19
6	Appendices.....	20



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

1 General Information

1.1 General Description

The equipment under test (EUT) is a Bluetooth Can speaker. The EUT is power by 3.7V rechargeable battery. The EUT has two operating mode. The first operating mode is Bluetooth mode. It receives digital audio from other wireless device and playback the audio signal. The second mode is Aux mode. An Aux input terminal supports audio input by 3.5 mm terminal.

For the Bluetooth mode, it supports standard Bluetooth V3.0+EDR or below revision protocol for data synchronization. After paring with other standard Bluetooth device, it can play the music.

The Bluetooth module used in the speaker has been test and approved by official Bluetooth Special Interest Group (SIG) member. All technical requirements including hopping rate, Frequency channels, Pseudo randomly order list and Bandwidth has been tested and complied with Spread Spectrum System requirements. The compliance information was listed at Bluetooth SIG with ID code is B020742 for model No F-3168.

A non standardized Bluetooth protocol or other Gaussian frequency-shift keying (GFSK) digital modulation signal was unable to synchronize the Bluetooth speaker.

A Bluetooth trademark was printed on the speaker enclosure to indicate it communicate with Bluetooth protocol only.

The USB port is unable to synchronize with personal computer, this port is for 3.7V battery charging only.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF Channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

Example of a 79 hopping sequence in data mode: 40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54...

Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

System Receiver Input Bandwidth



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single multisport (packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence.. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Equipment Description

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply With all of The regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate it channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

The brief circuit description is listed as follows:

- IC1 and its associated circuit act as bluetooth module
- IC3, IC6 and its associated circuit act as amplifier circuit
- IC5 and its associated circuit act as charging circuit

Antenna type : PCB Antenna
Antenna gain : 0dBi
Modulation technique : GFSK
Number of channel : 79 channels



**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	08 Jul 2014	1 Year
Spectrum Analyzer	R&S	FSP30	100628	15 Aug 2013	1 Year
Broadband Antenna	Schaffner	CBL6112B	2692	16 Jan 2014	1 Year
Loop Antenna	EMCO	6502	00056620	15 Sep 2013	1 Year
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	09 Oct 2014	1 Year
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	16 May 2015	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	09 Oct 2014	1 Year
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	16 May 2015	2Years
LISN	R&S	ESH3-Z5	100038	25 Oct 2013	1 Year
Coaxial Cable	Schaffner	RG 213/U	N/A	28 May 2013	1 Year
Coaxial Cable	Suhner	RG 214/U	N/A	28 May 2013	1 Year
Coaxial Cable	Suhner	Sucoflex_102	N/A	09 Oct 2014	1 Year



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.83dB
30MHz ~ 200MHz (Vertical)	4.84dB
200MHz ~1000MHz (Horizontal)	4.66dB
200MHz ~1000MHz (Vertical)	4.65dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	3.02dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009 and DA 00-705.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

2.2 Test Result

Summary

Section in FCC part 15	Description	Result
15.205(a), 15.209, 15.247(d)	Transmitter radiated spurious field strength and other emissions	Page 11-12
15.209	Receiver emissions	Page 13
15.209	Voltage disturbance	Page 14, 31-33
15.247 (a)(1), Part 2.1 and DA-00705	Hopping sequence	Page 34, 35
15.247 (a)(1)	20dB bandwidth and 99% bandwidth	Page 36, 37, 38
15.247 (a)(1)	Channel Spacing (Frequency separation)	Page 39, 40
15.247 (a)(1)(iii)	Number of hopping frequency	Page 41
15.247 (d)	Band Edge	Page 42
15.247 (a)(1)(iii)	Dwell Time (Bluetooth Average On Time)	Page 43-51
15.247 (b)(1)	Maximum Peak output power	Page 10, 52, 53

Subpart C:

Peak Detector and Average Detector data were measured unless otherwise stated.

“#” means emissions appear within the restricted bands shall follow the requirement of section 15.205.

The harmonic emissions meet the requirement of section 15.209 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

Subpart B:

The emissions meet the requirement of section 15.109 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

The frequencies from 30MHz to 1000MHz were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC requirement.



**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

2.3 Maximum peak output power

Conductive measurements

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	26	° C
Relative humidity:	60	%

Operation Mode: Transmission

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
00	2401.928	- 5.12	0.3	1000.0	- 999.7

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
39	2440.913	- 3.37	0.4	1000.0	- 999.6

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
78	2479.942	- 2.58	0.5	1000.0	- 999.5

The plot saved in TestRpt9.pdf shows the transmission power was less than 1 watt.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

2.4 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	26	° C
Relative humidity:	60	%

Detector: Peak

RBW: 1MHz VBW: 3MHz

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
00	2402.123	H	101.4	- 6.3	95.1	114.0	- 18.9
	#4803.464	H	48.8	2.4	50.5	74.0	- 22.8
	7205.884	H	35.9	10.8	46.5	74.0	- 27.3
	9608.731	H	32.7	13.6	46.8	74.0	- 27.7

39	2440.768	H	102.4	- 6.3	96.3	114.0	- 17.9
	#4882.231	H	51.5	2.4	54.5	74.0	- 20.1
	#7322.498	H	38.7	10.8	49.6	74.0	- 24.5
	9760.110	H	32.7	13.6	46.5	74.0	- 27.7

78	2479.746	H	101.4	- 6.3	94.6	114.0	- 18.9
	#4959.521	H	54.5	2.4	57.0	74.0	- 17.1
	#7439.435	H	37.1	10.8	46.8	74.0	- 26.1
	#12398.934	H	35.4	15.7	50.9	74.0	- 22.9

Page 12 of 53

FCC ID: KKI-F-31B8



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

2.4 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	26	° C
Relative humidity:	60	%

Detector: Average

RBW: 1MHz VBW: 10Hz

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
00	2402.123	H	87.2	- 6.3	80.8	94.0	- 13.1
	#4803.464	H	39.6	2.4	41.9	54.0	- 12.0
	7205.884	H	22.1	10.8	32.8	54.0	- 21.1
	9608.731	H	18.0	13.6	31.6	54.0	- 23.0

39	2440.768	H	87.3	- 6.3	81.0	94.0	- 13.0
	#4882.231	H	44.5	2.4	46.9	54.0	- 7.1
	#7322.498	H	28.2	10.8	39.0	54.0	- 15.0
	9760.110	H	18.1	13.6	31.7	54.0	- 22.3

78	2479.746	H	84.9	- 6.3	78.6	94.0	- 15.4
	#4959.521	H	45.2	2.4	47.6	54.0	- 6.4
	#7439.435	H	23.2	10.8	34.0	54.0	- 20.0
	#12398.934	H	21.1	15.7	36.8	54.0	- 17.2

Page 13 of 53

FCC ID: KKI-F-31B8



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	26	° C
Relative humidity:	60	%

RBW: 120kHz

VBW: 300kHz

Operation Mode: Receiver mode

Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
43.624	V	8.8	15.3	24.1	40.0	- 15.9
70.259	V	10.1	7.4	17.5	40.0	- 22.5
73.623	H	9.1	8.0	17.1	40.0	- 22.9
110.567	V	10.4	12.4	22.8	43.5	- 20.7
125.275	H	9.2	14.7	23.9	43.5	- 19.6
203.093	H	9.6	11.9	21.5	43.5	- 22.0
281.364	H	8.7	15.0	23.7	46.0	- 22.3
308.870	H	11.6	15.9	27.5	46.0	- 18.5
455.040	H	11.7	20.3	32.0	46.0	- 14.0
594.136	H	8.9	23.2	32.1	46.0	- 13.9



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

The EUT is connected to adaptor.

It was found that the EUT met the FCC requirement.

3.3 Graph and Table of Conducted Emission Measurement Data

For electronic filling, the document is saved with filename TestRpt2.pdf.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename TSup1.jpg to TSup9.jpg.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename ExPho1.jpg to ExPho2.jpg and InPho1.jpg to InPho5.jpg.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

Bluetooth:

The plot saved in TestRpt4.pdf shows the 20dB bandwidth and 99% bandwidth:

Frequency Channel (MHz)	20dB bandwidth (kHz)	99% bandwidth (kHz)
2402	798.8	856.7
2441	761.2	865.4
2480	767.0	868.3

The plot saved in TestRpt5.pdf shows the channel spacing has minimum 25 kHz or two-third of 20dB bandwidth of hopping channel.

Frequency (MHz)	Channel spacing (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum bandwidth (kHz)
2402	1027.5	532.5	25
2441	1005.8	507.4	25
2480	1005.8	511.3	25

The plot saved in TestRpt6.pdf shows the frequency hopping channel over 75 hopping frequency.

The plot saved in TestRpt7.pdf shows the fundamental emission is confined in the specified band. It shows the 20dB bandwidth and band edge meet the 15.247(d) and 15.205 requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

5.2 Duty cycle

Not Applicable

5.3 Transmission time

Not Applicable

5.4 Power Spectral Density

Not Applicable

5.5 Hopping sequence

The plot saved in TestRpt3.pdf shows the hopping sequence is pseudorandom randomly distributed.
Four example of continuous fundamental frequency hopping pattern was as below:

The 1st example of fundamental frequency = 2.421090GHz

The 2nd example of fundamental frequency = 2.469910GHz

The 3rd example of fundamental frequency = 2.427010GHz

The 4th example of fundamental frequency = 2.456850GHz

Result:

Fc 1 – Fc 2 = -48.82MHz

Fc 2 – Fc 3 = +42.90MHz

Fc 3 – Fc 4 = -29.84MHz

It was found the hopping pattern is pseudorandom random.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

5.6 Average on time

The plot saved in TestRpt8.pdf shows the average on time for frequency hopping channel is within 0.4 seconds.

The calculation for average on time as below:

Average hopping channel = Number of transmitted carrier / Sweep time

Average on time = Packet on time x Average hopping channel

Dwell time = Average on time x Total frequency hopping channel x 0.4

Test result:

Frequency Channel (MHz)	Packet	Dwell Time (Seconds)	Limit (Seconds)	Margin (Seconds)
2402	DH1	0.121	0.4	- 0.279
2441	DH1	0.124	0.4	- 0.276
2480	DH1	0.121	0.4	- 0.279
2402	DH3	0.259	0.4	- 0.141
2441	DH3	0.259	0.4	- 0.141
2480	DH3	0.256	0.4	- 0.144
2402	DH5	0.310	0.4	- 0.090
2441	DH5	0.308	0.4	- 0.092
2480	DH5	0.311	0.4	- 0.089



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of the set-up of Conducted Emissions	2	pages
A3	Photos of External Configurations	1	page
A4	Photos of Internal Configurations	3	pages
A5	ID Label/Location	2	pages
A6	Conducted Emission Measurement Data	3	pages
A7	Hopping sequence	2	pages
A8	20 dB bandwidth and 99% bandwidth	3	pages
A9	Bluetooth Channel Spacing	2	pages
A10	Bluetooth Hopping Channel	1	page
A11	Bluetooth Band Edge	1	page
A12	Bluetooth Average on time	9	pages
A13	Transmission Power	2	pages



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A1. Photos of the set-up of Radiated Emissions



(Front view, 30MHz – 1GHz)

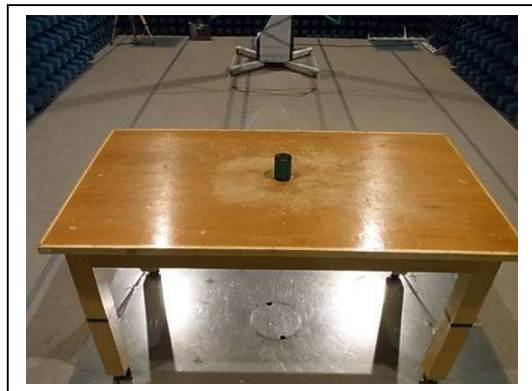

(Back view, 30MHz – 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:


Mr. WONG Lap-pong, Andrew



**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

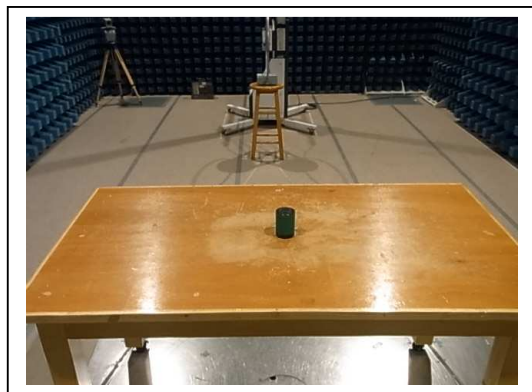

(Front view, 9KHz – 30MHz)



(Back view, 9KHz – 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:


Mr. WONG Lap-pong, Andrew




**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

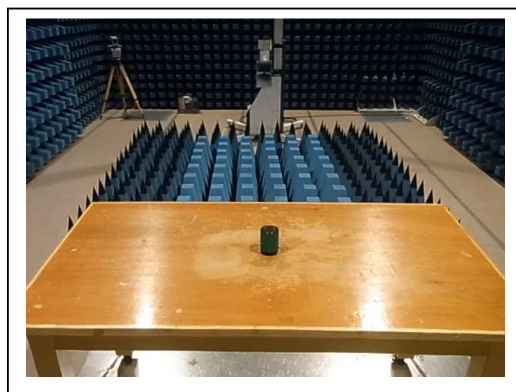

(front view, 1GHz – 25GHz)

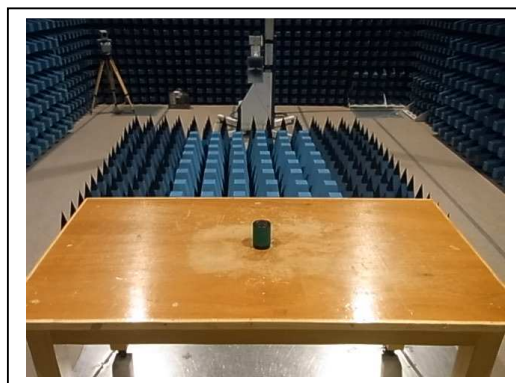

(rear view, 1GHz – 25GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A2 Photos of the set-up of Conducted Emission

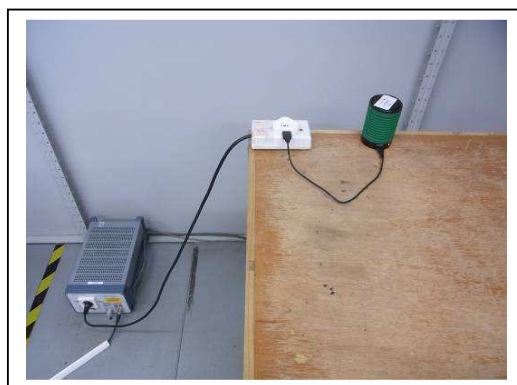

(front view)

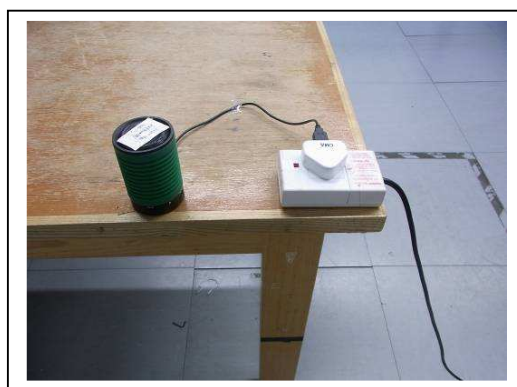

(rear view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 24 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>




**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

Photos of the set-up of Conducted Emission

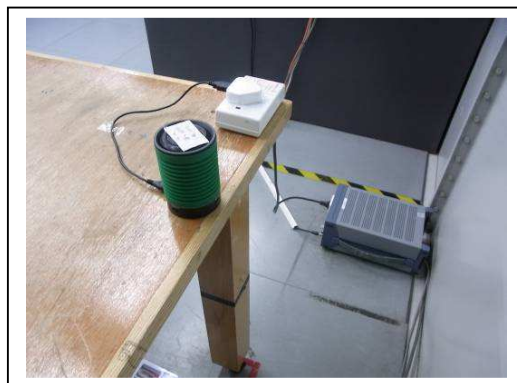

(side view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 25 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A3. Photos of External Configurations



External Configuration 1



External Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AR0049546(6)

Date : 02 Sep 2013

A4. Photos of Internal Configurations

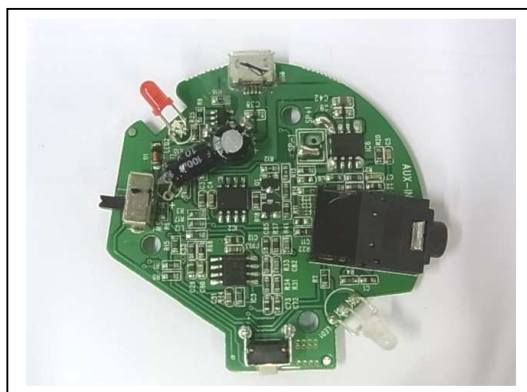

Internal Configuration 1

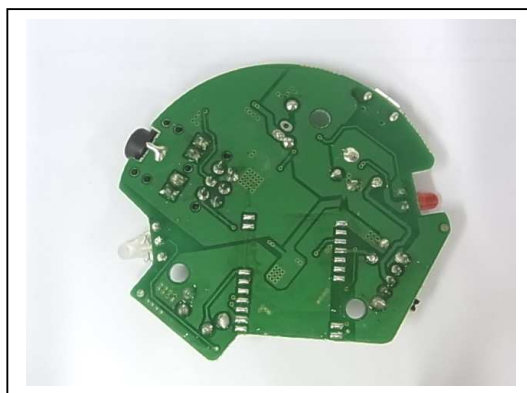

Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 27 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

A4. Photos of Internal Configurations

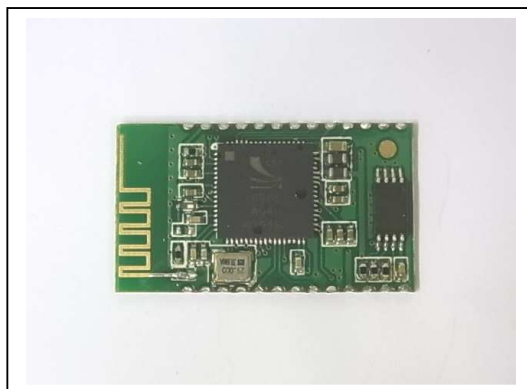

Internal Configuration 3



Internal Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 28 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A5. ID Label / Location



ID Label 1

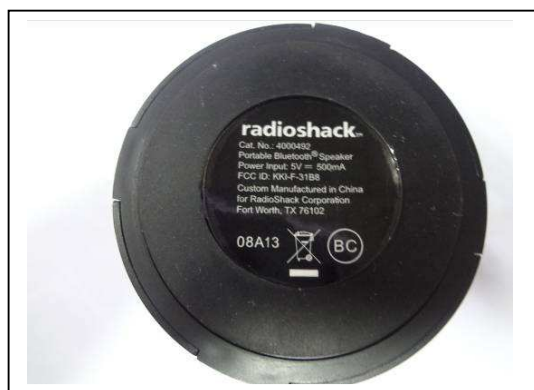

ID Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 29 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013

A5. ID Label / Location



ID Label 3



ID Label 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AR0049546(6)

Date : 02 Sep 2013


A6 Conducted Emission Measurement Date



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

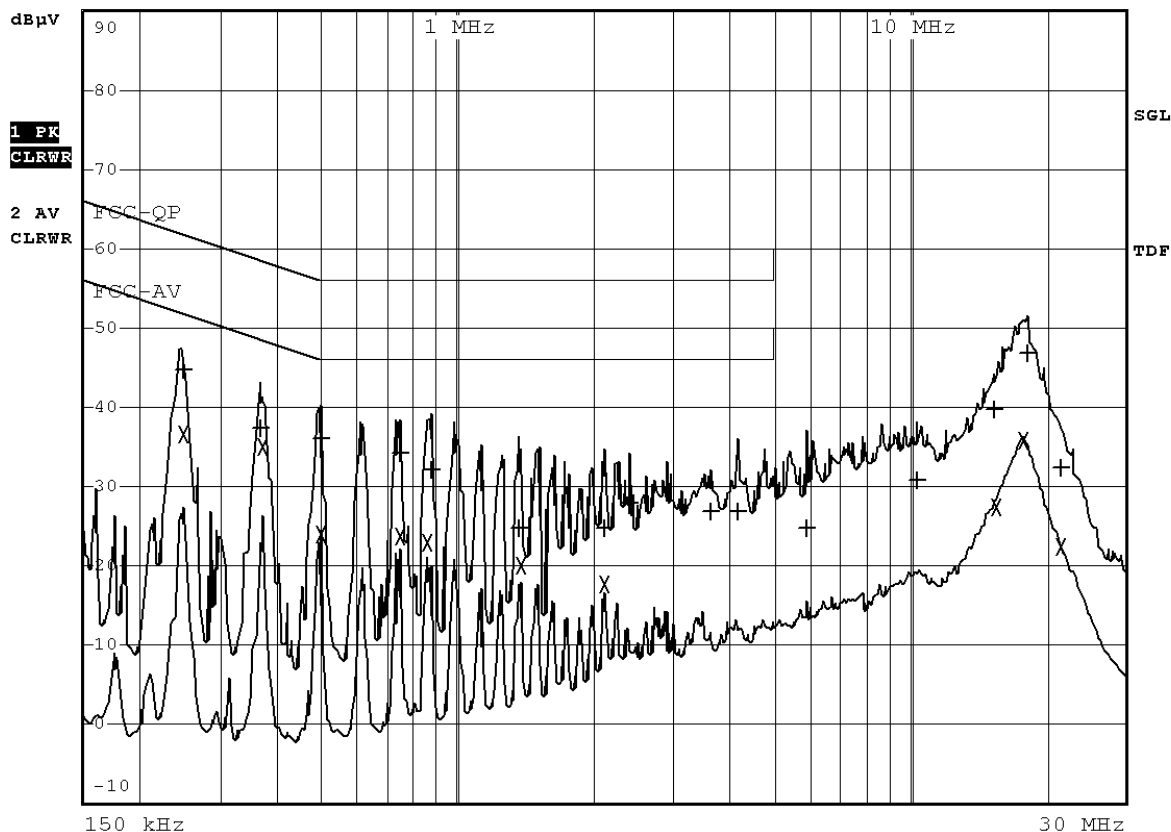

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A6 Conducted Emission Measurement Date

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC-QP			
Trace2:	FCC-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	250 kHz	44.69	N gnd	-17.06
2 Average	250 kHz	36.46	N gnd	-15.29
1 Quasi Peak	370 kHz	37.28	N gnd	-21.21
2 Average	375 kHz	34.93	N gnd	-13.45
1 Quasi Peak	500 kHz	36.05	N gnd	-19.95
2 Average	500 kHz	24.05	N gnd	-21.94
1 Quasi Peak	750 kHz	34.18	N gnd	-21.81
2 Average	750 kHz	23.77	N gnd	-22.22
2 Average	870 kHz	22.93	N gnd	-23.06
1 Quasi Peak	880 kHz	32.01	L1 gnd	-23.98
1 Quasi Peak	1.36 MHz	24.78	L1 gnd	-31.21
2 Average	1.38 MHz	20.08	N gnd	-25.92
1 Quasi Peak	2.11 MHz	24.88	N gnd	-31.11
2 Average	2.12 MHz	17.66	N gnd	-28.33
1 Quasi Peak	2.39 MHz	27.94	N gnd	-28.05
1 Quasi Peak	3.65 MHz	26.88	N gnd	-29.11
1 Quasi Peak	4.19 MHz	26.95	N gnd	-29.04
1 Quasi Peak	5.92 MHz	24.87	L1 gnd	-35.12
1 Quasi Peak	10.34 MHz	30.83	N gnd	-29.16
1 Quasi Peak	15.32 MHz	39.83	N gnd	-20.16

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 32 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



**CMA Testing
and Certification
Laboratories**
廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A6 Conducted Emission Measurement Date

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC-QP			
Trace2:	FCC-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
2 Average	15.47 MHz	27.41	L1 gnd	-22.58
2 Average	17.85 MHz	35.69	N gnd	-14.30
1 Quasi Peak	18.3 MHz	46.76	N gnd	-13.24
2 Average	21.6 MHz	22.51	N gnd	-27.48
1 Quasi Peak	21.61 MHz	32.42	N gnd	-27.57

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A7. Hopping sequence

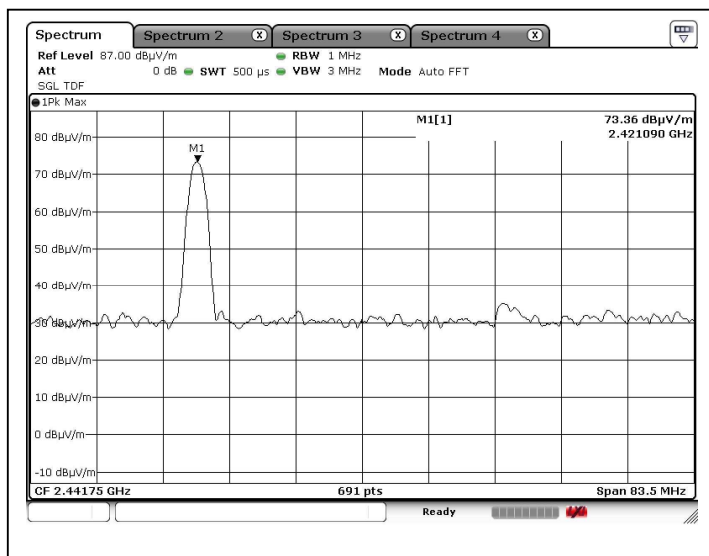

1st example of fundamental frequency

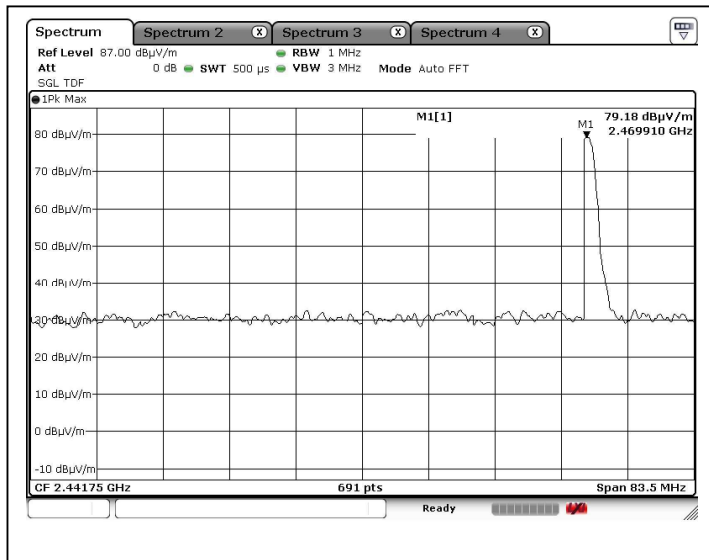

2nd example of fundamental frequency

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR.

Mr. WONG Lap-pong, Andrew

FCC ID: KKI-F-31B8

Page 34 of 53

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AR0049546(6)

Date : 02 Sep 2013

A7. Hopping sequence

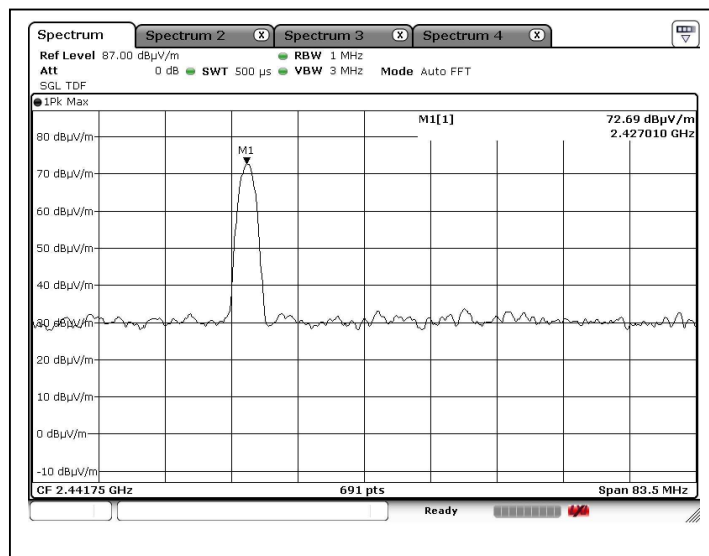

3rd example of fundamental frequency

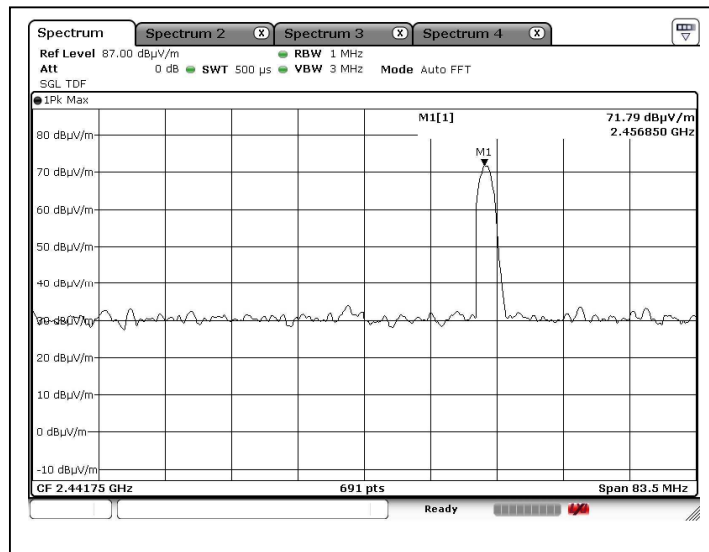

4th example of fundamental frequency

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)


Date : 02 Sep 2013

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH00

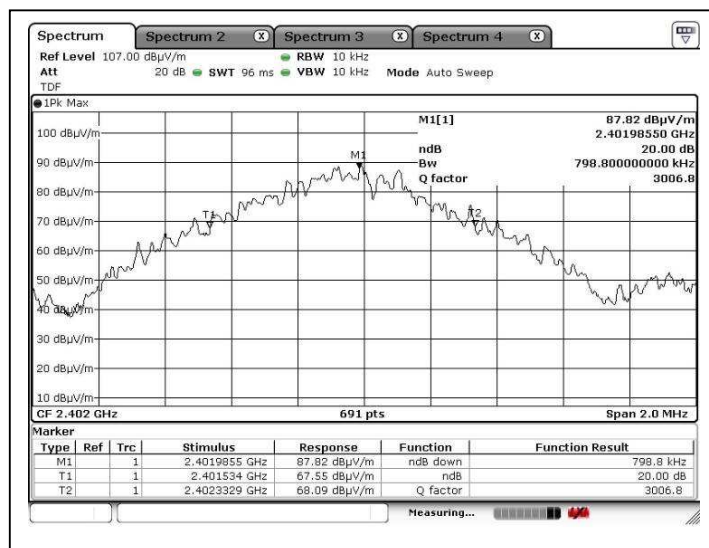

20 dB bandwidth

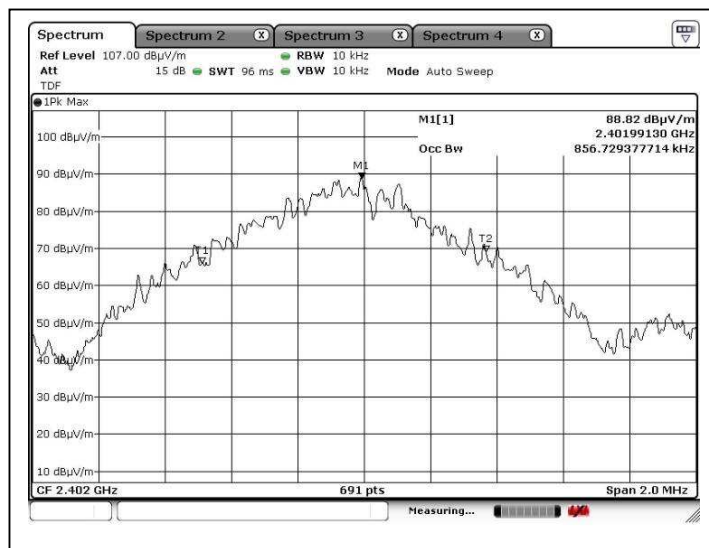

99% bandwidth

Tested by:
Mr. LEUNG Shu-kan, Ken

Reviewed by:
Mr. WONG Lap-pong, Andrew

FCC ID: KKI-F-31B8

Page 36 of 53

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AR0049546(6)


Date : 02 Sep 2013

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH39

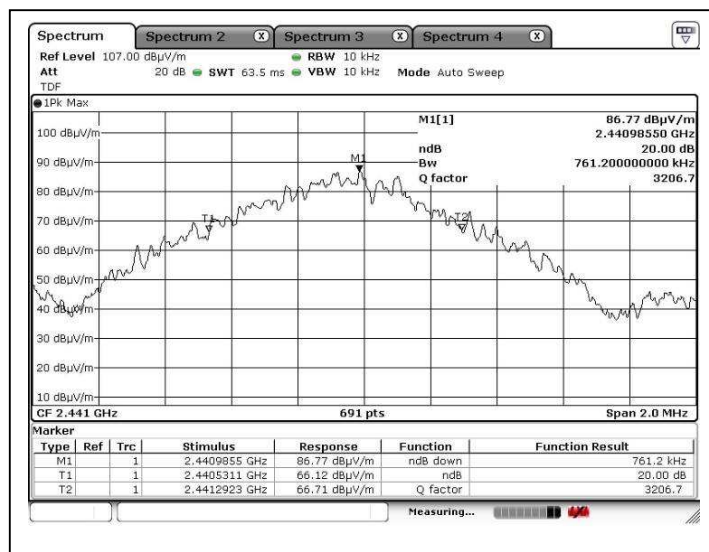

20 dB bandwidth

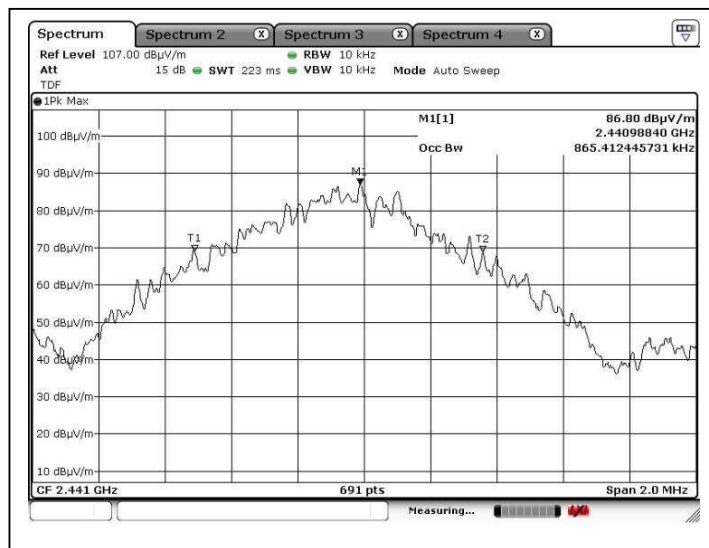

99% bandwidth

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: KKI-F-31B8

Page 37 of 53

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)


Date : 02 Sep 2013

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH78

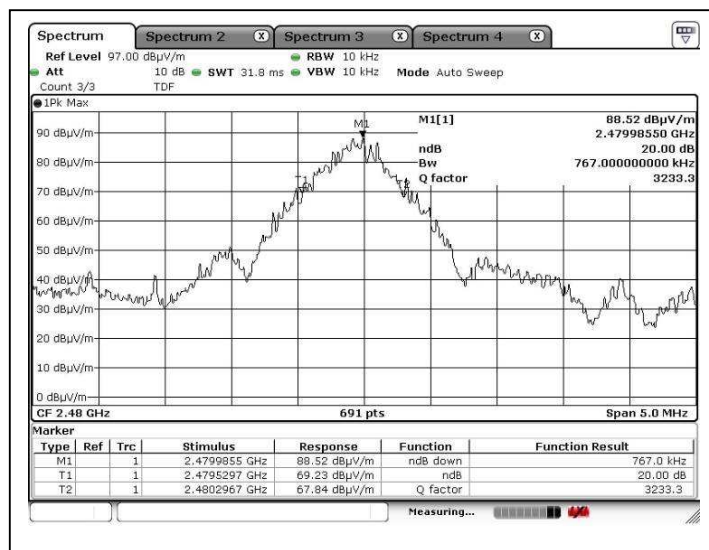

20 dB bandwidth

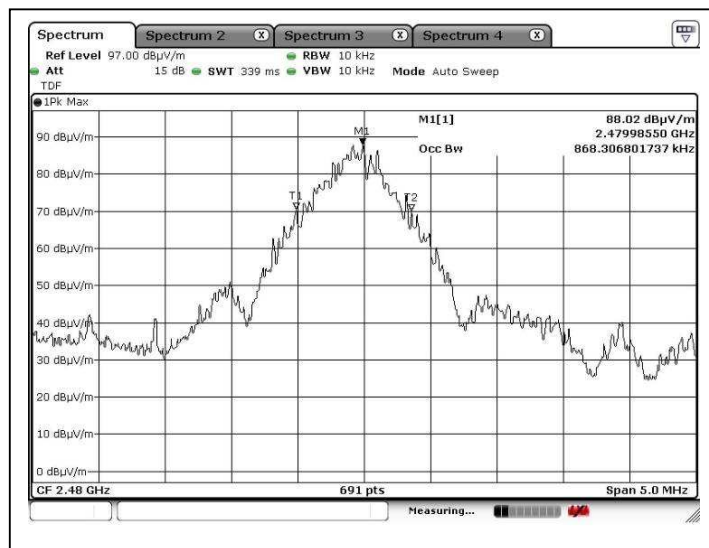

99% bandwidth

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew

Page 38 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A9. Bluetooth Channel Spacing

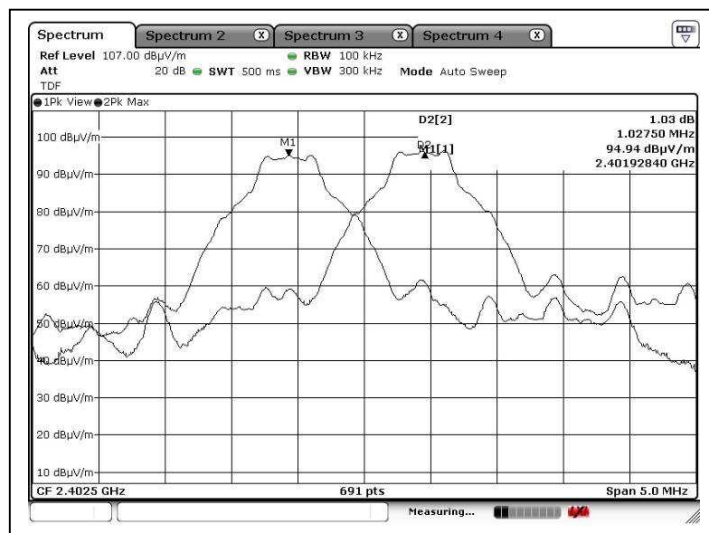

CH00-CH01

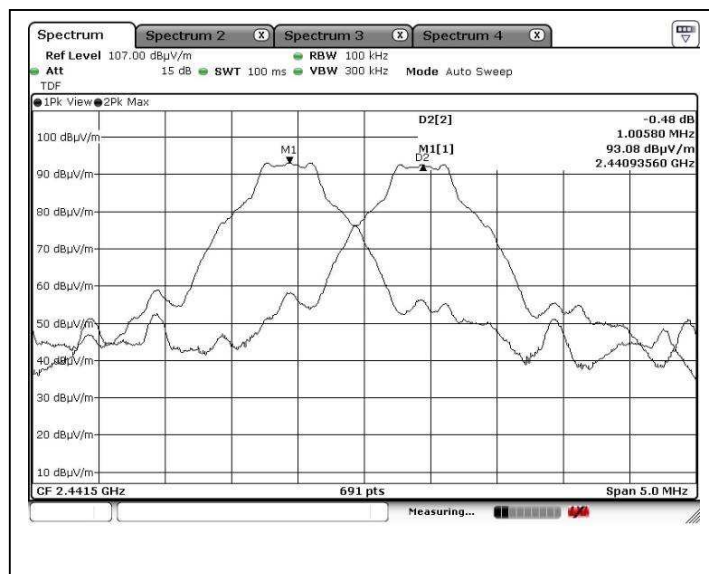

CH38-CH39

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR.

Mr. WONG Lap-pong, Andrew

FCC ID: KKI-F-31B8

Page 39 of 53

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A9. Bluetooth Channel Spacing

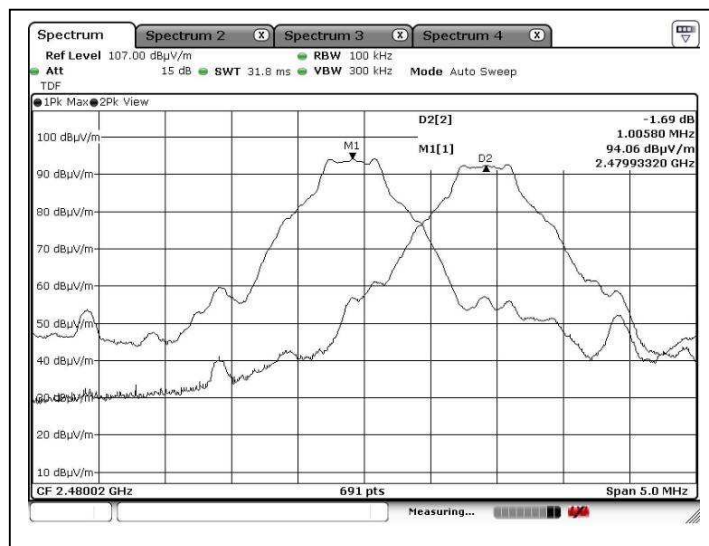

CH77-CH78

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 40 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A10. Bluetooth Hopping Channel

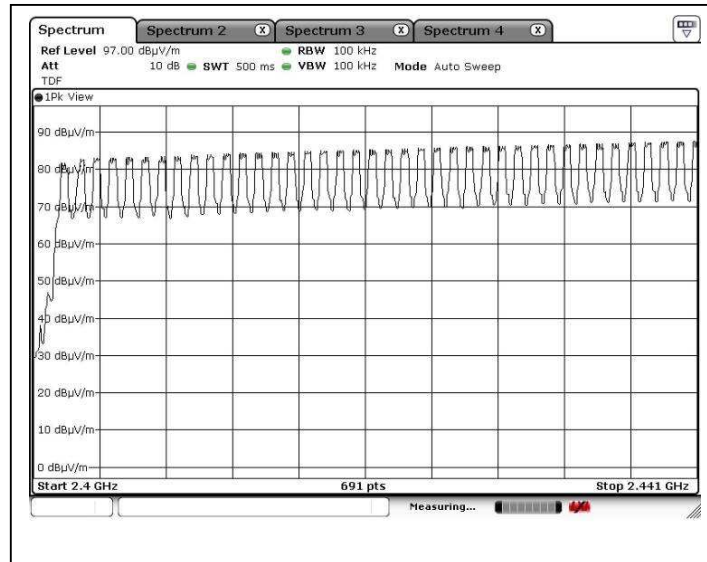

CH00-CH39

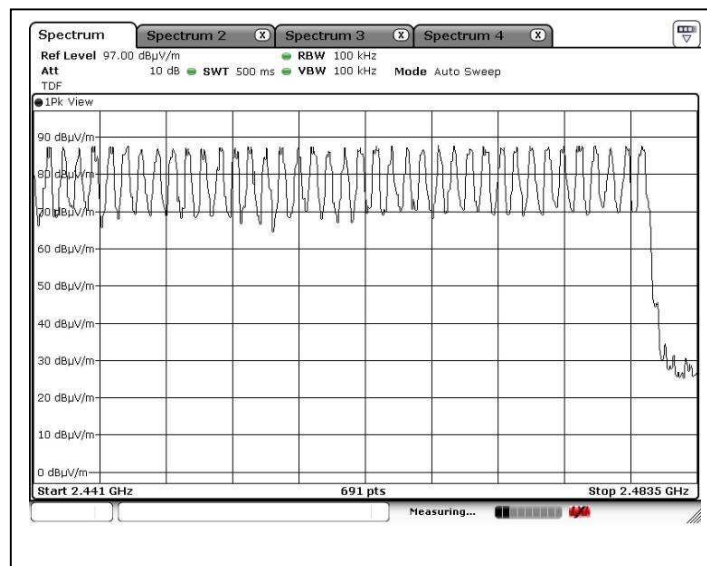

CH39-CH78

Tested by:
Mr. LEUNG Shu-kan, Ken

Reviewed by:
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0049546(6)

Date : 02 Sep 2013

A11. Bluetooth Band Edge

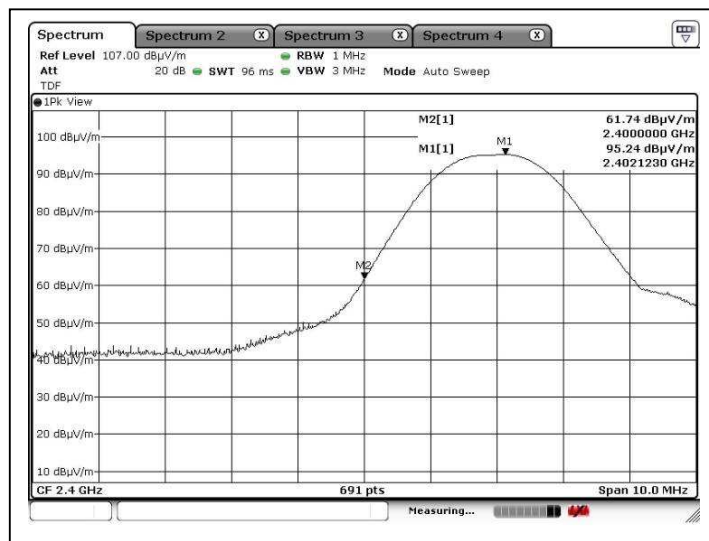

Edge 1

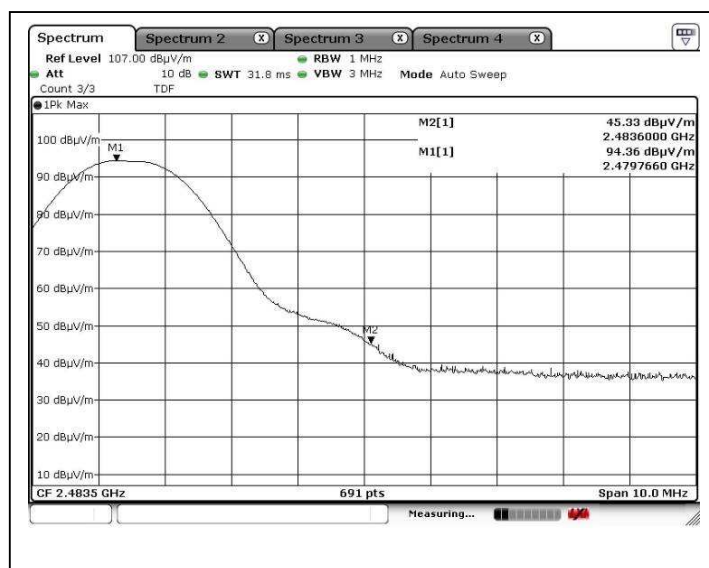

Edge 2

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR.

Mr. WONG Lap-pong, Andrew

Page 42 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH00

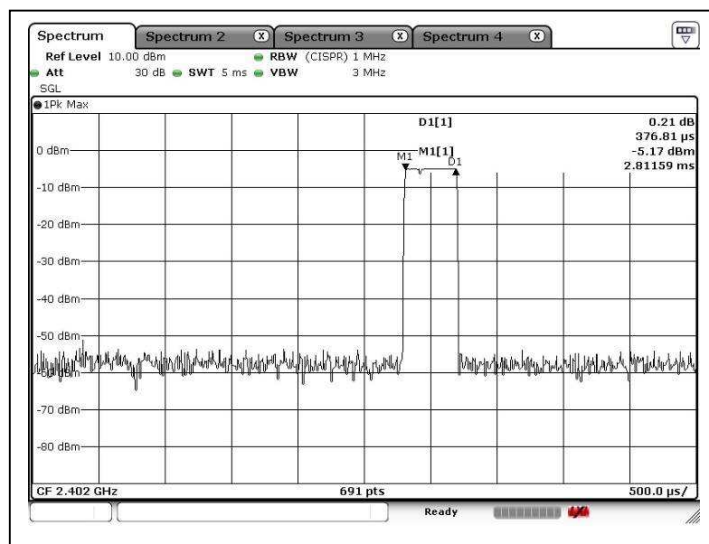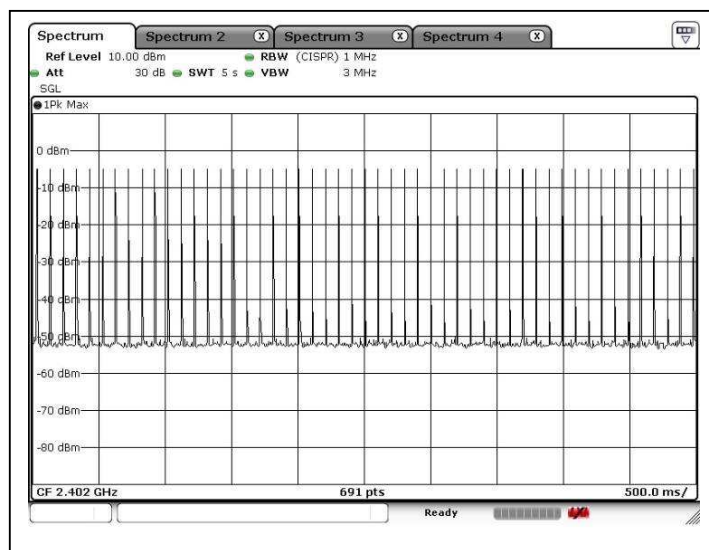

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew

Page 43 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH00

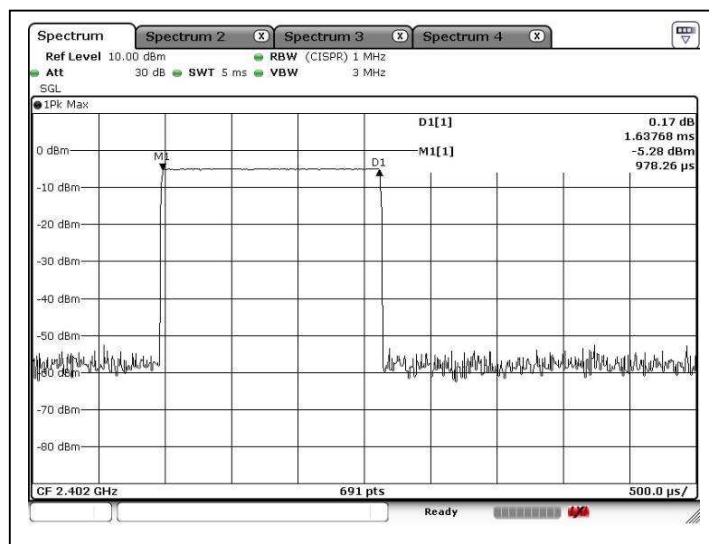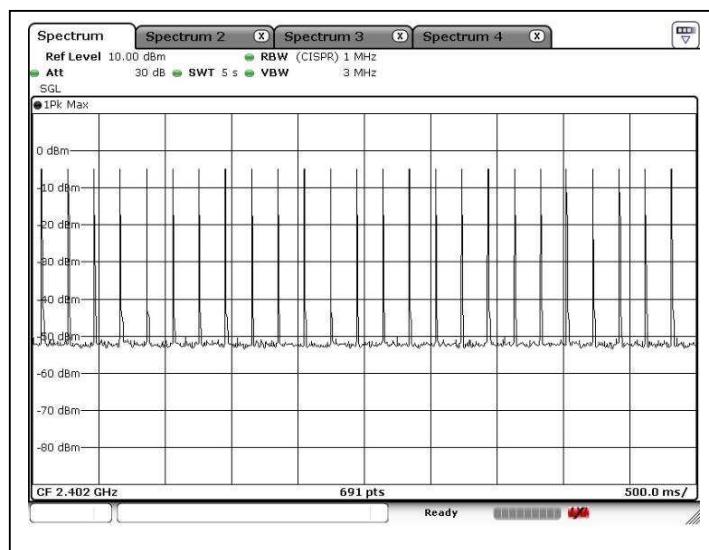

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PR.*
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH00

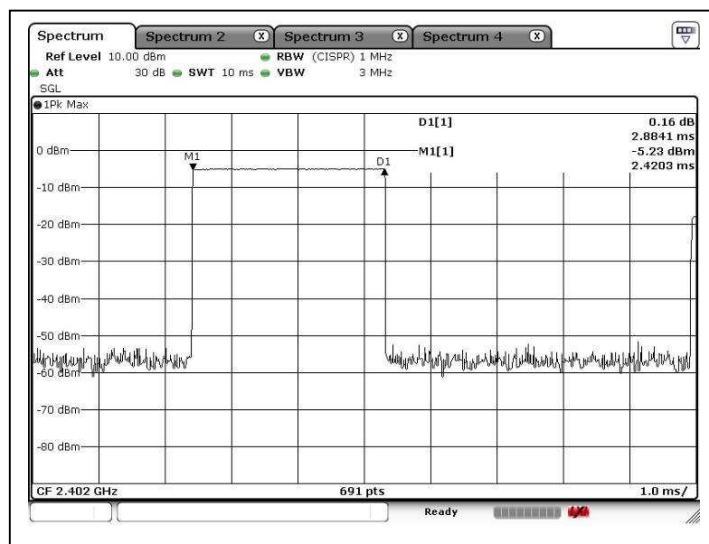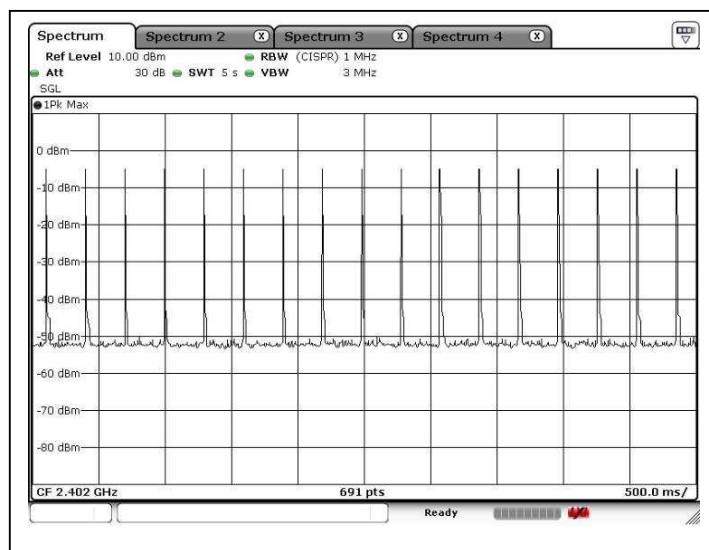

Tested by:
Mr. LEUNG Shu-kan, Ken

Reviewed by:
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH39

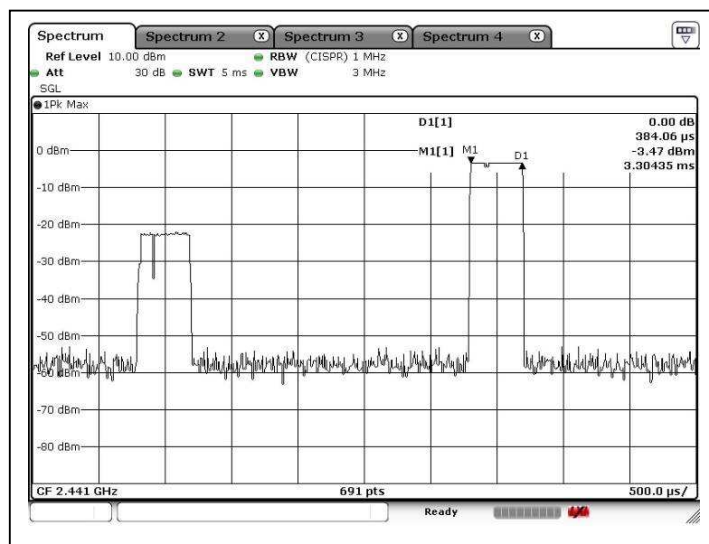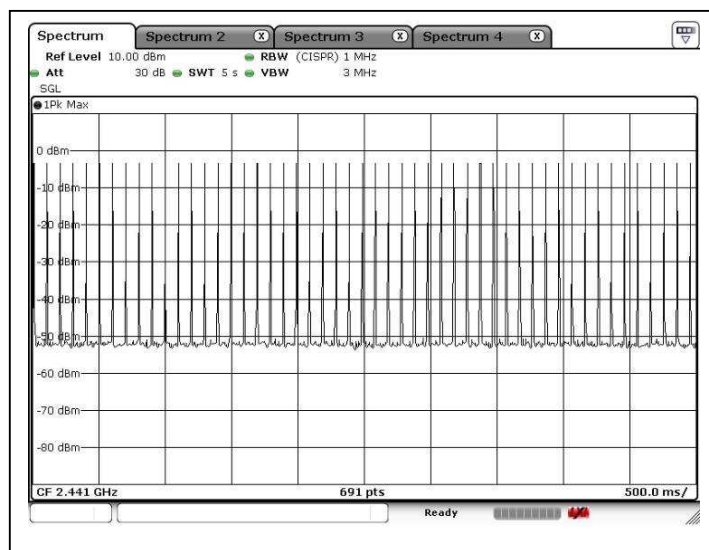

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew

Page 46 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH39

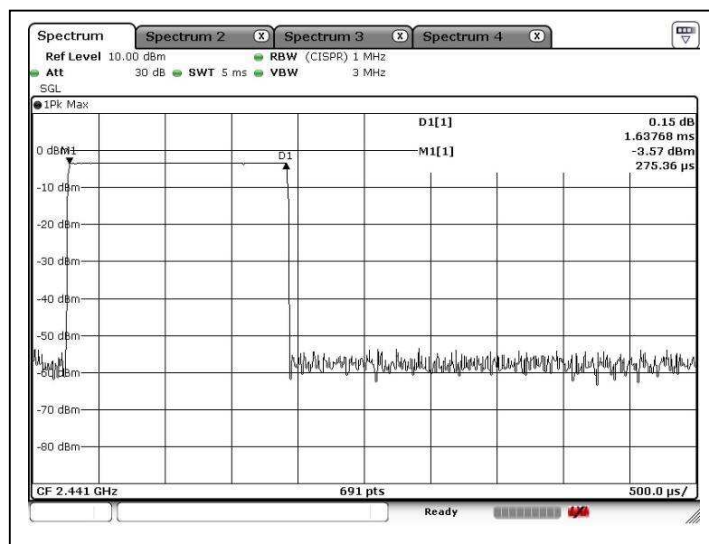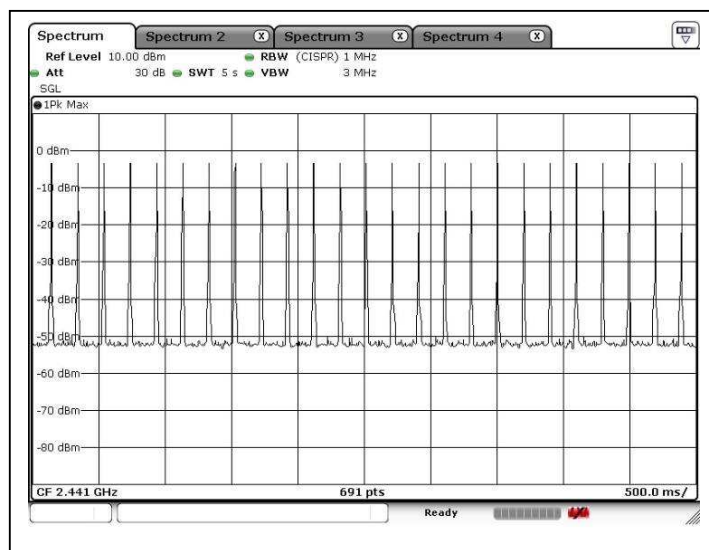

Tested by:
Mr. LEUNG Shu-kan, Ken

Reviewed by:
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH39

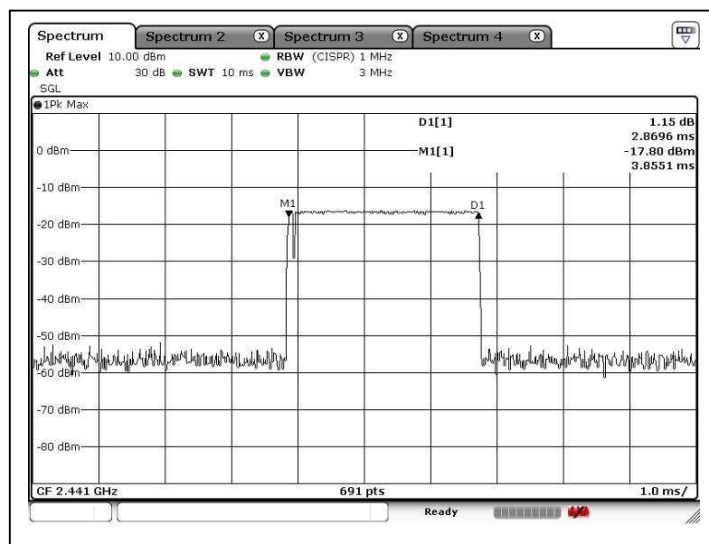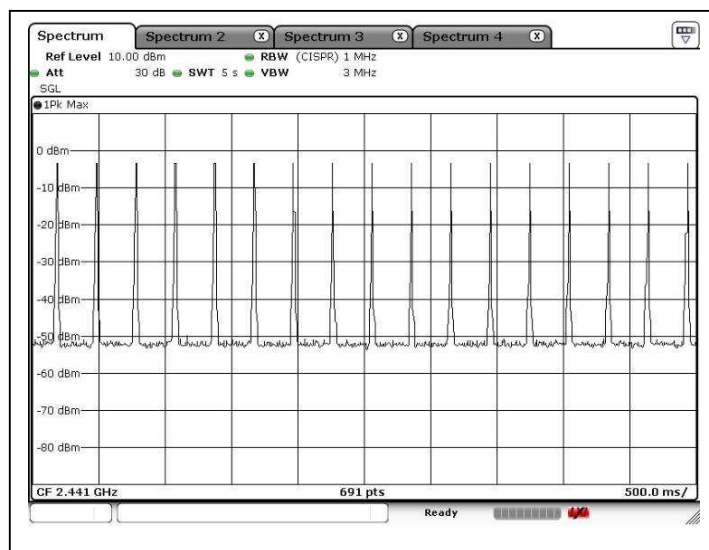

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PR.*
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH78

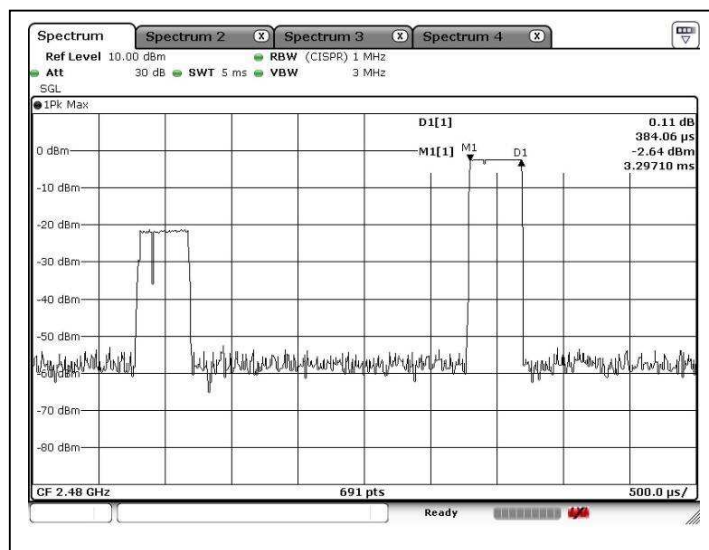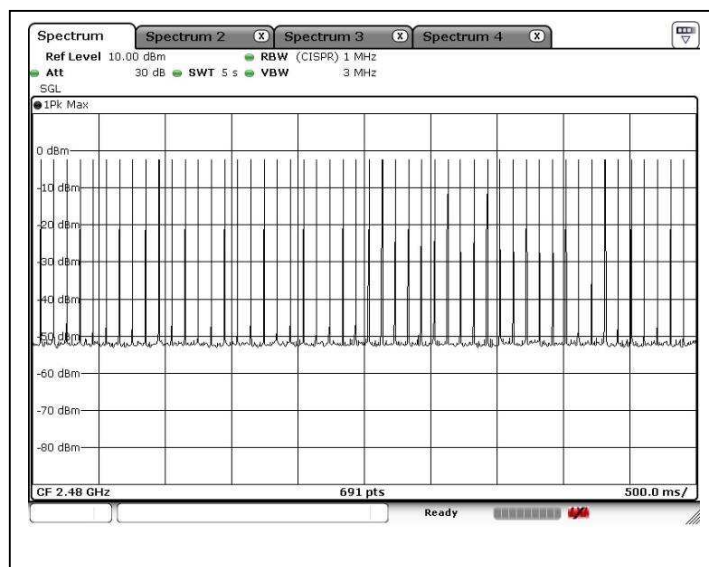

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew

Page 49 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH78

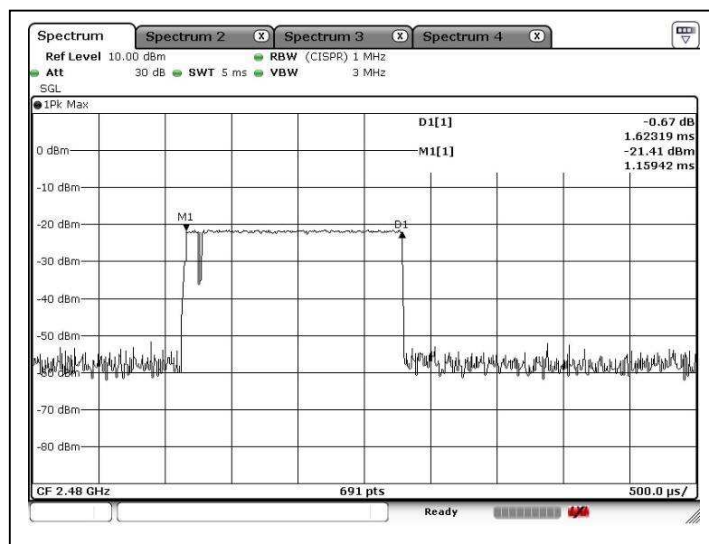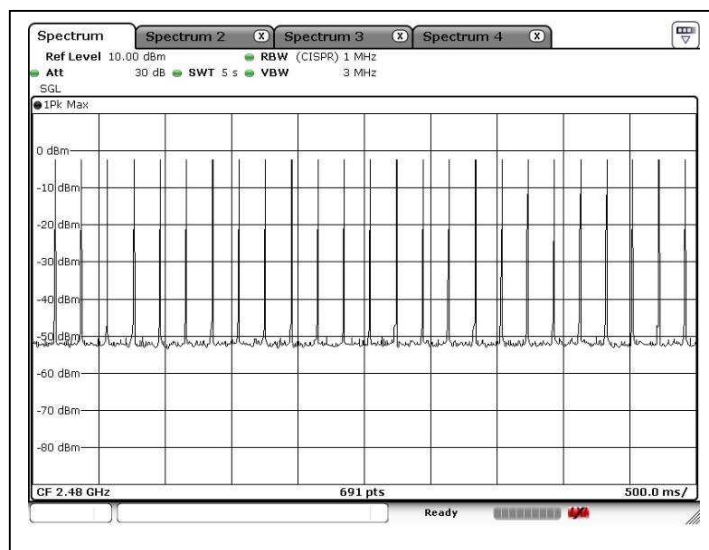

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PR.*
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories



廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH78

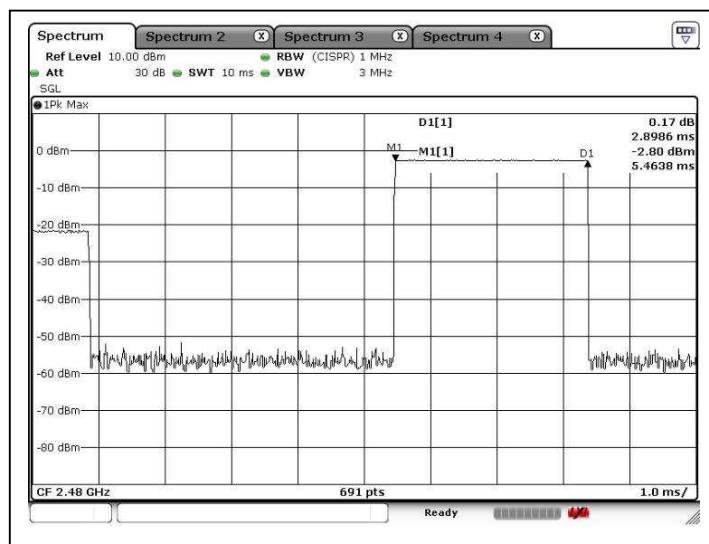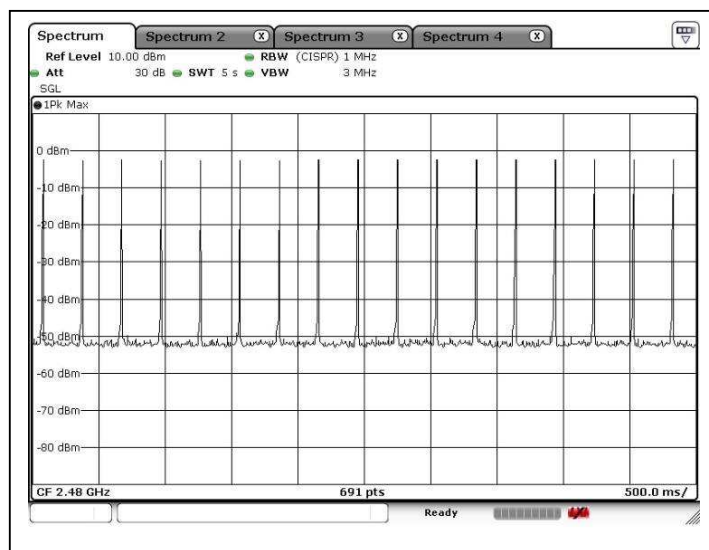

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew

Page 51 of 53

FCC ID: KKI-F-31B8

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)


Date : 02 Sep 2013

A13. Transmission Power

Channel: CH00

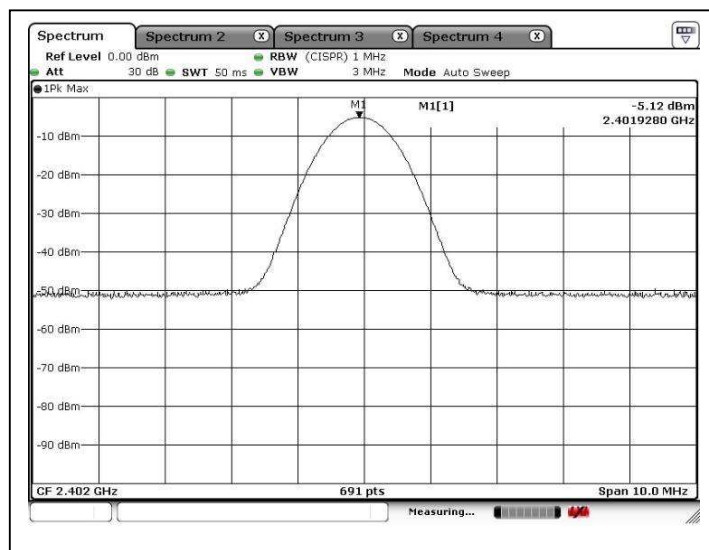

Channel: CH39

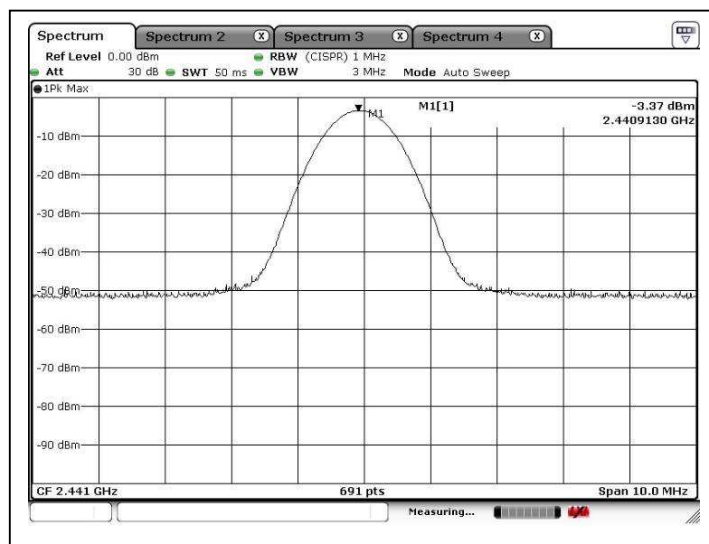

Tested by:
Mr. LEUNG Shu-kan, Ken

Reviewed by:
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心 **TEST REPORT**

Report No. : AR0049546(6)

Date : 02 Sep 2013

A13. Transmission Power

Channel: CH78

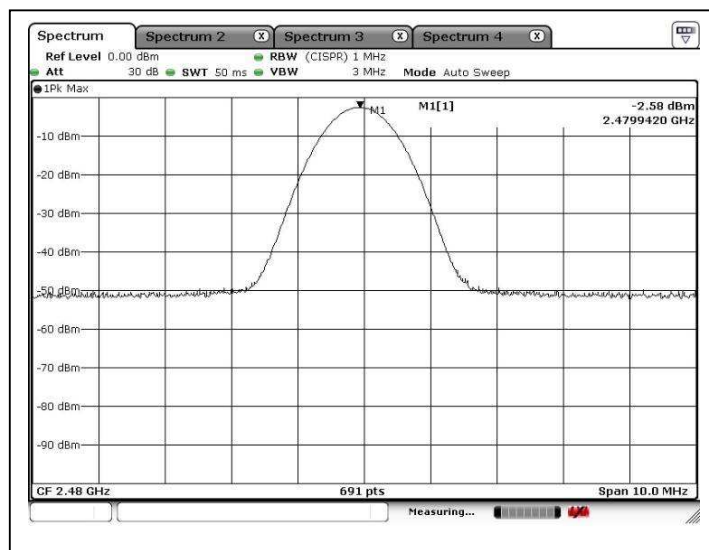

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew