

TEST REPORT

Part 22 Subpart H, Part 24 Subpart E

Equipment under test Mobile Security Parent

Model name ST-900-CP

FCC ID KL7ST-900-CP

Applicant Savi Technology Inc.

Manufacturer Dae Kyung Philippines, Inc.

Date of test(s) 2016.10.04 ~ 2016.10.16

Date of issue 2016.10.17

Issued to

Savi Technology Inc.

3601 Eisenhower Avenue, STE 280,
Alexandria VA 22304

Tel: +1-571-227-7950 / Fax: +1-571-227-7960

Issued by

KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.
C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0093
Page (2) of (23)

Revision history

Revision	Date of issue	Test report No.	Description
-	2016.10.17	KES-RF-16T0093	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	4
1.3.	Device modifications	4
1.4.	Derivation model information	4
1.5.	Frequency/channel operations	5
1.6.	Worst case configuration	5
2.	Summary of tests	6
3.	Test results	7
3.1.	Radiated spurious emission	7
Appendix A.	Measurement equipment	22
Appendix B.	Test setup photos	23

1. General information

Applicant: Savi Technology Inc.
Applicant address: 3601 Eisenhower Avenue, STE 280, Alexandria VA 22304
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
FCC rule part(s): Part 22 Subpart H, Part 24 Subpart E
FCC ID: KL7ST-900-CP
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test Mobile Security Parent
Frequency range Tx :433.92 MHz, 123 kHz
Rx :433.92 MHz
GSM 850 : 824.2 MHz ~ 848.8 MHz
GSM 1900 : 1850.2 MHz ~ 1909.8 MHz
Modulation technique 433.92 MHz : FSK, 123 kHz : ASK
GSM : GMSK
Number of channels 433.92 MHz : 1ch, 123 kHz : 1ch
GSM 850 : 125ch, GSM 1900 : 300ch
Antenna specification 433.92 UHF Antenna type: PCB, Peak gain: -0.97 dBi
GSM 850 Antenna type: PCB, Peak gain: -0.30 dBi
GSM 1900 Antenna type: PCB, Peak gain: -1.70 dBi
Power source DC 3.7 V / 2800 mAh Li-polymer battery

Note:

1. Certificated GSM/GPRS module is mounted in the EUT as following
 - Applicant: Shanghai Simcom Ltd.
 - FCC Identifier : UDV-20160416
 - Model: SIM808
2. The installed module is completed identical as original.
3. ST-900-CP does not operate when charging through USB cable to AC outlet.

1.2. Test configuration

The **Savi Technology, Inc. Mobile Security Parent FCC ID: KL7ST-900-CP** was tested per the guidance of ANSI/TIA 603-D:2010 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

1.3. Device modifications

N/A

1.4. Derivation model information

N/A

1.5. Frequency/channel operations

Band	Ch.	Frequency (MHz)	Mode
GSM800	128	824.2	GSM, GPRS
	.	.	.
	190	836.6	GSM, GPRS
	.	.	.
	251	848.8	GSM, GPRS

Band	Ch.	Frequency (MHz)	Mode
GSM1900	512	1850.2	GSM, GPRS
	.	.	.
	661	1880.0	GSM, GPRS
	.	.	.
	810	1909.8	GSM, GPRS

1.6. Worst case configuration

All radiated test was performed with the EUT set to transmit mode. This report contains data of the worst case for middle channel.



2. Summary of tests


Reference	Parameter	Test results
22.917(a) 24.238(a)	Radiated spurious emission	Pass

3. Test results


3.1. Radiated spurious emission

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

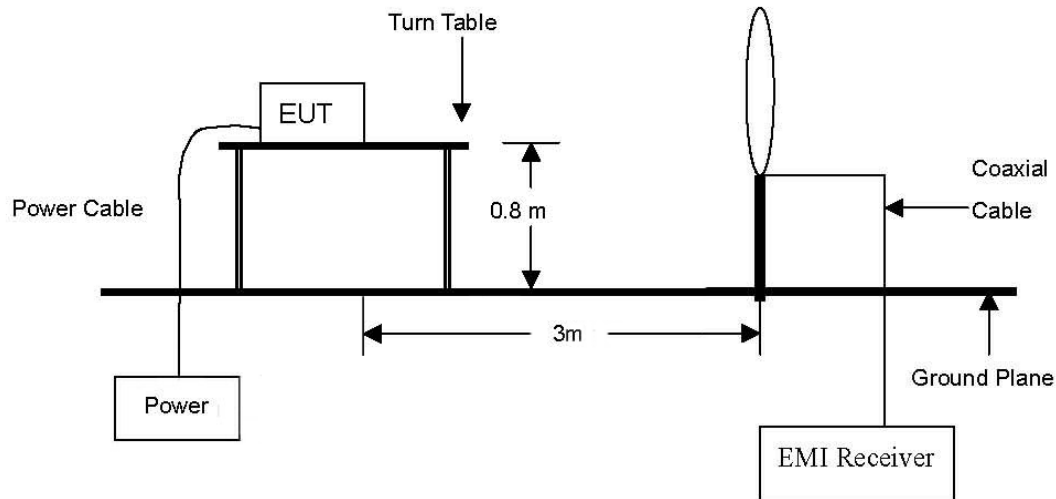


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

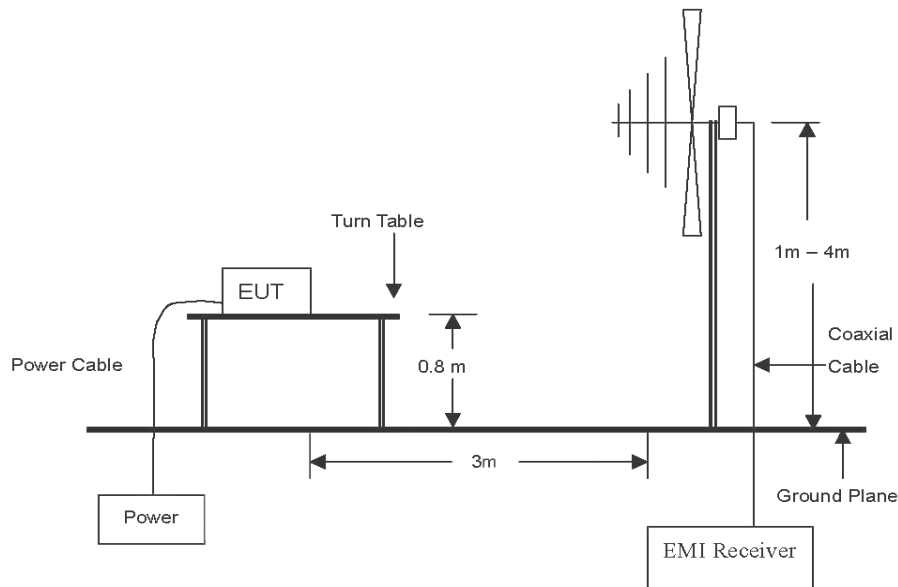

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

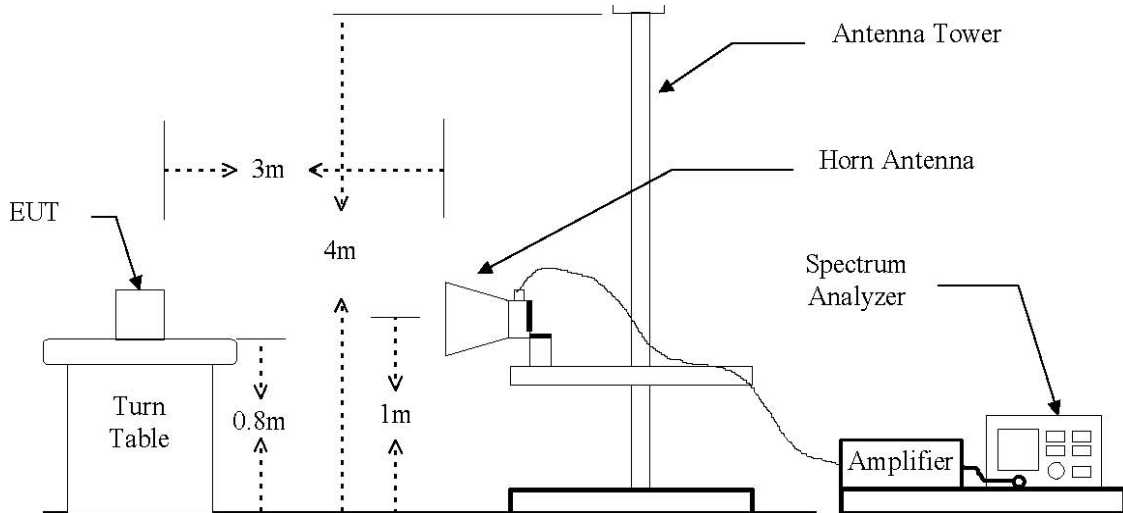

The diagram below shows the test setup for substituted method

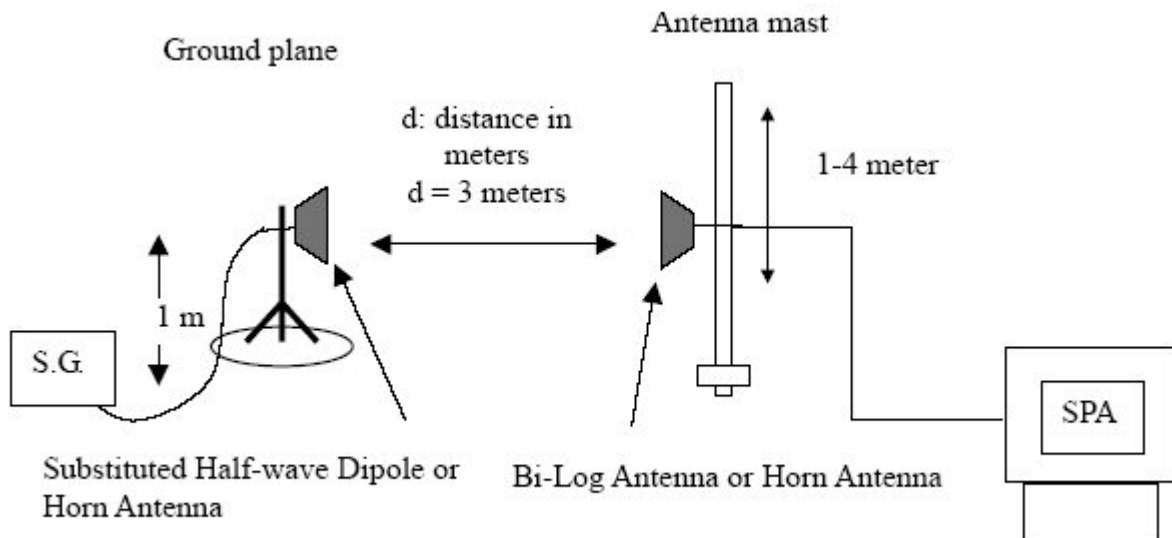

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a horn (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.



Limit


FCC §22.913(a), the ERP of mobile transmitters must not exceed 7 watts. FCC §24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

Test results (Below 30 MHz)

Mode: GPRS 850
Distance of measurement: 3 meter
Channel: 190

Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected below 30 MHz				

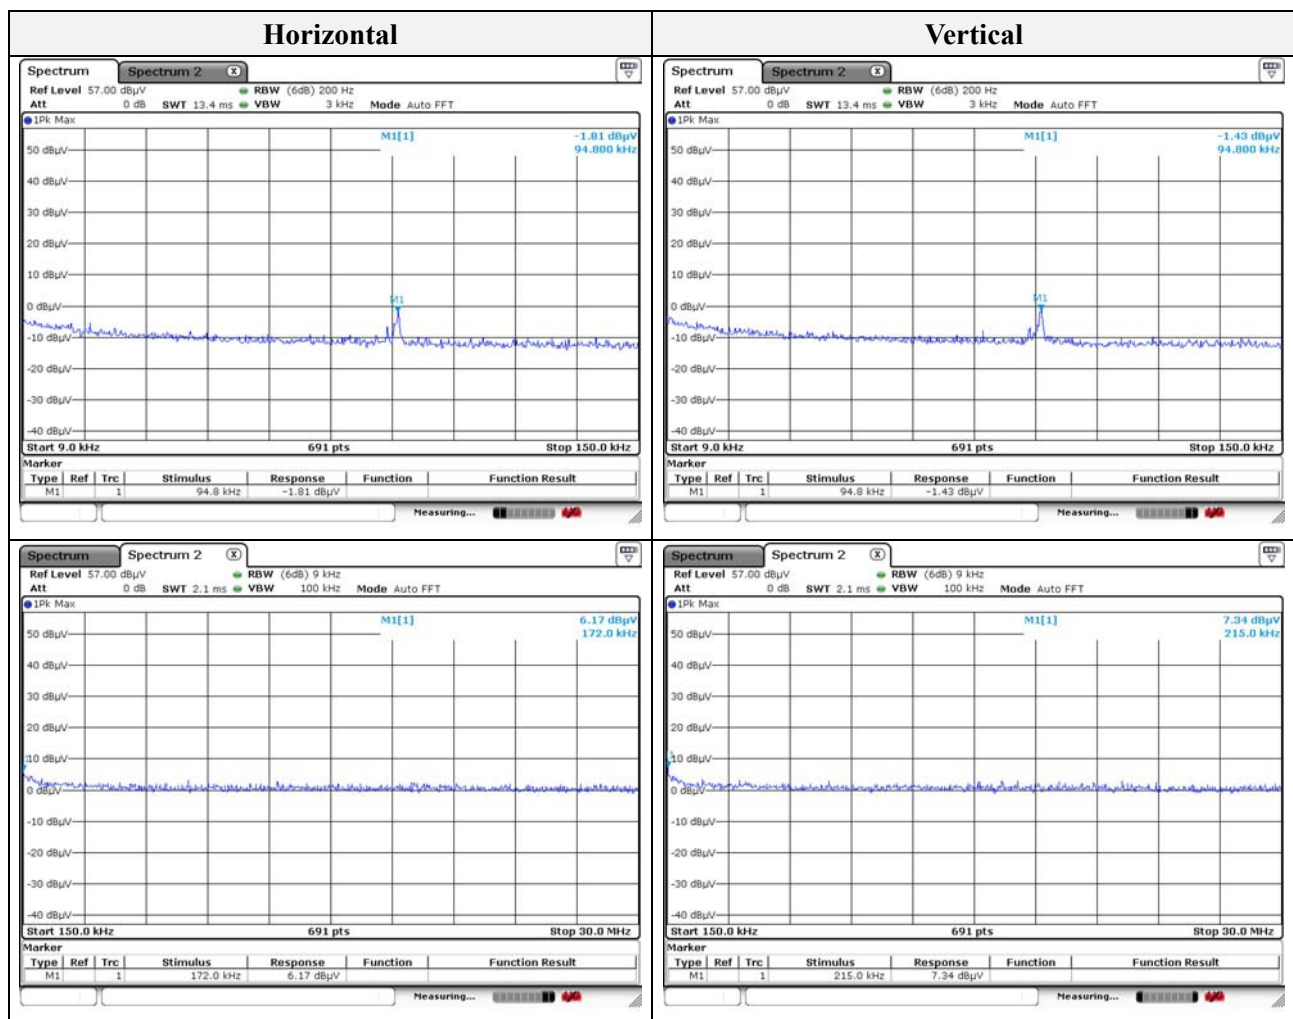


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



Mode: GPRS 1900
Distance of measurement: 3 meter
Channel: 661

Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected below 30 MHz				

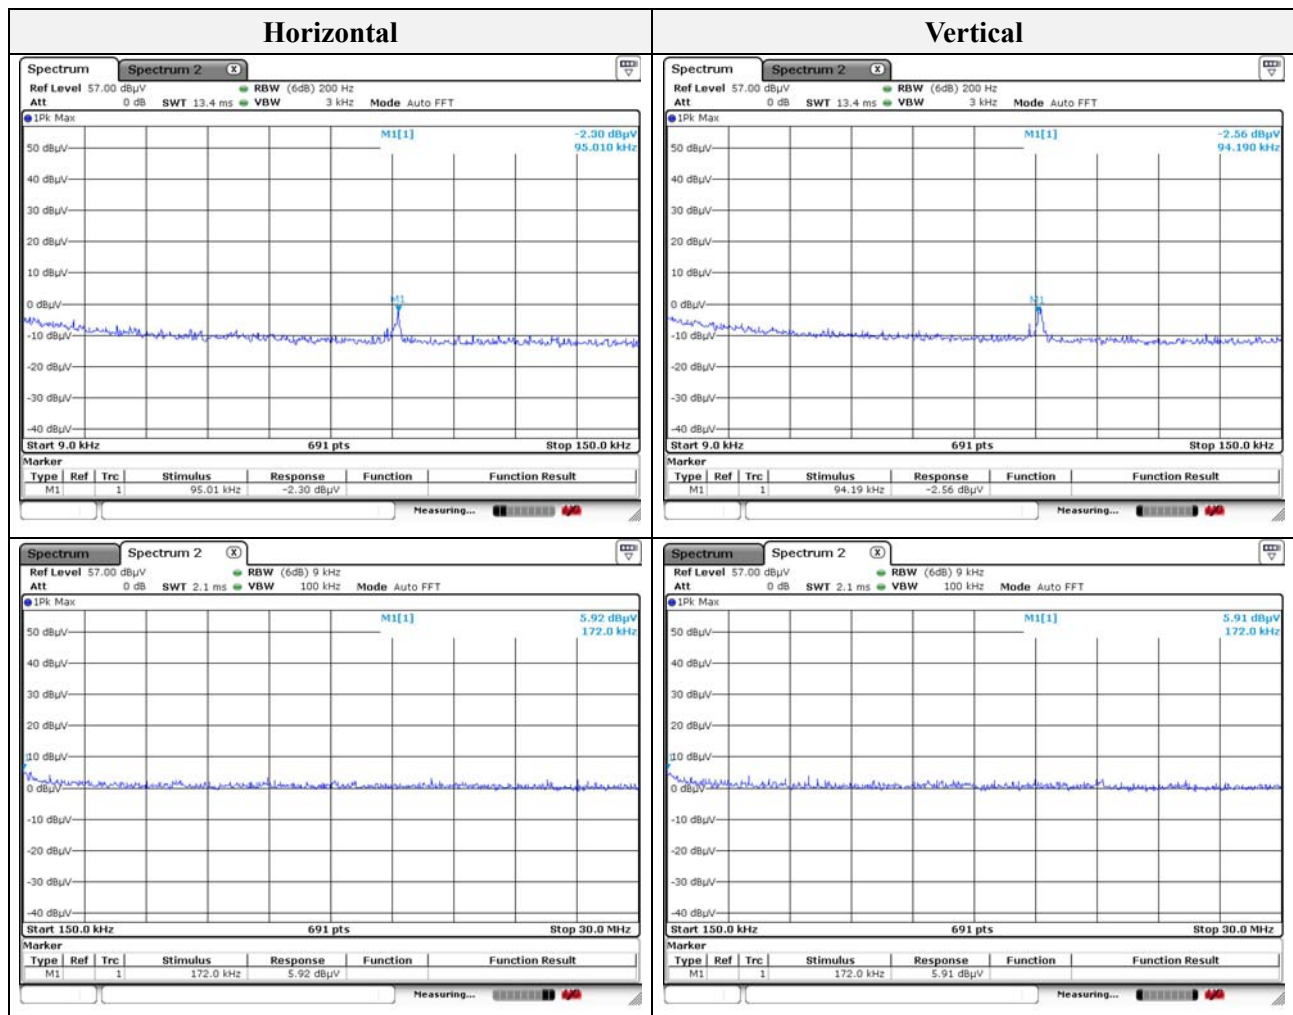




Test results (Below 1 GHz)

Mode: GSM 850

Distance of measurement: 3 meter

Channel: 190


Frequency (MHz)	Ant. Pol. (H/V)	E.R.P.	
		(dBm)	(W)
836.50	H	1.60	0.001
836.50	V	10.47	0.011

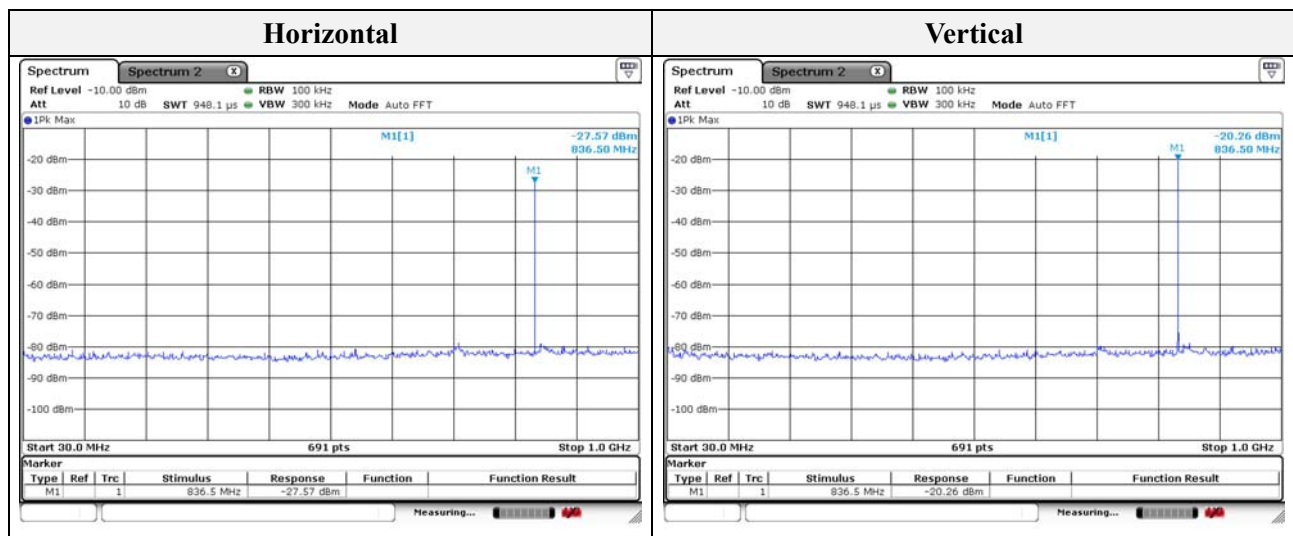



Mode: GPRS 850
Distance of measurement: 3 meter
Channel: 190


Frequency (MHz)	Ant. Pol. (H/V)	E.R.P.	
		(dBm)	(W)
836.50	H	-9.57	0.0001
836.50	V	-0.92	0.0008

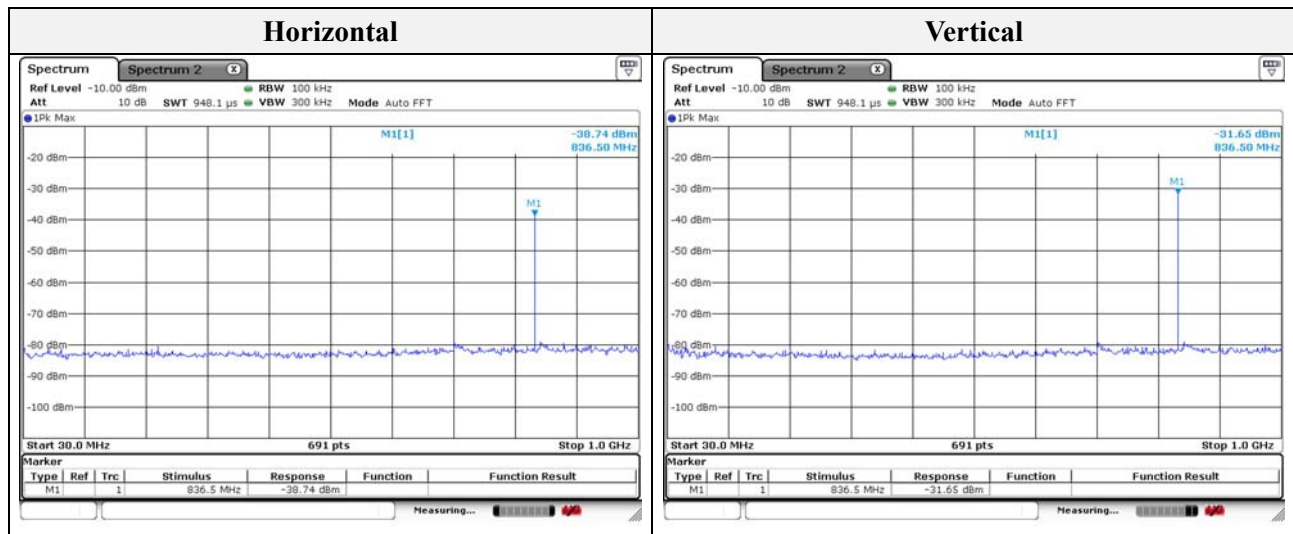



Mode: GSM 1900
Distance of measurement: 3 meter
Channel: 661


Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected below 1 GHz				

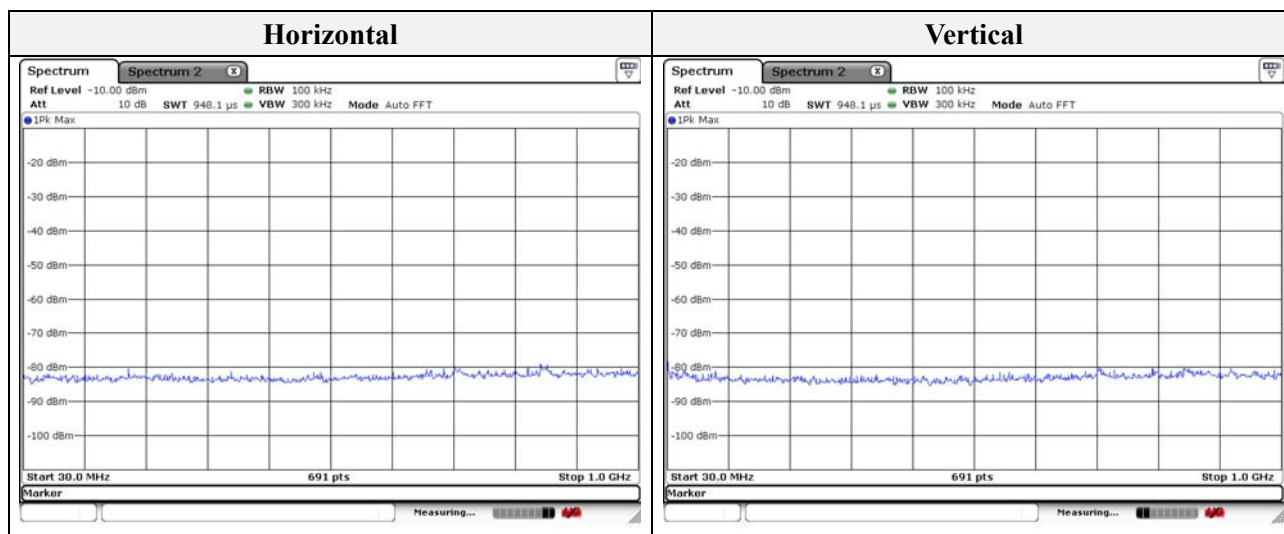



Mode: GPRS 1900
Distance of measurement: 3 meter
Channel: 661

Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected below 1 GHz				

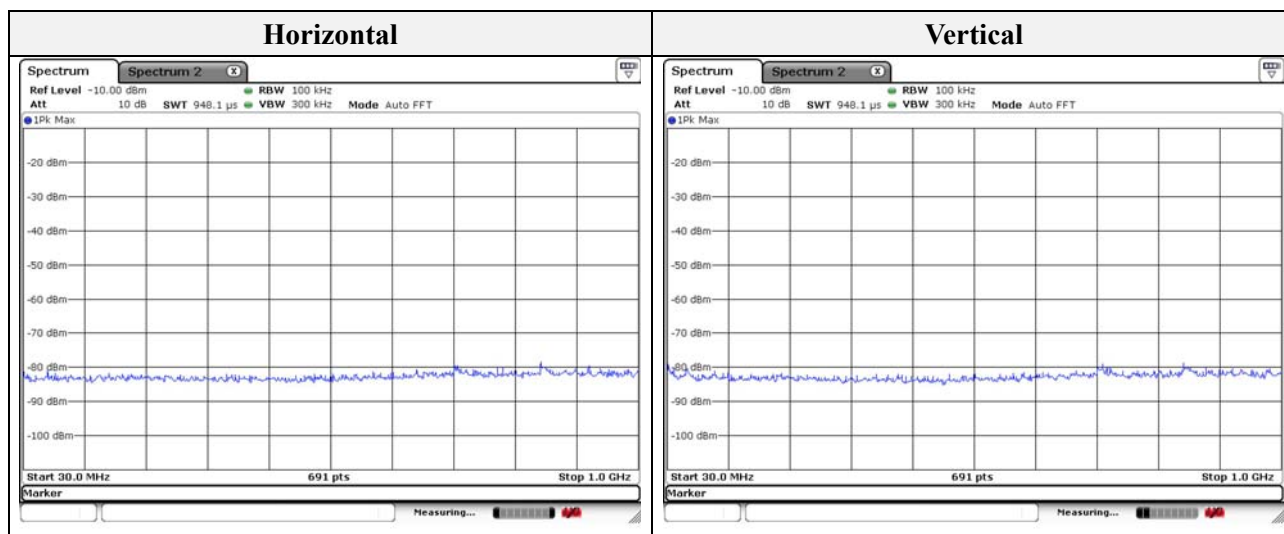




Test results (above 1 GHz)

Mode: GSM 850
Distance of measurement: 3 meter
Channel: 190


Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected above 1 GHz				

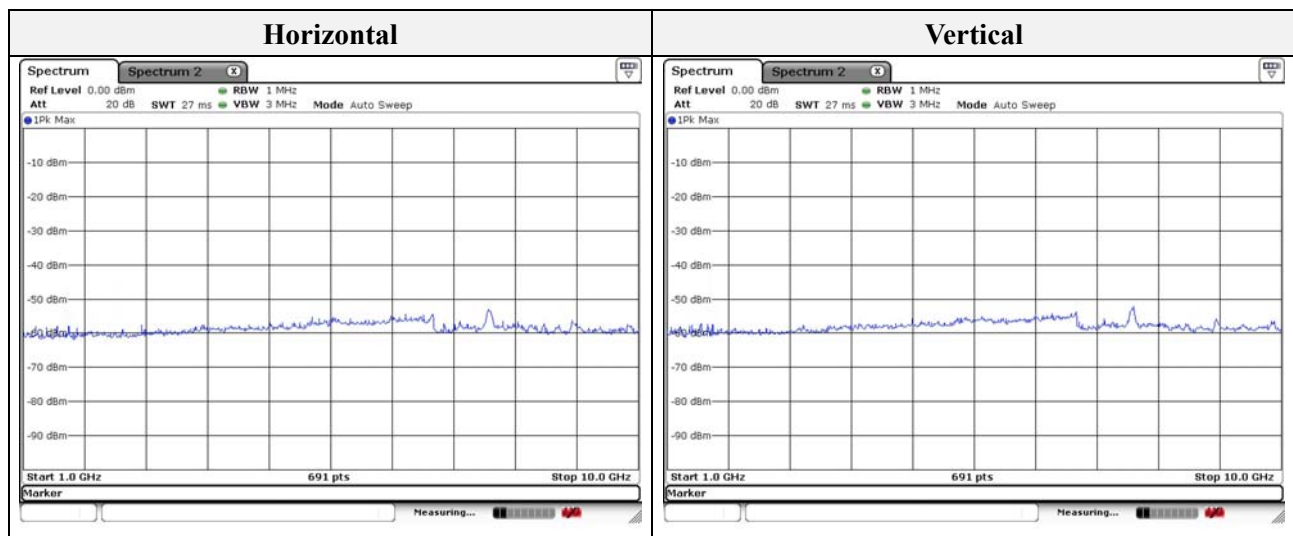



Mode: GPRS 850
Distance of measurement: 3 meter
Channel: 190

Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected above 1 GHz				

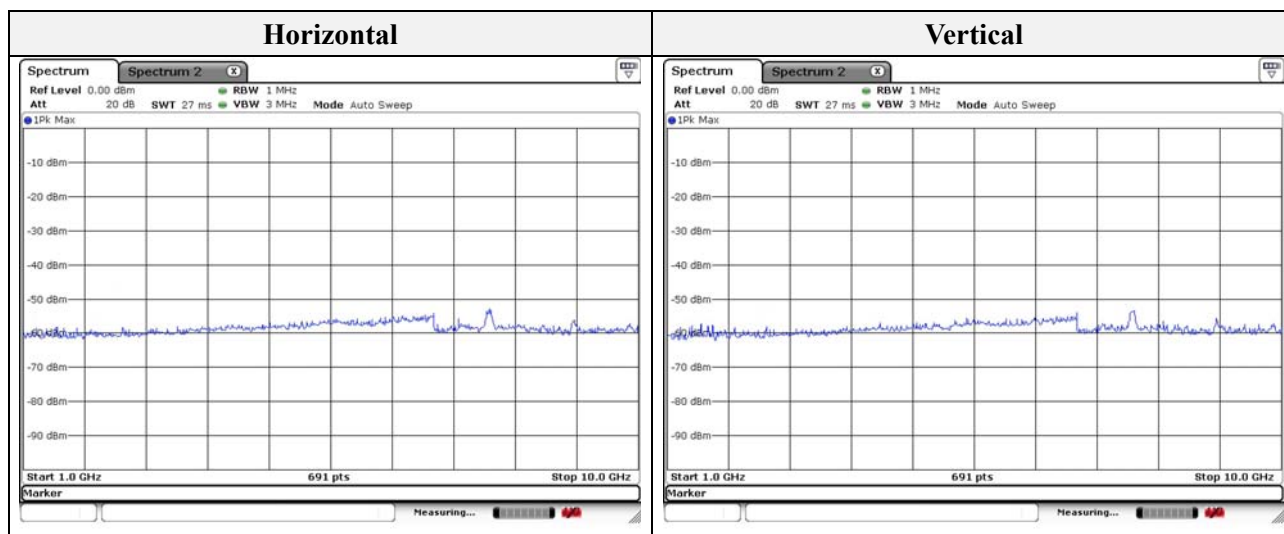




Mode: GSM 1900

Distance of measurement: 3 meter

Channel: 661


Frequency (MHz)	Ant. Pol. (H/V)	E.R.P.	
		(dBm)	(W)
1 881.30	H	19.77	0.095
1 881.30	V	25.06	0.321

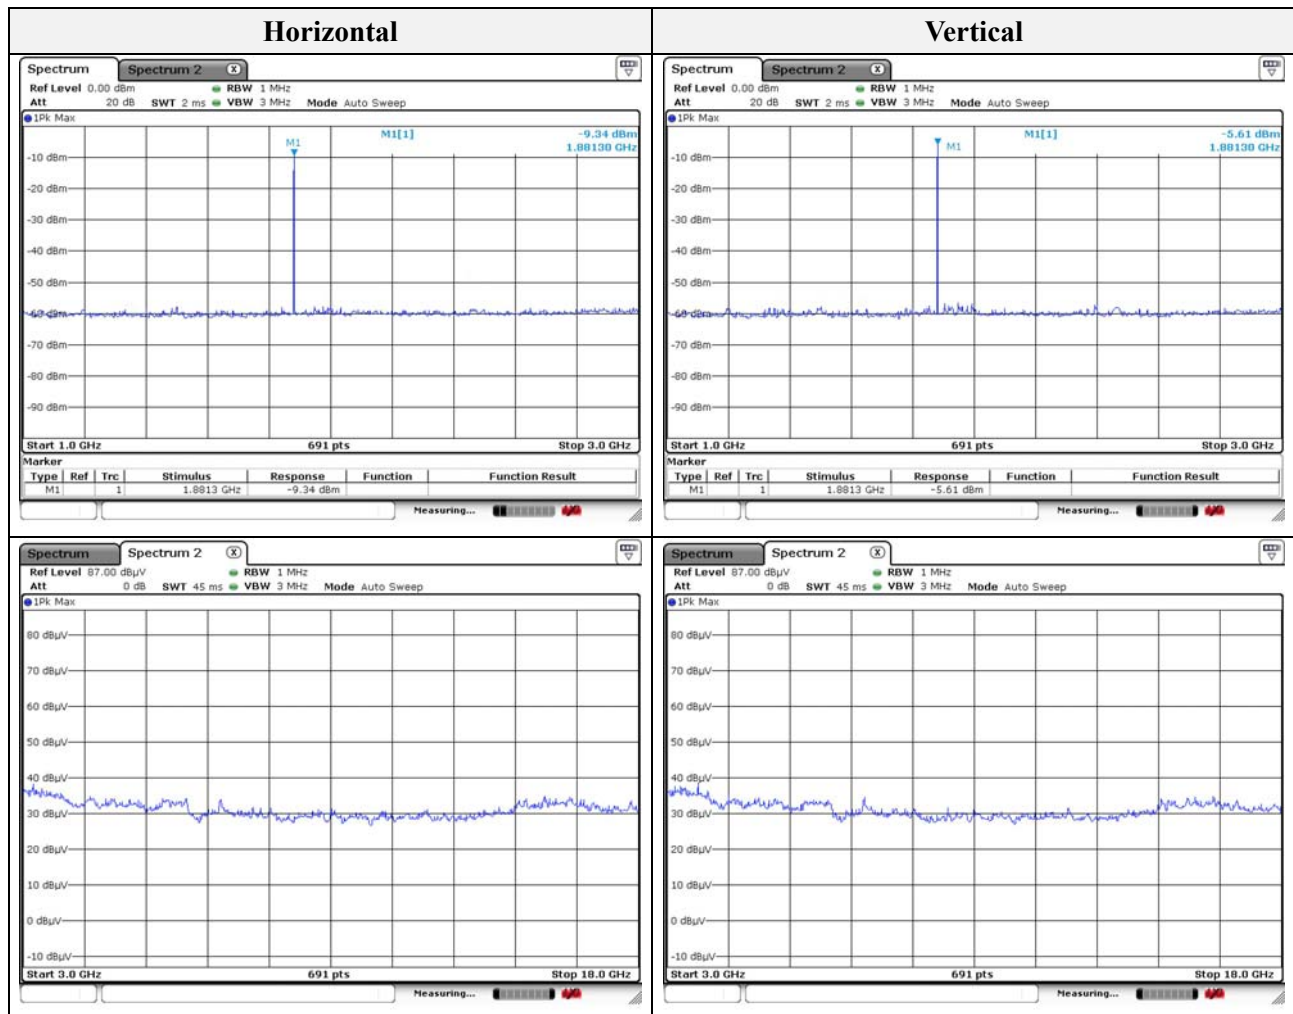



Mode: GPRS 1900
Distance of measurement: 3 meter
Channel: 661


Frequency (MHz)	Ant. Pol. (H/V)	E.R.P.	
		(dBm)	(W)
1 881.30	H	19.68	0.093
1 881.30	V	25.07	0.321

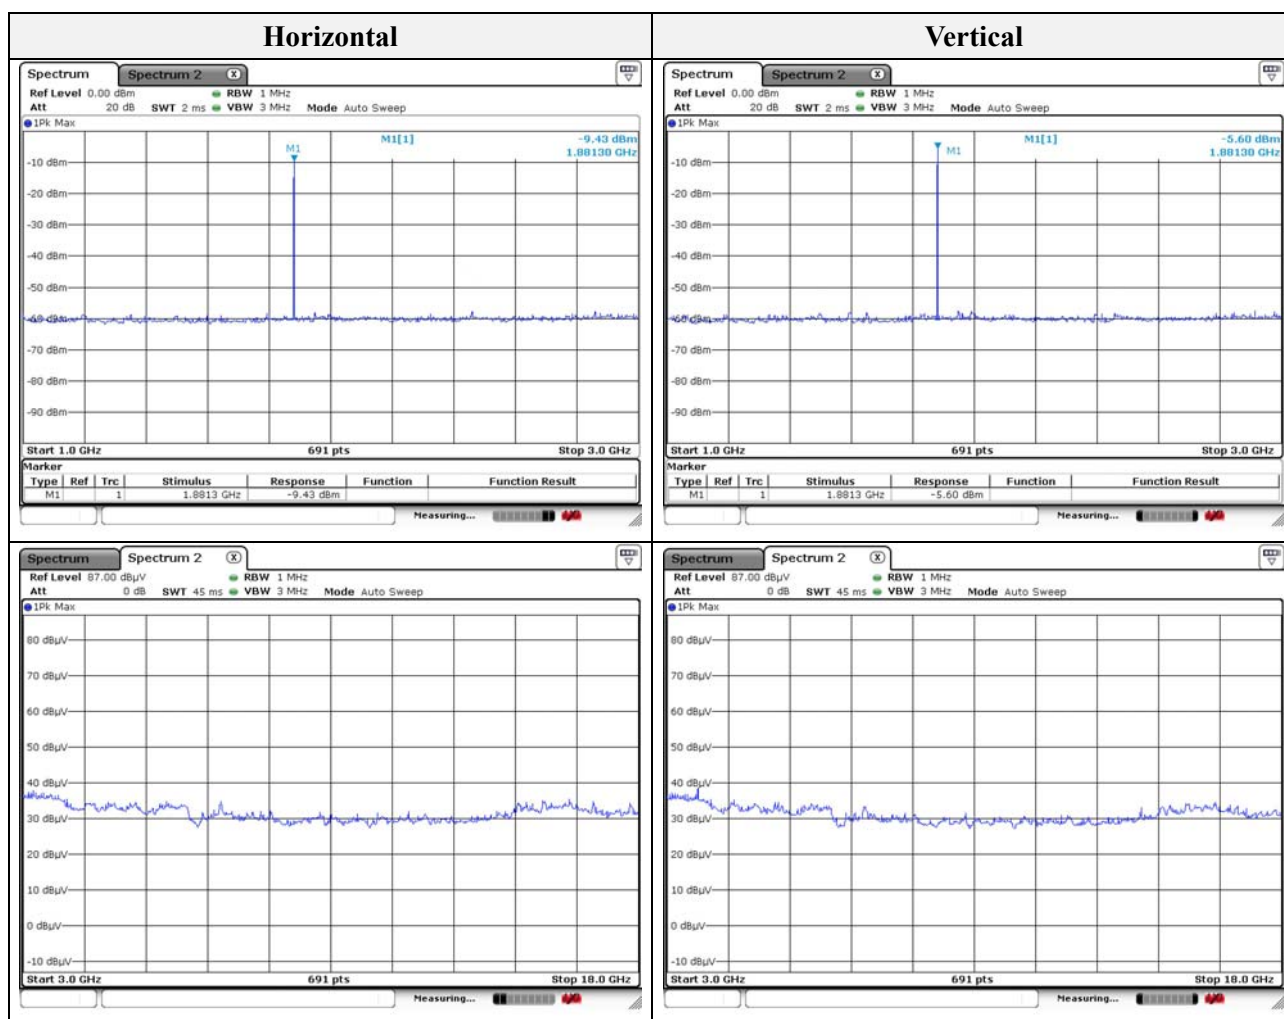



Mode: GSM 1900 // GPRS 1900
Distance of measurement: 3 meter
Channel: 661

Frequency (MHz)	Ant. Pol. (H/V)	Spurious attenuation (dBc)	Limit (dBc)	Margin (dB)
No spurious emissions were detected above 18 GHz				

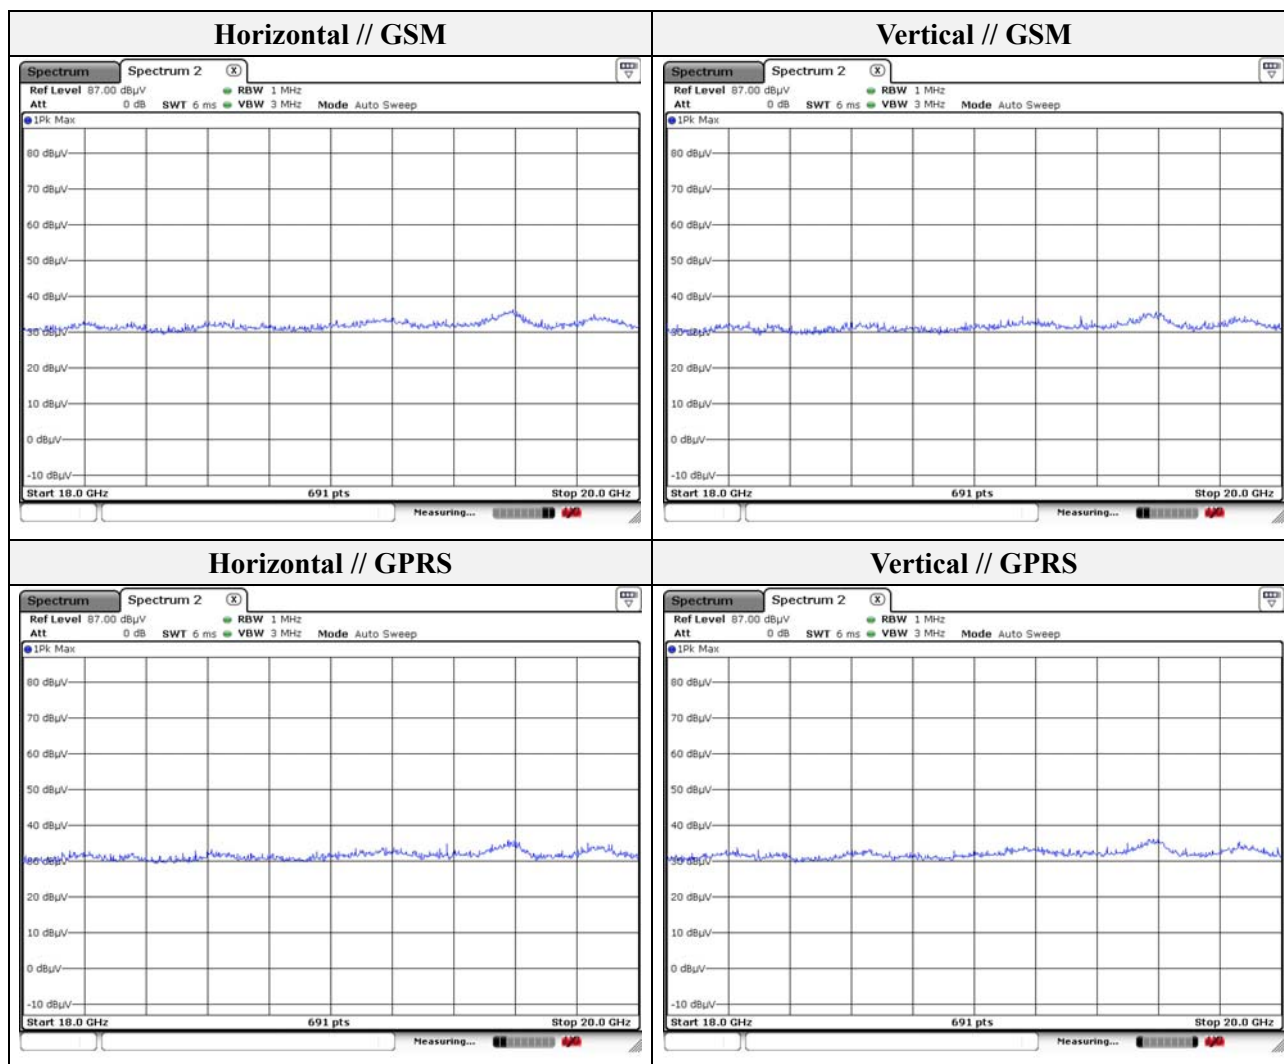



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	10076	1 year	2017.07.06
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2017.01.25
PSG Analog Signal Generator	AGILENT	E8257C	US42340237	1 year	2017.07.05
DC Power Supply	HP	6674A	US36370369	1 year	2017.07.04
Radio Communication Tester	R&S	CMW500	104198	1 year	2017.07.04
Attenuator	Agilent	8493C	51401	1 year	2017.07.05
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-713	2 years	2017.05.15
Horn Antenna	A.H.	SAS-571	781	2 years	2017.05.07
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2017.04.30
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2017.07.04
Low Pass Filter	WEINSCHL	WLK1.0/18G-10TT	1	1 year	2017.07.04
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2016.10.23
Broadband Amplifier	SCHWARZBECK	BBV-9721	PS9721-003	1 year	2017.01.25
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.05.03
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.24

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook	SAMSUNG	NT-R519-BA24J	ZKPA93ES900086Z