


Data Sheet

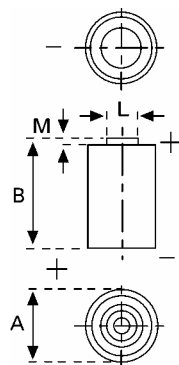

Type Number 6215
Designation IEC N/A
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... pending
Nominal Voltage 3 V
Typical Capacity C 1500 mAh
Min. Capacity C 1400 mAh
 20 mA, at 20 °C down to 1,8 V

Weight (approx.) 17 g
Volume 7 ccm

Temperature Ranges	min	max.
Storage	-20 °C	45 °C
Discharge	-20 °C	60 °C

Dimensions	min	max.
Diameter (A)	16	17
Height (B)	32,0	33,5
Shoulder Diameter[L].....	N/A	
Shoulder Height [M].....	N/A	

Segment Electronic

Main Applications Photo
 Electronic Devices

Typical Capacities (at 20 °C)

Discharge Type	End Voltage: 1.8 V
Continuous 24h/d, 7d/w, 20 mA	min. Capacity [mAh]: 1400