

EMC Testing

Report on the Testing
of
McMurdo
EPIRB E3

1 Introduction

- 1.1 The Maritime Navigational Systems (MNS), DERA Fraser, Portsmouth, part of the Defence Evaluation and Research Agency is an independent Shoreside test laboratory equipped to conduct Type Approval and Prototype Testing on Marine Navigational, Radio Communications and Safety Equipment. The Test Laboratories at DERA Fraser have been Accredited by the United Kingdom Accreditation Service (UKAS), under their NAMAS scheme, for Performance and Environmental testing on a wide range of Electronic, Mechanical, Marine Navigational and Safety Equipment. This accreditation embraces EN45001, EN29000, and ISO/IEC Guide 25.

The tests conducted on the EPIRB E3 were designed to prove compliance with the EMC tests contained in British Standards Institute (BSI) EN 60945:1997.

The Emergency Position-Indicating Radio Beacon (EPIRB) E3 is a float free maritime distress beacon that transmits on 2 frequencies, 406 MHz and 121.5MHz. At 406 MHz it transmits a digital distress signal to satellites. The 121.5MHz signal is for search and rescue operations. The EPIRB consists of two mouldings a transparent top dome and a main body. The main body is sprayed internally with a conductive coating to achieve good EMC performance. The EPIRB is activated automatically when in the water or it can be switched on manually. The EPIRB also has a Xenon flash tube which is visible through the clear top dome. The bottom moulding houses the 9V lithium battery and 2 printed circuit boards. The EPIRB is programmed via an infra-red data link, enabling the vessels unique identity number to be programmed in.

- 1.2 The Following tests of EN 60945:1997, were conducted on the submitted sample of the EPIRB E3 distress beacon.

Test Clause	Description of Test	Date of Test	Result of Test
Clause 9.3	Radiated Emissions	20-11-98	Pass
Clause 10.4	RF electromagnetic field 80 MHz - 1000 MHz	12-11-98	Pass
Clause 10.9	Electrostatic Discharge	20-11-98	Pass

Clauses 9.2, 10.2, 10.3, 10.5, 10.6, 10.7 10.8, are not applicable because this equipment is battery powered and has no external cables.

An additional test was requested by the manufacturer to cover an FCC requirement. This test was 47CFR Ch1 (10-1-97 Edition). The EPIRB E3 passed this test

The standard report sheets for these tests are contained in Appendix A.

2. Equipment under Test

- 2.1 The equipment submitted comprised of 1 item, EPIRB model E3 This item formed the complete system.
- 2.2 The unit was designated:-

EPIRB

Type: E3

Sr. No: B005

The system was powered by a lithium battery of 9V.

3 Build Standard of Test Samples

- 3.1 The test sample provided by McMurdo was stated as representative of the normal production build.

4 Conduct of Testing.

- 4.1 The EMC tests were each conducted in accordance with the DERA Fraser laboratory's standard test method NETL/M/100 for the basic standards referred to in BS EN 60945.
- 4.2 Immunity tests involving continuous phenomena were conducted to indicated levels marginally above the specification criteria to allow for the uncertainty of measurement in the test equipment producing the disturbing signal.

5 Conclusions.

- 5.1 The test sample of a McMurdo EPIRB E3 has now successfully passed a series of tests which indicate its compliance with the EMC criteria of both BS EN 60945:1997 and FCC 47CFR Ch 1 (10 - 1 - 97 Edition).

DERA

FRASER, PORTSMOUTH PO4 9LJ

Maritime Navigation Systems Group
Type Test Results Sheet
BS EN 60945:1997

Manufacturer: McMurdo Limited**File Ref.** TT 07/98**Equipment Name:** EPIRB E3**Date of issue.** Dec 98

Spurious Radiation FCC 47CFR Special Test Requested by Customer		Spurious frequencies as defined in clause 2.997 of 47CFR were measured (9KHz to 4.06025GHz). The allowable bandwidths for the modulation schemes is defined in clause 80.0250f 47CFR, this equates to 25KHz for the 121.5 MHz signal and 20KHz for the 406.025 MHz signal. The emissions limits close to the carrier for the EPIRB are defined in clause 80.211e of 47CFR. This results in limits of -25dBc between $\pm 6.25\text{KHz}$ and $\pm 12.5\text{ KHz}$ away from the carrier for the 121.65MHz frequency. For the 406.025MHz frequency the -25 dBc limits lie between $\pm 5\text{KHz}$ and $\pm 10\text{KHz}$ away from the carrier. Outside this frequency range the limit is -30 dBc. The measurements were conducted over the frequency range of 1GHz to 4.06025 GHz . See the previous section for results up to 1GHz. A wide band horn antenna coupled to a spectrum analyser was used to measure the spurious radiation levels. See appendix E for plots
	Equipment Used	59,60,61,62 (See appendix B)
Result	<u>Pass</u>	The EPIRB E3 showed no emissions above the specification limit.

SCHEDULE OF TEST EQUIPMENT

Equipment Schedule (page 1 of 2)						
No	Used	Instrument	Manufacturer	Type	Serial Number	Calibrated On
1	√	Antenna Bi-log	Chase	CBL 6112A	2138	9 - 98
2	√	Antenna Bi-log	Chase	CBL 6121A	1035	10 - 98
3		Antenna Bi-conical	Schwarzbeck			
4		Antenna log-periodic	Schwarzbeck			
5		Attenuator	Tenuline	Mod.8343-060	503	Non-cal
6		Burst generator	Schaffner	NSG 1025	339	7 - 98
7		Capacitive coupling clamp	Seaward	N/A	K48 0005	Non-cal (Physical)
8	√	Control computer	Hewlett Packard	VE 486	FR60881348	Non-cal
9	√	Control software	Chase	EMS 9920	N/A	Non-cal
10		Control Computer	DRA	486DX	9207-0336	Non-cal
11		Control Software	Chase	CIS9940	N/A	Non-cal
12	√	Control computer	Hewlett Packard	VE 486	FR60976452	Non-cal
13	√	Control software	Chase	CIS 9942	N/A	Non-cal
14		Current clamp	Chase	CIP9136	1045	Cal on use
15		Current clamp calibration jig	Chase	N/A	1067	Non-cal (Physical)
16	√	Field monitor	Amplifier research	FM1000	60687	Non-cal
17	√	Humidity/Temp Sensor	Novasina	MS1-E	136	Internal
18	√	Isotropic field probe	Amplifier research	FP1000	75523	10 - 98
19		Isotropic field probe	Amplifier research	FP1000		7 - 98
20		Isotropic field probe	Amplifier research	FP1000	75507	
21		Isotropic field probe	Amplifier research	FP1000	75510	
22		LISN/AMN	Chase	MN2050	1561	7 - 98
23		LISN/AMN	Chase	MN2053	5277	
24		LISN/AMN	Solar Electronics	0828-50-TS-24-BNC	901263	
25		LISN/AMN	Solar Electronics	0828-50-TS-24-BNC	901264	
26		LISN/AMN	Solar Electronics	8116-50-TS-100-N	967609	
27		LISN/AMN	Solar Electronics	8116-50-TS-100-N	967610	

Equipment Schedule (page 2 of 2)

No	Used	Instrument	Manufacturer	Type	Serial Number	Calibrated On
28		Measurement receiver	Chase	UHR 4000	16021	8 - 98
29	√	Measurement receiver	Chase	UHR 7000	1034	7 - 98
30		Millivoltmeter	Rohde & Schwarz	URV55	842702/025	4 - 98
31		Oscilloscope	Le Croy	9450A	9450 2804	
32	√	Power amplifier - RF	IFI (1kW)	406	1178-2068	Relative
33		Power amplifier - RF	Kalmus	225LC	7736-1	Relative
34		Power amplifier - RF	Kalmus	116FC	740 823 001A	Relative
35		Power amplifier - RF	Amplifier research	150L		Relative
36	√	Power amplifier - RF	IFI	SMCC	AG 290997	Relative
37		Power amplifier - AF	B & K Electronics	1kW Module	8/95	Relative
38		Power Meter	Marconi			
39		Power Meter	Rohde & Schwarz	392.4017.04	834414/021	Relative
40		Power supply - DC	Sonnenschein	Ulimatic	12097961	Non-cal
41		Power supply - DC	Farnell	LT 30-2	002170- XTX1-1	Non-cal
42		Power supply - DC	Farnell	AP60-150	000255	Non-cal
43		Power Supply / Harmonic test system	Hewlett Packard	6842A	3531A-00132	Cal on use
44	√	Screened room (Anechoic)	Belling-Lee Intec	7m x 5m x 3.6m	00513	Chase report 3 - 97
45	√	Signal generator	Marconi	2024	112224/033	4 - 98
46		Signal generator	Rohde & Schwarz	SMHU	835950/005	3 - 98
47		Signal generator	Rohde & Schwarz	APN04	861676/027	5 - 98
48	√	Static discharge gun	Schaffner	NSG433	102	10 - 98
49		Transformer	Solar Electronics	6220-2	No serial	Non-cal
50		40 Watt terminator	Narda	Mod.376NM	17	
51		30 dB Attenuator	Bird	8329-300	3882	
52	√	CCTV Camera	Sony	SSC-C37	17201	Non-cal
53		Surge Generator	KeyTech	CE - 50	9605486	cal on use
54		Surge Software	KeyTech	E500 Surgeware	V4.12(C) 1996	Non-cal
55		Comms Analyser	Rohde & Schwatz	CMTA 94	861093/001	3 - 98
56		Comms Service monitor	Rohde & Schwatz	CMS 54	840.0009.54	12 - 97
57		Wattmeter	Feedback	EW 1604	1604/1/21	10 - 98
58		GPS receiver	Magnavox	MX 100	No serial	Non - Cal
59	√	Spectrum Analyser	HP	8563A	3133A00878	March 98
60	√	Horn	Emco	M3115	9605/4679	June - 98
61	√	Dipole Antenna	Schwarzbeck	VHA 9103	7189	Relative
62	√	Dipole Antenna	Chase	VBA 6106	1103	Relative

Table of Uncertainty of Measurement.

QUANTITY (steady state)			Uncertainty of Measurement
Temperature -40°C to + 150°C (applied condition)			$\pm 0.5^{\circ}\text{C}$
Electrical	DC Voltage	Direct measurement	$\pm 0.5\%$
Electrical	AC Voltage (RMS)		$\pm 1.5\%$
Electrical	AC Frequency, Power (Hz)		$\pm 1\%$
Electrical	Conducted RFI	$\text{dB}\mu\text{V/m}$	$\pm 2.9 \text{ dB}$
Electrical	Radiated RFI	$\text{dB}\mu\text{V/m}$	$\pm 3.8 \text{ dB}$
Electrical	Frequency	MHz	$\pm 0.01\%$
Electrical	AF/RF voltage	RMS	$\pm 0.2\text{V}\%$
Electrical	Field Strength	$\text{V/m}(30\text{M}-1\text{GHz})$	-0, +15%

APPENDIX E

Spurious Radiation Plots

Taken during testing of

EPIRB E3


to FCC 47CFR Ch1 (10-1-97 Edition)

(Consists of 18 pages)

TT07/98 B. Hawkins PASS

ATTEN 10dB MKR -4.03dBm
RL -3.00dBm 2dB/ 406.02575MHz


MKR
406.02575 MHz
-4.03 dBm

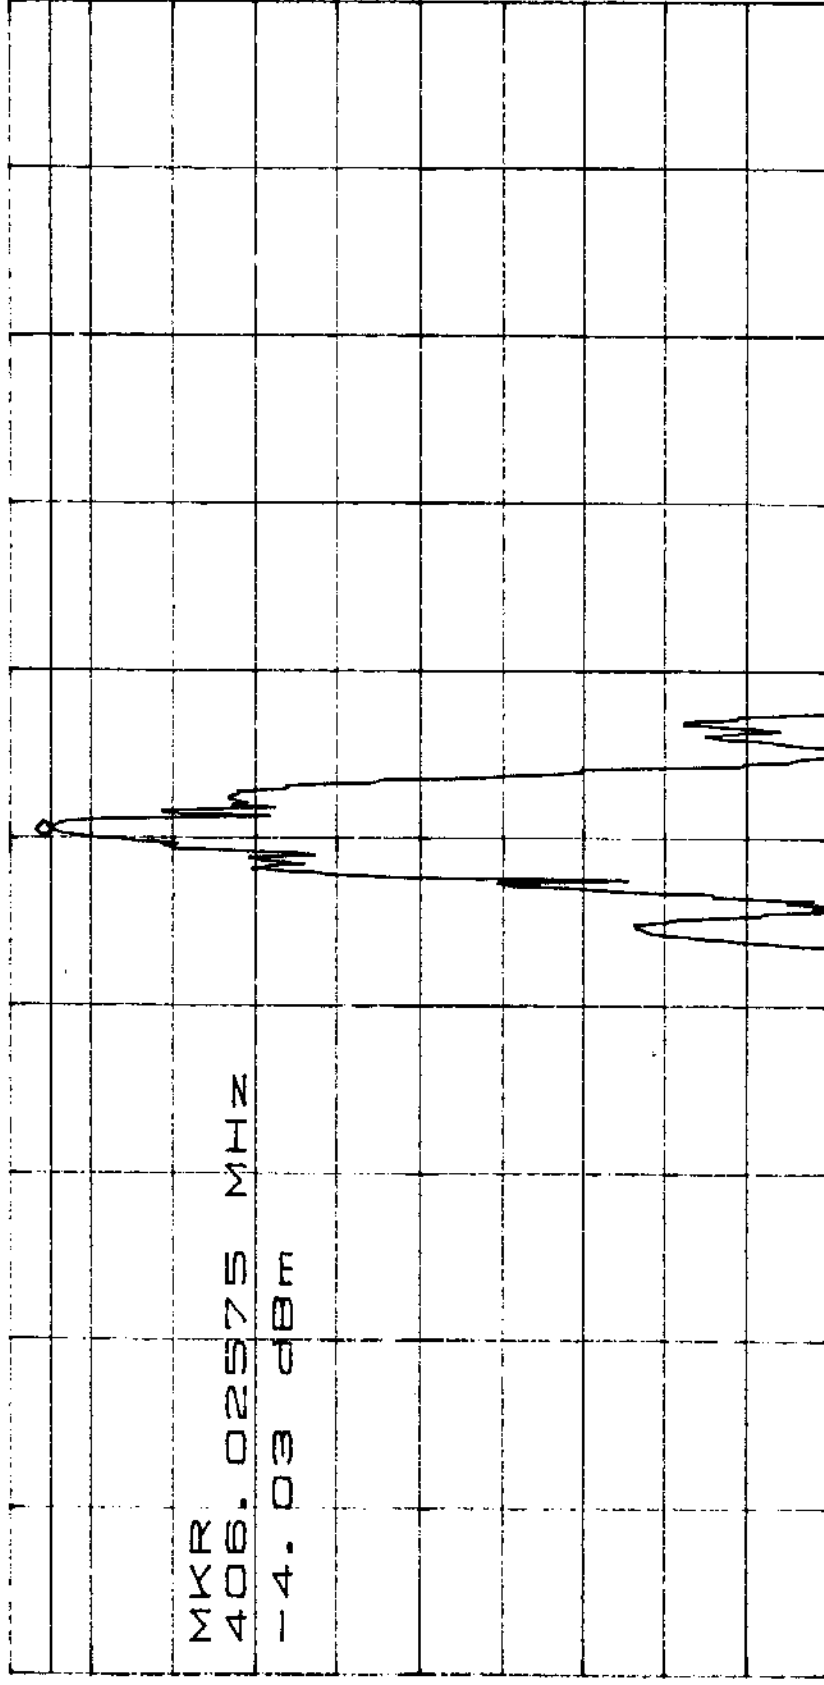


CENTER 406.02565MHz SPAN 20.00kHz
*RBW 300Hz VBW 300Hz SWP 700ms

TT07/98 A. Henkin PASS

ATTEN 10dB MKR -36.73dBm
RL -35.0dBm 2dB/ 406.020496MHz

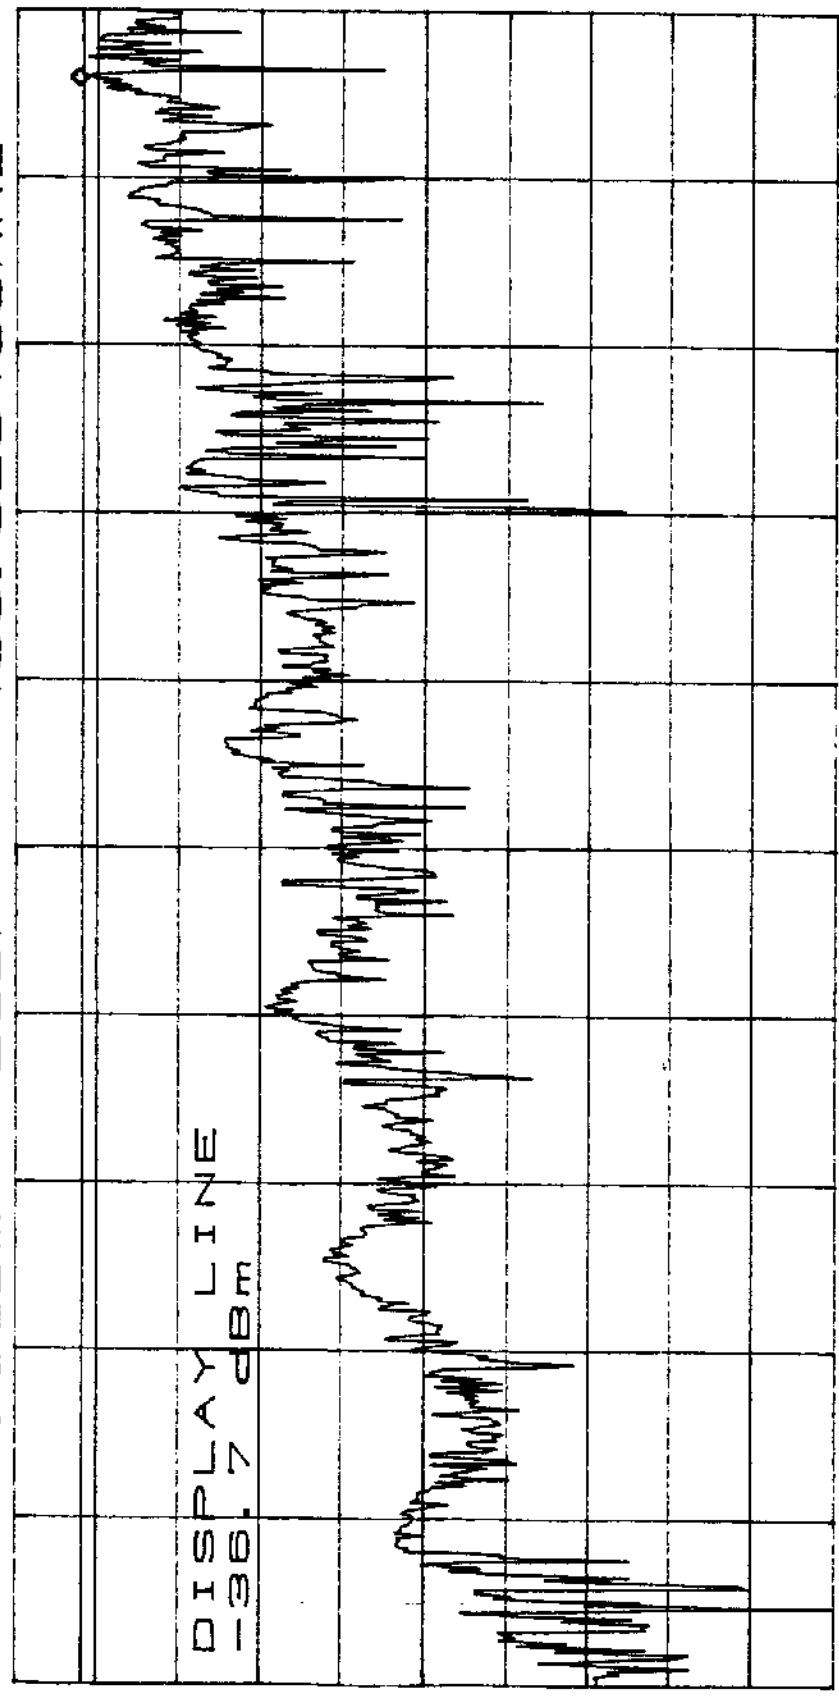


START 406.0156MHz STOP 406.0207MHz
#RBW 300Hz VBW 300Hz SWP 700Hz

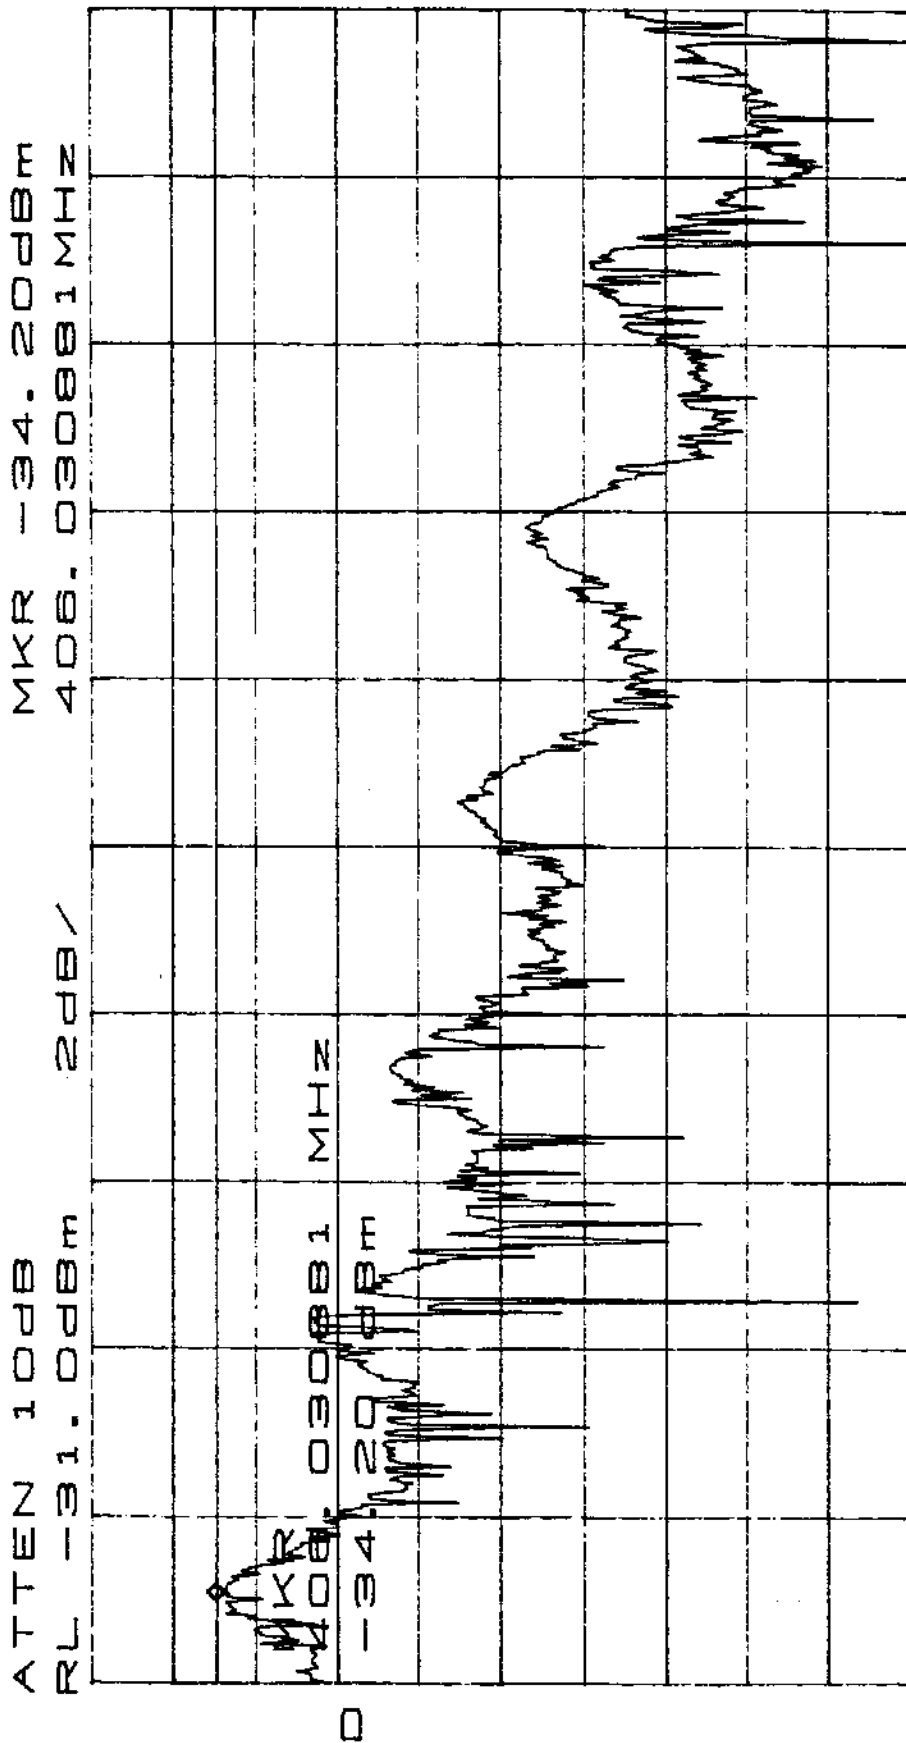

START 406.0306MHz STOP 406.0357MHz
 RBW 300Hz VBW 300Hz SWP 700ms


TT07/98 B. Hawkins PASS

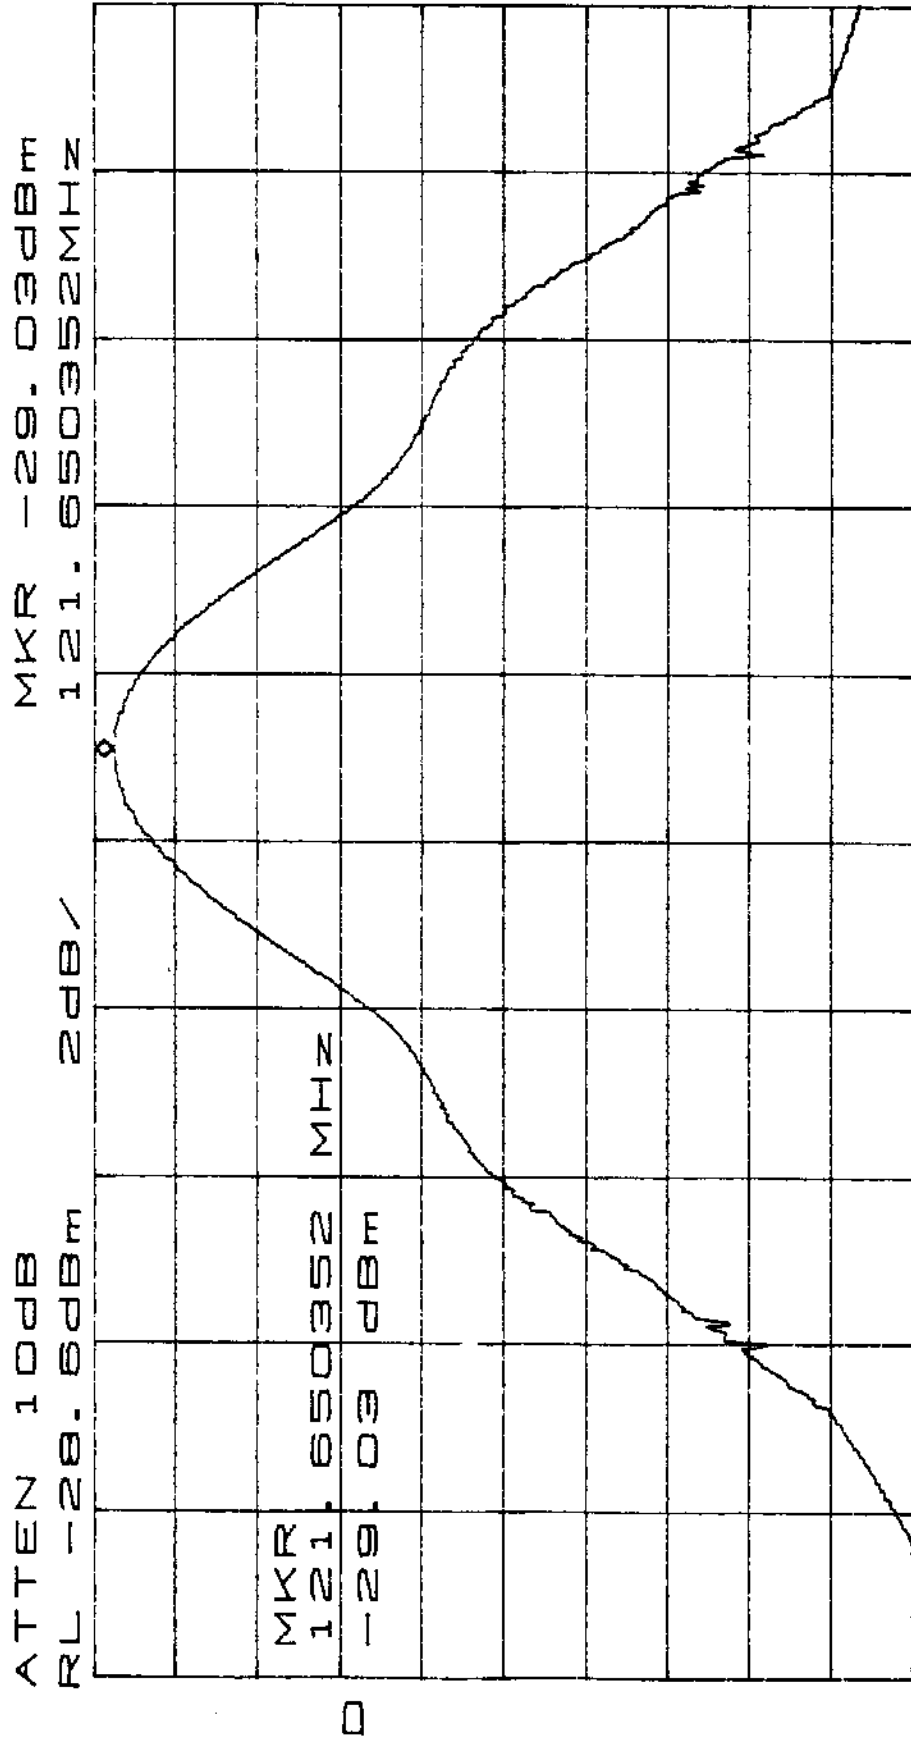

START 121.6468MHz STOP 121.6532MHz
*RBW 1.0kHz VBW 1.0kHz SWP 200Hz

TT07/98 B. Hawkins PASS

ATTEN 10dB MKR -76.60dBm
 RL -56.60dBm 2dB/ 121.641352MHz

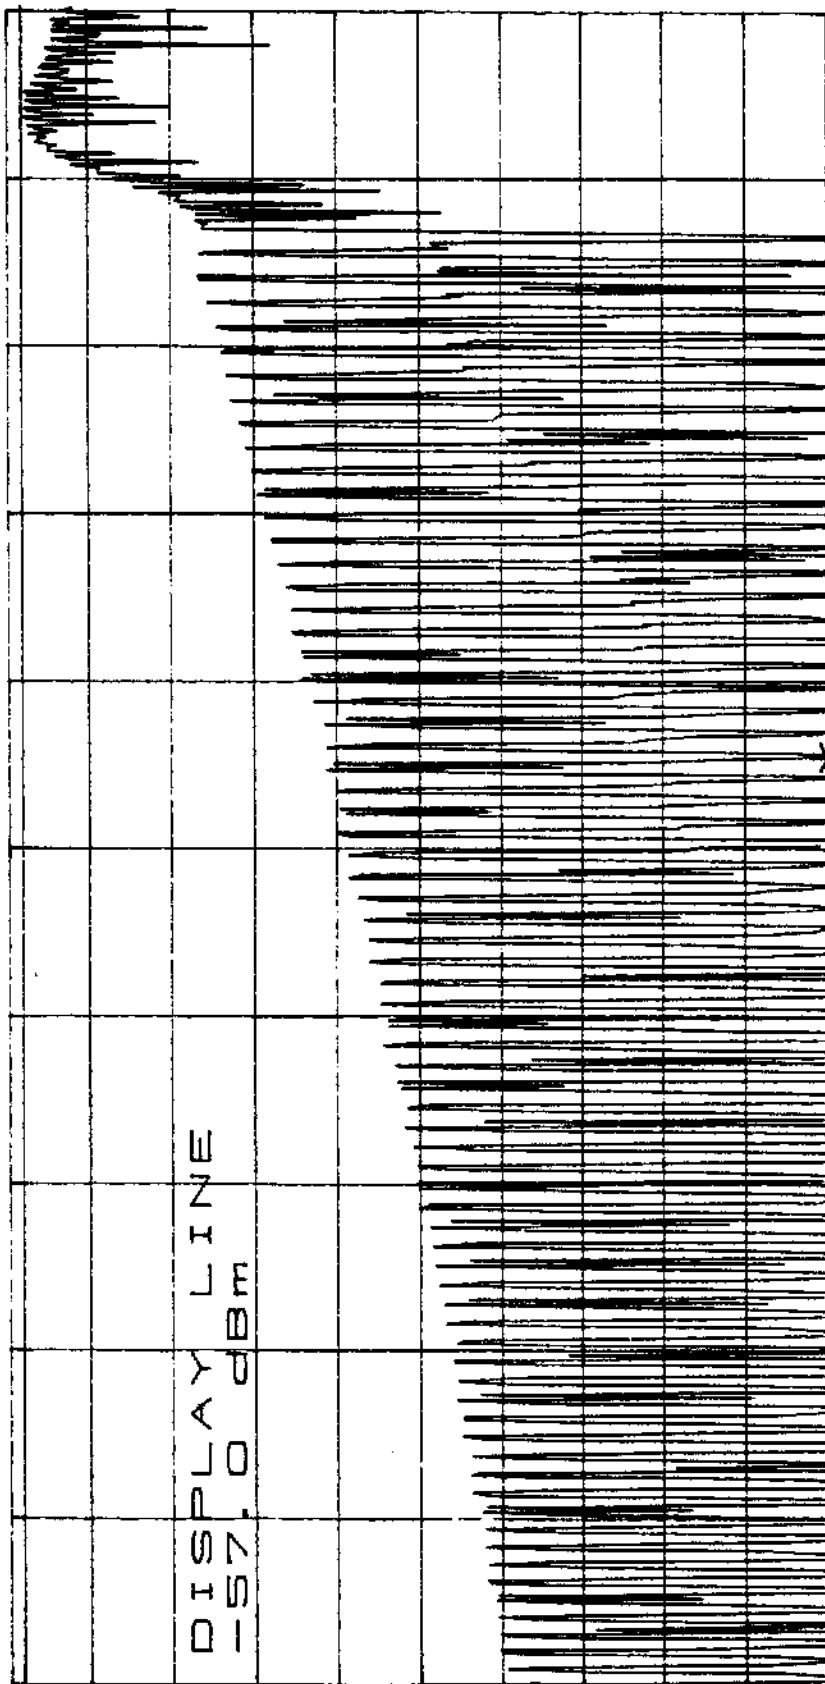


START 121.6378MHz STOP 121.6442MHz
 *RBW 1.0kHz VBW 1.0kHz SWP 200Hz

PLOT 6 MUMUROO EPIRB E3 SCREEN ROOM FCC 47CFR CLOSE TO CARRIER EMISSIONS

TT07/98 B. Hawkins PASS


ATTEN 10dB MKR -70.67dBm
RL -52.6dBm 2dB/ 121.660097MHz

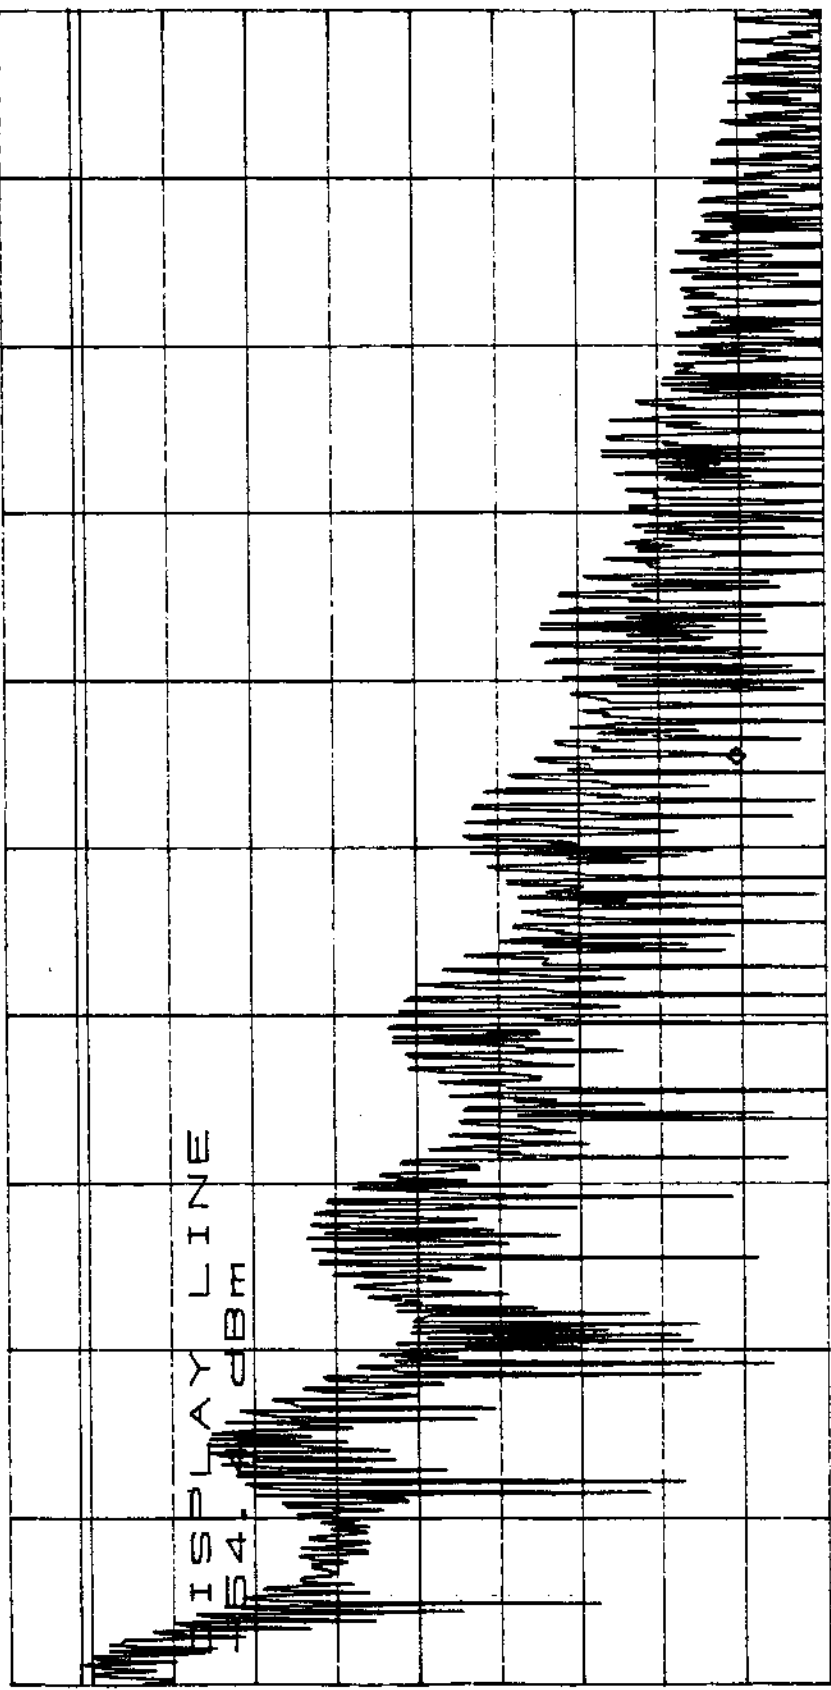

START 121.6566MHz STOP 121.6629MHz
*RBW 1.0kHz VBW 1.0kHz SWP 200ms

11/01/10 15:10:00 1M33

ATTEN 10dB MKR -102.6dBm
RL -82.6dBm 2dB/ 1.1246GHz

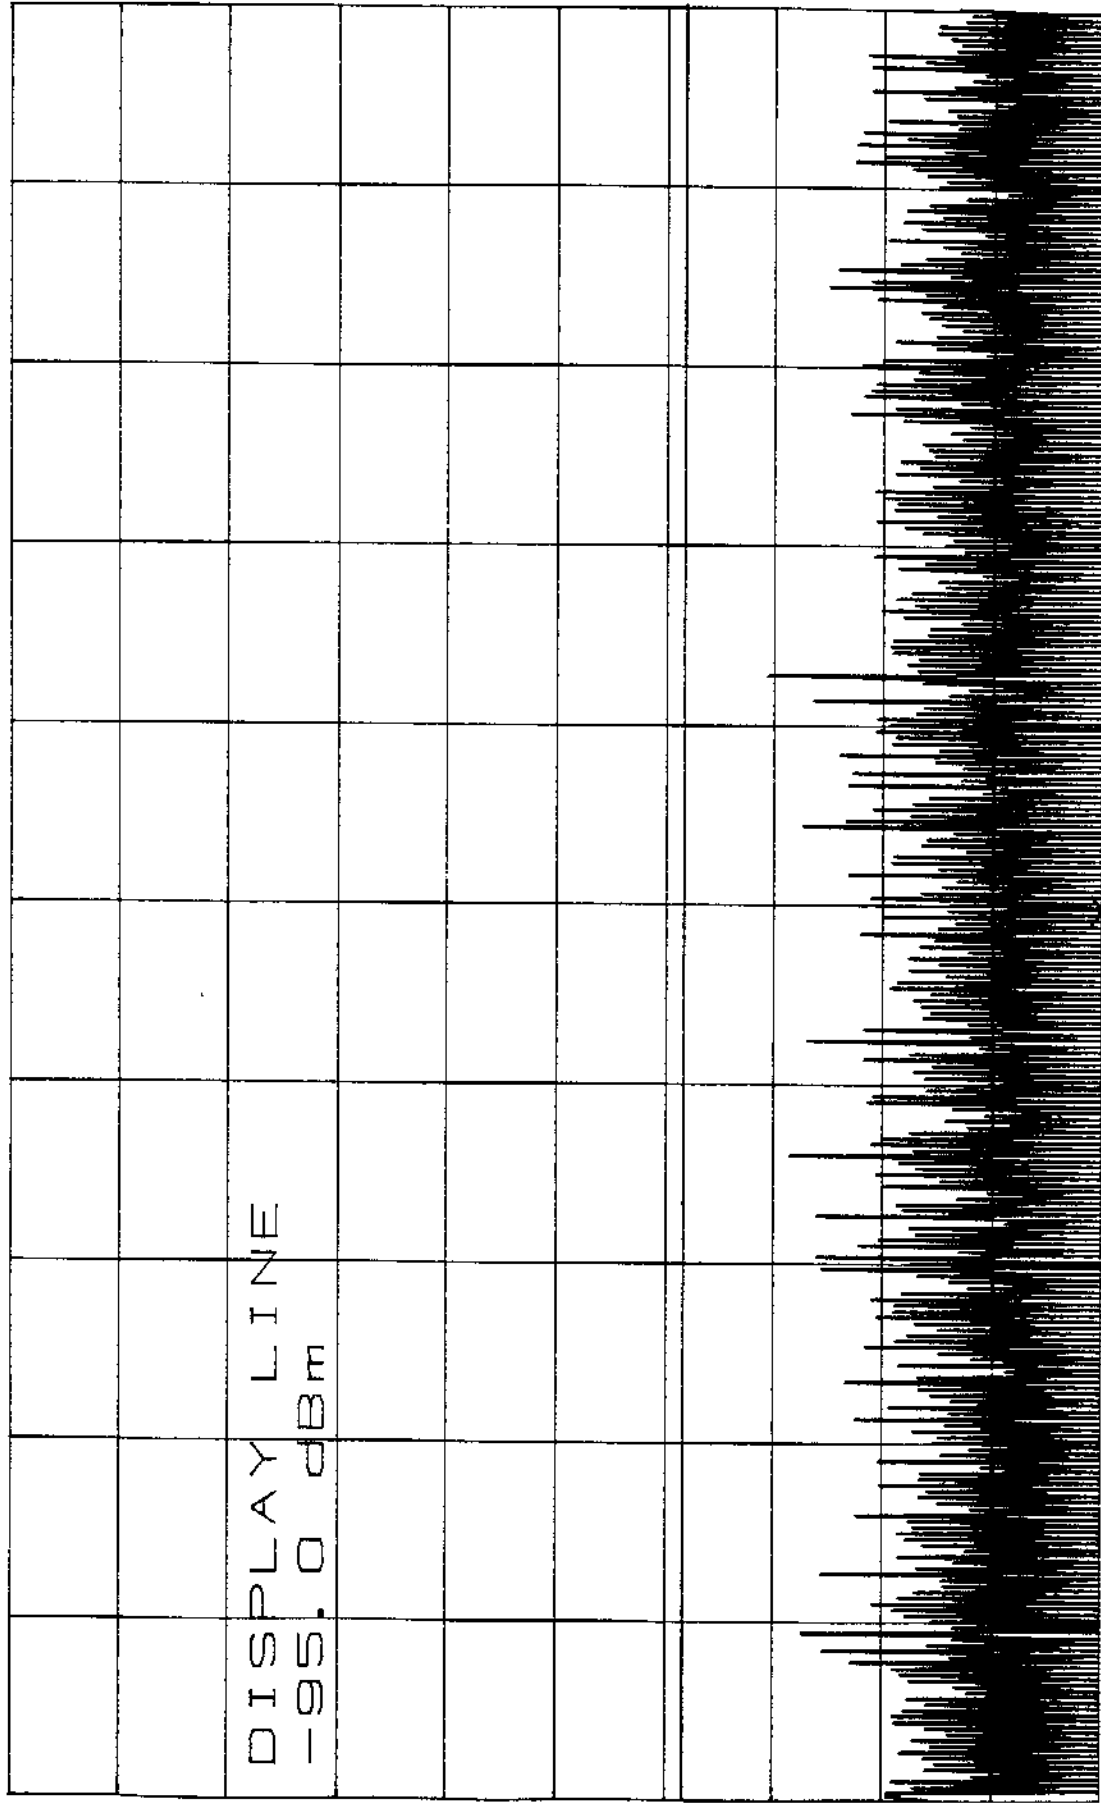

START 1.0000GHZ STOP 1.2500GHZ
*RBW 1.0KHZ VBW 1.0KHZ SWP 100sec

110118 IS. Hamden PASS


ATTEN 10dB

MKR -102.6dBm

RL -82.6dBm

2dB/

1.3746GHz

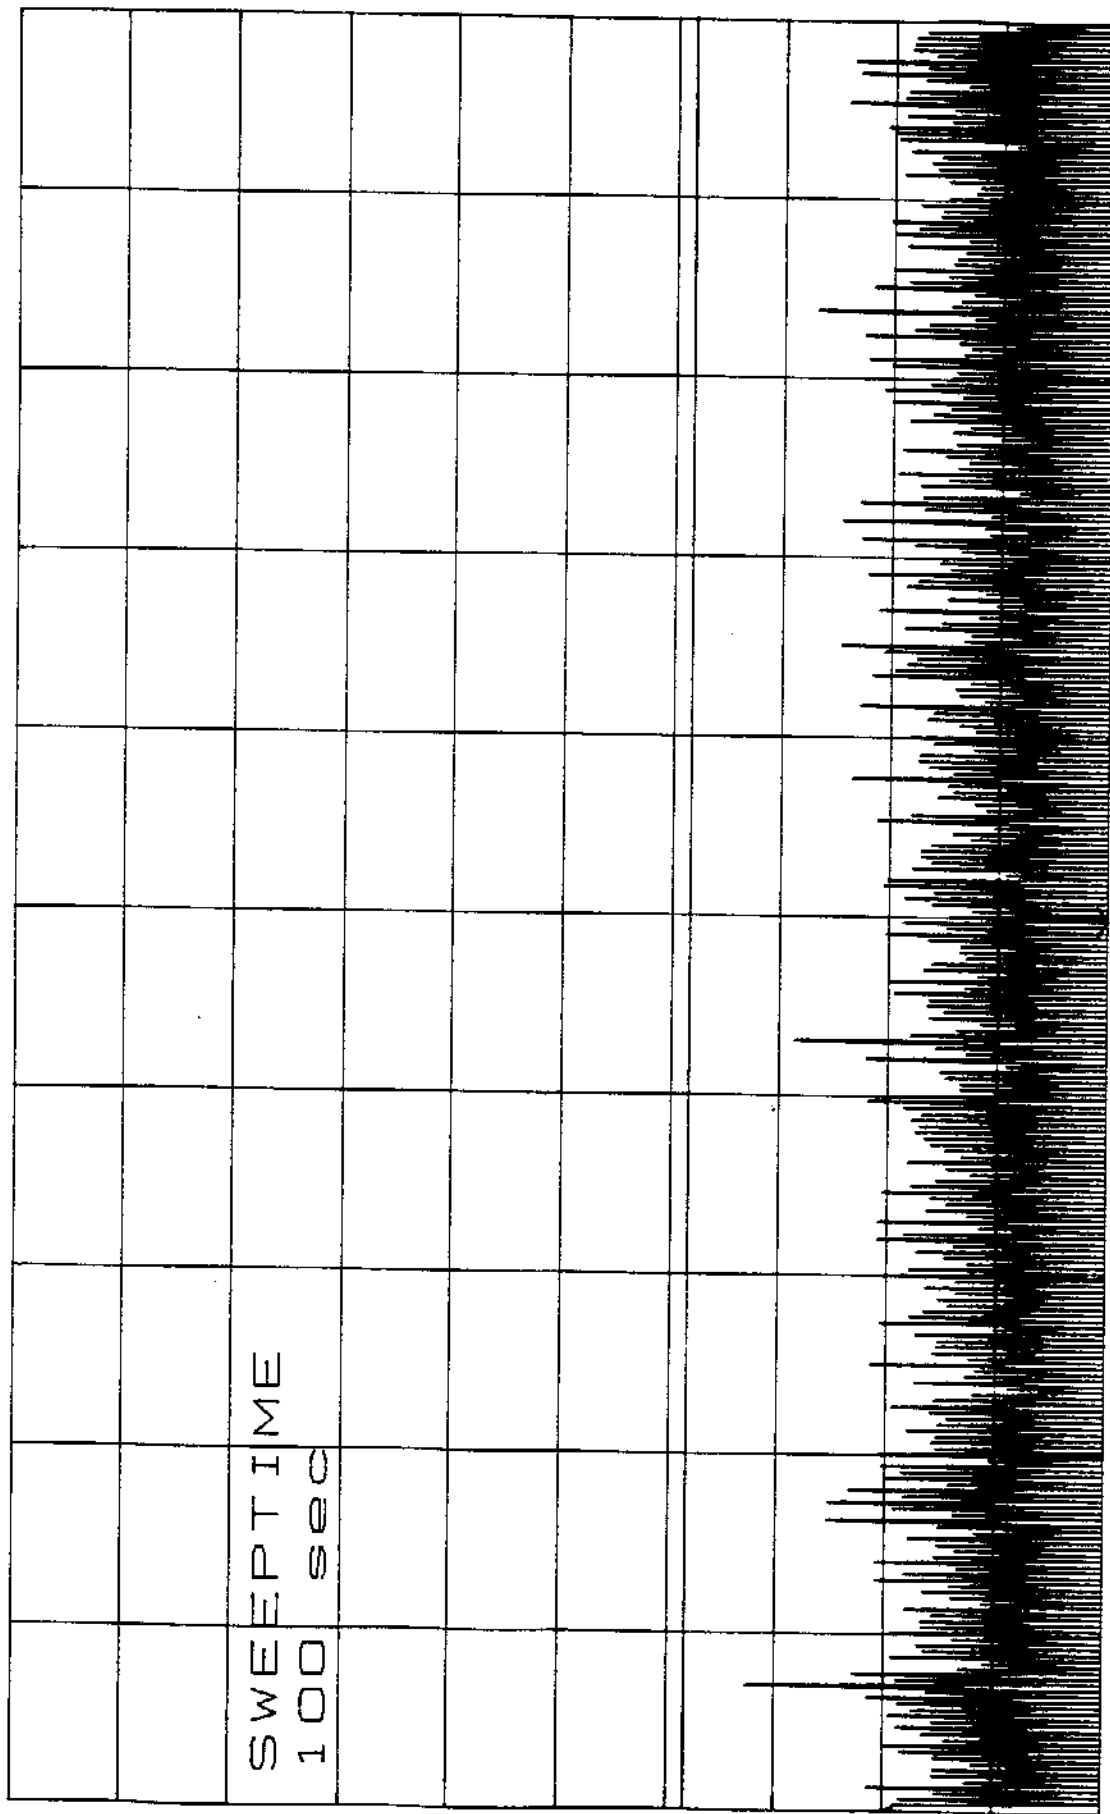

START 1.2500GHz


STOP 1.5000GHz

*RBW 1.0kHz

VBW 1.0kHz

SWP 100sec

Plot 9 ~~micrometers~~ PLIN L3 SCREEN ROOM REC 4/2/98 SPURIOUS EMISSIONS 11-11-98
 TT07/98 As Hankin PASS
 ATTN 10dB MKR -102.6dBm
 RL -82.6dBm 2dB/ 1.6246GHz

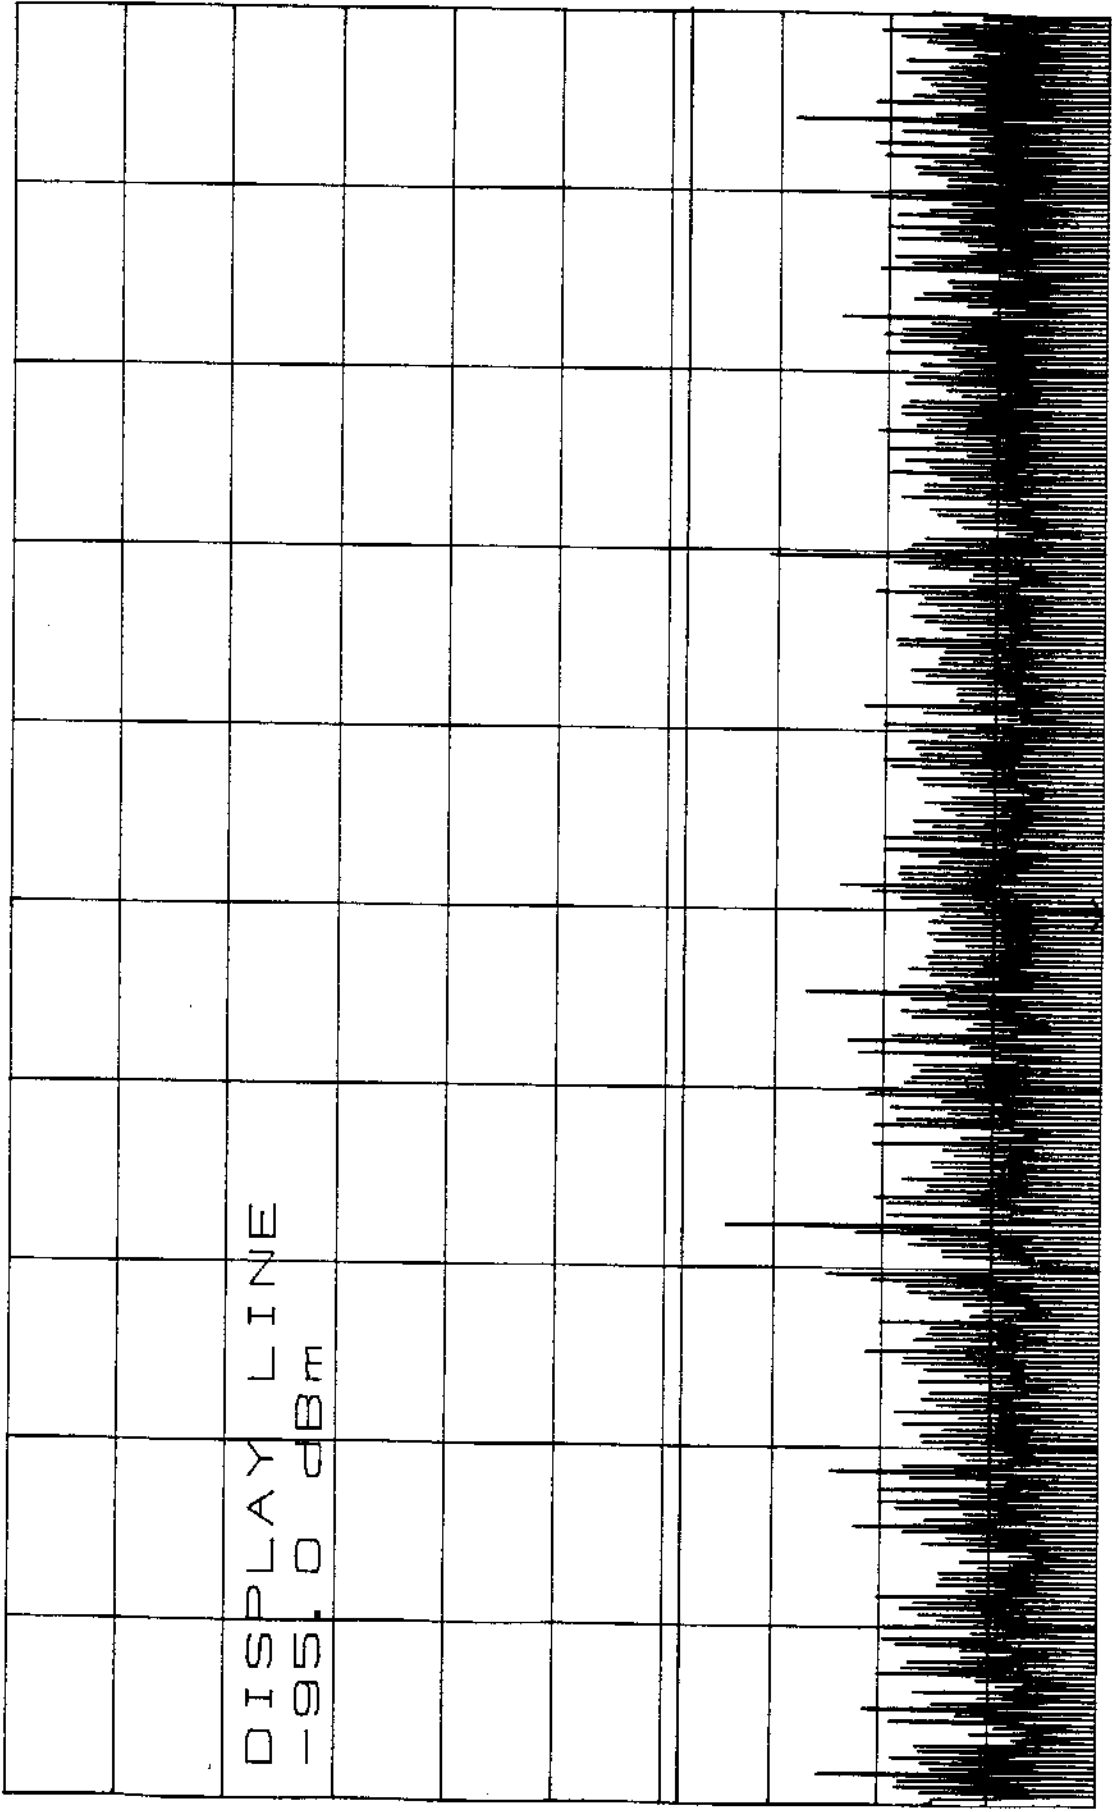

START 1.5000GHz STOP 1.7500GHz
 *RBW 1.0kHz VBW 1.0kHz SWP 100sec

[illegible]


ATTEN 10dB MKR -102.6dBm

1. 8746GHN

MBN

1.8746GHz

MYR - 102.69BF

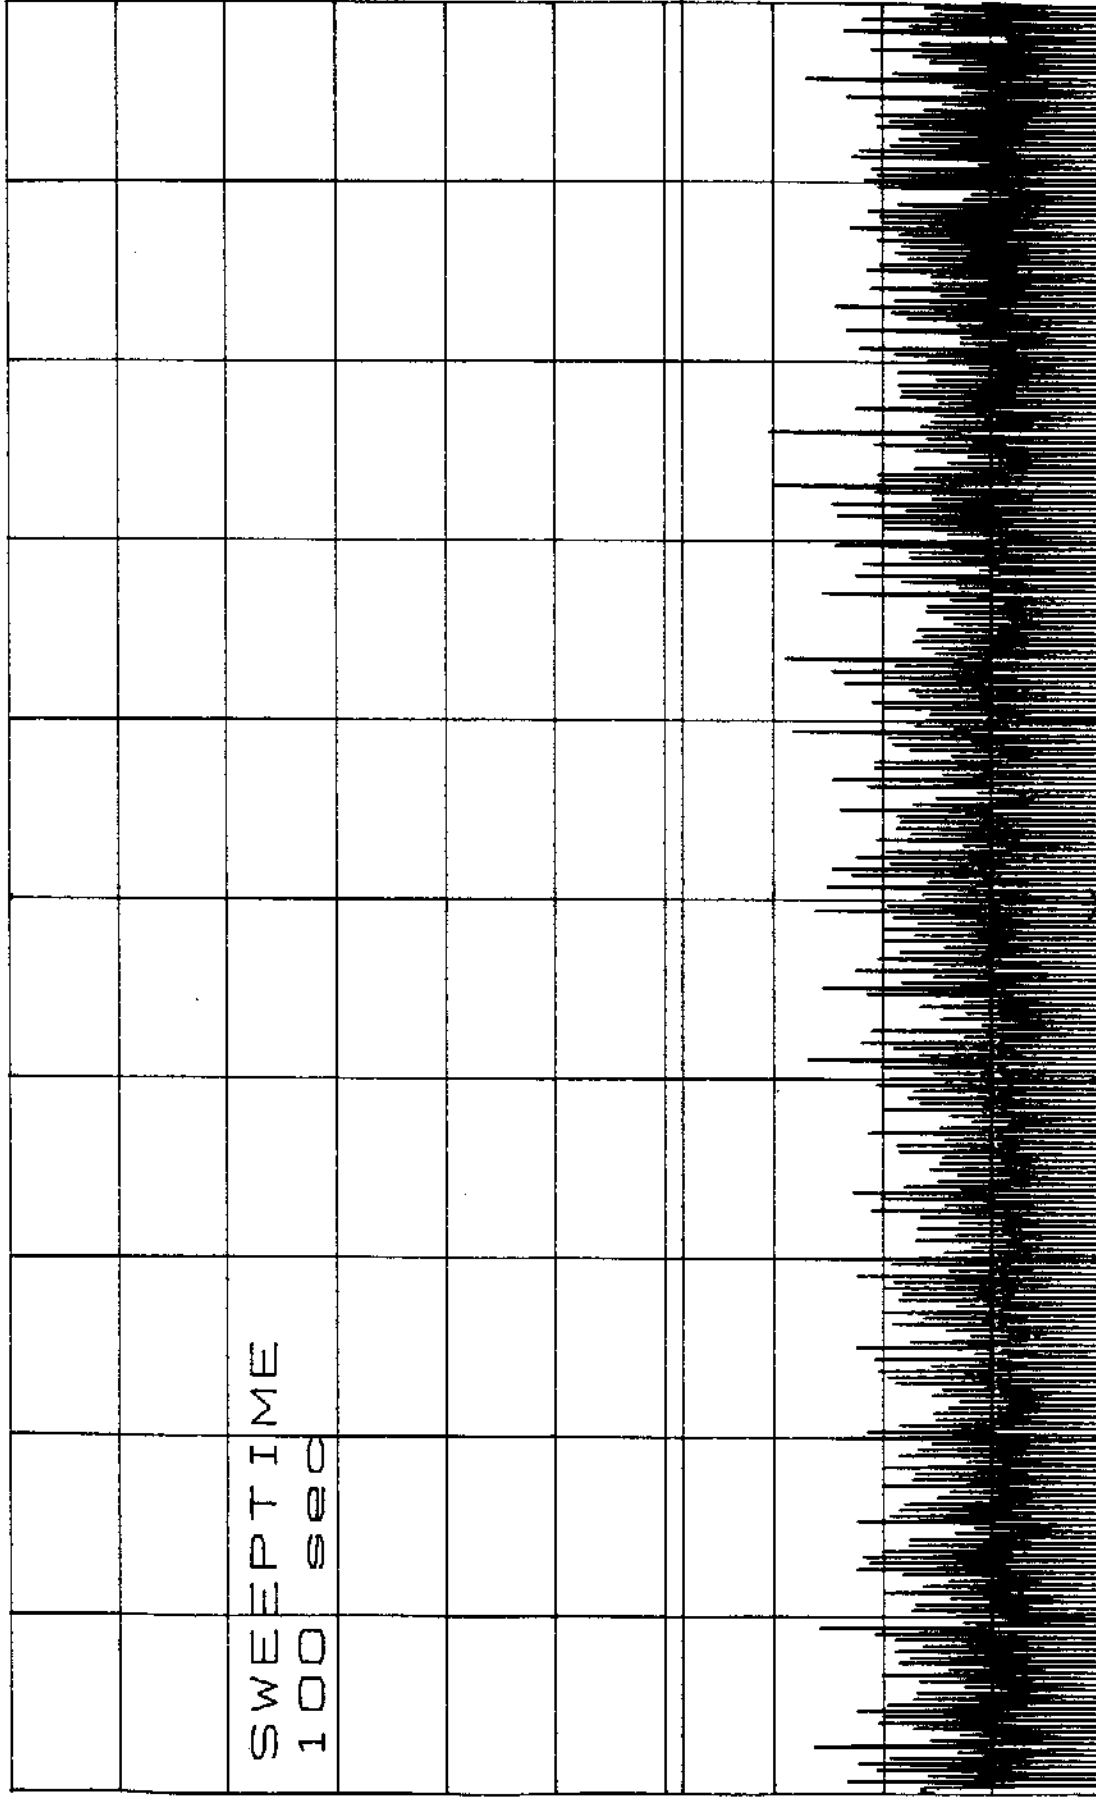


```

START 1.7500GHZ  STOP 2.0000GHZ
*RBW 1.0KHZ  VBW 1.0KHZ  SWP 100SEC0

```



1. ~~PLUT~~ ~~MEMORY~~ ~~UNIT~~ ~~LS~~ ~~SCREEN~~ ~~ROUTIN~~ ~~FCC~~ ~~4/CTR~~ ~~SPURIOUS~~ ~~EMISSIONS~~ 19-11-98
 TT 07/98 B. Hawkins PASS

ATTN -10dB
 RL -82.6dBm 2dB/ MKR -102.6dBm
 2.3746GHz

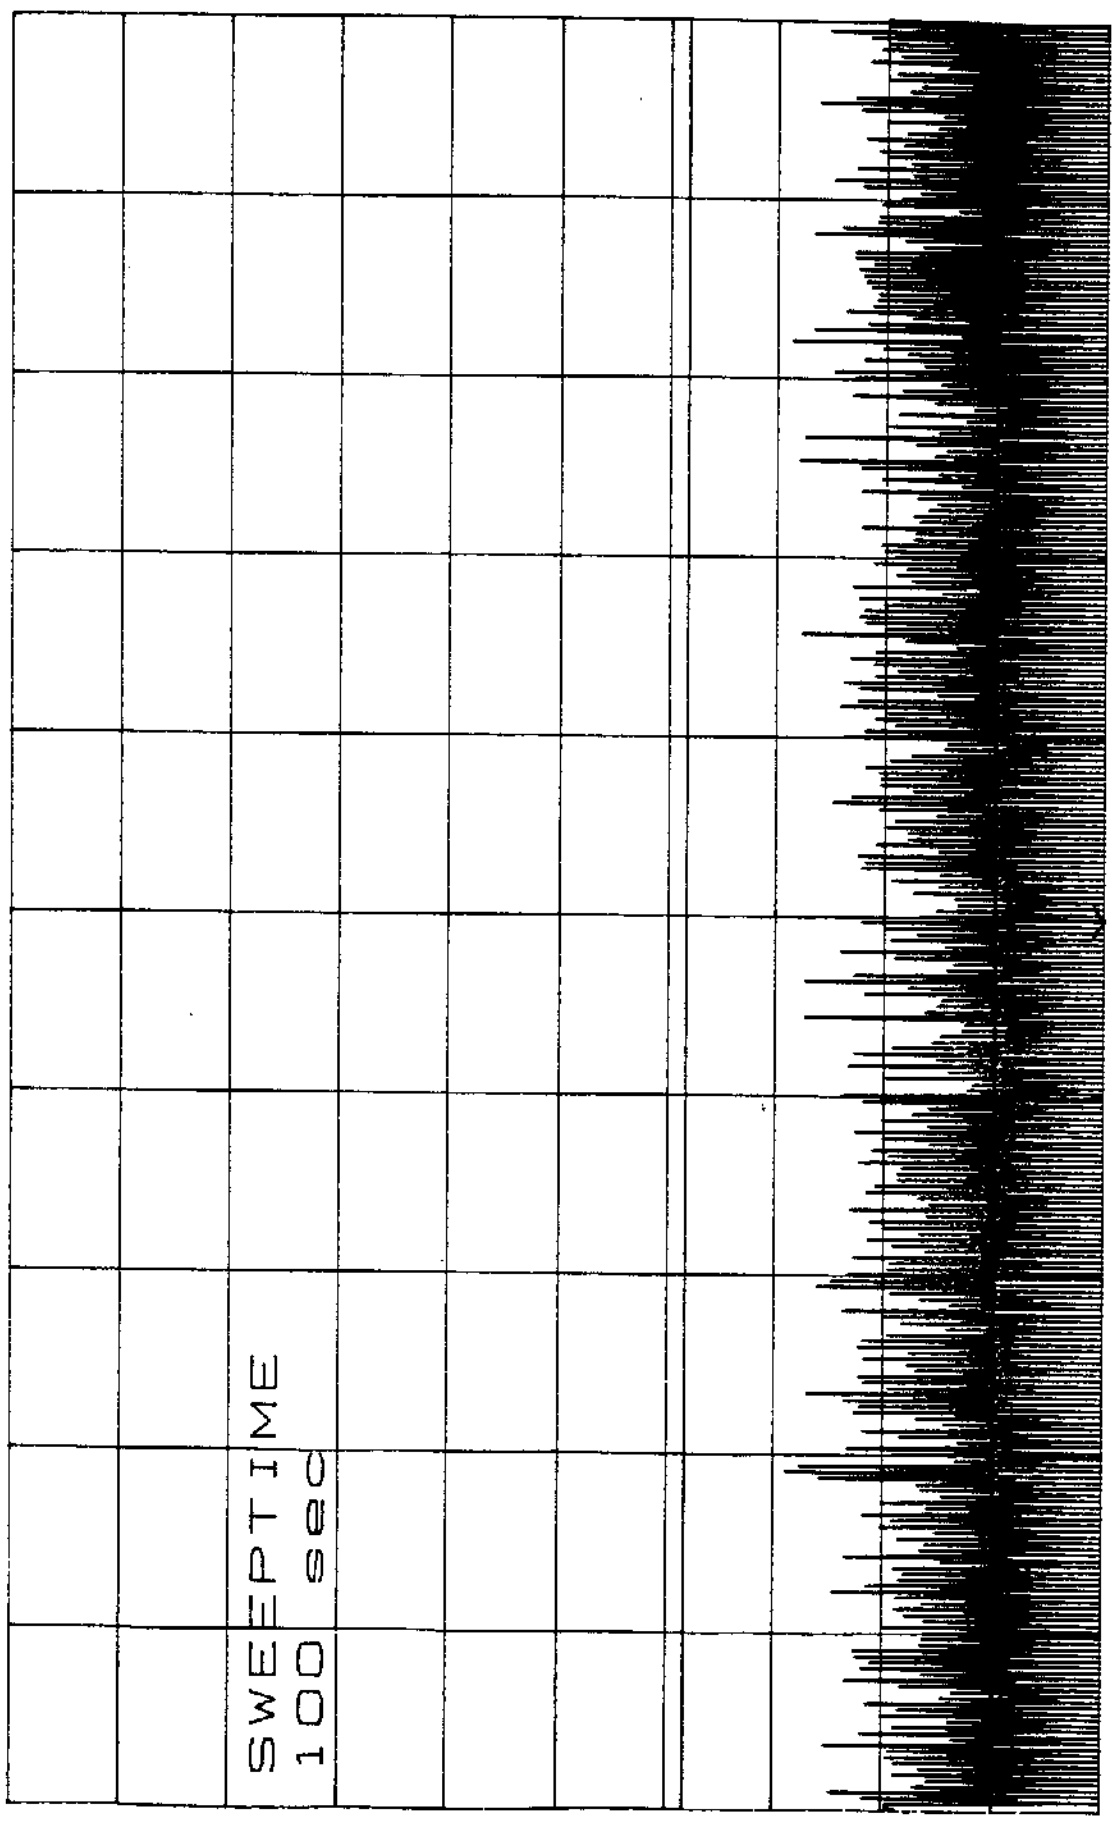

START 2.2500GHz STOP 2.5000GHz
 *RBW 1.0kHz VBW 1.0kHz SWP 100sec

ATTN 10dB
RL -82.6dBm 2dB/ MKR -102.6dBm
3.1246GHz

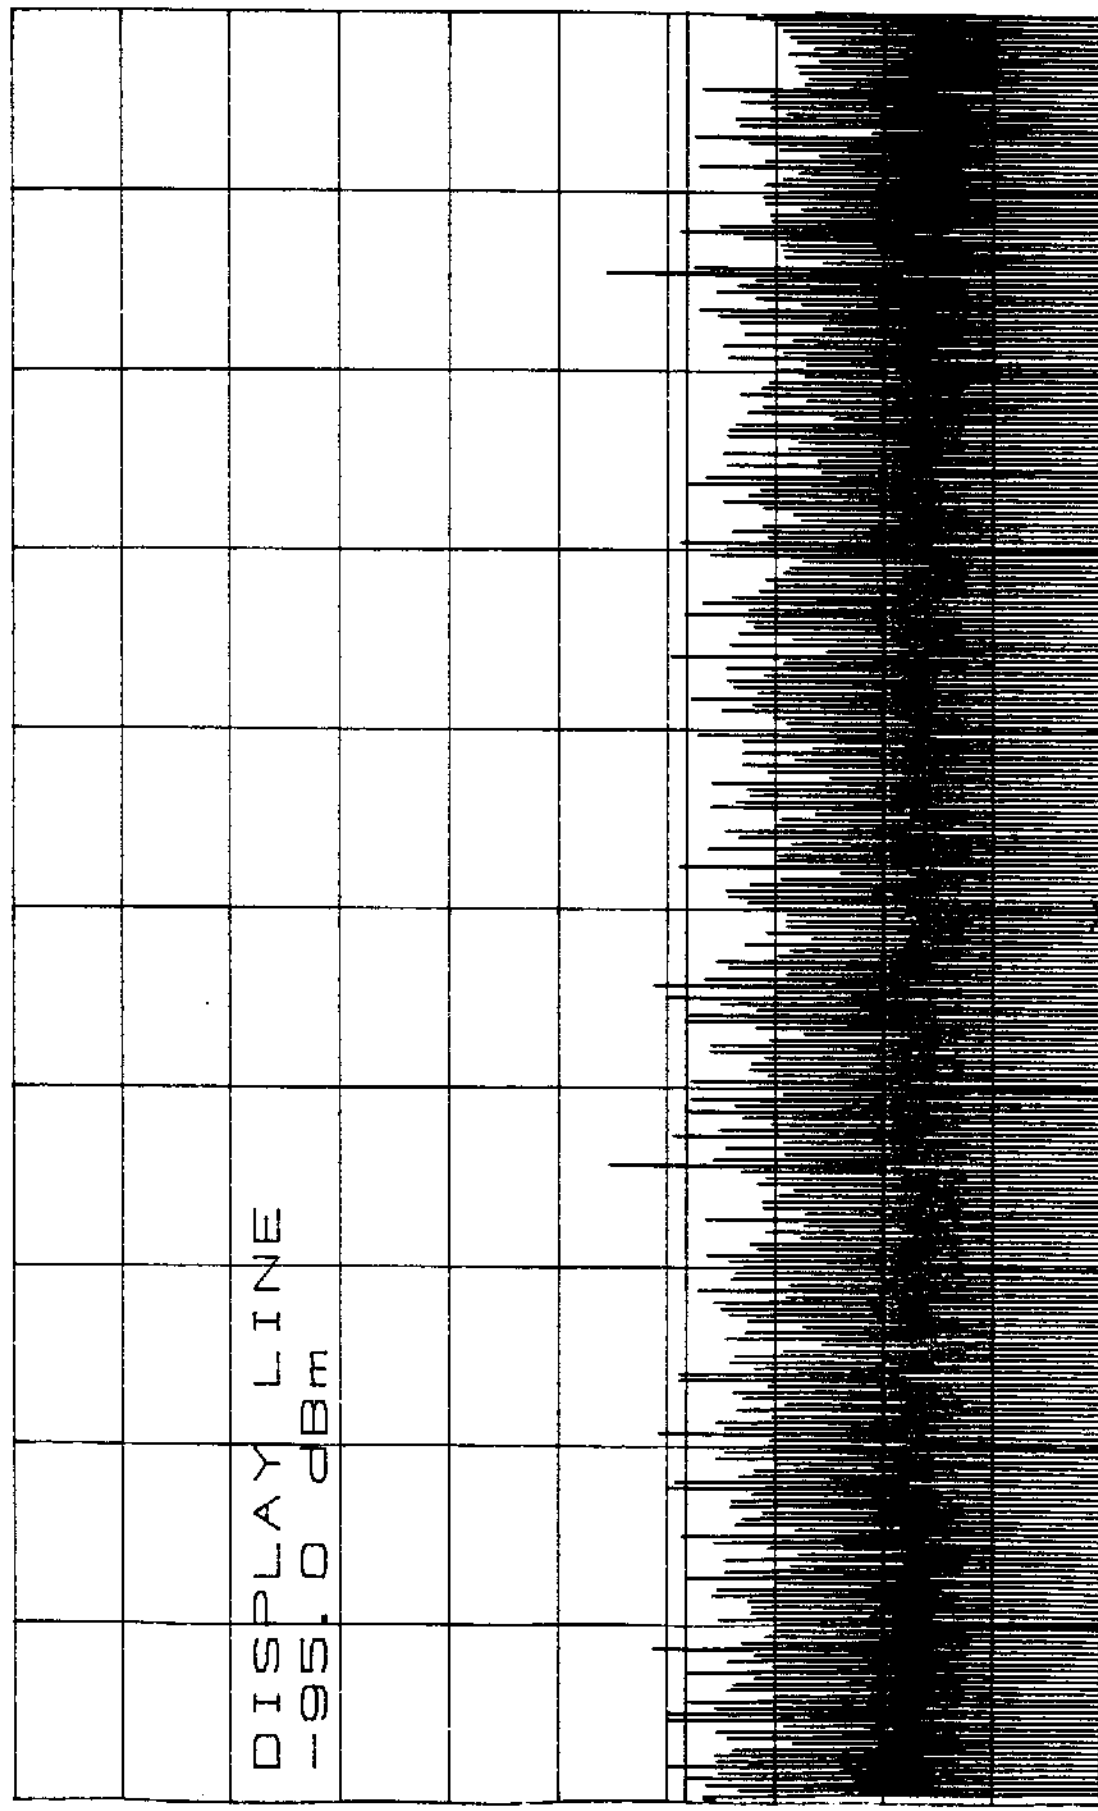


START 3.0000GHZ STOP 3.2500GHZ
*RBW 1.0KHZ VBW 1.0KHZ SWP 100sec

ATTEN 10dB MKR -102.6dBm
RL -82.6dBm 2dB/ 3.3746GHz

DISPLAY LINE
-95.0 dBm

S

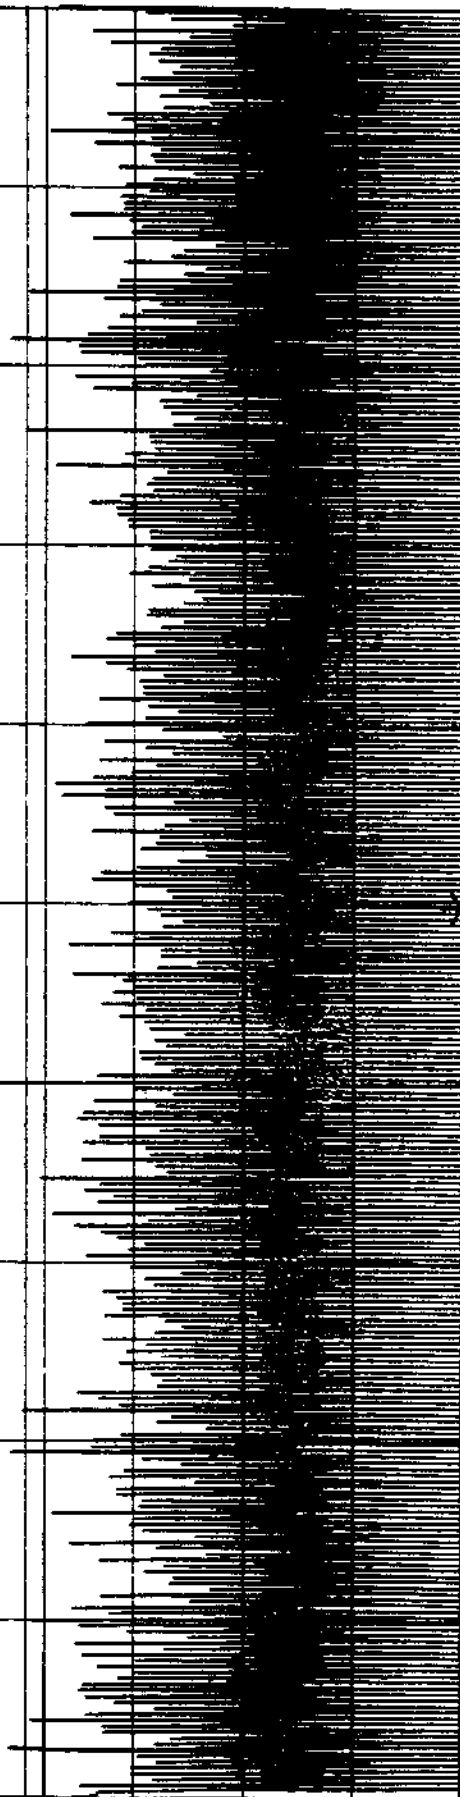

START 3.2500GHz STOP 3.5000GHz
*RBW 1.0kHz VBW 1.0kHz SWP 100sec

ATTEN 10dB

2013-09-03

UN

NR - 102-6484

3. 62466 NH

DIS - DISPLAY LINE

$\frac{E}{m} = \frac{1}{2} \frac{v^2}{c^2}$

START 3.5000GHZ

5 TOP 3.7500GHN

NYO 1. WBY *

VBW 1. OKHN

SWP 100880

