



COMPLIANCE WORLDWIDE INC. TEST REPORT 289-16

In Accordance with the Requirements of
Federal Communications Commission CFR Title 47 Part 15.225, Subpart C
Industry Canada RSS 210, Issue 8, Annex 2

Low Power License-Exempt Radio Communication Devices
Intentional Radiators

Issued to
Secure Care Products, LLC
39 Chenell Drive
Concord, NH 03301
603-223-0745

for the
Secure Care
ENVisionIT®
RTLS Non-Cutband Transmitters
13.56 MHz Door Management Radio

FCC ID: KNK-1356-2C

Report Issued on May 31, 2016

Tested by



Brian F. Breault
EMC Test Engineer

Reviewed By



Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1 Scope.....	3
2 Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. EMC Modifications	3
3. Product Configuration.....	3
3.1. Operational Characteristics & Software	3
3.2. EUT Hardware	3
3.3. EUT Connected Hardware.....	3
3.4. Support Equipment & Cables.....	4
3.5. Block Diagram.....	4
4. Measurements Parameters	4
4.1. Measurement Equipment Used to Perform Test	4
4.2. Measurement & Equipment Setup	4
4.3. Measurement Procedure	5
5. Choice of Equipment for Test Suits.....	6
5.1. Choice of Model	6
5.2. Presentation	6
5.3. Choice of Operating Frequencies	6
6. Measurement Summary	6
7. Measurement Data	7
7.1. Antenna Requirement	7
7.2. Operation within the Band 13.110 MHz – 14.010 MHz.....	9
7.3. Transmitter Spurious Radiated Emissions.....	10
7.4. Frequency Stability.....	20
7.5. Occupied Bandwidth	21
7.6. 99% Power Bandwidth	22
7. Test Setup Photographs	24
8. Test Site Description	28

Test Number: 289-16**Issue Date: 5/27/2016**

1. Scope

This test report certifies that the Secure Care Products, LLC. ENVisionIT® model A20440902 All in One Tag 13.56 MHz door management radio, as tested, meets the FCC Part 15.225 Subpart C, and Industry Canada RSS 210 requirements. The scope of this test report is limited to the test samples provided by the client, only in as much as those samples represent other production units. If any significant changes are made to the units, the changes shall be evaluated and a retest may be required.

2. Product Details

2.1. Manufacturer: Secure Care Products, LLC.
2.2. Model Number: Model A20440902 tested. Unit A20450902 contains an identical transmitter
2.3. Serial Number: ID 0086-0134
2.4. Description: 13.56 MHz door management radio. ENVisionIT® All in One Tag with 90° Antenna patient protection transmitter for infant security, wandering patient, & resident protection products.
2.5. Power Source: 3.0 VDC (Lithium) non-replaceable
2.6. Hardware Revisions: None
2.7. Software Revisions: None
2.8. EMC Modifications: None

3. Product Configuration

3.1. Operational Characteristics & Software

Operating Instructions for Test

Use the tester to enable continuous wave features. With the transmitter at the top of the tester, push the "4" key to enable continuous wave output on the low frequency radio. This will output a continuous wave for one minute and then revert back to normal operation.

The "#" key will put the transmitter in sleep mode.

The "7" key will enable a quick wakeup of the transmitter.

3.2. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Volts	Frq (Hz)	Description/Function
Secure Care Products, LLC.	A20440902	0086-0134	3.0	DC	ENVisionIT® patient protection transmitter for infant security, wandering patient, & resident protection products.

3.3. EUT Connected Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Voltage	Frq (Hz)	Description/Function
Secure Care Products, LLC.	A07300943	0011600014	N/A	-	For setting up the DUT operation. Not used during testing.

Test Number: 289-16


Issue Date: 5/27/2016

3. Product Configuration (continued)

3.4. Support Equipment & Cables

Cable Type	Length	Shield	From	To
None				

3.5. Block Diagram



4. Measurements Parameters

4.1 Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	7/23/2017	2 Years
Spectrum Analyzer 20 Hz – 40 GHz ²	Rohde & Schwarz	FSV40	100899	7/23/2017	2 Years
Spectrum Analyzer, 9 kHz to 40 GHz ³	Rohde & Schwarz	FSVR40	100909	7/23/2017	2 Years
EMI Receiver	Hewlett Packard	8546A	3650A00360	6/4/2016	2 Years
Loop Antenna	EMCO	6512	9309-1139	9/23/2016	2 Years
Combiolog Antenna, 30 MHz to 2 GHz	Com-Power	AC-220	25509	5/12/2018	2 Years
LISN 50 Ω 50 µH, 9 kHz to 30 MHz	EMCO	3825/2	9109-1860	7/23/2016	1 Year
Power Supply	Hewlett Packard	6296A	7M0599	8/26/2016	2 Years
Digital Barometer	Control Company	4195	ID236	10/8/2017	2 Years
Temperature Chamber	Associated Research	E-0029	N/A	N/A	---

¹ ESR7 Firmware revision: V2.26, Date installed: 08/15/2014 Previous V2.17, installed 6/11/2014.
² FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016 Previous V2.30 SP1, installed 10/22/2014.
³ FSVR40 Firmware revision: V2.23, Date installed: 10/20/2014 Previous V1.63 SP1, installed 8/28/2013.

4.2 Measurement & Equipment Setup

Test Dates:	5/17/2016 to 5/27/2016
Test Engineer:	Brian Breault
Site Temperature (°C):	21.4
Relative Humidity (%RH):	32
Frequency Range:	30 kHz to 1.0 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	120 kHz (30 MHz – 1 GHz) 1 MHz (>1 GHz)
EMI Receiver Avg Bandwidth:	300 kHz (30 MHz – 1 GHz) 3 MHz (>1 GHz)
Detector Functions:	Peak, Quasi-Peak and Average

Test Number: 289-16

Issue Date: 5/27/2016

4. Measurements Parameters (continued)

4.3 Measurement Procedure

The manufacturer stated that two units, numbers A20440902 and A20450902, contained identical transmitters and by certifying one of the devices the other should be covered.

The two units, numbers A20440902 and A20450902, were rotated through three orthogonal positions and measured for peak field strength. The unit that yielded the highest field strength measurement was used as the test sample for this test report. The three orthogonal positions are defined further on in this section.

The results of the preliminary measurements are as follows:

A20440902	Horizontal			Vertical		
	Field Strength	Elevation	TT Position	Field Strength	Elevation	TT Position
X-Axis	59.31	100	84	53.44	100	0
Y-Axis	59.75	100	274	38.05	100	238
Z-Axis	59.78	100	270	53.51	100	4

A20450902	Horizontal			Vertical		
	Field Strength	Elevation	TT Position	Field Strength	Elevation	TT Position
X-Axis	44.13	100	228	34.17	100	270
Y-Axis	58.50	100	74	52.41	100	0
Z-Axis	58.85	100	0	52.27	100	98

The test measurements contained in this report are based on the requirements detailed in FCC Part 15, Subpart C - Intentional Radiators, notably Section 15.225, Operation within the band 13.110 – 14.010 MHz.

The test methods used to generate the data in this test report are in accordance with ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

In addition, the measurements were performed with the device in three orthogonal positions in accordance with ANSI C63.10-2013, sections 5.10.1, 6.4.6 and Annex H. The three orthogonal axes were defined as follows:



X-Axis

- X Axis Upright (Label forward)
- Y Axis Horizontal on left edge
- Z Axis Label Up



Y-Axis

- Front of unit is facing the antenna at 0°
- Front of unit is facing the antenna at 0°
- Bottom edge of the unit is facing the antenna at 0°



Z-Axis

Test Number: 289-16

Issue Date: 5/27/2016

5. Choice of Equipment for Test Suits

5.1. Choice of Model

This test report is based on the test samples supplied by the manufacturer and are reported by the manufacturer to be equivalent to the production units.

5.2. Presentation

The test sample was tested complete with all required ancillary equipment. Refer to Section 3 of this report for the product equipment configuration.

5.3. Choice of Operating Frequencies

The transmitter in the unit under test utilizes a single operating frequency at approximately 13.56 MHz

6. Measurement Summary

Test Requirement	FCC Part 15 Reference	RSS Reference	Test Report Section	Result	Comment
Antenna Requirement	15.203	RSS-GEN Section 7.1.2	7.1	Compliant	
Operation within the Band 13.110 MHz – 14.010 MHz (Radiated Field Strength)	15.225 (a), (b), (c)	RSS-210 Section A2.6	7.2	Compliant	
Spurious Radiated Emissions	15.209		7.3	Compliant	
Operation within the Band 13.110 MHz – 14.010 MHz (Frequency Stability)	15.225 (e)	RSS-210 Section A2.6	7.4	Compliant	
Occupied Bandwidth/ Lower and Upper Band Edges	15.215(c) C63.10	N/A	7.5	Compliant	
99% Power Bandwidth	N/A	RSS-GEN Section 4.6.1	7.6	Compliant	
Power Line Conducted Emissions	15.207	RSS-GEN Section 7.2.4		Not Required	Battery operated device
Public Exposure to Radio Frequency Energy Levels.	15.247(i) 1.1307 (b)(1)	RSS-GEN 5.5, RSS 102	---	Not Required	Test Frequency is below 100 MHz.



Test Number: 289-16



Issue Date: 5/27/2016

7. Measurement Data

7.1. Antenna Requirement (Section 15.203, RSS-GEN 7.1.2)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Status: Compliant - The antenna utilized by the device under test is contained inside a sealed plastic enclosure.

7. Measurement Data (continued)

7.2. Operation within the Band 13.110 MHz – 14.010 MHz (15.225 (a), (b) and (c))

Radiated Field Strength of Fundamental (15.225 (a), (b) and (c))

Requirement: (a) The field strength of any emissions within the band 13.553 - 13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Test Note: Reference ANSI C63.10-2013 sections 5.3.2 and 6.4.4.2. The following formula was used to extrapolate the measurement distance to the limit distance:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{near field}}}{d_{\text{measure}}} \right) - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{near field}}} \right) \quad \text{Equation 1}$$

FS_{limit} is the calculation of field strength at the limit distance (dB μ V/m) 38.39

FS_{max} is the measured field strength, expressed in (dB μ V/m) 59.78

d_{near field} is the $\lambda/2\pi$ distance (Meters) 3.52

d_{measure} is the distance of the measurement point from the EUT (Meters) 3.00

d_{limit} is the reference limit distance (Meters) 30.00

Result: Compliant - The fundamental frequency radiated field strength of the device under test complies with the requirements detailed in FCC Part 15.225, Section (a).

The peak field strength of the device under test met the average requirement. For this reason, the average field strength was not factored using a duty cycle correction factor.

Freq. (MHz)	Amplitude ¹ (dB μ V/m)	Duty Cycle Correction	Corr. Ampl. ² (dB μ V/m)	FCC 15.225 Limit (dB μ V/m)	Margin (dB)	Ant Polarity	Ant Height	Turntable Azimuth	Result
	Peak	dB	Average			Par/Per	cm	Deg	
13.56	38.39	0	N/A	84.00	-45.61	Par	100	270	Compliant

¹ Measurement has been extrapolated from 3 meters to 30 meters using Equation 1 on the previous page.

² The average field strength was not calculated using a duty cycle correction because the peak field strength met the FCC Part 15.225 limit.

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)

7.2. Operation within the Band 13.110 MHz – 14.010 MHz (15.225 (a), (b) and (c))

Radiated Field Strength of Fundamental (15.225 (a), (b) and (c))

7.2.1. Worst Case Field Strength of the Fundamental

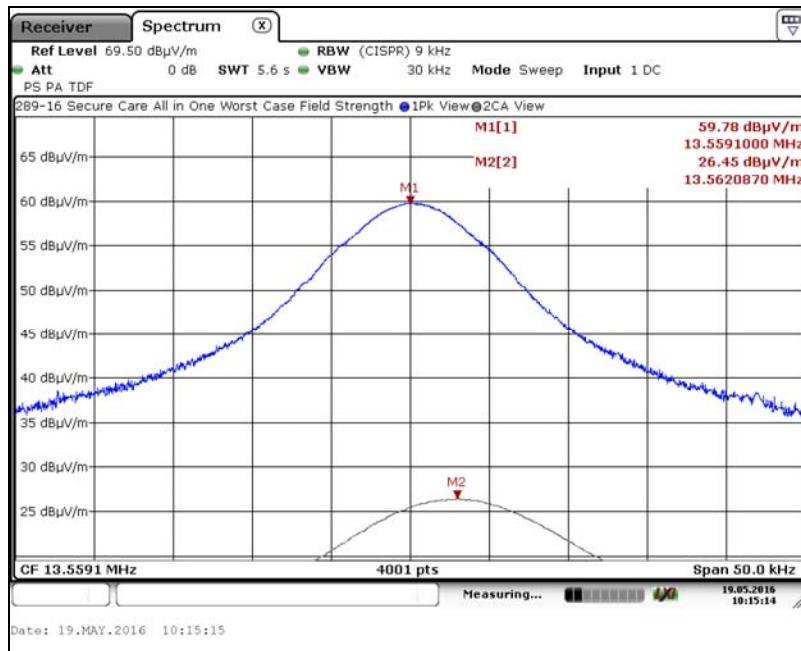

Test Number: 289-16

Issue Date: 5/27/2016

7. Measurement Data (continued)

7.3. Transmitter Spurious Radiated Emissions (15.225 (d), 15.209)

Requirement: The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table (Reference FCC 15.209):

Frequency (MHz)	Field Strength (μ V/m)	Meas. Dist. (meters)	Field Strength (dB μ V/m)	Distance (Meters)
0.009–0.490	2400/F(kHz)	300	128.5 to 93.8	3
0.490–1.705	24000/F(kHz)	30	73.8 to 63.0	3
1.705–30.0	30	30	69.5	3
30–88	100	3	40	3
88–216	150	3	43.5	3
216–960	200	3	46	3
Above 960	500	3	54	3

¹ Measurements in the 9 to 90 kHz, 110 to 490 kHz and above 1000 MHz ranges employ an average detector. Otherwise a quasi-peak detector is used.

² Extrapolation below 30 MHz is calculated at 40 dB/decade.

Procedure: Test measurements were made in accordance with ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, Section 6.5.

Results: Compliant - The transmitter installed in the unit under test meet the FCC Part 15.209 emissions requirements.

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.1. Spurious Radiated Emissions, 10 kHz to 150 kHz Test Results

7.3.1.1. X-Axis, Parallel Antenna

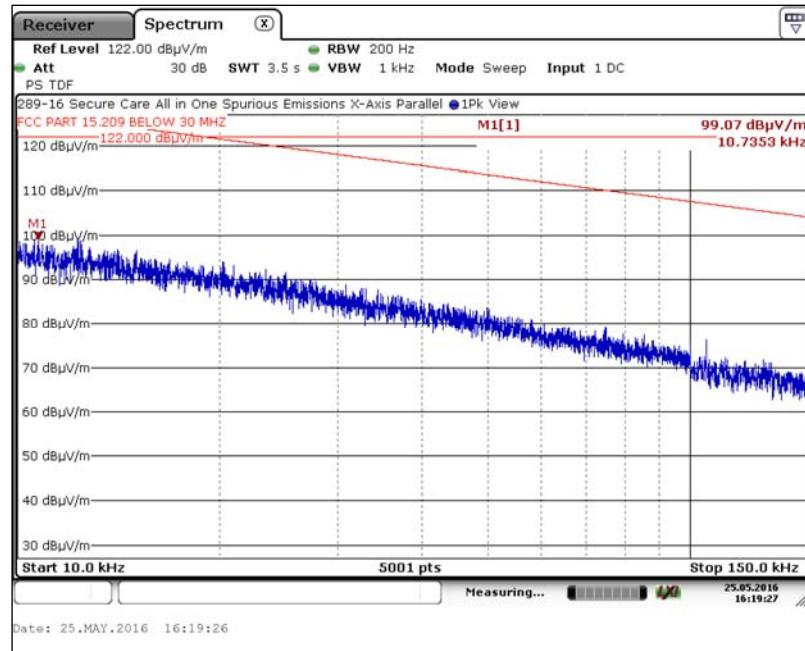

7.3.1.2. X-Axis, Perpendicular Antenna

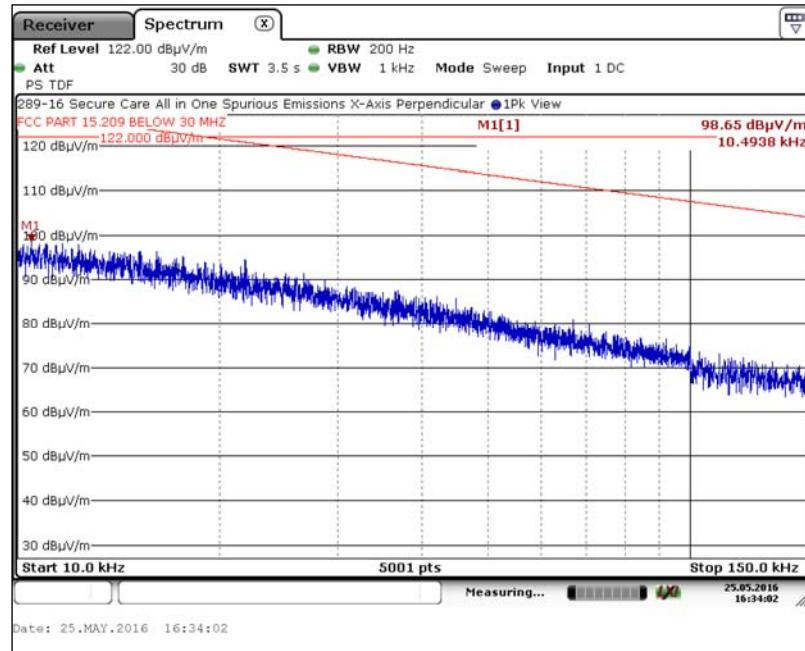

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.1. Spurious Radiated Emissions, 10 kHz to 150 kHz Test Results

7.3.1.3. Y-Axis, Parallel Antenna

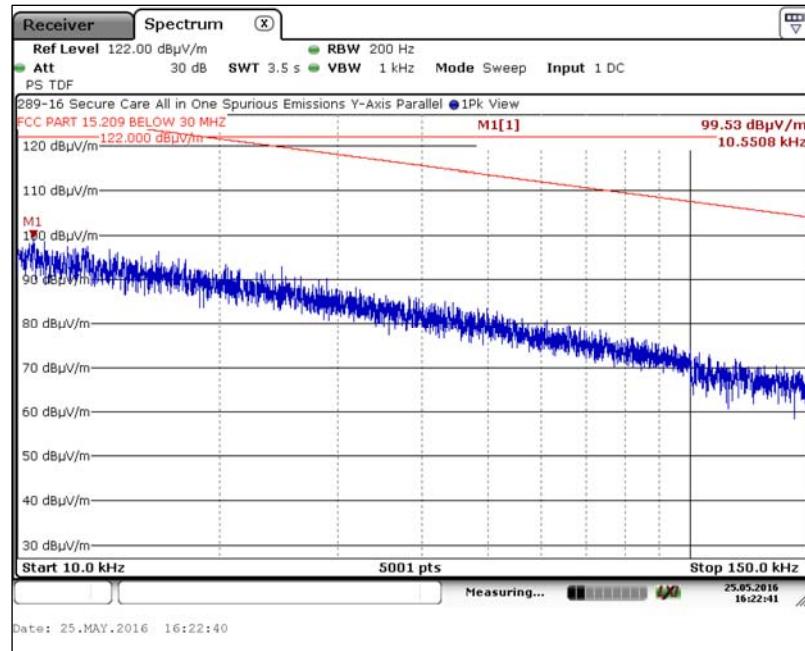

7.3.1.4. Y-Axis, Perpendicular Antenna

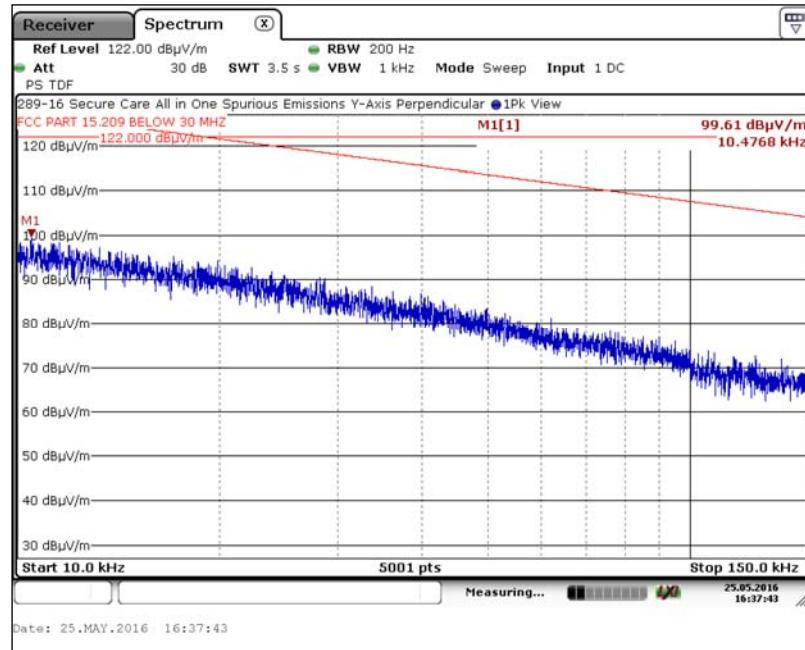

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.1. Spurious Radiated Emissions, 10 kHz to 150 kHz Test Results

7.3.1.5. Z-Axis, Parallel Antenna

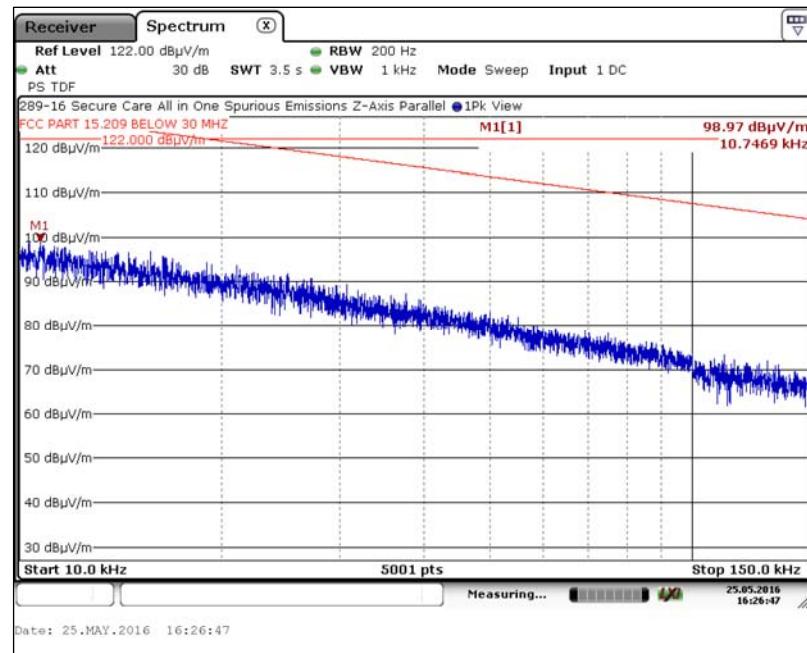

7.3.1.6. Z-Axis, Perpendicular Antenna

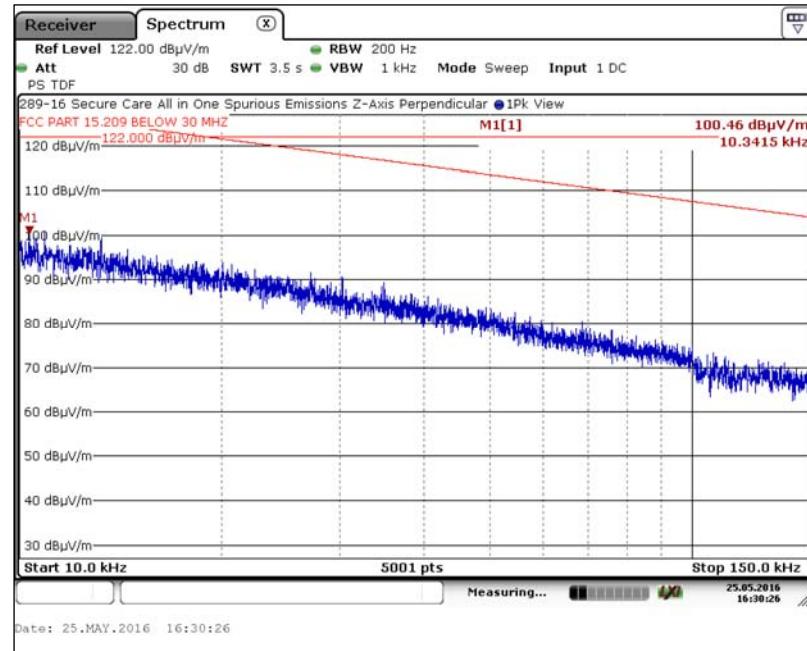

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

7.3.2.1. X-Axis, Parallel Antenna

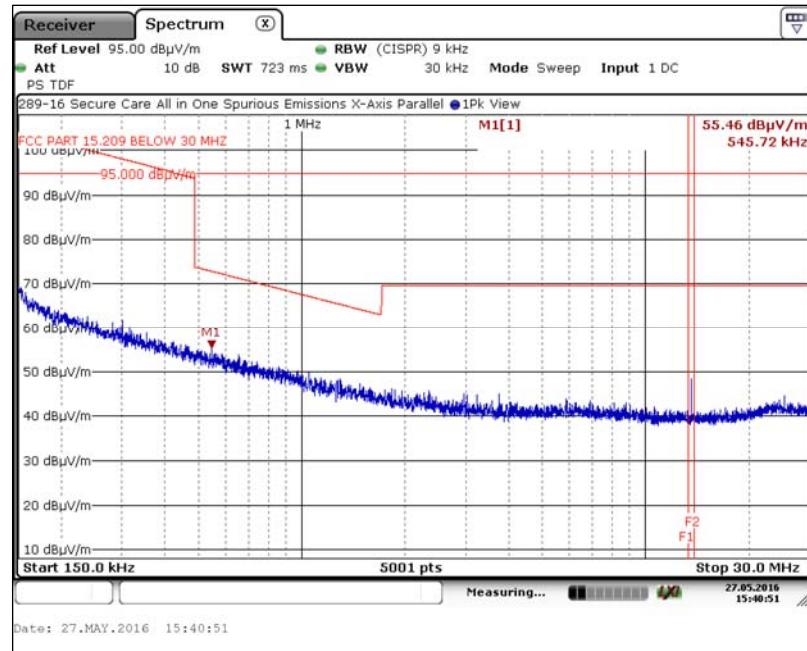

7.3.2.2. X-Axis, Perpendicular Antenna

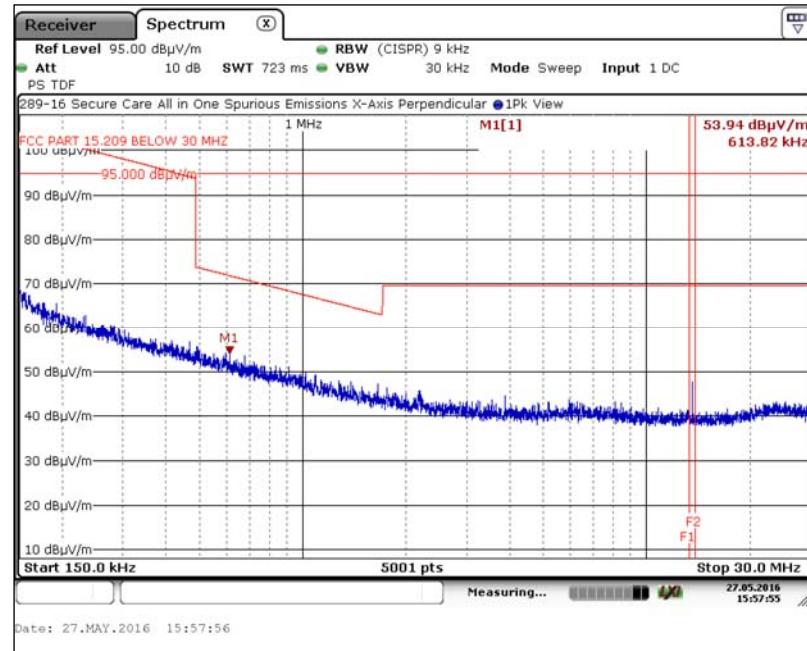

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

7.3.2.3. Y-Axis, Parallel Antenna

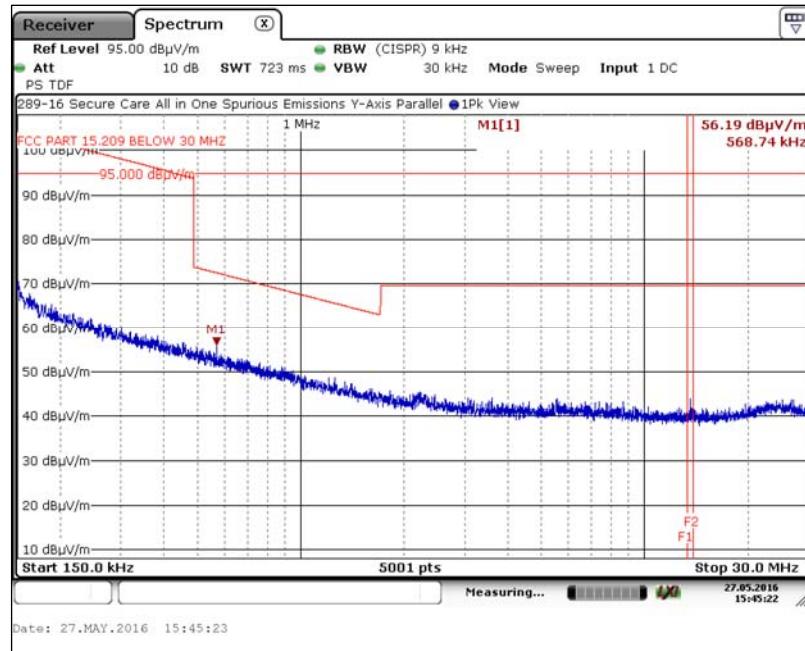

7.3.2.4. Y-Axis, Perpendicular Antenna

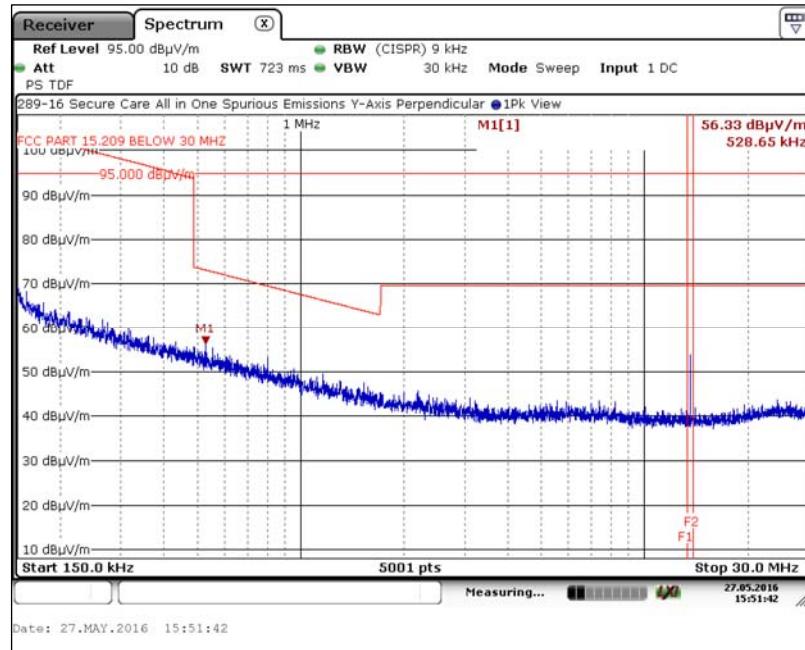

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

7.3.2.5. Z-Axis, Parallel Antenna

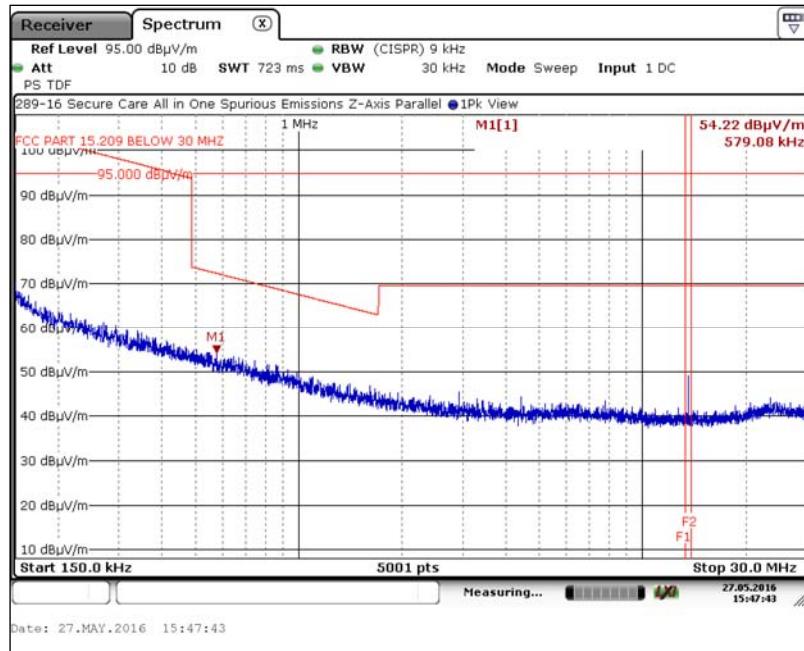

7.3.2.6. Z-Axis, Perpendicular Antenna

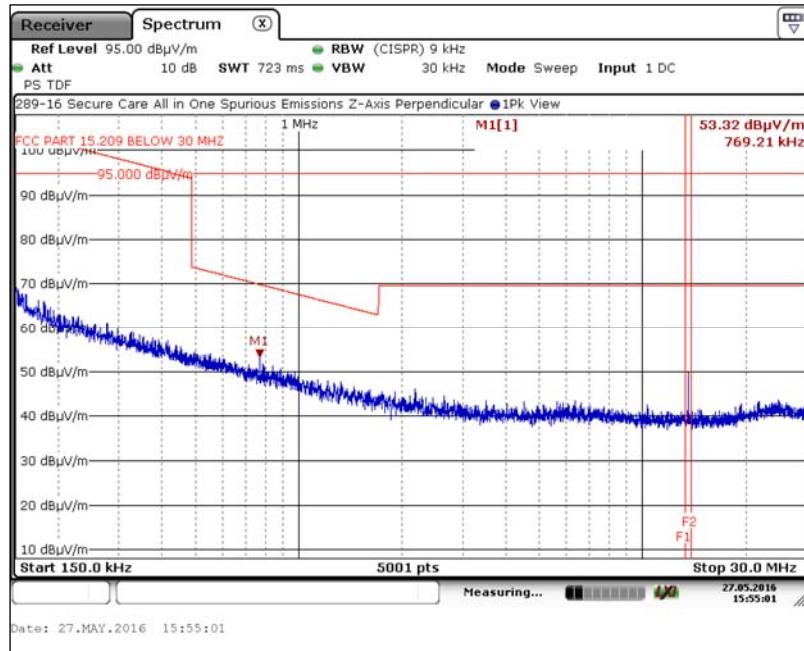

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

7.3.3.1. X-Axis, Horizontal Polarity

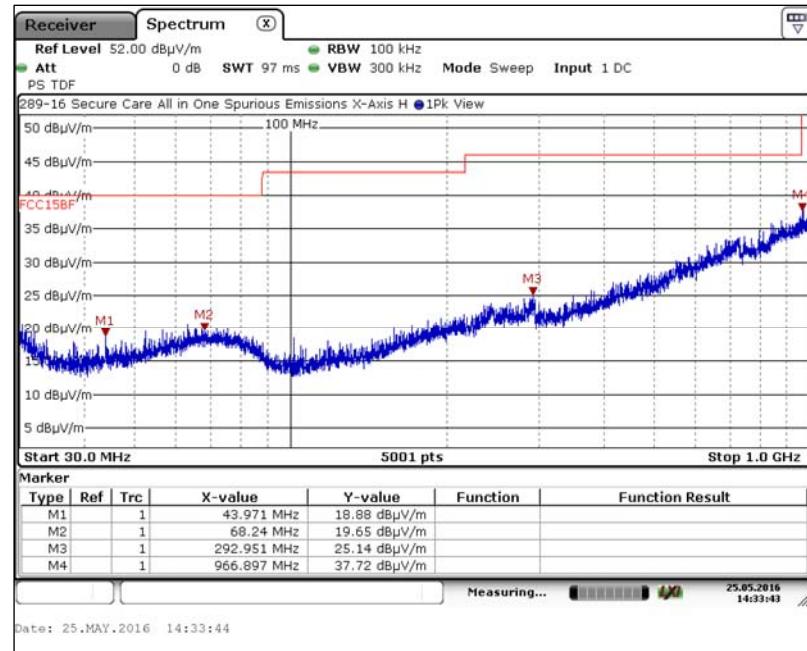

7.3.3.2. X-Axis, Vertical Polarity

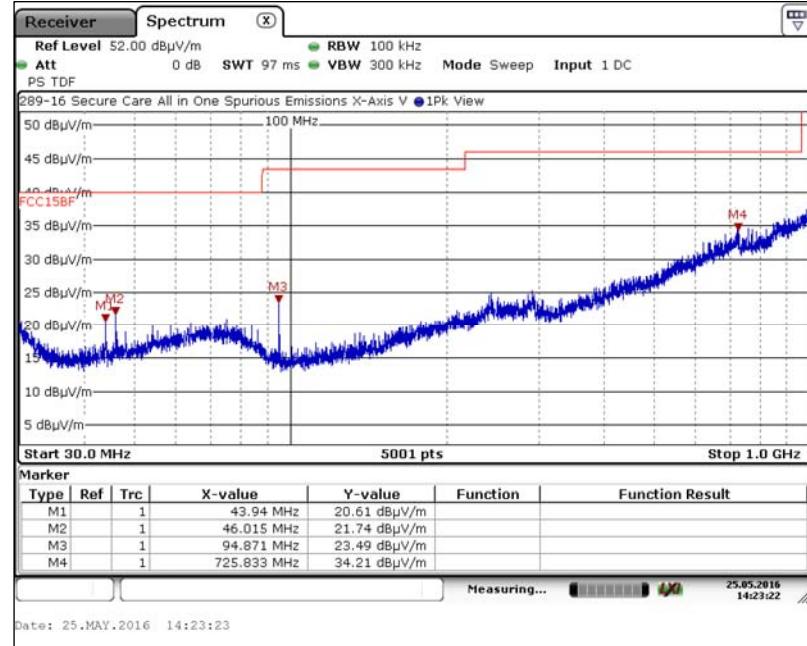

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

7.3.3.3. Y-Axis, Horizontal Polarity

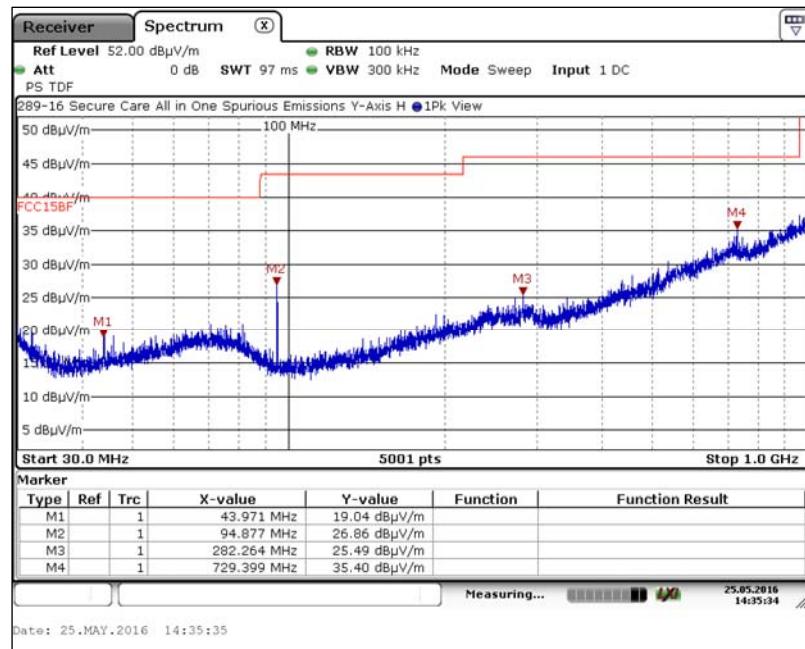

7.3.3.4. Y-Axis, Vertical Polarity

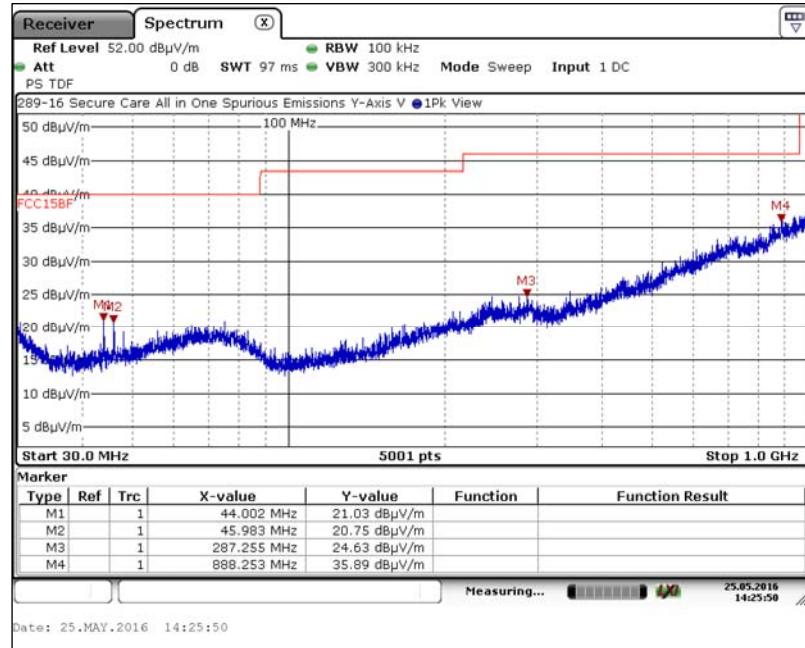

Test Number: 289-16


Issue Date: 5/27/2016

7. Measurement Data (continued)


7.3. Spurious Radiated Emissions, 10 kHz to 1.0 GHz (15.225, § (d), 15.209) (cont'd)

7.3.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

7.3.3.5. Z-Axis, Horizontal Polarity

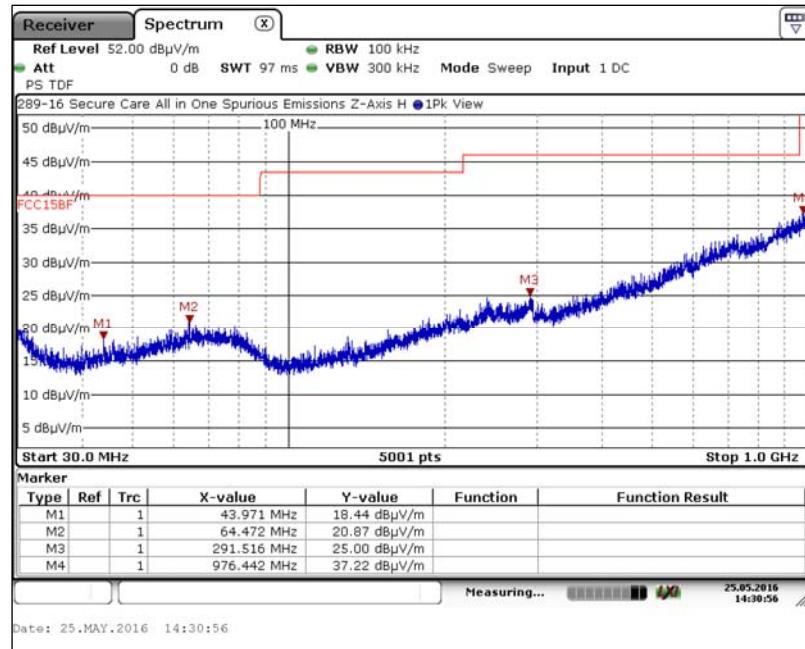

7.3.3.6. Z-Axis, Vertical Polarity

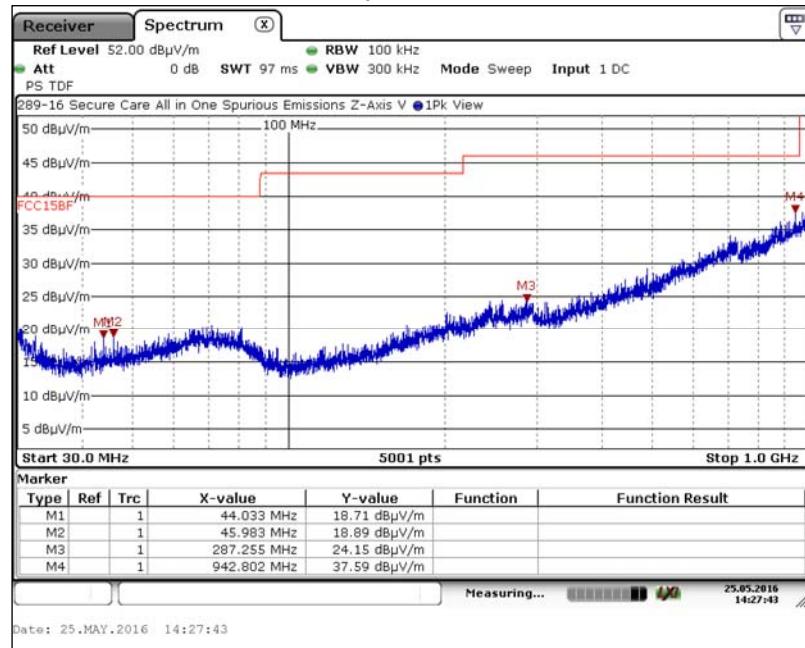

Test Number: 289-16

Issue Date: 5/27/2016

7. Measurement Data (continued)

7.4. Frequency Stability (§ 15.225 (e))

Requirement: The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Note: The device under test is a sealed unit with an enclosed 3 volt DC battery. It was tested as it was supplied by the manufacturer.

Result: Compliant - The unit under test complies with the requirements detailed in FCC Part 15.225 (e).

7.4.1. Temperature Variation

Temp °C	Meas Freq. (MHz)	Limit			Offset (%)	Result
		F _{MIN} (MHz)	F _{MAX} (MHz)	%		
Ambient	13.5596000 ¹	N/A			N/A	
-20	13.5593500	13.557951	13.560663	± 0.01	0.00133797	Compliant
-10	13.5594000	13.557951	13.560663	± 0.01	0.00072364	Compliant
0	13.5594500	13.557951	13.560663	± 0.01	0.00084680	Compliant
+10	13.5600000	13.557951	13.560663	± 0.01	0.00021365	Compliant
+20	13.5596500	13.557951	13.560663	± 0.01	0.00021365	Compliant
+30	13.5596000	13.557951	13.560663	± 0.01	0.00005399	Compliant
+40	13.5596000	13.557951	13.560663	± 0.01	0.00013364	Compliant
+50	13.5595500	13.557951	13.560663	± 0.01	0.00950432	Compliant

¹ Nominal frequency at ambient (~21.6°C)

Test Number: 289-16
Issue Date: 5/27/2016

7. Measurement Data (continued)

7.5. Occupied Bandwidth (Section 15.215 (c) and ANSI C63.10, Section 6.9)

Requirement: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Sections 15.217 through 15.255 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule.


Frequency Band: $F_{\text{MIN}} = 13.110 \text{ MHz}$

$F_{\text{MAX}} = 14.010 \text{ MHz}$

Result: Compliant.

	-20 dB Frequency Measured	Lower & Upper Band Edge (F_{MIN} & F_{Max})		Result
		MHz	MHz	
F_{LO}	13.53	13.11		Compliant ($F_{\text{LO}} > F_{\text{MIN}}$)
F_{HI}	13.58	14.01		Compliant ($F_{\text{HI}} < F_{\text{Max}}$)

7.5.1. Plot of 20 dB Bandwidth vs. Frequency Band

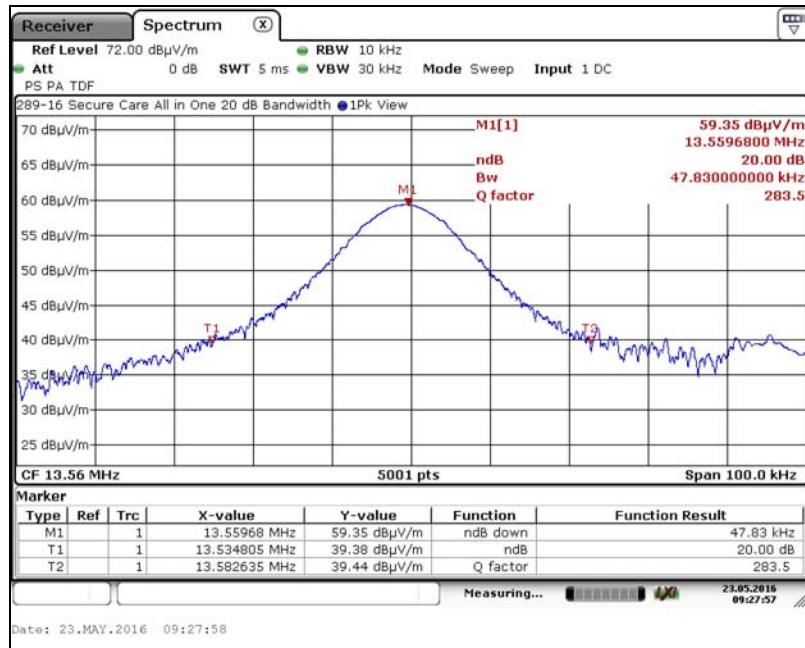

7. Measurement Data (continued)


7.6. 99% Power Bandwidth (RSS-GEN Section 4.6.1)

Requirement: When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

Procedure: This test was performed utilizing the automated 99% bandwidth function of the spectrum analyzer.

Frequency	99% Power Bandwidth
(MHz)	(kHz)
13.56	64.67

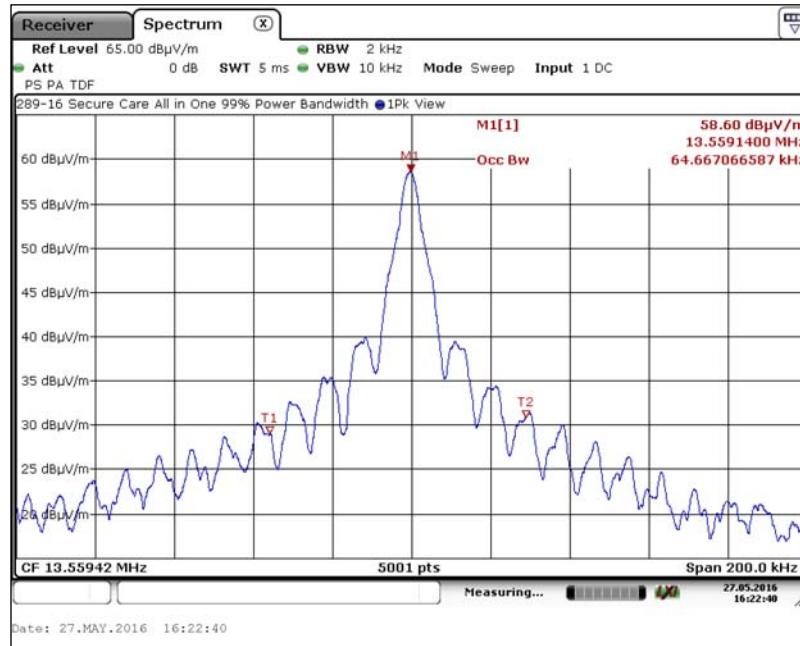

8. Test Setup Photographs

8.1. Radiated Emissions Front View



Test Number: 289-16

Issue Date: 5/27/2016

8. Test Setup Photographs

8.2. Radiated Emissions Rear View < 30 MHz



8. Test Setup Photographs

8.3. Radiated Emissions Rear View 30 MHz – 1 GHz



Test Number: 289-16

Issue Date: 5/27/2016

8. Test Setup Photographs

8.5. Frequency Stability Test Setup





Test Number: 289-16



Issue Date: 5/27/2016

9. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0208.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.