

***Radio Test Report***

***FCC Part 90 and RSS-119  
(USA: 435 MHz to 470 MHz)  
(Canada: 450 MHz to 470 MHz)***

***Model(s): LRS455A***

IC CERTIFICATION #: 2329B-LRS455A  
FCC ID: KNYLRS455A

COMPANY: FreeWave Technologies, Inc.  
5395 Pearl Parkway  
Boulder, CO 80301

TEST SITE(S): National Technical Systems  
41039 Boyce Road.  
Fremont, CA. 94538-2435

PROJECT NUMBER: PR109246

REPORT DATE: July 17, 2020

REISSUE DATE: July 27, 2020

FINAL TEST DATES: June 4, 5 and 8, 2020

TOTAL NUMBER OF PAGES: 49



This report and the information contained herein represent the results of testing of only those articles / products identified in this document and selected by the client. The tests were performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it present any statement whatsoever as to its merchantability or fitness of the test article or similar products, for a particular purpose. This report shall not be reproduced except in full without written approval from NTS.



---

**VALIDATING SIGNATORIES**

PROGRAM MGR

David W. Bare  
Chief Engineer

TECHNICAL REVIEWER:

David W. Bare  
Chief Engineer

FINAL REPORT PREPARER:

David Guidotti  
Senior Technical Writer

QUALITY ASSURANCE DELEGATE

Gary Izard  
Quality Assurance Representative



---

**REVISION HISTORY**

| Rev# | Date          | Comments                                  | Modified By |
|------|---------------|-------------------------------------------|-------------|
| -    | July 17, 2020 | First release                             |             |
| 1    | July 27, 2020 | Added details of two models of the device | dwb         |

---

**TABLE OF CONTENTS**

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>COVER PAGE.....</b>                                   | <b>1</b>  |
| <b>VALIDATING SIGNATORIES .....</b>                      | <b>2</b>  |
| <b>REVISION HISTORY .....</b>                            | <b>3</b>  |
| <b>TABLE OF CONTENTS .....</b>                           | <b>4</b>  |
| <b>SCOPE.....</b>                                        | <b>5</b>  |
| <b>OBJECTIVE .....</b>                                   | <b>6</b>  |
| <b>STATEMENT OF COMPLIANCE.....</b>                      | <b>6</b>  |
| <b>DEVIATIONS FROM THE STANDARDS.....</b>                | <b>6</b>  |
| <b>TEST RESULTS.....</b>                                 | <b>7</b>  |
| FCC PART 90 AND RSS-119.....                             | 7         |
| EXTREME CONDITIONS .....                                 | 8         |
| MEASUREMENT UNCERTAINTIES.....                           | 8         |
| <b>EQUIPMENT UNDER TEST (EUT) DETAILS.....</b>           | <b>9</b>  |
| GENERAL.....                                             | 9         |
| ENCLOSURE.....                                           | 9         |
| MODIFICATIONS.....                                       | 9         |
| SUPPORT EQUIPMENT.....                                   | 9         |
| EUT INTERFACE PORTS .....                                | 10        |
| EUT OPERATION .....                                      | 10        |
| <b>TESTING .....</b>                                     | <b>11</b> |
| GENERAL INFORMATION .....                                | 11        |
| <b>RF PORT MEASUREMENT PROCEDURES .....</b>              | <b>12</b> |
| OUTPUT POWER.....                                        | 12        |
| BANDWIDTH MEASUREMENTS .....                             | 12        |
| CONDUCTED SPURIOUS EMISSIONS.....                        | 13        |
| TRANSMITTER MASK MEASUREMENTS.....                       | 13        |
| FREQUENCY STABILITY .....                                | 13        |
| TRANSIENT FREQUENCY BEHAVIOR:.....                       | 13        |
| <b>RADIATED EMISSIONS MEASUREMENTS.....</b>              | <b>14</b> |
| INSTRUMENTATION .....                                    | 15        |
| FILTERS/ATTENUATORS .....                                | 15        |
| ANTENNAS.....                                            | 15        |
| ANTENNA MAST AND EQUIPMENT TURNTABLE.....                | 16        |
| <b>SAMPLE CALCULATIONS .....</b>                         | <b>16</b> |
| SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS ..... | 16        |
| SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH.....        | 17        |
| SAMPLE CALCULATIONS –RADIATED POWER.....                 | 18        |
| <b>APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....</b>  | <b>19</b> |
| <b>APPENDIX B TEST DATA .....</b>                        | <b>20</b> |
| <b>END OF REPORT .....</b>                               | <b>49</b> |

**SCOPE**

Tests have been performed on the FreeWave Technologies, Inc. model LRS455A, pursuant to the relevant requirements of the following standard(s) in order to obtain device certification against the regulatory requirements of the Federal Communications Commission and Innovation Science and Economic Development Canada.

- Code of Federal Regulations (CFR) Title 47 Part 2
- RSS-Gen Issue 5, April 2018
- CFR 47 Part 90 (Private Land Mobile Radio Service) Subpart I
- RSS-119, Issue 12, May 2015 (Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz)

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems test procedures:

ANSI C63.26:2015

ANSI TIA-603-E

FCC KDB 971168 Licensed Digital Transmitters

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Innovation Science and Economic Development Canada performance and procedural standards.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

National Technical Systems is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise.

The test results recorded herein are based on a single type test of the FreeWave Technologies, Inc. model LRS455A and therefore apply only to the tested sample. The sample was selected and prepared by Pat Reginella of FreeWave Technologies, Inc.

**OBJECTIVE**

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, the device requires certification. Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**STATEMENT OF COMPLIANCE**

The tested sample of FreeWave Technologies, Inc. model LRS455A complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

**DEVIATIONS FROM THE STANDARDS**

No deviations were made from the published requirements listed in the scope of this report.

## TEST RESULTS

### FCC Part 90 and RSS-119

| FCC                                                                   | Canada                 | Description                                                                                                   | Measured                                              | Limit             | Result |
|-----------------------------------------------------------------------|------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-------------------|--------|
| <b>Transmitter Modulation, output power and other characteristics</b> |                        |                                                                                                               |                                                       |                   |        |
| §2.1033 (c) (5)<br>§ 90.35                                            |                        | Frequency range(s)                                                                                            | 435-470 MHz                                           | 435 – 470 MHz     | Pass   |
|                                                                       | RSS-119                | Frequency range(s)                                                                                            | 450-470 MHz                                           | 450 – 470 MHz     | Pass   |
| §2.1033 (c) (6)<br>§2.1033 (c) (7)<br>§ 2.1046<br>§ 90.205            | RSS-119                | RF power output at the antenna terminals                                                                      | 20 dBm to 33.2 dBm                                    | 57 dBm ERP        | Pass   |
| §2.1033 (c) (6)<br>§2.1033 (c) (7)<br>§ 2.1046<br>§ 90.205            | RSS-119                | EIRP / ERP                                                                                                    | Max 29.2 W ERP                                        | 57 dBm ERP        | Pass   |
| §2.1033 (c) (4)<br>§ 2.1047<br>§ 90.210                               | RSS-119                | Emission types                                                                                                | F1D                                                   | -                 | -      |
|                                                                       |                        | Emission mask                                                                                                 | Mask D                                                | Within Mask       | Pass   |
| § 2.1049<br>§ 90.209                                                  | RSS-GEN 6.7<br>RSS-119 | Occupied Bandwidth                                                                                            | 7.64 & 8.89 kHz                                       | 11.25 kHz         | Pass   |
| § 90.214                                                              | RSS-119                | Transient Frequency Behavior                                                                                  | Within Limits                                         | Refer to standard | Pass   |
| <b>Transmitter spurious emissions</b>                                 |                        |                                                                                                               |                                                       |                   |        |
| § 2.1051<br>§ 2.1057                                                  | RSS-119                | At the antenna terminals                                                                                      | -36.0 dBm @ 1380.0 MHz (-16.0 dB)                     | -20 dBm           | Pass   |
| § 2.1053<br>§ 2.1057                                                  | RSS-119                | Field strength                                                                                                | 50.9 dBμV/m @ 3290.0 MHz (-24.4 dB)                   | -20 dBm           | Pass   |
| <b>Other details</b>                                                  |                        |                                                                                                               |                                                       |                   |        |
| § 2.1055<br>§ 90.213                                                  | RSS-119                | Frequency stability                                                                                           | 0.6 ppm                                               | 1.5 ppm           | Pass   |
| § 2.1093                                                              | RSS-102                | RF Exposure                                                                                                   | See separate User Manual and MPE calculation exhibits | Warning to user   | Pass   |
| §2.1033 (c) (8)                                                       |                        | Final radio frequency amplifying circuit's dc voltages and currents for normal operation over the power range | 5.5V and 1000mA                                       | -                 | -      |
| -                                                                     | -                      | Antenna Gain                                                                                                  | Maximum 9.25 dBi                                      | -                 | -      |
| <b>Notes</b>                                                          |                        |                                                                                                               |                                                       |                   |        |

**EXTREME CONDITIONS**

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

The extremes of temperature were -30°C to +50°C as specified in FCC §2.1055(a)(1).

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2) and were calculated in accordance with NAMAS document NIS 81 and M3003.

| Measurement Type                        | Measurement Unit | Frequency Range                | Expanded Uncertainty         |
|-----------------------------------------|------------------|--------------------------------|------------------------------|
| RF frequency                            | Hz               | 25 to 7,000 MHz                | $1.7 \times 10^{-7}$         |
| RF power, conducted                     | dBm              | 25 to 7,000 MHz                | $\pm 0.52$ dB                |
| Conducted emission of transmitter       | dBm              | 25 to 40,000 MHz               | $\pm 0.7$ dB                 |
| Conducted emission of receiver          | dBm              | 25 to 40,000 MHz               | $\pm 0.7$ dB                 |
| Radiated emission (substitution method) | dBm              | 25 to 40,000 MHz               | $\pm 2.5$ dB                 |
| Radiated emission (field strength)      | dB $\mu$ V/m     | 25 to 1,000 MHz<br>1 to 40 GHz | $\pm 3.6$ dB<br>$\pm 6.0$ dB |

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The FreeWave Technologies, Inc. model LRS455A is a licensed radio module which is designed to operate in the 435-470 MHz bands. Since the host unit could be placed in any position during operation, the EUT was treated as tabletop equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 12VDC, 0.8 Amps.

The sample was received on June 4, 2020 and tested on June 4, 5 and 8, 2020. The EUT consisted of the following component(s):

| Company                     | Model   | Description           | Serial Number | FCC ID     |
|-----------------------------|---------|-----------------------|---------------|------------|
| FreeWave Technologies, Inc. | LRS455A | Licensed radio module | 4613252       | KNYLRS455A |

**ENCLOSURE**

The EUT does not have an enclosure. It measures approximately 6 cm wide by 13 cm long.

**ADDITIONAL EUT DETAILS**

Two models of the LRS455A module are sold, LRS455A-C and LRS455A-T. The only difference is the customer interface. LRS455A-C has a serial interface and LRS455A-T has a TTL interface. The PCB is the same size and the radio circuitry of both is identical.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at National Technical Systems.

**SUPPORT EQUIPMENT**

The following equipment was used as support equipment for testing:

| Company          | Model           | Description   | Serial Number | FCC ID |
|------------------|-----------------|---------------|---------------|--------|
| Shenzhen Mingxin | MX15W-1200800UX | AC/DC Adapter | -             | -      |

The following equipment was used as remote support equipment for emissions testing:

| Company | Model                | Description | Serial Number | FCC ID |
|---------|----------------------|-------------|---------------|--------|
| Toshiba | Satellite L645-S4102 | Laptop      | 1B250508W     | -      |

**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

| Port             | Connected To                          | Description | Cable(s)               | Length(m) |
|------------------|---------------------------------------|-------------|------------------------|-----------|
|                  |                                       |             | Shielded or Unshielded |           |
| 10 pin connector | Serial DB9,<br>Power, Reset<br>Button | Multiwire   | Unshielded             | 1.2       |
| Serial DB9       | Laptop USB                            | Multiwire   | Shielded               | 1.8       |
| Power            | AC/DC Adapter                         | two wire    | Unshielded             | 1.4       |
| Antenna          | Termination                           | Coax        | Shielded               | 0.1       |

**EUT OPERATION**

During emissions testing the EUT was set to transmit a continuous modulated signal at maximum power on the selected frequency.

**TESTING****GENERAL INFORMATION**

Antenna port measurements were taken at the National Technical Systems test site located at 41039 Boyce Road, Fremont, CA 94538-2435.


Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 6.2 of RSS-GEN, NTS has been recognized as an accredited test laboratory by the Commission and Innovation, Science and Economic Development Canada. A description of the facilities employed for testing is maintained by NTS.

| Site      | Company / Registration Numbers |                                   | Location                                      |
|-----------|--------------------------------|-----------------------------------|-----------------------------------------------|
|           | FCC                            | Canada                            |                                               |
| Chamber 4 | US1031                         | 2845B (Wireless test lab #US0027) | 41039 Boyce Road<br>Fremont,<br>CA 94538-2435 |
| Chamber 5 |                                |                                   |                                               |

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Results from testing performed in this chamber have been correlated with results from an open area test site. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

## **RF PORT MEASUREMENT PROCEDURES**

Conducted measurements are performed with the EUT's rf input/output connected to the input of a spectrum analyzer, power meter or modulation analyzer. When required an attenuator, filter and/or dc block is placed between the EUT and the spectrum analyzer to avoid overloading the front end of the measurement device. Measurements are corrected for the insertion loss of the attenuators and cables inserted between the rf port of the EUT and the measurement equipment.

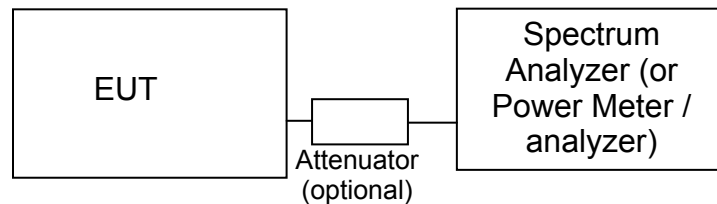

Test Configuration for Antenna Port Measurements

For devices with an integral antenna the output power and spurious emissions are measured as a field strength at a test distance of (typically) 3m and then converted to an eirp using a substitution measurement (refer to RADIATED EMISSIONS MEASUREMENTS). All other measurements are made as detailed below but with the test equipment connected to a measurement antenna directed at the EUT.

### **OUTPUT POWER**

Output power is measured using a power meter and an average sensor head, a spectrum analyzer or a power meter and peak power sensor head as required by the relevant rule part(s). Where necessary measurements are gated to ensure power is only measured over periods that the device is transmitting.

Power measurements made directly on the rf power port are, when appropriate, converted to an EIRP by adding the gain of the highest gain antenna that can be used with the device under test, as specified by the manufacturer.

### **BANDWIDTH MEASUREMENTS**

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS-GEN. The measurement bandwidth is set to be at least 1% of the instrument's frequency span.

**CONDUCTED SPURIOUS EMISSIONS**

Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode measurements). Where the limits are expressed as an average power the spectrum analyzer is tuned to that frequency with a narrow span (wide enough to capture the emission and its sidebands) and the resolution and video bandwidths are adjusted as required by the reference measurement standards. For transmitter measurements the appropriate detector (average, peak, normal, sample, quasi-peak) is used when making measurements for licensed devices. For receiver conducted spurious measurements the detector is set to peak.

**TRANSMITTER MASK MEASUREMENTS**

The transmitter mask measurements are made using resolution bandwidths as specified in the pertinent rule part(s). Where narrower bandwidths are used the measurement is corrected to account for the reduced bandwidth by either using the adjacent channel power function of the spectrum analyzer to sum the power across the required measurement bandwidth. The frequency span of the analyzer is set to ensure the fundamental signal and all significant sidebands are displayed.

The top of the mask may be set by the total output power of the signal, the power of the unmodulated signal or the peak value of the signal in the reference bandwidth being used for the mask measurement.

**FREQUENCY STABILITY**

The EUT is placed inside a temperature chamber with all support and test equipment located outside of the chamber. The temperature is varied across the specified frequency range in 10 degree increments with frequency measurements made at each temperature step. The EUT is allowed enough time to stabilize at each temperature variation.

The spectrum analyzer is configured to give a 5- or 6-digit display for the marker-frequency function. The spectrum analyzer's built-in frequency counter is used to measure the maximum deviation of the fundamental frequency at each temperature. Where possible the device is set to transmit an unmodulated signal. Where this is not possible the frequency drift is determined by finding a stable point on the signal (e.g. the null at the centre of an OFDM signal) or by calculating a centre frequency based on the upper and lower XdB points (where X is typically 6dB or 10dB) on the signal's skirts.

**TRANSIENT FREQUENCY BEHAVIOR:**

The TIA/EIA 603 procedure is used to determine compliance with transient frequency timing requirements as the radio is keyed on and off.

The EUTs rf output is connected via a combiner/splitter to the test receiver/spectrum analyzer and to a diode detector. The test receiver or spectrum analyzer video output is connected to an oscilloscope, which is triggered by the output from the diode detector.

Plots showing Ton, T1, and T2 are made when turning on the transmitter and showing T3 when turning off the transmitter.

## **RADIATED EMISSIONS MEASUREMENTS**

Transmitter radiated spurious emissions are initially measured as a field strength. The eirp or erp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Emissions within 20dB of this limit are the subjected to a substitution measurement.

All radiated emissions measurements are performed in two phases. A preliminary scan of emissions is conducted in either an anechoic chamber or on an OATS during which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed across the complete frequency range of interest and at each operating frequency identified in the reference standard. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. Initial scans are made using a peak detector (RBW=VBW) and using scan rates to ensure that the EUT transmits before the sweep moves out of each resolution bandwidth (for transmit mode).

During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. For transmitter spurious emissions, where the limit is expressed as an effective radiated power, the eirp or erp is converted to a field strength limit.

Final measurements are made in a semi-anechoic chamber at the significant frequencies observed during the preliminary scan(s) using the same process of rotating the EUT and raising/lowering the measurement antenna to find the highest level of the emission. The field strength is recorded and, for receiver spurious emissions, compared to the field strength limit. For the final measurement the appropriate detectors (average, peak, normal, sample, quasi-peak) are used. For receiver measurements below 1GHz the detector is a Quasi-Peak detector, above 1GHz a peak detector is used and the peak value (RB=VB=1MHz) and average value (RB=1MHz, VB=10Hz) are recorded.

For transmitter spurious emissions, the radiated power of all emissions within 20dB of the calculated field strength limit are determined using a substitution measurement. The substitution measurement is made by replacing the EUT with an antenna of known gain (typically a dipole antenna or a double-ridged horn antenna), connected to a signal source. The output power of the signal generator is adjusted until the maximum field strength from the substitution antenna is similar to the field strength recorded from the EUT. The erp of the EUT is then calculated.

**INSTRUMENTATION**

An EMI receiver as specified in CISPR 16-1-1 is used for radiated emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary.

For measurements above the frequency range of the receivers and for all conducted measurements a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis.

Measurement bandwidths for the test instruments are set in accordance with the requirements of the standards referenced in this document.

Software control is used to correct the measurements for transducer factors (e.g. antenna) and the insertion loss of cables, attenuators and other series elements to obtain the final measurement value. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are exported in a graphic and/or tabular format, as appropriate.

**FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the EUT antenna port or receiving antenna and the test receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

**ANTENNAS**

A combination of biconical, log periodic or bi-log antennas are used to cover the range from 30 MHz to 1000 MHz. Broadband antennas or tuned dipole antennas are used over the entire 25 to 1000 MHz frequency range as the reference antenna for substitution measurements.

Above 1000 MHz, a dual-ridge guide horn antenna or octave horn antenna are used as reference and measurement antennas.

The antenna calibration factors are included in site factors that are programmed into the test receivers and instrument control software when measuring the radiated field strength.

**ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

Table mounted devices are placed on a non-conductive table at a height of 80 or 150 centimeters above the floor depending on the frequency being measured. Floor mounted equipment is placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. The EUT is positioned on a motorized turntable to allow it to be rotated during testing to determine the angel with the highest level of emissions.

**SAMPLE CALCULATIONS****SAMPLE CALCULATIONS - CONDUCTED SPURIOUS EMISSIONS**

Measurements are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

- $R_r$  = Measured value in dBm
- $S$  = Specification Limit in dBm
- $M$  = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH**

Measurements of radiated field strength are compared directly to the specification limit (decibel form). The receiver and/or control software corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor is used when measurements are made at a test distance that is different to the specified limit distance by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

**SAMPLE CALCULATIONS –RADIATED POWER**

The erp/eirp limits for transmitter spurious measurements are converted to a field strength in free space using the following formula:

$$E = \frac{\sqrt{30 P G}}{d}$$

where:

- E = Field Strength in V/m
- P = Power in Watts
- G = Gain of isotropic antenna (numeric gain) = 1
- D = measurement distance in meters

The field strength limit is then converted to decibel form (dBuV/m) and the margin of a given emission peak relative to the limit is calculated (refer to SAMPLE CALCULATIONS –RADIATED FIELD STRENGTH).

When substitution measurements are required (all signals with less than 20dB of margin relative to the calculated field strength limit) the eirp of the spurious emission is calculated using:

$$P_{EUT} = P_S - (E_S - E_{EUT})$$

and

$$P_S = G + P_{in}$$

where:

- $P_S$  = effective isotropic radiated power of the substitution antenna (dBm)
- $P_{in}$  = power input to the substitution antenna (dBm)
- G = gain of the substitution antenna (dBi)
- $E_S$  = field strength the substitution antenna (dBm) at eirp  $P_S$
- $E_{EUT}$  = field strength measured from the EUT

Where necessary the effective isotropic radiated power is converted to effective radiated power by subtracting the gain of a dipole (2.2dBi) from the eirp value.

### Appendix A Test Equipment Calibration Data

| <u>Manufacturer</u>                                                 | <u>Description</u>                                           | <u>Model</u>   | <u>Asset #</u> | <u>Calibrated</u> | <u>Cal Due</u> |
|---------------------------------------------------------------------|--------------------------------------------------------------|----------------|----------------|-------------------|----------------|
| <b>Radiated Emissions, 30 - 1,000 MHz, 04-Jun-20</b>                |                                                              |                |                |                   |                |
| National Technical Systems                                          | NTS EMI Software (rev 2.10)                                  | N/A            | WC022452       | N/A               |                |
| Sunol Sciences                                                      | Biconilog, 30-3000 MHz                                       | JB3            | WC064454       | 3/11/2019         | 3/11/2021      |
| Hewlett Packard                                                     | 9KHz-1300MHz pre-amp                                         | 8447F          | WC064718       | 12/2/2019         | 12/2/2020      |
| Rhode & Schwarz                                                     | EMI Test Receiver 20Hz-26.5GHz                               | ESI            | WC071498       | 5/4/2020          | 5/4/2021       |
| <b>Radiated Emissions, 1,000 - 5,000 MHz, 05-Jun-20</b>             |                                                              |                |                |                   |                |
| National Technical Systems                                          | NTS EMI Software (rev 2.10)                                  | N/A            | WC022452       | N/A               |                |
| EMCO                                                                | Horn Antenna                                                 | 3115           | WC062583       | 7/9/2018          | 7/9/2020       |
| Hewlett Packard                                                     | Microwave Preamplifier, 1-26.5GHz                            | 8449B          | WC064574       | 7/19/2019         | 7/19/2020      |
| Rohde & Schwarz                                                     | EMI Test Receiver, 20 Hz-7 GHz                               | ESIB 7         | WC064989       | 11/4/2019         | 11/4/2020      |
| <b>Radio Antenna Port (Power and Spurious Emissions), 05-Jun-20</b> |                                                              |                |                |                   |                |
| National Technical Systems                                          | NTS EMI Software (rev 2.10)                                  | N/A            | WC022452       | N/A               |                |
| National Technical Systems                                          | NTS Mask Software (rev 3.9)                                  | N/A            | WC022701       | N/A               |                |
| National Technical Systems                                          | NTS Capture Analyzer Software (rev 4.0)                      | N/A            | WC022706       | N/A               |                |
| Agilent Technologies                                                | PSA Spectrum Analyzer                                        | E4446A         | WC055650       | 7/18/2019         | 7/18/2020      |
| Rohde & Schwarz                                                     | Peak Power Sensor 100 uW - 2 Watts (w/ 20 dB pad, SN BJ5155) | NRV-Z32        | WC064459       | 6/28/2019         | 6/28/2020      |
| Rohde & Schwarz                                                     | Power Meter, Dual Channel                                    | NRVD           | WC064893       | 6/7/2019          | 6/7/2020       |
| <b>Transient Frequency Behavior, 08-Jun-20</b>                      |                                                              |                |                |                   |                |
| Tektronix                                                           | Oscilloscope (Digital)                                       | TDS5104        | WC055595       | 11/11/2019        | 11/11/2020     |
| Rohde & Schwarz                                                     | Peak Power Sensor 100 uW - 2 Watts (w/ 20 dB pad, SN BJ5155) | NRV-Z32        | WC064459       | 6/28/2019         | 6/28/2020      |
| Rohde & Schwarz                                                     | Power Meter, Dual Channel                                    | NRVD           | WC064893       | 6/7/2019          | 7/7/2020       |
| Rohde & Schwarz                                                     | EMI Test Receiver, 20 Hz-7 GHz                               | ESIB 7         | WC064989       | 11/4/2019         | 11/4/2020      |
| Hewlett Packard                                                     | Signal Generator 0.1 - 1040MHz                               | 8657A          | WC071517       | N/A               |                |
| <b>Radio Antenna Port (Power and Spurious Emissions), 08-Jun-20</b> |                                                              |                |                |                   |                |
| Rohde & Schwarz                                                     | Spectrum Analyzer                                            | FSQ26          | WC055662       | 7/4/2019          | 7/4/2020       |
| Watlow                                                              | Environmental Chamber Controller                             | F4DH-CCCC-21RG | WC066185       | 6/6/2020          | 6/6/2021       |
| Watlow                                                              | Limit Controller                                             | Limit 97       | WC071533       | N/A               |                |
| Envirotronics                                                       | EMC Chamber #10 (Lab #3)                                     | SH16C          | WC071534       | N/A               |                |

## ***Appendix B Test Data***

TL109246-RANA Pages 21 - 48



## EMC Test Data

|                        |                             |                   |               |
|------------------------|-----------------------------|-------------------|---------------|
| Client:                | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Product                | LRS455A                     | T-Log Number:     | TL109246-RANA |
| System Configuration:  | -                           | Project Manager:  | Deepa Shetty  |
| Contact:               | Michael Vidales             | Project Engineer: | David Bare    |
| Emissions Standard(s): | FCC Parts 15 & 90, RSS-119  | Class:            | -             |
| Immunity Standard(s):  | -                           | Environment:      | Radio         |

## EMC Test Data

For The

**FreeWave Technologies, Inc.**

Product

**LRS455A**

Date of Last Test: 6/8/2020



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### RSS 119 and FCC Part 90

#### Power, Occupied Bandwidth, Frequency Stability and Spurious Emissions

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

#### General Test Configuration

With the exception of the radiated spurious emissions tests, all measurements are made with the EUT's rf port connected to the measurement instrument via an attenuator or dc-block if necessary. All amplitude measurements are adjusted to account for the attenuation between EUT and measuring instrument. For frequency stability measurements the EUT was placed inside an environmental chamber.

Radiated measurements are made with the EUT located on a non-conductive table, 3m from the measurement antenna.

Radiated emissions tests above 1 GHz to FCC Part 90 were performed with floor absorbers in place in accordance with the test methods of ANSI C63.4 and CISPR 16-1-4.

#### Ambient Conditions:

Temperature: 19 - 23 °C

Rel. Humidity: 39 - 44 %

#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Summary of Results

| Run # |  | Test Performed                 | Limit                                                                  | Pass / Fail | Result / Margin                     |
|-------|--|--------------------------------|------------------------------------------------------------------------|-------------|-------------------------------------|
| 1     |  | Output Power                   | 500W ERP                                                               | Pass        | 33.2 dBm<br>(Max 29.2 W ERP)        |
| 2     |  | Spectral Mask                  | Within Mask                                                            | Pass        | Within Mask                         |
| 3     |  | 99% or Occupied Bandwidth      | 11.25 kHz                                                              | Pass        | 7.64 & 8.89 kHz                     |
| 4     |  | Spurious Emissions (conducted) | -20dBm                                                                 | Pass        | -36.0 dBm @ 1380.0 MHz (-16.0 dB)   |
| 5     |  | Spurious emissions (radiated)  | -20dBm                                                                 | Pass        | 50.9 dBμV/m @ 3290.0 MHz (-24.4 dB) |
| 6     |  | Transient Frequency Behavior   | t <sub>1</sub> : 10ms<br>t <sub>2</sub> : 25ms<br>t <sub>3</sub> :10ms | Pass        | Within Limits                       |
| 7     |  | Modulation limitation          | N/A                                                                    | -           | -                                   |
| 8     |  | Frequency Stability            | 2.5 ppm / 1.5 ppm                                                      | Pass        | 0.6                                 |

### Test Notes

RSS-119 and SRSP-501 only allow operation from 450-470 MHz. FCC §2.106 pages 28 and 29 and Part 90 allow operation over the full 435-470 MHz band.



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #1: Output Power

Date of Test: 6/5/2020

Test Engineer: David Bare

Test Location: Fremont Chamber #5

Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC

Cable Loss: 0.0 dB

Cable ID(s): None

Attenuator: 20.0 dB

Attenuator IDs: WC072235

Total Loss: 20.0 dB

| Power Setting <sup>2</sup> | Frequency (MHz) | Output Power       |        | Max Ant Gain (dBi) | Result | ERP  |        |
|----------------------------|-----------------|--------------------|--------|--------------------|--------|------|--------|
|                            |                 | (dBm) <sup>1</sup> | mW     |                    |        | dBm  | W      |
| 10                         | 435             | 32.9               | 1949.8 | 9.25               | Pass   | 44.4 | 27.227 |
| 10                         | 450             | 33.2               | 2089.3 | 9.25               | Pass   | 44.7 | 29.174 |
| 10                         | 460             | 33.2               | 2089.3 | 9.25               | Pass   | 44.7 | 29.174 |
| 10                         | 470             | 33.1               | 2041.7 | 9.25               | Pass   | 44.6 | 28.510 |

|         |                                                                                             |
|---------|---------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a peak power meter                                              |
| Note 2: | Power setting - the software power setting used during testing, included for reference only |
| Note 3: | 435 MHz not used in Canada                                                                  |



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #2: Spectral Mask, FCC Part 90/RSS-119 Mask D

Date of Test: 6/5/2020

Test Engineer: David Bare

Test Location: Fremont Chamber #5


Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC

Note 1: Reference level for Mask is equal to maximim peak power from Run 1

Note 2: 435 MHz not used in Canada

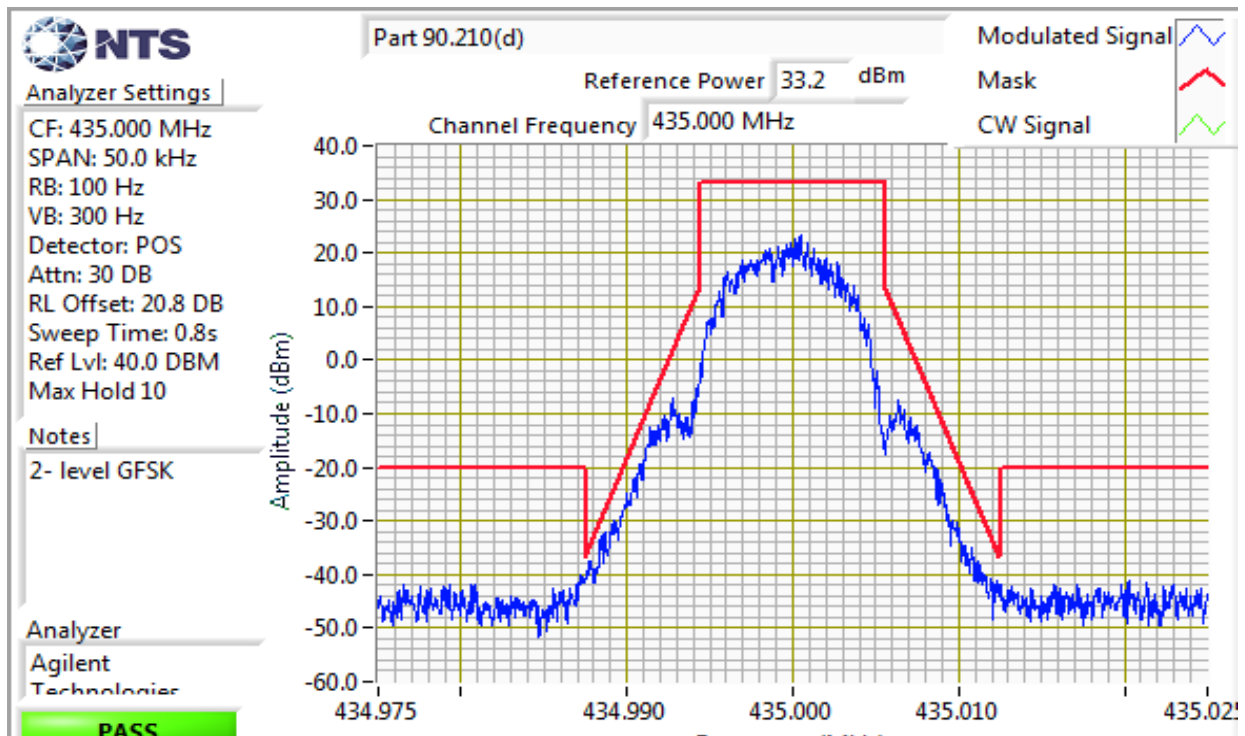



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 435.000 MHz  
SPAN: 100 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 1.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

4-level GFSK

### Analyzer

Agilent  
Technologies

**PASS**

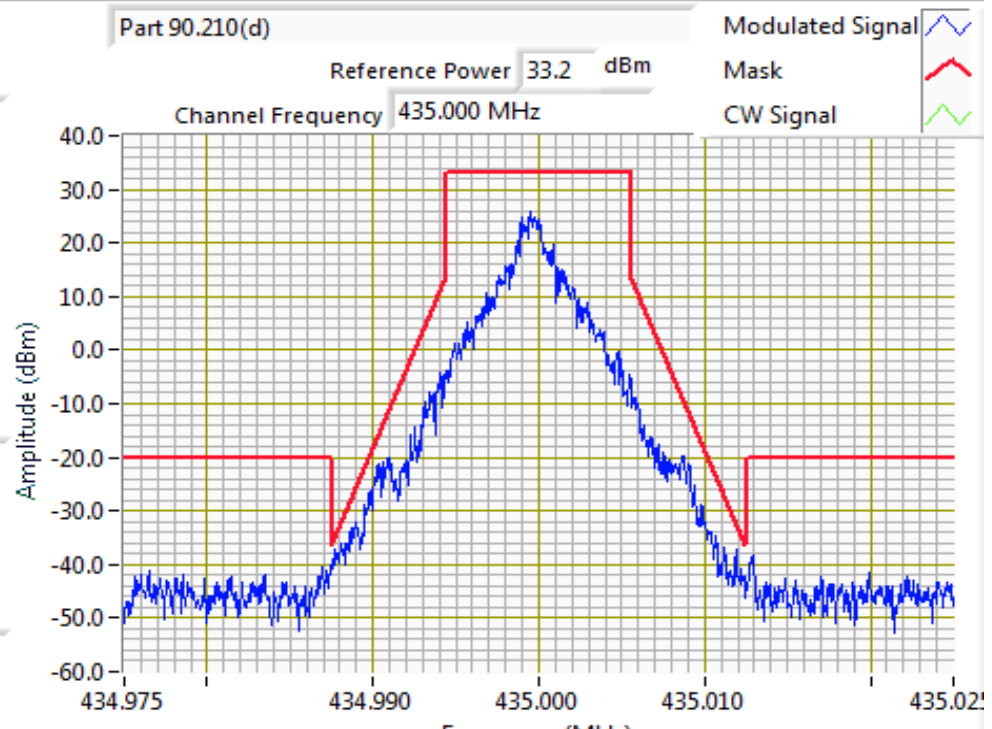



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 450.000 MHz  
SPAN: 50.0 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 0.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

4-level GFSK

### Analyzer

Agilent  
Technologies

**PASS**

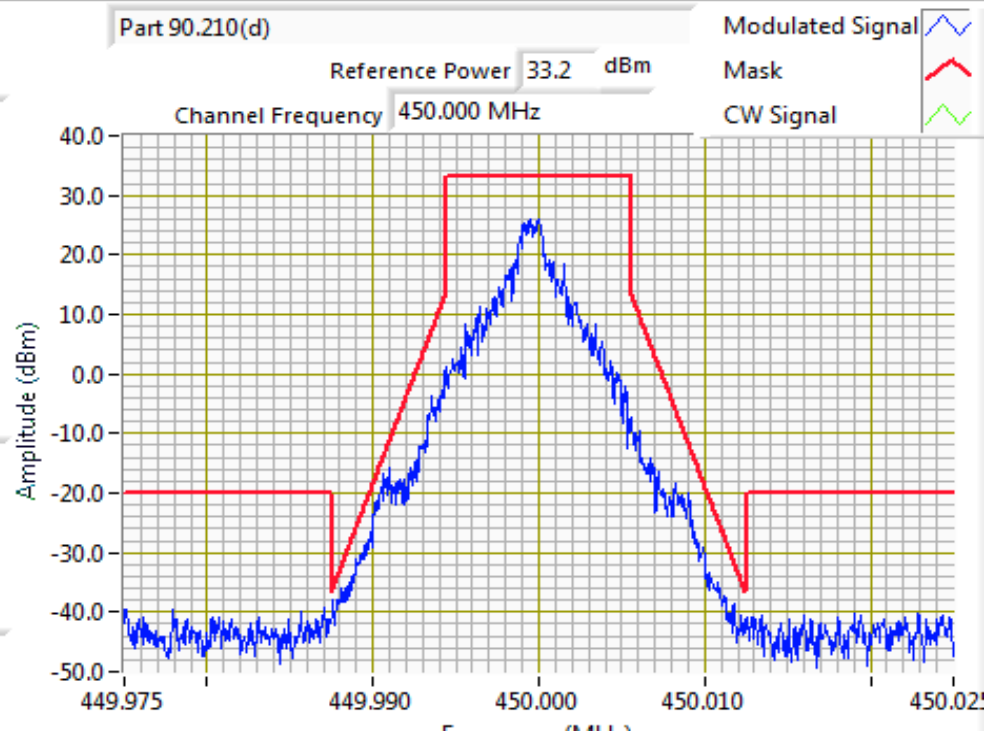



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 450.000 MHz  
SPAN: 50.0 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 0.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

2-level GFSK

### Analyzer

Agilent  
Technologies

**PASS**

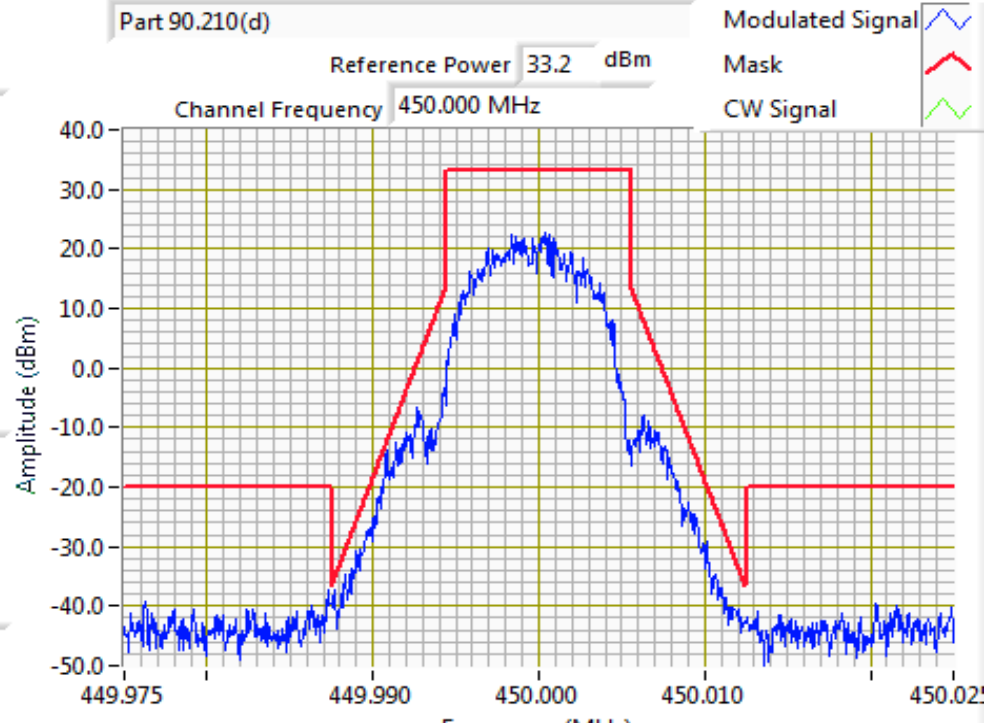



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 460.000 MHz  
SPAN: 50.0 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 0.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

4-level GFSK

### Analyzer

Agilent  
Technologies

**PASS**

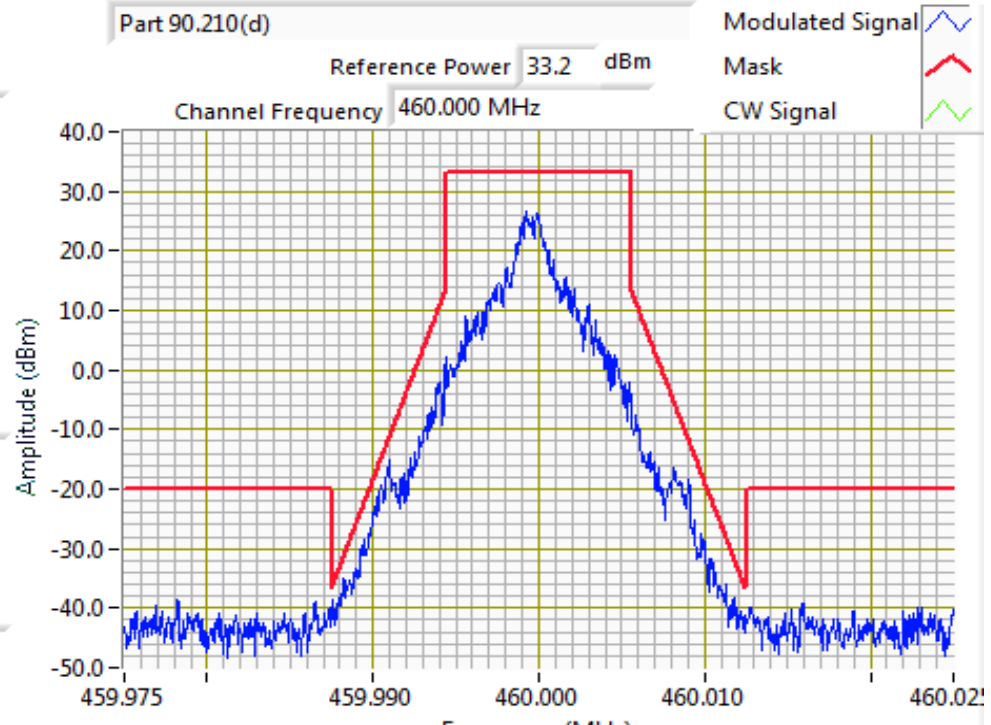



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 460.000 MHz  
SPAN: 50.0 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 0.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

2-level GFSK

### Analyzer

Agilent  
Technologies


**PASS**

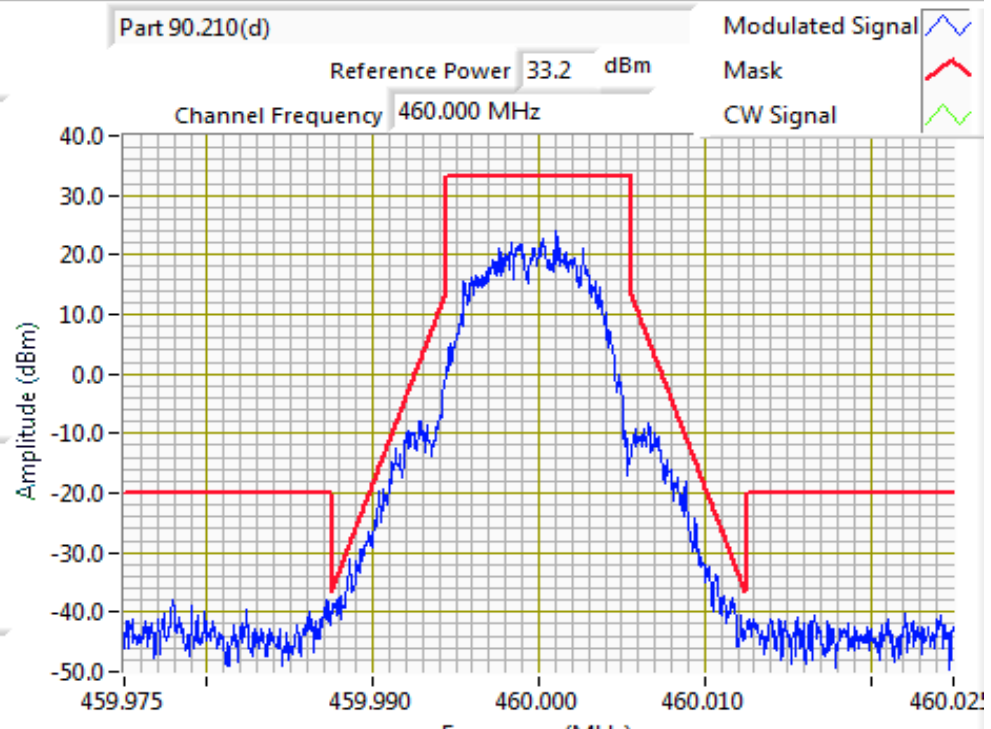



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

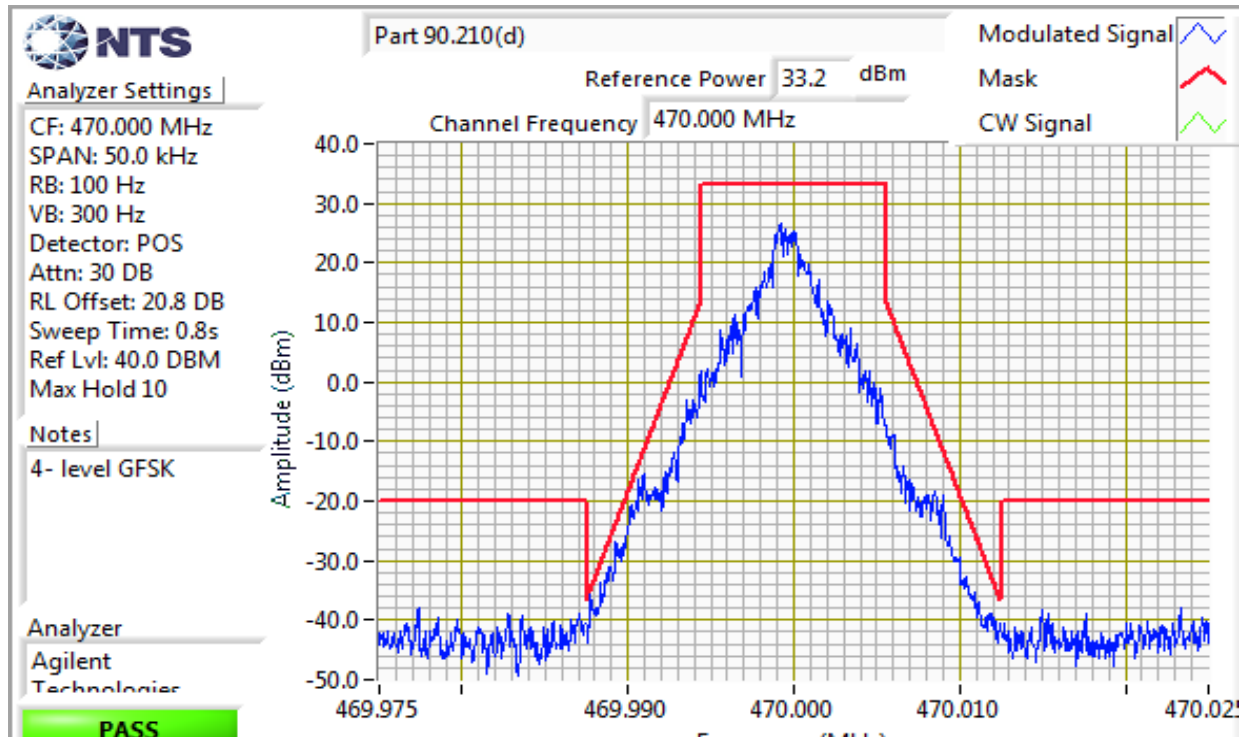



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |



### Analyzer Settings

CF: 470.000 MHz  
SPAN: 50.0 kHz  
RB: 100 Hz  
VB: 300 Hz  
Detector: POS  
Attn: 30 DB  
RL Offset: 20.8 DB  
Sweep Time: 0.8s  
Ref Lvl: 40.0 DBM  
Max Hold 10


### Notes

2-level GFSK

### Analyzer

Agilent  
Technologies

**PASS**

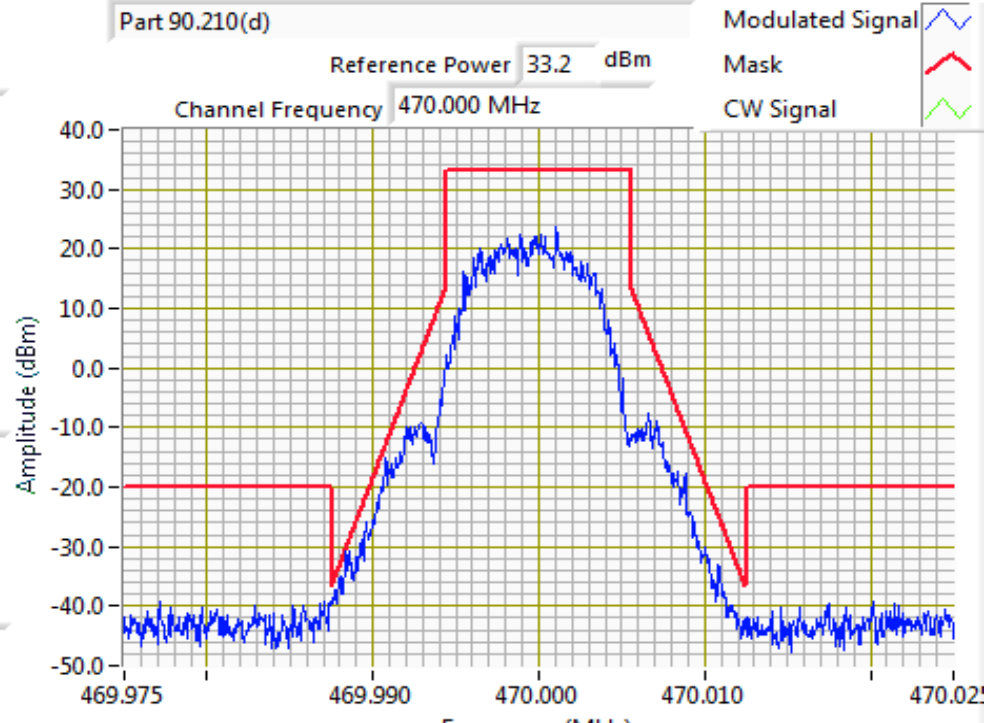



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #3: Signal Bandwidth

Date of Test: 6/5/2020

Test Engineer: David Bare

Test Location: Fremont Chamber #5


Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC

| Power Setting | Frequency (MHz) | Resolution Bandwidth | Bandwidth (kHz) | 99%  |              |
|---------------|-----------------|----------------------|-----------------|------|--------------|
| 10            | 435             | 300 Hz               |                 | 8.84 | 2-level GFSK |
| 10            | 450             | 300 Hz               |                 | 8.89 | 2-level GFSK |
| 10            | 460             | 300 Hz               |                 | 8.89 | 2-level GFSK |
| 10            | 470             | 300 Hz               |                 | 8.89 | 2-level GFSK |
| 10            | 435             | 300 Hz               |                 | 7.64 | 4-level GFSK |
| 10            | 450             | 300 Hz               |                 | 7.64 | 4-level GFSK |
| 10            | 460             | 300 Hz               |                 | 7.64 | 4-level GFSK |
| 10            | 470             | 300 Hz               |                 | 7.59 | 4-level GFSK |

|         |                                                                                                                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | 99% bandwidth measured in accordance with ANSI C63.10, with RB between 1% and 5% of the measured bandwidth and VB $\geq 3 \times RB$ and Span $\geq 1.5\%$ and $\leq 5\%$ of measured bandwidth. |
| Note 2: | 435 MHz not used in Canada                                                                                                                                                                       |

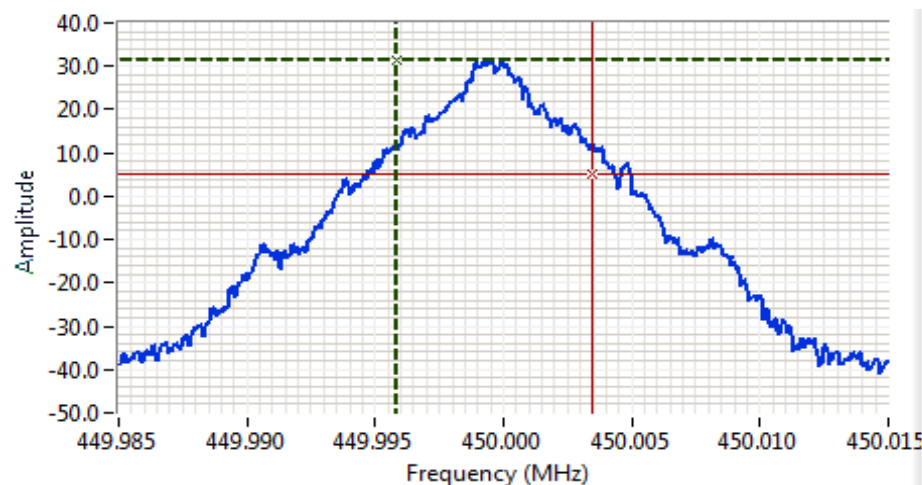

#### Analyzer Settings

Agilent Technologies,  
E4446A

CF: 450.000 MHz

SPAN: 30.0 kHz

RB: 300 Hz

VB: 1.00 kHz

Detector: POS

Attn: 30 DB

RL Offset: 20.8 DB

Sweep Time: 0.3s

Comments

99% power BW: 7.64 kHz

4-level GFSK

|        |            |      |  |
|--------|------------|------|--|
| Cursor | 449.995832 | 31.2 |  |
| Cursor | 450.003469 | 5.2  |  |

Delta Freq. 7.64 kHz


Delta Amplitude 26.0





## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

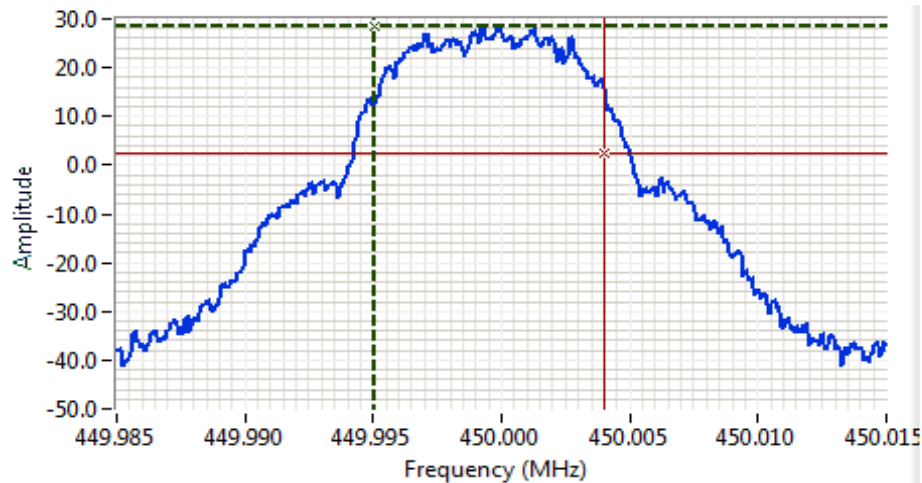

### Analyzer Settings

Agilent Technologies,  
E4446A

CF: 450.000 MHz

SPAN: 30.0 kHz

RB: 300 Hz

VB: 1.00 kHz

Detector: POS

Attn: 30 DB

RL Offset: 20.8 DB

Sweep Time: 0.3s

### Comments

99% power BW: 8.89 kHz

2-level GFSK

|        |            |      |  |
|--------|------------|------|--|
| Cursor | 449.995083 | 28.6 |  |
| Cursor | 450.003968 | 2.6  |  |

Delta Freq. 8.89 kHz  
Delta Amplitude 26.0





## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #4: Out of Band Spurious Emissions, Conducted

Date of Test: 6/5/2020

Test Engineer: David Bare

Test Location: Fremont Chamber #5

Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC

| Frequency (MHz) | Limit   | Result |
|-----------------|---------|--------|
| 435             | -20 dBm | Pass   |
| 450             | -20 dBm | Pass   |
| 460             | -20 dBm | Pass   |
| 470             | -20 dBm | Pass   |

The limit is taken from FCC Part 90 Mask D.

Plots 20 Mhz wide centered on the signal frequency also provided for each channel bandwidth/spacing.

### Final peak readings

| Frequency MHz | Level dBm | Port    | FCC 90.210 |        | Detector QP/Ave | Comments                                 |
|---------------|-----------|---------|------------|--------|-----------------|------------------------------------------|
|               |           |         | Limit      | Margin |                 |                                          |
| 870.006       | -37.7     | RF Port | -20.0      | -17.7  | PK              | PK (CISPR)-RB 120 kHz; VB: 1 MHz 435 MHz |
| 1305.020      | -36.5     | RF Port | -20.0      | -16.5  | PK              | PK (CISPR)-RB 1 MHz; VB: 3 MHz 435 MHz   |
| 899.999       | -37.6     | RF Port | -20.0      | -17.6  | PK              | PK (CISPR)-RB 120 kHz; VB: 1 MHz 450 MHz |
| 1350.010      | -36.4     | RF Port | -20.0      | -16.4  | PK              | PK (CISPR)-RB 1 MHz; VB: 3 MHz 450 MHz   |
| 919.992       | -37.5     | RF Port | -20.0      | -17.5  | PK              | PK (CISPR)-RB 120 kHz; VB: 1 MHz 460 MHz |
| 1380.000      | -36.0     | RF Port | -20.0      | -16.0  | PK              | PK (CISPR)-RB 1 MHz; VB: 3 MHz 460 MHz   |
| 940.008       | -37.7     | RF Port | -20.0      | -17.7  | PK              | PK (CISPR)-RB 120 kHz; VB: 1 MHz 470 MHz |
| 1409.840      | -36.6     | RF Port | -20.0      | -16.6  | PK              | PK (CISPR)-RB 1 MHz; VB: 3 MHz 470 MHz   |



Note 1: 435 MHz not used in Canada



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for low channel, power setting(s) = 10

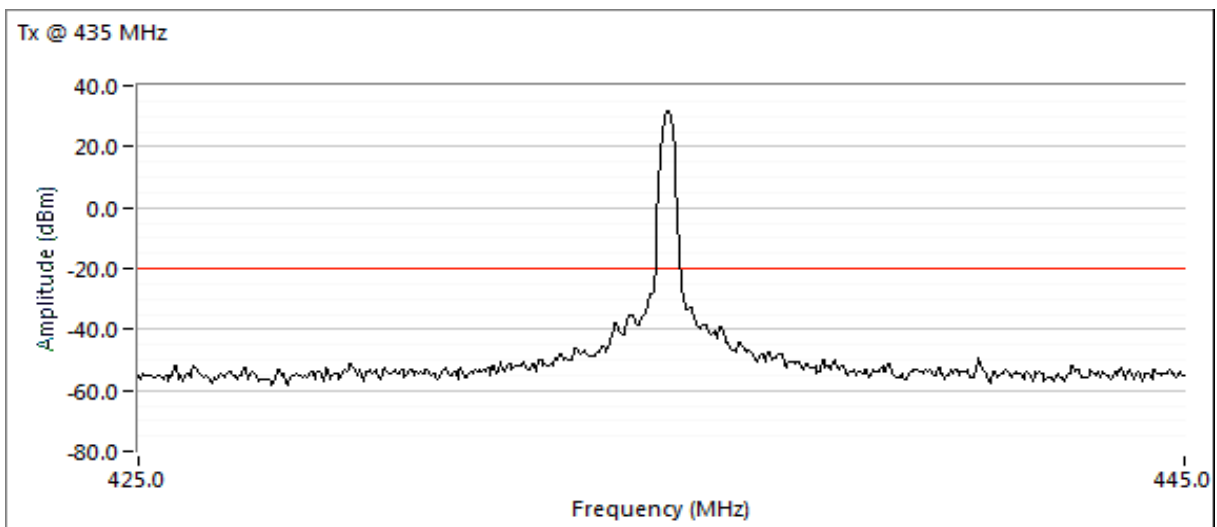
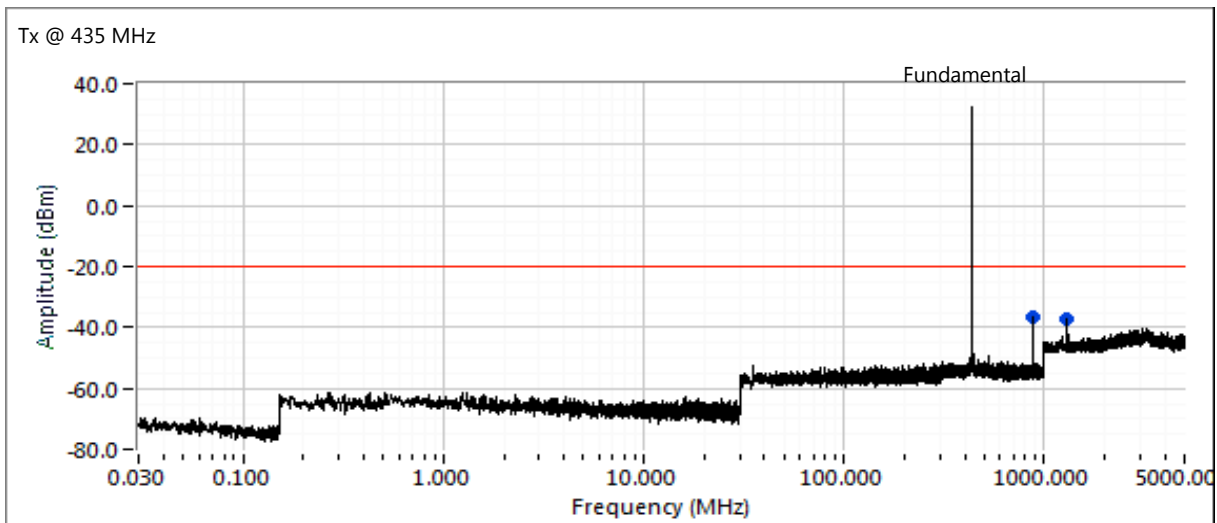




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for center channel, power setting(s) = 10

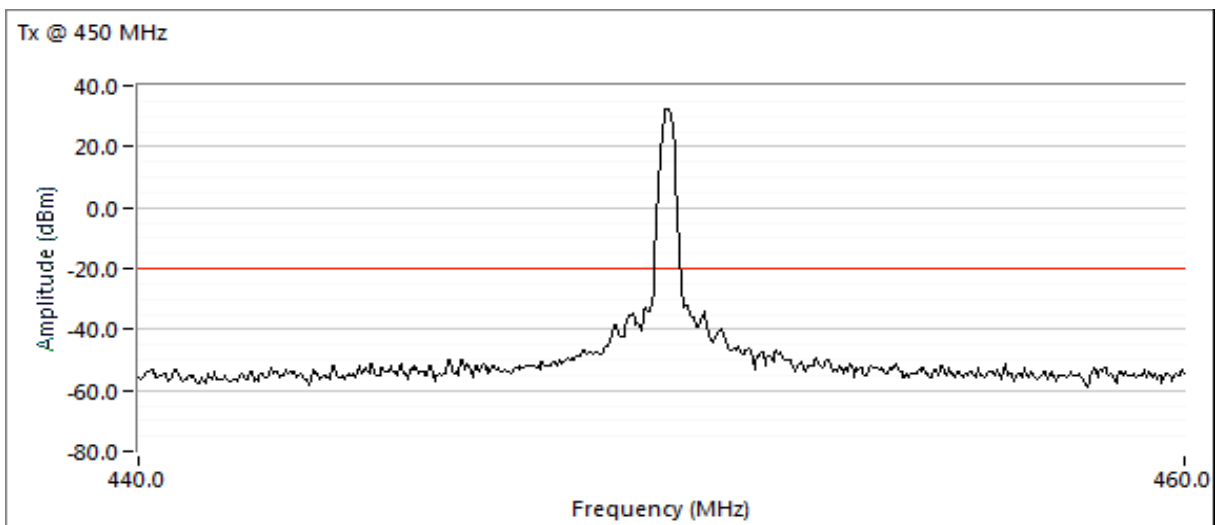
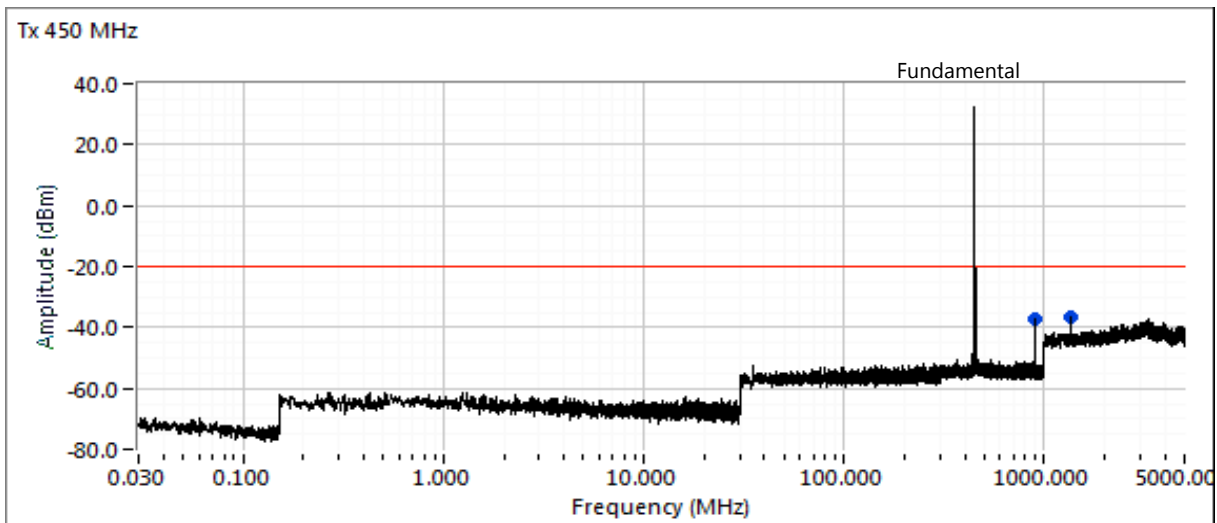




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for center channel, power setting(s) = 10

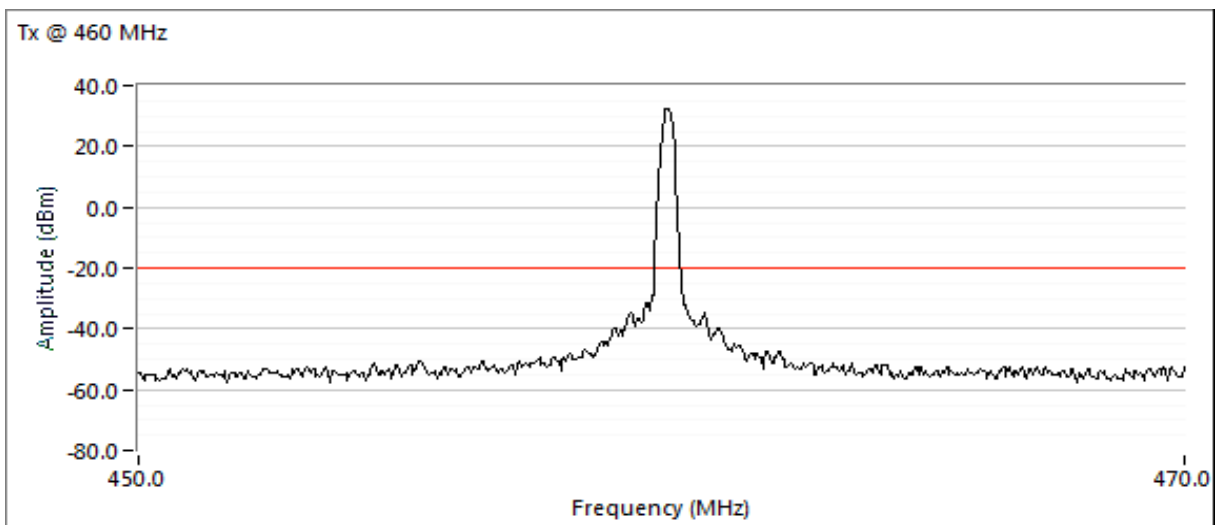
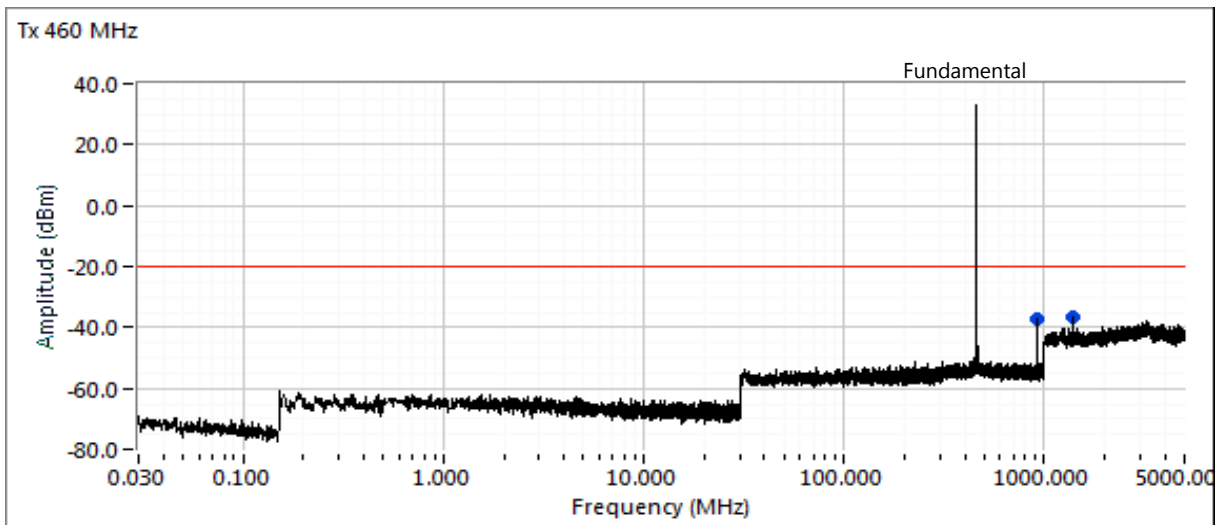




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for high channel, power setting(s) = 10

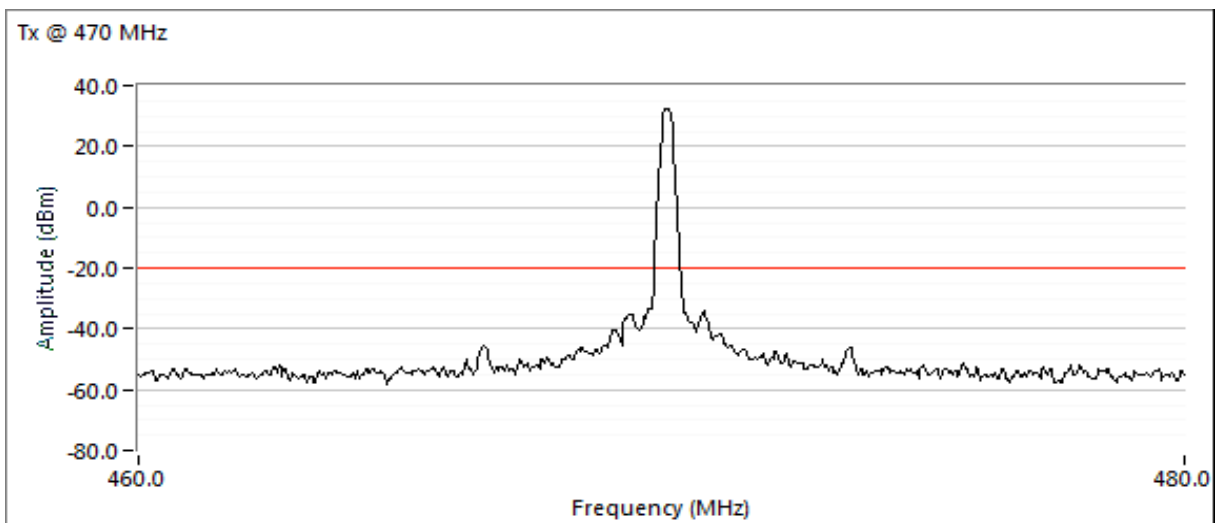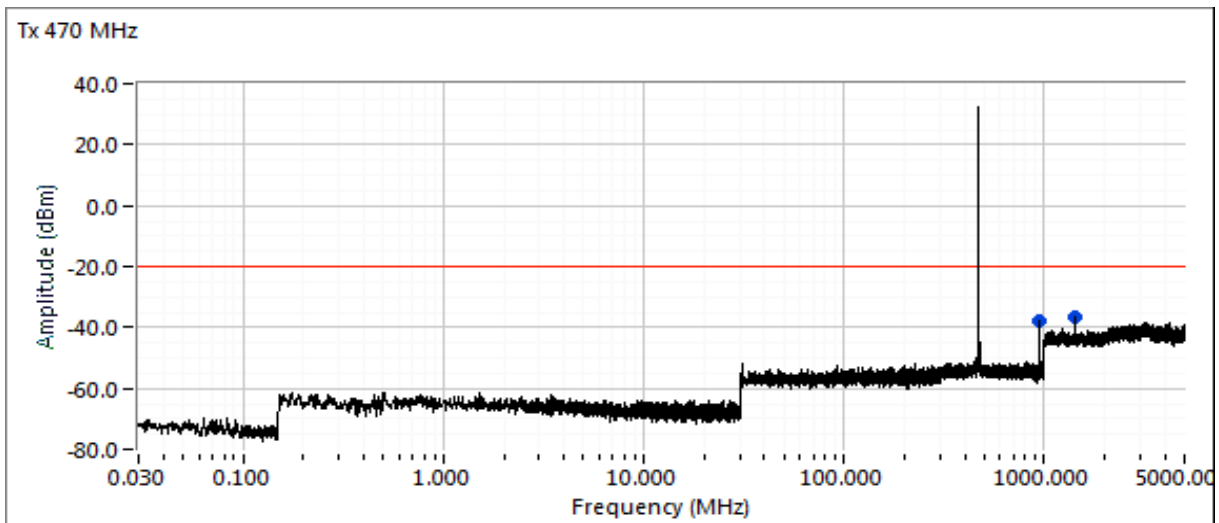



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #5: Out of Band Spurious Emissions, Radiated

Conducted limit (dBm): -20  
Approximate field strength limit @ 3m: 75.3

The limit is taken from FCC Part 90 Mask D

#### Run #5a - Preliminary measurements

Date of Test: 6/4 & 6/5/2020  
Test Engineer: David Bare & Y K Soo  
Test Location: Fremont Chamber #4 & 5

Config. Used: 1  
Config Change: None  
EUT Voltage: 12VDC

| Frequency | Level  | Pol | FCC Part 90 |        | Detector  | Azimuth | Height | Comments | Channel |
|-----------|--------|-----|-------------|--------|-----------|---------|--------|----------|---------|
| MHz       | dBμV/m | v/h | Limit       | Margin | Pk/QP/Avg | degrees | meters |          |         |
| 230.741   | 35.8   | H   | 75.3        | -39.5  | Peak      | 320     | 1.5    |          | 435 MHz |
| 870.942   | 41.7   | H   | 75.3        | -33.6  | Peak      | 159     | 2.0    |          | 435 MHz |
| 1305.030  | 35.6   | V   | 75.3        | -39.7  | Peak      | 77      | 2.5    |          | 435 MHz |
| 2175.040  | 41.9   | V   | 75.3        | -33.4  | Peak      | 143     | 2.0    |          | 435 MHz |
| 232.365   | 35.2   | H   | 75.3        | -40.1  | Peak      | 280     | 1.5    |          | 450 MHz |
| 900.401   | 42.0   | H   | 75.3        | -33.3  | Peak      | 145     | 2.0    |          | 450 MHz |
| 1350.030  | 34.2   | V   | 75.3        | -41.1  | Peak      | 93      | 2.0    |          | 450 MHz |
| 2250.040  | 37.3   | H   | 75.3        | -38.0  | Peak      | 77      | 1.0    |          | 450 MHz |
| 233.513   | 35.4   | H   | 75.3        | -39.9  | Peak      | 283     | 1.5    |          | 460 MHz |
| 920.009   | 41.7   | H   | 75.3        | -33.6  | Peak      | 156     | 1.0    |          | 460 MHz |
| 1380.000  | 35.3   | V   | 75.3        | -40.0  | Peak      | 91      | 2.0    |          | 460 MHz |
| 2300.000  | 37.8   | V   | 75.3        | -37.5  | Peak      | 76      | 1.5    |          | 460 MHz |
| 3220.010  | 38.7   | V   | 75.3        | -36.6  | Peak      | 215     | 1.5    |          | 460 MHz |
| 223.645   | 35.4   | H   | 75.3        | -39.9  | Peak      | 306     | 1.5    |          | 470 MHz |
| 940.007   | 46.2   | V   | 75.3        | -29.1  | Peak      | 76      | 1.0    |          | 470 MHz |
| 1410.020  | 33.8   | V   | 75.3        | -41.5  | Peak      | 84      | 1.5    |          |         |
| 2350.020  | 37.5   | V   | 75.3        | -37.8  | Peak      | 94      | 1.0    |          |         |
| 3290.010  | 45.4   | H   | 75.3        | -29.9  | Peak      | 342     | 1.0    |          |         |



|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | The field strength limit in the tables above was calculated from the erp/eirp limit detailed in the standard using the free space propagation equation: $E = \sqrt{(30PG)/d}$ . This limit is conservative - it does not consider the presence of the ground plane and, for erp limits, the dipole gain (2.2dBi) has not been included. The erp or eirp for all signals with less than <b>20dB</b> of margin relative to this field strength limit is determined using substitution measurements. |
| Note 2: | Measurements are made with the antenna port terminated.                                                                                                                                                                                                                                                                                                                                                                                                                                           |



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for low channel, power setting(s) = 10

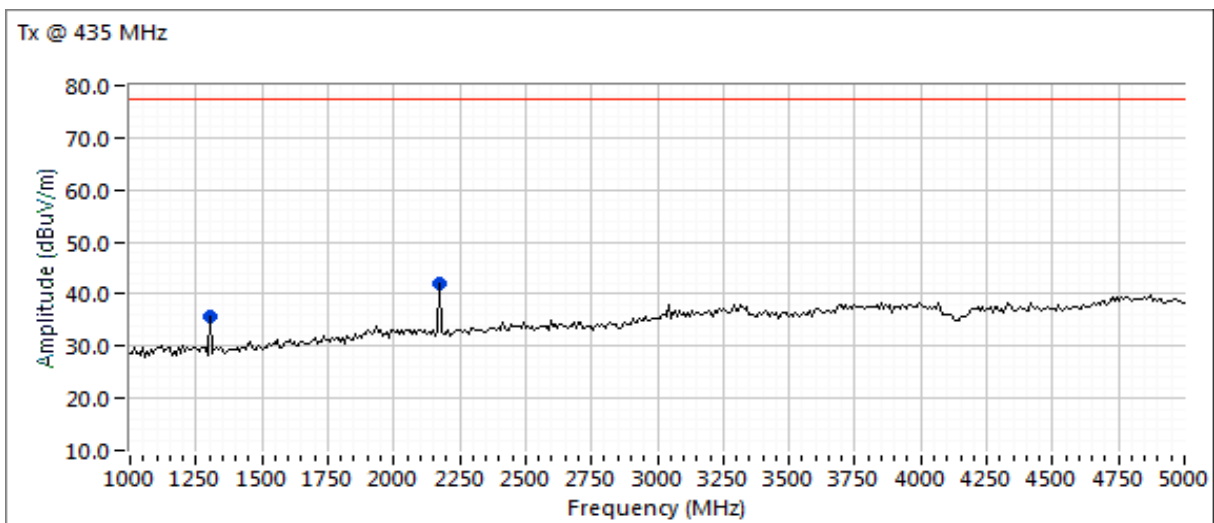
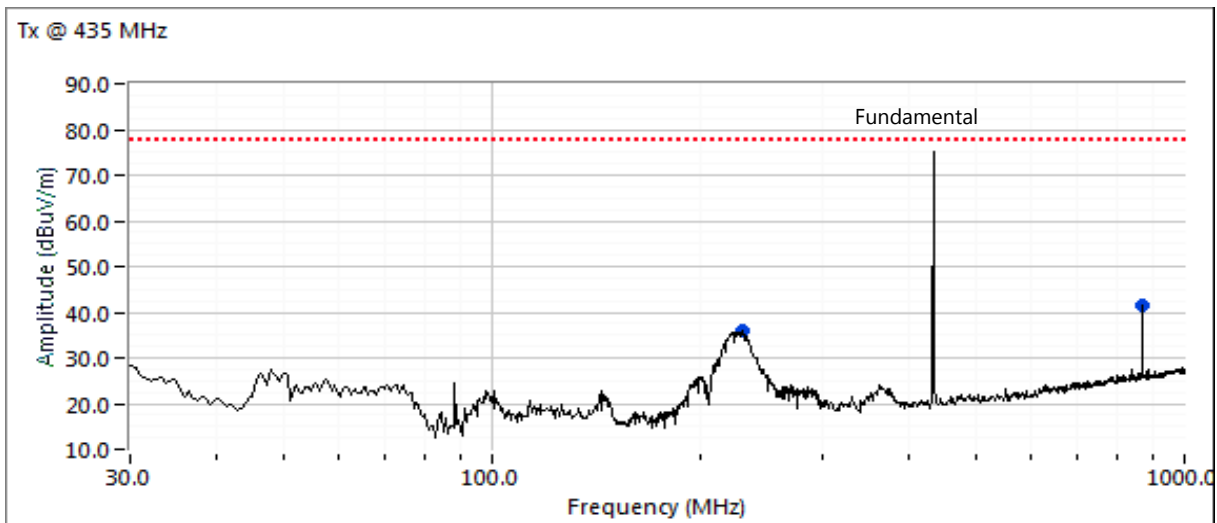




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for center channel, power setting(s) = 10

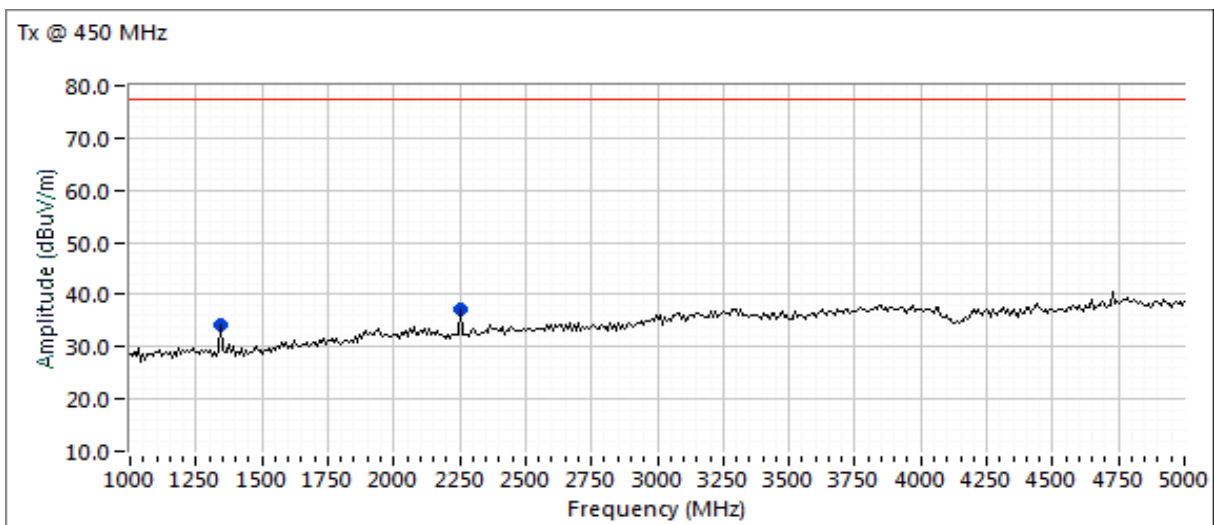
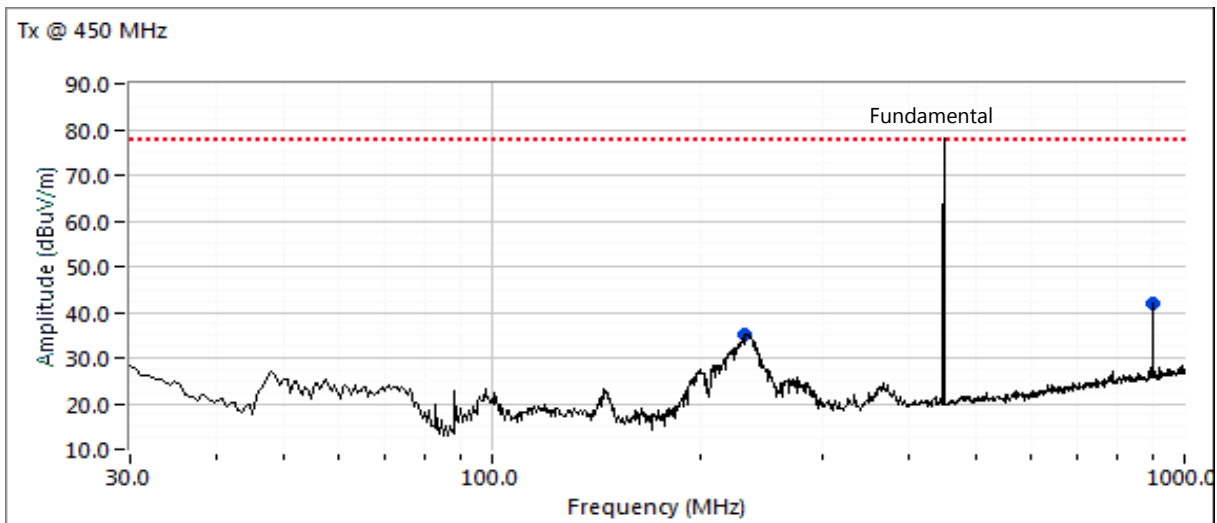




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for center channel, power setting(s) = 10

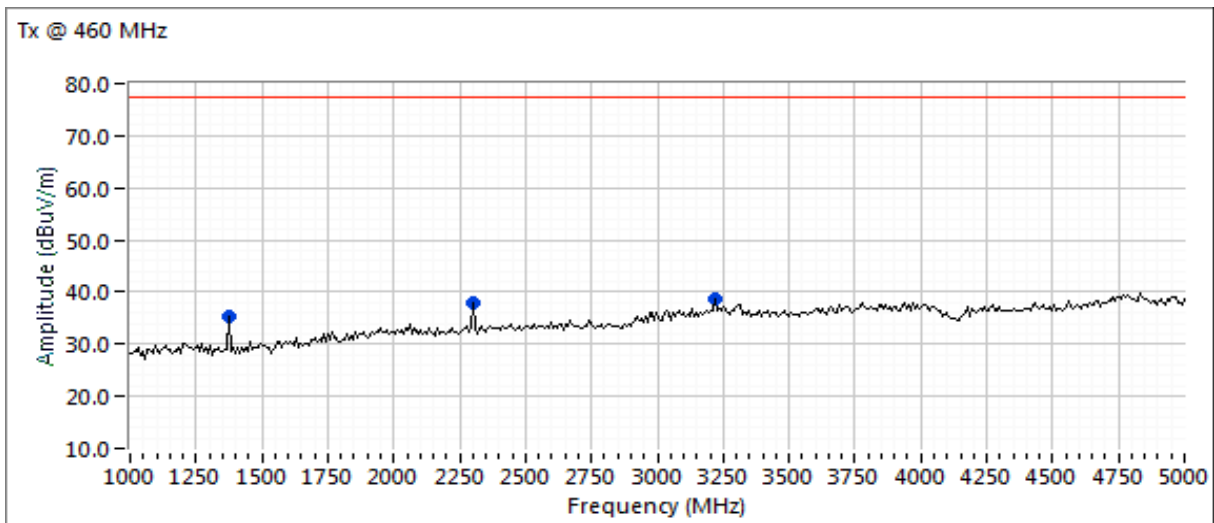
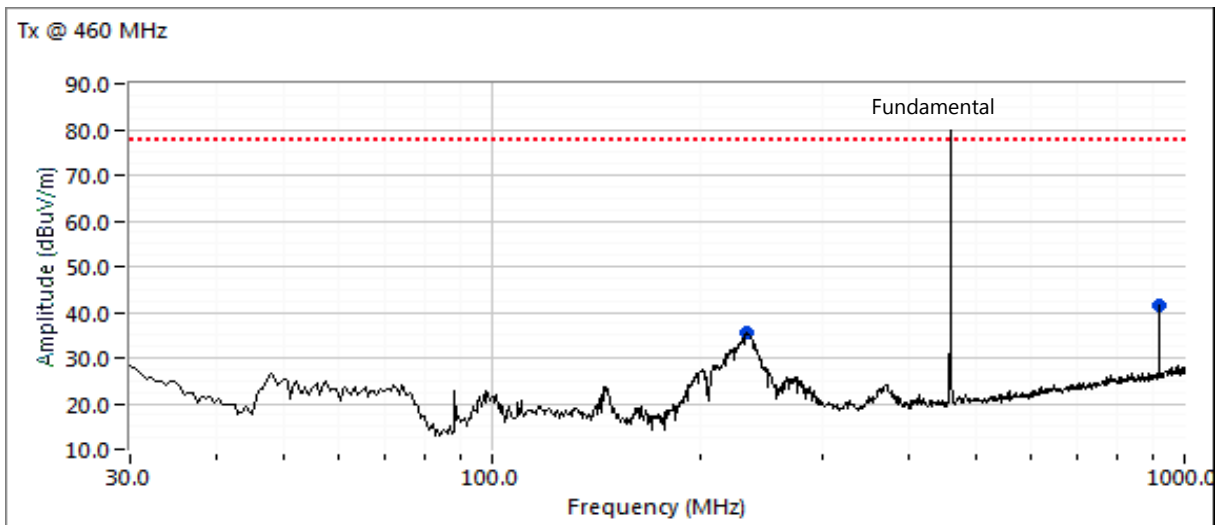




## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

Plots for high channel, power setting(s) = 10

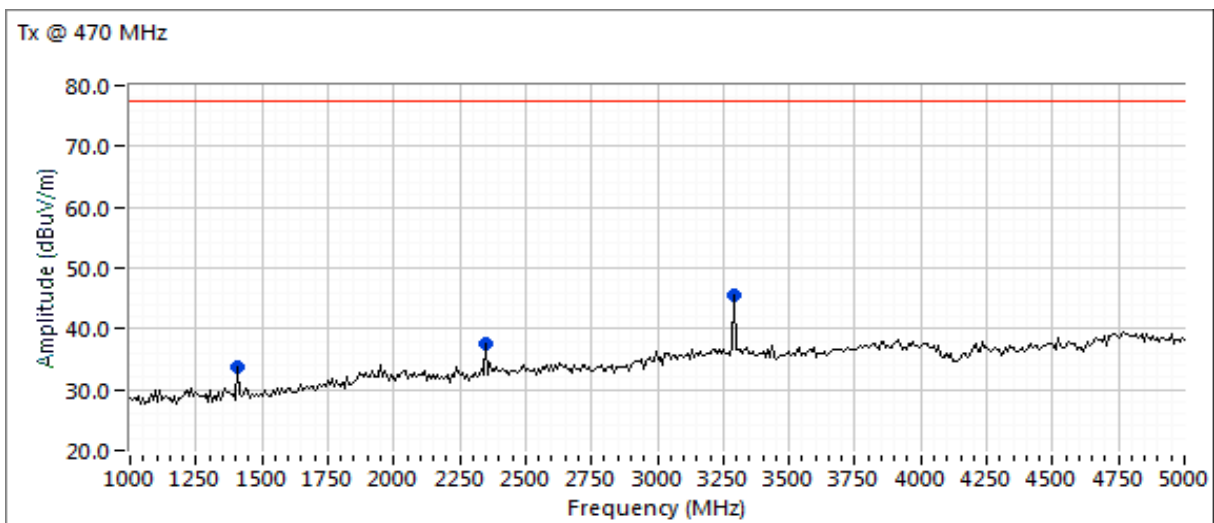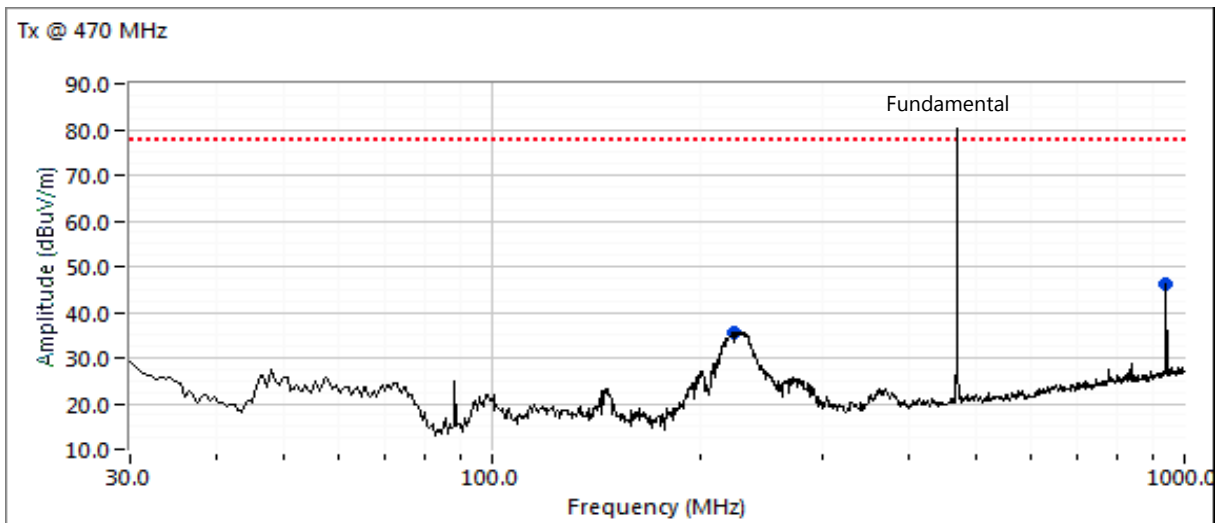



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #5b: - Final Field Strength Measurements and Substitution Measurements

Date of Test: 6/4 & 6/5/2020

Config. Used: 1

Test Engineer: David Bare & Y K Soo

Config Change: None

Test Location: Fremont Chamber #4 & 5

EUT Voltage: 12VDC

### EUT Field Strength

| Frequency | Level  | Pol | FCC Part 90 |        | Detector  | Azimuth | Height | Comments   | Channel |
|-----------|--------|-----|-------------|--------|-----------|---------|--------|------------|---------|
| MHz       | dBμV/m | v/h | Limit       | Margin | Pk/QP/Avg | degrees | meters |            |         |
| 920.009   | 43.1   | H   | 75.3        | -32.2  | PK        | 156     | 1.0    | PK (0.10s) | 460 MHz |
| 233.513   | 36.4   | H   | 75.3        | -38.9  | PK        | 282     | 1.4    | PK (0.10s) | 460 MHz |
| 230.677   | 35.5   | H   | 75.3        | -39.8  | PK        | 298     | 1.4    | PK (0.10s) | 435 MHz |
| 870.002   | 42.4   | H   | 75.3        | -32.9  | PK        | 158     | 1.8    | PK (0.10s) | 435 MHz |
| 2175.040  | 46.1   | V   | 75.3        | -29.2  | PK        | 145     | 2.1    | PK (0.10s) | 435 MHz |
| 900.005   | 43.8   | H   | 75.3        | -31.5  | PK        | 144     | 1.8    | PK (0.10s) | 450 MHz |
| 940.004   | 46.5   | V   | 75.3        | -28.8  | PK        | 74      | 1.1    | PK (0.10s) | 470 MHz |
| 3290.010  | 50.9   | H   | 75.3        | -24.4  | PK        | 340     | 1.0    | PK (0.10s) | 470 MHz |

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | The field strength limit in the tables above was calculated from the erp/eirp limit detailed in the standard using the free space propagation equation: $E = \sqrt{(30PG)/d}$ . This limit is conservative - it does not consider the presence of the ground plane and, for erp limits, the dipole gain (2.2dBi) has not been included. The erp or eirp for all signals with less than <b>20dB</b> of margin relative to this field strength limit is determined using substitution measurements. |
| Note 2: | Measurements are made with the antenna port terminated.                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### Substitution measurements

|         |                                                                                                                               |
|---------|-------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | As none of the emissions were within 20 dB of the calculated field strength limit, no substitution measurements are required. |
|---------|-------------------------------------------------------------------------------------------------------------------------------|



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #6: Transient Frequency Behavior

Date of Test: 6/8/2020

Test Engineer: David Bare

Test Location: Fremotn Chamber #5

Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC


### Run #6a

Carrier Frequency: 450 MHz

Channel Spacing: 12.5 kHz

Modulation: 2-level GFSK

Description: Switch on condition ton, t1, and t2

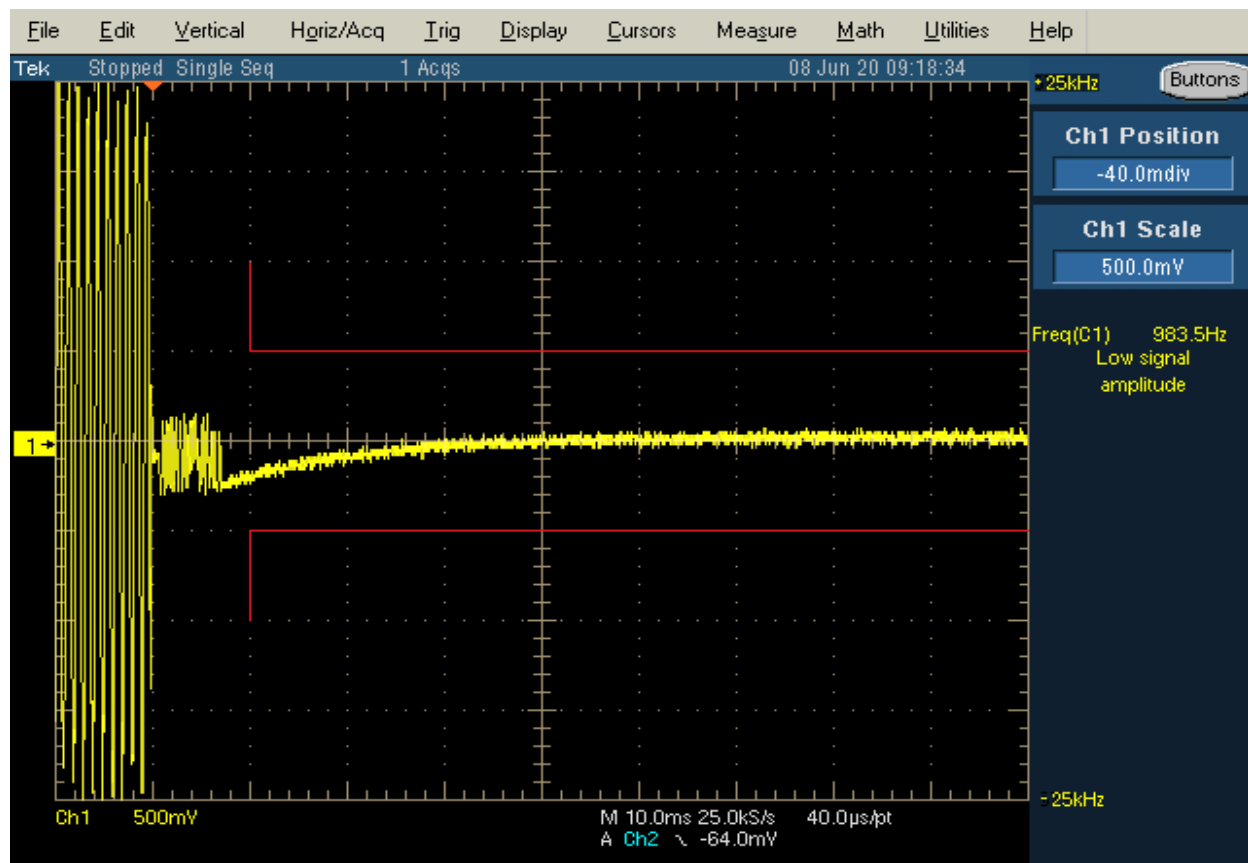



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |


### Run #6b

Carrier Frequency: 450 MHz

Channel Spacing: 12.5 kHz

Modulation: 2-level GFSK

Description: Switch off condition t3 and toff

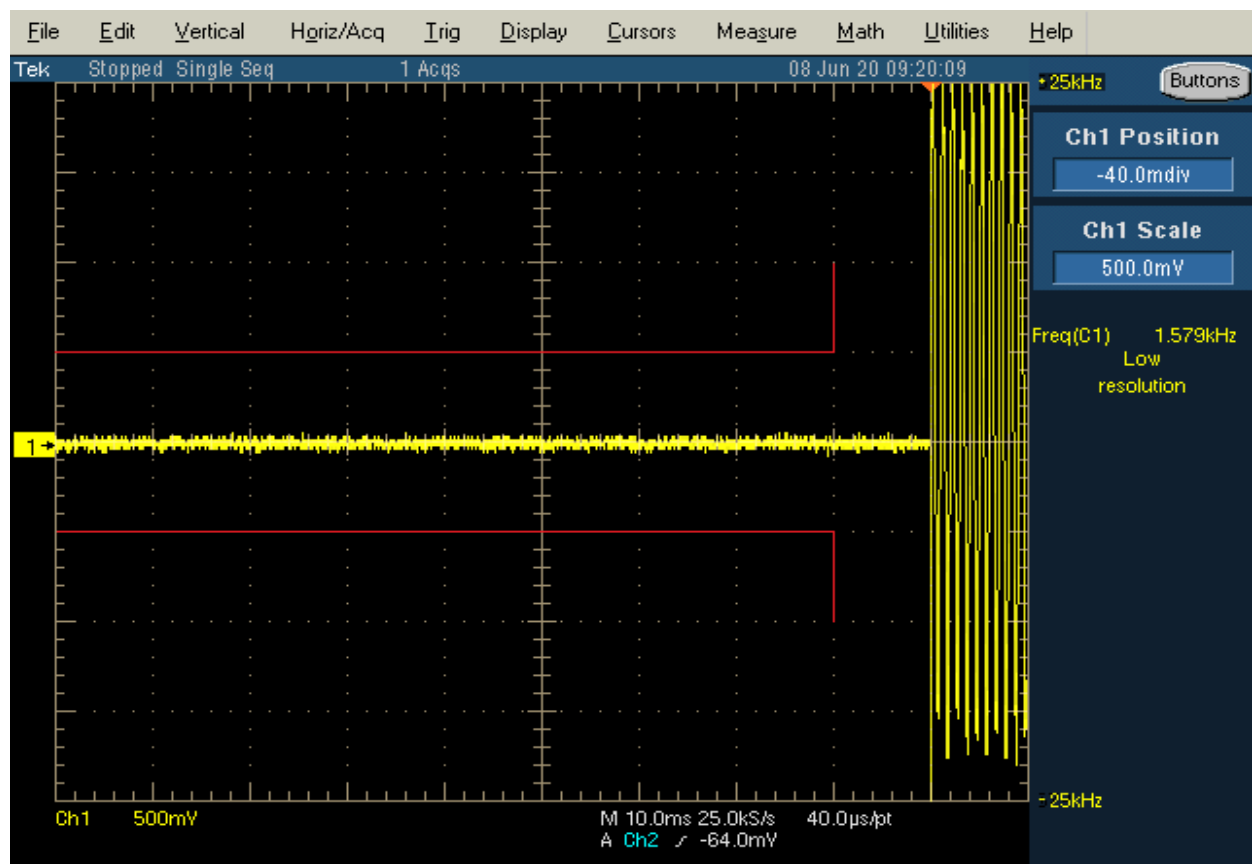



## EMC Test Data

|           |                             |                   |               |
|-----------|-----------------------------|-------------------|---------------|
| Client:   | FreeWave Technologies, Inc. | PR Number:        | PR109246      |
| Model:    | LRS455A                     | T-Log Number:     | TL109246-RANA |
| Contact:  | Michael Vidales             | Project Manager:  | Deepa Shetty  |
| Standard: | FCC Parts 15 & 90, RSS-119  | Project Engineer: | David Bare    |
|           |                             | Class:            | N/A           |

### Run #8: Frequency Stability

Date of Test: 6/8/2020

Test Engineer: David Bare

Test Location: Fremont EMC Lab #3

Config. Used: 1

Config Change: None

EUT Voltage: 12 VDC

Nominal Frequency: 449.9970 MHz

### Frequency Stability Over Temperature

The EUT was soaked at each temperature for a minimum of 30 minutes prior to making the measurements to ensure the EUT and chamber had stabilized at that temperature.

| Temperature | Frequency Measured | Drift |       |
|-------------|--------------------|-------|-------|
| (Celsius)   | (MHz)              | (Hz)  | (ppm) |
| -30         | 449.996923         | -77   | 0.2   |
| -20         | 449.996891         | -109  | 0.2   |
| -10         | 449.996891         | -109  | 0.2   |
| 0           | 449.996827         | -173  | 0.4   |
| 10          | 449.996827         | -173  | 0.4   |
| 20          | 449.997000         | 0     | 0.0   |
| 30          | 449.996731         | -269  | 0.6   |
| 40          | 449.996811         | -189  | 0.4   |
| 50          | 449.996843         | -157  | 0.3   |
| Worst case: |                    | -269  | 0.6   |

### Frequency Stability Over Input Voltage

Nominal Voltage is 12Vdc.

| Voltage     | Frequency Measured | Drift |       |
|-------------|--------------------|-------|-------|
| (DC)        | (MHz)              | (Hz)  | (ppm) |
| 85%         | 449.996859         | -141  | 0.3   |
| 115%        | 449.996859         | -141  | 0.3   |
| Worst case: |                    | -141  | 0.6   |

Battery endpoint is 3.1 Vdc

| Voltage | Frequency Measured | Drift |       |
|---------|--------------------|-------|-------|
| (DC)    | (MHz)              | (Hz)  | (ppm) |
| 3.3     | 449.995953         | -1047 | 2.3   |

Note 1: Maximum drift of fundamental frequency before it shut down at 3.3 Vdc.

***End of Report***

This page is intentionally blank and marks the last page of this test report.