

## User Manual

Product: Chevy SSR

Page:1

Product No.: 27140

Date:2001.05.28


Age:8+

### VEHICLE BATTERY INSTALLATION

1. Turn latch and remove the battery door.
2. Place one 6.0 Volt NiCd battery into battery compartment,replace the battery door and turn the latch.

### CONTROLLER BATTERY INSTALLATION

1. Slide open battery compartment door
2. Insert one 9-Volt battery as illustrated.
3. Replace battery compartment door

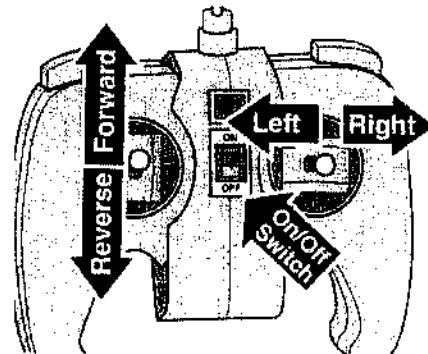

### HOW TO OPERATE

- 1.Power on both the controller and the R/C vehicle.
- 2.The transmitter has a left and right control stick.The left stick moves up and down and has three function;Forward,Reverse and Stop.Forward motion is activated by pushing the left stick up.The reverse mode is activated by pushing the left stick down.By not moving the left stick up or down the vehicle stop.
- 3.While driving forward,you can steer the car using the right stick.To make a left turn,push the stick to the left.To make a right turn,push the stick to the right.

Warning:Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

NOTE:This equipment has been tested and found to comply with the limits for a Class B digital device,pursuant to Part 15 of the FCC Rules.These limits are designed to provide reasonable protection against harmful interference in a residential installation.This equipment generates,uses and can radiate radio frequency energy and,if not installed and used in accordance with the instructions,may cause harmful interference to radio communications.

However,there is no guarantee that interference will not occur in a particular installation.If this equipment does cause harmful interference to radio or television reception,which can be determined by turning the equipment off and on,the user is encourage to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is needed.Consult the dealer or an experience radio/TV technician for help.