



Willow Run (WR) Test Labs, Inc.
7117 Fieldcrest Dr.
Brighton, Michigan 48116 USA
Tel: (734) 252-9785
Fax: (734) 926-9785
e-mail: info@wrtest.com

Testing of

Electromagnetic Emissions

per

USA:	CFR Title 47, Part 15.231	(Emissions)
USA:	CFR Title 47, Part 2.1091;2.1093	(Exposure)
Canada:	ISED RSS-210	(Emissions)
Canada:	ISED RSS-102	(Exposure)

are herein reported for

Lear Corporation

KOBJXF18A

Test Report No.: 20170411-RPTWAC0100054Ar4

Copyright © 2017

Applicant/Provider:



Lear Corporation

21557 Telegraph Road Building 100, Southfield Michigan 48033 USA


Phone: +1 (248) 447-1357, Fax: +1 (248) 447-1683

Contact Person: Jason Summerford; jsummerford@lear.com

Data Recorded by:

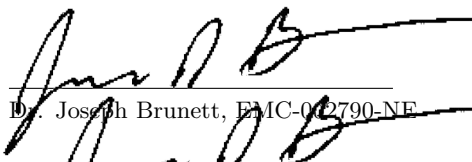
Dr. Joseph Brunett, EMC-002790-NE

Dr. Joseph Brunett, EMC-002790-NE

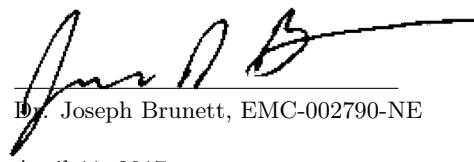Reviewed by:


Dr. Joseph Brunett, EMC-002790-NE

Prepared by:

Date of Issue: April 11, 2017

Results of testing completed on (or before) April 10, 2017 are as follows.

Emissions: The transmitter intentional emissions **COMPLY** with the regulatory limit(s) by no less than 7.2 dB. Transmit chain spurious or harmonic emissions **COMPLY** by no less than 8.0 dB. Unintentional spurious emissions from digital circuitry **COMPLY** with radiated emission limit(s) by at least 20 dB.

Revision History

Rev. No.	Date	Details	Revised By
r0	April 11, 2017	Initial Release.	J. Brunett
r1	April 15, 2017	Include LF act. UHF mode details.	J. Brunett
r2	April 25, 2017	Minor corrections and GPS band plots.	J. Brunett
r3	June 16, 2017	Split report + updates per regulator.	J. Brunett

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	5
1.1 Laboratory Authorization	5
1.2 Report Retention	5
1.3 Subcontracted Testing	5
1.4 Limitation of Results	5
1.5 Copyright	5
1.6 Endorsements	5
1.7 Test Location	6
1.8 Traceability and Equipment Used	6
2 Test Specifications and Procedures	7
2.1 Test Specification and General Procedures	7
3 Configuration and Identification of the Equipment Under Test	8
3.1 Description and Declarations	8
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	9
3.1.4 Test Samples	9
3.1.5 Functional Exerciser	9
3.1.6 Modifications Made	9
3.1.7 Production Intent	9
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Conducted Emissions Test Setup and Procedures	12
4.1.3 Power Supply Variation	12
4.1.4 Thermal Variation	12
4.2 Intentional Emissions	13
4.2.1 Fundamental Emission Pulsed Operation	13
4.2.2 Fundamental Emission Bandwidth	16
4.2.3 Fundamental Emission Field Strength	17
4.2.4 Exposure and Potential Health Hazard	18
4.3 Unintentional Emissions	19
4.3.1 Transmit Chain Spurious Emissions	19
4.3.2 Radiated Digital Spurious	20

5 Measurement Uncertainty

21

List of Tables

1	Test Site List.	6
2	Equipment List.	6
3	EUT Declarations.	8
4	Fundamental Emission Pulsed Operation.	13
5	Fundamental Emission Bandwidth.	16
6	Fundamental Emission Field Strength.	17
7	Electromagnetic Field Exposure.	18
8	Transmit Chain Spurious Emissions.	19
9	Measurement Uncertainty.	21

List of Figures

1	Photos of EUT.	8
2	EUT Test Configuration Diagram.	9
3	Radiated Emissions Diagram of the EUT.	10
4	Radiated Emissions Test Setup Photograph(s).	11
5	Fundamental Emission Pulsed Operation.	14
5	Fundamental Emission Pulsed Operation.	15
6	Fundamental Emission Bandwidth.	16

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with ISED Canada, Ottawa, ON (File Ref. No: IC8719A-1 and IC22227-1).

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until April 2027.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.5 Copyright

This report shall not be reproduced, except in full, without the written approval of Willow Run (WR) Test Labs, Inc..

1.6 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.7 Test Location

The EUT was fully tested by **Willow Run (WR) Test Labs, Inc.**, 7117 Fieldcrest Dr., Brighton, Michigan 48116 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	8501 Beck Rd. Bldg 2227, Belleville MI 48111	OATSA

1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Willow Run (WR) Test Labs, Inc. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Last Cal By / Date Due
Spectrum Analyzer	Rohde & Schwarz / FSV30	101660	RSFSV30001	RS / May-2018
Spectrum Analyzer	Rohde & Schwarz / FSV4	101222	RSFSV4001	RS / Mar-2018
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Lib. Labs / Aug-2017
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Lib. Labs / Aug-2017
Quad Ridge Horn	ETS Lind. / 3164-04	00066988	HRNQR316401	Lib. Labs / Aug-2017
Quad Ridge Horn	Singer / A6100	C35200	HQR2TO18S01	Lib. Labs / Aug-2017
K-Band Horn	JEF / NRL Std.	001	HRNK01	WRTL / Jul-2017
Ka-Band Horn	JEF / NRL Std.	001	HRNKA001	WRTL / Jul-2017

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The ultimate goal of Lear Corporation is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Lear Corporation KOB-JXF18A for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.231
Canada	ISED Canada	ISED RSS-210

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2013 (USA)	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
CFR 47 2.1091/1093	"447498 D01 General RF Exposure Guidance v06: RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices"
ISED Canada	"The Measurement of Occupied Bandwidth"
ICES-003; Issue 6 (2016)	"Information Technology Equipment (ITE) Limits and methods of measurement"
ISED Canada RSS-102	"Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)"
ISED Canada SPR-002	"Supplementary Procedure for Assessing Compliance with RSS-102 Nerve Stimulation Exposure Limits."

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is an automotive UHF Transmitter. The EUT is approximately 5 x 3 x 1 cm in dimension, and is depicted in Figure 1. It is powered by 3 VDC Lithium coin-cell battery. In use, this device is hand held. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations			
Equipment Type:	UHF Transmitter	Country of Origin:	Spain
Nominal Supply:	3 VDC	Oper. Temp Range:	-40°C to +85°C
Frequency Range:	315	Antenna Dimension:	3 cm
Antenna Type:	Integral	Antenna Gain:	PCB Trace (UHF)
Number of Channels:	1(UHF)	Channel Spacing:	None
Alignment Range:	Not Declared	Type of Modulation:	ASK+FSK(UHF)
United States			
FCC ID Number:	KOBJXF18A	Classification:	DSC, UWB
Canada			
IC Number:	3521A-JXF18A	Classification:	Remote Control Device, UWB Device

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

3.1.2 Modes of Operation

There are two principle modes of operation for this device. The first mode (UHF-MODE) is that of a manually actuated 315 MHz UHF transmitter used for locking, unlocking, and panic transmissions to the vehicle from a large distance. After manual button press this mode steps through three sequential transmission frequencies, 315.000 MHz, 314.682 MHz, and 315.318 MHz. This mode can also be activated through detection of an encoded LF transmission from the vehicle RFA module, and in that case the EUT only transmits a short two-frame ASK response on one of the frequencies above.

The second principle mode is that of a UWB transceiver (UWB-MODE) which is addressed in a second test report (WRTL Report No.: 20170616-RPTWAC0100054B).

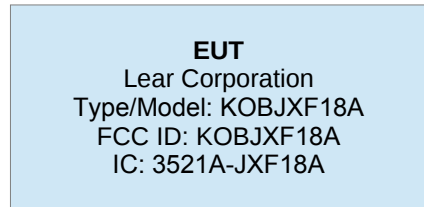


Figure 2: EUT Test Configuration Diagram.

3.1.3 Variants

There is only a single variant of the EUT, as tested.

3.1.4 Test Samples

Four samples of the EUT were provided for testing. One normal operating sample paired with a corresponding SAT UWB transceiver and RFA UHF receiver for encoding and timing tests, one software modified sample capable of transmitting UWB frames repeatedly at a higher than normal rate (once every 10 ms - see associated UWB test report for test data), a third sample with custom UHF CW and continuously modulated UHF transmitter modes, and a fourth sample apart for photographs.

3.1.5 Functional Exerciser

EUT functionality was verified by observation of transmitted signal.

3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

None.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our shielded anechoic chamber or GTEM test cell. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded.

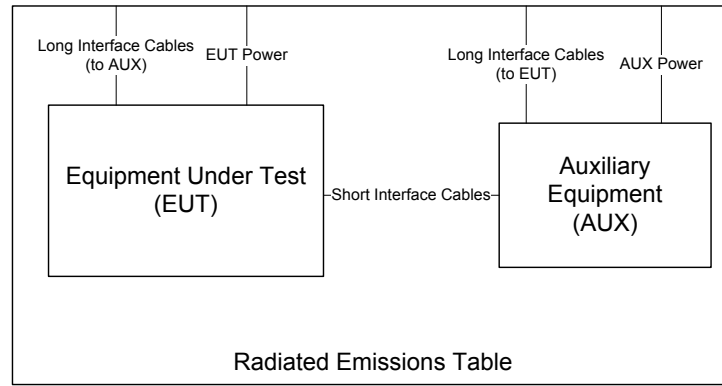


Figure 3: Radiated Emissions Diagram of the EUT.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used. It is placed at a 1 meter receive height. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain horn or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of H-4 absorber placed over the ground screen covering the OATS ground screen. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

When microwave measurements are made at a range different than the regulatory distance or made at close-range to improve receiver sensitivity, the reading is corrected back to the regulatory distance. This is done using a 20 dB/decade field behavior as dictated by the test procedures. When measurements are made in the near-field, the near-field/far-field boundary (N/F) is reported. It is computed as

$$N/F = 2D^2/\lambda$$

where D is the maximum dimension of the transmitter or receive antenna, and λ is the wavelength at the measurement frequency. Typically for high frequency measurements the receive antenna is connected to test receiver / analyzer through an external mixer. In this case, cable loss, IF amplifier gain, and mixer conversion losses are corrected for in the data table, or directly in the spectrum analyzer.



Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures

Battery Power Conducted Spurious The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than $\pm 10\%$ of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.1.4 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report. The provider has declared that the EUT is designed for operation over the temperature range -40°C to $+85^{\circ}\text{C}$. Before any temperature measurements are made, the equipment is allowed to reach a thermal balance in the test chamber, temperature and humidity are recorded, and thermal balance is verified via a thermocouple-based probe.

4.2 Intentional Emissions

4.2.1 Fundamental Emission Pulsed Operation

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Duty cycle is measured using the maximum possible receiver IFBW for the purpose of computing RF exposure compliance and documenting the encoding employed by the EUT. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 4: Fundamental Emission Pulsed Operation.

Frequency Range f > 1 000 MHz		Det Pk	IFBW 28 MHz	VBW 28 MHz				Test Date: 23-Mar-17		
								Test Engineer: Joseph Brunett		
								EUT Lear PEPS UWB Fob		
								Meas. Distance: 60 cm		
								EUT Mode: See Table		
Pulsed Operation / Duty Cycle										
Transmit Mode	Symbol Rate (Msym/s)	Data Rate** (Mbps)	Voltage (V)	Oper. Freq (MHz)	Min. Cycle Time (ms)	On-Time (ms)	Frame Encoding	Worst Case Duty Cycle (%)	Field Strength Duty Correction** (dB)	Exposure Duty Correction*** (dB)
Button Act (ASK FRAME) subfigure (a)	-	-	3.0	315	100.7	25.3	Only a single ASK or FSK frame may occur within any given 100 ms window upon manual activation by button press. Each ASK frame consists of 25.3 ms of OOK data with a 50% duty. Each FSK frame is 21.7 ms in duration.	25.1	12.0	-
Button Act (FSK FRAME) subfigure (a)			3.0	315	100.7	21.7		21.5	13.3	-
LF Activated ASK Frames subfigure (b)	-	-	3.0	315	100	2.9	When manually activated by encoded LF interrogation, two ASK frames on a single frequency can occur in a 100 ms window. Each ASK frame consists of 2.86 ms of Manchester encoded data with a 0.0245/0.0480 duty.	2.9	30.7	-

** E-field duty cycle correction (due to burst-modulated carrier) computed as $20 \cdot \log(\text{On-Time} / \text{Min Cycle-Time})$. This Duty applied for UHF mode emissions only.

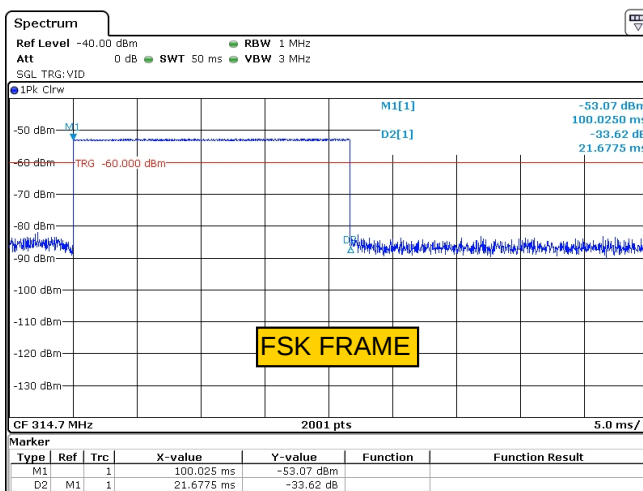
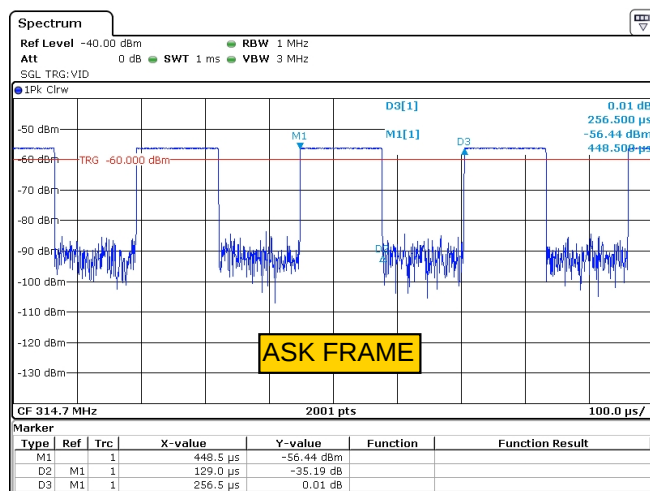
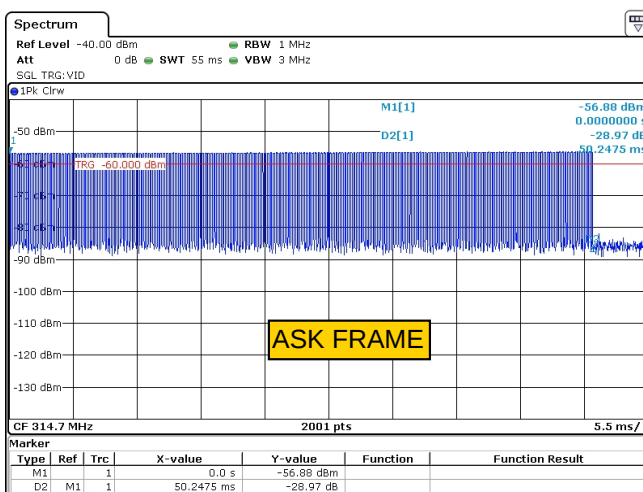
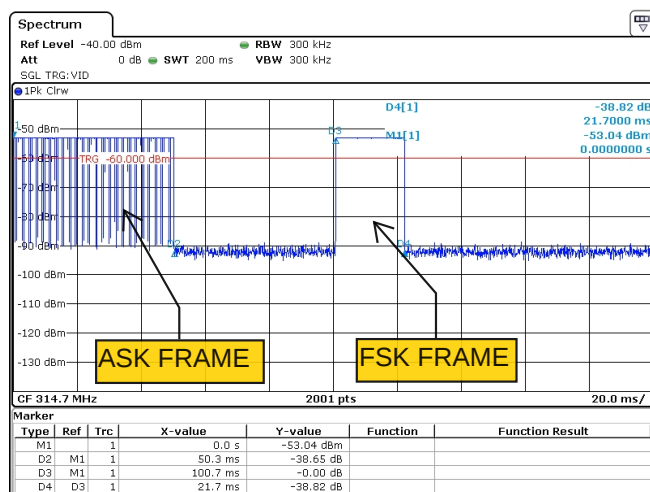
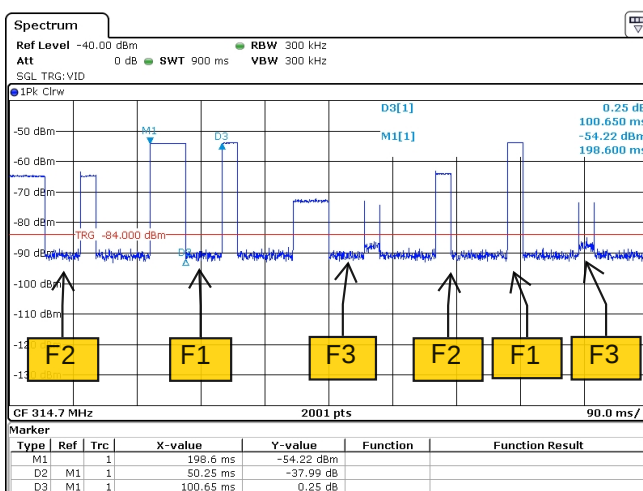
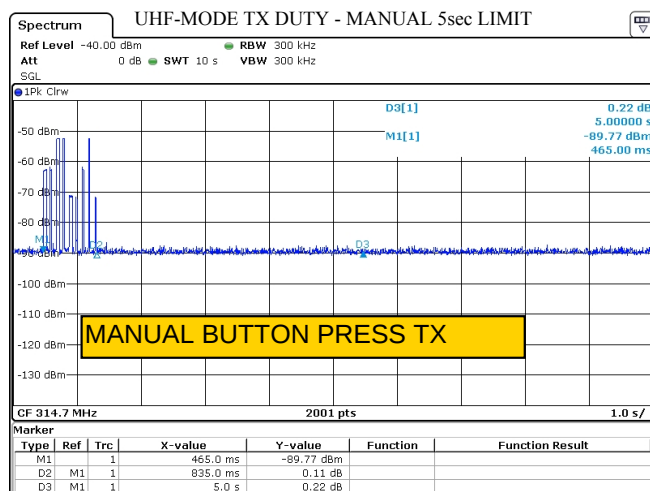


Figure 5(a): Fundamental Emission Pulsed Operation.

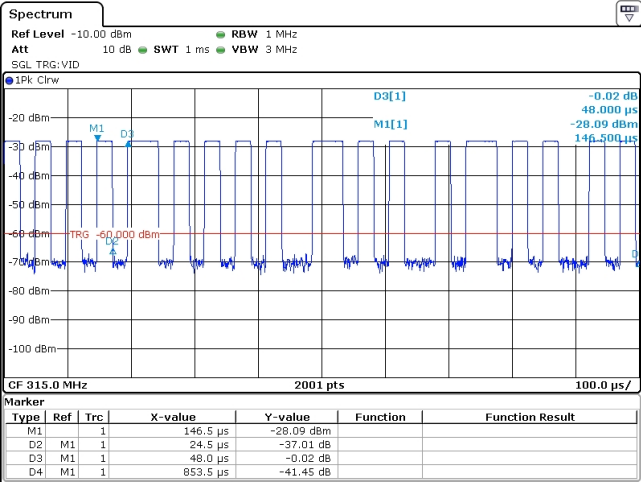
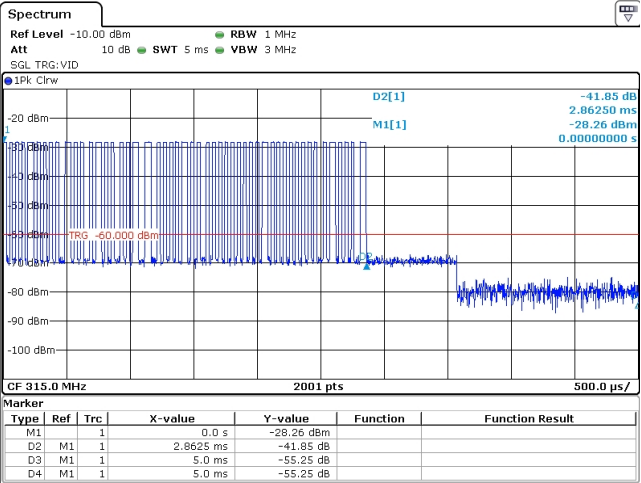
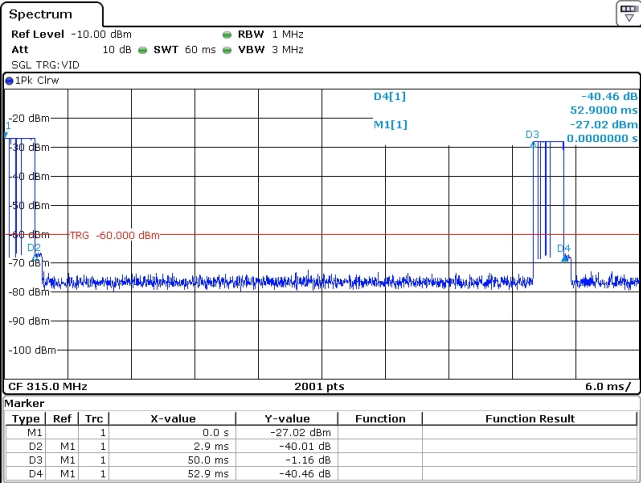
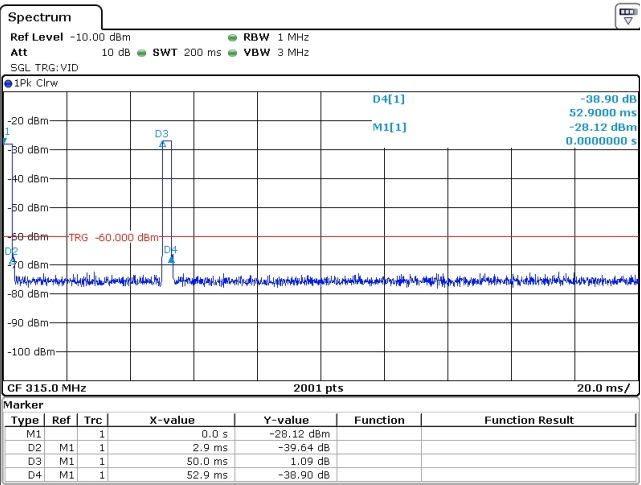
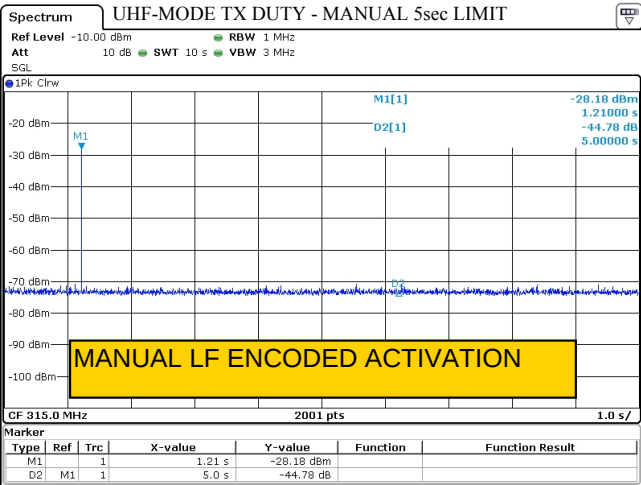


Figure 5(b): Fundamental Emission Pulsed Operation.

4.2.2 Fundamental Emission Bandwidth

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Emission bandwidth (EBW) of the EUT is measured following the measurement procedures in ANSI C63.10:2013. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 5. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 5: Fundamental Emission Bandwidth.

Frequency Range	Det	IFBW	VBW	Span	Test Date:	23-Mar-17
f < 1 000 MHz	Pk	30 kHz	100 kHz	3 MHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk	1 MHz	3 MHz	1 GHz	EUT	Lear PEPS UWB Fob
					Meas. Distance:	60 cm

UHF Occupied Bandwidth									
Transmit Mode	Symbol Rate (Msym/s)	Data Rate (Mbps)	Voltage (V)	Oper. Freq (MHz)	99% OBW (MHz)	20 dB EBW (MHz)	EBW Limit (MHz)		Pass/Fail
Manual Button Press (ASK+FSK)	-	-	3.0	315.0	0.744	0.7751	0.7875	EUT employs three frequencies in sequential order.	Pass
LF Activated (ASK Only)	-	-	3.0	315.0	0.423	0.1544	0.7875	EUT employs only a single frequency.	Pass

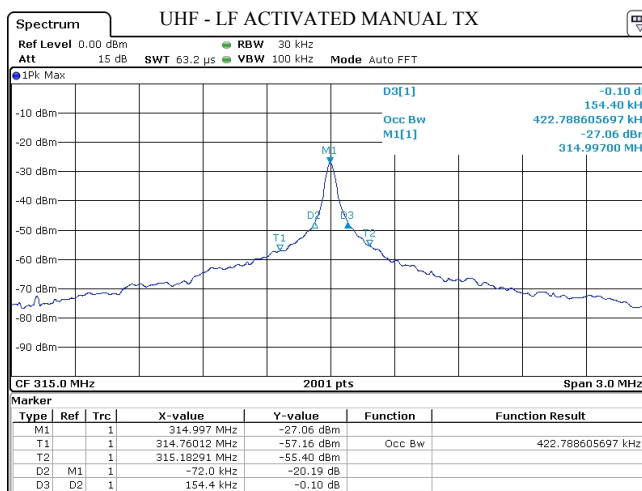
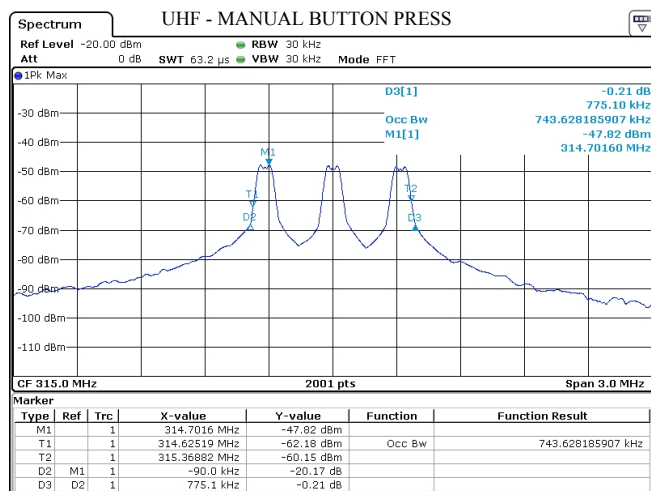


Figure 6: Fundamental Emission Bandwidth.

4.2.3 Fundamental Emission Field Strength

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. The fundamental emission is measured at the regulatory distance on our OATS. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 6.

Table 6: Fundamental Emission Field Strength.

																															EUT Modes:		a1	UHF CW mode on Center Channel																											
																																a2	UHF Normal Operating Mode – Manual Activation by button press.																												
																																a3	UWB continuously modulated at higher than normal periodic rate, max frame width.																												
																																a4	UWB Normal Operating Mode – Actuated by detection of LF interrogation.																												
																															Test Date:		03/22/17																												
																															Test Engineer:		Joseph Brunett																												
R0	Frequency		Site				EUT			Test Antenna			Cable	Receiver				Field Strength @ DR				EUT EIRP				Details																																			
	Start	Stop	Temp.	MR	DR	N/F	CF	Mode	Volt.	Dim	Pol.	Dim.	Ka	Kg	Rx Power	Bandwidth	Meas.		Avg		Meas.		Avg		Meas.	Pk	Limit	Avg	Pass																																
	MHz	MHz	(C)		m		dB	see above	(V)	cm	H/V	cm	dB/m	dB	dBuV/m	RBW	VBW	Meas.	Limit	Meas.	Limit	Meas.	Limit	Meas.	Limit	Meas.	Limit	Meas.	Limit	Fail																															
																															dB																														
R1	SETUP:		OATSA				LEAR PEPS FOB			LOGEMCO01					RSFSV30001		NOTES:																																												
R2	- METAL KEY INSERTED INTO CHASSIS																																																												
R3	315.0	315.0	-2.0	3.0	3.0		0.0	a1	3.0	4.0	H	100.0	14.1	33.0	-7.7		0.12	0.30	80.4	95.6	95.6	68.4	75.6	75.6							7.3																														
R4	315.0	315.0	-2.0	3.0	3.0		0.0	a1	3.0	4.0	V	100.0	14.1	33.0	-12.4		0.12	0.30	75.7	95.6	95.6	63.7	75.6	75.6							12.0																														
R5	- METAL KEY REMOVED FROM CHASSIS																																																												
R6	315.0	315.0	-2.0	3.0	3.0		0.0	a1	3.0	4.0	H	100.0	14.1	33.0	-8.1		0.12	0.30	80.0	95.6	95.6	68.0	75.6	75.6							7.7																														
R7	315.0	315.0	-2.0	3.0	3.0		0.0	a1	3.0	4.0	V	100.0	14.1	33.0	-12.4		0.12	0.30	75.7	95.6	95.6	63.7	75.6	75.6							12.0																														
R8	- WORST CASE EMISSION VS SUPPLY VOLTAGE																																																												
R9	315.0	315.0	21.0	3.0	3.0		0.0	a1	2.7	4.0	H	100.0	14.1	33.0	-7.7		0.12	0.30	80.4	95.6	95.6	68.4	75.6	75.6							7.3																														
R10	315.0	315.0	21.0	3.0	3.0		0.0	a1	3.0	4.0	H	100.0	14.1	33.0	-7.7		0.12	0.30	80.4	95.6	95.6	68.4	75.6	75.6							7.3																														
R11	315.0	315.0	21.0	3.0	3.0		0.0	a1	3.3	4.0	H	100.0	14.1	33.0	-7.6		0.12	0.30	80.5	95.6	95.6	68.5	75.6	75.6							7.2																														
R12																																																													
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31																														
(ROW)	(COLUMN) NOTE:																																																												
R0	C4		MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																																																										
R0	C5		DR is the regulatory Desired Range measurement distance.																																																										
R0	C6		N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.																																																										
R0	C7		CF is computed using a 20 dB/decade Decay Rate.																																																										
R0	C15		When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.																																																										
R3-11	C22		Avg computed from Peak measured data via Field Strength Duty Cycle.																																																										

4.2.4 Exposure and Potential Health Hazard

To demonstrate compliance with regulations that place limitations on human electromagnetic field exposure for both the general public and for workers, we compute EIRP from measured emission data. These levels are compared with limits placed by the directives and recommendations detailed in Section 2.1. Table 7 details the results of these computations.

Table 7: Electromagnetic Field Exposure.

USA REF: 1.1310, 2.1091/1093, 447498 D01 General RF Exposure Guidance v06
 IC REF: RSS-102 Issue 5, Safety Code 6
 Min. Sep. Distance: <5 mm (Portable)

Test Date: 22-Mar-17
 Test Engineer: Joseph Brunett
 EUT: LEAR SAT 4
 EUT Mode: Worst Case
 Meas. Distance: See Fund. Power Table

Mode	Frequency Band		E-Field @ 3m (Avg) dBuV/m	EIRP (Avg) mW	H-Field @ MSP (Avg) dBuA/m	Canada ISED RSS-102 MPE		MPE Ratio	USA FCC 1.1310 MPE		
	Start MHz	Stop MHz				SC6 Limit @ MSP dBuV/m	SC6 Limit @ MSP dBuA/m		SAR Threshold	SAR Threshold Limit	Worst Case MPE Ratio
Other											
Mode	Frequency Band		Pk EIRP + Duty (Avg/RMS) dBm	E-Field @20cm (RMS) dBuV/m	Pwr Density @20cm (RMS)* mW/cm2	EIRP + Duty (RMS) mW	Minimum 1g / 10g SAR Threshold Limit	MPE Ratio	SAR Threshold	Minimum 1g / 10g SAR Threshold Limit	MPE Ratio
UHF	314.7	315.3	-26.7	92.0	0.00000	0.00212	69.1			3	
UWB	3574.40	4358.80	-20.2	98.6	0.00000	0.00966	1.5	0.00644	0.00039	3	0.00013
IF SUM OF ALL MPE RATIOS IS > 1, THEN THE EUT MUST UNDERGO SAR TESTING PER FCC AND ISED (IC) REGULATIONS.								MPE RATIO Total (<1):	.006	MPE RATIO Total (<1):	.000
* EIRP (mW) = S (mW/cm ²) x 4 x PI x 20cm ²								REQUIRES SAR TESTING	No	REQUIRES SAR TESTING	No

4.3 Unintentional Emissions

4.3.1 Transmit Chain Spurious Emissions

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Spurious radiated emissions measurements are made following the measurement procedures in ANSI C63.10. The test equipment employed includes RSFSV30001, BICEMCO01, LOGEMCO01, HRNQR316401.

Measurement Results The details and results of testing the EUT are summarized in Table 8.

Table 8: Transmit Chain Spurious Emissions.

EUT Modes: a1 UHF CW mode on Center Channel a2 UHF Normal Operating Mode – Manual Activation by button press. a3 UWB continuously modulated at higher than normal periodic rate, max frame width. a4 UWB Normal Operating Mode – Actuated by detection of LF interrogation.																																				
Test Date: 04/05/17 Test Engineer: Joseph Brunett																																				
R0	Frequency		Temp.	MR	Site		N/F	CF	EUT			Test Antenna			Cable	Receiver				Field Strength @ DR				EUT EIRP				Details								
	Start	Stop			DR	Mode see table			Volt.	Dim	Pol.	Dim.	Ka	Rx Power		Bandwidth	Meas.	Pk		Meas.	Avg		Meas.	Pk		Meas.	Limit		Limit							
	MHz	MHz	m	(V)	cm	H/V	cm	dB/m	dB	Pk	Avg	RBW	VBW	USA	CAN	USA		Limit	USA		Limit	USA		Limit	Pass											
				(C)		dB										dBm	MHz														Fail	dB				
R1	SETUP:			OATSA				LEAR PEPS FOB				HRNQR316401				RSFSV30001				NOTES: Max all orientations of EUT, w & w/o Key																
R2	630.0	630.0	14	3.0	3.0		0.0	a1	3.0	4.0	H	100.0	19.5	29.7	-61.7		0.12	0.30	55.5	75.6	75.6	43.5	55.6	55.6									12.1			
R3	630.0	630.0	14	3.0	3.0		0.0	a1	3.0	4.0	V	100.0	19.5	29.7	-68.2		0.12	0.30	49.0	75.6	75.6	37.0	55.6	55.6									18.6			
R4	945.0	945.0	14	3.0	3.0		0.0	a1	3.0	4.0	H	100.0	23.2	26.7	-81.5		0.12	0.30	29.0	75.6	75.6	17.0	55.6	55.6									38.6			
R5	945.0	945.0	14	3.0	3.0		0.0	a1	3.0	4.0	V	100.0	23.2	26.7	-88.1		0.12	0.30	22.4	75.6	75.6	10.4	55.6	55.6									45.2			
R6	SETUP:			OATSA				LEAR PEPS FOB				HRNQR316401				RSFSV30001				NOTES: Max all orientations of EUT and both Test Antenna Polarizations, w & w/o Key																
R7	1260.0	1260.0	14	3.0	3.0	0.4	0.0	a1	3.0	4.0	H/V	22.0	25.0	-0.2	-80.3		1.00	3.00	51.9	75.6	74.0	39.9	55.6	54.0									14.1			
R8	1575.0	1575.0	14	3.0	3.0	0.5	0.0	a1	3.0	4.0	H/V	22.0	27.7	-0.2	-85.9		1.00	3.00	49.0	75.6	74.0	37.0	55.6	54.0									17.0			
R9	1890.0	1890.0	14	3.0	3.0	0.6	0.0	a1	3.0	4.0	H/V	22.0	29.4	-0.2	-85.4		1.00	3.00	51.2	75.6	75.6	39.2	55.6	55.6									16.4			
R10	2205.0	2205.0	14	3.0	3.0	0.7	0.0	a1	3.0	4.0	H/V	22.0	30.9	-0.3	-85.4		1.00	3.00	52.7	75.6	74.0	40.7	55.6	54.0									13.3			
R11	2520.0	2520.0	14	3.0	3.0	0.8	0.0	a1	3.0	4.0	H/V	22.0	33.1	-0.3	-85.7		1.00	3.00	54.7	75.6	75.6	42.7	55.6	55.6									12.9			
R12	2835.0	2835.0	14	3.0	3.0	0.9	0.0	a1	3.0	4.0	H/V	22.0	35.6	-0.3	-84.87		1.00	3.00	58.0	75.6	74.0	46.0	55.6	54.0									8.0			
R13	3150.0	3150.0	14	3.0	3.0	1.0	0.0	a1	3.0	4.0	H/V	22.0	36.7	-0.3	-84.7		1.00	3.00	59.3	75.6	75.6	47.3	55.6	55.6									8.3			
R14																																				
R15																																				
R16																																				
R17																																				
R18																																				
R19																																				
R20																																				
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	C30	C31					

(ROW) (COLUMN) NOTE:

R0 C4 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.

R0 C5 DR is the regulatory Desired Range measurement distance.

R0 C6 N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.

R0 C7 CF is computed using a 20 dB/decade Decay Rate.

R0 C15 When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr (C15/16) is not reported.

4.3.2 Radiated Digital Spurious

The results for the measurement of digital spurious emissions are not reported herein as all digital emissions were greater than 20 dB below the regulatory limit. Radiation from digital components was measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

5 Measurement Uncertainty

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 9: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.8 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 2.7 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 2.5 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$
DC and Low Frequency Voltages	$\pm 2\%$
Temperature	$\pm 0.5^\circ \text{C}$
Humidity	$\pm 5\%$

[†]Ref: CISPR 16-4-2:2011+A1:2014