



Inter**Lab**<sup>®</sup>

# EMC Measurement/Technical Report on Bluetooth® Transceiver ASY90177-3

**Report Reference:** 4\_SMART\_IRV\_0604\_ERF\_FCCa

## **Test Laboratory (Headquarter):**

7 Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



TTI-P-G 178/99

### Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG, Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
<http://www.7Layers.com>

Aufsichtsratsvorsitzende  
Chairman of the Supervisory Board:  
Dr. Sabine Grobecker  
Vorstand - Board of Directors:  
Dr. Hans-Jürgen Meckelburg

Registergericht - registered in:  
Düsseldorf, HRB 44096  
UST-IdNr VAT Nr:  
DE 203159652

Interlab is a registered trademark of 7 layers AG



## Table of Contents

<b>0. Summary</b>	<b>3</b>
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
<b>1. Administrative Data</b>	<b>6</b>
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
<b>2. Product Labeling</b>	<b>7</b>
2.1 FCC ID Label	7
2.2 Location of Label on the EUT	7
<b>3. Testobject Data</b>	<b>8</b>
3.1 General EUT Description	8
3.2 EUT Main Components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	9
3.5 Operating Modes	10
<b>4. Test Results</b>	<b>11</b>
- Conducted Emissions	
4.1 Occupied Bandwidth	11
4.2 Peak Power Output	14
4.3 Spurious RF Conducted Emissions	17
4.4 Spurious RF Radiated Emissions	19
4.5 Dwell Time	23
4.6 Power Density	25
4.7 Channel Separation	27
<b>5. Testequipment</b>	<b>28</b>
<b>6. Foto Report</b>	<b>31</b>
<b>7. Setup Drawings</b>	<b>34</b>
<b>8. Annex</b>	<b>36</b>
measurement plots	25 Pages



## 0 Summary

### 0.1 Technical Report Summary

#### Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum)

#### Applicable FCC Rules:

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 (10-1-98 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification Sections

Part 15, Subpart C - Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz  
and 5725-5850 MHz

#### Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

#### Summary Test Results:

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 Measurement Summary

<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (a) (1) (ii)</b>	
Occupied Bandwidth			
	The measurement was performed according to ANSI C63.4		1992
OP-Mode	Setup	Port	Final Result
op-mode 1	4Ts80f01	temp. antenna connector	passed
op-mode 2	4Ts80f01	temp. antenna connector	passed
op-mode 3	4Ts80f01	temp. antenna connector	passed
op-mode 4	4Ts80f01	temp. antenna connector	passed
op-mode 5	4Ts80f01	temp. antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (b) (1)</b>	
Peak Power Output			
	The measurement was performed according to FCC §15.31		10-1-1998
OP-Mode	Setup	Port	Final Result
op-mode 1	4Ts80f01	temp. antenna connector	passed
op-mode 2	4Ts80f01	temp. antenna connector	passed
op-mode 3	4Ts80f01	temp. antenna connector	passed
op-mode 4	4Ts80f01	temp. antenna connector	passed
op-mode 5	4Ts80f01	temp. antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (c)</b>	
Spurious RF Conducted Emissions			
	The measurement was performed according to FCC §15.31		10-1-1998
OP-Mode	Setup	Port	Final Result
op-mode 1	4Ts80f01	temp. antenna connector	passed
op-mode 2	4Ts80f01	temp. antenna connector	passed
op-mode 3	4Ts80f01	temp. antenna connector	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247 (c), §15.35 (b), § 15.209</b>	
Spurious Radiated Emissions			
	The measurement was performed according to ANSI C63.4		1992
OP-Mode	Setup	Port	Final Result
op-mode 1	4Ts80i01	Enclosure	passed
op-mode 2	4Ts80i01	Enclosure	passed
op-mode 3	4Ts80i01	Enclosure	passed
<b>FCC Part 15, Subpart C</b>		<b>§ 15.247(f)</b>	
Dwell Time			
	The measurement was performed according to FCC §15.31		10-1-1998
OP-Mode	Setup	Port	Final Result
op-mode 4	4Ts80f01	temp. antenna connector	passed
op-mode 5	4Ts80f01	temp. antenna connector	passed

**FCC Part 15, Subpart C****§ 15.247 (d)****Power Density**

The measurement was performed according to FCC §15.31 10-1-1998

OP-Mode	Setup	Port	Final Result
op-mode 4	4Ts80f01	temp. antenna connector	passed
op-mode 5	4Ts80f01	temp. antenna connector	passed

**FCC Part 15, Subpart C****§ 15.247 (a) (1)****Channel Separation**

The measurement was performed according to FCC §15.31 10-1-1998

OP-Mode	Setup	Port	Final Result
op-mode 6	4Ts80f01	temp. antenna connector	passed

Responsible for

Accreditation Scope: \_\_\_\_\_

Responsible

for Test Report: \_\_\_\_\_



## 1. Administrative Data

### 1.1 Testing Laboratory

Company Name: 7 Layers AG  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat DAR-Registration no. TTI-P-G 178/99

Responsible for Accreditation Scope: Dipl.-Ing Bernhard Retka  
Dipl.-Ing Arndt Stöcker  
Dipl.-Ing Thomas Hoell

### 1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Robert Machulec  
Receipt of EUT: 12.07.2004  
Date of Test(s): 12.07.2004 - 19.07.2004  
Date of Report: 26.07.2004

### 1.3 Applicant Data

Company Name: SMART Modular Technologies, Inc.  
Address: 4211 Starboard Drive  
Fremont, CA 94538  
USA  
Contact Person: Lubos Honzik

### 1.4 Manufacturer Data

Company Name: please see Applicant data  
Address:

Contact Person:



## **2.0 Product Labeling**

### **2.1 FCC ID Label:**

At the time of the report there was no FCC label available.

### **2.2 Location of Label on the EUT:**

see above



### 3. Testobject Data

#### 3.1 General EUT Description

<b>Equipment under Test:</b>	Bluetooth® Transceiver
<b>Type Designation:</b>	ASY90177-3
<b>Kind of Device: (optional)</b>	Bluetooth UART SPP module
<b>Voltage Type:</b>	DC
<b>Voltage level:</b>	3.3 V

#### General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1MHz apart are defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is devided into time slots, with a nominal slot length of 625µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 30 second period. The symbol rate on the channel is 1 Ms/s.

#### The EUT provides the following ports:

##### Ports

Data + DC port  
temp. antenna connector  
Enclosure

**The main components of EUT are listed and described in Chapter 3.2**



### 3.2 EUT Main components:

#### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A	Bluetooth UART SPP module	ASY90177-3	-	PCB A0,CSR BC212015B,BI ueCore2,BC2- Extver.B	BlueCore FW,RFCStack,v er.16.8.3	12.07.2004
EUT is equipped with an integral antenna (gain=0dBi)						
EUT B	Bluetooth UART SPP module	ASY90177-3	-	PCB A0,CSR BC212015B,BI ueCore2,BC2- Extver.B	BlueCore FW,RFCStack,v er.16.8.3	12.07.2004
EUT is equipped with a temporary antenna connector						

**NOTE: The short description is used to simplify the identification of the EUT in this test report**

### 3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial No.	FCC Id
AE 2	Connection board	ENG-0149, Rev.A094V-0	-	-	-	-
AE 1	Laptop	Satelite 4090xCDT	-	-	10441164G	-

### 3.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
4Ts80f01	EUT B + AE 1 + AE 2	
4Ts80i01	EUT A + AE 1 + AE 2	

### 3.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	The EUT transmits continuously on 2402 MHz	TX mode / loopback mode / local TX mode
op-mode 2	The EUT transmits continuously on 2441 MHz	TX mode / loopback mode / local TX mode
op-mode 3	The EUT transmits continuously on 2480 MHz	TX mode / loopback mode / local TX mode
op-mode 4	inquiry	The EUT transmits in Bluetooth inquiry mode
op-mode 5	paging	The EUT transmits in Bluetooth page mode
op-mode 6	10 neighbouring channels	The EUT is set to transmit on ten neighbouring channels one after the other to see the channel separation.



## 4. Test Results

### 4.1 Occupied Bandwidth

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

#### 4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

#### 4.1.2 Test Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (ii)

- (1) Frequency hopping systems operating in the 2400 - 2483.5 MHz band should use at least 75 hopping frequencies.
- (2) The average time of occupancy on any frequency should not be greater than 0.4 seconds within a 30 second period.
- (3) The maximum 20 dB bandwidth of the hopping channel is 1MHz.

#### 4.1.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	4Ts80f01	temp. antenna connector	
<b>20 dB Bandwidth MHz</b>		<b>Remarks</b>	
906,4		none	

Remark: Please see annex for the measurement plot.



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

<b>Op. Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Test Parameter</b>
op-mode 2	4Ts80f01	temp. antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
910,4			none

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

<b>Op. Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Test Parameter</b>
op-mode 3	4Ts80f01	temp. antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
906,4			none

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

<b>Op. Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Test Parameter</b>
op-mode 4	4Ts80f01	temp. antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
628			none

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

<b>Op. Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Test Parameter</b>
op-mode 5	4Ts80f01	temp. antenna connector	
<b>20 dB Bandwidth MHz</b>			<b>Remarks</b>
636			none

Remark: Please see annex for the measurement plot.



#### 4.1.3 Test result: Occupied Bandwidth

FCC Part 15, Subpart C		Op. Mode	Setup	Port	Result
op-mode 1	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 2	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 3	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 4	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 5	4Ts80f 01		temp. antenna connector		<b>passed</b>

## 4.2 Peak Power Output

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.2.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

### 4.2.2 Test Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(1) For frequency hopping systems operating in the band 2400 - 2483,5 MHz or 5725 - 5850 MHz and for all direct sequence systems: 1 Watt

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

### 4.2.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	4Ts80f01	temp. antenna connector	
		<b>Remarks</b>	
1,26		The EIRP including antenna gain (0 dBi) is 1,26 dBm	

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	4Ts80f01	temp. antenna connector	
			<b>Remarks</b>
			1,52      The EIRP including antenna gain (0 dBi) is 1,52 dBm

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	4Ts80f01	temp. antenna connector	
			<b>Remarks</b>
			0,25      The EIRP including antenna gain (0 dBi) is 0,25 dBm

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	4Ts80f01	temp. antenna connector	
			<b>Remarks</b>
			0,77      The EIRP including antenna gain (0 dBi) is 0,77 dBm

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	4Ts80f01	temp. antenna connector	
			<b>Remarks</b>
			0,7      The EIRP including antenna gain (0 dBi) is 0,70 dBm

Remark: Please see annex for the measurement plot.



#### 4.2.3 Test result: Peak Power Output

FCC Part 15, Subpart C		Op. Mode	Setup	Port	Result
op-mode 1	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 2	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 3	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 4	4Ts80f 01		temp. antenna connector		<b>passed</b>
op-mode 5	4Ts80f 01		temp. antenna connector		<b>passed</b>



## 4.3 Spurious RF Conducted Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.3.2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 4.3.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 1	4Ts80f01	temp. antenna connector				

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
1181,00			-58,70	1,17	-18,83	39,87

Remark: No further spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 2	4Ts80f01	temp. antenna connector				
Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
1181,00			-57,55	1,53	-18,47	39,08

Remark: No further spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter			
op-mode 3	4Ts80f01	temp. antenna connector				
Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value	Reference Value dBm	Limit dBm	Delta to Limit dB
1231,00			-56,25	0,18	-19,82	36,43

Remark: No further spurious emission in the range 20 dB below the limit found. Please see annex for the measurement plot.

#### 4.3.3 Test result: Spurious RF Conducted Emissions

FCC Part 15, Subpart C		Op. Mode	Setup	Port	Result
op-mode 1	4Ts80f 01	temp. antenna connector			<b>passed</b>
op-mode 2	4Ts80f 01	temp. antenna connector			<b>passed</b>
op-mode 3	4Ts80f 01	temp. antenna connector			<b>passed</b>

## 4.4 Spurious Radiated Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

### 4.4.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at an EUT to receiving antenna distance of 3m.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure consists of four steps. It is implemented into EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 90°
- Height variation range: 1 – 3m
- Height variation stepsize: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. With this data, the test system performs ( to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 10 dB
- Maximum number of final measurements: 12

#### Step 2:

With the frequencies determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 45°
- Height variation range: 1 – 4m
- Height variation stepsize: 0,5m

- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0,5m

#### Step 3:

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 3, will be adjusted.

The turntable azimuth will be slowly varied by +/- 22,5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

#### Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22,5° to + 22,5 ° around the value determined in step 2
- Height variation range: -0,25m to + 0,25m around the value determined in step 2

#### Step 4:

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1s

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (invers linear-distance for field strength measurements, invers linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 Ghz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Detector: Peak, Average

RBW = VBW = 1 MHz, above 7 GHz 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### 4.4.2 Test Limits

FCC Part 15, Subpart C, §15.247(c)

(2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).

(3)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dB $\mu$ V/m)

30 – 88	40,0
88 – 216	43,5
216 – 960	46,0
above 960	54,0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

#### 4.4.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1010 hPa

Humidity: 39 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 1	4Ts80i01	Enclosure						
Polarisation	Frequency MHz	Corrected Value dB $\mu$ V/m			Limit QP/AV dB $\mu$ V/m	Limit Peak dB $\mu$ V/m	Delta to AV/QP Limit/dB	
		QP	Peak	AV			Delta to Peak Limit dB	
Vertical	4,80		36,44	25,40	54,00	74,00	28,60	37,56

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 24 °C

Air Pressure: 1018hPa

Humidity: 36%

Op. Mode	Setup	Port	Test Parameter					
op-mode 2	4Ts80i01	Enclosure						
Polarisation	Frequency MHz	Corrected Value dB $\mu$ V/m			Limit QP/AV dB $\mu$ V/m	Limit Peak dB $\mu$ V/m	Delta to AV/QP Limit/dB	
		QP	Peak	AV			Delta to Peak Limit dB	
Vertical	4882,00		35,75	24,57	54,00	74,00	29,43	38,25

Remark: No further spurious emission in the range 20 dB below the limit found.



Temperature: 24 °C  
Air Pressure: 1018 hPa  
Humidity: 36%

Op. Mode	Setup	Port	Test Parameter					
op-mode 3	4Ts80i01	Enclosure						
Polarisation	Frequency MHz	Corrected Value dB $\mu$ V/m			Limit QP/AV dB $\mu$ V/m	Limit Peak dB $\mu$ V/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	2483,50		52,87	39,78	54,00	74,00	14,22	21,13
Vertical	4960,00		35,24	23,58	54,00	74,00	30,42	38,76

Remark: No further spurious emission in the range 20 dB below the limit found.

#### 4.4.3 Test result: Spurious Radiated Emissions

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 1	4Ts80i 01	Enclosure	<b>passed</b>
	op-mode 2	4Ts80i 01	Enclosure	<b>passed</b>
	op-mode 3	4Ts80i 01	Enclosure	<b>passed</b>

## 4.5 Dwell Time

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.5.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

To determine the dwell time, 3 single measurements are necessary.

The first plot shows the activity for a complete inquiry/paging on one channel.

The second plot shows the repetition rate on one channel, and the third plot shows the duration of the burst used in inquiry/paging.

With these 3 single values the dwell time of the channel can be calculated.

### 4.5.2 Test Limits

FCC Part 15, Subpart C, §15.247 (f)

The dwell time of the channel shall be less than 400 ms in a 30 s period

### 4.5.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	4Ts80f01	temp. antenna connector	
<b>Dwell time ms</b>		<b>Remarks</b>	
96,39		$(3 * 2,55 \text{ s}) / 10 * 126 \mu\text{s}$	

Remark: Please see annex for the measurement plot.



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	4Ts80f01	temp. antenna connector	
Dwell time ms		Remarks	
48,76		$(2 * 2,55 \text{ s} + 1,32 \text{ s}) / 10 \text{ ms} * 129 \mu\text{s}$	

Remark: Please see annex for the measurement plot.

#### 4.5.3 Test result: Dwell Time

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 4	4Ts80f 01	temp. antenna connector	<b>passed</b>
	op-mode 5	4Ts80f 01	temp. antenna connector	<b>passed</b>



## 4.6 Power Density

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.6.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

The Analyser settings are according 15.247 (d):

- Detector: Peak-Maxhold
- Span: 2 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 3 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.6.2 Test Limits

FCC Part 15, Subpart C, §15.247 (d)

The power density shall be below 8 dBm measured with a resolution bandwidth of 3 kHz.

### 4.6.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	4Ts80f01	temp. antenna connector	
<b>Power Density dBm/3 kHz</b>		<b>Remarks</b>	
-10,03		none	

Remark: Please see annex for the measurement plot.



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	4Ts80f01	temp. antenna connector	
<b>Power Density</b> dBm/3 kHz		<b>Remarks</b>	
-10,25		none	

Remark: Please see annex for the measurement plot.

#### 4.6.3 Test result: Power Density

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 4	4Ts80f 01	temp. antenna connector	<b>passed</b>
	op-mode 5	4Ts80f 01	temp. antenna connector	<b>passed</b>



## 4.7 Channel Separation

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.7.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Span: 10 MHz
- Resolution Bandwidth (RBW): 300 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.7.2 Test Limits

FCC Part 15, Subpart C, § 15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 4.7.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 45 %

Op. Mode	Setup	Port	Test Parameter
op-mode 6	4Ts80f01	temp. antenna connector	
Channel Separation MHz		Remarks	
1		none	

Remark: Please see annex for the measurement plot.

### 4.7.3 Test result: Channel Separation

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 6	4Ts80f01	temp. antenna connector	passed



## 5. Testequipment

### *EUT Digital Signalling System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz
Signalling Unit for Bluetooth Spurious Emissions	PTW60	100004	Rohde & Schwarz
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz

### *EMI Test System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Comparison Noise Emitter	CNE III	99/016	York
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Signal Generator	SMR 20	846834/008	Rohde & Schwarz

### *EMI Radiated Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42-5A	619368	Miteq
Cable "ESI to EMI Antenna"	RTK081+Aircell7	W18.01+W38.01a	Huber+Suhner
Cable "ESI to Horn Antenna"	RTK 081	W18.04+3599/001	Rosenberger
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
KUEP pre amplifier	Kuep 00304000	001	7layers
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Pyramidal Horn Antenna 26,5 GHz	Model 3160-09	9910-1184	EMCO



## *EMI Conducted Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz

## *Auxiliary Test Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Notch Filter ultra stable	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyzer 9KHz To 3GHz	FSP3	838164/004	Rohde & Schwarz
Temperature Chamber	VT 4002	58566002150010	Vötsch
Temperature Chamber	KWP 120/70	59226012190010	Weiss
ThermoHygro_01	430202		Fischer

## *Anechoic Chamber*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Air Compressor (pneumatic)			Atlas Copco
Controller	HD 100	100/603	HD GmbH H. Deisel
EMC Camera	CE-CAM/1		CE-SYS
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter telephone systems / modem	B84312-C40-B1		Siemens&Matsushita
Filter Universal 1A	B84312-C30-H3		Siemens&Matsushita
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia
Turntable	DS 420S	420/573/99	HD GmbH, H. Deisel
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H. Deisel




*7 layers Bluetooth™ Full RF Test Solution*


*Bluetooth RF Conformance Test System TS8960*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
10MHz Reference	MFS	5489/001	Efratom
Power Meter 832025/059	NRVD	832025/059	Rohde & Schwarz
Power Sensor A 832279/013	NRV-Z1	832279/013	Rohde & Schwarz
Power Sensor B 832279/015	NRV-Z1	832279/015	Rohde & Schwarz
Power Supply	E3632A	MY40003776	Agilent
Power Supply	PS-2403D	-	Conrad
RF Step Attenuator 833695/001	RSP	833695/001	Rohde & Schwarz
Rubidium Frequency Normal	MFS	002	Efratom
Signal Analyser FSIQ26 832695/007	FSIQ26	832695/007	Rohde & Schwarz
Signal Analyser FSP30 100051	FSP30	100051	Rohde & Schwarz
Signal Generator 101175	SMIQ03B	101175	Rohde & Schwarz
Signal Generator 833680/003	SMP 03	833680/003	Rohde & Schwarz
Signal Generator A 834344/002	SMIQ03B	834344/002	Rohde & Schwarz
Signal Generator B 832870/017	SMIQ03B	832870/017	Rohde & Schwarz
Signal Switching and Conditioning Unit	SSCU	338826/005	Rohde & Schwarz
Signalling Unit PTW60 838312/014	PTW60 for TS8960	838312/014	Rohde & Schwarz
System Controller 829323/008	PSM12	829323/008	Rohde & Schwarz


## 6. Foto Report

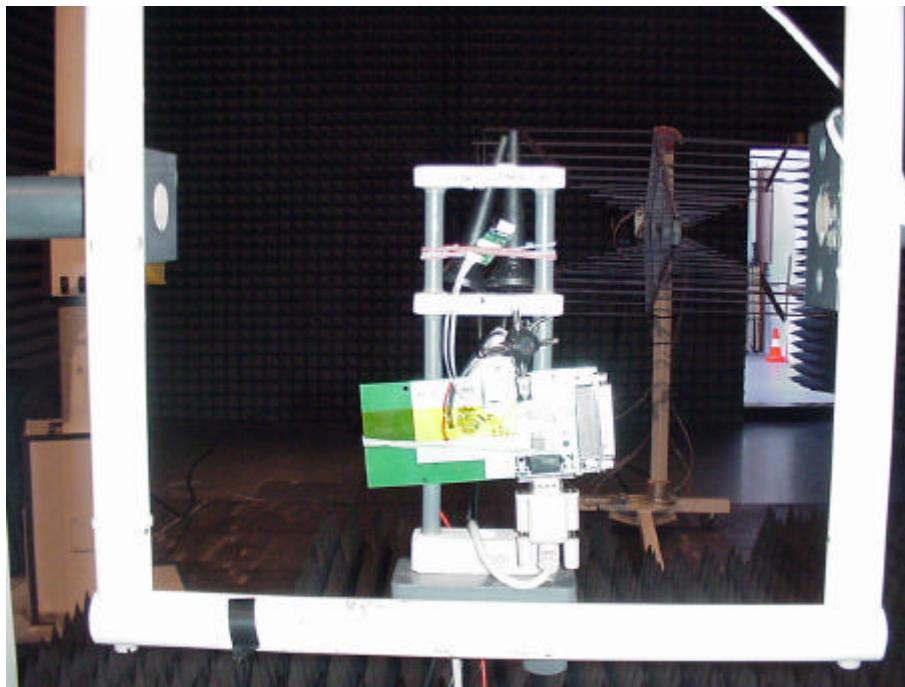


**Picture 1 : Setup for radiated emission test**

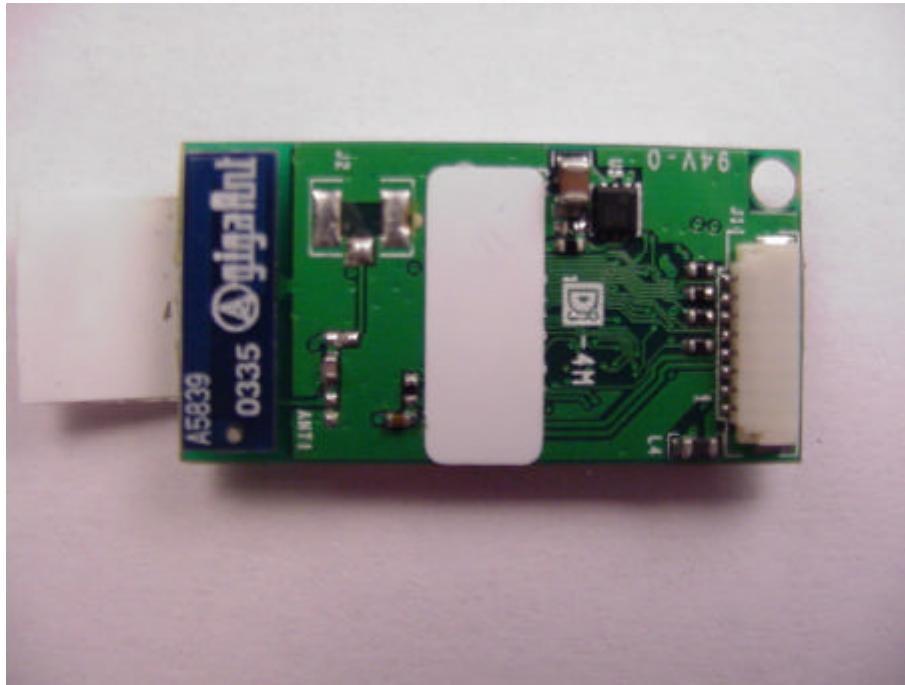


**Picture 2 : EUT for radiated test**

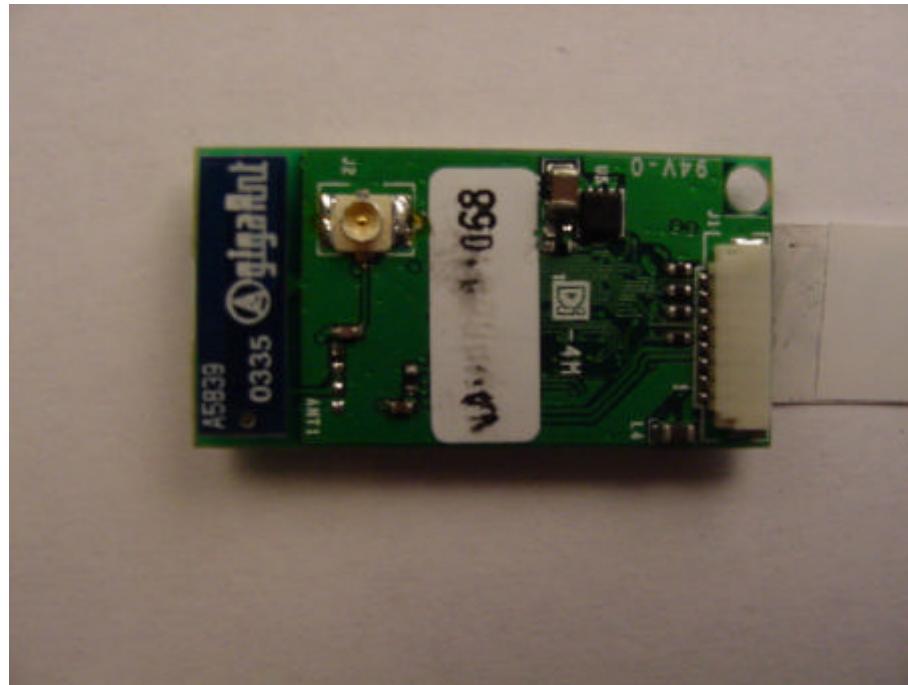

**Picture 3 : EUT for conducted test**

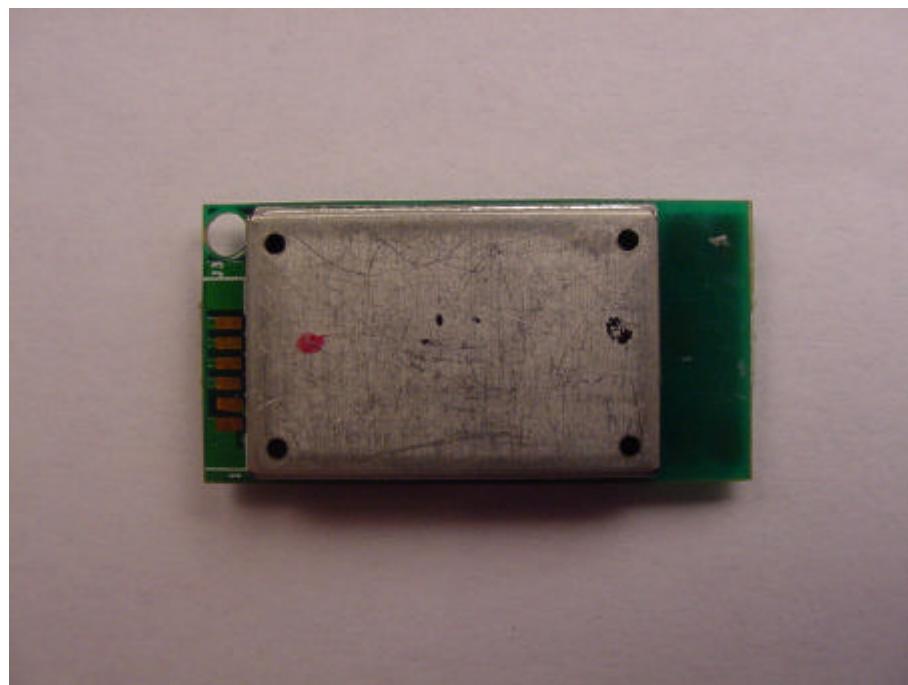


**Picture 4 : EUT bottom side**

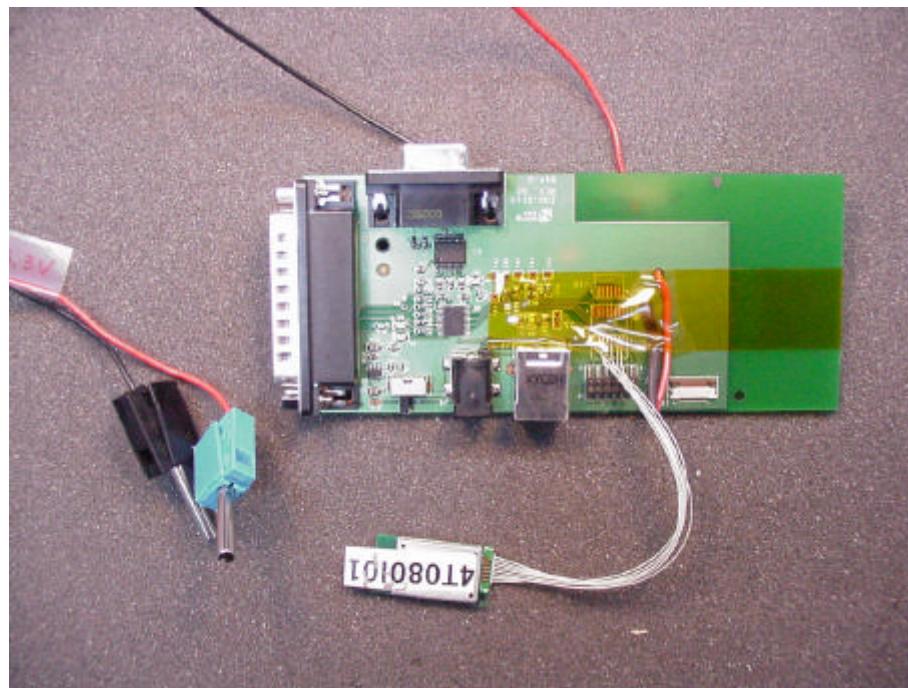


**Picture 5 : Connection board with connected EUT**

## 7. Setup Drawings

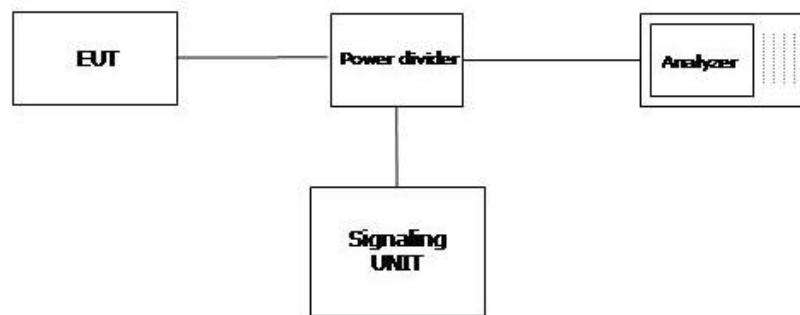

**Drawing 1 : Setup for conducted emission measurement (in principle)**

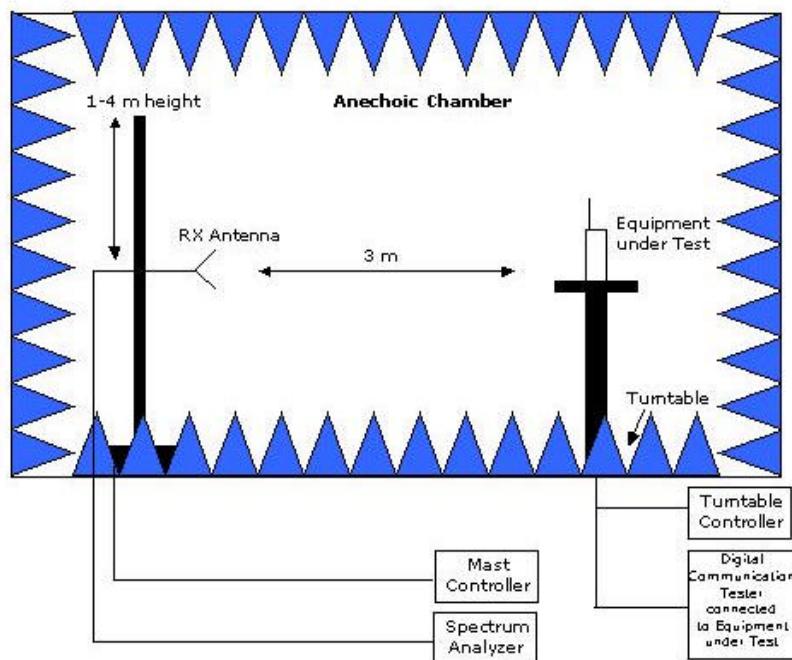

**Drawing 2 : Setup for radiated emission measurement (fully anechoic, in principle)**

## 8. Annex

### measurement plots

#### Occupied Bandwidth

##### Op. Mode


op-mode 1 The EUT transmits continuously on 2402 MHz

##### Setup

4Ts80f01

##### Port

temp. antenna connector

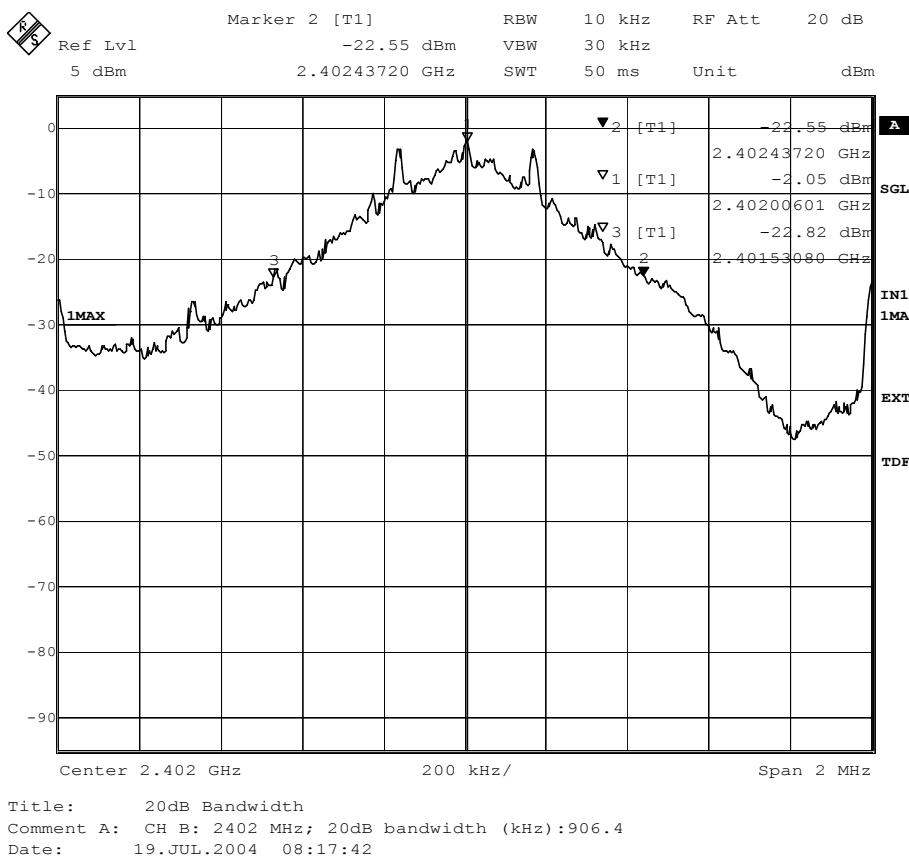

**20 dB bandwidth**

## Occupied Bandwidth


### Op. Mode

op-mode 2 The EUT transmits continuously on 2441 MHz

### Setup

4Ts80f01 temp. antenna connector

### Port

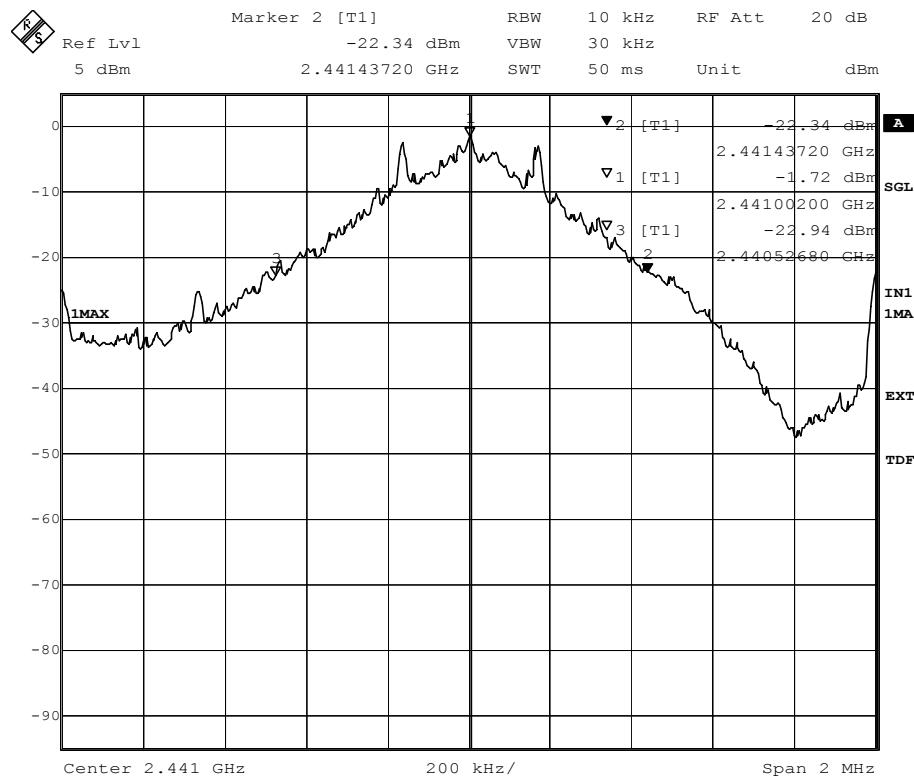

Title: 20dB Bandwidth  
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):910.4  
 Date: 19.JUL.2004 08:38:00

### 20 dB bandwidth

## Occupied Bandwidth


### Op. Mode

op-mode 3 The EUT transmits continuously on 2480 MHz

### Setup

4Ts80f01 temp. antenna connector

### Port

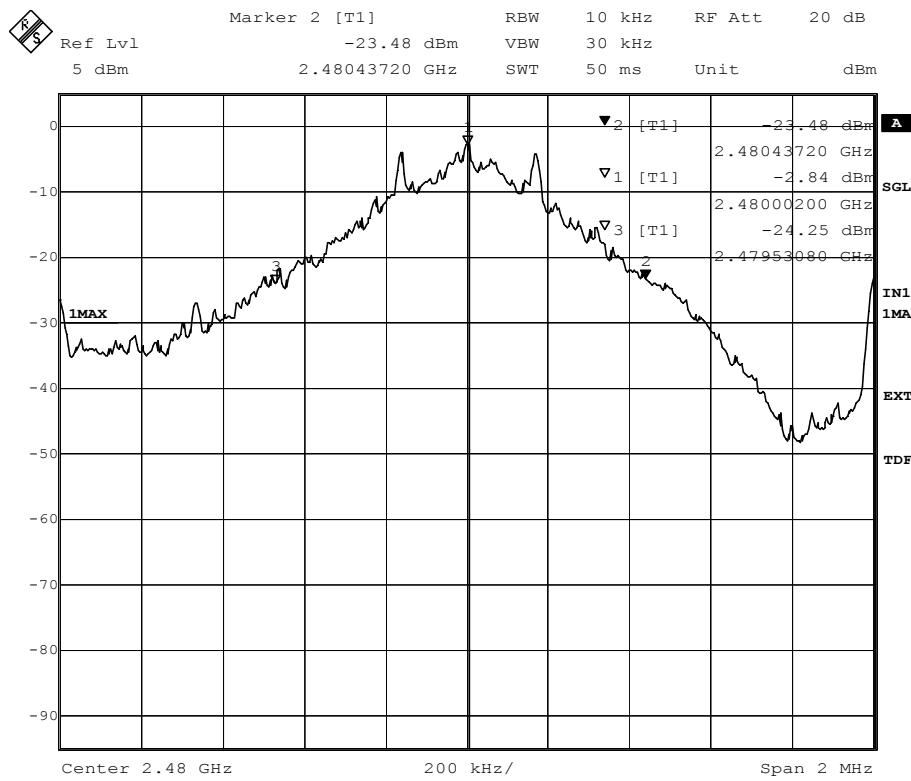

Title: 20dB Bandwidth  
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):906.4  
 Date: 19.JUL.2004 08:57:59

**20 dB bandwidth**

## Occupied Bandwidth

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

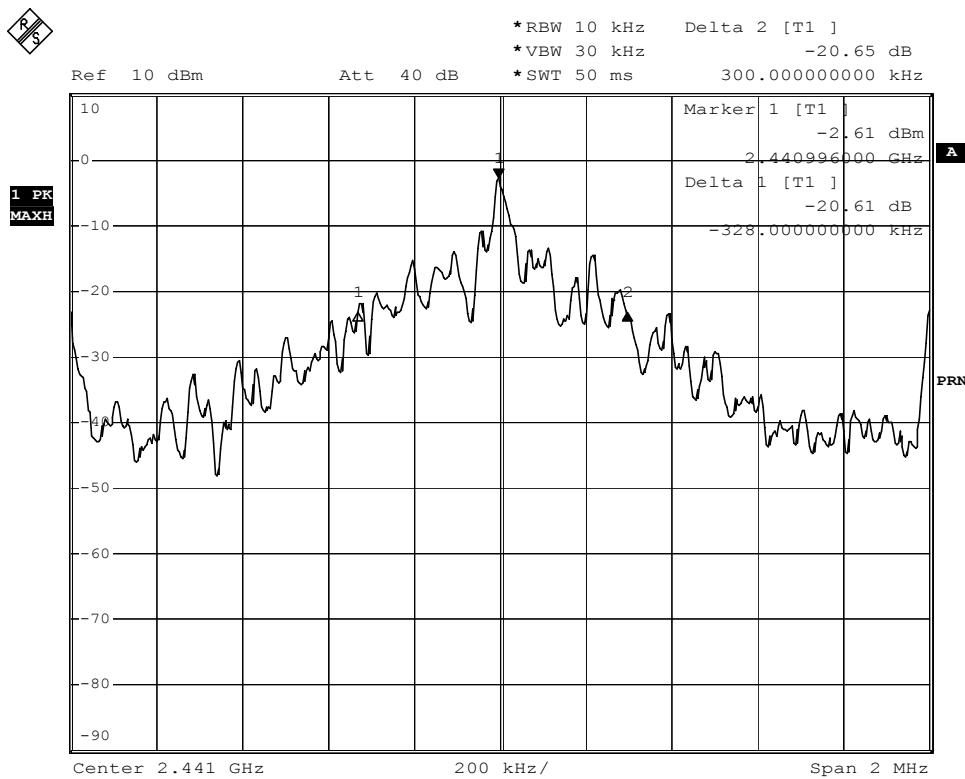

Date: 16.JUL.2004 11:52:14

**20 dB bandwidth**

## Occupied Bandwidth

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

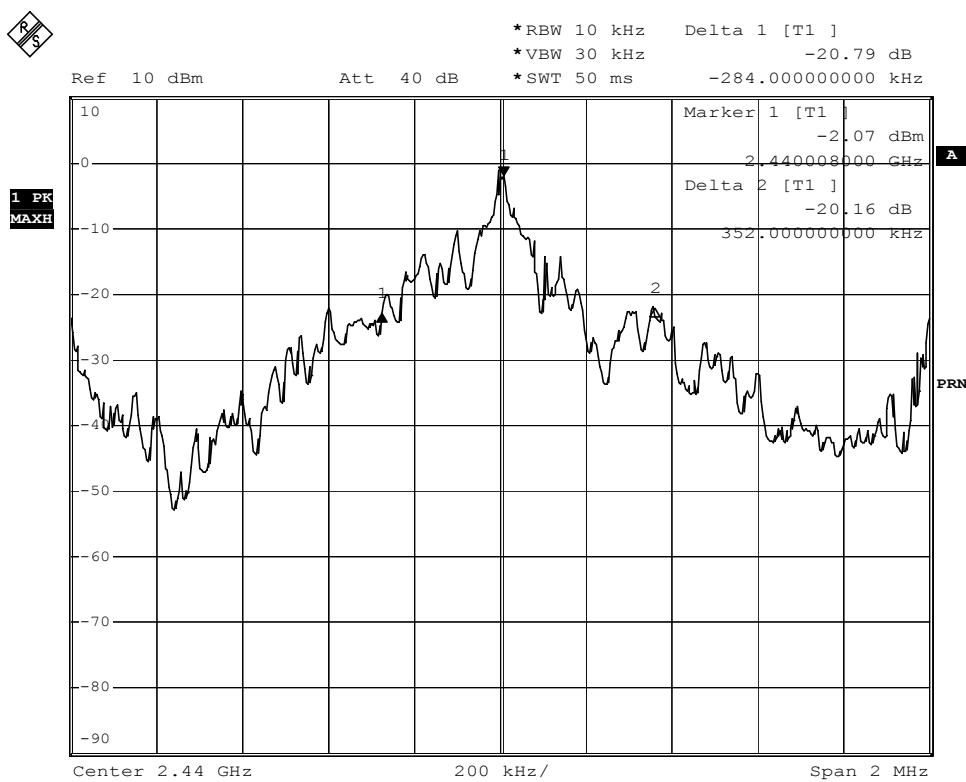

Date: 16.JUL.2004 13:22:26

**20 dB bandwidth**

## Peak Power Output

### Op. Mode


op-mode 1 The EUT transmits continuously on 2402 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

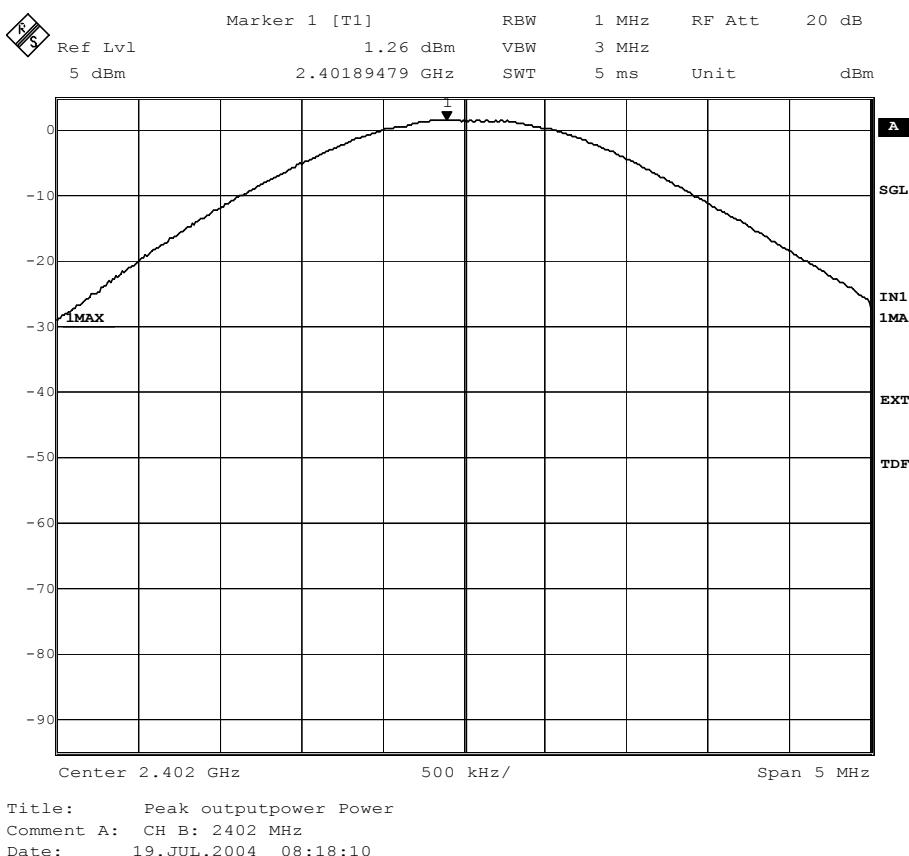

**peak output power**

## Peak Power Output

### Op. Mode


op-mode 2 The EUT transmits continuously on 2441 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

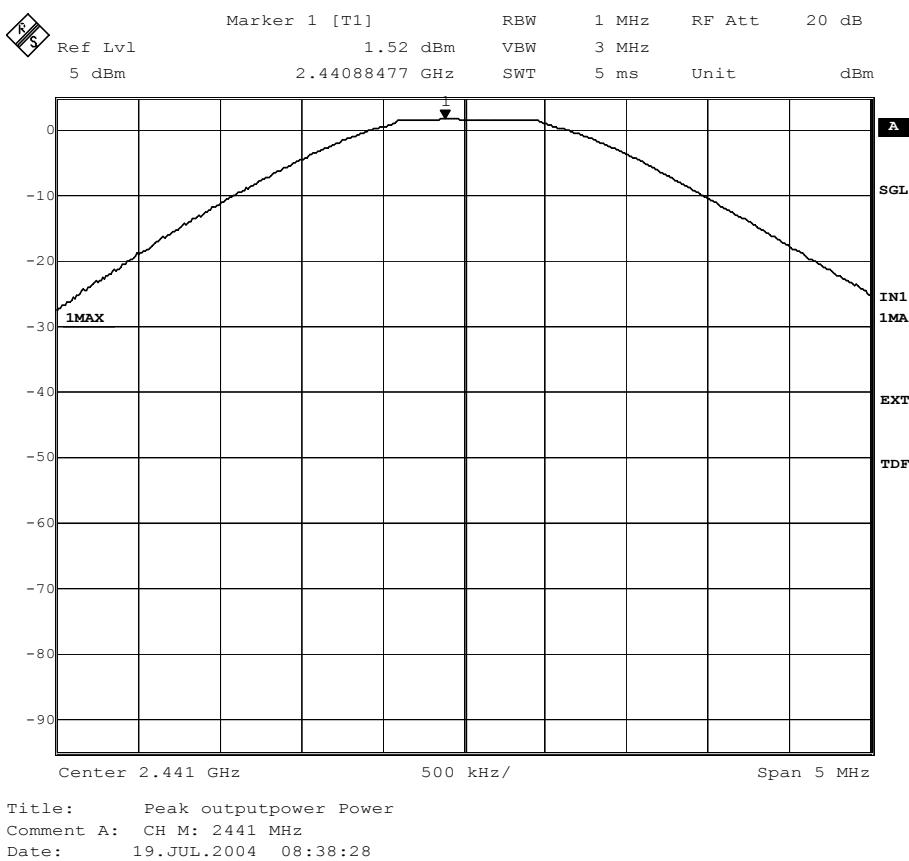

**peak output power**

## Peak Power Output

### Op. Mode


op-mode 3 The EUT transmits continuously on 2480 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

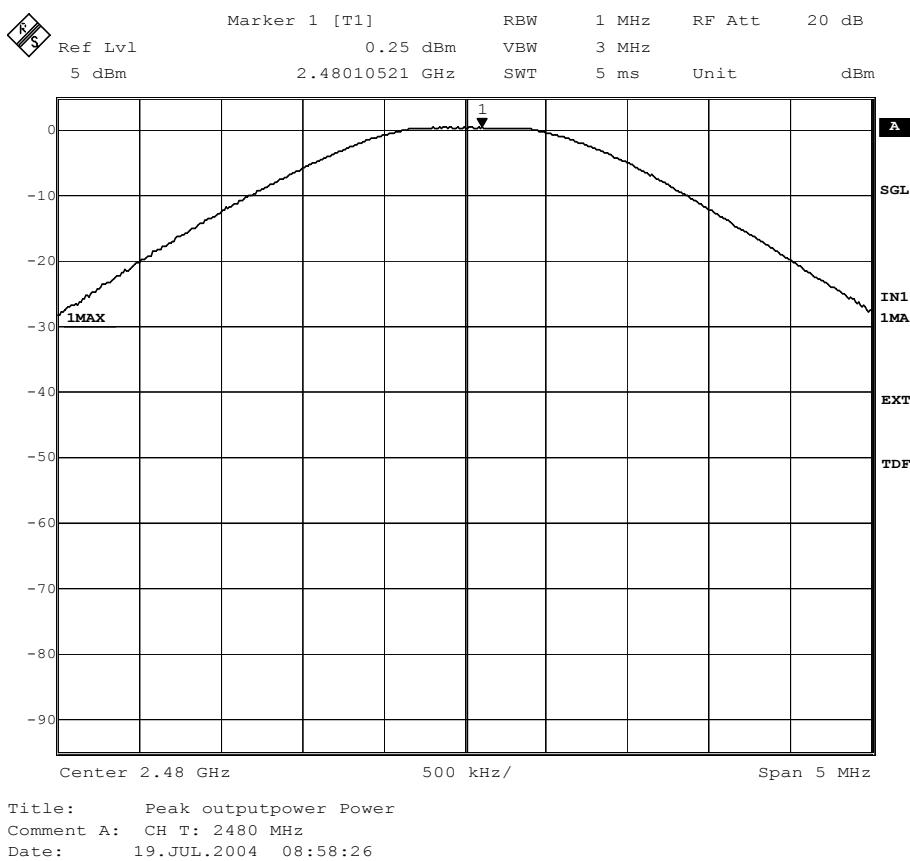

**peak output power**

## Peak Power Output

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

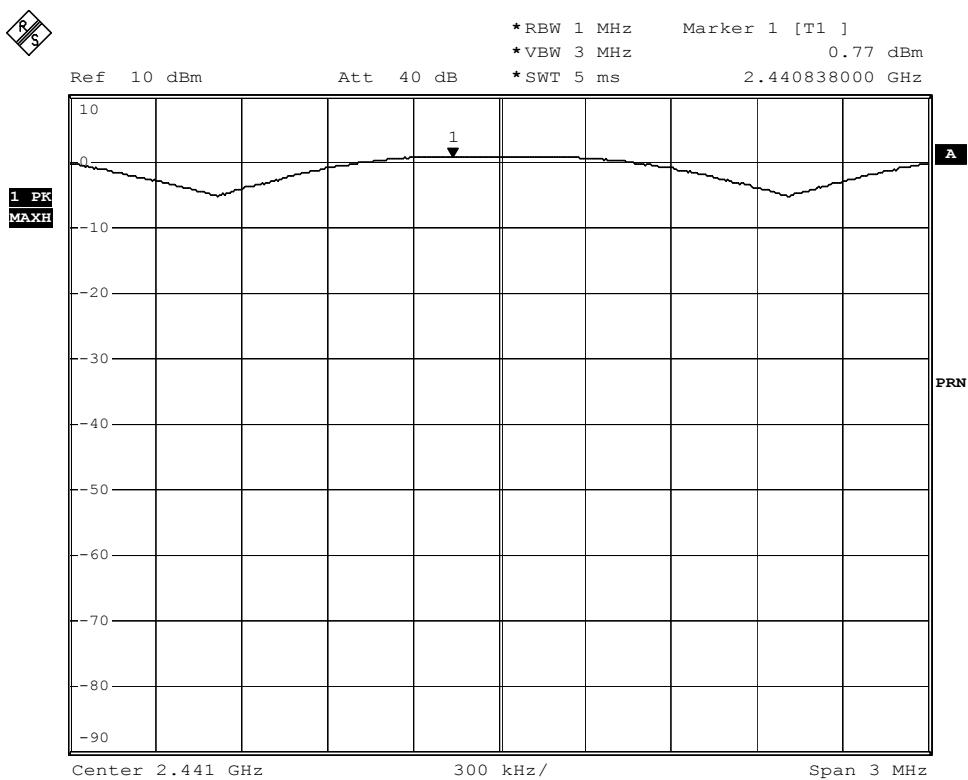

Date: 16.JUL.2004 12:26:19

**peak output power**

## Peak Power Output

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

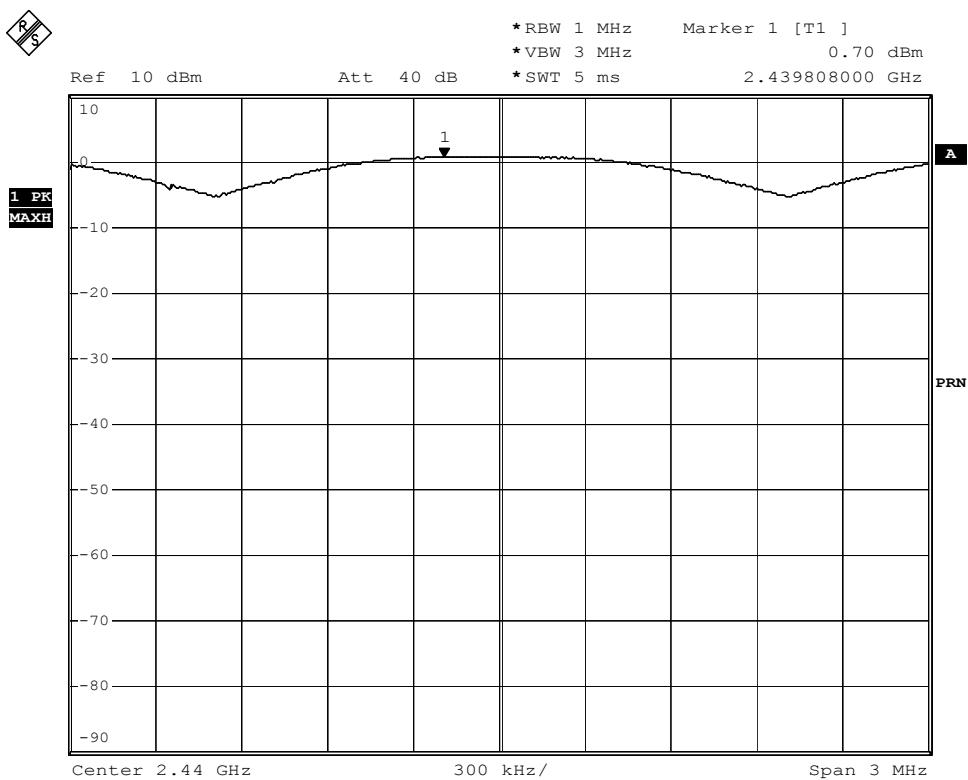

Date: 16.JUL.2004 12:28:22

**peak output power**

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 1 The EUT transmits continuously on 2402 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

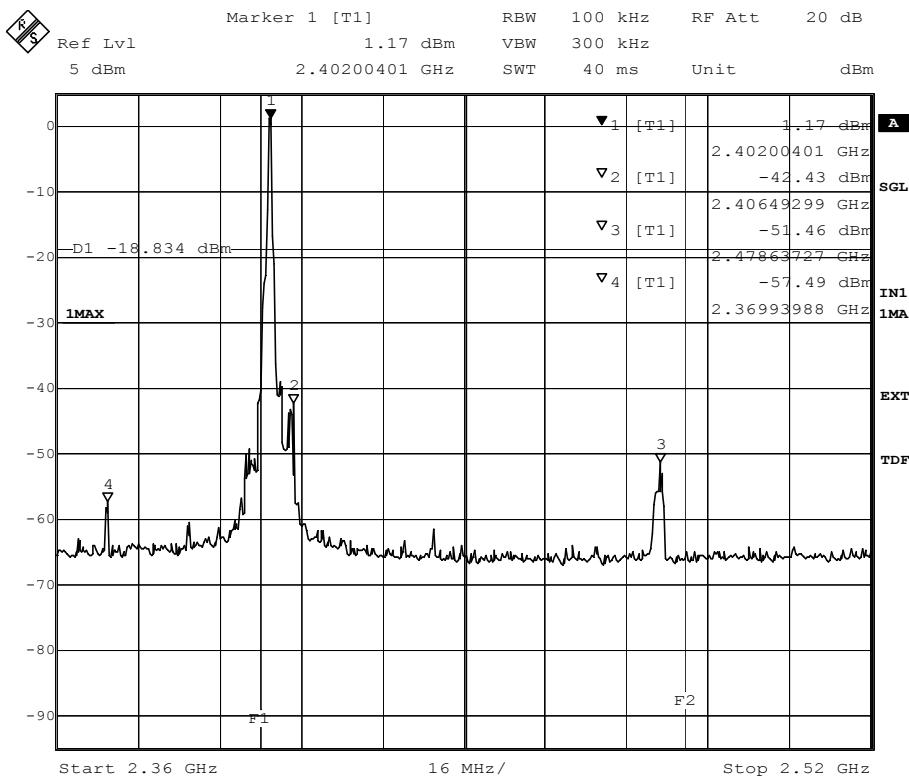

Title: Band Edge Compliance  
 Comment A: CH B: 2402 MHz  
 Date: 19.JUL.2004 08:02:26

**band edge compliance**

## Spurious RF Conducted Emissions


### Op. Mode

op-mode 1 The EUT transmits continuously on 2402 MHz

### Setup

4Ts80f01 temp. antenna connector

### Port

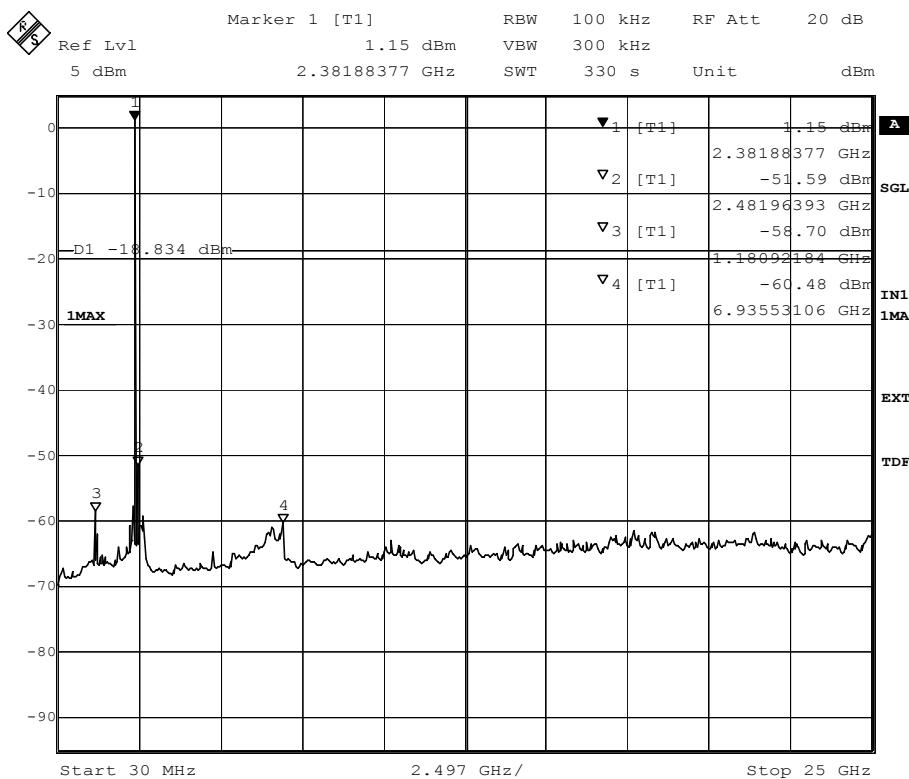

Title: spurious emissions  
 Comment A: CH B: 2402 MHz  
 Date: 19.JUL.2004 08:14:04

**spurious emissions conducted**

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 2 The EUT transmits continuously on 2441 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

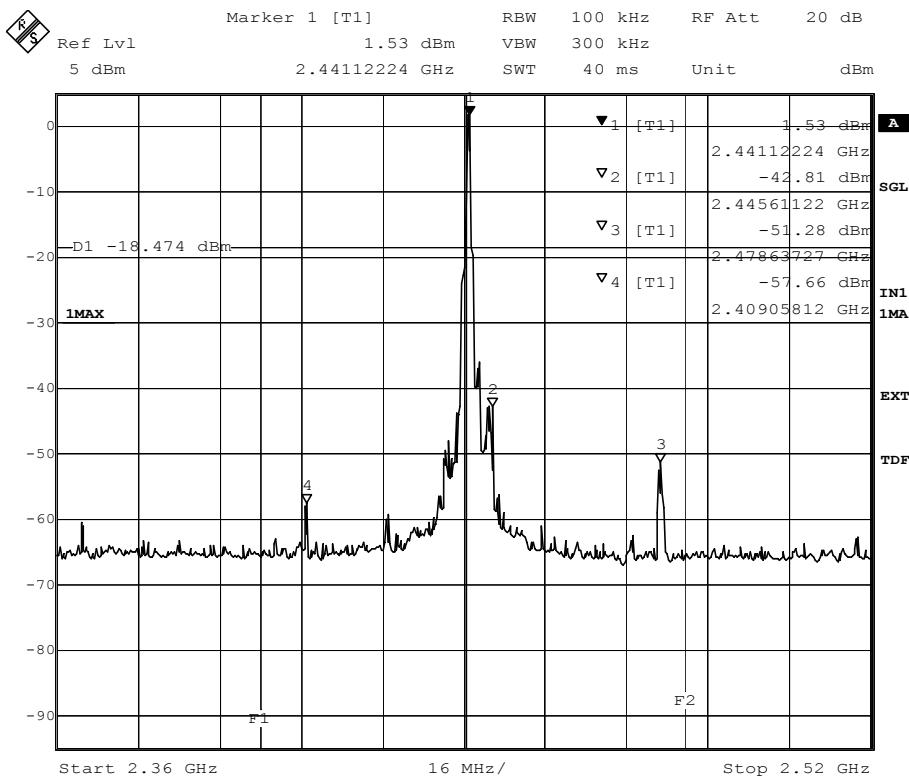

Title: Band Edge Compliance  
 Comment A: CH M: 2441 MHz  
 Date: 19.JUL.2004 08:22:53

**band edge compliance**

## Spurious RF Conducted Emissions


### Op. Mode

op-mode 2 The EUT transmits continuously on 2441 MHz

### Setup

4Ts80f01 temp. antenna connector

### Port

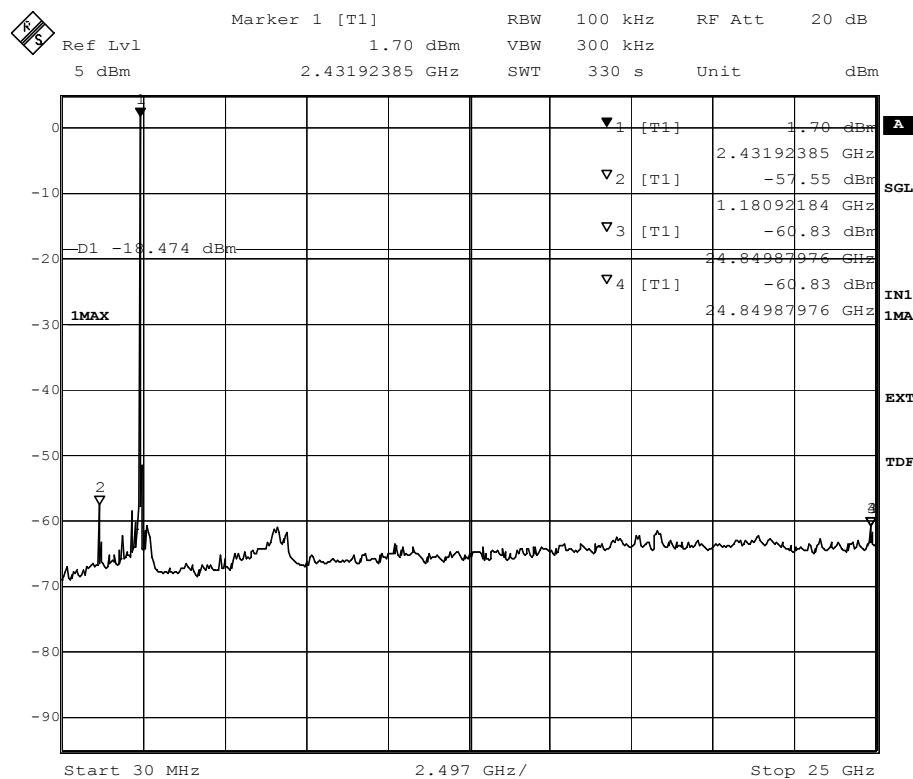

Title: spurious emissions  
 Comment A: CH M: 2441 MHz  
 Date: 19.JUL.2004 08:34:31

**spurious emissions conducted**

## Spurious RF Conducted Emissions

### Op. Mode


op-mode 3 The EUT transmits continuously on 2480 MHz

### Setup

4Ts80f01

### Port

temp. antenna connector

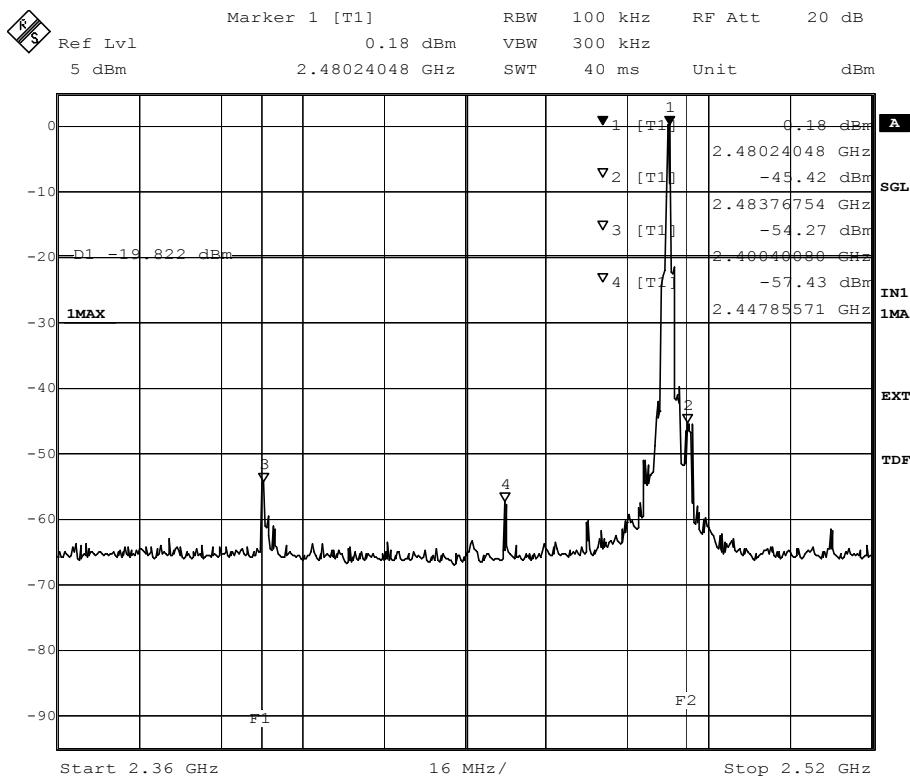

Title: Band Edge Compliance  
 Comment A: CH T: 2480 MHz  
 Date: 19.JUL.2004 08:42:42

**band edge compliance**

## Spurious RF Conducted Emissions


### Op. Mode

op-mode 3 The EUT transmits continuously on 2480 MHz

### Setup

4Ts80f01 temp. antenna connector

### Port

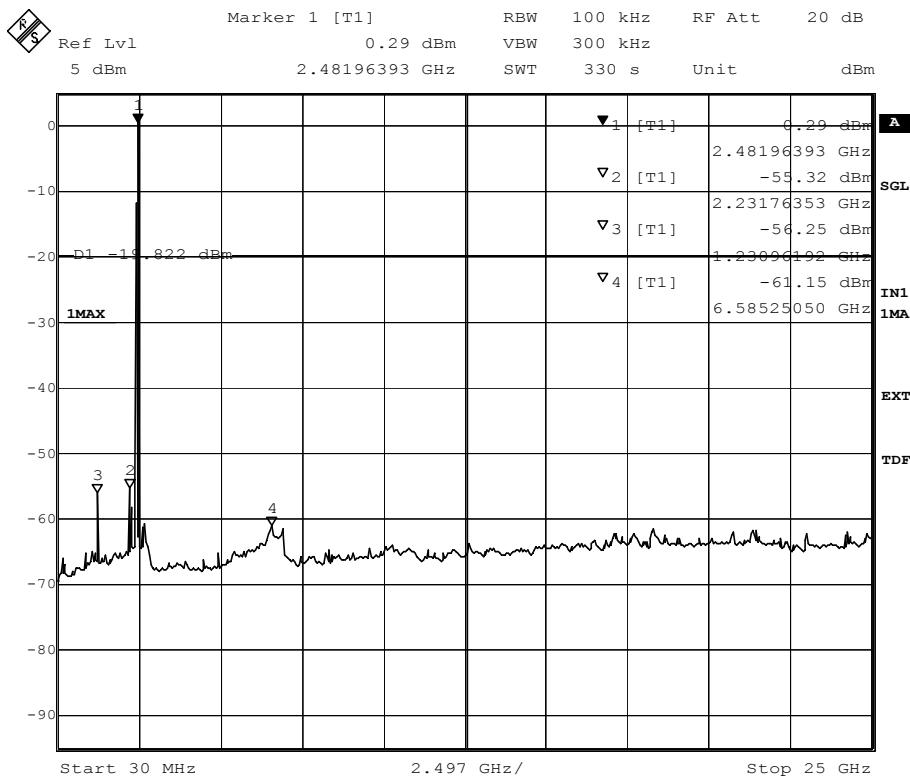

Title: spurious emissions  
 Comment A: CH T: 2480 MHz  
 Date: 19.JUL.2004 08:54:21

**spurious emissions conducted**

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

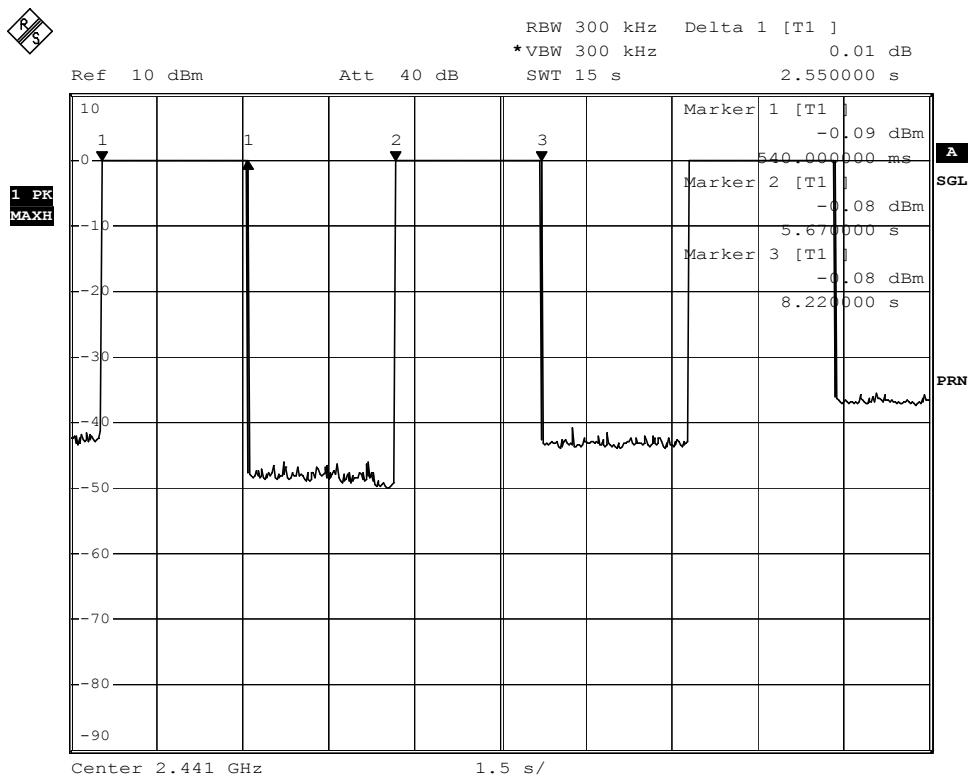

Date: 16.JUL.2004 11:56:10

**15 seconds sweep for a complete inquiry**

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

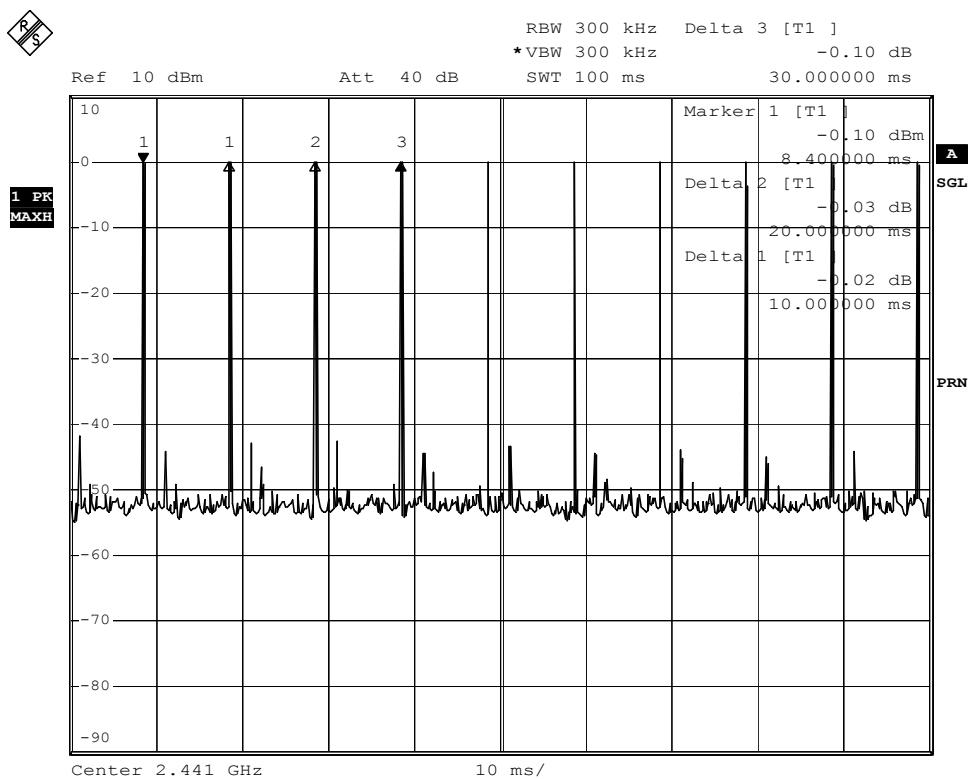

Date : 16.JUL.2004 12:03:34

**100 ms sweep of a channel to determine the repetition frequency**

## Dwell Time

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

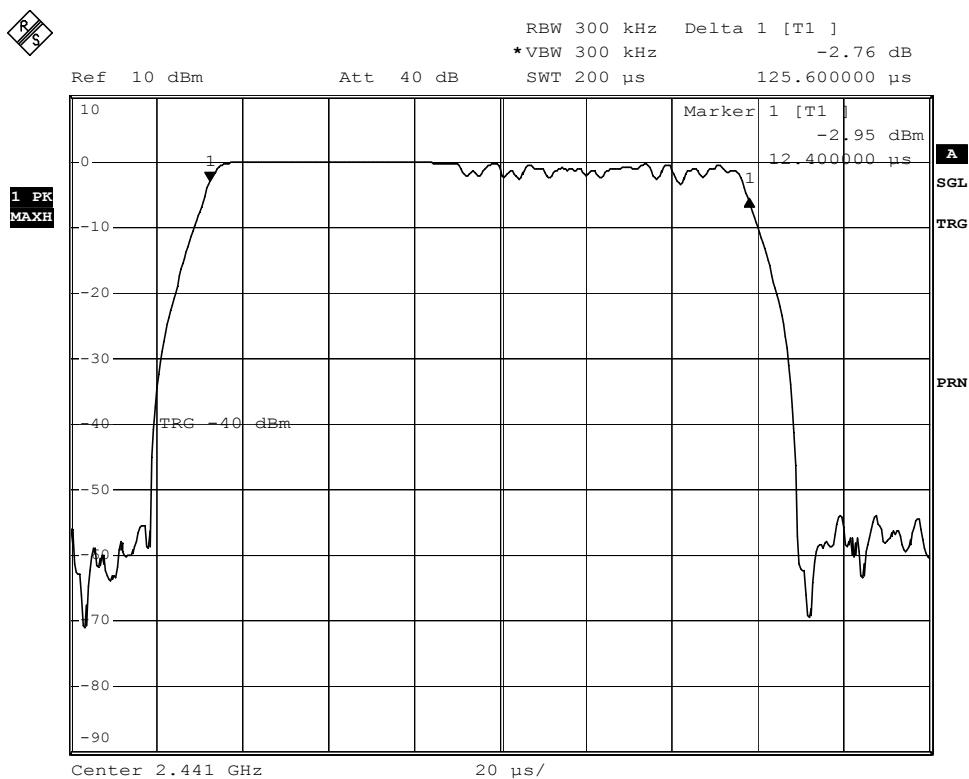

Date : 16.JUL.2004 12:06:16

**200 μs sweep for a complete burst**

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

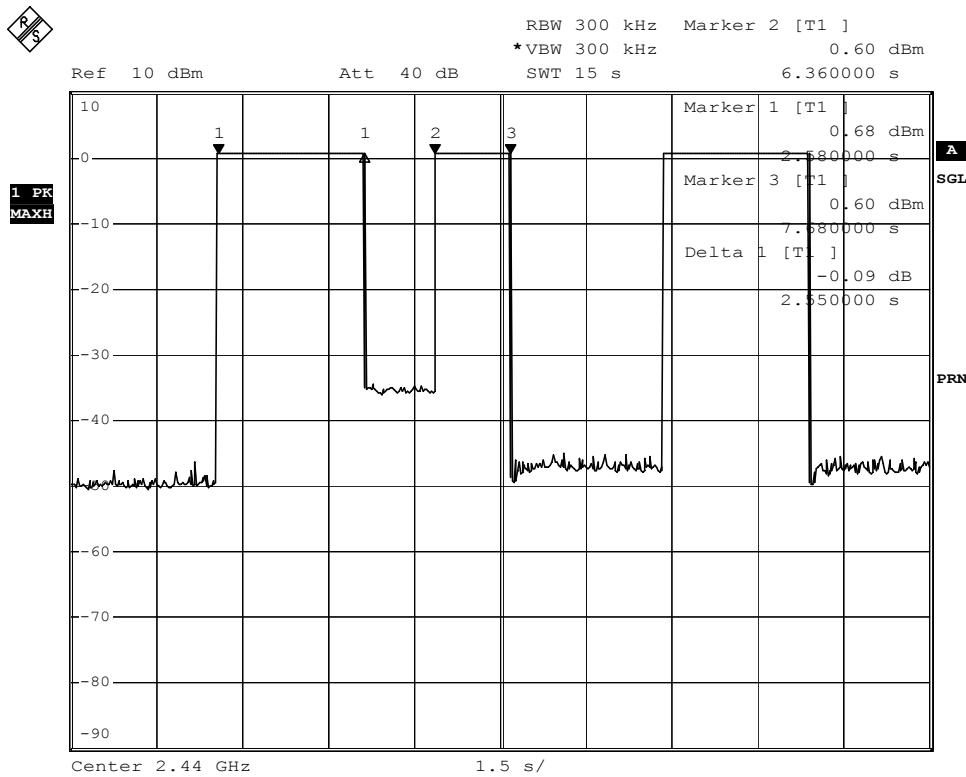

Date: 16.JUL.2004 12:44:45

**15 seconds sweep for a complete paging**

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

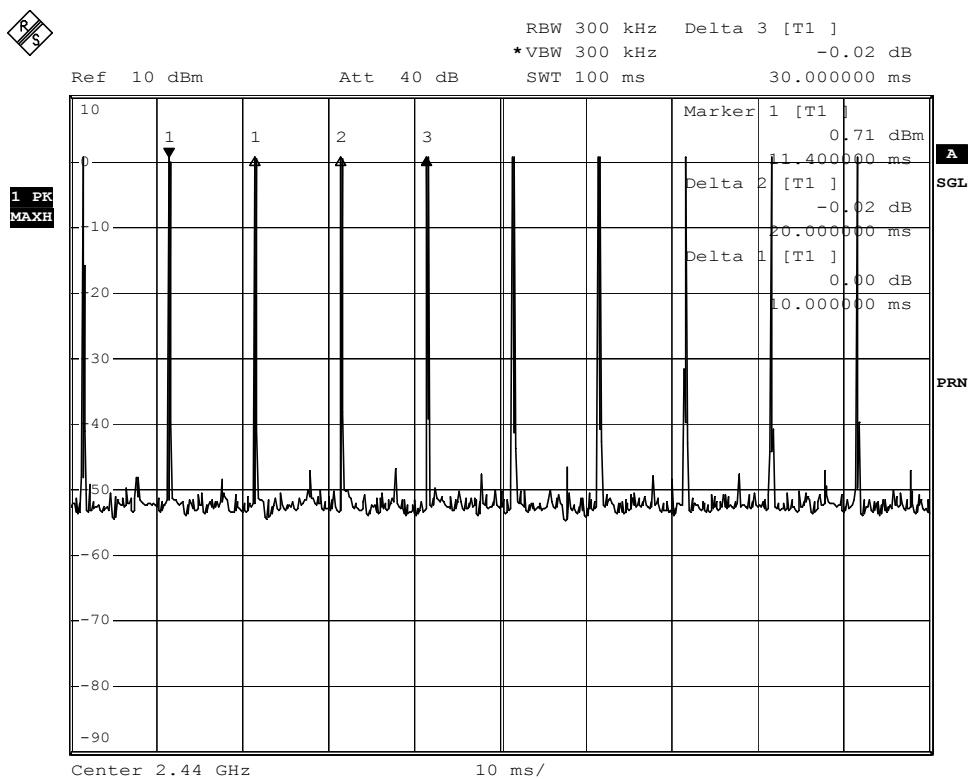

Date : 16.JUL.2004 12:47:17

**100 ms sweep of a channel to determine the repetition frequency**

## Dwell Time

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

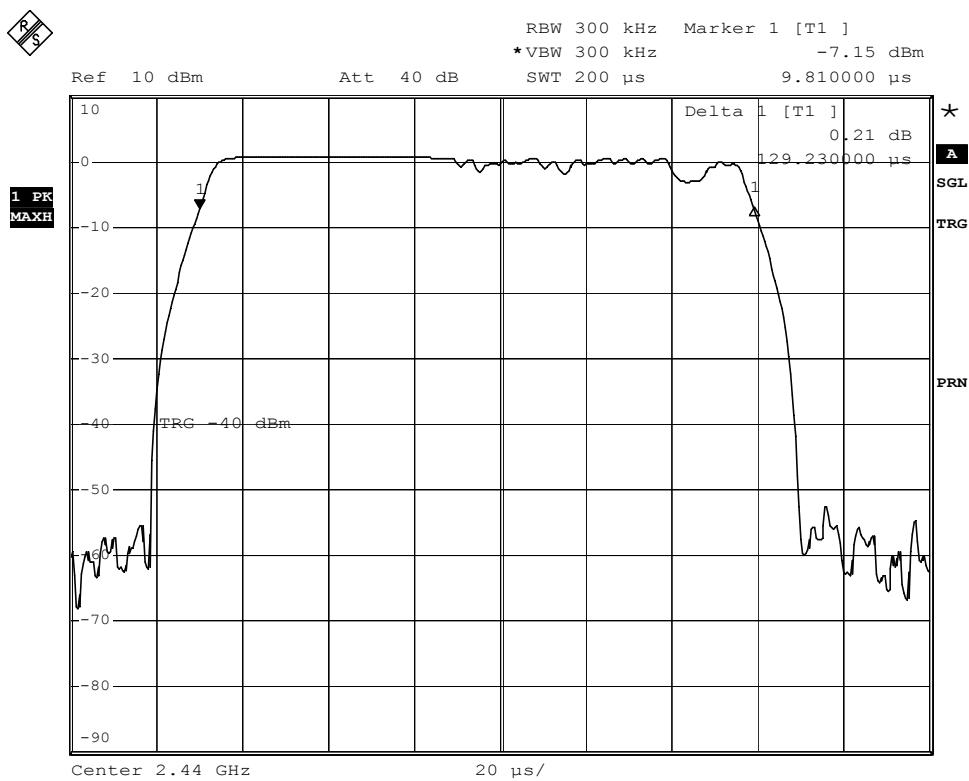

Date : 16.JUL.2004 12:50:13

**200 μs sweep for a complete burst**

## Power Density

### Op. Mode


op-mode 4 inquiry

### Setup

4Ts80f01

### Port

temp. antenna  
connector

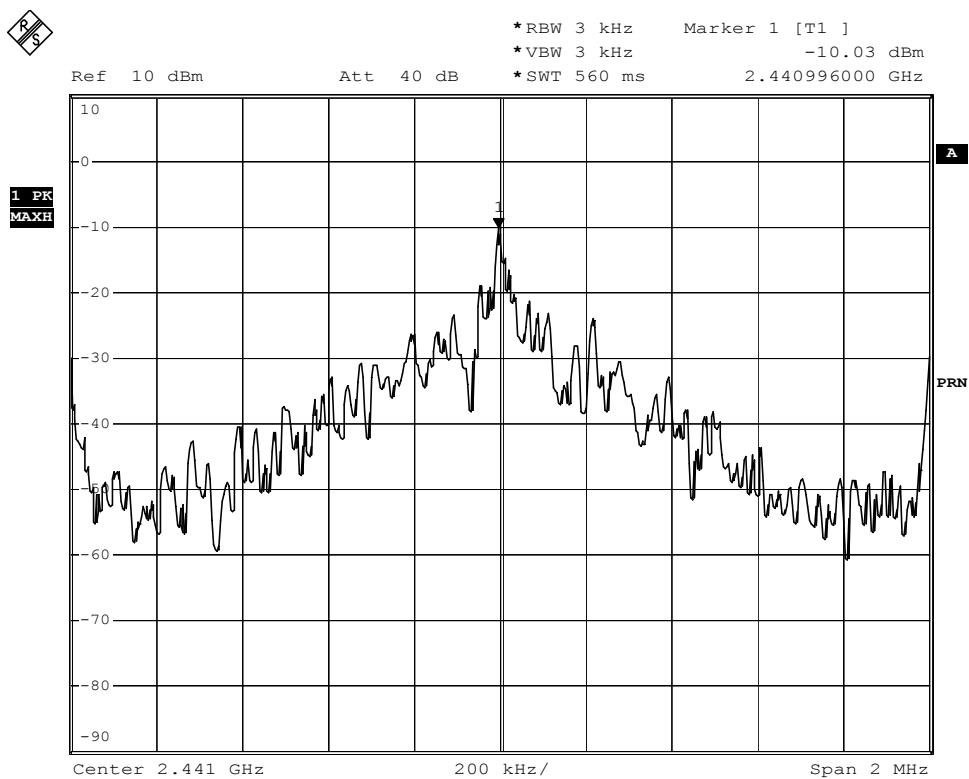

Date: 16.JUL.2004 11:48:21

**power density**

## Power Density

### Op. Mode


op-mode 5 paging

### Setup

4Ts80f01

### Port

temp. antenna  
connector

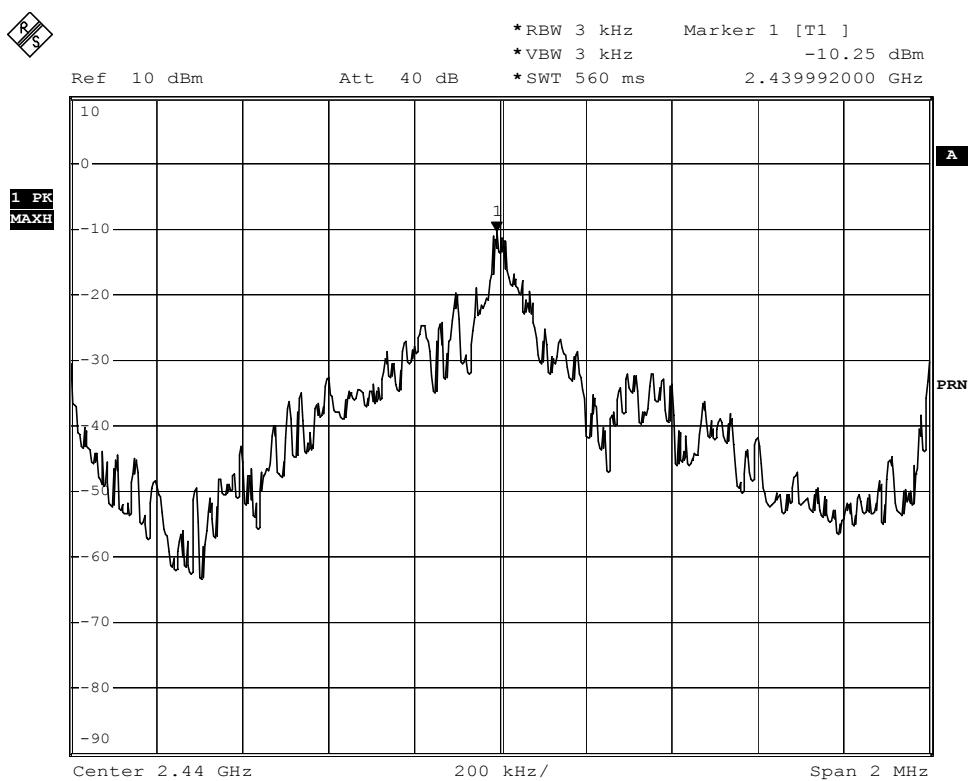

Date: 16.JUL.2004 13:16:35

**power density**

## Channel Separation

### Op. Mode


op-mode 6 10 neighbouring channels

### Setup

4Ts80f01

### Port

temp. antenna  
connector

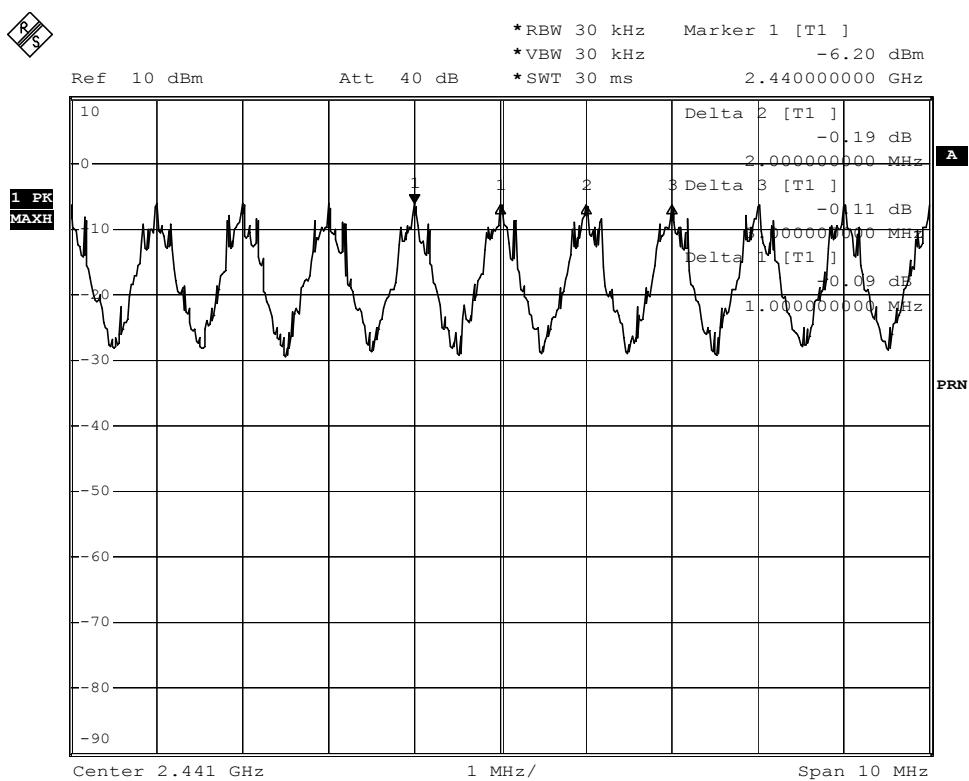

Date: 16.JUL.2004 11:30:18

**channel separation**