

CLASS B CERTIFICATION APPLICATION
UNDER PART 18

EUT: ENERGY SAVING LAMPS
MODEL: SGEFL15/STEFL15/GEFL15/TEFL15
FCC ID: KQP03

SRT REPORT # T8B28-3

PREPARED FOR :

CHUAN SHIH INDUSTRIAL CO., LTD.
NO. 59, SHING-KONG 4TH RD.,
TA-SHING INDUSTRIAL DISTRICT,
TIEN-CHUNG, CHANG-HUA,
TAIWAN, R.O.C.

EMI TESTING REPORT

EUT : ENERGY SAVING LAMPS

MODEL: SGEFL15/STEFL15/GEFL15/
TEFL15

FCCID: KQP03

PREPARED FOR:

CHUAN SHIH INDUSTRIAL CO., LTD.
NO. 59, SHING-KONG 4TH RD.,
TA-SHING INDUSTRIAL DISTRICT,
TIEN-CHUNG, CHANG-HUA,
TAIWAN, R.O.C.

PREPARED BY:

SPECTRUM RESEARCH & TESTING
LABORATORY INC.

NO. 101-10, LING 8, SHAN-TONG LI
CHUNG-LI CITY, TAOYUAN, TAIWAN, R.O.C.

TEL: (03) 4987684
FAX: (03) 4986528

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION.....	4
2. TEST STATEMENT	
2.1 TEST STATEMENT.....	5
2.2 DEPARTURE FROM DOCUMENT POLICIES, PROCEDURE OR SPECIFICATIONS.....	6
3. EUT MODIFICATIONS.....	7
4. MODIFICATION LETTER.....	8
5. CONDUCTED POWER LINE TEST	
5.1 TEST EQUIPMENT.....	9
5.2 TEST PROCEDURE.....	10-11
5.3 EUT OPERATING CONDITION.....	12
5.4 TEST PROCEDURE.....	13
5.5 TEST SETUP.....	14
5.6 RADIATED EMISSION LIMIT.....	15
5.7 CONDUCTED POWER LINE TEST RESULT.....	16-19
6. RADIATED EMISSION TEST	
6.1 TEST EQUIPMENT.....	20
6.2 CONFIGURATION OF THE EUT.....	21
6.3 EUT OPERATING CONDITION.....	21
6.4 TEST PROCEDURE.....	21
6.5 TEST SETUP.....	22-23
6.6 RADIATED EMISSION LIMIT.....	24
6.7 RADIATED EMISSION TEST RESULT.....	25-28
7. PHOTOS OF TESTING.....	29-50

1. TEST REPORT CERTIFICATION

APPLICANT : CHUAN SHIH INDUSTRIAL CO., LTD.ADDRESS : NO. 59, SHING-KONG 4TH RD.,
TA-SHING INDUSTRIAL DISTRICT,
TIEN-CHUNG, CHANG-HUA,
TAIWAN, R.O.C.EUT DESCRIPTION : ENERGY SAVING LAMPS(A) POWER SUPPLY : 120VAC(B) MODEL : SGEFL15/STEFL15/GEFL15/TEFL15(C) FCCID : KQP03FINAL TEST DATE : 09/02/1998

MEASUREMENT PROCEDURE USED :

PART 18 OF FCC RULES AND REGULATIONS
FCC / ANSI C63.4 - 1992 & MP-5

WE HEREBY SHOW THAT:

THE MEASUREMENTS SHOWN IN THE ATTACHMENT WERE
MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED,
AND THE ENERGY EMITTED BY THE EQUIPMENT WAS
FOUND TO BE WITHIN THE LIMITS APPLICABLE.TESTING ENGINEER : Taylor auth DATE 9/2/1998
Taylor HoSUPERVISOR : Jesse Ho DATE 9/2/1998
Jesse HoAPPROVED BY : Johnson Ho DATE 9/2/1998
Johnson Ho

2. TEST STATEMENT

2.1 TEST STATEMENT

TO whom it may concern,

This letter is to explain the EUT (Energy Saving Lamps) application. All circuit are same, except bulb size/ shape changed.

2. TEST STATEMENT

2.2 DEPARTURE FROM DOCUMENT POLICIES, PROCEDURE OR SPECIFICATIONS

DID HAVE
ANY DEPARTURE FROM DOCUMENT POLICIES
& PROCEDURES OR FROM SPECIFICATIONS.

YES _____, NO N/A .

IF YES, THE DESCRIPTION AS BELOW.

2.3 TEST STATEMENT

1. THE CERTIFICATE OR REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY.
2. THE REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT.

3. EUT MODIFICATIONS

THE FOLLOWING ACCESSORIES WERE ADDED TO THE EUT
DURING TESTING:

- 1). AC INPUT ADDED A X-CAP (0.1uf) AND SERIES INDUCTOR
(imp: 100uH).

4. MODIFICATION LETTER

THIS SECTION CONTAINS THE FOLLOWING DOCUMENTS:

A. LETTER OF MODIFICATIONS



川石照明工業股份有限公司

彰化縣田中鎮大新工業區新工四路59號

Manufacturer and Exporter

CHUAN SHIH INDUSTRIAL CO., LTD.

No.59, Shing-Kong 4th Rd., Ta-Shing Industrial

District, Tien-Chung, Chang-Hua, Taiwan, R.O.C.

TEL:04-8748130 FAX:04-8752064·8741584

Federal Communications Commission
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

To whom it may concern:

This is to serve as proper notice that our company agrees to make all modifications
to FCCID: KQP03

as listed in section 3.0 of the test report submitted by Spectrum Research and Testing
Laboratory, Inc.

Respectfully,

Effective Dates:

Lee, Lian-Fu
(Name, Surname)

From 9/01/98 to 9/01/99

Manager
(Position/Title)

DATE: 9/01/98

5. CONDUCTED POWER LINE TEST

5.1 TEST EQUIPMENT

THE FOLLOWING TEST EQUIPMENT WAS USED DURING THE CONDUCTED POWER LINE TEST :

EQUIPMENT/ FACILITIES	SPECIFICAT - IONS	MANUFACTURER	MODEL#/ SERIAL#	DATE OF CAL. & CAL. CENTER	DU E DATE
SPECTRUM ANALYZER	9 KHz TO 1 GHz	HP	8590L/ 3624A1317	OCT, 1997 HP	1Y
EMI TEST RECEIVER	9 KHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	OCT, 1997 ETC	1Y
LISN	50 uH, 50 ohm	SOLAR ELECTRONICS	9252-50- R24-BNC/ 951315	AUGUST, 1997 ETC	1Y
LISN	50 uH, 50 ohm	SOLAR ELECTRONICS	9252-50- R24-BNC/ 951318	AUGUST, 1997 ETC	1Y
SIGNAL GENERATOR	9 KHz TO 1080 MHz	ROHDE & SCHWARZ	SMY01/ 841104/019	APRIL, 1998 ITRI	1Y
POWER CONVERTER	0 TO 300 VAC 47 - 500 Hz	AFC	AFC-1KW/ 850510	APRIL, 1998 SRT	1Y

5.2 CONFIGURATION OF THE EUT

THE EUT WAS CONFIGURED ACCORDING TO ANSI C63.4 - 1992 & MP-5 ALL INTERFACE PORTS WERE CONNECTED TO THE APPROPRIATE PERIPHERALS. ALL PERIPHERALS AND CABLES ARE LISTED BELOW.

- EUT

DEVICE	MANUFACTURER	MODEL #	FCCID
ENERGY SAVING LAMPS	CHUAN SHIH INDUSTRIES CO., LTD.	SGEFL15/STEFL15/GEFL15/ TEFL15	KQP03

- REMARK- INTERNAL DEVICES

<u>DEVICE</u>	<u>MANUFACTURER</u>	<u>MODEL #</u>	<u>DoC/FCCID</u>
---------------	---------------------	----------------	------------------

-PERIPHERALS

DEVICE	MANUFACTURER	MODEL# / SERIAL#	FCCID	CABLE
N/A				

-REMARK

- (1). CABLE - UNS : UNSHIELDED CABLE
S : SHIELDED CABLE
- (2). CABLES - ALL 1m OR GREATER IN LENGTH-
BUNDLED ACCORDING TO ANSI C63.4 - 1992
& MP-5.

5.3 EUT OPERATING CONDITION


OPERATING CONDITION IS ACCORDING TO ANSI C63.4 - 1992
& MP-5.

1. EUT POWER ON.

5.4 TEST PROCEDURE

THE EUT WAS TESTED ACCORDING TO ANSI C63.4 - 1992 & MP-5. THE CONDUCTED TEST WAS PERFORMED IN AN ANECHOIC CHAMBER. THE FREQUENCY SPECTRUM FROM 0.45MHz TO 30MHz WAS INVESTIGATED. THE LISN USED WAS 50 ohm / 50 uHenry AS SPECIFIED BY SECTION 5.1 OF ANSI C63.4 - 1992 & MP-5. CABLES AND PERIPHERALS WERE MOVED TO FIND THE MAXIMUM EMISSION LEVELS FOR EACH FREQUENCY.

5.5 TEST SETUP

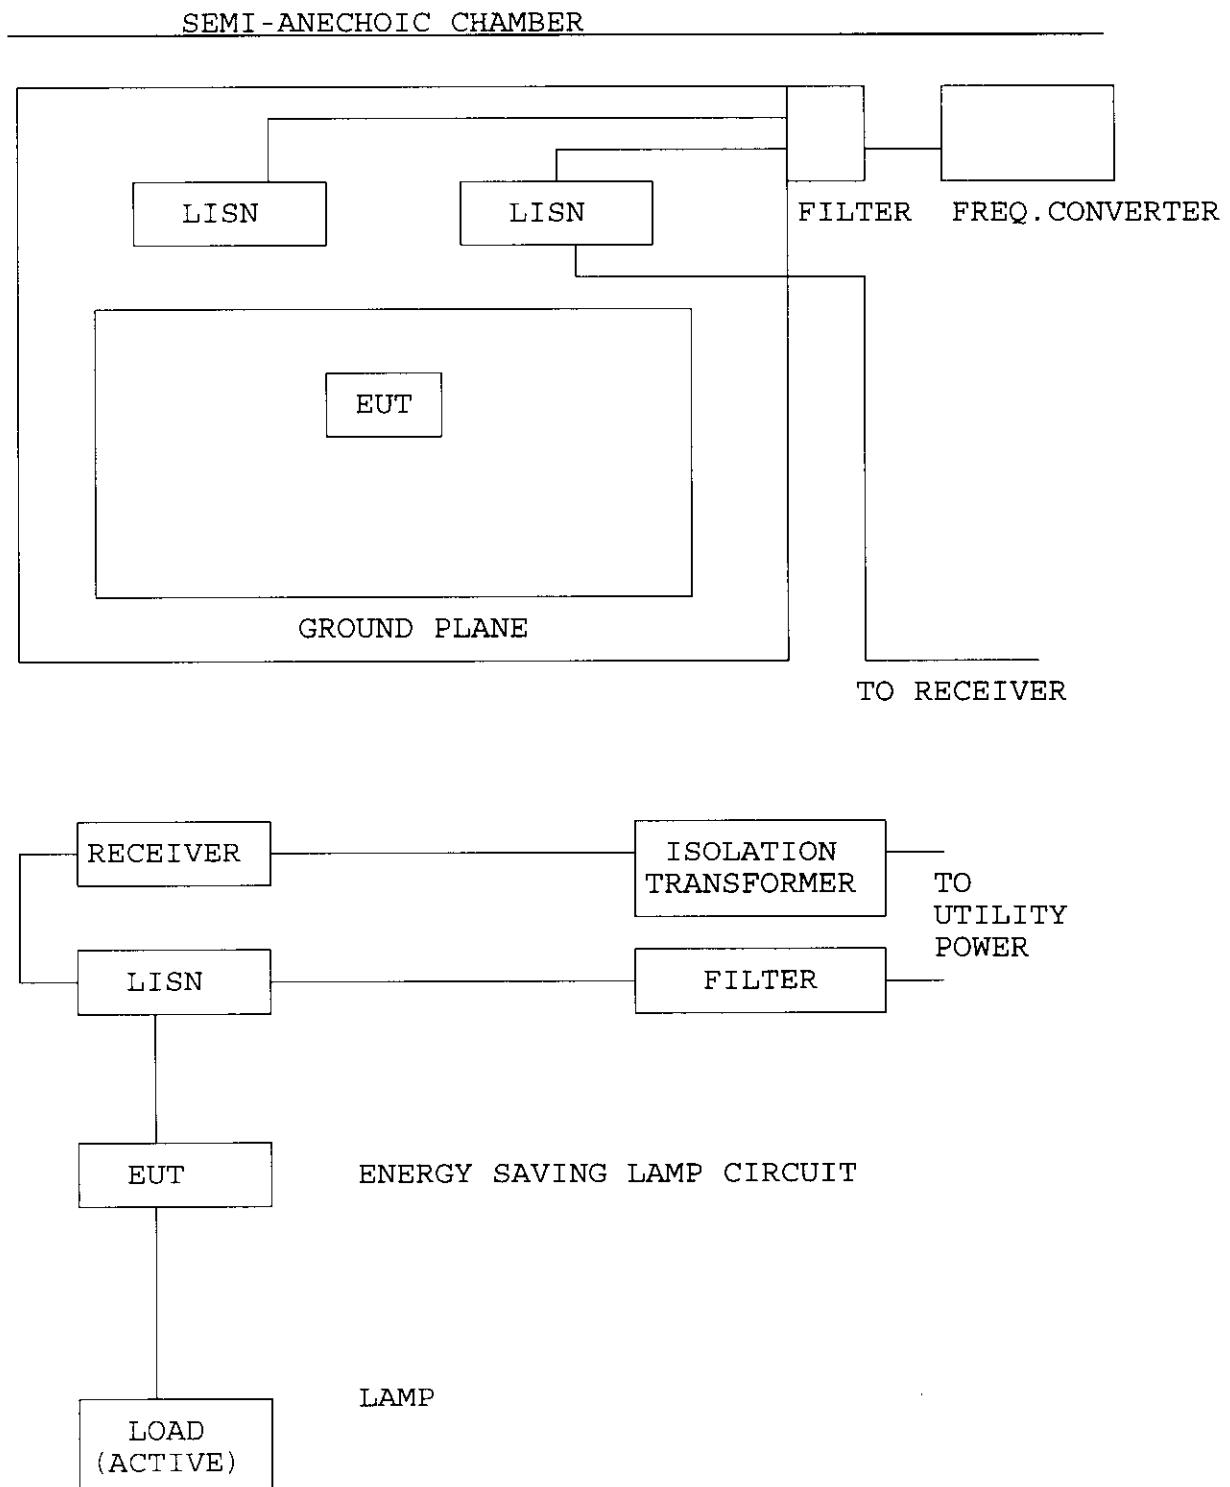

5.6 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY RANGE (MHz)	
0.045 - 1.705	250 uV
1.705 - 30	250 uV

NOTE : IN THE ABOVE TABLE, THE TIGHTER LIMIT APPLIES AT THE BAND EDGES.

5.7 CONDUCTED POWER LINE TEST RESULT

THE FREQUENCY SPECTRUM FROM 0.45 MHZ TO 30 MHZ WAS INVESTIGATED. ALL READINGS ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 9 KHZ.

TEMPERATURE : 28 C

HUMIDITY : 78 %RH

FREQUENCY (MHz)	LINE 1 (uv)	LINE 2 (uv)	LIMIT (uv)
0.52	*	68.39	250
0.58	121.6	*	250
0.76	51.88	*	250
0.92	*	139.6	250
3.07	*	51.88	250
9.70	21.88	*	250

REMARKS : (1) .* = MEMENT DOES NOT APPLY FOR THIS FREQUENCY

(2) .UNCERTAINTY IN CONDUCTED EMISSION MEASURED IS
<+/-2dB

(3) .SGEFL15

(4) .TEST CONFIGURATION PLEASE SEE 4.2

(5) .TEST EQUIPMENT PLEASE SEE 4.1

(6) .ANY DEPARTURE FROM SPECIFICATION:N/A

SIGNED BY TESTING ENGINEER : John A. Miller

5.7 CONDUCTED POWER LINE TEST RESULT

THE FREQUENCY SPECTRUM FROM 0.45 MHZ TO 30 MHZ WAS INVESTIGATED. ALL READINGS ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 9 KHZ.

TEMPERATURE : 28 C

HUMIDITY : 78 %RH

FREQUENCY (MHz)	LINE 1 (uv)	LINE 2 (uv)	LIMIT (uv)
0.49	*	92.26	250
0.60	123.0	*	250
0.86	*	85.11	250
0.96	112.2	*	250
1.03	102.3	*	250
10.4	*	60.26	250

REMARKS : (1).* = MEMENT DOES NOT APPLY FOR THIS FREQUENCY

(2).UNCERTAINTY IN CONDUCTED EMISSION MEASURED IS
 $<+/-2\text{dB}$

(3).STEFL15

(4).TEST CONFIGURATION PLEASE SEE 4.2

(5).TEST EQUIPMENT PLEASE SEE 4.1

(6).ANY DEPARTURE FROM SPECIFICATION:N/A

SIGNED BY TESTING ENGINEER : John Doe

5.7 CONDUCTED POWER LINE TEST RESULT

THE FREQUENCY SPECTRUM FROM 0.45 MHZ TO 30 MHZ WAS INVESTIGATED. ALL READINGS ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 9 KHZ.

TEMPERATURE : 28 C

HUMIDITY : 78 %RH

FREQUENCY (MHZ)	LINE 1 (uv)	LINE 2 (uv)	LIMIT (uv)
0.48	*	92.26	250
0.52	141.3	*	250
0.86	*	92.26	250
1.08	114.8	84.14	250
3.09	66.07	*	250
10.6	13.34	39.36	250

REMARKS : (1).* = MEMENT DOES NOT APPLY FOR THIS FREQUENCY

(2).UNCERTAINTY IN CONDUCTED EMISSION MEASURED IS
 $<+/-2\text{dB}$

(3).GEFL15

(4).TEST CONFIGURATION PLEASE SEE 4.2

(5).TEST EQUIPMENT PLEASE SEE 4.1

(6).ANY DEPARTURE FROM SPECIFICATION:N/A

SIGNED BY TESTING ENGINEER : John B. Smith

5.7 CONDUCTED POWER LINE TEST RESULT

THE FREQUENCY SPECTRUM FROM 0.45 MHZ TO 30 MHZ WAS INVESTIGATED. ALL READINGS ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 9 KHZ.

TEMPERATURE : 28 C

HUMIDITY : 78 %RH

FREQUENCY (MHz)	LINE 1 (uv)	LINE 2 (uv)	LIMIT (uv)
0.69	*	118.9	250
0.95	108.4	*	250
3.79	16.79	33.50	250
10.6	17.58	19.50	250
28.5	7.943	6.918	250

REMARKS : (1) . * = MEMENT DOES NOT APPLY FOR THIS FREQUENCY

(2) . UNCERTAINTY IN CONDUCTED EMISSION MEASURED IS
 $<+/-2\text{dB}$

(3).TEFL15

(4). TEST CONFIGURATION PLEASE SEE 4.2

(5) . TEST EQUIPMENT PLEASE SEE 4.1

(6) ANY DEPARTURE FROM SPECIFICATION: N/A

SIGNED BY TESTING ENGINEER : _____

6. RADIATED EMISSION TEST

6.1 TEST EQUIPMENT

THE FOLLOWING TEST EQUIPMENT WAS USED DURING THE
RADIATED EMISSION TEST :

EQUIPMENT / FACILITIES	SPECIFICAT -IONS	MANUFACTUR -ER	MODEL#/ SERIAL#	DATE OF CAL. & CAL. CENTER	DU E DA TE
RECEIVER	20 MHZ TO 1000 MHZ	R & S	ESVS 30/ 841977/003	APRIL, 1998 ITRI	1Y
SPECTRUM ANALYZER	100 Hz TO 1500 MHz	HP	8568B/ 3019A05294	OCT, 1997 ETC	1Y
SPECTRUM ANALYZER	9 KHz TO 22 GHz	HP	8593E/ 3322A00670	APRIL, 1998 ITRI	1Y
SPECTRUM ANALYZER	100 Hz TO 1000 MHz	IFR	A-7550/ 2684/1248	JULY, 1998 ETC	1Y
SIGNAL GENERATOR	9 KHz TO 1080 MHz	ROHDE & SCHWARZ	SMY01/ 841104/019	APRIL, 1998 ITRI	1Y
DIPOLE ANTENNA	28 MHZ TO 1000 MHz	EMCO	3121C/ 9003-535	DEC, 1997 SRT	1Y
DIPOLE ANTENNA	28 MHZ TO 1000 MHz	EMCO	3121C/ 9611-1239	DEC, 1997 SRT	1Y
BI-LOG ANTENNA	26 MHZ TO 2000 MHz	EMCO	3142/ 9509-1152	DEC, 1997 SRT	1Y
BI-LOG ANTENNA	26 MHZ TO 1100 MHz	EMCO	3143/ 9509-1152	DEC, 1997 SRT	1Y
PRE-AMPLIFIER	0.1 MHZ TO 1300 MHz	HP	8447D/ 2944A08402	APRIL, 1998 ITRI	1Y
PRE-AMPLIFIER	0.1 MHZ TO 1300 MHz	HP	8447D/ 2944A06412	OCT, 1997 ETC	1Y
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9012-3619	DEC, 1997 SRT	1Y

6.2 CONFIGURATION OF THE EUT

SAME AS SECTION 5.4 OF THIS REPORT.

NOT TESTED

6.3 EUT OPERATING CONDITION

SAME AS SECTION 5.3 OF THIS REPORT.

NOT TESTED


6.4 TEST PROCEDURE

THE EUT WAS TESTED ACCORDING TO ANSI C63.4 - 1992 & MP-5. THE RADIATED TEST WAS PERFORMED AT SRT LAB's OPEN SITE. THIS SITE IS ON FILE WITH THE FCC LABORATORY DIVISION, REFERENCE 31040/SIT.

THE FREQUENCY SPECTRUM FROM 30 MHz TO 1 GHz WAS INVESTIGATED. MEASUREMENTS WERE MADE AT THREE METERS WITH AN ADJUSTABLE DIPOLE ANTENNA. PERIPHERALS, CABLES, EUT ORIENTATION, AND ANTENNA HEIGHT WERE VARIED TO FIND THE MAXIMUM EMISSION FOR EACH FREQUENCY.


THE FREQUENCY SPECTRUM FROM 30 MHz TO 1 GHz WAS INVESTIGATED. THE MEASUREMENTS UNDER 1 GHz WITH RESOLUTION BANDWIDTH OF 120 KHz ARE QUASI-PEAK READING MADE AT THREE METERS USING AN ADJUSTABLE DIPOLE ANTENNA. PERIPHERALS, CABLES, EUT ORIENTATION, AND ANTENNA HEIGHT WERE VARIED TO FIND THE MAXIMUM EMISSION FOR EACH FREQUENCY.

6.5 RADIATED TEST SETUP

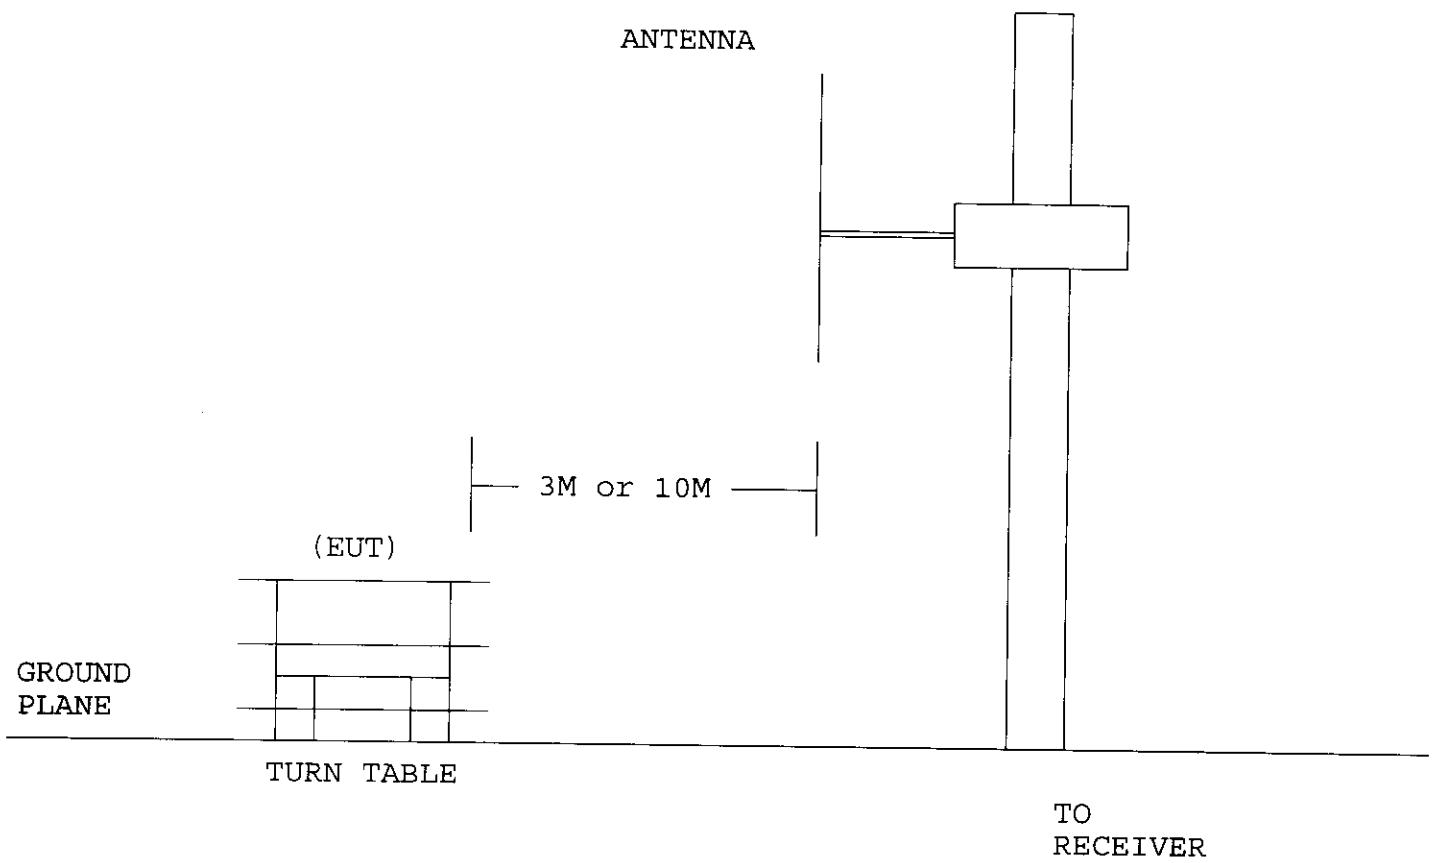

6.5 RADIATED TEST SETUP

* ANSI C63.4-1992

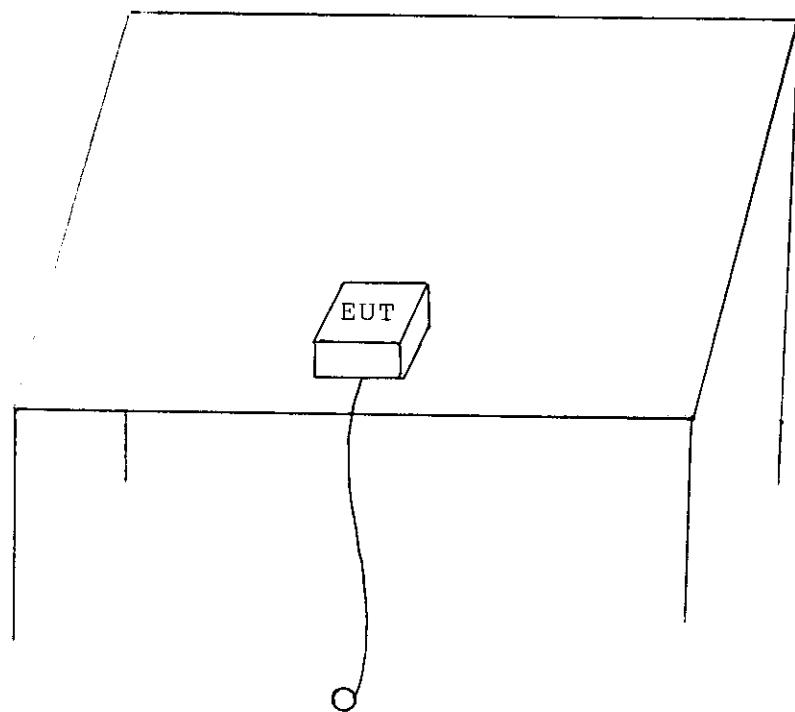

6.6 RADIATED EMISSION LIMIT

ALL EMISSION SHALL NOT EXCEED THE LEVEL OF FIELD STRENGTH SPECIFIED BELOW :

~~CLASS B~~

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (uV/m)
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
ABOVE 960	3	500

NOTE : 1. IN THE EMISSION TABLES ABOVE, THE TIGHTER LIMIT APPLIES AT THE BAND EDGES.

2. DISTANCE REFERS TO THE DISTANCE BETWEEN MEASURING INSTRUMENT, ANTENNA, AND THE CLOSEST POINT OF ANY PART OF THE DEVICE OR SYSTEM.

NO PART 18
SPEC
RADIATED LIMITS
REF TO

6.7 RADIATED EMISSION TEST RESULT

THE FREQUENCY SPECTRUM FROM 30 MHZ TO 1 GHZ WAS INVESTIGATED. ALL READINGS UNDER 1 GHZ ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 120 KHz. MEASUREMENTS WERE MADE AT 3 METERS. THE MEASUREMENTS ABOVE 1 GHZ WITH A RESOLUTION BANDWIDTH OF 1 MHz ARE PEAK READING AT A DISTANCE OF 3 METERS.

TEMPERATURE : 28 CHUMIDITY : 78 %RH

FREQ. (MHz)	CABLE LOSS (dB)	ANT. FACTOR (dB)	READING (dBuV)		EMISSION (uV)		LMTS (uV)
			HORIZ	VERT	HORIZ	VERT	
31.94	0.7	13.2	*	15.63	*	29.96	100
36.79	0.8	9.80	16.25	*	22.00	*	100
64.92	1.0	6.00	13.68	15.24	10.83	12.94	100
99.84	1.2	7.40	16.47	13.67	17.93	12.99	150
208.5	1.7	9.90	*	14.72	*	20.70	150
486.9	2.7	17.2	10.52	*	33.19	*	200

REMARKS : (1). MEASUREMENT DOES NOT APPLY FOR THIS FREQUENCY.

(2). THE MAXIMUM CONDITION WAS WITH THE MONITOR POWER CORD CONNECTED TO THE PERSONAL COMPUTER.

(3). SAMPLE CALCULATION

 $20 \log(\text{EMISSION}) \text{ uV/m} = \text{CABLE LOSS (dB)} + \text{FACTOR (dB)} + \text{READING (dBuV/m)}$

(4). SGEFL15

(5). TEST EQUIPMENT PLEASE SEE 5.1

(6). UNCERTAINTY IN RADIATED EMISSION MEASURED IS <+/-4dB(7). ANY DEPARTURE FROM SPECIFICATION: N/A

SIGNED BY TESTING ENGINEER : _____

6.7 RADIATED EMISSION TEST RESULT

THE FREQUENCY SPECTRUM FROM 30 MHZ TO 1 GHZ WAS INVESTIGATED. ALL READINGS UNDER 1 GHZ ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 120 KHz. MEASUREMENTS WERE MADE AT 3 METERS. THE MEASUREMENTS ABOVE 1 GHZ WITH A RESOLUTION BANDWIDTH OF 1 MHz ARE PEAK READING AT A DISTANCE OF 3 METERS.

TEMPERATURE : 28 C HUMIDITY : 78 %RH

FREQ. (MHz)	CABLE LOSS (dB)	ANT. FACTOR (dB)	READING (dBuV)		EMISSION (uV)		LMTS (uV)
			HORIZ	VERT	HORIZ	VERT	
30.00	0.7	13.2	*	17.40	*	36.73	100
36.79	0.8	9.80	16.15	*	21.75	*	100
60.07	1.0	6.00	15.13	*	12.78	*	100
64.92	1.0	6.00	*	18.14	*	18.07	100
387.0	2.2	14.9	11.70	*	27.54	*	200
932.1	3.9	22.3	*	10.82	*	70.96	200

REMARKS : (1). MEASUREMENT DOES NOT APPLY FOR THIS FREQUENCY.

(2). THE MAXIMUM CONDITION WAS WITH THE MONITOR POWER CORD CONNECTED TO THE PERSONAL COMPUTER.

(3). SAMPLE CALCULATION
 $20 \log(\text{EMISSION}) \text{ uV/m} = \text{CABLE LOSS (dB)} + \text{FACTOR (dB)} + \text{READING (dBuV/m)}$

(4). STEFL15

(5). TEST EQUIPMENT PLEASE SEE 5.1

(6). UNCERTAINTY IN RADIATED EMISSION MEASURED IS <+/-4dB

(7). ANY DEPARTURE FROM SPECIFICATION:N/A

SIGNED BY TESTING ENGINEER : _____

6.7 RADIATED EMISSION TEST RESULT

THE FREQUENCY SPECTRUM FROM 30 MHz TO 1 GHz WAS INVESTIGATED. ALL READINGS UNDER 1 GHz ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 120 KHz. MEASUREMENTS WERE MADE AT 3 METERS. THE MEASUREMENTS ABOVE 1 GHz WITH A RESOLUTION BANDWIDTH OF 1 MHz ARE PEAK READING AT A DISTANCE OF 3 METERS.

TEMPERATURE : 28 C HUMIDITY : 78 %RH

FREQ. (MHz)	CABLE LOSS (dB)	ANT. FACTOR (dB)	READING (dBuV)		EMISSION (uV)		LMTS (uV)
			HORIZ	VERT	HORIZ	VERT	
31.94	0.7	13.2	*	15.63	*	29.96	100
36.79	0.8	9.80	16.25	*	22.00	*	100
64.92	1.0	6.00	13.69	15.24	10.83	12.94	100
99.84	1.2	7.40	16.47	13.67	17.93	12.99	150
208.5	1.7	9.90	*	14.72	*	20.70	150
486.9	2.7	17.2	10.52	*	33.19	*	200

REMARKS : (1). MEASUREMENT DOES NOT APPLY FOR THIS FREQUENCY.

(2). THE MAXIMUM CONDITION WAS WITH THE MONITOR POWER CORD CONNECTED TO THE PERSONAL COMPUTER.

(3). SAMPLE CALCULATION

20 LOG(EMISSION) uV/m = CABLE LOSS (dB) + FACTOR (dB) + READING (dBuV/m)

(4). GEFL15

(5). TEST EQUIPMENT PLEASE SEE 5.1

(6). UNCERTAINTY IN RADIATED EMISSION MEASURED IS $\pm 4\text{dB}$

(7). ANY DEPARTURE FROM SPECIFICATION:N/A

SIGNED BY TESTING ENGINEER :

6.7 RADIATED EMISSION TEST RESULT

THE FREQUENCY SPECTRUM FROM 30 MHz TO 1 GHz WAS INVESTIGATED. ALL READINGS UNDER 1 GHz ARE QUASI-PEAK VALUES WITH A RESOLUTION BANDWIDTH OF 120 kHz. MEASUREMENTS WERE MADE AT 3 METERS. THE MEASUREMENTS ABOVE 1 GHz WITH A RESOLUTION BANDWIDTH OF 1 MHz ARE PEAK READING AT A DISTANCE OF 3 METERS.

TEMPERATURE : 28 C HUMIDITY : 78 %RH

FREQ. (MHz)	CABLE LOSS (dB)	ANT. FACTOR (dB)	READING (dBuV)		EMISSION (uV)		LMTS (uV)
			HORIZ	VERT	HORIZ	VERT	
31.94	0.7	13.2	*	20.93	*	55.14	100
36.79	0.8	9.80	15.45	*	20.07	*	100
60.07	1.0	6.00	*	16.43	*	14.84	100
173.6	1.7	9.10	24.22	*	56.36	*	150
396.7	2.2	15.6	*	13.76	*	37.84	200
686.7	3.3	20.1	11.03	*	52.66	*	200

REMARKS : (1). MEASUREMENT DOES NOT APPLY FOR THIS FREQUENCY.

(2). THE MAXIMUM CONDITION WAS WITH THE MONITOR POWER CORD CONNECTED TO THE PERSONAL COMPUTER.

(3). SAMPLE CALCULATION
 $20 \log(\text{EMISSION}) \text{ uV/m} = \text{CABLE LOSS (dB)} + \text{FACTOR (dB)} + \text{READING (dBuV/m)}$

(4). TEFL15

(5). TEST EQUIPMENT PLEASE SEE 5.1

(6). UNCERTAINTY IN RADIATED EMISSION MEASURED IS <+/-4dB

(7). ANY DEPARTURE FROM SPECIFICATION: N/A

SIGNED BY TESTING ENGINEER : John Smith