



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.: A03052211
Report No.: FCDA03052211
Page: 1 of 23
Date: Jul. 29, 2003

Product Name: Energy Saving Lamp
Model No.: SE-18T, SE-23T, SE-27T
Applicant: Chuan Shih Industrial Corporation Ltd.
No. 59, Shing-Kong 4th Rd., Ta-Shing Industrial District,
Tien-Chung, Chang-Hua, Taiwan, R.O.C.
Date of Receipt: May 22, 2003
Finished date of Test: Jun. 11, 2003
Applicable Standards: 47 CFR Part 18
ANSI C63.4:1992
MP-5

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By :

Sunyou Chen
(Sunyou Chen)

Date:

7/29/2003

Approved By :

JH
(Johnson Ho, Director)

Date:

7/29/2003



Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3	DESCRIPTION OF TEST MODE.....	5
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS	5
4.	CONDUCTED EMISSION TEST	6
4.1	CONDUCTED EMISSION LIMIT.....	6
4.2	TEST EQUIPMENT.....	6
4.3	TEST SETUP	7
4.4	TEST PROCEDURE	7
4.5	EUT OPERATING CONDITION	7
4.6	TEST RESULT	8
5.	RADIATED EMISSION TEST	11
5.1	RADIATED EMISSION LIMIT.....	11
5.2	TEST EQUIPMENT.....	11
5.3	TEST SET-UP.....	12
5.4	TEST PROCEDURE	13
5.5	EUT OPERATING CONDITION	13
5.6	RADIATED EMISSION TEST RESULT	14
6.	PHOTOS OF TESTING.....	17
7.	TERMS OF ABRIVATION.....	23

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.: A03052211 Report No.: FCDA03052211 Page: 3 of 23 Date: Jul. 29, 2003
--	----------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.: A03052211 Report No.: FCDA03052211 Page: 4 of 23 Date: Jul. 29, 2003
--	----------------------	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Energy Saving Lamp
MODEL NO.	SE-18T, SE-23T, SE-27T
POWER SUPPLY	120Vac/60Hz
CABLE	N/A

NOTE :

The EUT has three model numbers as below on market. They are identical in all aspects except for the following:

Mode No.	Output
SE-18T	18W
SE-23T	23W
SE-27T	27W

Working Frequency: 43 kHz

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

NOTE :

1. The highest clock is 40kHz and 50kHz.
2. Frequency range to be measured.
Radiated emission is 30 MHz to 1 GHz.

2.3 DESCRIPTION OF TEST MODE

The EUT was pre-tested under the following luminous:

High
 Middle
 Low

The worst emission was found under “Middle” and therefore the test data of only this mode is recorded.

The EUT was tested under the following modes:

Mode	Model No.
1	SE-18T
2	SE-23T
3	SE-27T

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:1992 and CISRP 22:1997. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID / DOC	CABLE
	N/A				

NOTE : For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ISM and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 18
 ANSI C63.4:1992
 MP-5

All tests have been performed and recorded as per the above standards.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.: A03052211 Report No.: FCDA03052211 Page: 6 of 23 Date: Jul. 29, 2003
--	----------------------	--

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION LIMIT

FCC §18.307 (c) RF lighting devices conducted emission limits:

FREQUENCY (MHz)	Class B (dB μ V)
	Quasi-peak
0.45 - 2.51	48.0
2.51 - 3.0	69.5
3.0 - 30.0	48.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.45 to 30 MHz.

4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	JUL. 2003 R&S
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	8012-50-R-24-BNC / 924839	JUN. 2004 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2004 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	JUN. 2004 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2003 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	APR. 2004 SRT
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	APR. 2004 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.3 TEST SETUP

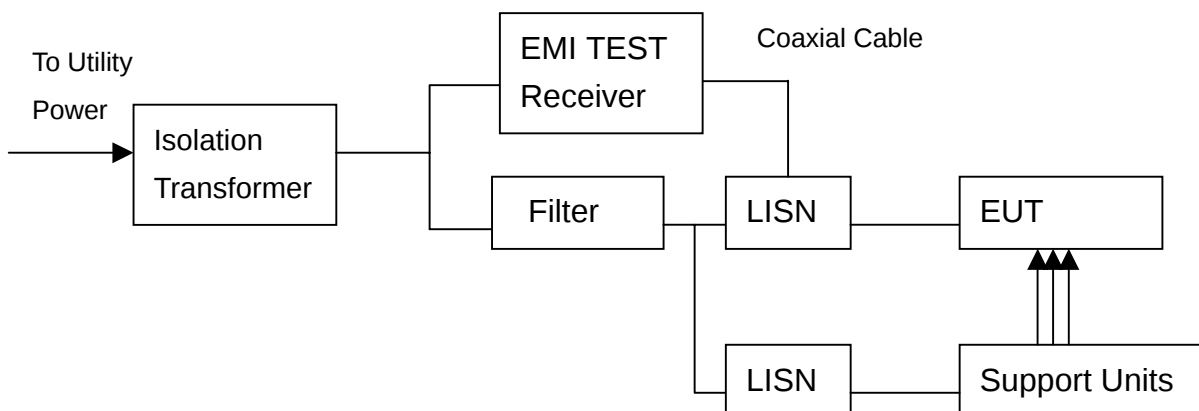

NOTE:

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 951318.
4. The serial no. of the LISN connected to support units is 924839.

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:1992 and CISRP 22:1997. The frequency spectrum from 0.45 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.5 EUT OPERATING CONDITION

EUT power on.



TEST REPORT

4.6 TEST RESULT

Temperature:	24 °C	Humidity:	54 %RH
Ferquency Range:	0.45 – 30 MHz	Test Mode:	1 (SE-18T)
Receiver Detector:	Q.P.	Tested By:	Jack Wang
		Tested Date:	Jun. 06, 2003

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.544	0.20	25.0	25.2	48.0	-22.8
0.782	0.20	19.1	19.3	48.0	-28.7
1.446	0.20	10.3	10.5	48.0	-37.5
3.071	0.20	19.5	19.7	48.0	-28.3
6.388	0.34	6.5	6.8	48.0	-41.2
10.661	0.41	5.2	5.6	48.0	-42.4

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.485	0.20	25.3	25.5	48.0	-22.5
0.786	0.20	21.4	21.6	48.0	-26.4
1.450	0.20	12.5	12.7	48.0	-35.3
3.016	0.20	21.6	21.8	48.0	-26.2
3.677	0.26	8.4	8.7	48.0	-39.3
10.485	0.41	3.6	4.0	48.0	-44.0

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	24 °C	Humidity:	54 %RH
Ferquency Range:	0.45 – 30 MHz	Test Mode:	2 (SE-23T)
Receiver Detector:	Q.P.	Tested By:	Jack Wang
		Tested Date:	Jun. 06, 2003

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.677	0.20	17.7	17.9	48.0	-30.1
0.950	0.20	9.0	9.2	48.0	-38.8
3.380	0.23	12.9	13.1	48.0	-34.9
8.243	0.37	4.6	5.0	48.0	-43.0
10.735	0.41	4.1	4.5	48.0	-43.5
28.649	0.77	7.1	7.9	48.0	-40.1

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.473	0.20	18.8	19.0	48.0	-29.0
1.009	0.20	12.1	12.3	48.0	-35.7
2.091	0.20	11.1	11.3	48.0	-36.7
3.231	0.22	21.7	21.9	48.0	-26.1
3.700	0.27	13.0	13.3	48.0	-34.7
9.149	0.38	4.0	4.4	48.0	-43.6

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	24 °C	Humidity:	54 %RH
Ferquency Range:	0.45 – 30 MHz	Test Mode:	3 (SE-27T)
Receiver Detector:	Q.P.	Tested By:	Jack Wang
		Tested Date:	Jun. 06, 2003

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBμV)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.458	0.20	26.5	26.7	48.0	-21.3
0.868	0.20	12.9	13.1	48.0	-34.9
3.321	0.23	6.5	6.7	48.0	-41.3
10.138	0.40	8.8	9.2	48.0	-38.8
10.501	0.41	9.6	10.0	48.0	-38.0
28.466	0.77	14.3	15.1	48.0	-32.9

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBμV)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)
		Q.P.	Q.P.	Q.P.	Q.P.
0.462	0.20	26.2	26.4	48.0	-21.6
0.876	0.20	13.8	14.0	48.0	-34.0
5.919	0.33	5.5	5.8	48.0	-42.2
10.009	0.40	8.1	8.5	48.0	-39.5
10.798	0.41	9.0	9.4	48.0	-38.6
27.567	0.75	8.3	9.1	48.0	-39.0

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.: A03052211 Report No.: FCDA03052211 Page: 11 of 23 Date: Jul. 29, 2003
--	----------------------	---

5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC §18.301 (c) RF lighting devices radiated emission limits:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 1000	3	46.0

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2003 R&S
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2004 SRT
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2004 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	JUL. 2003 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-1KW/ 860612	JUL. 2003 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



5.3 TEST SET-UP

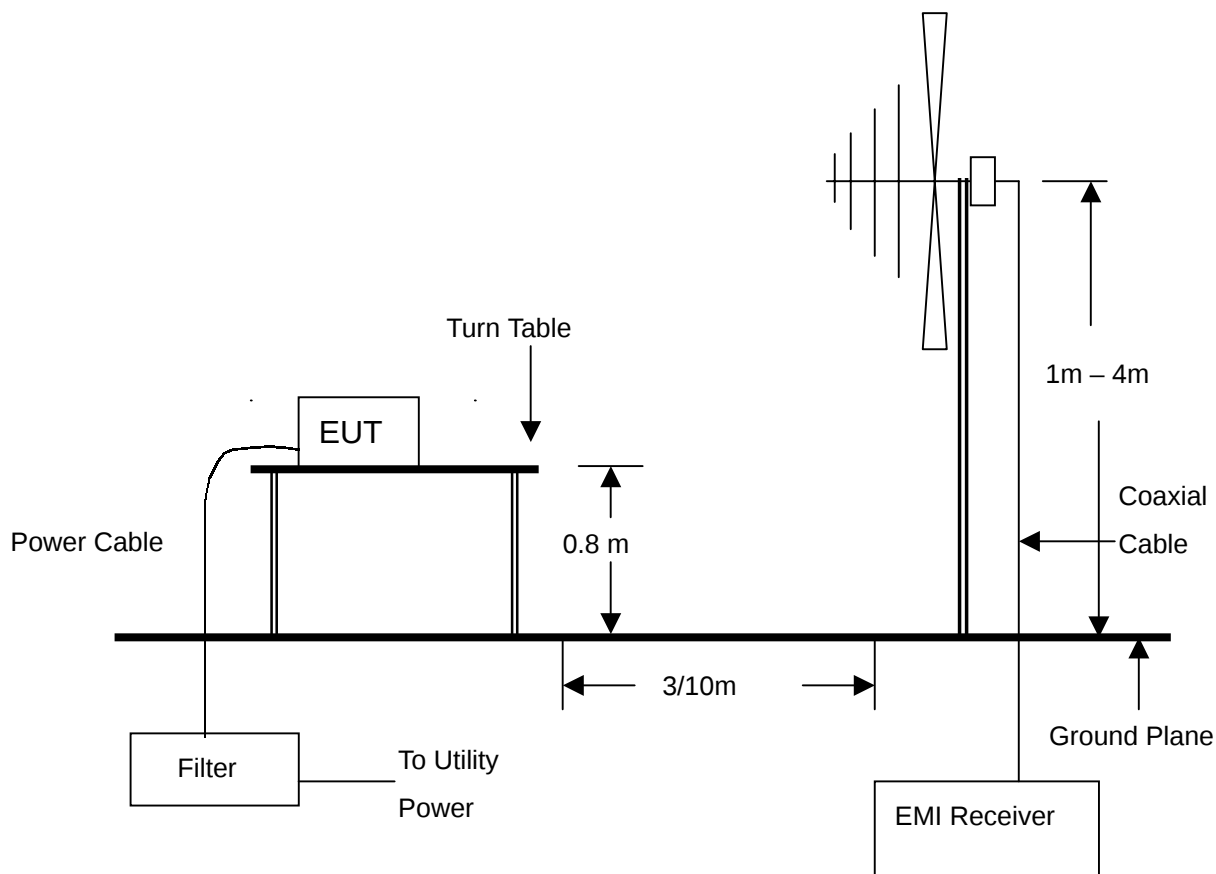

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:1992 and CISPR 22:1997. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.

5.6 RADIATED EMISSION TEST RESULT

Temperature:	28 °C	Humidity:	60 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	1 (SE-18T)
Tested By:	Jack Wang	Tested Date:	Jun. 11, 2003

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
42.3820	1.29	13.68	9.5	24.5	40.0	-15.5	284.5	1.2
67.0084	1.03	8.21	20.3	29.5	40.0	-10.5	293.2	1.2
93.2650	1.08	8.46	18.7	28.2	43.5	-15.3	184.6	1.2
128.9420	1.36	8.22	18.2	27.8	43.5	-15.7	172.3	1.3
143.0046	1.43	8.49	16.8	26.7	43.5	-16.8	295.1	1.3
181.4260	1.61	9.84	17.3	28.7	43.5	-14.8	173.2	1.4

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
50.3280	1.07	10.80	21.3	33.2	40.0	-6.8	82.4	1.0
66.4930	1.02	8.28	22.8	32.1	40.0	-7.9	75.1	1.0
114.7030	1.29	8.42	16.4	26.1	43.5	-17.4	325.6	1.0
128.9420	1.36	8.22	16.7	26.3	43.5	-17.2	322.3	1.2
141.2830	1.42	8.43	16.3	26.1	43.5	-17.4	328.2	1.2
207.8430	1.66	10.78	17.4	29.8	43.5	-13.7	78.4	1.3

NOTE :

1. Measurement uncertainty is +/-4dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



TEST REPORT

Temperature:	28 °C	Humidity:	60 %RH
Frequency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	2 (SE-23T)
Tested By:	Jack Wang	Tested Date:	Jun. 11, 2003

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
45.6270	1.21	12.60	12.8	26.6	40.0	-13.4	295.2	1.2
64.3190	1.01	8.42	20.1	29.5	40.0	-10.5	283.5	1.2
93.5070	1.08	8.46	18.2	27.7	43.5	-15.8	176.3	1.2
112.6280	1.28	8.46	18.5	28.2	43.5	-15.3	193.6	1.3
128.7920	1.36	8.22	19.3	28.9	43.5	-14.6	179.3	1.3
206.4920	1.65	10.74	19.7	32.1	43.5	-11.4	184.2	1.4

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
50.0026	1.07	10.80	23.0	34.9	40.0	-5.1	83.2	1.0
64.7250	1.01	8.42	24.8	34.2	40.0	-5.8	79.5	1.0
117.5190	1.32	8.36	20.1	29.8	43.5	-13.7	326.4	1.2
170.8290	1.59	9.60	19.7	30.9	43.5	-12.6	322.7	1.2
194.2760	1.61	10.32	20.3	32.2	43.5	-11.3	83.2	1.3
226.9170	1.82	11.60	20.6	34.0	46.0	-12.0	76.8	1.4

NOTE :

1. Measurement uncertainty is +/-4dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



TEST REPORT

Temperature:	28 °C	Humidity:	60 %RH
Frequency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	3 (SE-27T)
Tested By:	Jack Wang	Tested Date:	Jun. 11, 2003

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
43.0520	1.27	13.32	12.3	26.9	40.0	-13.1	281.6	1.2
52.1730	1.05	10.38	19.6	31.0	40.0	-9.0	276.2	1.2
64.1920	1.01	8.42	22.1	31.5	40.0	-8.5	184.5	1.2
93.4380	1.08	8.46	20.4	29.9	43.5	-13.6	174.1	1.3
157.6270	1.55	9.05	22.9	33.5	43.5	-10.0	292.3	1.3
334.7920	2.22	15.07	16.5	33.8	46.0	-12.2	271.6	1.6

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
37.5120	1.34	15.90	15.2	32.4	40.0	-7.6	315.2	1.0
47.8050	1.15	11.88	18.5	31.5	40.0	-8.5	324.6	1.0
64.1920	1.01	8.42	23.9	33.3	40.0	-6.7	79.5	1.2
79.5240	1.13	8.00	21.6	30.7	40.0	-9.3	83.2	1.2
109.3480	1.25	8.51	21.3	31.1	43.5	-12.4	333.6	1.3
161.6180	1.57	9.24	22.4	33.2	43.5	-10.3	324.5	1.3

NOTE :

1. Measurement uncertainty is +/-4dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



6. PHOTOS OF TESTING

- Conducted test (Mode 1)





**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.: A03052211
Report No.: FCDA03052211
Page: 18 of 23
Date: Jul. 29, 2003

- Conducted test (Mode 2)





**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.: A03052211
Report No.: FCDA03052211
Page: 19 of 23
Date: Jul. 29, 2003

- Conducted test (Mode 3)





- Radiated test (Mode 1)







- Radiated test (Mode 2)





- Radiated test (Mode 3)

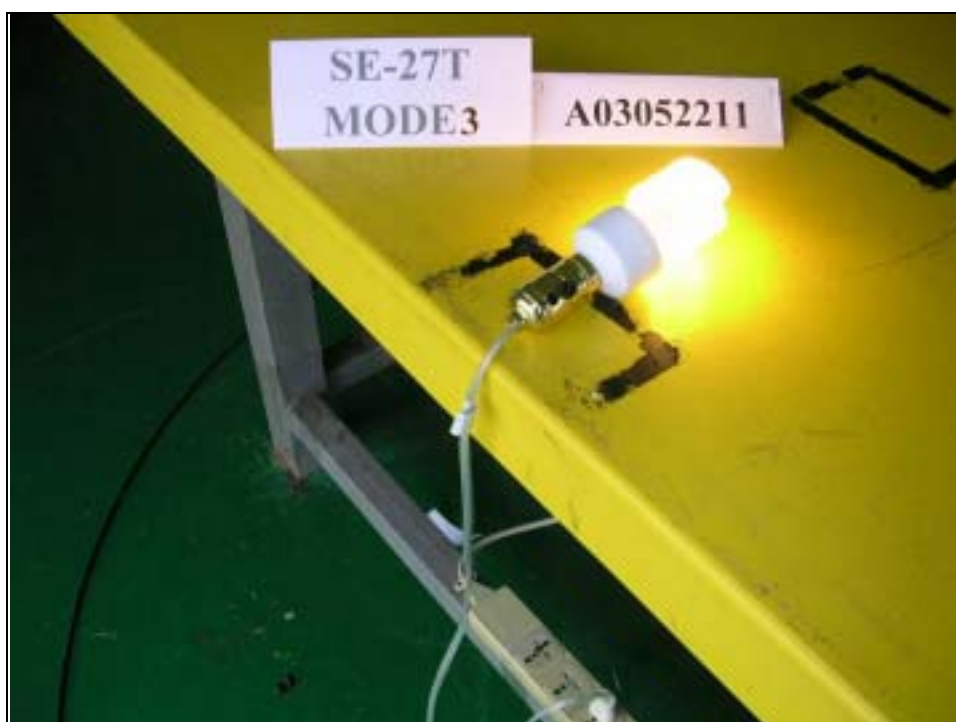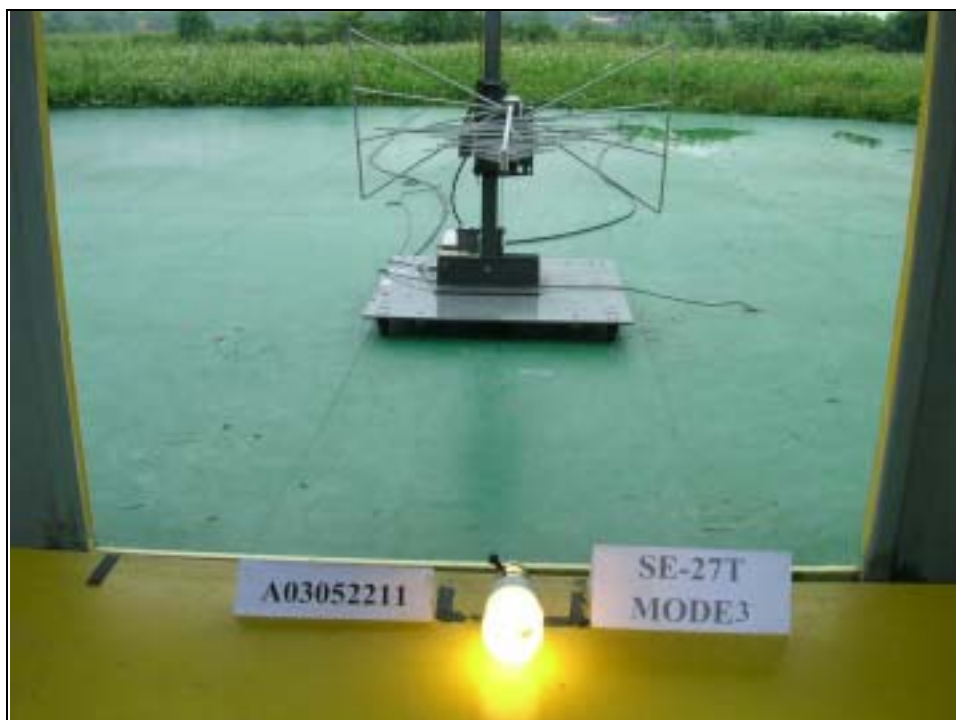

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.: A03052211 Report No.: FCDA03052211 Page: 23 of 23 Date: Jul. 29, 2003
--	----------------------	---

7. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction