



Test Report No.: <i>Prüfbericht-Nr.:</i>		JP24T1J5 001	Order No.: <i>Auftrags-Nr.:</i>	150301859	Page 1 of 67 <i>Seite 1 von 67</i>
Client Reference No.: <i>Kunden-Referenz-Nr.:</i>		N/A	Order Date: <i>Auftragsdatum:</i>	2024-11-29	
Client: <i>Auftraggeber:</i>		A&D Co Ltd 1-243 Asahi, Kitamoto-city, Saitama, 364-8585, Japan			
Test Item: <i>Prüfgegenstand:</i>		Digital Blood Pressure Monitor			
Identification / Type No.: <i>Bezeichnung / Typ-Nr.:</i>		UA-651BLE, UA-651CNBLE (*)	Serial No.: <i>Serien-Nr.:</i>	See clause 4.3	
Order Content: <i>Auftrags-Inhalt:</i>		Wireless Testing			
Test Specification: <i>Prüfgrundlage:</i>		FCC 47 CFR Part 15, Subpart C, Section 15.247 RSS-247 (Issue 3): 2023			
Date of Sample Receipt: <i>Wareneingangsdatum:</i>		2025-01-14			
Test Sample No.: <i>Prüfmuster-Nr.:</i>		A003909758-001, -002, -003, -004, -005			
Testing Period: <i>Prüfzeitraum:</i>		2025-01-20 to 2025-01-24			
Place of Testing: <i>Ort der Prüfung:</i>		Yokohama EMC Laboratory			
Testing Laboratory: <i>Prüflaboratorium:</i>		TÜV Rheinland Japan Ltd.			
Test Result*: <i>Prüfergebnis*:</i>		Pass			
compiled by: <i>zusammengestellt von:</i>		authorized by: <i>genehmigt von:</i>			
Date: 2025-02-10 <i>Datum:</i>		Issue Date: 2025-02-10 <i>Ausstellungsdatum:</i>		Pin Zhang	
Position / Stellung:		Position / Stellung:		Authorizer	
Position / Stellung:		Position / Stellung:		Project Engineer	
Other / Sonstiges: (*) The model number varies depending on the destination. UA-651BLE is the model for U.S.A and UA-651CNBLE is the model for Canada. All wireless structures, including digital circuits and PCB, are the same.					
Condition of the test item at delivery: <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>		Test item complete and undamaged <i>Prüfmuster vollständig und unbeschädigt</i>			
* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested * Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet					
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. <i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i>					

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 2 of 67
Seite 2 von 67

Revisions

Report No.	Issue date	Changes / Remarks
JP24T1J5 001	2025-02-10	Original document

Remarks

1	The equipment used during the specified testing period was calibrated according to the test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of the laboratory's management system.
2	Unless otherwise specified by the applied standard(s), the decision rule used in this test report for statements of conformity based on numerical measurement results is the "Zero Guard Band"/"Simple Acceptance" rule in accordance with ILAC G8:2019 and IEC Guide 115:2021. When the "Zero Guard Band" rule is applied, measurement uncertainty is not taken in account. For additional information on the risk resulting from the application of the "Zero Guard Band" decision rule, refer to ILAC G8:2019.

Contents

1.	General Remarks	5
1.1	Test Specifications	5
1.2	Test Report Purpose	6
1.3	Complementary Materials	6
2.	Test Sites	7
2.1	Test Facilities	7
2.2	List of Test and Measurement Instruments	7
2.3	Measurement Uncertainty	9
3.	General Product Information	10
3.1	Product Function and Intended Use	10
3.2	Ratings and System Details	10
3.3	Noise Generating and Noise Suppressing Parts	11
3.4	Submitted Documents and Information	11
4.	Test Setup and Operation Modes	12
4.1	Principle of Test Configuration Selection	12
4.2	Operation Modes	12
4.3	Physical Configuration for Testing	13
4.4	Test Software	14
4.5	Special Accessories and Auxiliary Equipment	15
4.6	Countermeasures to achieve Compliance	15
5.	Test Results R A D I O	16
5.1	Supply Voltage Requirements	16
5.2	Antenna Requirements	17
5.3	Restricted Bands of Operation	18
5.4	Maximum Peak Output Power	19
5.5	6dB Bandwidth	21
5.6	99% Bandwidth	26
5.7	Conducted Spurious Emissions	31
5.8	Peak Power Spectral Density	38
5.9	Radiated Spurious Emissions of Transmitter	43
5.10	AC Power Line Conducted Emission of Transmitter	58
6.	Photographs of the Test Setup	60
7.	List of Tables	65

Test Report No.: Prüfbericht-Nr.:	JP24T1J5 001	Page 4 of 67 Seite 4 von 67
--------------------------------------	---------------------	--------------------------------

8.	List of Figures	65
9.	List of Photographs	66

1. General Remarks

1.1 Test Specifications

Table 1: Test Summary

Test	Specifications	Result
Radio: FCC 47 CFR Part 15, Subpart C, Section 15.247 RSS-247 (Issue 3): 2023 RSS-Gen (Issue 5): 2018+Amendment 1:2019+Amendment 2:2021 ANSI C63.10-2020 KDB Publication No. 558074 D01 (v05r02): Guidance for Compliance Measurement on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operation under Section 15.247 of the FCC Rules		
Supply Voltage Requirements FCC §15.31(e)	See the section 5.1.	Pass
Antenna Requirements FCC §15.203	See the section 5.2.	Pass
Restricted Bands of Operation FCC §15.205 RSS-Gen §8.10	See the section 5.3.	Pass
Maximum Peak Output Power FCC §15.247(b)(3) RSS-247 §5.4 d.	1W (30dBm) (Peak Conducted) 4W (36dBm) (Peak EIRP) for ISED	Pass
6dB Bandwidth FCC §15.247(a)(2) and §15.215(c) RSS-247 §5.2 a.	Minimum 500kHz 6dB bandwidth shall be contained within the designated frequency band.	Pass
99% Bandwidth RSS-Gen §6.7	-/-	For. Ref.
Conducted Spurious Emissions FCC §15.247(d) RSS-247 §5.5	20dBc 30MHz - 25GHz (10 th Harmonics)	Pass
Peak Power Spectral Density FCC §15.247(e) RSS-247 §5.2 b.	8dBm in any 3kHz band	Pass
Radiated Spurious Emissions of Transmitter FCC §15.209 and §15.247(d) RSS-247 §5.5 and RSS-Gen §8.9, 8.10	9kHz - 25GHz	Pass

Test Report No.:
Prüfbericht-Nr.: **JP24T1J5 001**

Page 6 of 67
Seite 6 von 67

Test	Specifications	Result
Conducted Emission on AC Power Ports of Transmitter FCC §15.207(a) and RSS-Gen §8.8	150kHz - 30MHz	Pass

1.2 Test Report Purpose

The purpose of this test report is to show compliance of the EUT (Equipment Under Test) with the requirements of the standards listed in section 1.1.

1.3 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. – Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The test facility is accredited by VLAC (member of ILAC) under accreditation number VLAC-017-1 according to ISO/IEC 17025:2017.

The test facility is recognized by the Federal Communications Commission (FCC) as a Conformity Assessment Body under designation number JP0017 and test firm registration number 386498.

The test site is registered by Innovation, Science and Economic Development Canada (ISED) under OATS filing number 3466B-1.

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equip. ID	Cal. Interval	Cal. Date	Next Cal.
For Antenna Port Conducted Emission							
EMI Receiver	Rohde & Schwarz	ESW 26	101316	RF-0812	1 year	2024-05-29	2025-05-29
RF Power Meter	Agilent	N1911A	MY45101737	RF-0393	1 year	2025-01-17	2026-01-17
RF Peak Power Sensor	Agilent	N1921A	MY45242228	RF-0394	1 year	2025-01-17	2026-01-17
For Power Port Conducted Emission (CE)							
Path Loss Correction Factors for CE	-	-	-	RF-0597	1 year	2024-01-30	2025-01-30
CE Measurement Software	Toyo Corporation	ES10/CE-AJ	0700-0183-35	RF-1262	N/A	N/A	N/A
EMI Receiver EPL1000	Rohde & Schwarz	EPL1000	100969	RF-1249	1 year	2024-05-22	2025-05-22
LISN	Rohde & Schwarz	ENV216	100276	RF-0016	1 year	2024-05-21	2025-05-21
LISN	Rohde & Schwarz	ENV216	101958	RF-0708	1 year	2024-05-21	2025-05-21
For Radiated Emission (RE)							
Path Loss Correction Factors for RE below 1GHz	-	-	-	RF-0596	1 year	2024-01-30	2025-01-30

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 8 of 67
Seite 8 von 67

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equip. ID	Cal. Interval	Cal. Date	Next Cal.
Path Loss Correction Factors for RE above 1GHz	-	-	-	RF-0995	1 year	2024-12-03	2025-12-03
RE Meas. Software	Toyo Corporation	ES10/RE-AJ	0600-0179-80	RF-1263	N/A	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESW 26	101316	RF-0812	1 year	2024-05-29	2025-05-29
EMI Receiver EPL1000	Rohde & Schwarz	EPL1000	100969	RF-1249	1 year	2024-05-22	2025-05-22
RF Selector (10m Chamber)	Toyo Corporation	NS4900	0703-182	RF-0029	N/A	N/A	N/A
Loop Antenna with Amplifier, 9kHz-30MHz	Rohde & Schwarz	HFH2-Z2	100139	RF-0048	1 year	2024-07-24	2025-07-24
Trilog Antenna No. 2, 30-1000MHz	Schwarzbeck	VULB 9168	9168-475	RF-0462	1 year	2024-05-09	2025-05-09
5dB Attenuator	Pasternack	PE7047-5	-	RF-0731	1 year	2024-05-22	2025-05-22
Low Noise Preamplifier, 9kHz-1GHz	TSJ	MLA-10K01-B01-35	1370750	RF-0253	1 year	2024-12-24	2025-12-24
Band Pass Filter	Microwave Factory	MBP301	224969	RF-1015	1 year	2024-03-19	2025-03-19
Horn Antenna, 1-8GHz	Schwarzbeck	BBHA9120 D	9120D-2280	RF-0845	1 year	2024-03-08	2025-03-08
PreAmp 0-50GHz	NEXTEM	RFA-1050000-40	RFA-1905-01	RF-1140	1 year	2024-12-03	2025-12-03
Horn Antenna, 1-18GHz	Schwarzbeck	BBHA9120 D	9120D-2280	RF-0845	1 year	2024-03-08	2025-03-08
Band Reject Filter, 1-8GHz	Nitsuki	NF-49BT	027	RF-0131	1 year	2024-12-03	2025-12-03
Horn Antenna with Preamplifier, 6-18GHz (RX)	Toyo Corporation	HAP06-18W	B1510452 210-123	RF-1095	N/A	N/A	N/A
High Pass Filter, 8-18GHz	Micro-Tronics	HPM50107	G089	RF-1094	1 year	2024-11-14	2025-11-14
Horn Antenna with Preamplifier, 18-26.5GHz (RX)	Toyo Corporation	HAP18-26W	B2010482 210-125	RF-1096	1 year	2024-11-08	2025-11-08
Constant Voltage Constant Frequency Stabilizers and Power Accessories							
CVCF (10m Chamber)	NF Corporation	ES2000U	9067307	RF-0212	1 year	2024-03-19	2025-03-19
CVCF Booster (10m Chamber)	NF Corporation	ES2000B	9074408	RF-0213	1 year	2024-03-19	2025-03-19
True RMS Multimeter	Fluke	87V	97680450	RF-0282	1 year	2024-04-12	2025-04-12

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025 has been confirmed before testing.

2.3 Measurement Uncertainty

Table 3: Measurement Uncertainty

Measurement Type	Frequency Range	Uncertainty (k=2)
Conducted Emission on RF Ports	30MHz-40GHz	±2.47dB
Conducted Emission on Power Ports	150kHz - 30MHz	±3.31dB
Magnetic Field Strength	9kHz - 30MHz	±4.79dB
Radiated Emission up to 1GHz	30MHz - 1GHz (3m Distance)	±6.01dB (Vertical) ±4.91dB (Horizontal)
Radiated Emission above 1GHz	1 - 6GHz	±5.15dB
	6 - 18GHz	±5.09dB
	18 - 40GHz	±5.18dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a digital blood pressure monitor with BLE connectivity.

3.2 Ratings and System Details

1) EUT

System Input Voltage:	DC 6V (4 x 1.5V batteries or from AC adaptor)
Typical Nominal Voltage:	AC 120V for North America (AC adaptor)
Frequency:	60Hz (AC adaptor)
Protection Class:	III

Rated temperature:	+10 to +40°C
--------------------	--------------

Dimensions:	W 96mm x H 68mm x D130mm
-------------	--------------------------

Weight:	250g (excluding batteries)
---------	----------------------------

Test Voltage:	Refer to each test item.
Test Frequency:	Refer to each test item.

2) AC Adaptor for EUT

Manufacturer:	A & D Medical
Model:	TB-233
Typical Nominal Voltage:	AC 120V
Frequency:	60Hz
Input Current:	0.15A
Protection Class:	II

3) BLE Connectivity

Radio standard:	Bluetooth 5.1
Frequency range:	2402 – 2480MHz
Specified output power	-3.5dBm (conducted peak power)
Antenna number:	1
Antenna gain:	+1.7dBi
Antenna type:	PCB pattern antenna
Antenna mounting type:	Internal

Modulation type:	GFSK
Data rate:	1Mbps, 2Mbps
Channel spacing:	2MHz
Power setting:	-4dBm

3.3 Noise Generating and Noise Suppressing Parts

The highest frequency generated or used by the EUT is 2480MHz for radio portion and 64MHz for digital interface portion.

3.4 Submitted Documents and Information

Following documents have been submitted by the client:

Following information provided in this test report has been submitted by the client:

- client name and address;
- EUT identification, ratings, system details, and description of product function and intended use;
- information related to noise generating and noise suppressing parts (if any).

4. Test Setup and Operation Modes

4.1 Principle of Test Configuration Selection

Radio: The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209 and 15.247.
The test methodology used is based on the requirements of RSS-Gen, sections 3.2 and RSS-247.

The test methods, which have been used, are based on ANSI C63.10 and KDB 558074 D01.

For details, see under each test item.

4.2 Operation Modes

The operation modes used for testing are:

- L. Transmitting at the lowest frequency Channel with 100% Duty Cycle.
- M. Transmitting at the middle frequency Channel with 100% Duty Cycle.
- H. Transmitting at the highest frequency Channel with 100% Duty Cycle.

Above modes are coupled with the following Configurations:

Table 4: Setting of Test Frequencies

Radio	Mode L	Mode M	Mode H	Remark
BLE	2402MHz	2442MHz	2480MHz	Power setting= - 4dBm

And the following configurations:

1. 1Mbps
2. 2Mbps

Both AC adaptor operation and battery operation were performed to decide the worst case configuration for conductive and radiated test.


4.3 Physical Configuration for Testing

The test system was configured in a typical fashion (as a customer would normally use it).


The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10.

Figure 1: Block Diagram

1) Conducted Radio Testing

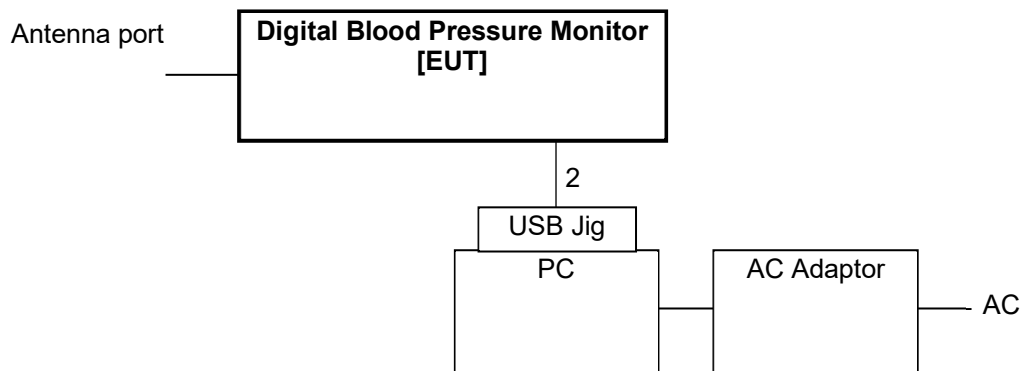


2) Radiated Radio Testing

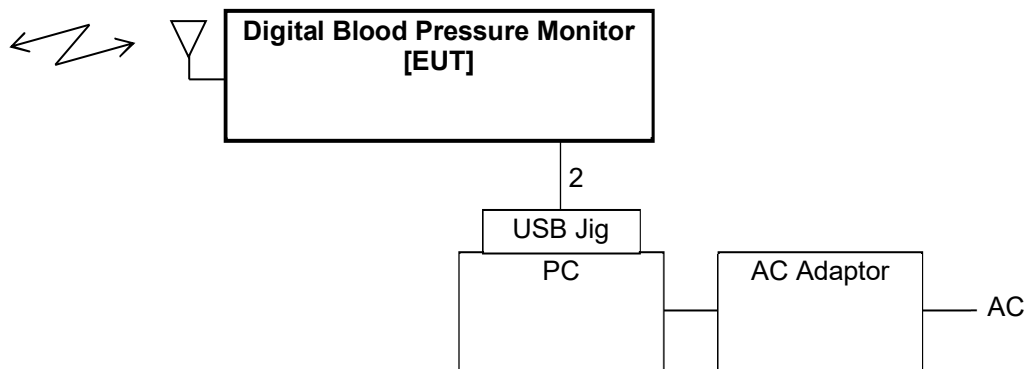

Note: No.2 cable was disconnected from EUT during the test.

3) Conducted Emission on AC Power Ports Testing

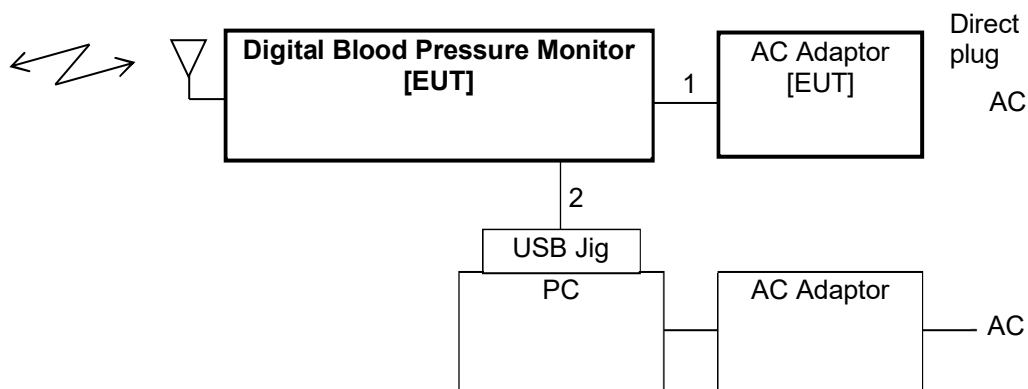

Note: No.2 cable was disconnected from EUT during the test.

Table 5: Interfaces present on the EUT

No.	Interface	Cable Length for Testing, Shielding	Interface Classification
1.	DC Cable	1.3m, un-shielded	DC input power port
2.	Control Cable	0.4m, un-shielded	Signal port

For more details, refer to section 6 “Photographs of the Test Setup”.

Table 6: EUT Serial Numbers

Test Items	Serial Number
Conducted Radio Testing	(21)7241106373
Radiated Spurious Emissions of Transmitter	(21)7241106372
AC Power Line Conducted Emission of Transmitter	(21)7241106372

4.4 Test Software

The EUT was provided by the manufacturer with suitable internal software to allow operation in all the required modes.

Software used for testing:

Tera Term version 4.106 by Tera Term Project.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 4.2 as appropriate.

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. Product: PC (Notebook)
Manufacturer: HP
Model: HP ProBook 650 G4
Rated Voltage: 19.5Vdc or 20Vdc
Input Current: 2.31A or 2.25A
Protection Class: III
Serial Number: JPH9029GYQ
2. Product: AC Adapter
Manufacturer: HP
Model: HSTNN-CA41
Rated Voltage: 100–240V
Input Current: 1.4A
Frequency: 50–60Hz
Protection Class: II
Serial Number: WFULP0CGC78RL4 0C
3. Product: USB Jig



4.6 Countermeasures to achieve Compliance

No additional measures were employed to achieve compliance.

5. Test Results RADIO

5.1 Supply Voltage Requirements

RESULT:

Pass

Requirements:

FCC §15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the supply voltage requirements.

5.2 Antenna Requirements

RESULT:

Pass

Requirements:

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

All antennas for use with the EUT must be listed in the application, including a test report.

Verdict:

As per the guidance by KDB Publication No. 353028 D01, three ways can be used for a Part 15 Intentional radiator. a) Antenna permanently addached is applicable to the EUT.

The EUT has an antenna permanently attached on the printed circuit board. Hence it complies with the antenna requirements.

5.3 Restricted Bands of Operation

RESULT:

Pass

Requirements:

FCC §15.205 and RSS-Gen §8.10

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The Operation frequency range of the EUT is 2400 – 2483.5MHz as BLE, only spurious emissions may be found in the restricted bands below 25GHz. Hence the EUT complies with the restricted frequency band requirement.

5.4 Maximum Peak Output Power

RESULT:

Pass

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Requirements:

FCC §15.247(b)(3) and RSS-247 §5.4

For systems using digital modulation in the 2400 – 2483.5MHz band, the maximum peak output power is 1W (30dBm). The e.i.r.p. shall not exceed 4W (36dBm) for ISSED.

If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test procedure:

ANSI C63.10-2020 §11.9, KDB 558074 D01.

The maximum peak output power was measured at the antenna port with a broadband peak power meter.

The readings of the measurements take into account the loss generated by all the involved cables.

Table 7: Maximum Peak Output Power, BLE, 1Mbps

Freq. [MHz]	Peak Output Power [dBm]	Peak Output Power Limit [dBm]	Peak Output Power Margin [dB]	Antenna Gain [dBi]	e.i.r.p. [dBm]	e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2402	-3.5	30.0	33.5	1.7	-1.8	36.0	37.8
2442	-3.7	30.0	33.7	1.7	-2.0	36.0	38.0
2480	-3.8	30.0	33.8	1.7	-2.1	36.0	38.1

Note:

Cable (including temporary RF cable) and attenuator loss has been compensated for Peak Output Power

$\text{e.i.r.p. [dBm]} = \text{Peak Output Power [dBm]} + \text{Antenna Gain [dBi]}$

Table 8: Maximum Peak Output Power, BLE, 2Mbps

Freq. [MHz]	Peak Output Power [dBm]	Peak Output Power Limit [dBm]	Peak Output Power Margin [dB]	Antenna Gain [dBi]	e.i.r.p. [dBm]	e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2402	-3.5	30.0	33.5	1.7	-1.8	36.0	37.8
2442	-3.7	30.0	33.7	1.7	-2.0	36.0	38.0
2480	-3.8	30.0	33.8	1.7	-2.1	36.0	38.1

Note:

Cable (including temporary RF cable) and attenuator loss has been compensated for Peak Output Power

$\text{e.i.r.p. [dBm]} = \text{Peak Output Power [dBm]} + \text{Antenna Gain [dBi]}$

5.5 6dB Bandwidth

RESULT:

Pass

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Requirements:

FCC §15.215(c), §15.247(a)(2) and RSS-247 §5.2 a)

For system using digital modulation techniques in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

Additionally, for FCC, the 6dB bandwidth shall be contained within the frequency band designated in the rule section under which the equipment is operated.

Test procedure:


ANSI C63.10-2020 §11.8 and KDB 558074 D01.

The 6dB bandwidth was measured at the antenna port with a spectrum analyzer using a peak detector. The RBW was set to 100kHz and the VBW was set to 300kHz. Markers placed at the lowest and highest intersections of the trace with a 6dBc line were used to calculate the emission bandwidth.

Table 9: 6dB Bandwidth, BLE, 1Mbps


Operating Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
2402	0.709	>0.5
2442	0.753	>0.5
2480	0.746	>0.5

Figure 2: 6dB Bandwidth, BLE, Mode L (2402MHz), 1Mbps

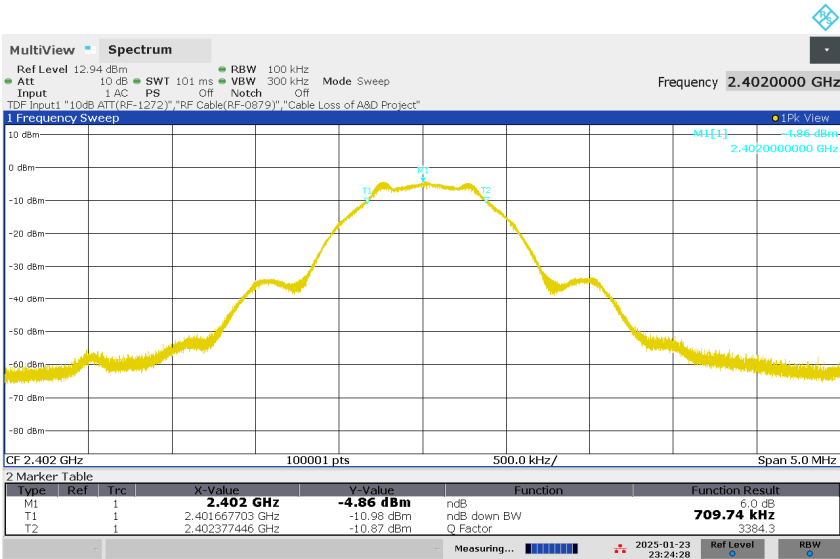


11:24:29 PM 01/23/2025

Figure 3: 6dB Bandwidth, BLE, Mode M (2442MHz), 1Mbps

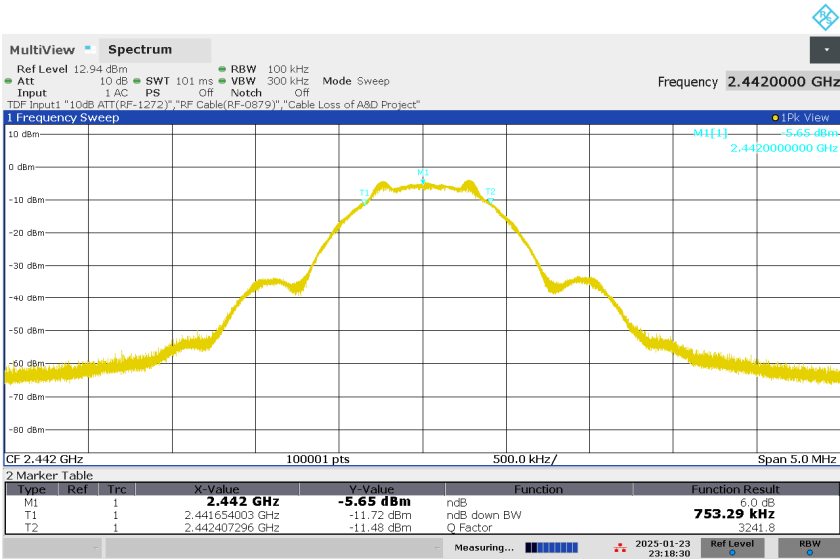

11:18:31 PM 01/23/2025

Figure 4: 6dB Bandwidth, BLE, Mode H (2480MHz), 1Mbps

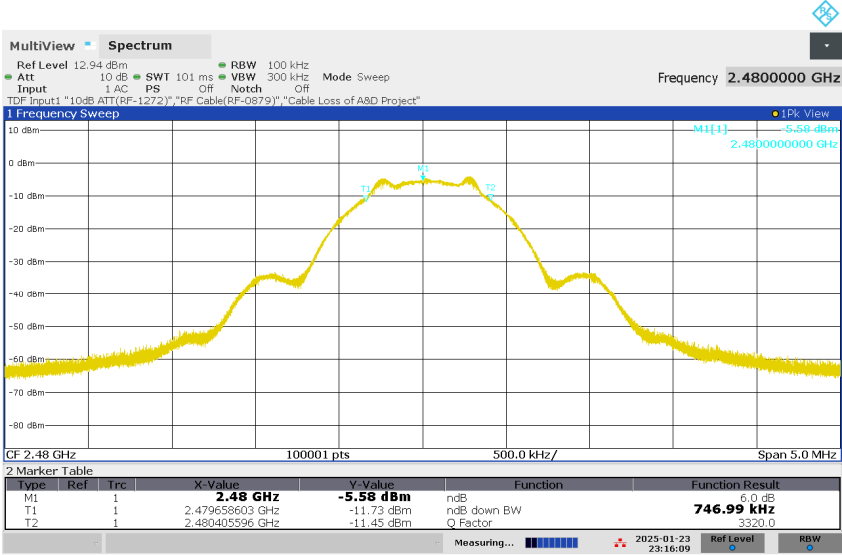


11:16:10 PM 01/23/2025

Table 10: 6dB Bandwidth, BLE, 2Mbps


Operating Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
2402	1.32	>0.5
2442	1.38	>0.5
2480	1.22	>0.5

Figure 5: 6dB Bandwidth, BLE, Mode L (2402MHz), 2Mbps

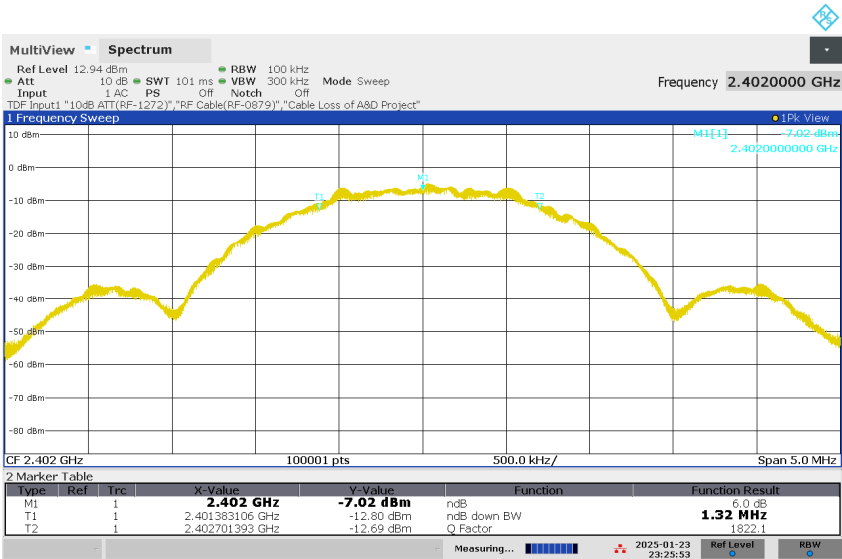


11:25:54 PM 01/23/2025

Figure 6: 6dB Bandwidth, BLE, Mode M (2442MHz), 2Mbps

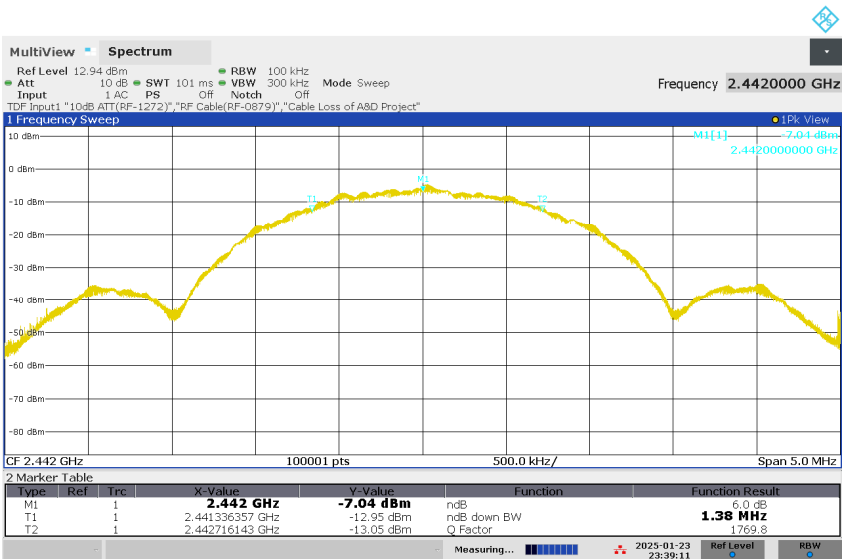

11:39:12 PM 01/23/2025

Figure 7: 6dB Bandwidth, BLE, Mode H (2480MHz), 2Mbps

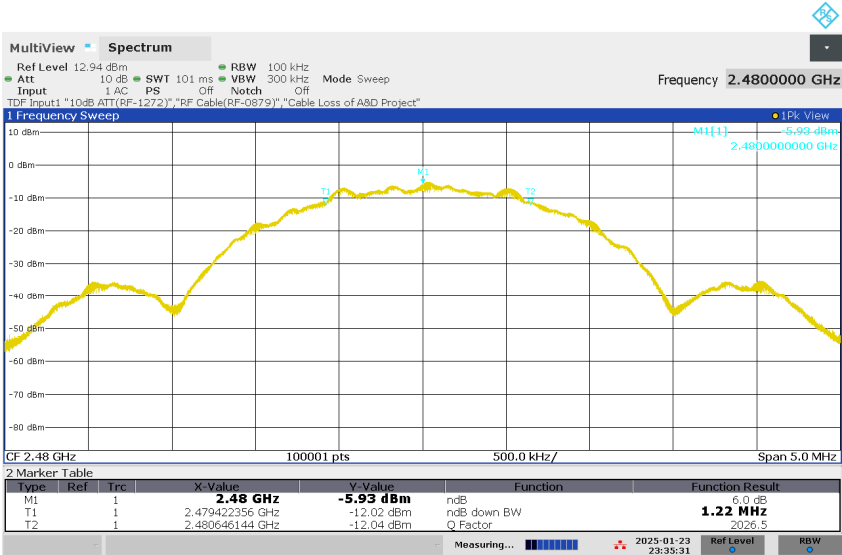

11:35:32 PM 01/23/2025

5.6 99% Bandwidth

RESULT:

For. Ref.

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Requirements:

RSS-Gen §6.7

The 99% occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSS.

Test procedure:

ANSI C63.10-2020 §6.9.3

The 99% bandwidth was measured at the antenna port with a spectrum analyzer using with the following settings:

- RBW = 30kHz, VBW = 100kHz, Sample detector with Max Hold


The RBW was set in the range from 1% to 5% of the observed OBW, VBW was set to at least three times of RBW.

Markers were placed at the lowest and highest intersections of the trace by 99% OBW function to obtain the value of the 99% emission bandwidth.

Table 11: 99% Bandwidth, BLE, 1Mbps


Operating Frequency [MHz]	99% Bandwidth [MHz]	Remarks
2402	1.072	Widest OBW for 1Mbps
2442	1.058	
2480	1.068	

Figure 8: 99% Bandwidth, BLE, Mode L (2402MHz), 1Mbps

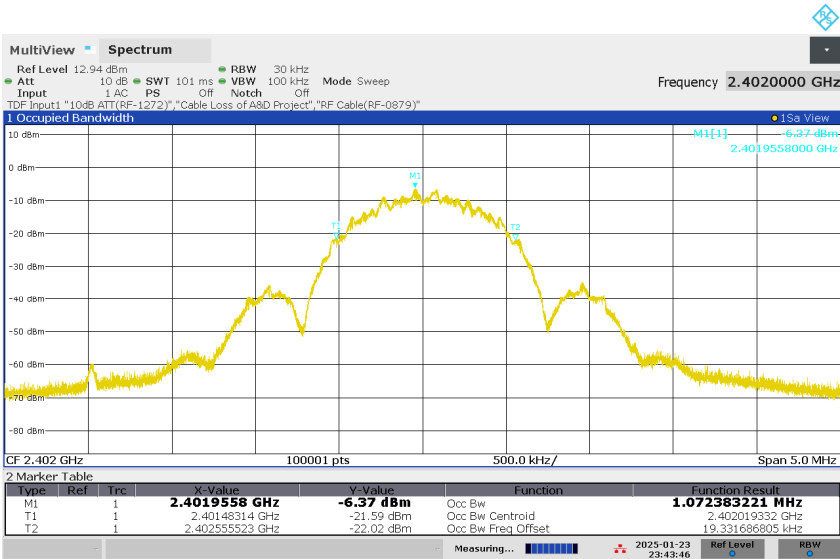


11:43:46 PM 01/23/2025

Figure 9: 99% Bandwidth, BLE, Mode M (2442MHz), 1Mbps

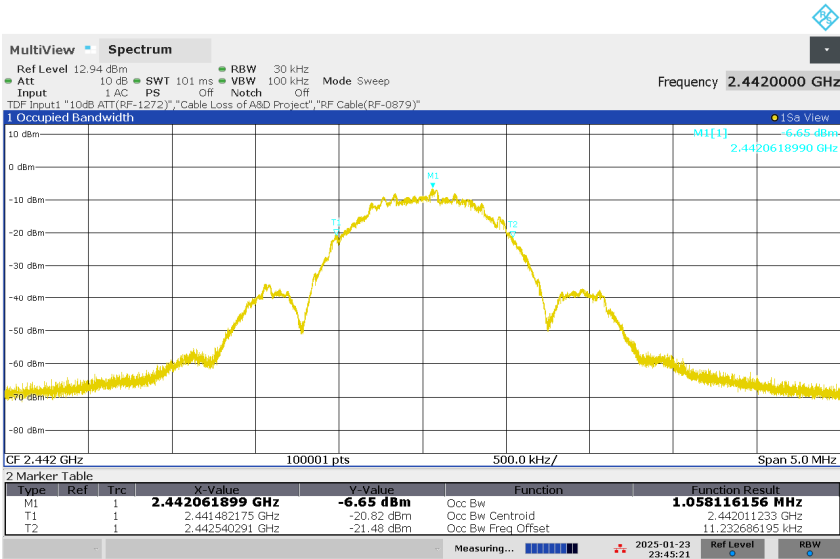

11:45:22 PM 01/23/2025

Figure 10: 99% Bandwidth, BLE, Mode H (2480MHz), 1Mbps

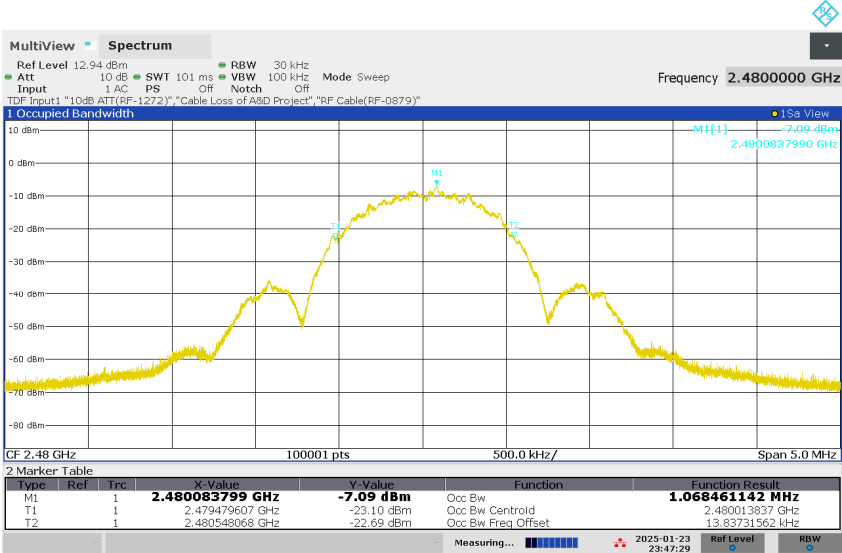


11:47:30 PM 01/23/2025

Table 12: 99% Bandwidth, BLE, 2Mbps


Operating Frequency [MHz]	99% Bandwidth [MHz]	Remarks
2402	2.105	
2442	2.088	
2480	2.107	Widest OBW for 2Mbps

Figure 11: 99% Bandwidth, BLE, Mode L (2402MHz), 2Mbps

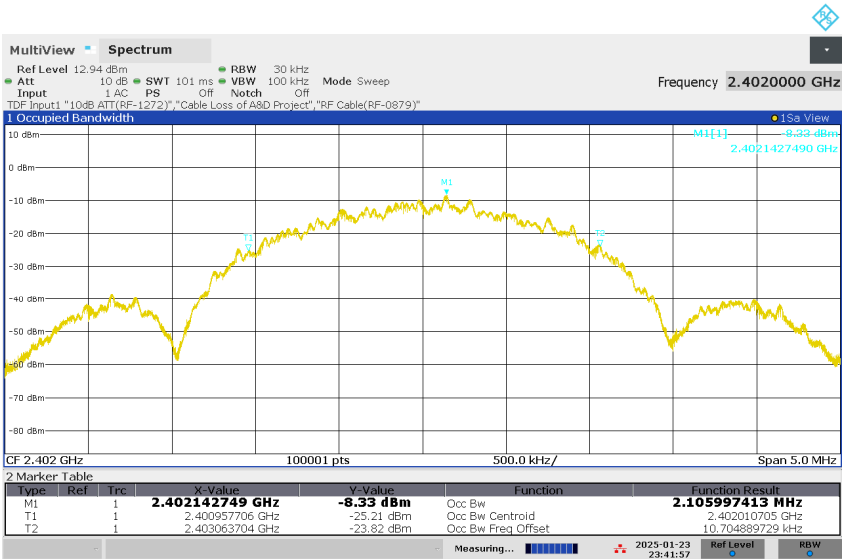


11:41:57 PM 01/23/2025

Figure 12: 99% Bandwidth, BLE, Mode M (2442MHz), 2Mbps

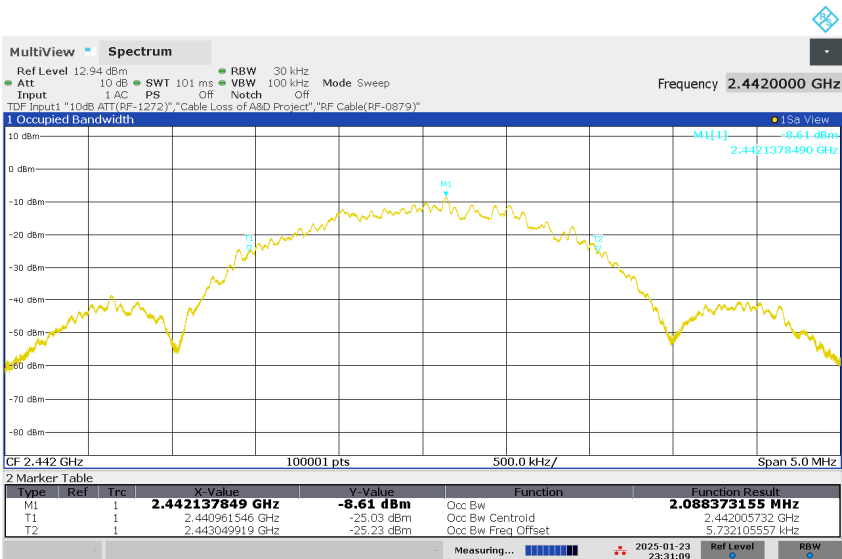

11:31:10 PM 01/23/2025

Figure 13: 99% Bandwidth, BLE, Mode H (2480MHz), 2Mbps

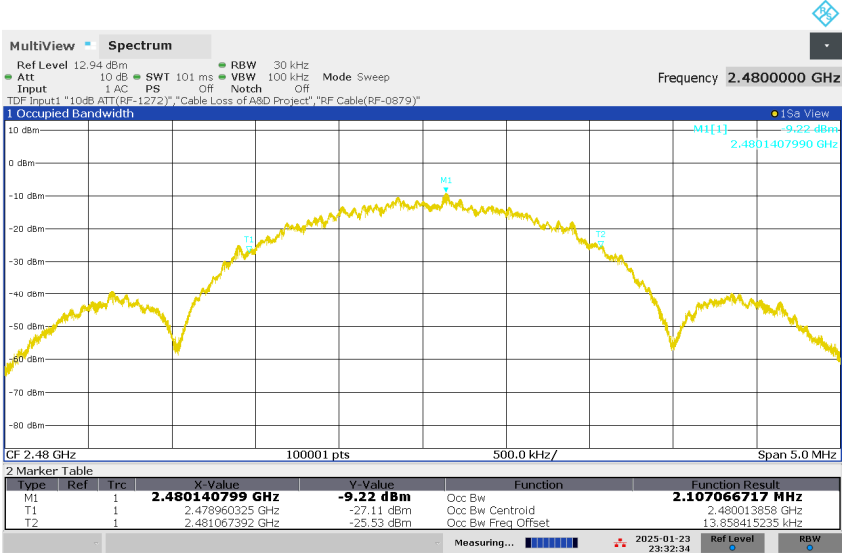

11:32:35 PM 01/23/2025

5.7 Conducted Spurious Emissions

RESULT:

Pass

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Requirements:

FCC §15.247(d) and RSS-247 §5.5

In any 100kHz bandwidth outside the frequency band in which the intentional radiator is operating, the RF power shall be at least 20dBc below that of the maximum in-band 100kHz emission.

Test procedure:

ANSI C63.10-2020 §6.7, §6.10 and KDB 558074 D01.

The conducted spurious emissions were measured at the antenna port with a spectrum analyzer using a peak detector. The RBW was set to 100kHz and the VBW was set to 300kHz. Measurements were performed from 30MHz to 25GHz (10th harmonics).

The readings of the measurements take into account the loss generated by all the involved cables.

Both AC adaptor operation and battery operation were performed to decide the worst configuration. Final measurements were performed at the battery operation at the all operation modes L, M and H.

Authorized-band band-edge measurements (relative method) were performed by conducted, as per §6.10.4 of ANSI C63.10-2020.

Figure 14: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode L (2402MHz), 1Mbps

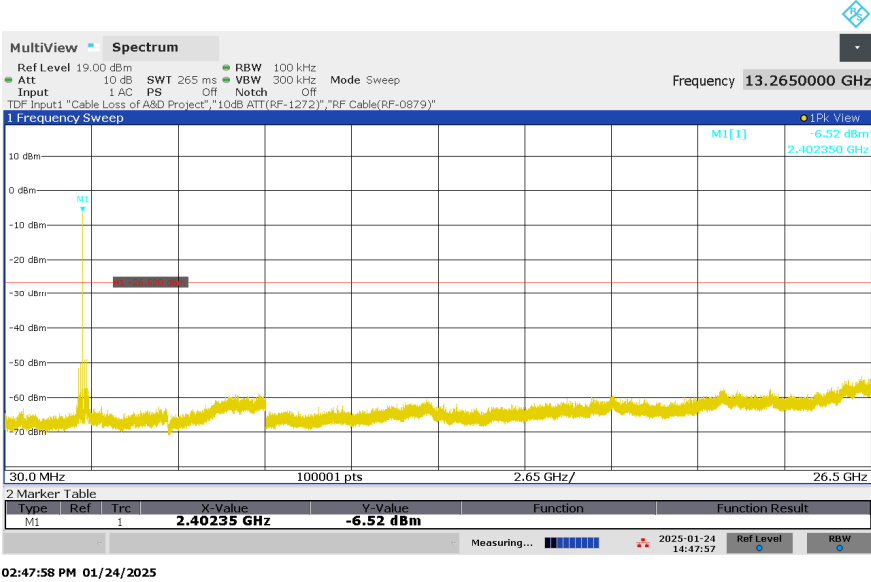


Figure 15: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode M (2442MHz), 1Mbps

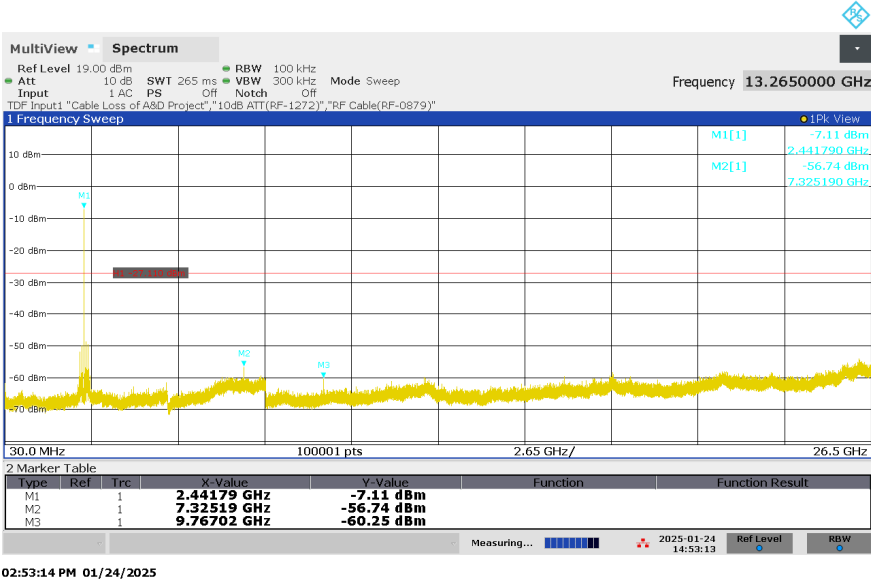


Figure 16: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode H (2480MHz), 1Mbps

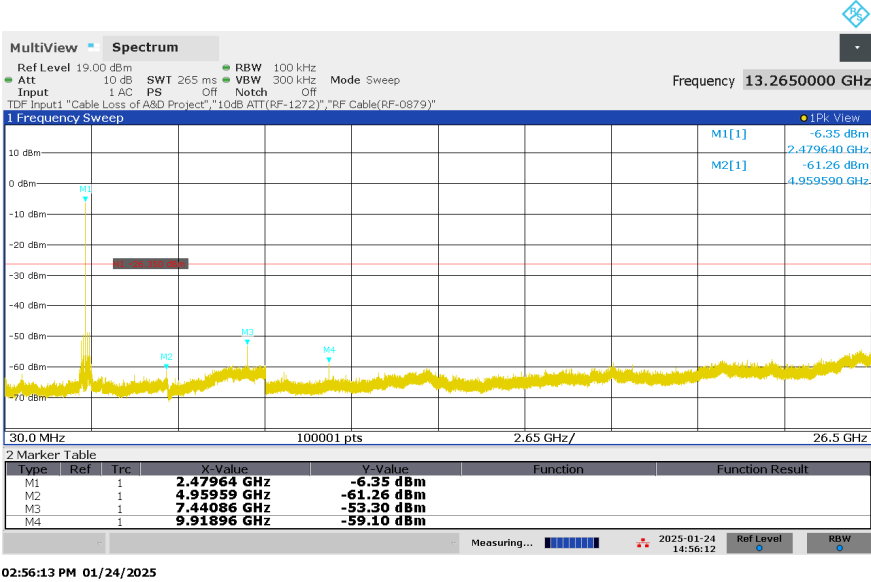


Figure 17: Authorized-band band-edge, BLE, Mode L (2402MHz), 1Mbps


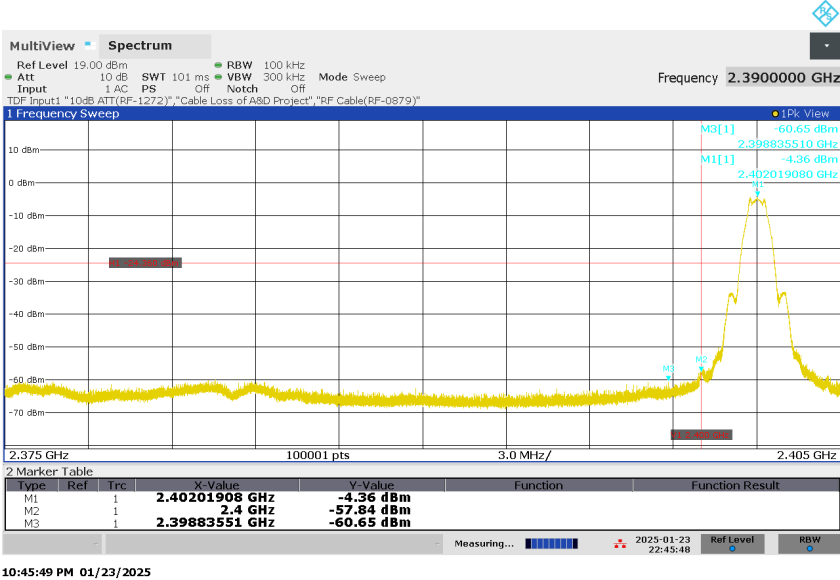


Figure 18: Authorized-band band-edge, BLE, Mode H (2480MHz), 1Mbps

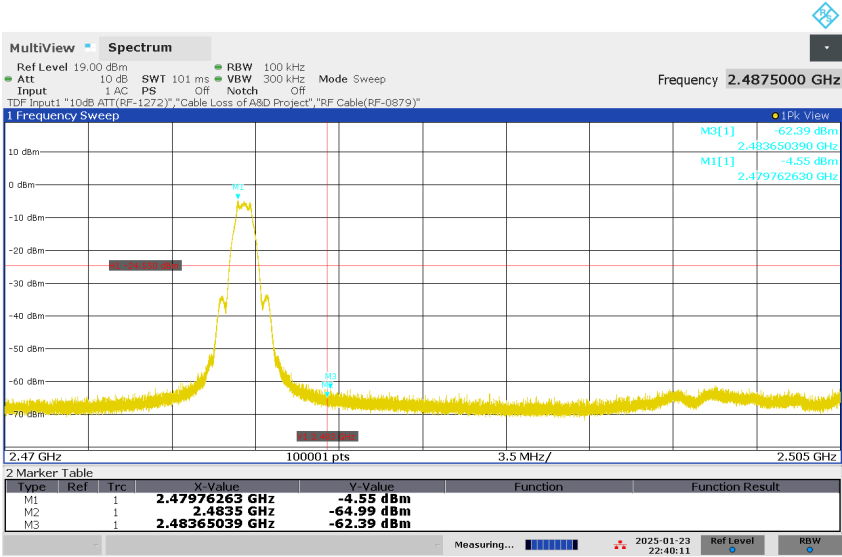

10:40:11 PM 01/23/2025

Figure 19: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode L (2402MHz), 2Mbps

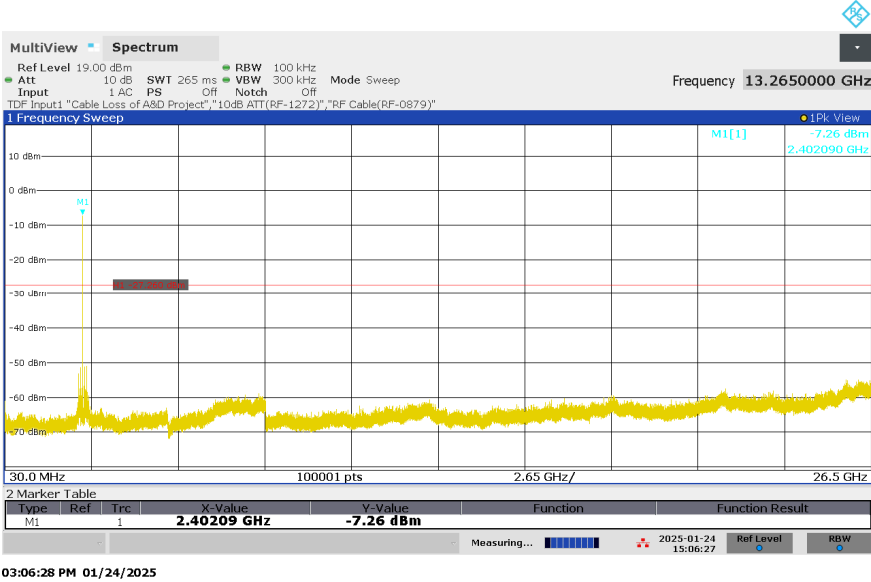


Figure 20: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode M (2442MHz), 2Mbps

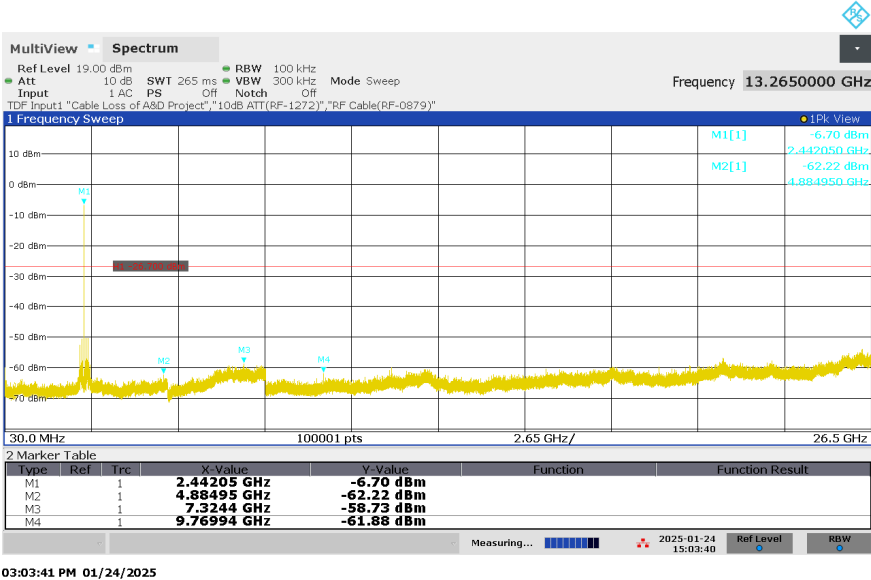


Figure 21: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode H (2480MHz), 2Mbps

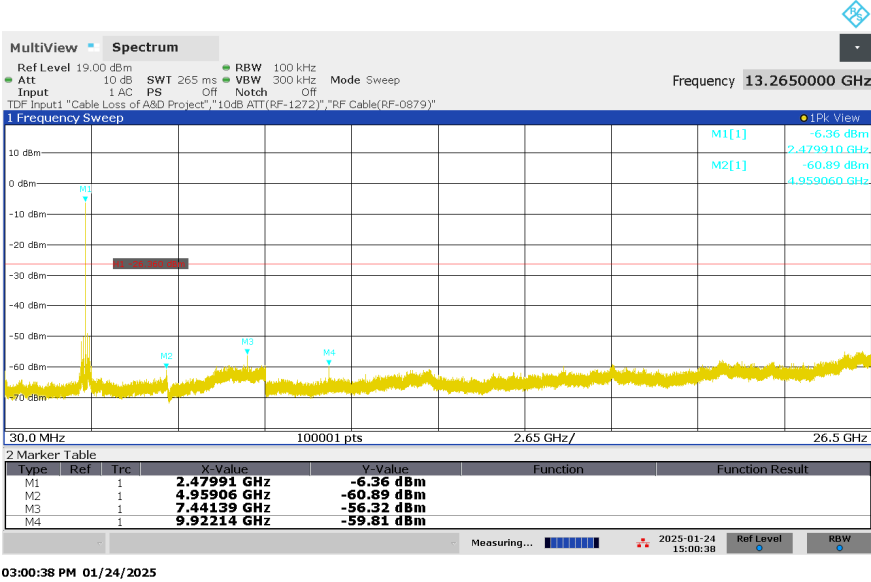


Figure 22: Authorized-band band-edge, BLE, Mode L (2402MHz), 2Mbps


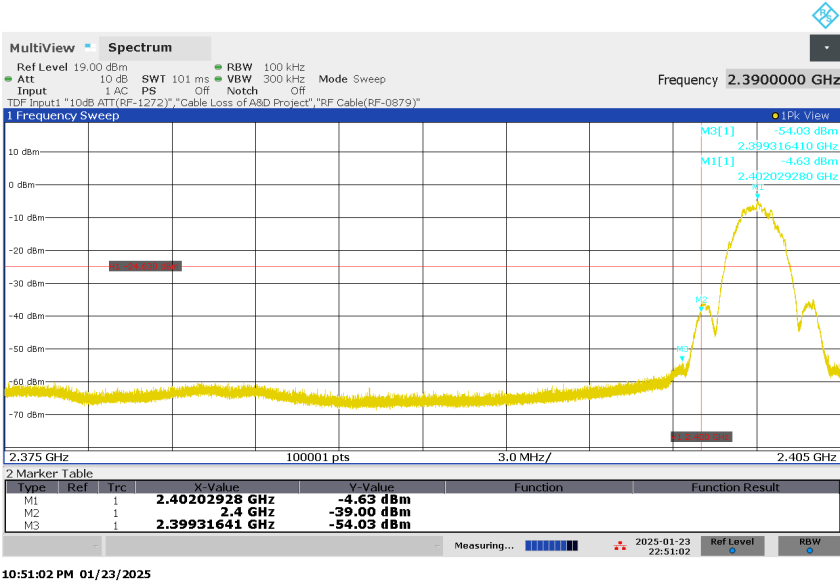


Figure 23: Authorized-band band-edge, BLE, Mode H (2480MHz), 2Mbps

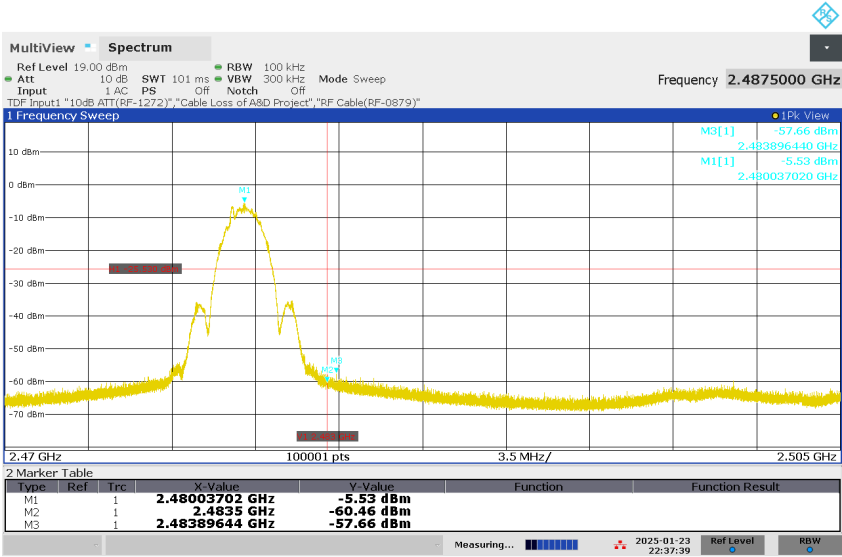

10:37:40 PM 01/23/2025

5.8 Peak Power Spectral Density

RESULT:

Pass

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Requirements:

FCC §15.247(e) and RSS-247 §5.2(b)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10-2020 §11.10, KDB 558074 D01.

The peak power spectral density was measured at the antenna port with a spectrum analyzer using a peak detector with a RBW of 3kHz and a VBW of 10kHz.

The readings of the measurements take into account the loss generated by all the involved cables.

Table 13: Peak Power Spectral Density, BLE, 1Mbps

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Margin [dB]
2402	-15.58	8.00	23.58
2442	-17.33	8.00	25.33
2480	-17.00	8.00	25.00

Note:
Cable (including temporary RF cable) and attenuator loss has been compensated for Peak Output Power

Figure 24: Power Spectral Density, BLE, Mode L (2402MHz), 1Mbps

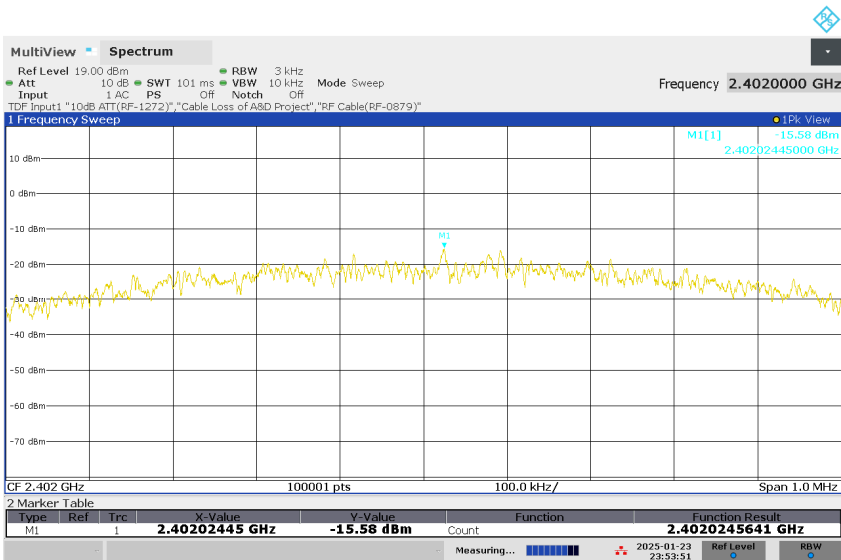


Figure 25: Power Spectral Density, BLE, Mode M (2442MHz), 1Mbps

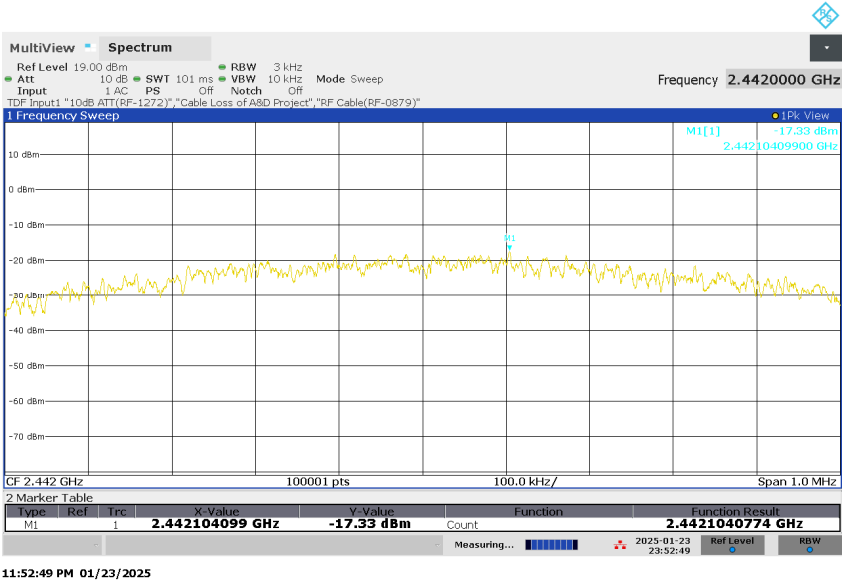


Figure 26: Power Spectral Density, BLE, Mode H (2480MHz), 1Mbps

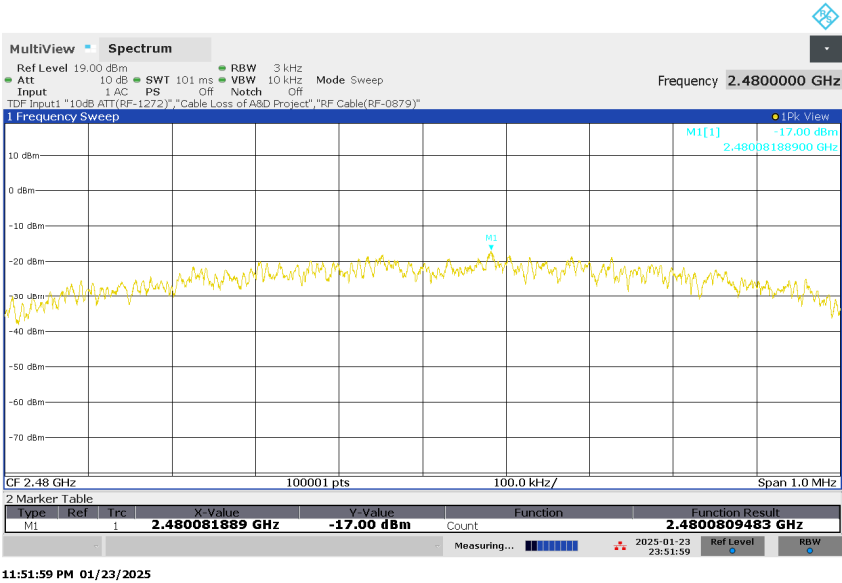


Table 14: Peak Power Spectral Density, BLE, 2Mbps

Operating Frequency [MHz]	Max PSD [dBm]	Limit [dBm]	Margin [dB]
2402	-18.99	8.00	26.99
2442	-19.68	8.00	27.68
2480	-20.15	8.00	28.15

Note:
Cable (including temporary RF cable) and attenuator loss has been compensated for Peak Output Power

Figure 27: Power Spectral Density, BLE, Mode L (2402MHz), 2Mbps

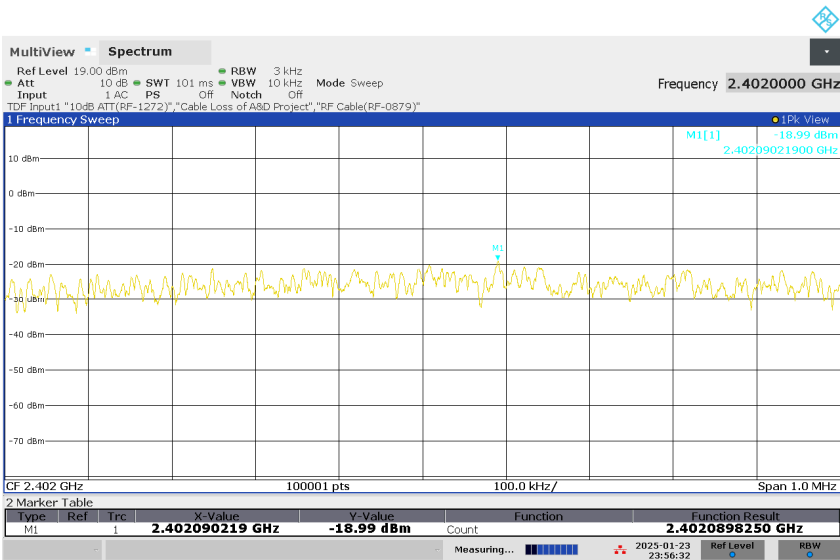


Figure 28: Power Spectral Density, BLE, Mode M (2442MHz), 2Mbps


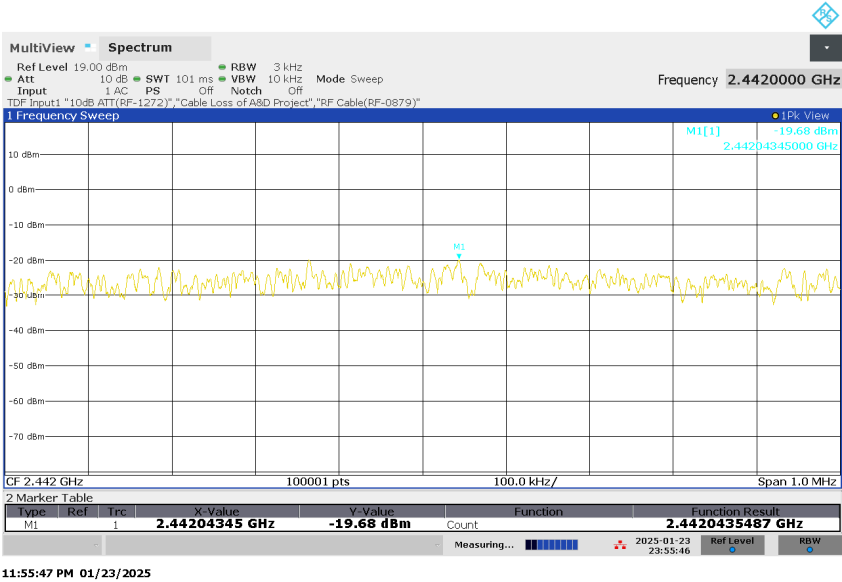


Figure 29: Power Spectral Density, BLE, Mode H (2480MHz), 2Mbps

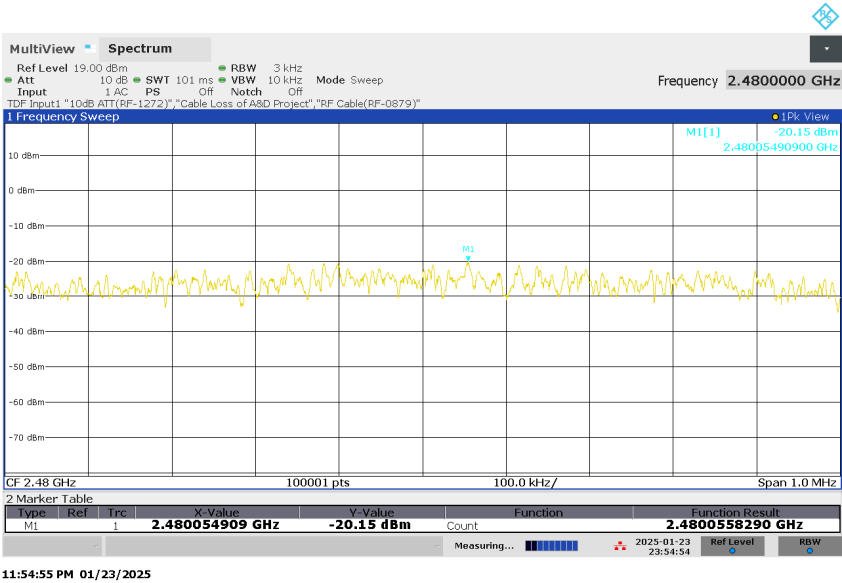

5.9 Radiated Spurious Emissions of Transmitter

RESULT:

Pass

Date of testing:	2025-01-20, 2025-01-21, 2025-01-22, 2025-01-23
Ambient temperature:	20, 22, 20, 22°C
Relative humidity:	52, 49, 60, 38%
Atmospheric pressure:	1007, 1012, 1014, 1020hPa
Frequency range:	9kHz - 25GHz
Measurement distance:	3m
Kind of test site:	Semi Anechoic Chamber

Requirements:

FCC §15.205, §15.209, §15.247(d) and RSS-247 §5.5, RSS-Gen §8.9, §8.10.

Radiated emissions which fall in the restricted bands, as defined in FCC §15.205(a) must comply with the radiated emission limits specified in FCC §15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC §15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Test procedure:

ANSI C63.10-2020 §6.3, §6.4, §6.5, §6.6, §6.10 and KDB 558074 D01

The EUT was placed on a nonconductive turntable. The table height was 0.8m for measurements below 1GHz and 1.5m for measurements above 1GHz. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 9kHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° in order to determine the emission's maximum level. For frequencies above 30MHz, the antenna was raised and lowered from 1 to 4m and measurements were taken using both horizontal and vertical antenna polarizations.

For emissions between 30MHz and 1GHz, measurements were performed with a test receiver operating in the CISPR quasi-peak detection mode with a 6dB bandwidth set to 120kHz.

For emissions above 1GHz, measurements were performed with a spectrum analyzer using the following settings: for peak field strength: RBW = 1MHz & VBW = 3MHz; for average field strength: RBW = 1MHz & VBW = 10Hz.

Absorbers have been placed on the floor between the EUT and the measuring antenna for testing above 1GHz.

Both AC adaptor operation and battery operation were performed to decide the worst configuration. Final measurements were performed at the battery operation at the all operation modes L, M and H.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Test Report No.: **JP24T1J5 001**
Prüfbericht-Nr.:

Page 45 of 67
Seite 45 von 67

Table 15: Radiated Emissions, Quasi Peak Data, 9kHz - 30MHz, BLE, Mode M (2442MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]	Angle [°]
0.0100	H	18.6	19.9	38.5	127.6	89.1	4
0.1597	H	11.6	19.6	31.2	103.6	72.4	352
0.5662	H	10.8	19.4	30.2	72.5	42.3	352
2.6515	H	12.5	19.5	32.0	69.5	37.5	0
29.8809	H	8.1	19.8	27.9	69.5	41.6	63
0.0100	V	18.3	19.9	38.2	127.6	89.4	196
0.1574	V	11.8	19.6	31.4	103.7	72.3	82
0.5711	V	9.4	19.4	28.8	72.4	43.6	322
3.2927	V	9.2	19.6	28.8	69.5	40.7	353
28.1406	V	8.1	20.0	28.1	69.5	41.4	267

Note: Level QP = Reading QP + Factor

Table 16: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]	Height [cm]	Angle [°]
46.111	H	30.8	-21.1	9.7	40.0	30.3	144	115
157.627	H	30.4	-20.1	10.3	43.5	33.2	233	228
921.692	H	31.3	-6.7	24.6	46.0	21.4	323	280
984.020	H	30.5	-5.6	24.9	54.0	29.1	287	9
46.303	V	31.3	-21.1	10.2	40.0	29.8	104	246
146.022	V	30.0	-20.6	9.4	43.5	34.1	206	70
937.347	V	31.4	-6.6	24.8	46.0	21.2	289	158
990.490	V	30.1	-5.4	24.7	54.0	29.3	400	75

Note: Level QP = Reading QP + Factor

Table 17: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]	Height [cm]	Angle [°]
42.943	H	30.5	-21.2	9.3	40.0	30.7	217	227
158.233	H	30.4	-20.1	10.3	43.5	33.2	100	89
922.859	H	31.4	-6.7	24.7	46.0	21.3	165	51
993.811	H	30.1	-5.3	24.8	54.0	29.2	393	15
48.063	V	30.4	-21.0	9.4	40.0	30.6	100	22
153.120	V	30.5	-20.3	10.2	43.5	33.3	352	321
926.808	V	31.2	-6.7	24.5	46.0	21.5	274	162
991.887	V	30.1	-5.4	24.7	54.0	29.3	218	308

Note: Level QP = Reading QP + Factor

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 46 of 67
Seite 46 von 67

Table 18: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2274.0	H	65.2	-15.1	50.1	74.0	23.9	188	20
2338.0	H	67.3	-14.9	52.4	74.0	21.6	188	33
2466.0	H	65.2	-14.2	51.0	74.0	23.0	102	47
2530.0	H	64.3	-13.9	50.4	74.0	23.6	142	18
7206.4	H	56.2	0.4	56.6	74.0	17.4	175	202
9608.9	H	47.3	-3.6	43.7	74.0	30.3	114	210
12011.2	H	46.5	0.6	47.1	74.0	26.9	100	93
2466.0	V	63.0	-14.2	48.8	74.0	25.2	236	15
7206.3	V	56.7	0.4	57.1	74.0	16.9	166	319
9608.8	V	49.1	-3.6	45.5	74.0	28.5	306	314
12011.1	V	46.8	0.6	47.4	74.0	26.6	247	180

Note: Level PK = Reading PK + Factor

Table 19: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2274.0	H	60.9	-15.1	45.8	54.0	8.2	188	20
2338.0	H	63.5	-14.9	48.6	54.0	5.4	188	33
2466.0	H	60.9	-14.2	46.7	54.0	7.3	102	47
2530.0	H	59.2	-13.9	45.3	54.0	8.7	142	18
7206.4	H	43.6	0.4	44.0	54.0	10.0	175	202
9608.9	H	33.7	-3.6	30.1	54.0	23.9	114	210
12011.2	H	34.2	0.6	34.8	54.0	19.2	100	93
2466.0	V	57.0	-14.2	42.8	54.0	11.2	236	15
7206.3	V	44.4	0.4	44.8	54.0	9.2	166	319
9608.8	V	37.0	-3.6	33.4	54.0	20.6	306	314
12011.1	V	34.2	0.6	34.8	54.0	19.2	247	180

Note: Level AV = Reading AV + Factor

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 47 of 67
Seite 47 von 67

Table 20: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2314.0	H	66.3	-15.0	51.3	74.0	22.7	131	35
2378.0	H	67.3	-14.8	52.5	74.0	21.5	100	36
2506.0	H	65.3	-14.0	51.3	74.0	22.7	161	39
2570.0	H	64.2	-13.7	50.5	74.0	23.5	157	0
7325.5	H	55.5	0.4	55.9	74.0	18.1	100	68
9768.9	H	48.3	-3.3	45.0	74.0	29.0	346	181
12241.8	H	47.0	-0.7	46.3	74.0	27.7	347	323
19403.4	H	50.1	-9.9	40.2	74.0	33.8	223	42
22206.1	H	47.5	-6.8	40.7	74.0	33.3	345	358
2378.0	V	64.4	-14.8	49.6	74.0	24.4	391	91
7325.6	V	55.5	0.4	55.9	74.0	18.1	253	0
9768.8	V	49.8	-3.3	46.5	74.0	27.5	273	7
12211.1	V	48.5	-0.6	47.9	74.0	26.1	177	145
19308.5	V	50.6	-9.9	40.7	74.0	33.3	308	236
21877.5	V	47.5	-7.1	40.4	74.0	33.6	285	323

Note: Level PK = Reading PK + Factor

Table 21: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2314.0	H	61.9	-15.0	46.9	54.0	7.1	131	35
2378.0	H	63.8	-14.8	49.0	54.0	5.0 (*)	100	36
2506.0	H	60.6	-14.0	46.6	54.0	7.4	161	39
2570.0	H	59.2	-13.7	45.5	54.0	8.5	157	0
7325.5	H	41.8	0.4	42.2	54.0	11.8	100	68
9768.9	H	34.2	-3.3	30.9	54.0	23.1	346	181
12241.8	H	32.8	-0.7	32.1	54.0	21.9	347	323
19403.4	H	36.1	-9.9	26.2	54.0	27.8	223	42
22206.1	H	33.4	-6.8	26.6	54.0	27.4	345	358
2378.0	V	59.9	-14.8	45.1	54.0	8.9	391	91
7325.6	V	42.8	0.4	43.2	54.0	10.8	253	0
9768.8	V	36.8	-3.3	33.5	54.0	20.5	273	7
12211.1	V	35.1	-0.6	34.5	54.0	19.5	177	145
19308.5	V	36.3	-9.9	26.4	54.0	27.6	308	236
21877.5	V	33.6	-7.1	26.5	54.0	27.5	285	323

Note: Level AV = Reading AV + Factor

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a high probability that the tested product complies with the specification limit.

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 48 of 67
Seite 48 von 67

Table 22: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2352.0	H	67.8	-14.9	52.9	74.0	21.1	137	47
2416.0	H	67.3	-14.6	52.7	74.0	21.3	126	60
2544.0	H	64.7	-13.8	50.9	74.0	23.1	157	358
2608.0	H	65.4	-13.5	51.9	74.0	22.1	188	9
7440.2	H	56.2	0.0	56.2	74.0	17.8	114	288
9920.9	H	47.6	-3.2	44.4	74.0	29.6	125	0
12401.2	H	48.7	-1.3	47.4	74.0	26.6	201	29
2416.0	V	65.2	-14.6	50.6	74.0	23.4	383	99
7440.1	V	56.7	0.0	56.7	74.0	17.3	100	124
9920.8	V	49.7	-3.2	46.5	74.0	27.5	170	304
12401.2	V	47.3	-1.3	46.0	74.0	28.0	125	253

Note: Level PK = Reading PK + Factor

Table 23: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 1Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2352.0	H	63.5	-14.9	48.6	54.0	5.4	137	47
2416.0	H	62.7	-14.6	48.1	54.0	5.9	126	60
2544.0	H	59.6	-13.8	45.8	54.0	8.2	157	358
2608.0	H	60.4	-13.5	46.9	54.0	7.1	188	9
7440.2	H	44.3	0.0	44.3	54.0	9.7	114	288
9920.9	H	35.6	-3.2	32.4	54.0	21.6	125	0
12401.2	H	36.5	-1.3	35.2	54.0	18.8	201	29
2416.0	V	60.0	-14.6	45.4	54.0	8.6	383	99
7440.1	V	44.9	0.0	44.9	54.0	9.1	100	124
9920.8	V	38.4	-3.2	35.2	54.0	18.8	170	304
12401.2	V	34.7	-1.3	33.4	54.0	20.6	125	253

Note: Level AV = Reading AV + Factor

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 49 of 67
Seite 49 von 67

Table 24: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2274.0	H	65.3	-15.1	50.2	74.0	23.8	161	33
2338.0	H	67.3	-14.9	52.4	74.0	21.6	100	44
2466.0	H	65.8	-14.2	51.6	74.0	22.4	197	45
2530.0	H	63.6	-13.9	49.7	74.0	24.3	183	9
7207.3	H	56.0	0.4	56.4	74.0	17.6	167	286
9606.3	H	47.0	-3.6	43.4	74.0	30.6	400	152
12007.8	H	47.1	0.6	47.7	74.0	26.3	114	75
2466.0	V	62.5	-14.2	48.3	74.0	25.7	267	28
7207.2	V	55.8	0.4	56.2	74.0	17.8	115	139
9606.3	V	49.1	-3.6	45.5	74.0	28.5	298	314
12011.1	V	47.0	0.6	47.6	74.0	26.4	179	359

Note: Level PK = Reading PK + Factor

Table 25: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2274.0	H	60.1	-15.1	45.0	54.0	9.0	161	33
2338.0	H	61.9	-14.9	47.0	54.0	7.0	100	44
2466.0	H	60.5	-14.2	46.3	54.0	7.7	197	45
2530.0	H	57.4	-13.9	43.5	54.0	10.5	183	9
7207.3	H	41.7	0.4	42.1	54.0	11.9	167	286
9606.3	H	33.0	-3.6	29.4	54.0	24.6	400	152
12007.8	H	34.6	0.6	35.2	54.0	18.8	114	75
2466.0	V	55.8	-14.2	41.6	54.0	12.4	267	28
7207.2	V	41.6	0.4	42.0	54.0	12.0	115	139
9606.3	V	35.9	-3.6	32.3	54.0	21.7	298	314
12011.1	V	32.9	0.6	33.5	54.0	20.5	179	359

Note: Level AV = Reading AV + Factor

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 50 of 67
Seite 50 von 67

Table 26: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2314.0	H	65.8	-15.0	50.8	74.0	23.2	105	29
2378.0	H	67.7	-14.8	52.9	74.0	21.1	209	50
2506.0	H	64.3	-14.0	50.3	74.0	23.7	158	359
2570.0	H	62.8	-13.7	49.1	74.0	24.9	111	358
7324.8	H	55.0	0.4	55.4	74.0	18.6	100	312
9800.3	H	47.0	-3.2	43.8	74.0	30.2	385	121
12254.5	H	47.6	-0.8	46.8	74.0	27.2	346	208
19278.5	H	50.3	-9.9	40.4	74.0	33.6	103	19
21761.3	H	47.6	-7.2	40.4	74.0	33.6	400	131
2506.0	V	62.6	-14.0	48.6	74.0	25.4	386	38
7324.9	V	55.5	0.4	55.9	74.0	18.1	365	328
9810.0	V	47.0	-3.2	43.8	74.0	30.2	153	209
12230.7	V	46.9	-0.7	46.2	74.0	27.8	172	52
19586.0	V	50.4	-10.0	40.4	74.0	33.6	295	166
22101.9	V	48.0	-6.9	41.1	74.0	32.9	400	354

Note: Level PK = Reading PK + Factor

Table 27: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2314.0	H	60.5	-15.0	45.5	54.0	8.5	105	29
2378.0	H	63.3	-14.8	48.5	54.0	5.5	209	50
2506.0	H	58.4	-14.0	44.4	54.0	9.6	158	359
2570.0	H	56.7	-13.7	43.0	54.0	11.0	111	358
7324.8	H	41.4	0.4	41.8	54.0	12.2	100	312
9800.3	H	32.6	-3.2	29.4	54.0	24.6	385	121
12254.5	H	32.9	-0.8	32.1	54.0	21.9	346	208
19278.5	H	36.2	-9.9	26.3	54.0	27.7	103	19
21761.3	H	33.7	-7.2	26.5	54.0	27.5	400	131
2506.0	V	55.7	-14.0	41.7	54.0	12.3	386	38
7324.9	V	42.6	0.4	43.0	54.0	11.0	365	328
9810.0	V	32.5	-3.2	29.3	54.0	24.7	153	209
12230.7	V	32.7	-0.7	32.0	54.0	22.0	172	52
19586.0	V	36.0	-10.0	26.0	54.0	28.0	295	166
22101.9	V	33.7	-6.9	26.8	54.0	27.2	400	354

Note: Level AV = Reading AV + Factor

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 51 of 67
Seite 51 von 67

Table 28: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2352.0	H	67.3	-14.9	52.4	74.0	21.6	179	41
2416.0	H	66.4	-14.6	51.8	74.0	22.2	114	44
2544.0	H	65.2	-13.8	51.4	74.0	22.6	103	51
2608.0	H	64.5	-13.5	51.0	74.0	23.0	100	5
7441.5	H	54.6	0.0	54.6	74.0	19.4	100	212
9918.2	H	47.5	-3.2	44.3	74.0	29.7	108	104
12397.9	H	50.5	-1.3	49.2	74.0	24.8	171	34
2416.0	V	64.2	-14.6	49.6	74.0	24.4	376	84
7441.3	V	55.2	0.0	55.2	74.0	18.8	100	84
9918.4	V	49.0	-3.2	45.8	74.0	28.2	120	84
12397.7	V	47.2	-1.3	45.9	74.0	28.1	245	359

Note: Level PK = Reading PK + Factor

Table 29: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 2Mbps

Freq. [MHz]	Antenna Orient.	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2352.0	H	62.4	-14.9	47.5	54.0	6.5	179	41
2416.0	H	61.1	-14.6	46.5	54.0	7.5	114	44
2544.0	H	59.2	-13.8	45.4	54.0	8.6	103	51
2608.0	H	58.5	-13.5	45.0	54.0	9.0	100	5
7441.5	H	39.5	0.0	39.5	54.0	14.5	100	212
9918.2	H	34.5	-3.2	31.3	54.0	22.7	108	104
12397.9	H	38.3	-1.3	37.0	54.0	17.0	171	34
2416.0	V	57.8	-14.6	43.2	54.0	10.8	376	84
7441.3	V	41.5	0.0	41.5	54.0	12.5	100	84
9918.4	V	37.2	-3.2	34.0	54.0	20.0	120	84
12397.7	V	34.3	-1.3	33.0	54.0	21.0	245	359


Note: Level AV = Reading AV + Factor

Table 30: Restricted-band Band-edge, BLE, 1Mbps

Operating Frequency [MHz]	Antenna Orient.	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
2402	H	48.77	52.26	54.00	74.00	5.23	21.74
2402	V	41.14	47.37	54.00	74.00	12.86	26.63
2480	H	31.58	44.26	54.00	74.00	22.42	29.74
2480	V	30.15	40.00	54.00	74.00	23.85	34.00


Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBµV/m is calculated as follows: Average limit = 20 x Log₁₀(500µV/m).
Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 30: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode L (2402MHz), 1Mbps

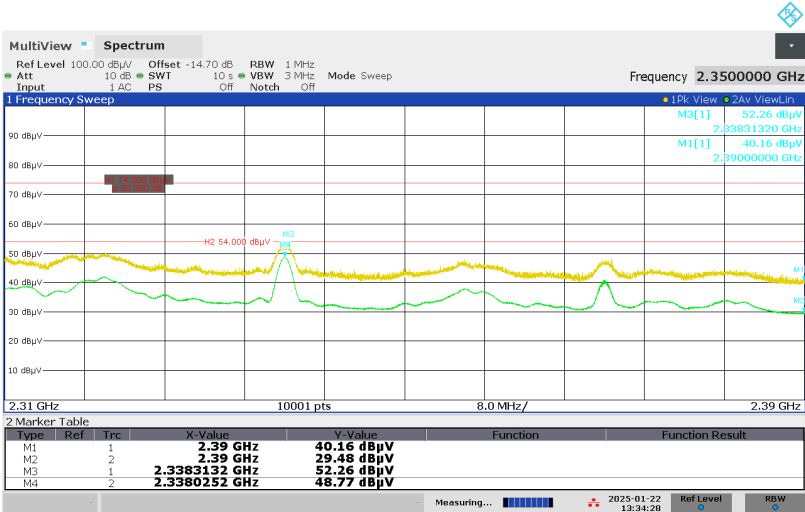


01:34:29 PM 01/22/2025

Figure 31: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode L (2402MHz), 1Mbps

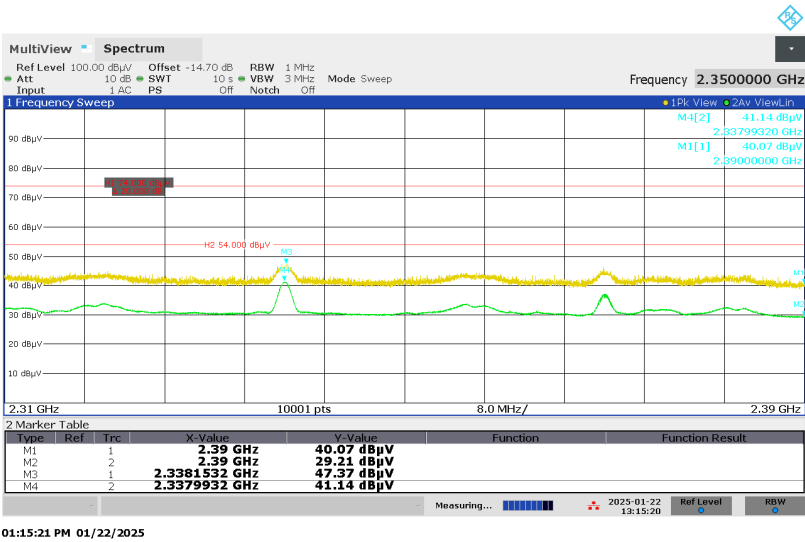

01:15:21 PM 01/22/2025

Figure 32: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode H (2480MHz), 1Mbps

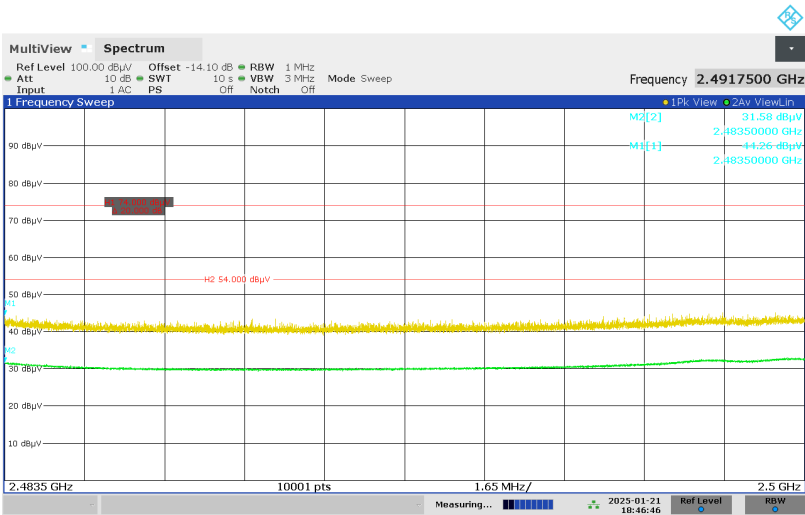

06:46:46 PM 01/21/2025

Figure 33: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode H (2480MHz), 1Mbps


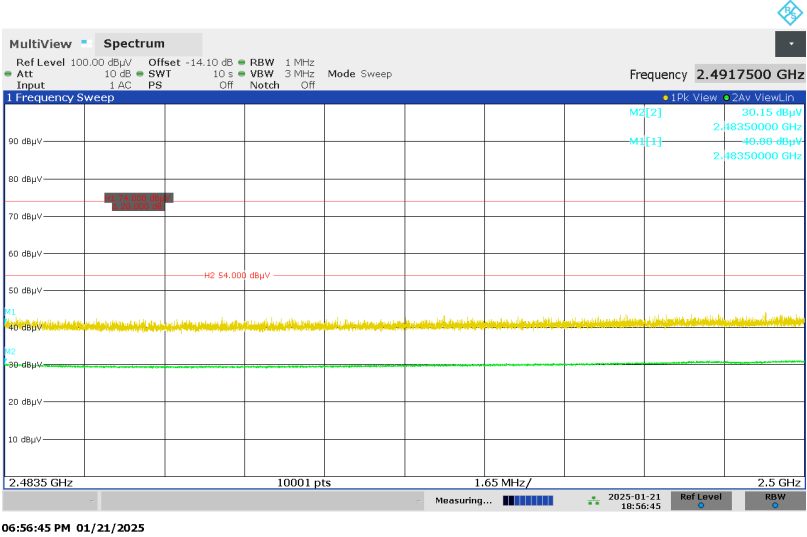


Table 31: Restricted-band Band-edge, BLE, 2Mbps

Operating Frequency [MHz]	Antenna Orient.	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
2402	H	47.64	52.15	54.00	74.00	6.36	21.85
2402	V	40.44	47.12	54.00	74.00	13.56	26.88
2480	H	35.94	46.54	54.00	74.00	18.06	27.46
2480	V	32.10	43.23	54.00	74.00	21.90	30.77


Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBµV/m is calculated as follows: Average limit = $20 \times \log_{10}(500\mu\text{V/m})$.
Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 34: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode L (2402MHz), 2Mbps

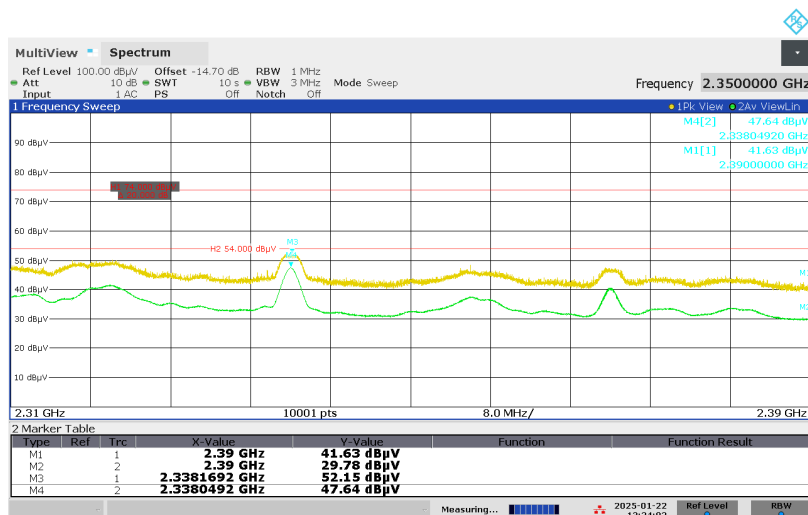

01:24:02 PM 01/22/2025

Figure 35: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode L (2402MHz), 2Mbps

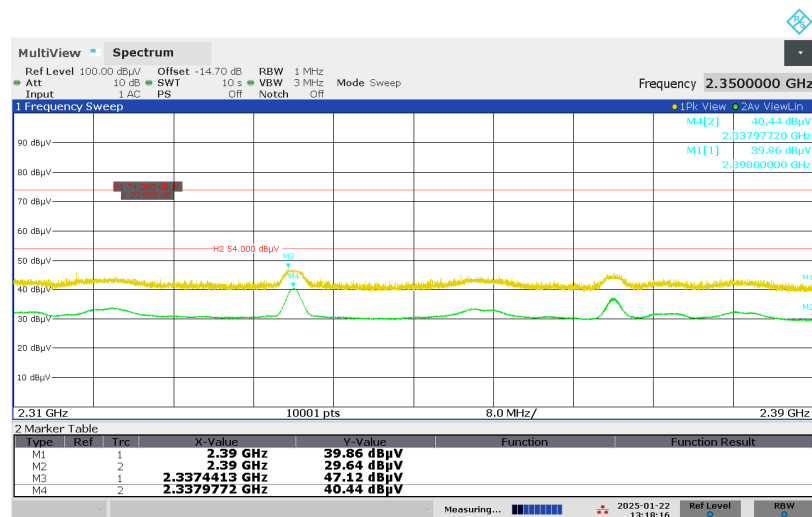


01:18:17 PM 01/22/2025

Figure 36: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode H (2480MHz), 2Mbps



06:51:07 PM 01/21/2025

Figure 37: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode H (2480MHz), 2Mbps

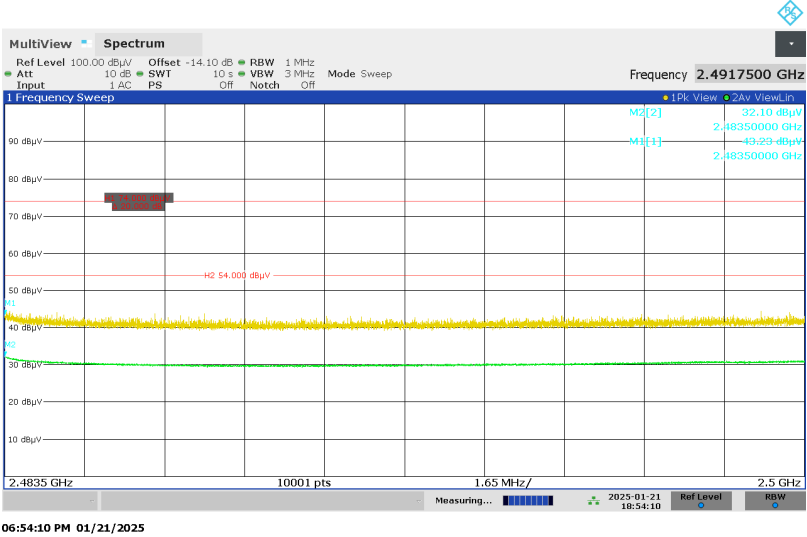

5.10 AC Power Line Conducted Emission of Transmitter

RESULT:

Pass

Date of testing: 2025-01-24

Ambient temperature: 26°C

Relative humidity: 29%

Atmospheric pressure: 1014hPa

Frequency range: 0.15 - 30MHz

Kind of test site: Shielded Room

Requirements:

FCC §15.207 and RSS-Gen §8.8

The AC power line conducted emission on any frequency within the band 150kHz to 30MHz shall not exceed the limits specified in FCC §15.207(a) and RSS-Gen §8.8 (table 4).

Test procedure:

ANSI C63.10-2020 §6.2 and RSS-Gen §8.1

The EUT was placed on an wooden table raised 80cm above the reference ground plane. A vertical conducting plane of the screened room was located 40cm to the rear of the EUT. The AC input port of the EUT was connected to a Line Impedance Stabilization Network (LISN).

The physical arrangement of the test system and associated cabling was varied to determine the effect on the EUT's emissions in amplitude and frequency in order to ensure that maximum emission amplitudes were attained.

The measurements were performed with a measurement receiver operating in the CISPR quasi-peak and average detection modes. The receiver's 6dB bandwidth was set to 9kHz.

Prechecks have been performed in the all operation modes to determine which mode produces the highest emission level. Final measurement was performed for the worst case operation mode.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned were small or not detectable.

Test Report No.:
Prüfbericht-Nr.:

JP24T1J5 001

Page 59 of 67
Seite 59 von 67

Table 32: AC Power Line Conducted Emission, 0.15 - 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), BLE, Mode L (2402MHz)

Freq. [MHz]	Phase	Reading QP [dBμV]	Reading AV [dBμV]	Factor [dB]	Level QP [dBμV]	Level AV [dBμV]	Limit QP [dBμV]	Limit AV [dBμV]	Margin QP [dB]	Margin AV [dB]
0.2198	N	34.5	8.7	9.8	44.3	18.5	62.8	52.8	18.5	34.3
0.4673	N	31.3	18.3	9.8	41.1	28.1	56.6	46.6	15.5	18.5
14.3610	N	38.4	29.3	10.6	49.0	39.9	60.0	50.0	11.0	10.1
14.8808	N	38.4	29.7	10.7	49.1	40.4	60.0	50.0	10.9	9.6
15.4793	N	39.8	31.4	10.7	50.5	42.1	60.0	50.0	9.5	7.9
15.9203	N	38.8	30.8	10.7	49.5	41.5	60.0	50.0	10.5	8.5
16.5593	N	38.2	30.8	10.7	48.9	41.5	60.0	50.0	11.1	8.5
20.5193	N	35.9	31.3	10.9	46.8	42.2	60.0	50.0	13.2	7.8
24.0000	N	28.8	20.6	11.1	39.9	31.7	60.0	50.0	20.1	18.3
0.2198	L	34.0	7.7	9.7	43.7	17.4	62.8	52.8	19.1	35.4
0.4673	L	31.7	17.7	9.8	41.5	27.5	56.6	46.6	15.1	19.1
4.8525	L	24.7	10.5	10.0	34.7	20.5	56.0	46.0	21.3	25.5
14.3610	L	38.3	29.1	10.5	48.8	39.6	60.0	50.0	11.2	10.4
14.8808	L	38.4	29.5	10.5	48.9	40.0	60.0	50.0	11.1	10.0
15.4793	L	39.8	31.3	10.5	50.3	41.8	60.0	50.0	9.7	8.2
15.9203	L	38.8	30.7	10.6	49.4	41.3	60.0	50.0	10.6	8.7
16.5593	L	38.2	30.6	10.6	48.8	41.2	60.0	50.0	11.2	8.8
20.5193	L	35.9	31.3	10.8	46.7	42.1	60.0	50.0	13.3	7.9
22.2405	L	30.6	25.4	10.9	41.5	36.3	60.0	50.0	18.5	13.7

Note: Level QP = Reading QP + Factor, Level AV = Reading AV + Factor

7. List of Tables

Table 1: Test Summary.....	5
Table 2: List of Test and Measurement Equipment.....	7
Table 3: Measurement Uncertainty.....	9
Table 4: Setting of Test Frequencies.....	12
Table 5: Interfaces present on the EUT.....	14
Table 6: EUT Serial Numbers.....	14
Table 7: Maximum Peak Output Power, BLE, 1Mbps.....	20
Table 8: Maximum Peak Output Power, BLE, 2Mbps.....	20
Table 9: 6dB Bandwidth, BLE, 1Mbps.....	22
Table 10: 6dB Bandwidth, BLE, 2Mbps.....	24
Table 11: 99% Bandwidth, BLE, 1Mbps.....	27
Table 12: 99% Bandwidth, BLE, 2Mbps.....	29
Table 13: Peak Power Spectral Density, BLE, 1Mbps.....	39
Table 14: Peak Power Spectral Density, BLE, 2Mbps.....	41
Table 15: Radiated Emissions, Quasi Peak Data, 9kHz - 30MHz, BLE, Mode M (2442MHz), 1Mbps.....	45
Table 16: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps.....	45
Table 17: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps.....	45
Table 18: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 1Mbps.....	46
Table 19: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 1Mbps.....	46
Table 20: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps.....	47
Table 21: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 1Mbps.....	47
Table 22: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 1Mbps.....	48
Table 23: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 1Mbps.....	48
Table 24: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 2Mbps.....	49
Table 25: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode L (2402MHz), 2Mbps.....	49
Table 26: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps.....	50
Table 27: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode M (2442MHz), 2Mbps.....	50
Table 28: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 2Mbps.....	51
Table 29: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, BLE, Mode H (2480MHz), 2Mbps.....	51
Table 30: Restricted-band Band-edge, BLE, 1Mbps.....	52
Table 31: Restricted-band Band-edge, BLE, 2Mbps.....	55
Table 32: AC Power Line Conducted Emission, 0.15 - 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), BLE, Mode L (2402MHz).....	59

8. List of Figures

Figure 1: Block Diagram.....	13
------------------------------	----

Figure 2: 6dB Bandwidth, BLE, Mode L (2402MHz), 1Mbps	22
Figure 3: 6dB Bandwidth, BLE, Mode M (2442MHz), 1Mbps	22
Figure 4: 6dB Bandwidth, BLE, Mode H (2480MHz), 1Mbps	23
Figure 5: 6dB Bandwidth, BLE, Mode L (2402MHz), 2Mbps	24
Figure 6: 6dB Bandwidth, BLE, Mode M (2442MHz), 2Mbps	24
Figure 7: 6dB Bandwidth, BLE, Mode H (2480MHz), 2Mbps	25
Figure 8: 99% Bandwidth, BLE, Mode L (2402MHz), 1Mbps	27
Figure 9: 99% Bandwidth, BLE, Mode M (2442MHz), 1Mbps	27
Figure 10: 99% Bandwidth, BLE, Mode H (2480MHz), 1Mbps	28
Figure 11: 99% Bandwidth, BLE, Mode L (2402MHz), 2Mbps	29
Figure 12: 99% Bandwidth, BLE, Mode M (2442MHz), 2Mbps	29
Figure 13: 99% Bandwidth, BLE, Mode H (2480MHz), 2Mbps	30
Figure 14: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode L (2402MHz), 1Mbps	32
Figure 15: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode M (2442MHz), 1Mbps	32
Figure 16: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode H (2480MHz), 1Mbps	33
Figure 17: Authorized-band band-edge, BLE, Mode L (2402MHz), 1Mbps	33
Figure 18: Authorized-band band-edge, BLE, Mode H (2480MHz), 1Mbps	34
Figure 19: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode L (2402MHz), 2Mbps	35
Figure 20: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode M (2442MHz), 2Mbps	35
Figure 21: Conducted Spurious Emissions, 30MHz - 25GHz, BLE, Mode H (2480MHz), 2Mbps	36
Figure 22: Authorized-band band-edge, BLE, Mode L (2402MHz), 2Mbps	36
Figure 23: Authorized-band band-edge, BLE, Mode H (2480MHz), 2Mbps	37
Figure 24: Power Spectral Density, BLE, Mode L (2402MHz), 1Mbps	39
Figure 25: Power Spectral Density, BLE, Mode M (2442MHz), 1Mbps	40
Figure 26: Power Spectral Density, BLE, Mode H (2480MHz), 1Mbps	40
Figure 27: Power Spectral Density, BLE, Mode L (2402MHz), 2Mbps	41
Figure 28: Power Spectral Density, BLE, Mode M (2442MHz), 2Mbps	42
Figure 29: Power Spectral Density, BLE, Mode H (2480MHz), 2Mbps	42
Figure 30: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode L (2402MHz), 1Mbps	52
Figure 31: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode L (2402MHz), 1Mbps	53
Figure 32: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode H (2480MHz), 1Mbps	53
Figure 33: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode H (2480MHz), 1Mbps	54
Figure 34: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode L (2402MHz), 2Mbps	55
Figure 35: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode L (2402MHz), 2Mbps	56
Figure 36: Restricted-band Band-edge, Spectral Diagram, Horizontal Antenna Orientation, BLE, Mode H (2480MHz), 2Mbps	56
Figure 37: Restricted-band Band-edge, Spectral Diagram, Vertical Antenna Orientation, BLE, Mode H (2480MHz), 2Mbps	57

9. List of Photographs

Photograph 1: Set-up for Antenna Port Conducted Emission of Transmitter, General View	60
Photograph 2: Set-up for Radiated Spurious Emission below 30MHz, Front View	61
Photograph 3: Set-up for Radiated Spurious Emission below 30MHz, Rear View	61
Photograph 4: Set-up for Radiated Spurious Emission below 1GHz, Front View	62
Photograph 5: Set-up for Radiated Spurious Emission below 1GHz, Rear View	62
Photograph 6: Set-up for Radiated Spurious Emission above 1GHz, Front View	63

Test Report No.: Prüfbericht-Nr.:	JP24T1J5 001	Page 67 of 67 Seite 67 von 67
--------------------------------------	---------------------	----------------------------------

Photograph 7: Set-up for Radiated Spurious Emission above 1GHz, Rear View	63
Photograph 8: Set-up for AC Power Line Conducted Emission, Front View.....	64
Photograph 9: Set-up for AC Power Line Conducted Emission, Rear View	64

– End of test report –