

## TEST REPORT

**Applicant** : A&D Company, Limited

**Address** : 1-243, Asahi, Kitamoto-shi, Saitama 364-8585, Japan

**Products** : Digital Blood Pressure Monitor

**Model No.** : UB-6500BLEWM

**Serial No.** : --

**Test Standard** : CFR 47 FCC Rules and Regulations Part 15 Subpart C

**FCC ID** : KSN-UB546L

**Test Results** : **Passed**

**Date of Receipt** : March 14, 2024

**Date of Test** : March 22 ~ 25, 2024



Hiroyuki Nakamura  
Senior Manager  
Japan Quality Assurance Organization  
Kitakansai Testing Center  
Saito EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The test results in this test report was made by using the measuring instruments which are traceable to national standards of measurement in accordance with ISO/IEC 17025.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents for the equipment under test (EUT) such as identification information in clause 2 and 6 of this report were provided by the applicant. JQA is not responsible for the test results affected by the incorrect information.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

**REVISION HISTORY**

File No.	Contents	Issue Date
KL80230924	Initial Issue	April 12, 2024

**TABLE OF CONTENTS**

	<b>Page</b>
<b>1 Summary of Test Results.....</b>	<b>4</b>
<b>2 Description of Equipment Under Test (EUT).....</b>	<b>5</b>
<b>2.1 General Information.....</b>	<b>5</b>
<b>2.2 Channel List .....</b>	<b>5</b>
<b>3 Test Location.....</b>	<b>6</b>
<b>4 Accreditation of Test Laboratory .....</b>	<b>6</b>
<b>5 Measurement Uncertainty .....</b>	<b>6</b>
<b>6 Setup of EUT .....</b>	<b>7</b>
<b>6.1 Test Configuration .....</b>	<b>7</b>
<b>6.2 Test Arrangement (Drawings) .....</b>	<b>7</b>
<b>6.3 Operating Condition .....</b>	<b>8</b>
<b>6.4 Duty Cycle .....</b>	<b>9</b>
<b>7 Test Item .....</b>	<b>10</b>
<b>7.1 99% Occupied Bandwidth.....</b>	<b>10</b>
<b>7.2 6 dB Emission Bandwidth.....</b>	<b>13</b>
<b>7.3 Power Spectral Density.....</b>	<b>16</b>
<b>7.4 Maximum Conducted Output Power.....</b>	<b>19</b>
<b>7.5 Conducted Spurious Emission .....</b>	<b>21</b>
<b>7.6 Radiated Spurious Emission .....</b>	<b>29</b>
<b>7.7 RF Exposure Considerations (KDB 447498 D01) .....</b>	<b>50</b>
<b>8 Test Setup (Photographs).....</b>	<b>51</b>

## 1 Summary of Test Results


Applied Standard : CFR 47 FCC Rules and Regulations Part 15 – Radio Frequency Devices  
Subpart C – Intentional Radiators

Item	FCC rules	Result	Note
Antenna Requirement	§15.203	Passed	1
99% Occupied Bandwidth	--	--	2
6 dB Emission Bandwidth	§15.247(a)(2)	Passed	
Power Spectral Density	§15.247(e)	Passed	
Maximum Conducted Output Power	§15.247(b)(3)	Passed	
Conducted Spurious Emission	§15.247(d)	Passed	
Radiated Spurious Emission	§15.205, §15.209 and §15.247(d)	Passed	
AC Powerline Conducted Emission	§15.207	Not Applicable	3
RF Exposure	§1.1310, §2.1091 and §15.247(i)	Passed	
1) The EUT is designed to ensure that no antenna other than that furnished by the manufacturer shall be used. Information for antenna type is described in clause 2. 2) Reporting purposes only 3) The EUT is not connected to the AC mains.			

In the approval of test results,

- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by  
Yasuhisa Sakai / Deputy Senior Manager

  
\_\_\_\_\_

Tested by  
Yuji Shintaku / Assistant Manager

  
\_\_\_\_\_

## 2 Description of Equipment Under Test (EUT)

### 2.1 General Information

Manufacturer	A&D ELECTRONICS (Shen Zhen) CO., LTD 1-5/F ,No.4 Building, Hengchangrong High Tech Ind. Park, Shangnan East Rd, China
Products	Digital Blood Pressure Monitor
Model No.	UB-6500BLEWM
Serial No.	--
Product Type	Pre-production
Date of Manufacture	--
Power Rating	3VDC (Batteries LR03 or AAA x2)
EUT Grounding	None
Modulation Technology	Digital transmission system (DTS)
Modulation Type	Bluetooth 5.1 +LE (GFSK)
Operating Frequency	2402.0 MHz (00CH) – 2480.0MHz (39CH)
Antenna Type	PC8224 Pattern Antenna
Antenna Gain	-2.3 dBi

### 2.2 Channel List

40 channels are provided for BLE.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	⋮	⋮
2	2406	⋮	⋮
⋮	⋮	37	2476
18	2438	38	2478
19	2440	39	2480

### 3 Test Location

Japan Quality Assurance Organization (JQA)  
Kitakansai Testing Center Saito EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 4 Accreditation of Test Laboratory

JQA Kitakansai Testing Center Saito EMC Branch is accredited under ISO/IEC 17025 by the following accreditation bodies and the test facility is registered by the following bodies. If the accreditation logo does not appear on this cover, it is outside the scope of ISO/IEC 17025.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : April 30, 2024)  
A2LA Accreditation No. : 5498.01 (Expiry date : November 30, 2025)

VCCI Registration No. : A-0002 (Expiry date : April 30, 2024)  
FCC Registration No. : JP5008 (Expiry date : April 30, 2024)  
ISED Registration No. : JP0014 (Expiry date : November 30, 2025)  
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006  
(Expiry date : September 14, 2025)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2025)

### 5 Measurement Uncertainty

Item	Frequency	Uncertainty ( <i>U</i> )
Emission Bandwidth	--	± 0.9 %
Peak Output Power	--	± 0.9 dB
Conducted Emission (Antenna Port)	9 kHz – 1 GHz	± 1.4 dB
	1 GHz – 18 GHz	± 1.7 dB
	18 GHz – 40 GHz	± 2.3 dB
Radiated Emission	9 kHz – 30 MHz	± 3.0 dB
	30 MHz – 200 MHz	± 3.6 dB
	200 MHz – 1000 MHz	± 4.8 dB
	1 GHz – 6 GHz	± 4.7 dB
	6 GHz – 18 GHz	± 4.6 dB
	18 GHz – 40 GHz	± 5.1 dB
AC Powerline Conducted Emission	150 kHz – 30 MHz	± 2.6 dB

Determining compliance with the limits in this test report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty (MIU).

The reported expanded uncertainty of measurement, *U* is described with using the coverage factor *k* = 2, to give a level of confidence of approximately 95 %.

## 6 Setup of EUT

### 6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.
A	Digital Blood Pressure Monitor	A&D ELECTRONICS (Shen Zhen) CO., LTD	UB-6500BLEVM	--


The auxiliary equipment (AE) used for testing :

None

Type of Cable:

None

### 6.2 Test Arrangement (Drawings)



3VDC (LR03 x2) (\*)

\*) A DC external power supply was used instead of batteries due to output the stable power.

### 6.3 Operating Condition

#### Test Mode

The EUT is set with the test mode, the specification of the test mode is as followings.

Bluetooth Low Energy Mode (Bluetooth 5.1 +LE):

Transmitting frequency : 2402 MHz (00CH) – 2480 MHz (39CH)

Receiver frequency : 2402 MHz (00CH) – 2480 MHz (39CH)

The tests were performed in the following worst condition.

Mode	Data Rate (Worst)	Channel
BLE 1 Mbps	1 Mbps	0, 19, 39
BLE 2 Mbps	2 Mbps	0, 19, 39

The EUT with temporary antenna port was used in conducted measurement.

The tests were performed using the following test program supplied by applicant;

- Software Name : Tera Term
- Software Version : Version 4.106 (SVN# 9298)
- Storage Location : Controller PC



6.4 Duty Cycle

Mode	On Time (msec.)	On+Off Time (msec.)	Duty Cycle (%)	Duty Factor (dB)	VBW [ $>1/T$ ] (kHz)
BLE 1 Mbps	1.000	1.000	100.0	0.00	$> 0.01$
BLE 2 Mbps	1.000	1.000	100.0	0.00	$> 0.01$



**7 Test Item**


**7.1 99% Occupied Bandwidth**

**7.1.1 Test Site and Instruments**

Test Site : Shielded Room S3					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Spectrum Analyzer	N9010A	MY50420292 (A-12)	Agilent	2023/12/12	2024/12/11
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2023/08/29	2024/08/28
Attenuator	54A-10	W5732 (D-30)	Weinschel	2023/05/26	2024/05/25
Thermo-Hygrometer	testo 608-H2	30050650 (F-71)	testo	2023/04/24	2024/04/23
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

**7.1.2 Test Method and Test Setup (Diagrammatic illustration)**


The EUT is connected to the measuring equipment via a suitable attenuator.  
The test conditions and methods comply with the following test standards.  
- ANSI C63.10-2020 +Cor.1-2023 clause 6.9.3




7.1.3 Test Data

Test Date: March 25, 2024  
Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Limits (MHz)
BLE 1 Mbps	0	2402	1.065	--
	19	2440	1.067	--
	39	2480	1.076	--
BLE 2 Mbps	0	2402	2.096	--
	19	2440	2.110	--
	39	2480	2.110	--

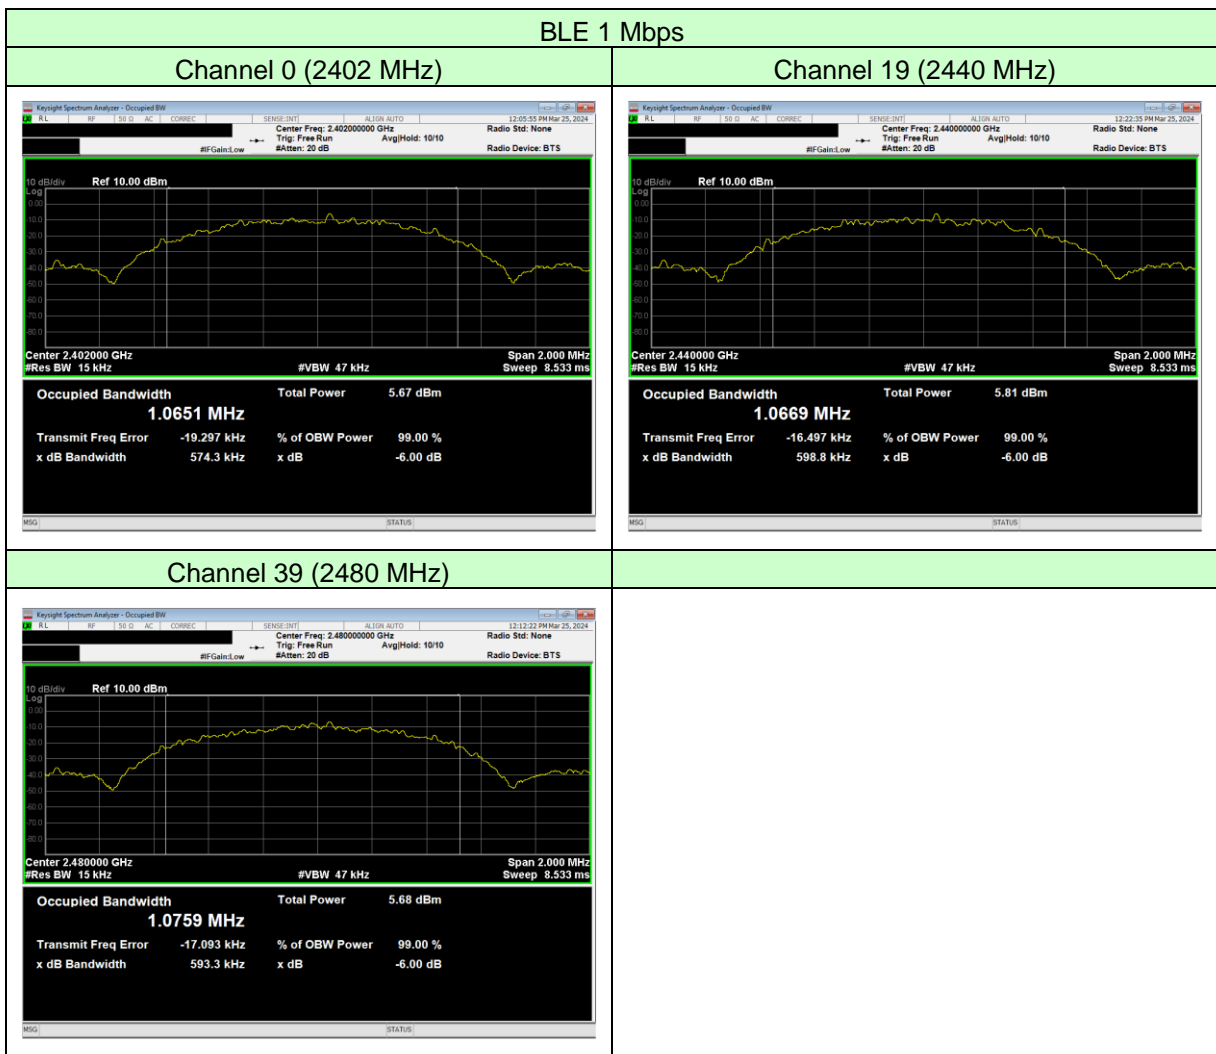

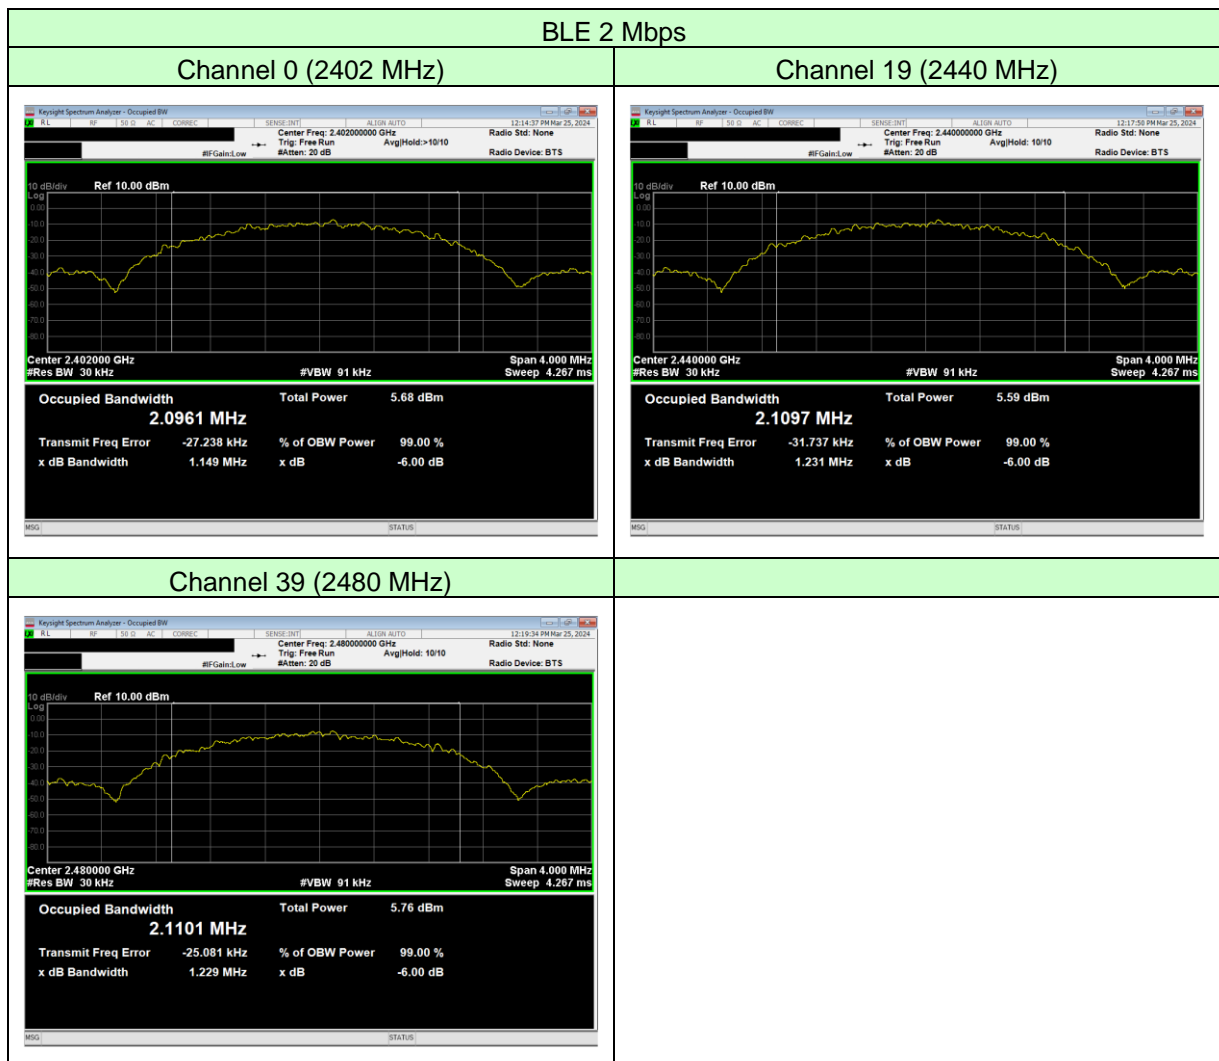

**7.2 6 dB Emission Bandwidth**

**7.2.1 Test Site and Instruments**


Test Site : Shielded Room S3					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Spectrum Analyzer	N9010A	MY50420292 (A-12)	Agilent	2023/12/12	2024/12/11
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2023/08/29	2024/08/28
Attenuator	54A-10	W5732 (D-30)	Weinschel	2023/05/26	2024/05/25
Thermo-Hygrometer	testo 608-H2	30050650 (F-71)	testo	2023/04/24	2024/04/23
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

**7.2.2 Test Method and Test Setup (Diagrammatic illustration)**

The EUT is connected to the measuring equipment via a suitable attenuator.

The test conditions and methods comply with the following test standards.


- KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020 +Cor.1-2023 clause 11.8




7.2.3 Test Data

Test Date: March 25, 2024  
Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limits (MHz)
BLE 1 Mbps	0	2402	0.722	≥ 0.5
	19	2440	0.727	≥ 0.5
	39	2480	0.747	≥ 0.5
BLE 2 Mbps	0	2402	1.281	≥ 0.5
	19	2440	1.294	≥ 0.5
	39	2480	1.255	≥ 0.5

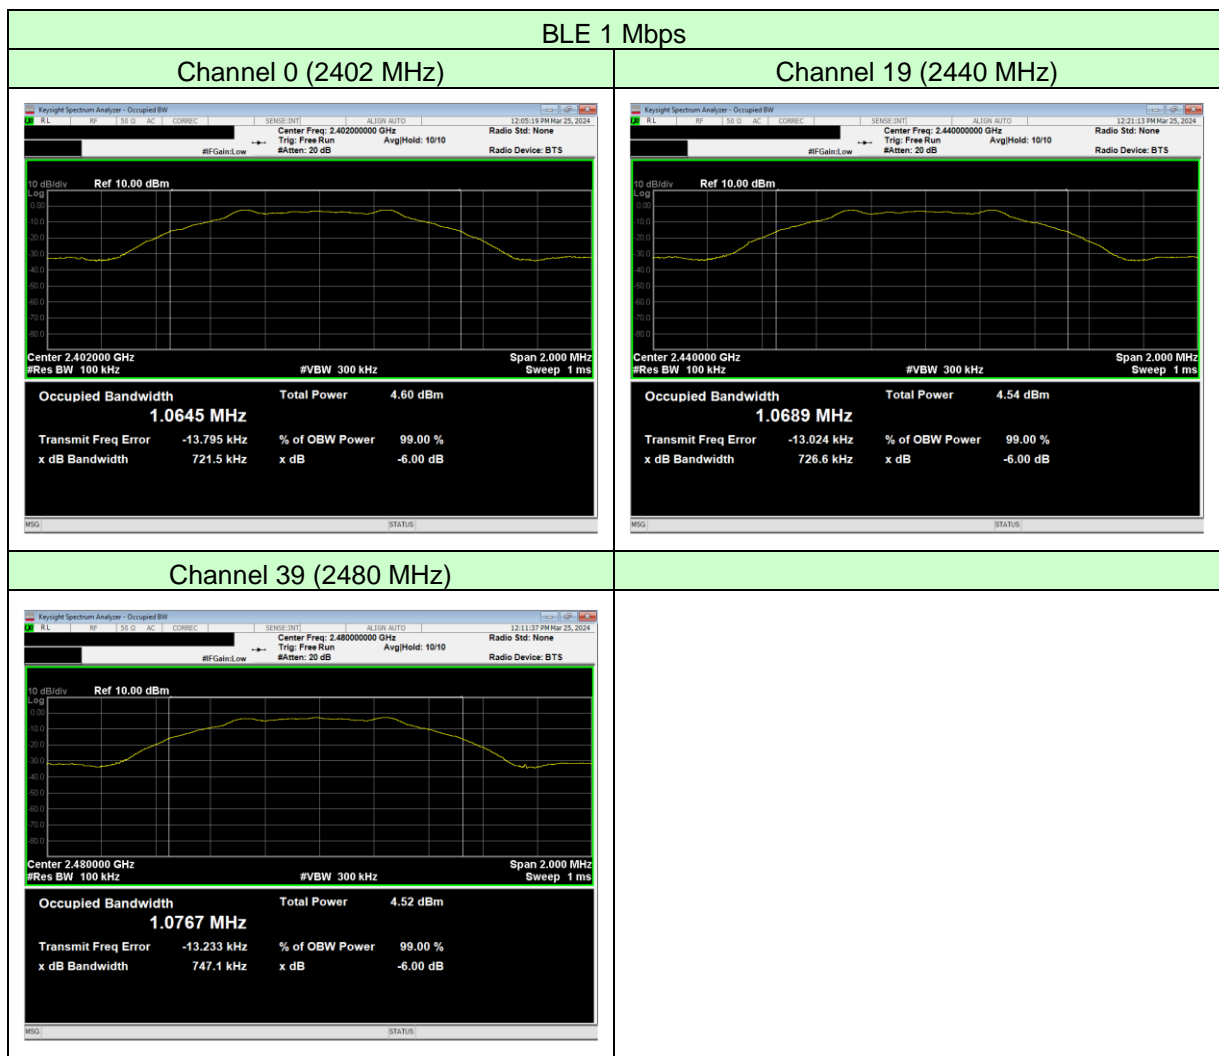

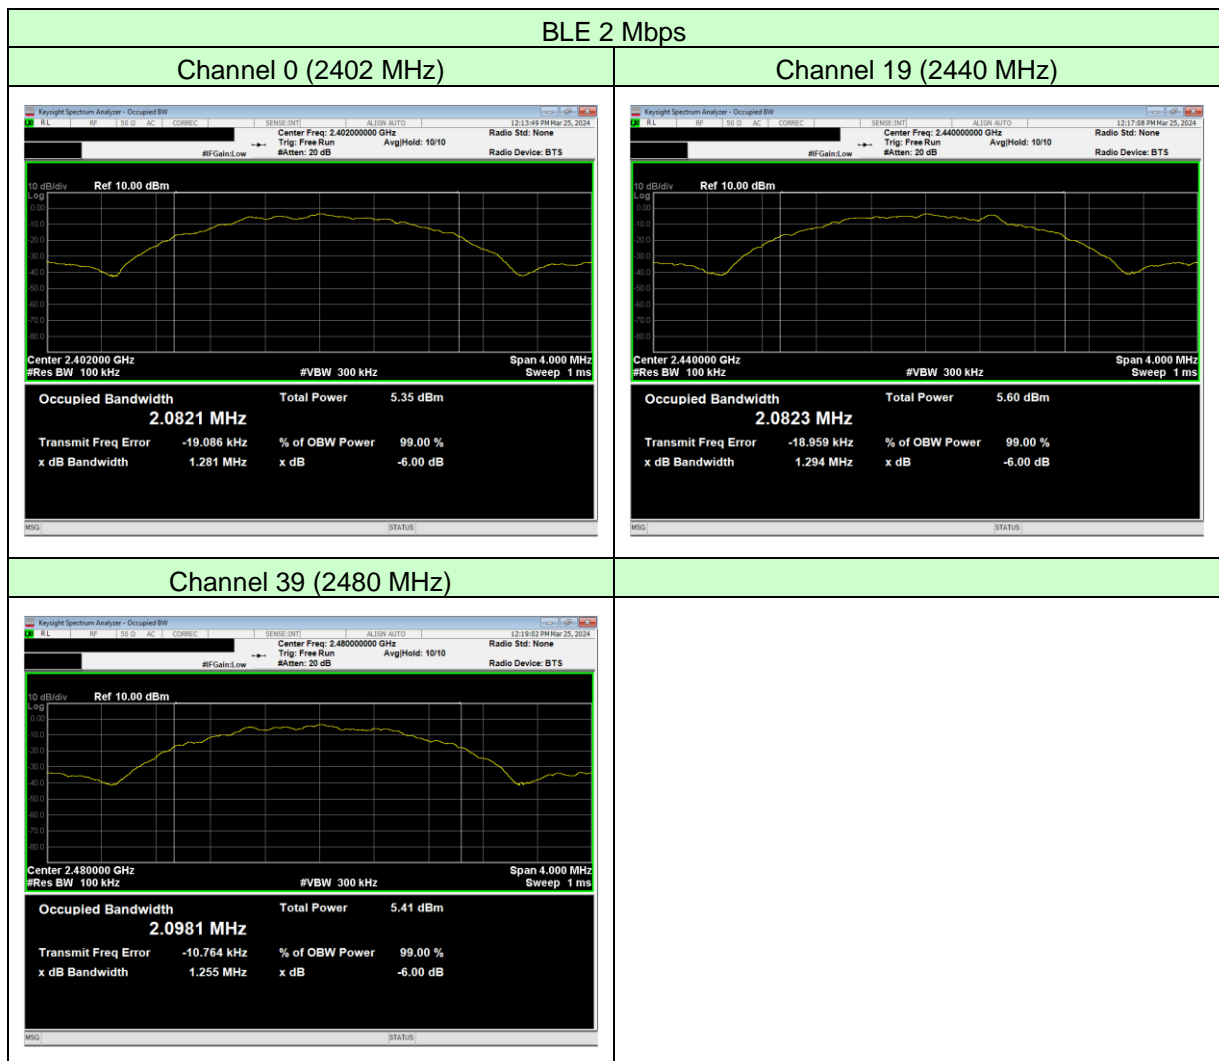

**7.3 Power Spectral Density**

**7.3.1 Test Site and Instruments**


Test Site : Shielded Room S3					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Spectrum Analyzer	N9010A	MY50420292 (A-12)	Agilent	2023/12/12	2024/12/11
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2023/08/29	2024/08/28
Attenuator	54A-10	W5732 (D-30)	Weinschel	2023/05/26	2024/05/25
Thermo-Hygrometer	testo 608-H2	30050650 (F-71)	testo	2023/04/24	2024/04/23
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

**7.3.2 Test Method and Test Setup (Diagrammatic illustration)**

The EUT is connected to the measuring equipment via a suitable attenuator.

The test conditions and methods comply with the following test standards.

- KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020 +Cor.1-2023 clause 11.10





7.3.3 Test Data

Test Date: March 25, 2024  
Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/30kHz)	Limits (dBm/3kHz)
BLE 1 Mbps	0	2402	-5.16	≤ 8.0
	19	2440	-4.95	≤ 8.0
	39	2480	-5.13	≤ 8.0
BLE 2 Mbps	0	2402	-6.51	≤ 8.0
	19	2440	-7.15	≤ 8.0
	39	2480	-6.88	≤ 8.0





**7.4 Maximum Conducted Output Power**

**7.4.1 Test Site and Instruments**


Test Site : Shielded Room S3					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Power Meter	ML2495A	1423001 (B-16)	Anritsu	2023/08/14	2024/08/13
Power Sensor	MA2411B	1339136 (B-18)	Anritsu	2023/08/14	2024/08/13
Attenuator	54A-10	W5732 (D-30)	Weinschel	2023/05/26	2024/05/25
Thermo-Hygrometer	testo 608-H2	30050650 (F-71)	testo	2023/04/24	2024/04/23
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

**7.4.2 Test Method and Test Setup (Diagrammatic illustration)**

The EUT is connected to the measuring equipment via a suitable attenuator.

The test conditions and methods comply with the following test standards.

- KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020 +Cor.1-2023 clause 11.9.1.2 (PKPM1) and 11.9.2.3.2 (AVGPM-G)



7.4.3 Test Data

Test Date: March 25, 2024  
 Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limits (dBm)
BLE 1 Mbps	0	2402	-1.72	≤ 30.0
	19	2440	-1.74	≤ 30.0
	39	2480	-1.69	≤ 30.0
BLE 2 Mbps	0	2402	-1.72	≤ 30.0
	19	2440	-1.73	≤ 30.0
	39	2480	-1.72	≤ 30.0

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limits (dBm)
BLE 1 Mbps	0	2402	-1.97	--
	19	2440	-1.97	--
	39	2480	-1.96	--
BLE 2 Mbps	0	2402	-1.97	--
	19	2440	-1.97	--
	39	2480	-1.96	--

**7.5 Conducted Spurious Emission**

**7.5.1 Test Site and Instruments**


Test Site : Shielded Room S3					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Spectrum Analyzer	N9010A	MY50420292 (A-12)	Agilent	2023/12/12	2024/12/11
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2023/08/29	2024/08/28
Attenuator	54A-10	W5732 (D-30)	Weinschel	2023/05/26	2024/05/25
Thermo-Hygrometer	testo 608-H2	30050650 (F-71)	testo	2023/04/24	2024/04/23
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

**7.5.2 Test Method and Test Setup (Diagrammatic illustration)**

The EUT is connected to the measuring equipment via a suitable attenuator.

The test conditions and methods comply with the following test standards.



- KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020 +Cor.1-2023 clause 11.11



7.5.3 Test Data

7.5.3.1 Band-edge Emission


Test Date: March 25, 2024  
Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa

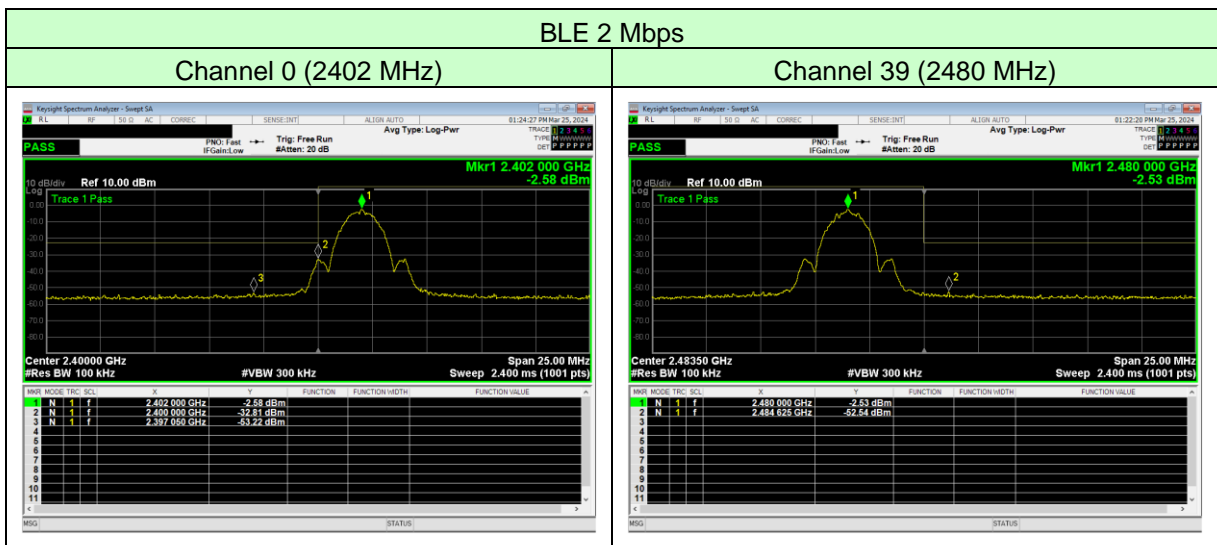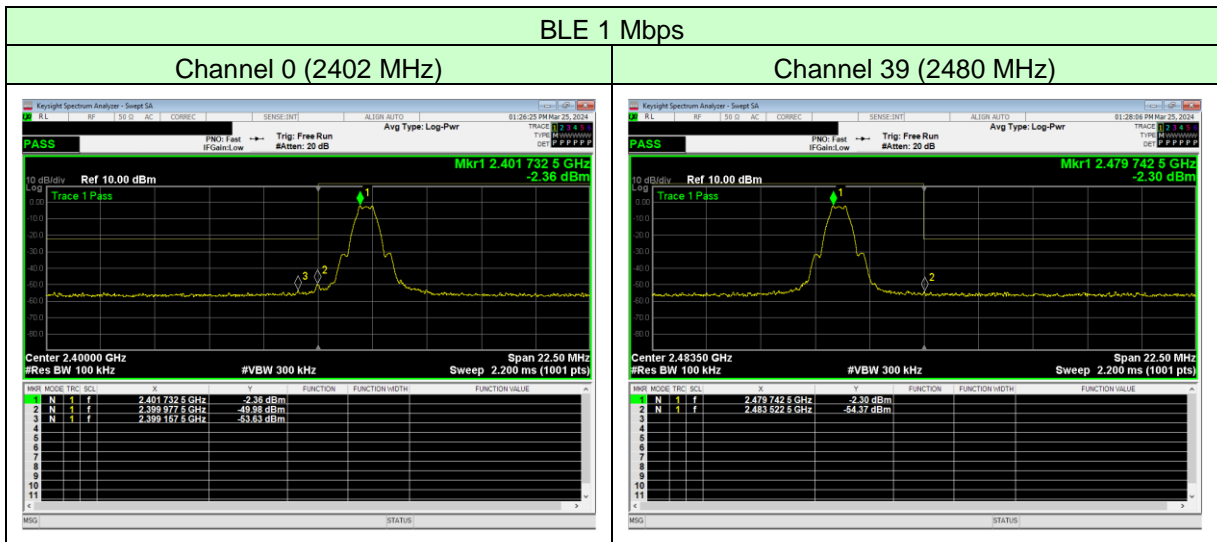


7.5.3.2 Conducted Spurious Emission


Test Date: March 25, 2024  
Temp.: 20 °C, RH: 58 %, Atm.: 998 hPa




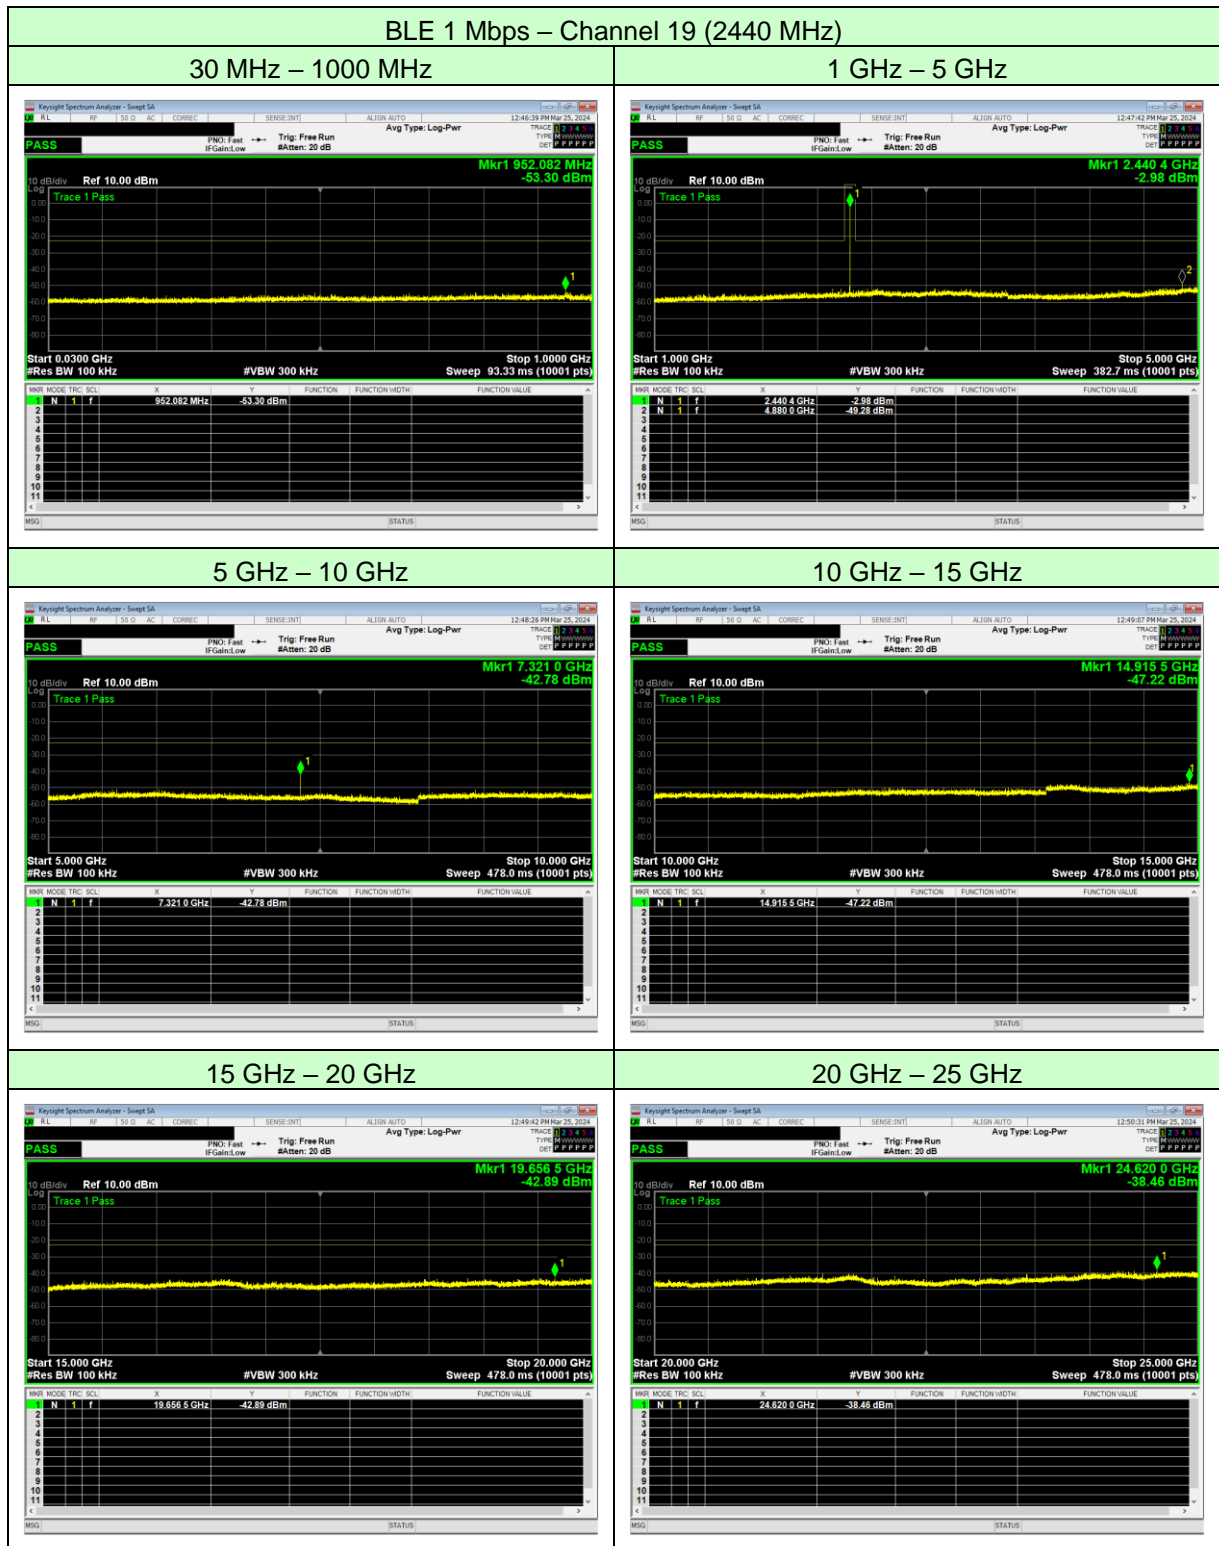




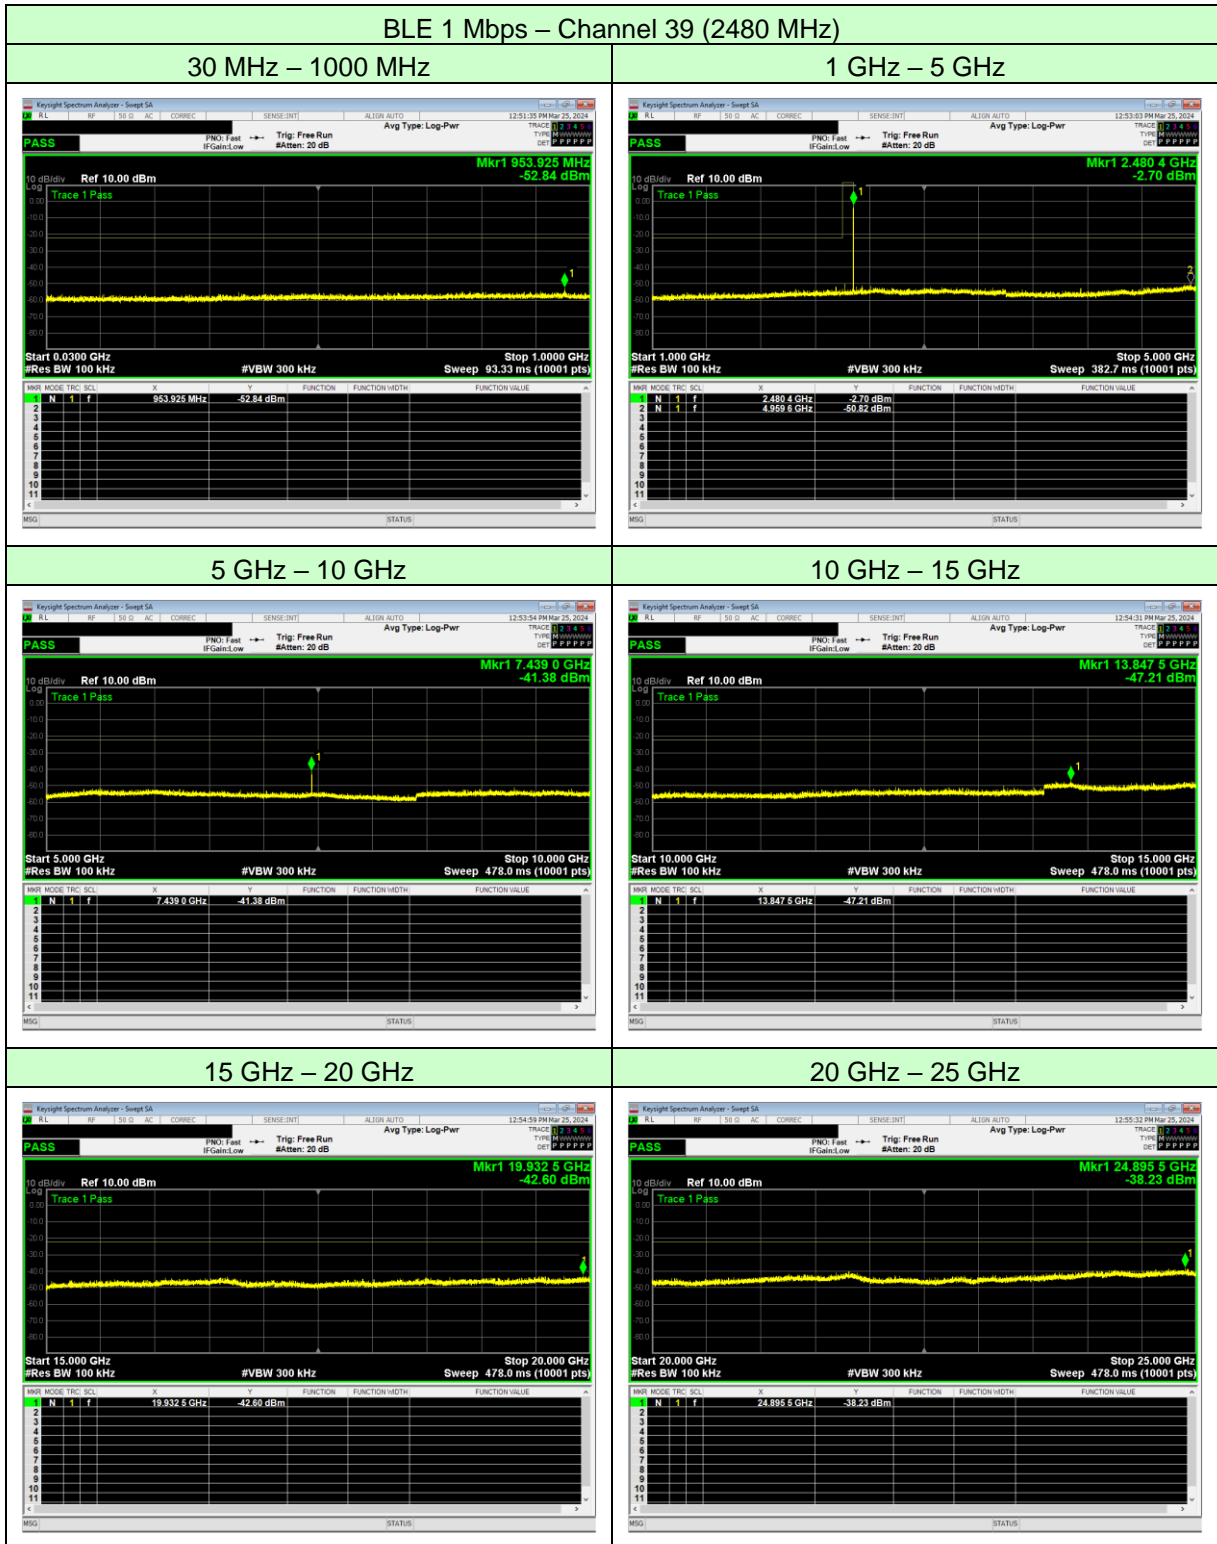

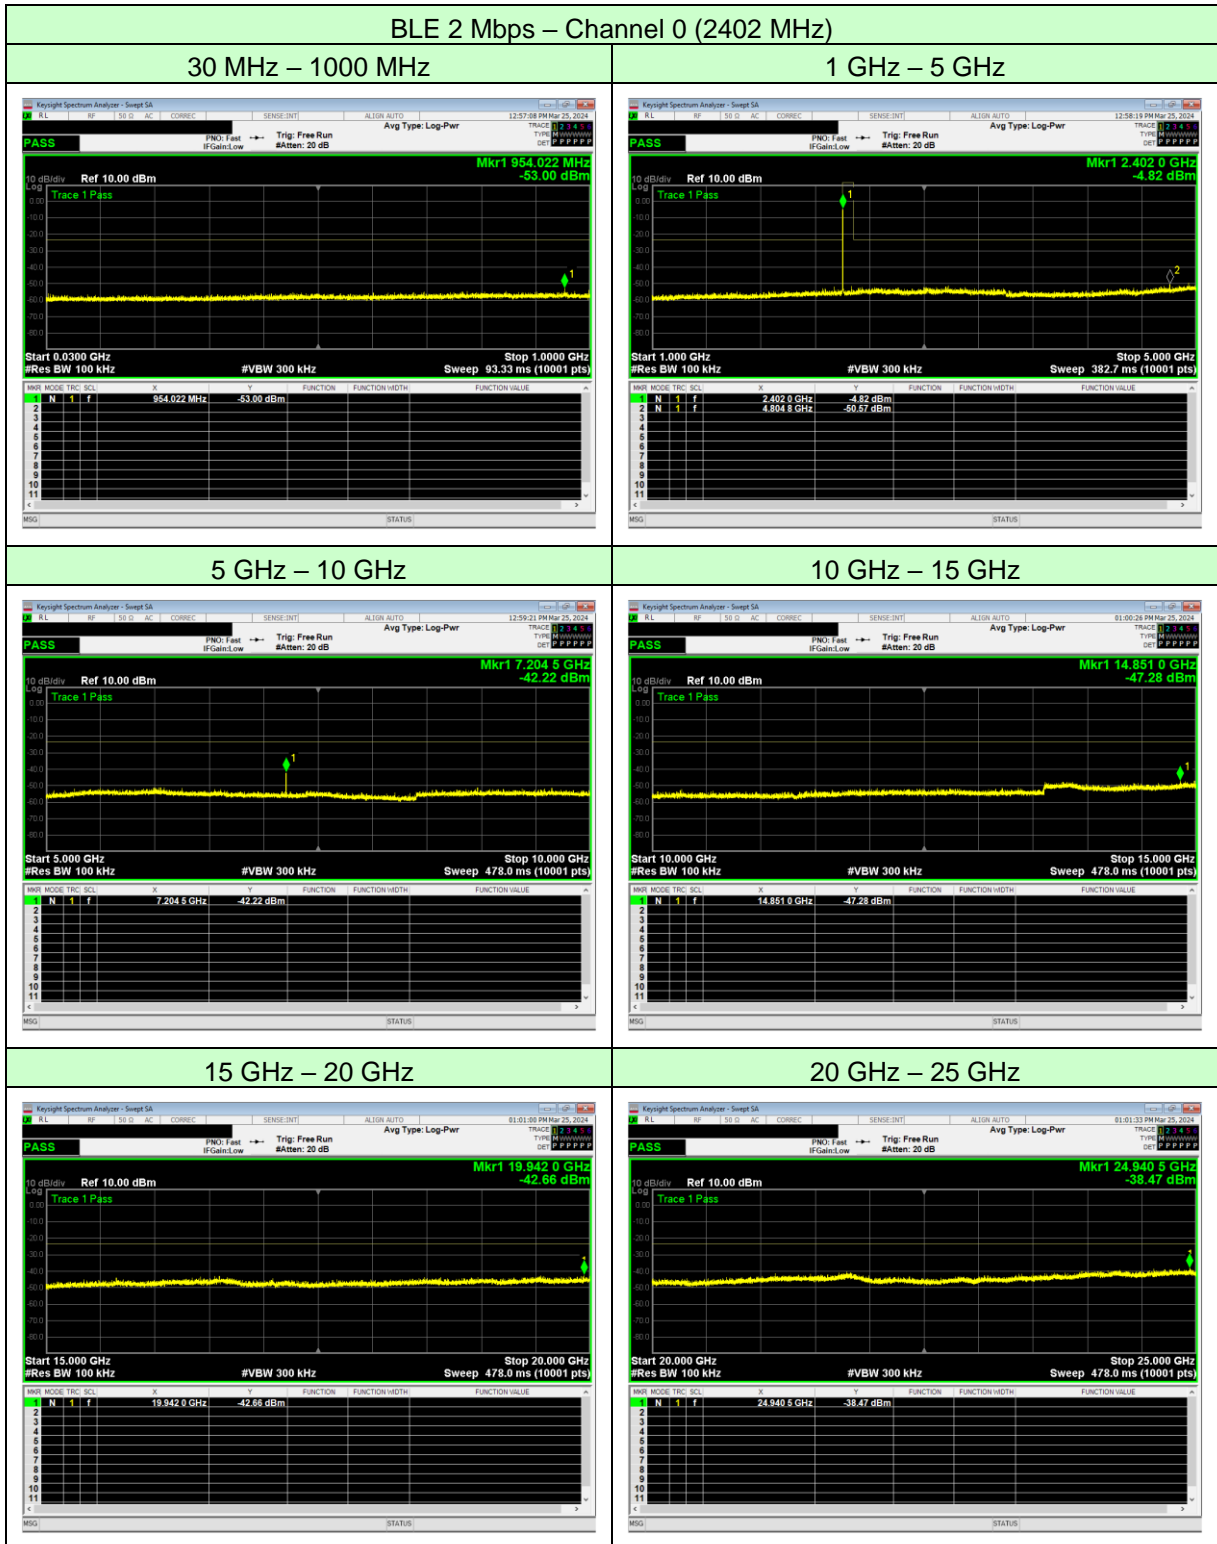

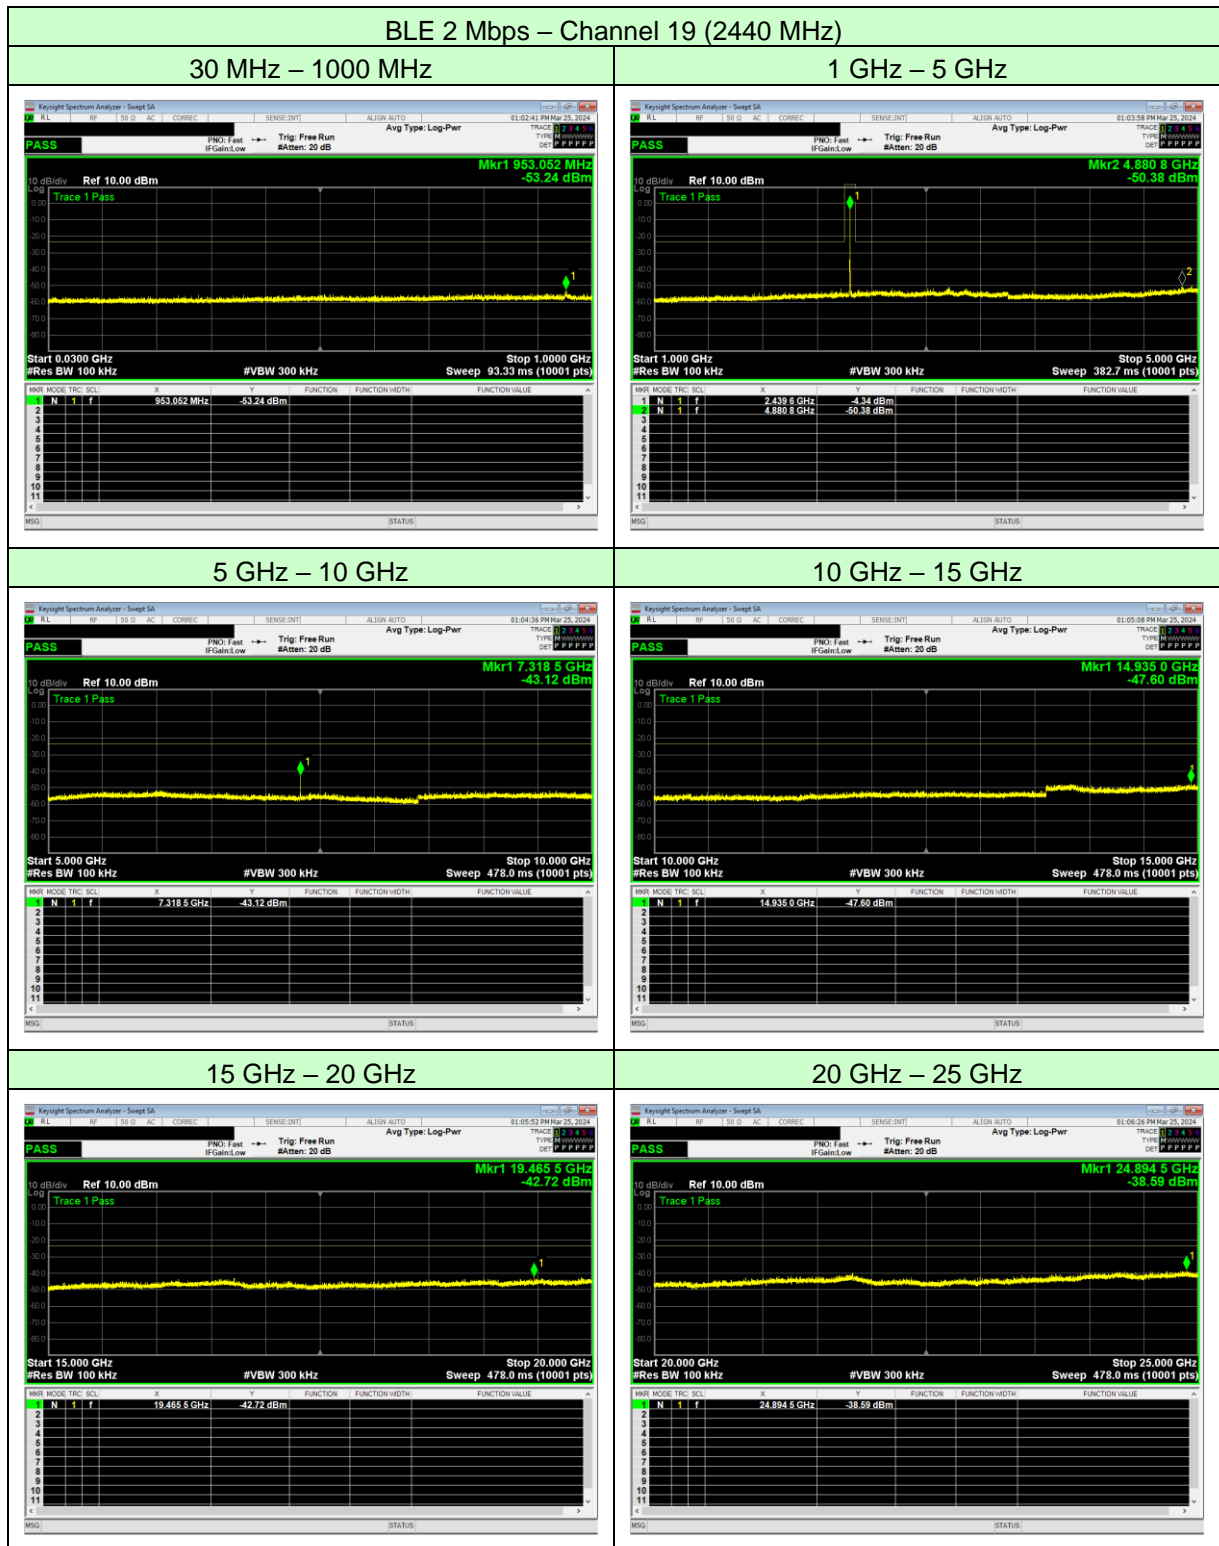

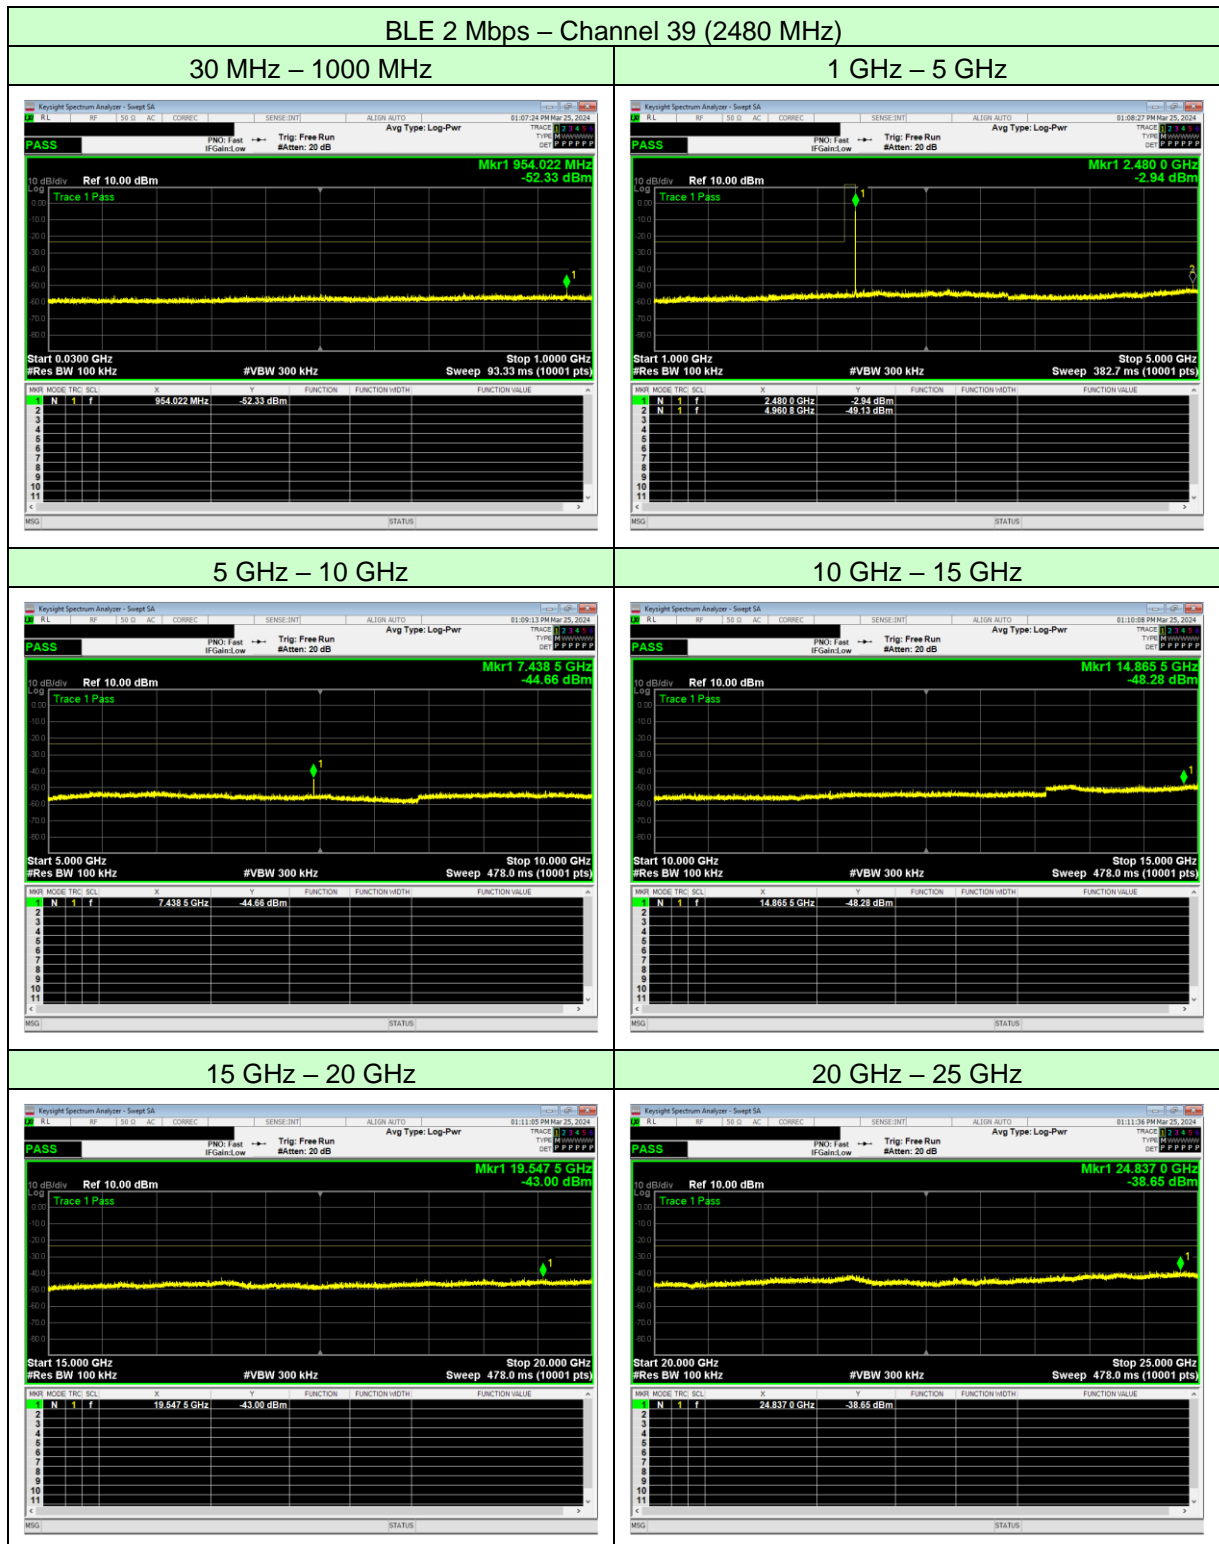

## 7.6 Radiated Spurious Emission

### 7.6.1 Test Site and Instruments

Test Site : Anechoic Chamber A2					
Type	Model	Serial No. (ID)	Manufacturer	Last Cal.	Cal. Due
Test Receiver	ESR26	101680 (A-76)	Rohde & Schwarz	2024/01/29	2025/01/28
Pre-Amplifier	310N	304573 (A-17)	SONOMA	2023/11/07	2024/11/06
Pre-Amplifier	RP1826G-45H	RP140121-11 (A-53)	EMCS	2023/07/17	2024/07/16
Pre-Amplifier	BZR-01001800-201040-182323-HS	23804 (A-65)	B&Z	2024/02/07	2025/02/06
Loop Antenna	HFH2-Z2	872096/25 (C-2)	Rohde & Schwarz	2023/05/25	2024/05/24
Biconical Antenna	VHBB9124/BBA9106	01314 (C-85)	Schwarzbeck	2023/11/01	2024/10/31
Log-periodic Antenna	VULP9118B	871 (C-39)	Schwarzbeck	2023/11/01	2024/10/31
Horn Antenna	91889-2	568 (C-41-2)	EATON	2023/05/23	2024/05/22
Double-Ridge Guide Horn Antenna	3115	00227684 (C-103)	ETS LINDGREN	2023/05/22	2024/05/21
Horn Antenna	3160-08	9904-1099 (C-59)	EMCO	2023/05/23	2024/05/22
Horn Antenna	3160-09	9808-1117 (C-48)	EMCO	2023/07/17	2024/07/16
RF Cable	SF102E	6683/2E (C-70)	HUBER+SUHNER	2023/04/03	2024/04/02
RF Cable	SF102E	10055/2E (C-75)	HUBER+SUHNER	2023/04/03	2024/04/02
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2023/11/07	2024/11/06
RF Cable	RG213/U	--- (H-28)	HUBER+SUHNER	2023/05/25	2024/05/24
Band Rejection Filter	BRM50702	371 (D-121)	MICRO-TRONICS	2023/10/05	2024/10/04
EMC Software	EP5/RE	Ver.6.00.120	TOYO	--	--
Thermo-Hygrometer	testo 608-H2	30050646 (F-68)	testo	2023/06/09	2024/06/08
Barometer	BAROMEX	02952 (F-48)	SATO	2023/08/16	2024/08/15

### 7.6.2 Test Method and Test Setup (Diagrammatic illustration)

The test conditions and methods comply with the following test standards.

- KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020 +Cor.1-2023 clause 11.12

**7.6.2.1 Radiated Spurious Emission 9 kHz – 30 MHz**


The pre-scan measurements were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

The measurement were performed about three antenna orientations (parallel, perpendicular, and ground-parallel).

According to KDB 414788, a used anechoic chamber were equivalent to those on an open fields site based on comparison measurements.

This configurations was used for formal measurements.

(Reference divisional instruction No. G703649)

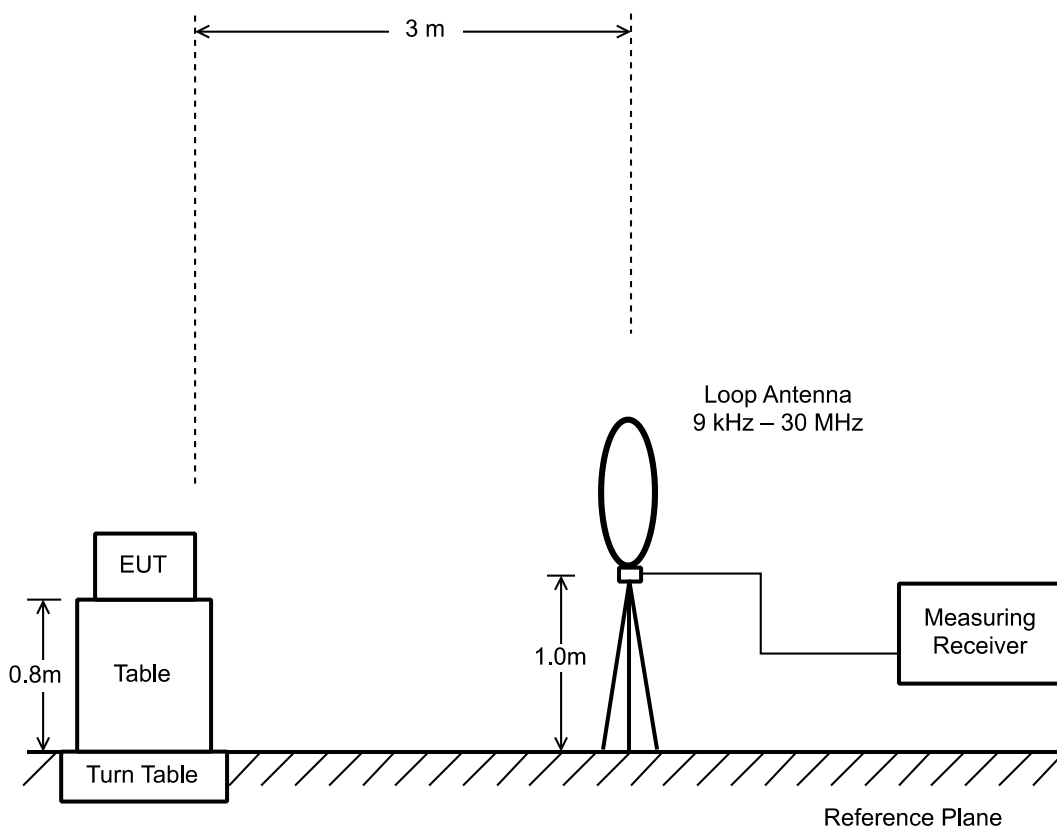


**7.6.2.2 Radiated Spurious Emission 30 MHz – 1000 MHz**

The pre-scan measurements were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for formal measurements.

(Reference divisional instruction No. G703649)

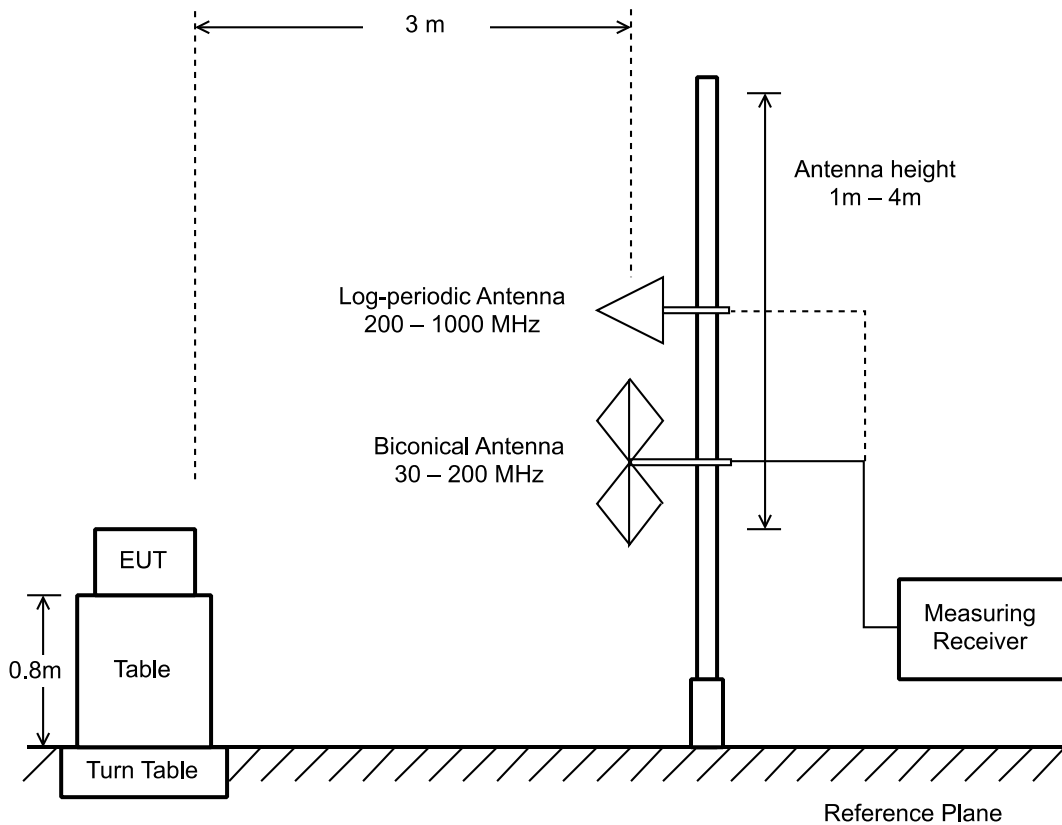


**7.6.2.3 Radiated Spurious Emission above 1 GHz**

The pre-scan measurements were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for formal measurements.

(Reference divisional instruction No. G703649)

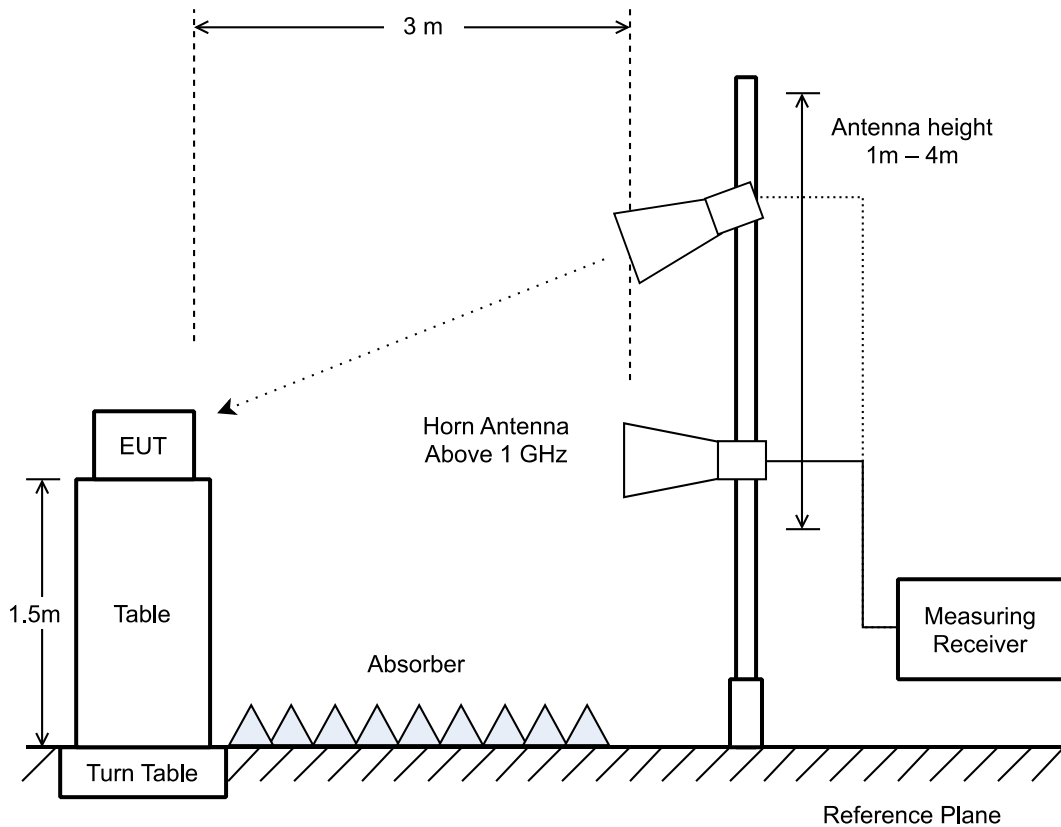

**NOTE 1**

When the EUT is manipulated through three different orientations (for example, X, Y and Z axis), the scan height upper range for the measurement antenna is limited to 2.5 m or 0.5 m above the top of the EUT.

**NOTE 2**

The spectrum analyzer was set to as follows.

Peak Measurements : RBW = 1 MHz, VBW = 3 MHz



Average Measurements : RBW = 1 MHz, VBW = 100 Hz (refer to clause 6.4)





7.6.3 Test Data

7.6.3.1 Band-edge Emission

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

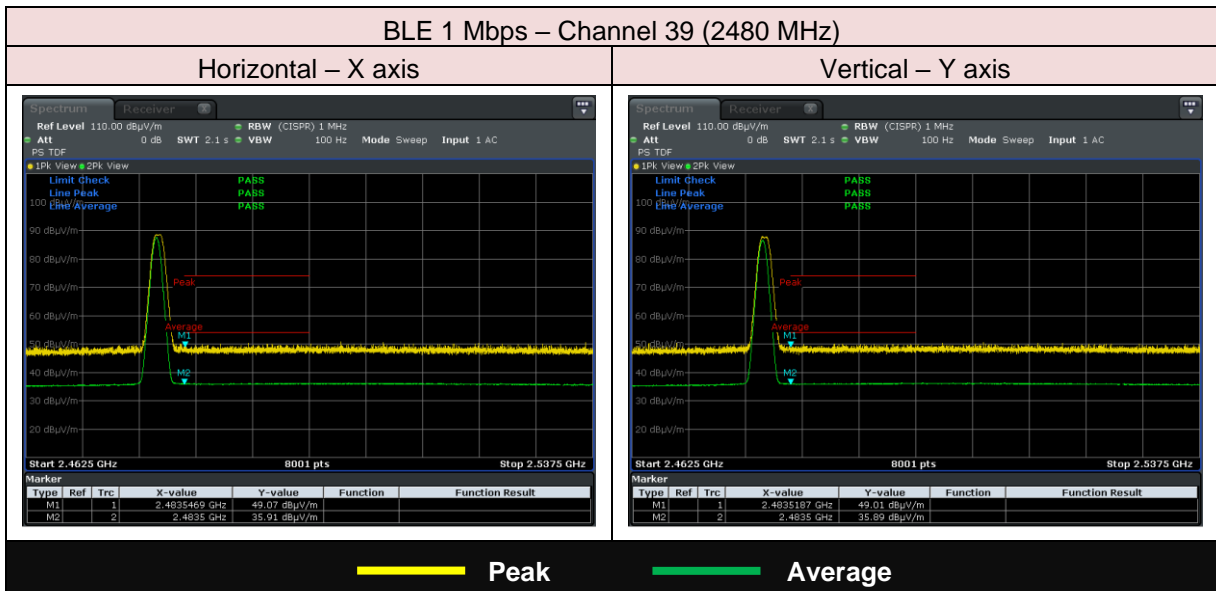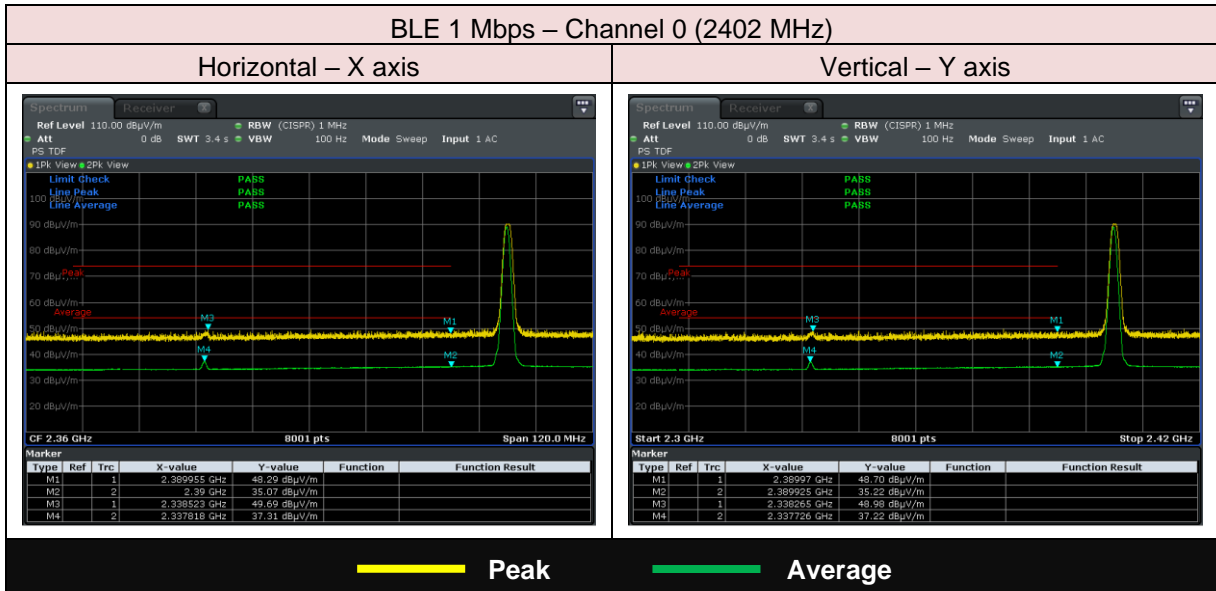

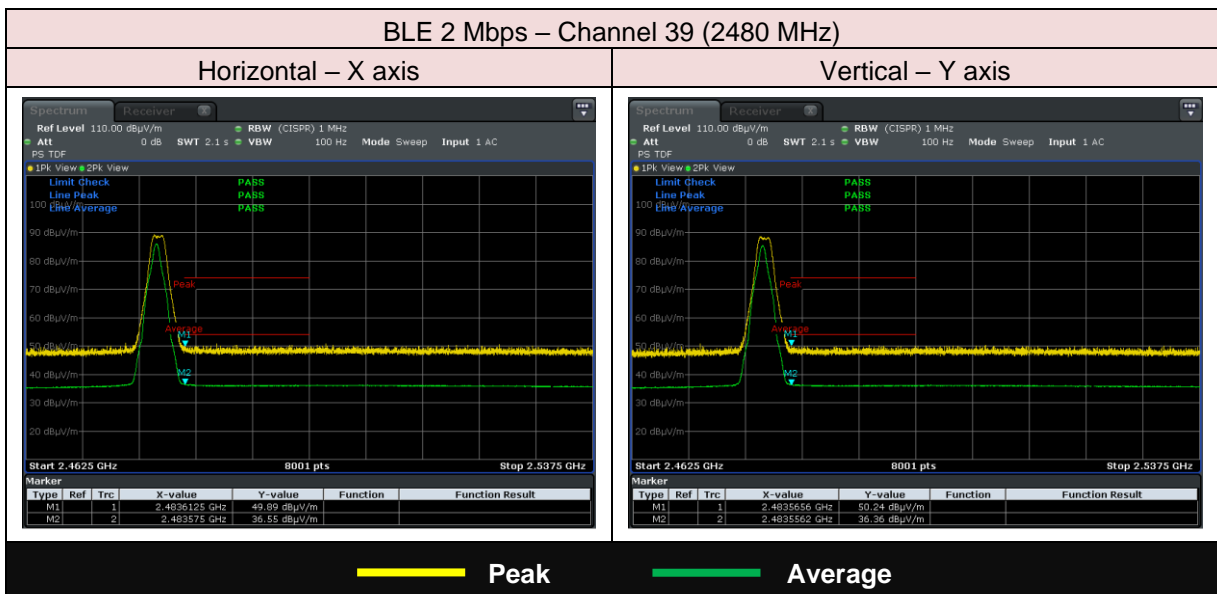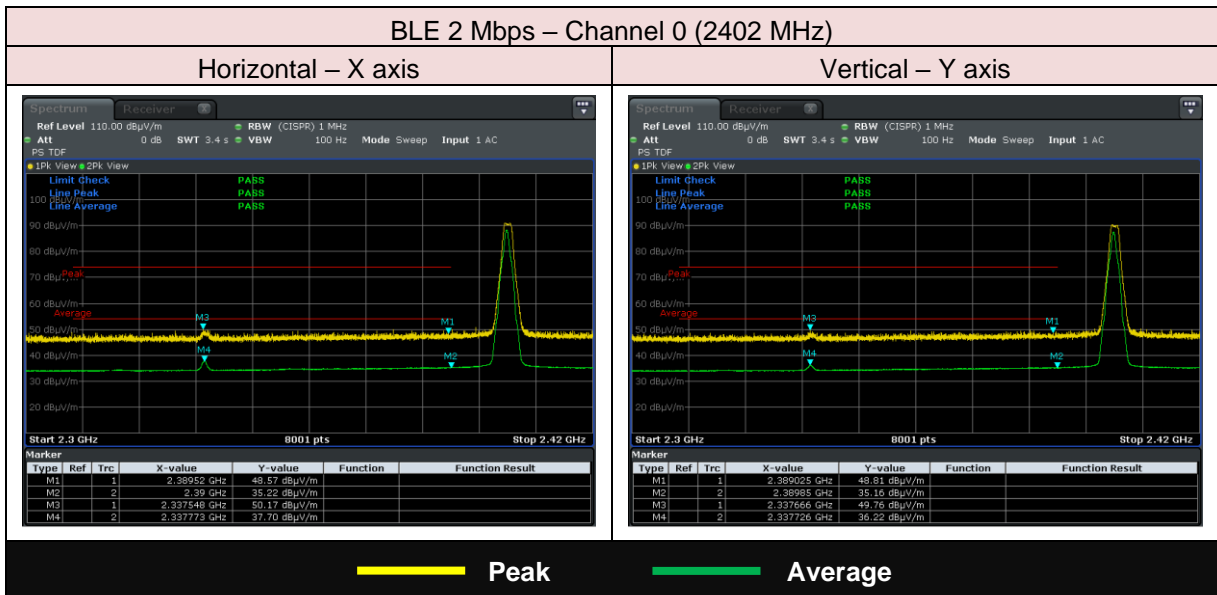


**7.6.3.2 Radiated Spurious Emission 9 kHz – 30 MHz**

All modes have been investigated and the worst case mode has been listed.  
 The orientation of the EUT have been fixed to X axis.

**Test voltage : 3VDC**

Test Date: March 23, 2024  
 Temp.: 18 °C, RH: 50 %, Atm.: 1001 hPa

**Antenna polarization : Perpendicular to measurement axis**

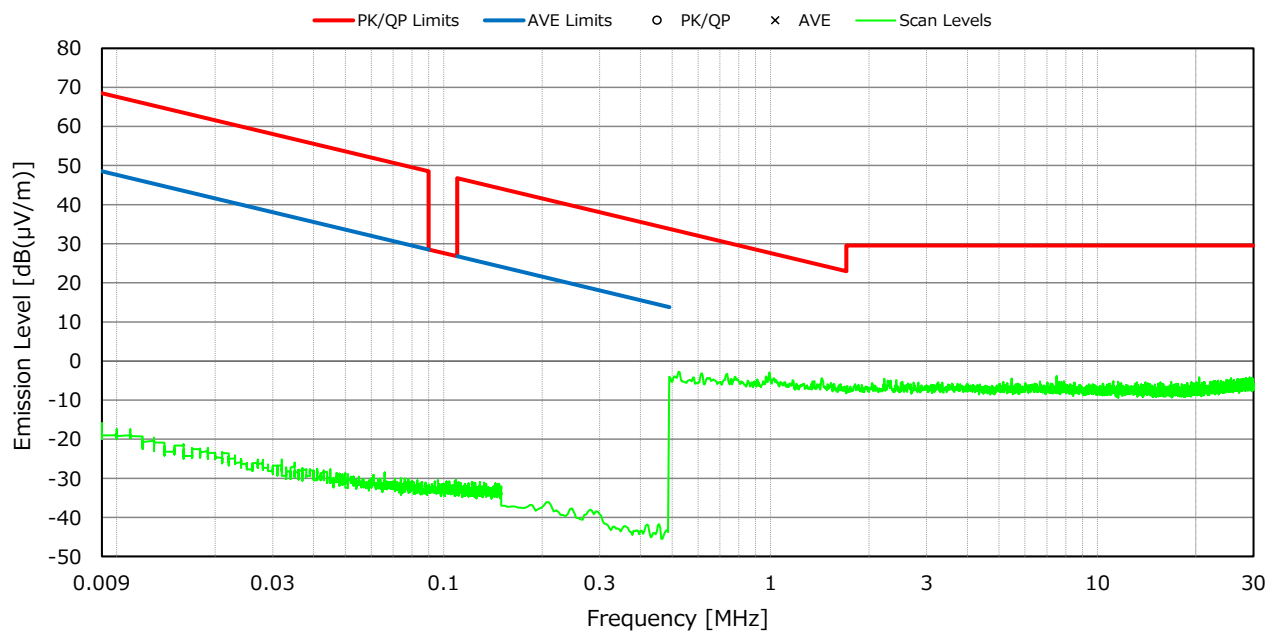

**NOTES**

- 1) Measurement Distance : 3 m (Specified Distance : 30 m)
- 2) The spectrum was checked from 9 kHz to 30 MHz.
- 3) PK/QP : Quasi-Peak detector, AVE : Average detector
- 4) Bandwidth : 200 Hz (9 kHz - 150 kHz), 9 kHz (150 kHz - 30 MHz)
- 5) All emission levels were below the noise floor, or more than 15 dB below the applied limits.

**7.6.3.3 Radiated Spurious Emission 30 MHz – 1000 MHz**


All modes have been investigated and the worst case mode has been listed.  
The orientation of the EUT have been fixed to X axis.

**Test voltage : 3VDC**

Test Date: March 23, 2024  
Temp.: 18 °C, RH: 50 %, Atm.: 1001 hPa

**Antenna polarization : Horizontal**

Frequency	Factor	Readings	Limits	Results	Margin	Remarks
[MHz]	[dB]	[dB(μV)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	
448.000	-11.4	29.5	46.0	18.1	+ 27.9	-
493.886	-10.5	28.8	46.0	18.3	+ 27.7	-
512.000	-10.2	32.9	46.0	22.7	+ 23.3	-
576.000	- 8.9	31.8	46.0	22.9	+ 23.1	-

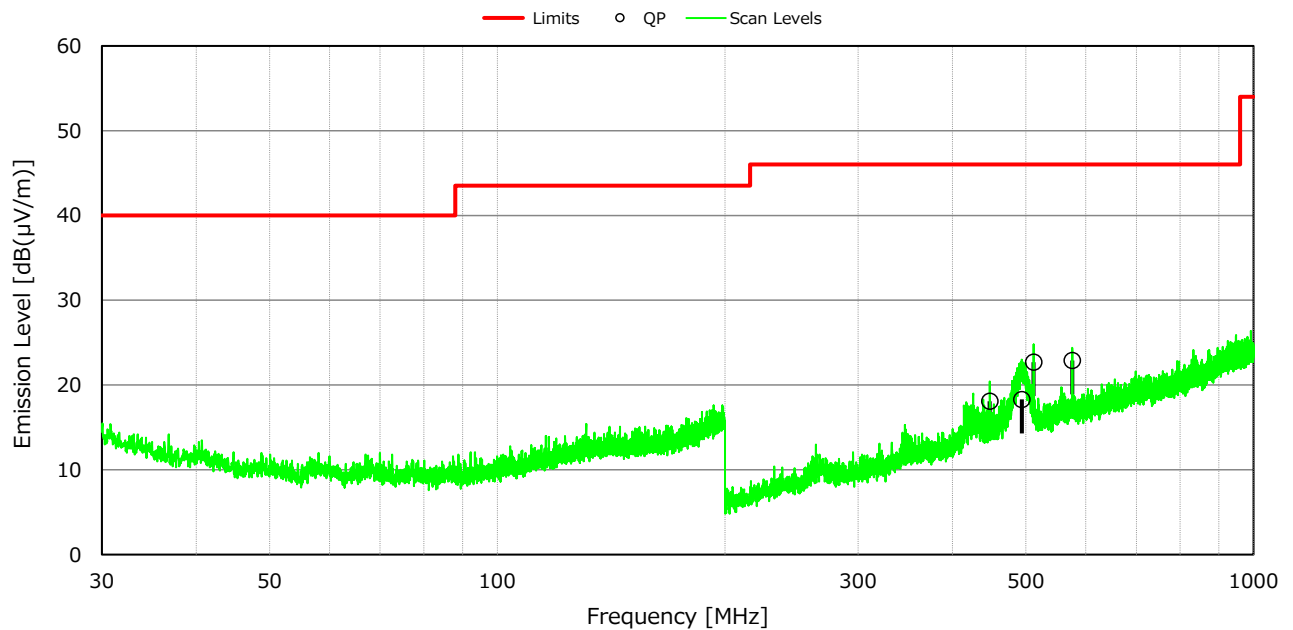

**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 30 MHz to 1000 MHz.
- 3) The factor includes the antenna factor and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (QP) = -8.9 + 31.8 = 22.9 dB(μV) at 576.000 MHz  
Antenna Height : 147 cm, Turntable Rotation Position : 157 °
- 5) QP : Quasi-Peak detector
- 6) Bandwidth : 120 kHz (30 MHz - 1000 MHz)


**Test voltage : 3VDC**

Test Date: March 23, 2024

Temp.: 18 °C, RH: 50 %, Atm.: 1001 hPa

**Antenna polarization : Vertical**

Frequency	Factor	Readings	Limits	Results	Margin	Remarks
[MHz]	[dB]	[dB(μV)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	
448.000	-11.4	29.6	46.0	18.2	+ 27.8	-
492.324	-10.5	31.4	46.0	20.9	+ 25.1	-
512.000	-10.2	33.2	46.0	23.0	+ 23.0	-
576.000	- 8.9	30.5	46.0	21.6	+ 24.4	-

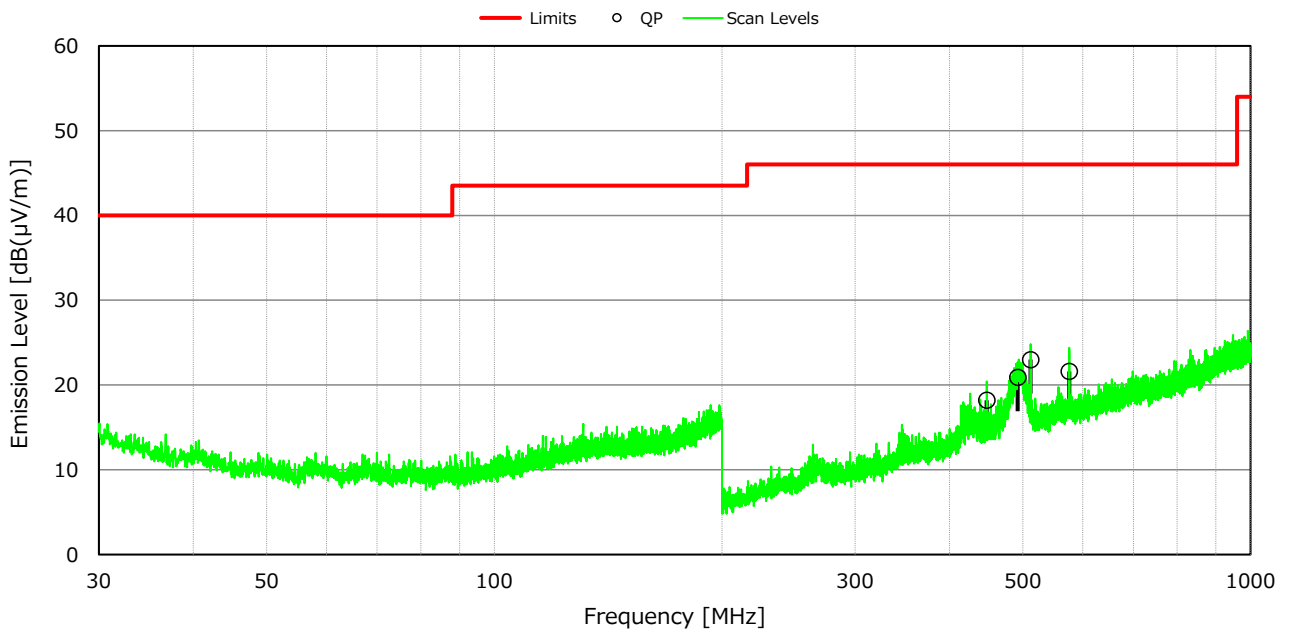

**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 30 MHz to 1000 MHz.
- 3) The factor includes the antenna factor and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (QP) = -10.2 + 33.2 = 23.0 dB(μV) at 512.000 MHz  
Antenna Height : 100 cm, Turntable Rotation Position : 104 °
- 5) QP : Quasi-Peak detector
- 6) Bandwidth : 120 kHz (30 MHz - 1000 MHz)

**7.6.3.4 Radiated Spurious Emission above 1 GHz**

**Test voltage : 3VDC**


**Test Date: March 22, 2024**

**Test condition : BLE 1Mbps, 0ch (2402MHz)**

**Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa**

**Antenna polarization : Horizontal**

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4804.00	- 5.4	50.1	43.0	74.0	54.0	44.7	37.6	+ 29.3	+ 16.4	Y

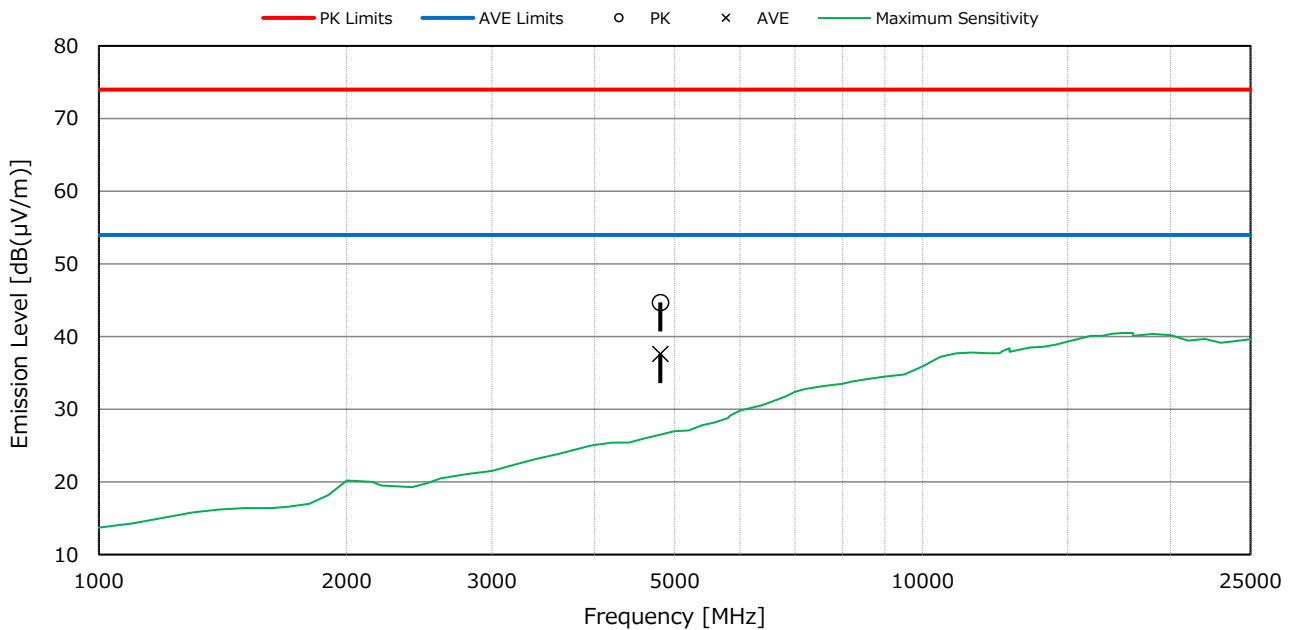


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = -5.4 + 43.0 = 37.6 dB(μV) at 4804.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 1Mbps, 0ch (2402MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4804.00	- 5.4	49.8	42.5	74.0	54.0	44.4	37.1	+ 29.6	+ 16.9	Z

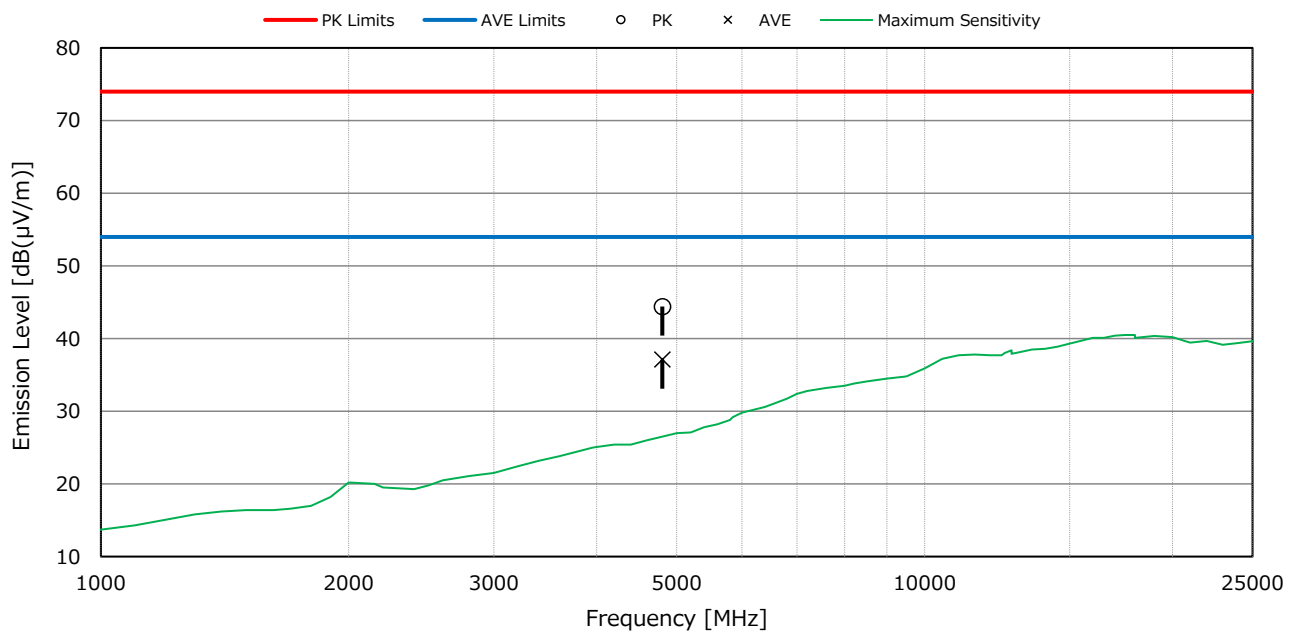


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = -5.4 + 42.5 = 37.1 dB(μV) at 4804.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 1Mbps, 19ch (2440MHz)**  
**Antenna polarization : Horizontal**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4880.00	- 5.3	50.6	43.6	74.0	54.0	45.3	38.3	+ 28.7	+ 15.7	Y
7320.00	1.9	56.7	46.9	74.0	54.0	58.6	48.8	+ 15.4	+ 5.2	Z

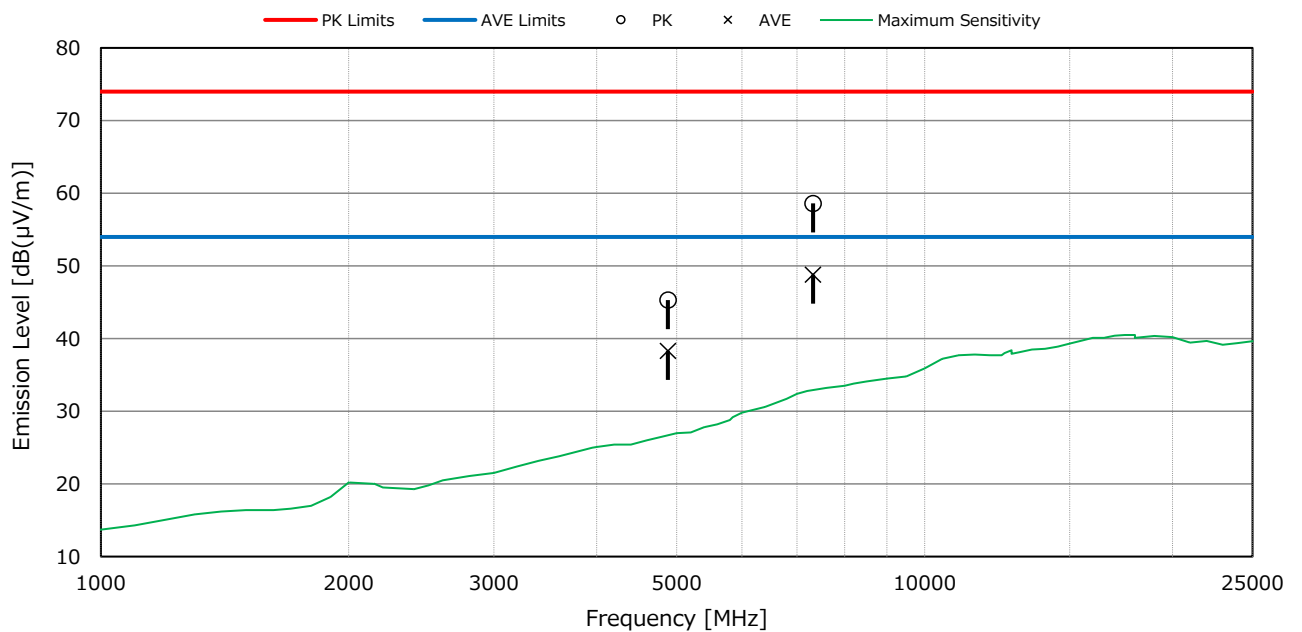

**NOTES**


- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 1.9 + 46.9 = 48.8 dB(μV) at 7320.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)



**Test voltage : 3VDC**  
**Test condition : BLE 1Mbps, 19ch (2440MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4880.00	- 5.3	50.4	43.2	74.0	54.0	45.1	37.9	+ 28.9	+ 16.1	Z
7320.00	1.9	56.7	46.9	74.0	54.0	58.6	48.8	+ 15.4	+ 5.2	Y

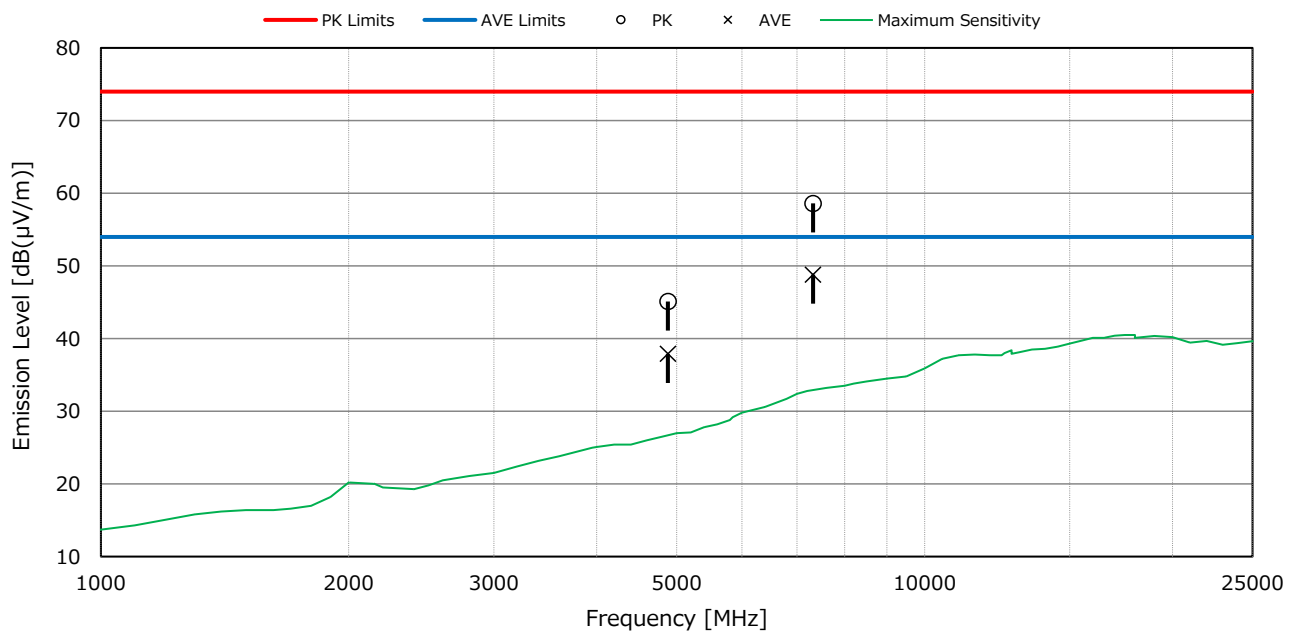


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 1.9 + 46.9 = 48.8 dB(μV) at 7320.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 1Mbps, 39ch (2480MHz)**  
**Antenna polarization : Horizontal**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4960.00	- 5.0	50.7	43.5	74.0	54.0	45.7	38.5	+ 28.3	+ 15.5	Y
7440.00	2.0	55.5	45.2	74.0	54.0	57.5	47.2	+ 16.5	+ 6.8	Z

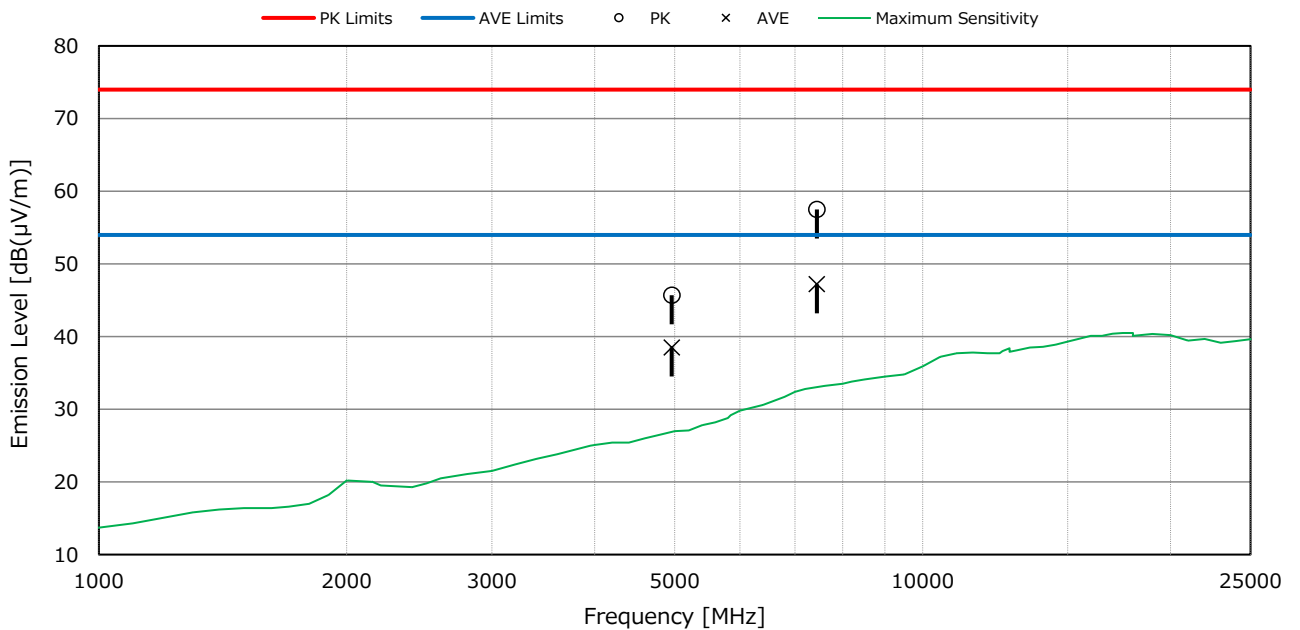


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 2.0 + 45.2 = 47.2 dB(μV) at 7440.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 1Mbps, 39ch (2480MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4960.00	- 5.0	50.6	43.4	74.0	54.0	45.6	38.4	+ 28.4	+ 15.6	Z
7440.00	2.0	56.2	46.4	74.0	54.0	58.2	48.4	+ 15.8	+ 5.6	Y

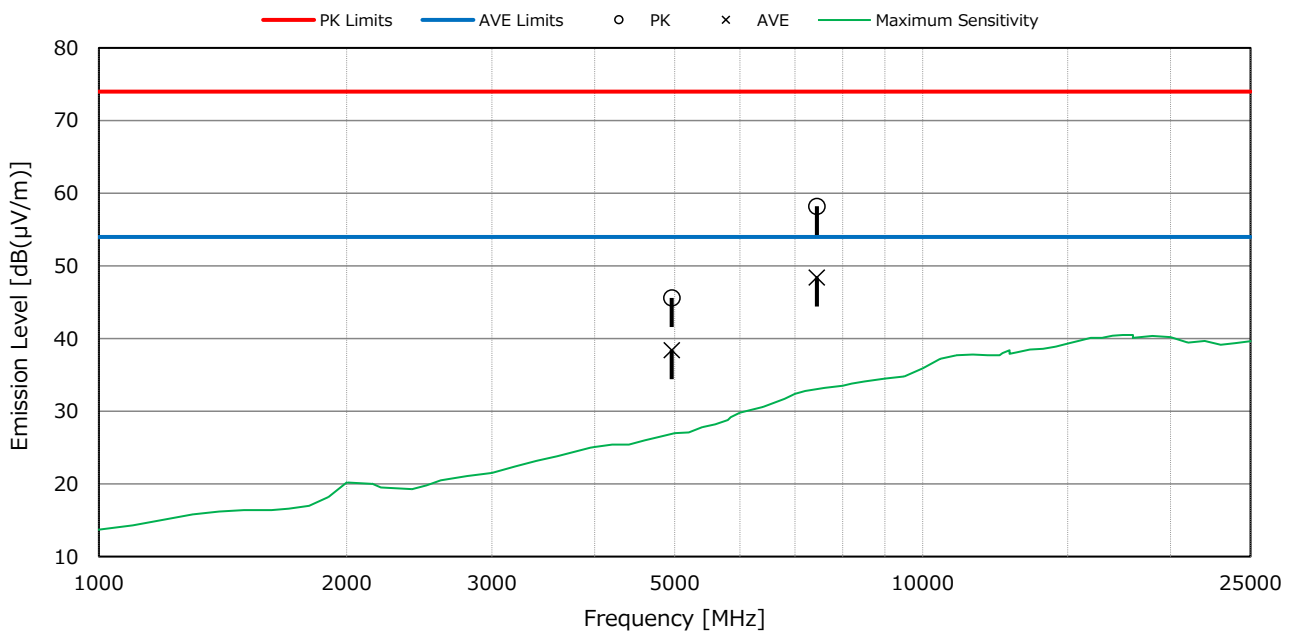


NOTES

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 2.0 + 46.4 = 48.4 dB(μV) at 7440.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 0ch (2402MHz)**  
**Antenna polarization : Horizontal**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4804.00	- 5.4	50.6	39.7	74.0	54.0	45.2	34.3	+ 28.8	+ 19.7	Y

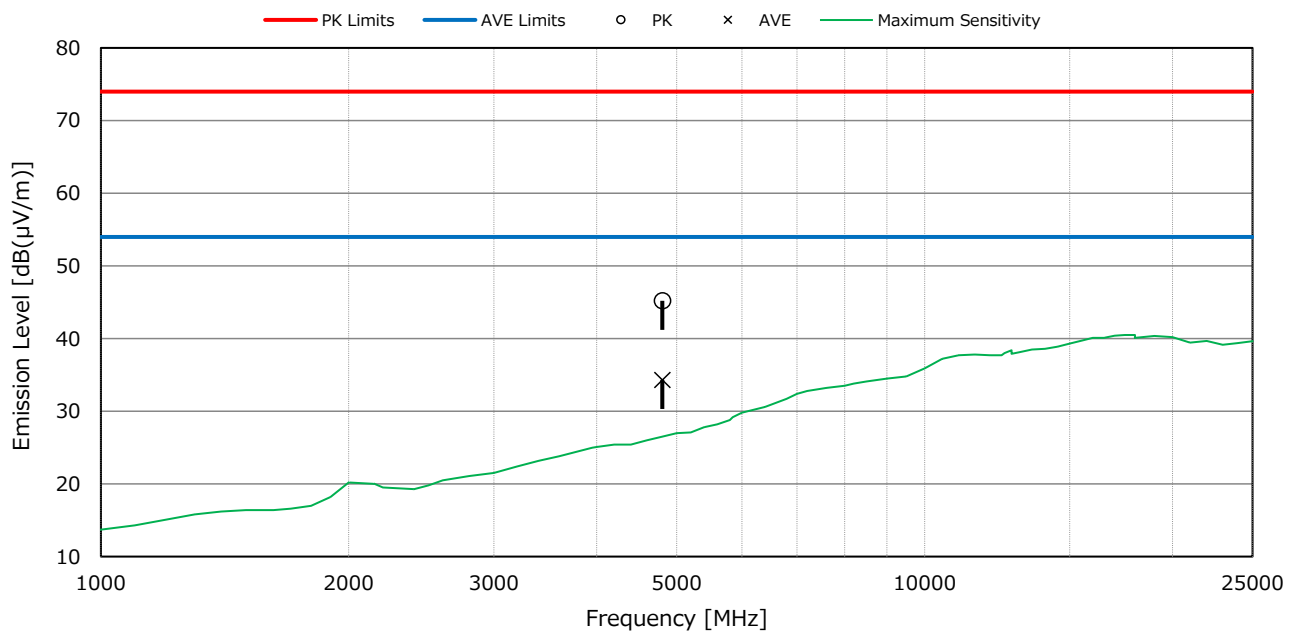


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = -5.4 + 39.7 = 34.3 dB(μV) at 4804.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 0ch (2402MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4804.00	- 5.4	50.6	39.6	74.0	54.0	45.2	34.2	+ 28.8	+ 19.8	Z

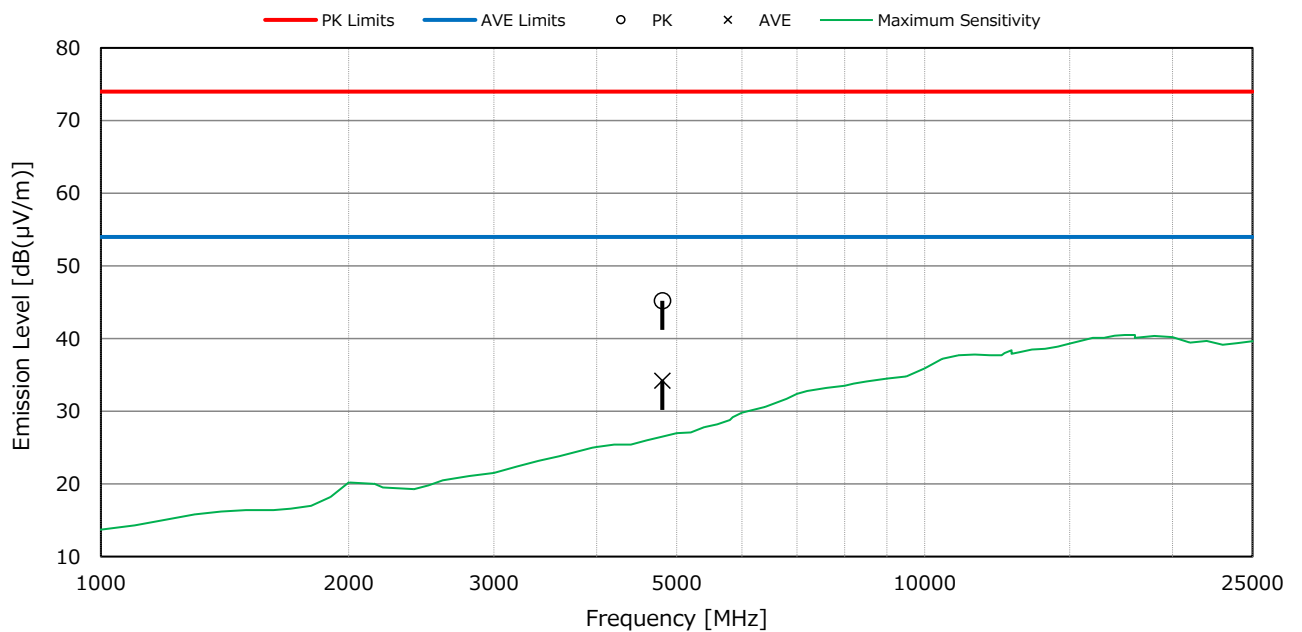


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = -5.4 + 39.6 = 34.2 dB(μV) at 4804.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 19ch (2440MHz)**  
**Antenna polarization : Horizontal**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4880.00	- 5.3	51.1	39.8	74.0	54.0	45.8	34.5	+ 28.2	+ 19.5	Y
7320.00	1.9	57.0	47.1	74.0	54.0	58.9	49.0	+ 15.1	+ 5.0	Z

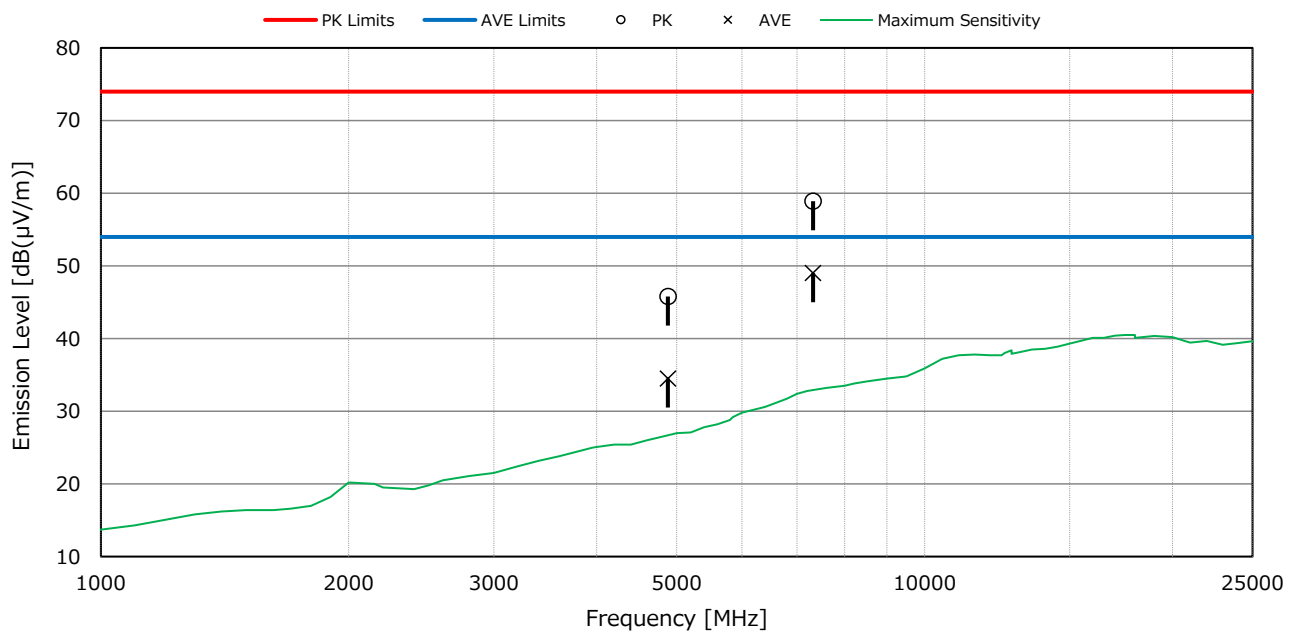


**NOTES**

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 1.9 + 47.1 = 49.0 dB(μV) at 7320.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 19ch (2440MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4880.00	- 5.3	50.9	39.7	74.0	54.0	45.6	34.4	+ 28.4	+ 19.6	Z
7320.00	1.9	56.6	46.4	74.0	54.0	58.5	48.3	+ 15.5	+ 5.7	Y

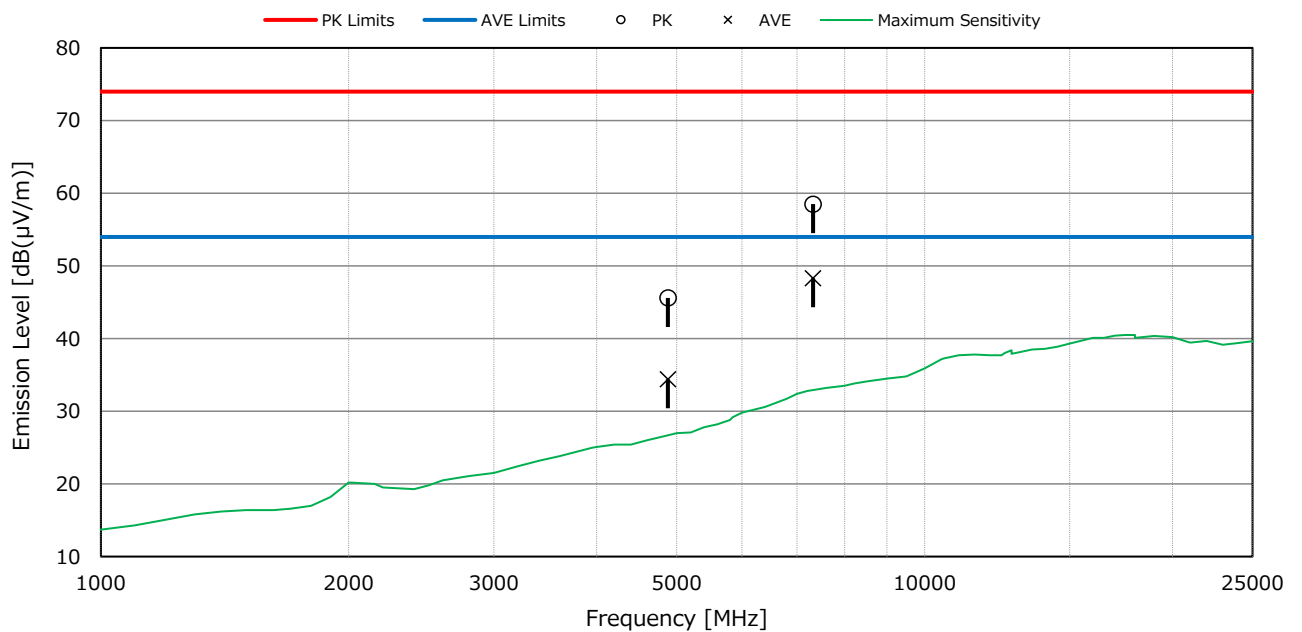


NOTES

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 1.9 + 46.4 = 48.3 dB(μV) at 7320.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)

**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 39ch (2480MHz)**  
**Antenna polarization : Horizontal**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4960.00	- 5.0	49.8	38.5	74.0	54.0	44.8	33.5	+ 29.2	+ 20.5	Y
7440.00	2.0	56.4	46.3	74.0	54.0	58.4	48.3	+ 15.6	+ 5.7	Z

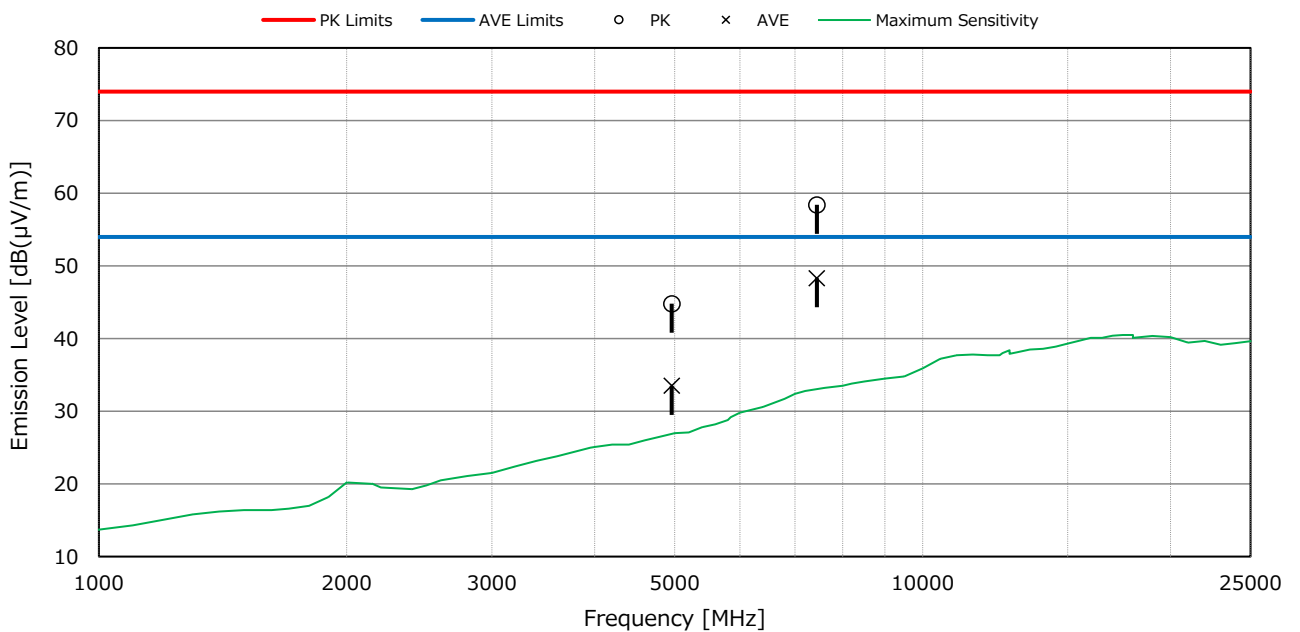

NOTES


- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 2.0 + 46.3 = 48.3 dB(μV) at 7440.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)



**Test voltage : 3VDC**  
**Test condition : BLE 2Mbps, 39ch (2480MHz)**  
**Antenna polarization : Vertical**

Test Date: March 22, 2024  
Temp.: 22 °C, RH: 35 %, Atm.: 1003 hPa

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]		Remarks
		PK	AVE	PK	AVE	PK	AVE	PK	AVE	
4960.00	- 5.0	49.3	38.3	74.0	54.0	44.3	33.3	+ 29.7	+ 20.7	-
7440.00	2.0	56.8	46.9	74.0	54.0	58.8	48.9	+ 15.2	+ 5.1	-

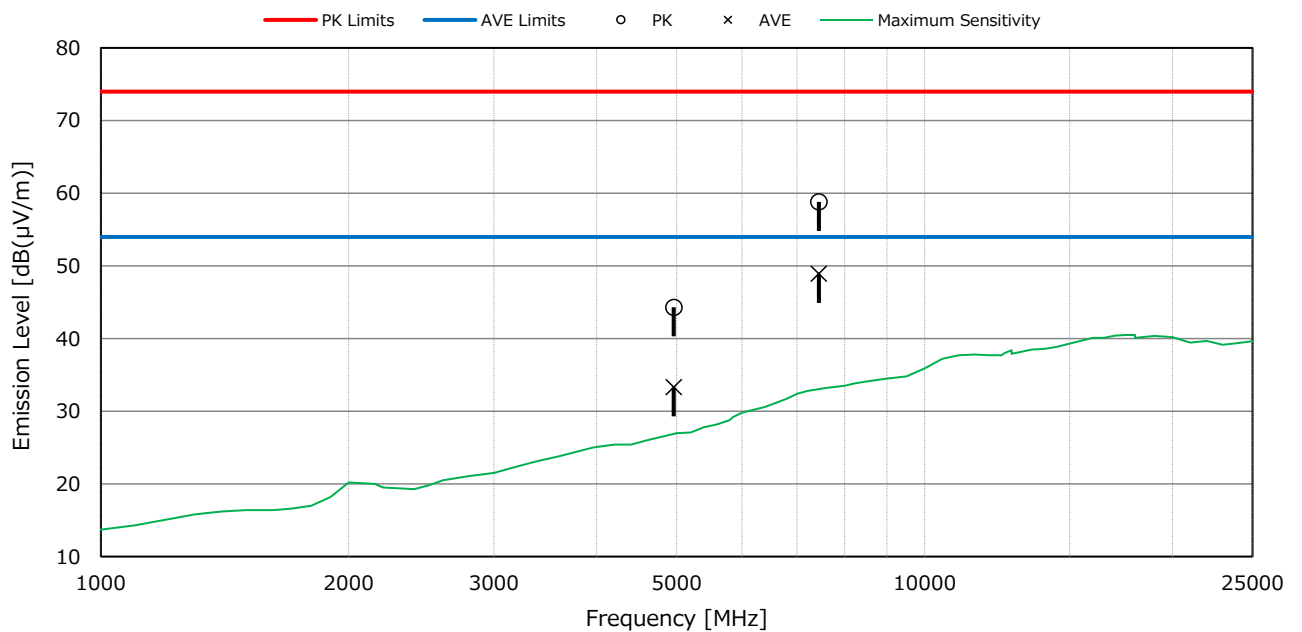

NOTES

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 1 GHz to 25 GHz.
- 3) The factor includes the antenna factor, the pre-amplifier gain and the cable loss.
- 4) Calculated result as the worst point shown on underline :  
Factor + Reading (AVE) = 2.0 + 46.9 = 48.9 dB(μV) at 7440.00 MHz
- 5) PK : Peak detector, AVE : Average detector
- 6) Bandwidth : 1 MHz (1 GHz - 25 GHz)