



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological Development District, Guangzhou, China 510663  
Telephone: +86 (0) 20 82155555  
Fax: +86 (0) 20 82075059  
Email: ee.guangzhou@sgs.com

Report No.: GZEM140700380001  
Page: 1 of 30  
FCC ID: KUM13825837777

## TEST REPORT

Application No.:	GZEM1407003800RF
Applicant:	XIN XUN TOYS CO., LTD
FCC ID:	KUM13825837777
Product Name:	Remote control toy series
Product Description:	Remote control aircraft with 2.4 GHz as carrier.
Model No.:	X-01, X-02, X-09, X-10, X-10D, X-11, X-11V, X-12, X-13, X-13G, X-14, X-14C, X-16, X-16G, X-17, X-18, X-18G, X-19, X-19B, X-20, X-21, X-22A, X-25G, X-25A, X-28, X-28V, X-29, X-29V, X-30, X-30V, X-30W, X-31, X-32, X-33, X-33V, X-35, X-36, X-36A, X-37, X-37A, X-38, X-39, X-39V, X-39W, X-40, X-40V, X-40W, X-41, X-42, X-43, X-45, X-46, X-46V, X-47, X-48, X-49, X-50, X-51, X-52, X-53, X-54, X-55, X-56, X-57, X-58, X-59, X-60, X-61, X-62, X-63, X-64, X-65, X-66, X-68, X-69, X-70, X-71, X-72, X-73, X-74 ♣
•	Please refer to section 3 of this report for details
Standards:	CFR 47 PART 15 Subpart C: 2013 section 15.249
Date of Receipt:	2014-07-25
Date of Test:	2014-07-31 to 2014-08-01
Date of Issue:	2014-08-08
Test Result :	Pass*

\* In the configuration tested, the EUT complied with the standards specified above.




The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2014-08-08		Original

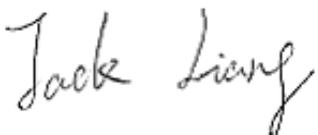Authorized for issue by:			
Tested By	 (Jack Liang) /Project Engineer		2014-07-31 to 2014-08-01
Prepared By	 (June Chen) /Clerk		2014-08-08
Checked By	 (Fred Zhu)/Reviewer		2014-08-08

### 3 Test Summary

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS

**Remark:**

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

♣ Model No.: X-01, X-02, X-09, X-10, X-10D, X-11, X-11V, X-12, X-13, X-13G, X-14, X-14C, X-16, X-16G, X-17, X-18, X-18G, X-19, X-19B, X-20, X-21, X-22A, X-25G, X-25A, X-28, X-28V, X-29, X-29V, X-30, X-30V, X-30W, X-31, X-32, X-33, X-33V, X-35, X-36, X-36A, X-37, X-37A, X-38, X-39, X-39V, X-39W, X-40, X-40V, X-40W, X-41, X-42, X-43, X-45, **X-46**, X-46V, X-47, X-48, X-49, X-50, X-51, X-52, X-53, X-54, X-55, X-56, X-57, X-58, X-59, X-60, X-61, X-62, X-63, X-64, X-65, X-66, X-68, X-69, X-70, X-71, X-72, X-73, X-74

According to the confirmation from the applicant, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, only difference being the color, appearance, packing and accessories..

Therefore only one Model **X-46**, was tested in this report.

## 4 Contents

<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>3</b>
<b>4 CONTENTS.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 Client Information .....	5
5.2 General Description of E.U.T .....	5
5.3 Details of E.U.T .....	5
5.4 Description of Support Units .....	5
5.5 Other Information Requested by the Customer .....	5
5.6 Deviation from Standards .....	5
5.7 Test Location .....	6
<b>6 EQUIPMENT USED DURING TEST.....</b>	<b>8</b>
<b>7 TEST RESULTS.....</b>	<b>9</b>
7.1 E.U.T. Operation.....	9
7.2 Antenna Requirement .....	11
7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge .....	12
7.4 Occupied Bandwidth .....	29

## 5 General Information

### 5.1 Client Information

Applicant: XIN XUN TOYS CO., LTD  
Address of Applicant: Xinye Road Laimei Industrial Zone, Chenghai District, Shantou City. Guangdong. China

### 5.2 General Description of E.U.T.

Product Name: Remote control toy series  
Model No.: X-46

### 5.3 Details of E.U.T.

Operating Frequency: 2402MHz to 2475MHz  
Type of Modulation: GFSK  
Number of Channels: 74  
Channel Separation: 1 MHz  
Antenna Type: Integral  
Antenna gain: 0 dBi  
Function: The Transmitter will be hopped between 2.402GHz and 2.475GHz for searching the Receiver. When the receiver is found, this frequency will be fixed and not be changed any more.  
Power Supply: DC 9.0V-size "AA" batteries x6 for TX  
Normal Test Voltage: The same as power supply.

### 5.4 Description of Support Units

The EUT has been test as an independent unit.

### 5.5 Other Information Requested by the Customer

None.

### 5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

## 5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,  
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663  
Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC6006-10 and Rules of procedure IEC6006-10, and the relevant IEC6006 CB-Scheme Operational documents.

## 6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-08-30	2014-08-30
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2014-04-19	2015-04-19
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2014-03-03	2015-03-03
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2014-05-09	2015-05-09
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2013-08-31	2016-08-31
EMC0524	Bi-Log Type Antenna	Schaffner - Chase	CBL6112B	2966	2013-08-31	2016-08-31
EMC0519	Bilog Type Antenna	Schaffner - Chase	CBL6143	5070	2014-05-04	2017-05-04
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2013-08-31	2016-08-31
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-07-01	2015-07-01
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2014-03-03	2015-03-03
EMC2065	Amplifier	HP	8447F	N/A	2013-08-31	2014-08-31
EMC2063	1-26GHz Pre Amplifier	Compliance Direction System Inc.	PAP-1G26-48	6279.628	2013-08-31	2014-08-31
EMC0075	310N Amplifier	Sonama	310N	272683	2014-03-03	2015-03-03
EMC0523	Active Loop Antenna	EMCO	6502	42963	2014-03-03	2016-03-03
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2014-05-26	2017-05-26
EMC2069	2.4GHz filter	Micro-Tronics	BRM 50702	149	2014-04-19	2015-04-19
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-05-03	2016-05-03

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2013-09-13	2014-09-13
EMC0007	DMM	Fluke	73	70671122	2013-09-13	2014-09-13

## 7 Test Results

### 7.1 E.U.T. Operation

<b>Test Voltage:</b>	DC 9V by "AA" new batteries x 6
<b>Temperature:</b>	20.0 -25.0 °C
<b>Humidity:</b>	38-50 % RH
<b>Atmospheric Pressure:</b>	1000 -1010 mbar
<b>Test frequencies and frequency range:</b>	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

#### Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

## EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	/	/
43	2445	59	2461	/	/
44	2446	60	2462	/	/
45	2447	61	2463	/	/
46	2448	62	2464	/	/
47	2449	63	2465	/	/
48	2450	64	2466	/	/

Test frequencies are the lowest channel: 0 channel (2402MHz), middle channel: 31 channel (2433MHz) and highest channel: 73 channel (2475MHz).

## 7.2 Antenna Requirement


### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### EUT Antenna

The antenna is an integrated Antenna integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

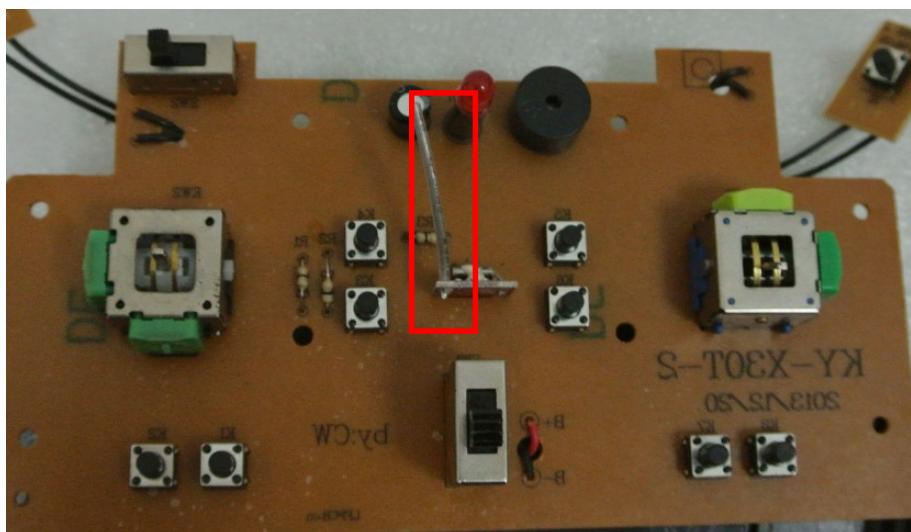

**Test result: The unit does meet the FCC requirements.**

### 7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m @ 3m)	Field Strength of Harmonics (dB $\mu$ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits:

The fundamental frequency range is in the frequency band of the EUT is 2402MHz ~ 2475MHz.

The limit for Average field strength dB $\mu$ V/m for the fundamental frequency = 94.0 dB $\mu$ V/m.

The limit for Peak field strength dB $\mu$ V/m for the fundamental frequency = 114.0 dB $\mu$ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB $\mu$ V/m for the harmonics = 54.0 dB $\mu$ V/m.

The limit for peak field strength dB $\mu$ V/m for the harmonics = 74.0 dB $\mu$ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB $\mu$ V/m in 15.209. Here the limit for the other emission is 54.0 dB $\mu$ V/m.

Test Method:

ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental& Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance:

3m (Semi-Anechoic Chamber)

Frequency range

9 kHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)

**Test Procedure:**

## 1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

## 2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.


## 3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

**Test Configuration:**


## 1) 9 kHz to 30 MHz emissions:

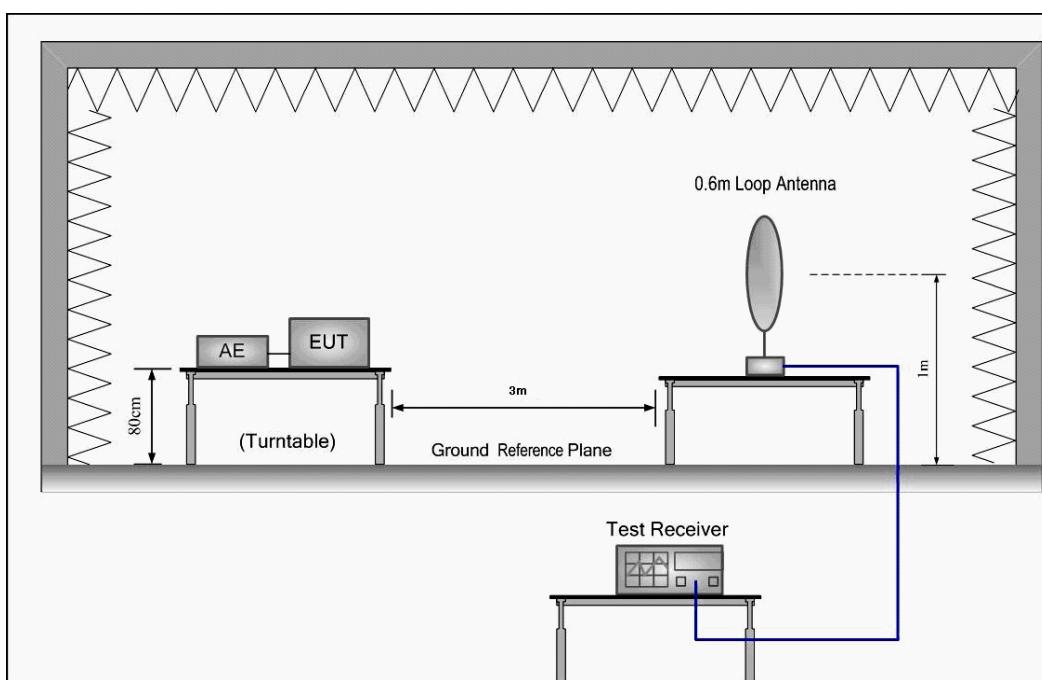

## 2) 30 MHz to 1 GHz emissions:

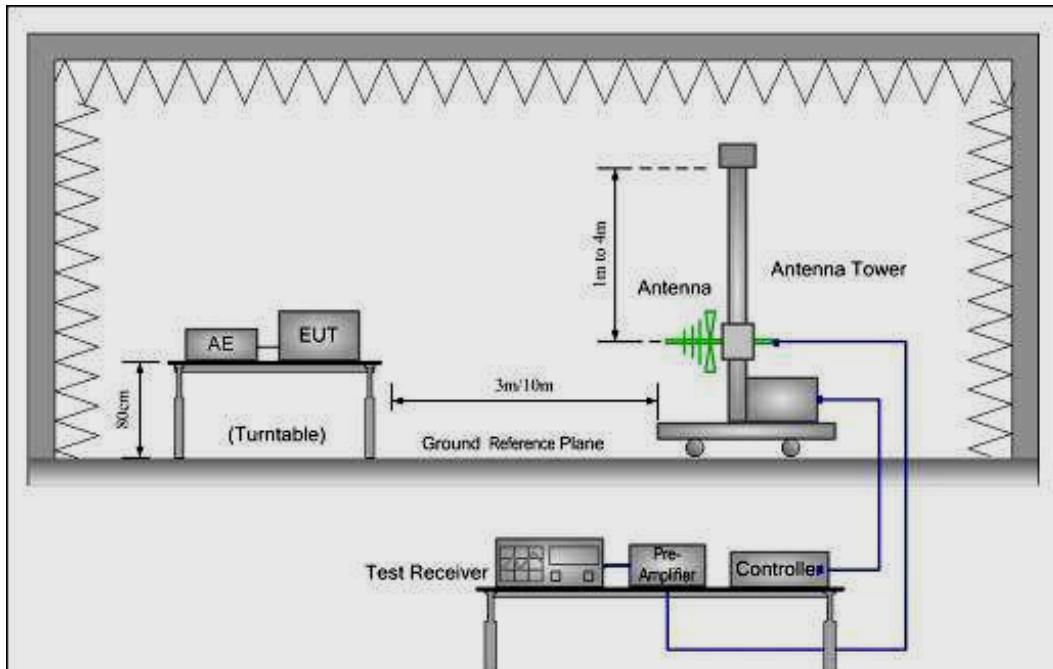

## 3) 1 GHz to 25 GHz emissions:

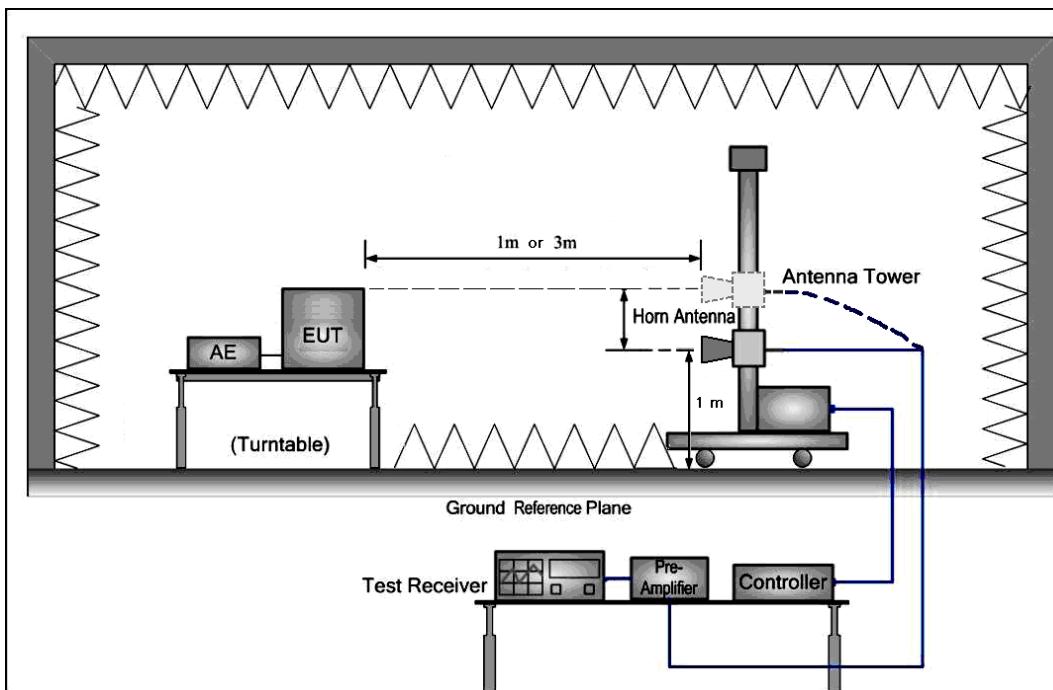

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor

And according 15.35(a)

15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.


Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

$$20\log (\text{Duty cycle}) = 20\log(165.34/766.54) = -13.32\text{dB}$$

Please refer to below plots for more details.

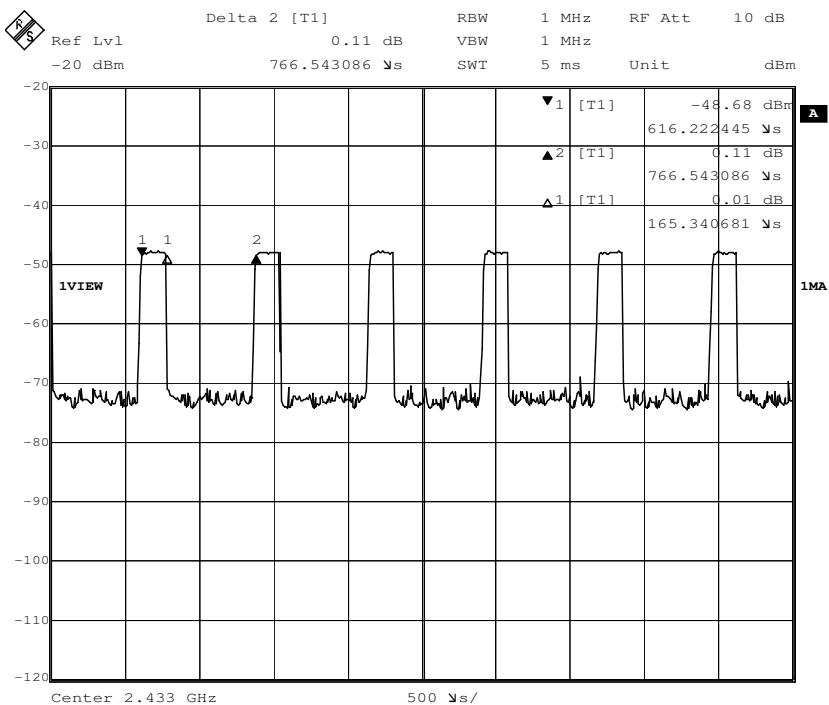


**Test at low Channel in transmitting status****9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

Vertical:

Peak scan

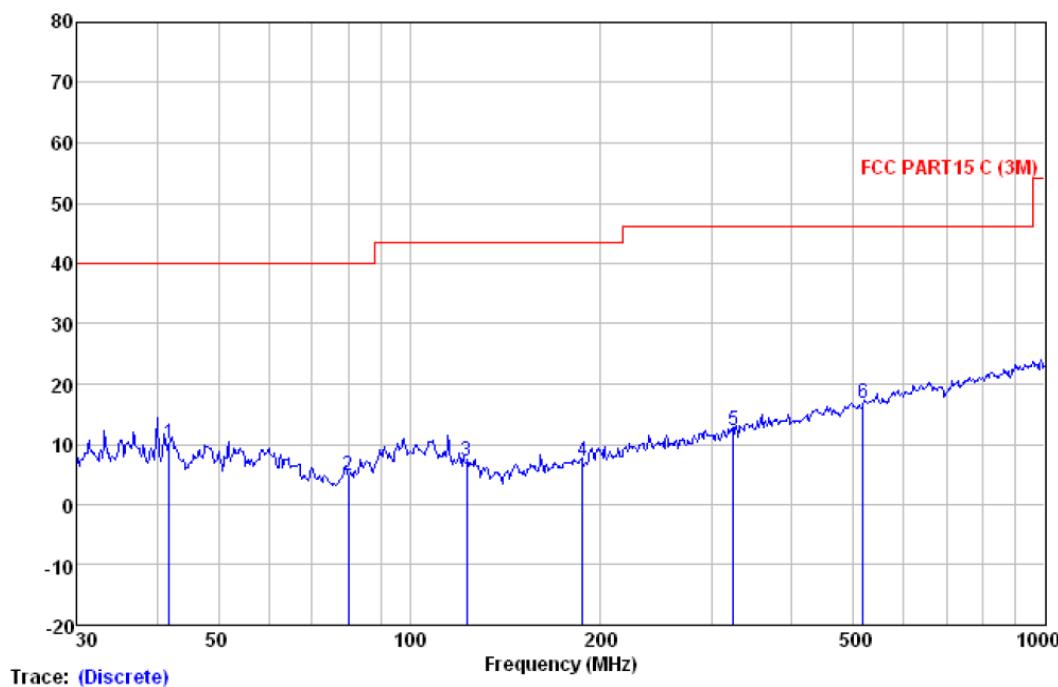
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
41.860	26.69	13.57	1.01	31.01	10.26	40.00	-29.74	QP
80.081	26.08	8.54	1.30	31.00	4.92	40.00	-35.08	QP
122.834	26.67	10.00	1.47	31.02	7.12	43.50	-36.38	QP
187.096	26.04	10.32	1.87	31.09	7.14	43.50	-36.36	QP
323.320	27.32	13.46	2.45	30.98	12.25	46.00	-33.75	QP
517.248	27.76	16.94	3.11	30.98	16.83	46.00	-29.17	QP

**Horizontal:**

Peak scan

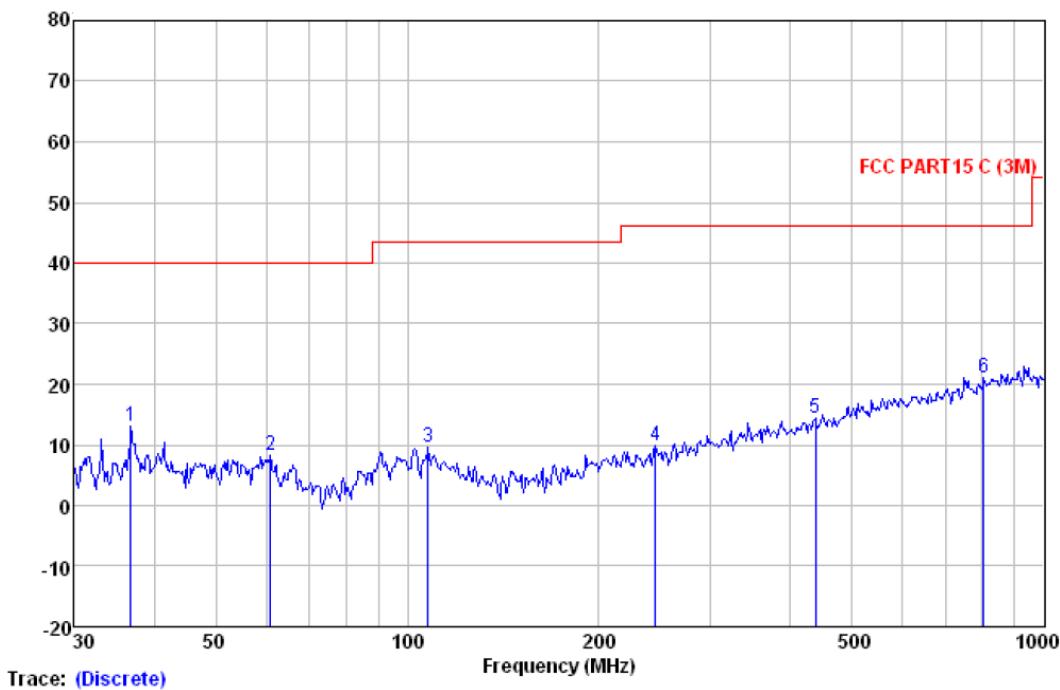Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Over
	Level	Factor	Loss	Factor	Level	Line			
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB		
36.766	30.30	12.77	0.94	31.01	13.00	40.00	-27.00	QP	
60.918	25.60	12.43	1.11	31.00	8.14	40.00	-31.86	QP	
107.888	26.74	12.44	1.42	31.01	9.59	43.50	-33.91	QP	
245.090	26.81	12.08	2.10	31.05	9.94	46.00	-36.06	QP	
437.120	26.86	15.55	2.88	30.94	14.35	46.00	-31.65	QP	
804.603	28.16	20.10	3.80	30.90	21.16	46.00	-24.84	QP	

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

<b>Peak Measurement:</b>							
<b>Frequency (MHz)</b>	<b>Antenna factors (dB/m)</b>	<b>Cable loss (dB)</b>	<b>Preamp factor (dB)</b>	<b>Reading Level (dB<math>\mu</math>V)</b>	<b>Emission Level (dB<math>\mu</math>V/m)</b>	<b>Limit (dB<math>\mu</math>V/m)</b>	<b>Antenna polarization</b>
2402.00	27.58	6.56	38.25	93.97	89.86	114.00	V
4804.00	31.53	11.11	38.57	44.30	48.37	74.00	V
7206.00	36.47	12.90	38.84	44.45	54.98	74.00	V
9608.00	38.08	15.16	39.70	45.04	58.58	74.00	V
2402.00	27.58	6.56	38.25	86.13	82.02	114.00	H
4804.00	31.53	11.11	38.57	45.45	49.52	74.00	H
7206.00	36.47	12.90	38.84	44.46	54.99	74.00	H
9608.00	38.08	15.16	39.70	43.14	56.68	74.00	H

<b>Average Measurement:</b>							
<b>Frequency (MHz)</b>	<b>20log (Duty cycle) (dB)</b>		<b>Peak Emission Level (dB<math>\mu</math>V)</b>	<b>Emission Level (dB<math>\mu</math>V/m)</b>	<b>Limit (dB<math>\mu</math>V/m)</b>	<b>Antenna polarization</b>	
2402.00	-13.32		89.86	76.54	94.00	V	
4804.00			48.37	35.05	54.00	V	
7206.00			54.98	41.66	54.00	V	
9608.00			58.58	45.26	54.00	V	
2402.00			82.02	68.70	94.00	H	
4804.00			49.52	36.20	54.00	H	
7206.00			54.99	41.67	54.00	H	
9608.00			56.68	43.36	54.00	H	

**Band Edge:**

<b>Peak Measurement:</b>							
<b>Frequency (MHz)</b>	<b>Antenna factors (dB/m)</b>	<b>Cable loss (dB)</b>	<b>Preamp factor (dB)</b>	<b>Reading Level (dB<math>\mu</math>V)</b>	<b>Emission Level (dB<math>\mu</math>V/m)</b>	<b>Limit (dB<math>\mu</math>V/m)</b>	<b>Antenna polarization</b>
2400.00	27.58	6.56	38.25	46.04	41.93	74.00	V
2483.50	27.55	6.99	38.26	46.96	43.24	74.00	V
2400.00	27.58	6.56	38.25	45.91	41.80	74.00	H
2483.50	27.55	6.99	38.26	47.12	43.40	74.00	H

**Average Measurement:**

<b>Frequency (MHz)</b>	<b>Antenna factors (dB/m)</b>	<b>Cable loss (dB)</b>	<b>Preamp factor (dB)</b>	<b>Reading Level (dB<math>\mu</math>V)</b>	<b>Emission Level (dB<math>\mu</math>V/m)</b>	<b>Limit (dB<math>\mu</math>V/m)</b>	<b>Antenna polarization</b>
2400.00	27.58	6.56	38.25	41.21	37.10	54.00	V
2483.50	27.55	6.99	38.26	41.78	38.06	54.00	V
2400.00	27.58	6.56	38.25	41.92	37.81	54.00	H
2483.50	27.55	6.99	38.26	42.75	39.03	54.00	H


**Test at middle Channel in transmitting status****9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

Vertical:

Peak scan

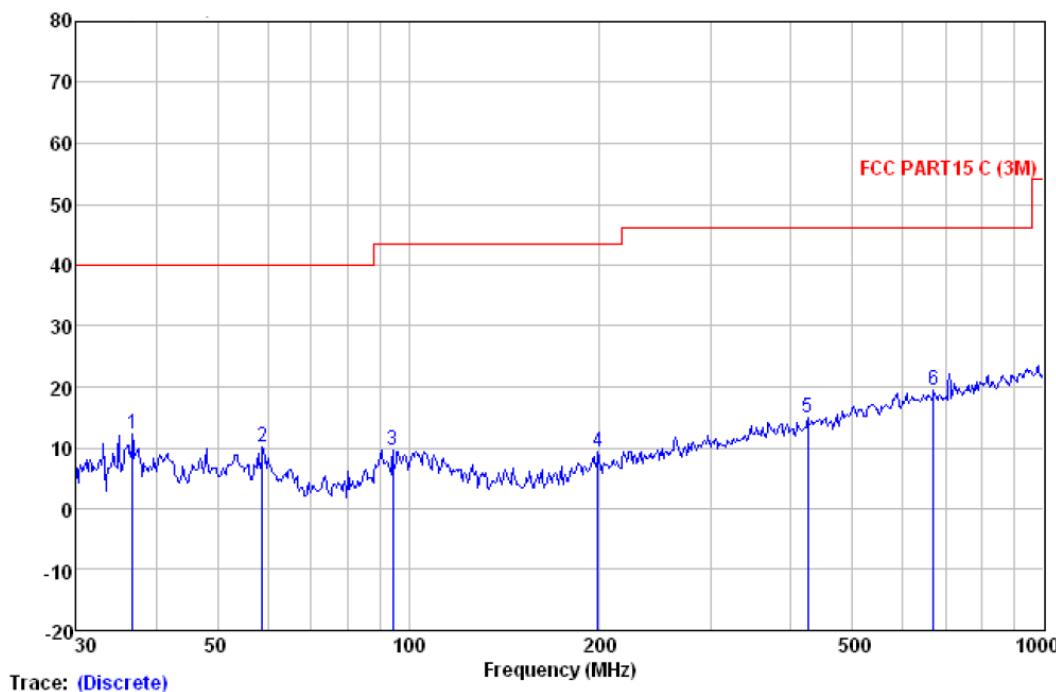
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Line	Over	Remark
	Level	Factor	Loss	Factor					
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	dB	
36.766	29.62	12.77	0.94	31.01	12.32	40.00	-27.68	QP	
58.819	27.35	12.76	1.10	31.00	10.21	40.00	-29.79	QP	
94.428	26.56	12.75	1.34	31.00	9.65	43.50	-33.85	QP	
198.588	27.91	10.57	1.90	31.10	9.28	43.50	-34.22	QP	
425.028	27.41	15.49	2.84	30.92	14.82	46.00	-31.18	QP	
670.489	28.34	18.71	3.44	30.90	19.59	46.00	-26.41	QP	

**Horizontal:**

Peak scan

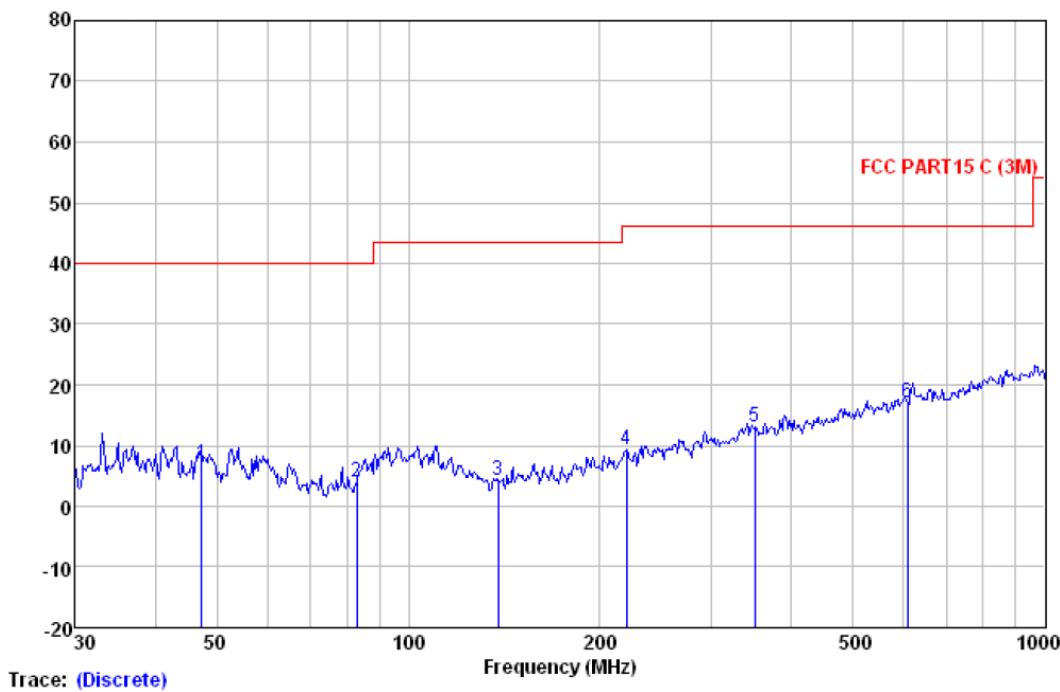Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable		Preamp	Limit	Over	Over
	Level	Factor	Loss	Factor				
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	
47.326	23.48	13.41	1.07	31.00	6.96	40.00	-33.04	QP
82.938	24.15	9.57	1.30	31.00	4.02	40.00	-35.98	QP
138.387	25.47	8.30	1.54	31.04	4.27	43.50	-39.23	QP
219.845	27.19	11.17	1.96	31.08	9.24	46.00	-36.76	QP
350.477	27.04	14.27	2.60	30.94	12.97	46.00	-33.03	QP
607.787	26.39	18.48	3.21	30.90	17.18	46.00	-28.82	QP

1~25 GHz Field Strength of Fundamental &amp; Field Strength of Unwanted Emissions.

## Peak &amp; Average Measurement

Peak Measurement:							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2433.00	27.57	6.77	38.25	93.98	90.07	114.00	V
4866.00	31.56	11.21	38.56	43.61	47.82	74.00	V
7299.00	36.49	13.22	38.87	44.36	55.20	74.00	V
9732.00	38.38	15.07	39.74	44.00	57.71	74.00	V
2433.00	27.57	6.77	38.25	88.07	84.16	114.00	H
4866.00	31.56	11.21	38.56	44.07	48.28	74.00	H
7299.00	36.49	13.22	38.87	44.20	55.04	74.00	H
9732.00	38.38	15.07	39.74	34.61	48.32	74.00	H

## Average Measurement:

Frequency (MHz)	20log (Duty cycle) (dB)	Peak Emission Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2433.00	-13.32	90.07	76.75	94.00	V
4866.00		47.82	34.50	54.00	V
7299.00		55.20	41.88	54.00	V
9732.00		57.71	44.39	54.00	V
2433.00		84.16	70.84	94.00	H
4866.00		48.28	34.96	54.00	H
7299.00		55.04	41.72	54.00	H
9732.00		48.32	35.00	54.00	H

**Band Edge:**

<b>Peak Measurement:</b>							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2400.00	27.58	6.56	38.25	47.20	43.09	74.00	V
2483.50	27.55	6.99	38.26	47.51	43.79	74.00	V
2400.00	27.58	6.56	38.25	45.65	41.54	74.00	H
2483.50	27.55	6.99	38.26	46.70	42.98	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2400.00	27.58	6.56	38.25	41.63	37.52	54.00	V
2483.50	27.55	6.99	38.26	43.87	40.15	54.00	V
2400.00	27.58	6.56	38.25	41.19	37.08	54.00	H
2483.50	27.55	6.99	38.26	40.68	36.96	54.00	H


**Test at high Channel in transmitting status****9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

Vertical:

Peak scan

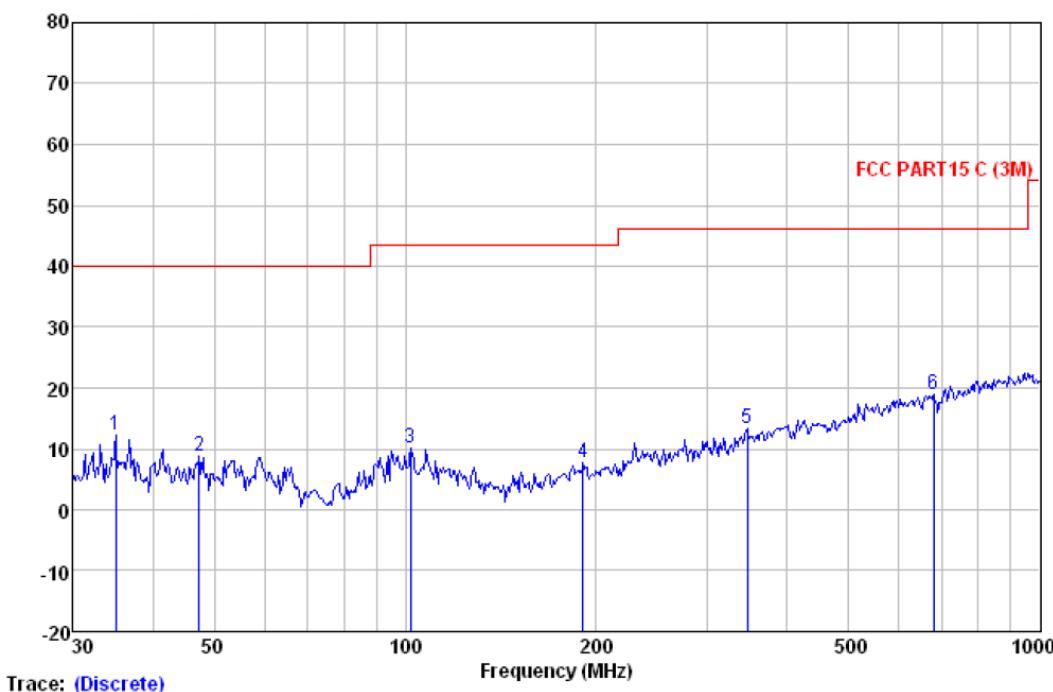
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	
35.005	30.07	12.30	0.90	31.01	12.26	40.00	-27.74	QP
47.326	25.19	13.41	1.07	31.00	8.67	40.00	-31.33	QP
102.001	26.76	12.97	1.40	31.00	10.13	43.50	-33.37	QP
190.405	26.44	10.56	1.88	31.10	7.78	43.50	-35.72	QP
345.595	27.50	14.20	2.56	30.94	13.32	46.00	-32.68	QP
679.960	27.50	18.74	3.46	30.90	18.80	46.00	-27.20	QP

**Horizontal:**

Peak scan

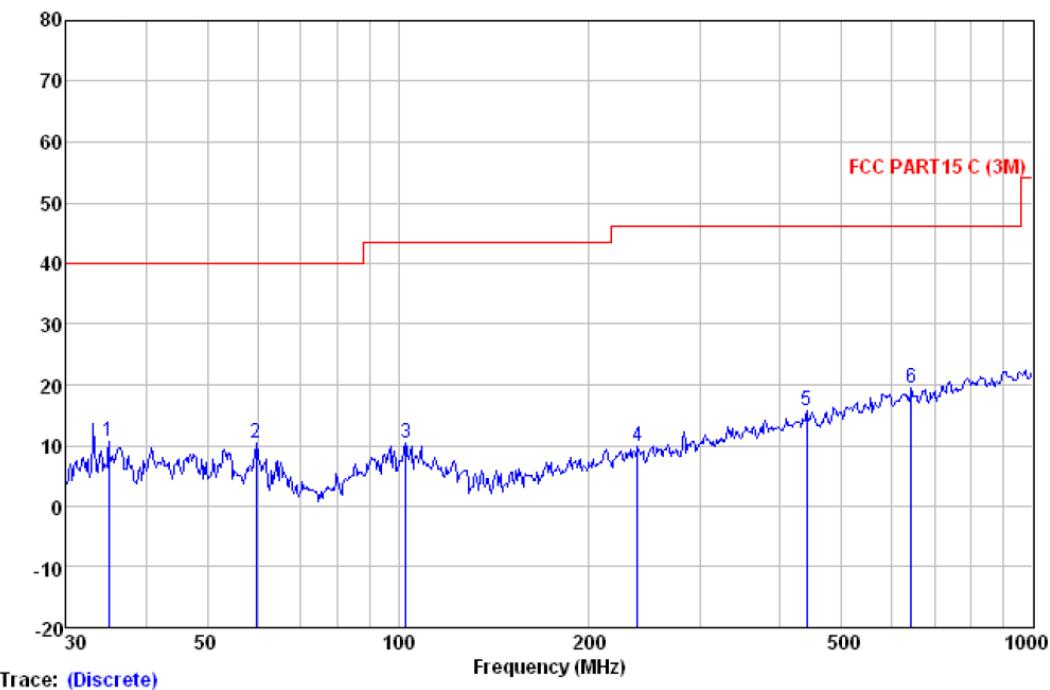Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	Read	Antenna	Cable		Preamp	Limit	Over	Over	
	Freq	Level	Factor	Loss	Factor				Remark
MHz	dB $\mu$ V	dB/m		dB	dB	dB $\mu$ V/m	dB $\mu$ V/m		
35.005	28.45	12.30	0.90	31.01	10.64	40.00	-29.36	QP	
59.649	27.44	12.73	1.10	31.00	10.27	40.00	-29.73	QP	
102.719	27.20	12.92	1.41	31.00	10.53	43.50	-32.97	QP	
238.310	26.99	11.99	2.05	31.05	9.98	46.00	-36.02	QP	
440.196	28.18	15.56	2.89	30.94	15.69	46.00	-30.31	QP	
642.861	28.48	18.61	3.30	30.90	19.49	46.00	-26.51	QP	

**1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.****Peak & Average Measurement**

<b>Peak Measurement:</b>							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2475.00	27.56	6.98	38.26	89.10	85.38	114.00	V
4950.00	31.68	11.37	38.56	44.00	48.49	74.00	V
7425.00	36.60	13.60	38.90	44.11	55.41	74.00	V
9900.00	38.68	14.94	39.78	44.06	57.90	74.00	V
2475.00	27.56	6.98	38.26	95.94	92.22	114.00	H
4950.00	31.68	11.37	38.56	43.78	48.27	74.00	H
7425.00	36.60	13.60	38.90	43.90	55.20	74.00	H
9900.00	38.68	14.94	39.78	43.22	57.06	74.00	H

<b>Average Measurement:</b>							
Frequency (MHz)	20log (Duty cycle) (dB)		Peak Emission Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization	
2475.00	-13.32		85.38	72.06	94.00	V	
4950.00			48.49	35.17	54.00	V	
7425.00			55.41	42.09	54.00	V	
9900.00			57.90	44.58	54.00	V	
2475.00			92.22	78.90	94.00	H	
4950.00			48.27	34.95	54.00	H	
7425.00			55.20	41.88	54.00	H	
9900.00			57.06	43.74	54.00	H	

**Band Edge:**

<b>Peak Measurement:</b>							
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2400.00	27.58	6.56	38.25	46.21	42.10	74.00	V
2483.50	27.55	6.99	38.26	45.51	41.79	74.00	V
2400.00	27.58	6.56	38.25	46.86	42.75	74.00	H
2483.50	27.55	6.99	38.26	46.53	42.81	74.00	H

**Average Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2400.00	27.58	6.56	38.25	40.00	35.89	54.00	V
2483.50	27.55	6.99	38.26	40.18	36.46	54.00	V
2400.00	27.58	6.56	38.25	41.30	37.19	54.00	H
2483.50	27.55	6.99	38.26	40.25	36.53	54.00	H

**Remark:**

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
- 4). For Radiated Emissions fall in the restricted bands (2400MHz is worse case than 2390MHz and report it as above), which set out in Section 15.205 Restricted bands.

Also there is not any other emission which falls in restricted bands can be detected and reported.

**Test result: The unit does meet the FCC requirements.**

## 7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.249


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.9.1


Operation within the band 2.400 to 2.4835 GHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


### 1. Test in the lowest frequency 2.402 GHz

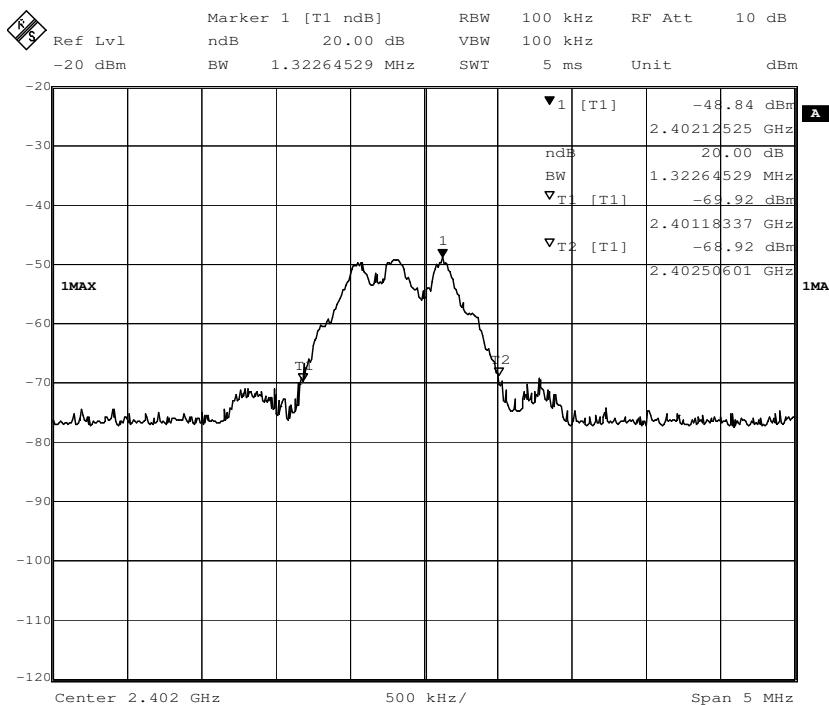

## 2. Test in the middle frequency 2.433 GHz

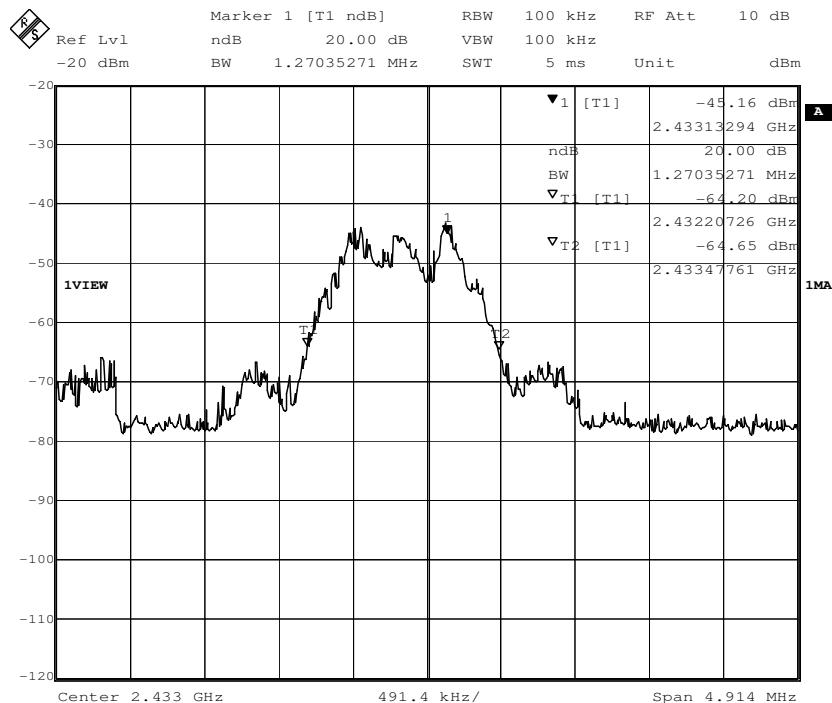

## 3. Test in the highest frequency 2.475 GHz

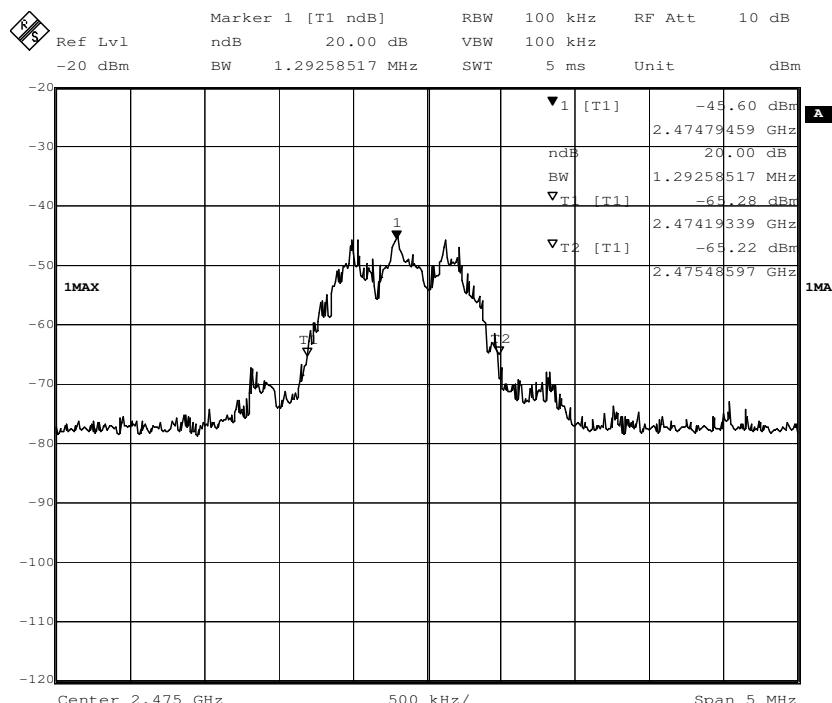

**The results: The unit does meet the FCC requirements.**

**--End of the report--**