

1. GENERAL INFORMATION

1-1. Product Description

The Compmate Industrial Co., Ltd. Model CM8688D (referred to as the EUT in this report) is a VGA, and VESA compatible multi-sync. color monitor featuring a maximum pixel resolution of 1280x1024 (Non-Interlaced).

The EUT provides a permanently attached video interface cable, approx. 1.2 meter, incorporated with a 15-pin, D-shell male, connector in addition to a permanently attached power cord.

Following described the summarized feature of EUT:

1. Display Tube : 15" color, 90 degree deflection, non-glare, dard-tint, screen phosphor P22, 0.28 mm dot pitch.
2. Display Area : 260mm x 195mm(Hor. x Vert.)
3. Compatibility : VGA and VESA
4. Resolution : Typical Modes are
VGA: (H)640x(V)350; (H) 31.5Khz / (V)70Hz
(H)640x(V)400; (H) 31.5Khz / (V)70Hz
(H)640x(V)480; (H) 31.5Khz / (V)60Hz

VESA: (H)800x(V)600; (H) 38Khz / (V)60Hz
(H)1024x(V)768; (H) 69Khz / (V)85Hz
(H)800x(V)600; (H) 54Khz / (V)85Hz
(H)1280x(V)1024; (H) 64Khz / (V)60Hz
5. Synchronization: Horizontal 30-70 KHz Vertical 45-90Hz
6. Input Signal: Video: Analog (0.7Vp-p/75 ohm positive)
7. Input Connector: 15-pin D-Sub connector
8. Power: 100-240Vac, 50-60Hz
9. Video Bandwidth: 110 MHz

1-2. Related Submittal(s) / Grant (s)

1-2-1. Models Covered

Only the EUT model CM8688D is submitted for FCC ID filing.

1-2-2. Models Difference

N/A

1-3. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

| Model No. | FCC ID | Equipment | Cable |
|------------------------|----------------|-------------|--|
| CM8688D ⁽¹⁾ | KWKCM8688D | 15" Monitor | Shielded Data Cable Un-Shielded Power Cord ⁽²⁾ |
| PRESARIO7222 | EJH3326 | PC | Shielded Power Cord |
| HP2225C+ | DSI6XU2225 | Printer | Shielded Parallel Data Cable Un-Shielded Power Cord |
| AT-1200CK | E2O5OV1200CK | Modem | Shielded Serial Data Cable Un-Shielded Power Cord |
| FDA-102A | F4ZAK3FDA-102A | Keyboard | Shielded Data Cable |
| SERIES 2/7S | DZL6QBS2 | Mouse | Shielded Data Cable |
| S3 Trio64+ | ICUVGA-GW503B | VGA Card | Add-on Card Cableless |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Notes:

(1) EUT submitted for grant.

(2) Monitor's attached video cable with ferrite core.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR22(1996). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 5, All 2, Lane 220, Kang Lo St., Nei Hwu, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Feb.4,1998 Submitted to your office, and accepted in a letter dated March 28, 1998 (31040/SIT-1300F2).

3. System Test Configuration

3-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The EUT was connected to support equipment-personal computer. Peripherals of PC, such as printer, modem, mouse and keyboard as well as the VGA add-on card were contained in this system in order to comply with the ANSI C63.4 standard requirement. The system was tested in the highest pixel resolution mode of 1280 x 1024, Hsync. 64KHz, and the highest horizontal sweep rate mode of 1024 x 768, Hsync. 69KHz. Both modes were investigated, and the mode of 1024 x 768, Hsync. 69KHz was found to be the worst case. This mode was used to collect the included data.

The second serial port(COM2) was tested in addition to the first port (COM1) ANSI C63.4, second paragraph. The simultaneous testing of this identical port did not take the system out of compliance. Therefore, the final qualification testing was completed with COM1 port connected by a stand along modem.

3-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read(write) from(to)the disk desk driver.
2. Send " H " pattern to the parallel port device (Printer).
3. Send " H " pattern to the video port device (Monitor).
4. Send " H " pattern to the serial port device (Modem).
5. Repeated from 1 to 4 continuously.

As the Keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3-3. Special Accessories

As shown in Figure 3-1, all interface cables used for compliance testing are shielded type except the power cord which marked as shielded. All cable connectors are integrated by metal hoods for shielding. This equipment is required to use a shielded video interface cable with a ferrite attached in order to comply with FCC requirements.


3-4. Equipment Modifications

In order to achieve in compliance with Class B levels, the following change(s) were made by NEUTRON test house during the compliance testing:

Please refer to the next page as the modifications described and cross reference of photos of tested EUT.

The above modifications will be implemented in all product models of this equipment.

Applicant Signature :



Date : March 18, 1998

Type/Printed Name :

Kao-wan Lee

Position : Engineer

| | | |
|---------------|---------------|-------------|
| To: | Message No. | |
| Organization: | Telephone No: | Department: |
| Date: | Fax No. | |
| From: | Telephone No: | Fax No: |

Modification Report

Message:

Company: Compmate Industrial Co., Ltd.

Model No.: CM8688D

FCC ID: KWKCM8688D


Page 1 of 1

Date: MAY 05, 1998

- A. Add a trorid core on the video cable.
- B. Add a trorid core on the safety ground line.
- C. Add a trorid core on the G1, G4 cable.
- D. Add a trorid core on the data cable.
- E. Add a trorid core on the video cable to close the video board.

All the above modification will be implemented and relayout in the mass production to meer the FCC Class B requirements.

Compmate Industrial Co., Ltd.



Kao-wan Lee

Engineer

9A/20

3.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described) was tested.

TABLE A - Test Equipment

| Item | Equipment | Mfr. | Model/Type No. | I/O Port | FCC ID | Remark |
|------|-------------|-------------|----------------|--------------|----------------|--------|
| E-1 | 15" Monitor | Compmate | CM8688D | VGA Port | KWKCM8688D | EUT |
| E-2 | PC | COMPAQ | PRESARIO7222 | | EJH3326 | |
| E-3 | Printer | HP | HP2225C+ | Printer Port | DSI6XU2225 | |
| E-4 | Modem | Datatronics | AT-1200CK | Com Port | E2O5OV1200CK | |
| E-5 | Keyboard | Forward | FDA-102A | PS/2 Port | F4Z4K3FDA-102A | |
| E-6 | Mouse | Logitech | SERIES 2-7S | PS/2 Port | DZL6QBS2 | |
| E-7 | VGA Card | Gainward | S3 Trio64+ | | ICUVGA-GW503B | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Remark:

- (1) Unless otherwise denoted as EUT in 'Remark' column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ※ in 'Remark' column, Neutron consigns the supporting equipment(s) to the tested system.


Table B. - Informations Cable Information

| Item | I/O Cable | Device Connected | Shielded | Ferrite | Detachable/Permanently | Note |
|------|------------------|------------------|----------|---------|------------------------|------|
| C-1 | Video Cable | PC-Monitor | Yes | Yes | Permanently attached | ※ |
| C-2 | Centronics Cable | PC-Printer | Yes | No | Detachable type | |
| C-3 | Keyboard Cable | PC-Keyboard | Yes | No | Permanently attached | |
| C-4 | RS-232 Cable | PC-Keyboard | Yes | No | Detachable type | |
| C-5 | Mouse Cable | PC-Mouse | Yes | No | Permanently attached. | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Note:

- (1) Unless otherwise marked as ※ in 「Remark」 column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 3.1 Configuration of Tested System

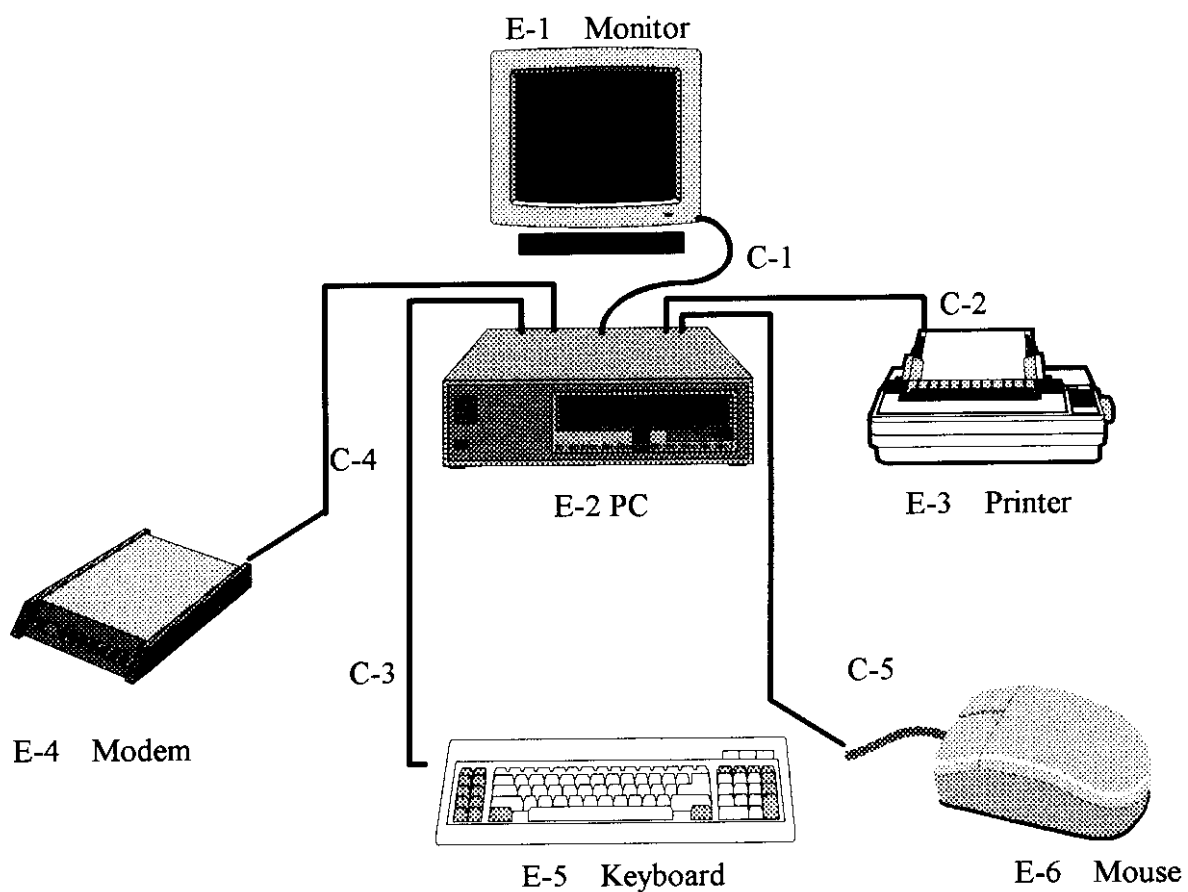

6. Conducted Emission Datas

6.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Judgement: Passed by **-3.27 dB** in mode of **Line** terminal **22.30 MHz**

| Freq. (MHz) | Terminal L/N | Measured(dBuV) | | Limits(dBuV) | | Safe Margins | |
|----------------|-----------------|----------------|---------|--------------|----------|--------------|------|
| | | QP-Mode | AV-Mode | QP-Mode | AVG-Mode | (dBuV) | Note |
| 0.23 | Line | 46.60 | * | 62.52 | 52.52 | -15.92 | (QP) |
| 0.85 | Line | 40.42 | * | 56.00 | 46.00 | -15.58 | (QP) |
| 7.45 | Line | 43.51 | * | 60.00 | 50.00 | -16.49 | (QP) |
| 10.73 | Line | 43.62 | * | 60.00 | 50.00 | -16.38 | (QP) |
| 22.30 | Line | 49.25 | 46.73 | 60.00 | 50.00 | -3.27 | (AV) |
| 0.23 | Neutral | 47.90 | * | 62.52 | 52.52 | -14.62 | (QP) |
| 0.29 | Neutral | 43.96 | * | 60.67 | 50.67 | -16.71 | (QP) |
| 1.02 | Neutral | 40.90 | * | 56.00 | 46.00 | -15.10 | (QP) |
| 9.71 | Neutral | 41.34 | * | 60.00 | 50.00 | -18.66 | (QP) |
| 22.30 | Neutral | 49.47 | 46.15 | 60.00 | 50.00 | -3.85 | (AV) |


Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=100KHz, VBW=100KHz, Swp. Time = 0.3 sec./MHz . Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz, VBW=10Hz, Swp. Time =0.3 sec./MHz .
- (2) All readings are QP Mode value unless otherwise stated AVG in colum of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform . In this case, a " *" marked in AVG Mode colum of Interference Voltage Measured .
- (3) Measuring frequency range from 150KHz to 30MHz .

Review :



Test Personnel. :



Date:

February 19, 1998

7. Radiated Emission Datas

- 7.1 The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Judgement: Passed by **-5.11 dB** in polarity of **Vertical** **44.79 MHz**

| Freq. (MHz) | Ant. H/V | Reading(RA) (dBuV) | Corr.Factor(CF) (dB) | Measured(FS) (dBuV/m) | Limits(QP) (dBuV/m) | Safe Margins (dBuV/m) | Note |
|----------------|-------------|-----------------------|-------------------------|--------------------------|------------------------|--------------------------|------|
| 39.28 | V | 12.70 | 11.48 | 24.18 | 30.00 | - 5.82 | |
| 44.79 | V | 13.00 | 11.89 | 24.89 | 30.00 | - 5.11 | |
| 45.60 | H | 11.70 | 11.94 | 23.64 | 30.00 | - 6.36 | |
| 57.40 | H | 13.40 | 10.21 | 23.61 | 30.00 | - 6.39 | |
| 113.50 | V | 10.40 | 13.34 | 23.74 | 30.00 | - 6.26 | |
| 137.30 | H | 11.30 | 12.39 | 23.69 | 30.00 | - 6.31 | |
| 203.20 | H | 11.00 | 12.30 | 23.30 | 30.00 | - 6.70 | |
| 209.60 | V | 11.60 | 12.09 | 23.69 | 30.00 | - 6.31 | |
| 219.20 | V | 11.70 | 11.79 | 23.49 | 30.00 | - 6.51 | |
| 226.40 | H | 9.40 | 11.72 | 21.12 | 30.00 | - 8.88 | |
| 236.80 | V | 18.10 | 12.59 | 30.69 | 37.00 | - 6.31 | |
| 261.60 | H | 15.10 | 14.40 | 29.50 | 37.00 | - 7.50 | |

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 'Note'. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

Review :

Andy Chiu

Test Personnel :

Robert Tseng

Date: February 20, 1998

7-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where **FS = Field Strength**

RA = Receiver Amplitude

AF = Antenna Factor (1)

CF = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = $AF + CF - AG$, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dBuV and a Cable Factor of 1.1 dBuV. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CF - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dBuV)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m as:

$$\text{Log}^{-1} \left[\frac{(32.0 \text{ dBuV/m})}{20} \right] = 39.8 \text{ (uV/m)}$$

7-3. Correction Factor VS Frequency

| Frequency (MHz) | Antenna Factor (dB) | Cable Loss (dB) |
|------------------------|----------------------------|------------------------|
| 30.00 | 11.10 | 0.20 |
| 35.00 | 10.80 | 0.00 |
| 40.00 | 11.20 | 0.40 |
| 45.00 | 11.50 | 0.40 |
| 50.00 | 11.30 | 0.90 |
| 55.00 | 10.50 | 0.00 |
| 60.00 | 9.90 | 0.00 |
| 65.00 | 8.70 | 0.20 |
| 70.00 | 7.60 | 0.00 |
| 75.00 | 6.40 | 0.50 |
| 80.00 | 6.10 | 0.10 |
| 85.00 | 7.00 | 0.80 |
| 90.00 | 8.00 | 0.30 |
| 95.00 | 10.00 | 0.40 |
| 100.00 | 11.20 | 0.60 |
| 110.00 | 12.60 | 0.60 |
| 120.00 | 13.00 | 0.60 |
| 130.00 | 12.50 | 0.50 |
| 140.00 | 12.00 | 0.20 |
| 150.00 | 12.00 | 1.00 |
| 160.00 | 13.20 | 1.20 |
| 170.00 | 14.80 | 1.60 |
| 180.00 | 16.30 | 1.90 |
| 190.00 | 17.00 | 1.90 |
| 200.00 | 17.30 | 1.40 |
| 225.00 | 10.50 | 1.10 |
| 250.00 | 11.70 | 2.00 |
| 275.00 | 12.80 | 2.40 |
| 300.00 | 14.50 | 2.40 |
| 325.00 | 14.00 | 1.90 |
| 350.00 | 14.20 | 2.40 |
| 375.00 | 14.60 | 2.90 |
| 400.00 | 15.10 | 2.70 |
| 450.00 | 16.20 | 3.20 |
| 500.00 | 17.60 | 3.70 |
| 550.00 | 17.80 | 3.90 |
| 600.00 | 18.40 | 4.30 |
| 650.00 | 19.50 | 4.00 |
| 700.00 | 20.80 | 4.10 |
| 750.00 | 20.50 | 5.30 |
| 800.00 | 21.10 | 5.90 |
| 850.00 | 22.40 | 5.80 |
| 900.00 | 23.50 | 5.50 |
| 950.00 | 24.00 | 6.30 |
| 1000.00 | 24.80 | 5.20 |

8. Photos of Tested EUT:

1. Photo # 1. Front View
2. Photo # 2. Rear View
3. Photo # 3. -- 5 Rear Cover Removed
4. Photo # 6 Unit Partially Disassembled
5. Photo # 7 -- 8 Processor PC Board, Component Side
6. Photo # 9 -- 10 Processor PC Board, Foil Side
7. Photo # 11 Inside Rear Cover