



# FCC TEST REPORT

**REPORT NO.:** F910912A02

**MODEL NO.:** LZE-568

**RECEIVED:** Sept. 12, 2002

**TESTED:** Oct. 7 ~ 8, 2002

**APPLICANT:** THREE SOMA TECHNOLOGY CO., LTD.

**ADDRESS:** 2F, No. 27, Shoei Biann 2<sup>nd</sup> Rd., Taoyuan,  
Taiwan, R. O. C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 20 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0528  
ILAC MRA



Lab Code: 200102-0

## Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES .....	5
3.3	DESCRIPTION OF SUPPORT UNITS .....	6
4	EMISSION TEST .....	7
4.1	CONDUCTED EMISSION MEASUREMENT.....	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	7
4.1.2	TEST INSTRUMENTS.....	7
4.1.3	TEST PROCEDURE.....	8
4.1.4	DEVIATION FROM TEST STANDARD.....	8
4.1.5	TEST SETUP.....	8
4.1.6	EUT OPERATING CONDITIONS .....	9
4.1.7	TEST RESULTS .....	10
4.2	RADIATED EMISSION MEASUREMENT.....	12
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	12
4.2.2	TEST INSTRUMENTS.....	13
4.2.3	TEST PROCEDURE.....	14
4.2.4	DEVIATION FROM TEST STANDARD.....	14
4.2.5	TEST SETUP.....	15
4.2.6	EUT OPERATING CONDITIONS .....	15
4.2.7	TEST RESULTS .....	16
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	18
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES .....	20



## 1 CERTIFICATION

**PRODUCT:** 15" LCD MONITOR

**BRAND NAME:** Three SOMA, no brand

**MODEL NO.:** LZE-568

**TEST ITEM:** ENGINEERING SAMPLE

**APPLICANT:** THREE SOMA TECHNOLOGY CO., LTD.

**STANDARDS:** FCC Part 15, Subpart B, Class B

CISPR 22: 1997, Class B

ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 7 ~ 8, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**CHECKED BY:** *Molly*, **DATE:** Oct. 23, 2002  
(Yemmy Soong)

**APPROVED BY:** *Paul Yang for*, **DATE:** Oct. 23, 2002  
(Fred Chen, Manager)

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -10.55 dB at 0.199 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -2.40 dB at 131.25 MHz

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	15" LCD MONITOR
<b>MODEL NO.</b>	LZE-568
<b>POWER SUPPLY</b>	Switching power adapter Brand: CHI Model: CH-1204 I/P: 100-240Vac, 1A Max., 50-60Hz O/P: 12Vdc, 4A, 48W Max. Non-shielded DC 3-pin (1.8m) with a ferrite core Non-shielded AC (1.8m)
<b>DATA CABLE</b>	VGA shielded (1.5m) with two ferrite cores

**NOTE:** The EUT is a 15" LCD MONITOR with resolution up to 1024x768.

The EUT is using a 15" Chi Mei LCD panel, model: M150X3-T05.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

#### 3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested under the following resolution & horizontal synchronization speed modes:

- ◆ 1024x768 (75Hz/60KHz)
- ◆ 800x600 (75Hz/47KHz)
- ◆ 640x480 (60Hz/31.5KHz)

The worst emission level was found when the EUT was tested under 1024x768 (75Hz/60KHz) resolution. Therefore only the test data of this mode was recorded in this report.

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	Brio BA410	SG12106012	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017063	FCC DoC Approved
3	MODEM	ACEEX	1414	980020533	IFAXDM1414
4	PS/2 KEYBOARD	BTC	5121W	A00801372	E5XKB5121WTH01 10
5	PS/2 MOUSE	LOGITECH	M-S61	HCA12605710	JNZ211403
6	VGA DISPLAY CARD	ELSA	ERAZOR III LT	0105017189	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
5	1.8 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	NA

**NOTE:** All power cords of the above support units are non-shielded (1.8m).

## 4 EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTES:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. “\*”: These equipment are used for conducted telecom port test only (if tested).
3. The test was performed in ADT Shielded Room No. 2.
4. The VCCI Site Registration No. is C-240.


#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

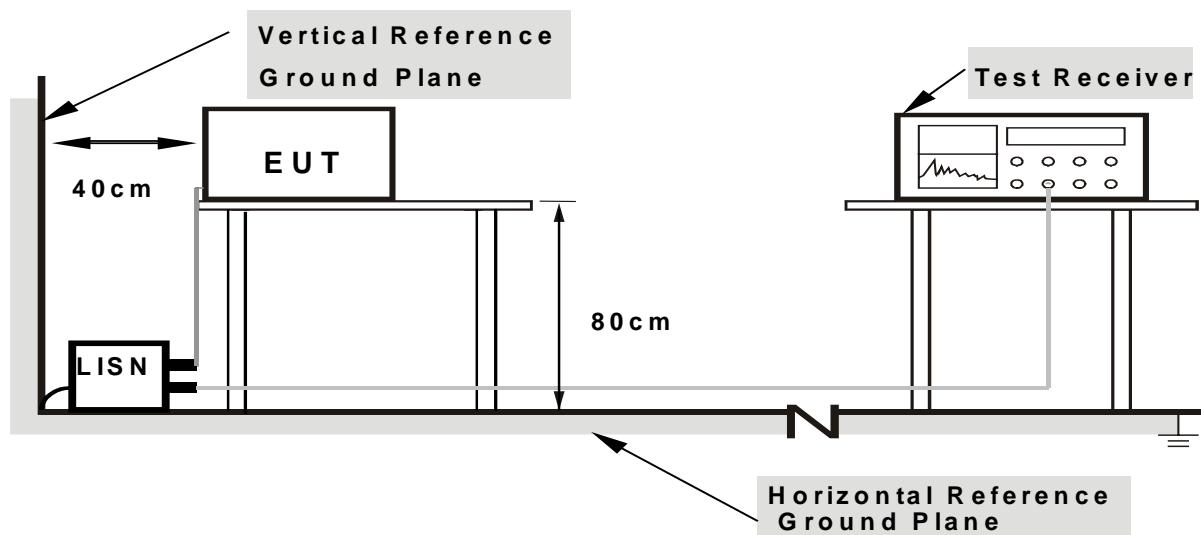

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. PC sent "H" messages to LCD MONITOR (EUT) and displayed "H" patterns on screen.
- e. PC sent "H" messages to modem.
- f. PC sent "H" messages to printer, and the printer printed them on paper.
- g. Steps c-g were repeated.


#### 4.1.7 TEST RESULTS

<b>EUT</b>	15" LCD MONITOR	<b>MODEL NO.</b>	LZE-568
		<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 67 % RH, 1005 hPa		<b>TESTED BY:</b> Ken Liu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.199	0.10	52.98	-	53.08	-	63.63	53.63	-10.55	-
2	0.332	0.10	42.11	-	42.21	-	59.41	49.41	-17.20	-
3	0.796	0.10	32.36	-	32.46	-	56.00	46.00	-23.54	-
4	2.060	0.11	36.33	-	36.44	-	56.00	46.00	-19.56	-
5	9.509	0.58	37.35	-	37.93	-	60.00	50.00	-22.07	-
6	23.354	1.27	40.58	-	41.85	-	60.00	50.00	-18.15	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

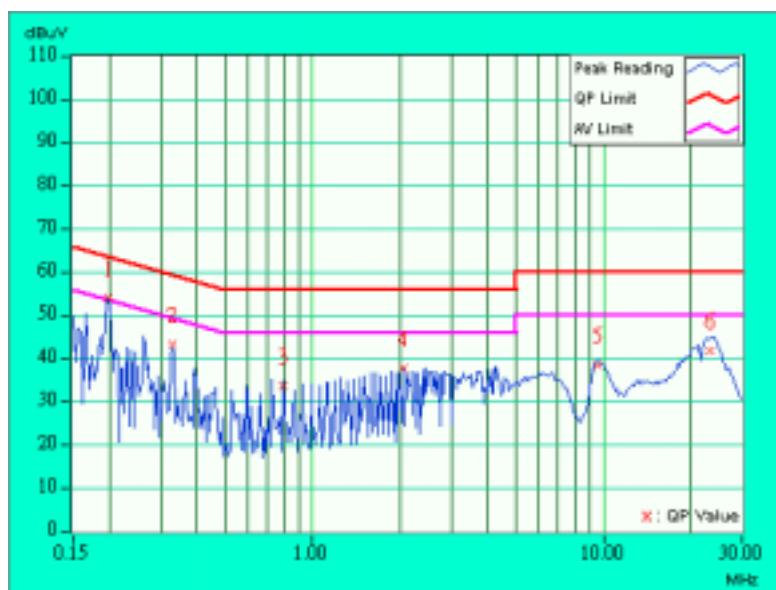


<b>EUT</b>	15" LCD MONITOR	<b>MODEL NO.</b>	LZE-568
		<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 67 % RH, 1005 hPa	<b>TESTED BY:</b> Ken Liu	

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.200	0.10	52.21	-	52.31	-	63.62	53.62	-11.31	-
2	0.268	0.10	42.33	-	42.43	-	61.18	51.18	-18.75	-
3	1.142	0.10	31.90	-	32.00	-	56.00	46.00	-24.00	-
4	4.163	0.30	35.89	-	36.19	-	56.00	46.00	-19.81	-
5	9.877	0.40	33.77	-	34.17	-	60.00	50.00	-25.83	-
6	22.571	1.10	32.85	-	33.95	-	60.00	50.00	-26.05	-

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

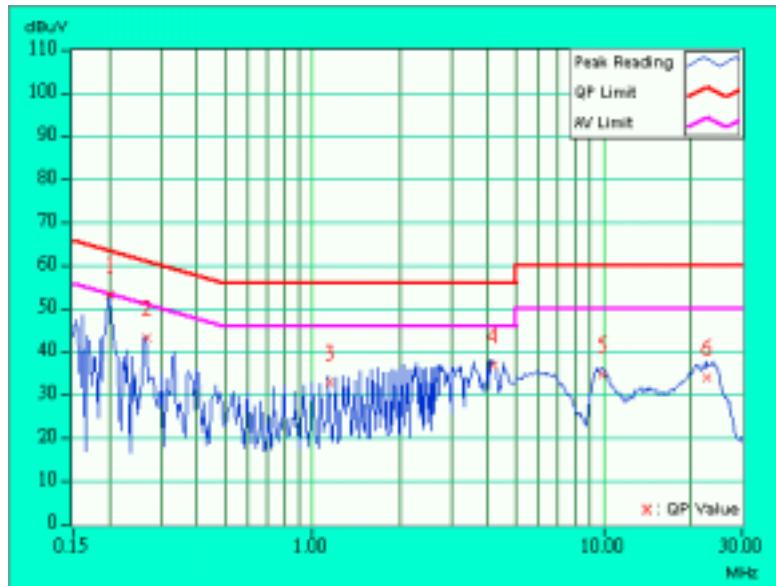

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

#### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

**Note:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A00941	Dec.10, 2002
HP Pre-Amplifier	8447D	2944A08312	Aug. 26, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* R&S Receiver	ESI7	100033	May 28, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
* CHASE BILOG Antenna	CBL6111A	1500	Aug. 29, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060-04	1196	NA
* EMCO Tower	1051	1264	NA
* Software	ADT_Radiated_V5.06	NA	NA
* ANRITSU RF Switches	MP59B	M06089	Aug. 29, 2003
* TIMES RF cable	LMR-600	CABLE-ST1-01	Aug. 29, 2003

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.  
 2. “\*” = These equipment are used for the final measurement.  
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
 4. The test was performed in ADT Open Site No. 1.  
 5. The VCCI Site Registration No. is R-236.

#### 4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

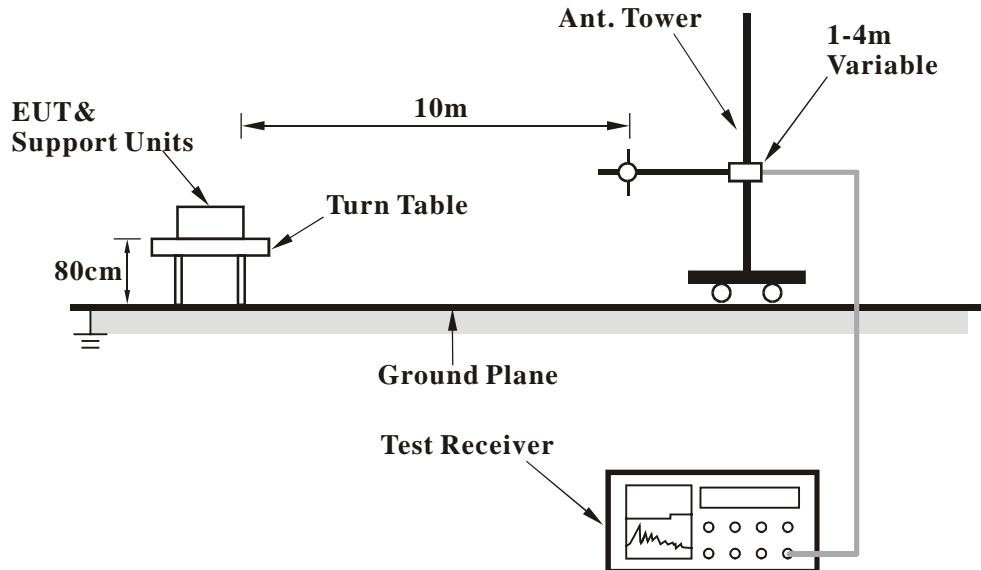

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


#### 4.2.7 TEST RESULTS

<b>EUT</b>	15" LCD MONITOR	<b>MODEL NO.</b>	LZE-568
		<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 79 % RH, 1005 hPa	<b>TESTED BY:</b> Ken Liu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.77	17.0 QP	30.00	-13.00	3.69 H	300	8.80	8.20
2	130.75	22.9 QP	30.00	-7.10	4.00 H	246	10.30	12.70
3	149.36	22.0 QP	30.00	-8.00	4.00 H	93	10.10	11.90
4	150.44	18.4 QP	30.00	-11.60	4.00 H	132	6.60	11.80
5	160.80	20.1 QP	30.00	-9.90	4.00 H	333	9.00	11.10
6	172.36	17.6 QP	30.00	-12.40	4.00 H	6	7.20	10.40
7	187.55	16.3 QP	30.00	-13.70	4.00 H	35	6.00	10.30
8	192.86	19.2 QP	30.00	-10.80	4.00 H	248	8.70	10.50
9	210.74	24.4 QP	30.00	-5.60	4.00 H	139	12.90	11.50
10	257.30	21.1 QP	37.00	-15.90	4.00 H	4	6.50	14.60
11	324.57	23.8 QP	37.00	-13.20	2.70 H	193	7.40	16.40

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

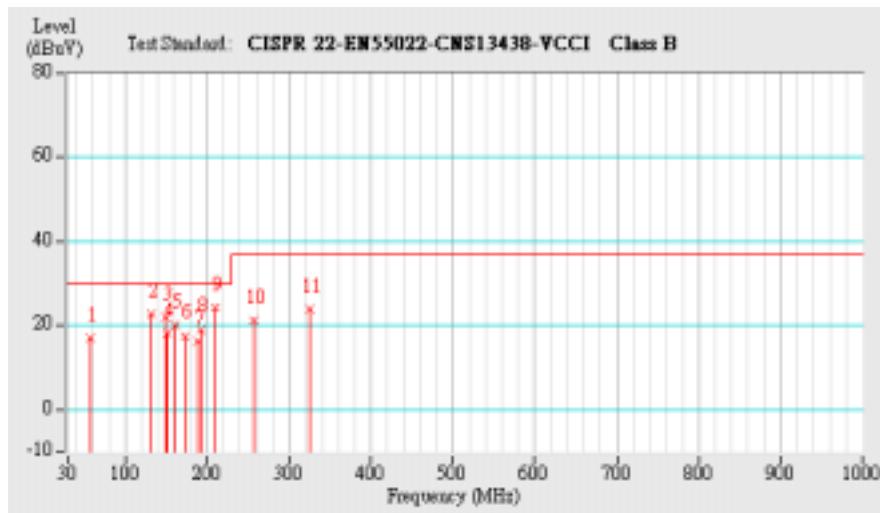


<b>EUT</b>	15" LCD MONITOR	<b>MODEL NO.</b>	LZE-568
		<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 79 % RH, 1005 hPa	<b>TESTED BY:</b> Ken Liu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.65	22.2 QP	30.00	-7.80	1.17 V	227	12.80	9.30
2	63.59	20.9 QP	30.00	-9.10	1.17 V	171	13.20	7.60
3	80.41	21.9 QP	30.00	-8.10	1.37 V	102	13.40	8.50
4	117.98	24.3 QP	30.00	-5.70	1.00 V	112	11.60	12.70
5	131.25	27.6 QP	30.00	-2.40	1.00 V	295	15.00	12.60
6	160.91	20.5 QP	30.00	-9.50	1.00 V	149	9.50	11.10
7	168.90	20.1 QP	30.00	-9.90	1.00 V	338	9.50	10.60
8	176.87	23.1 QP	30.00	-6.90	1.00 V	168	12.90	10.20
9	182.26	23.4 QP	30.00	-6.60	1.00 V	37	13.30	10.10
10	200.70	22.3 QP	30.00	-7.70	1.00 V	191	11.50	10.80
11	225.29	23.0 QP	30.00	-7.00	1.00 V	346	10.50	12.40
12	238.58	20.9 QP	37.00	-16.10	1.00 V	114	7.60	13.30
13	324.56	28.3 QP	37.00	-8.70	1.00 V	212	12.00	16.40

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

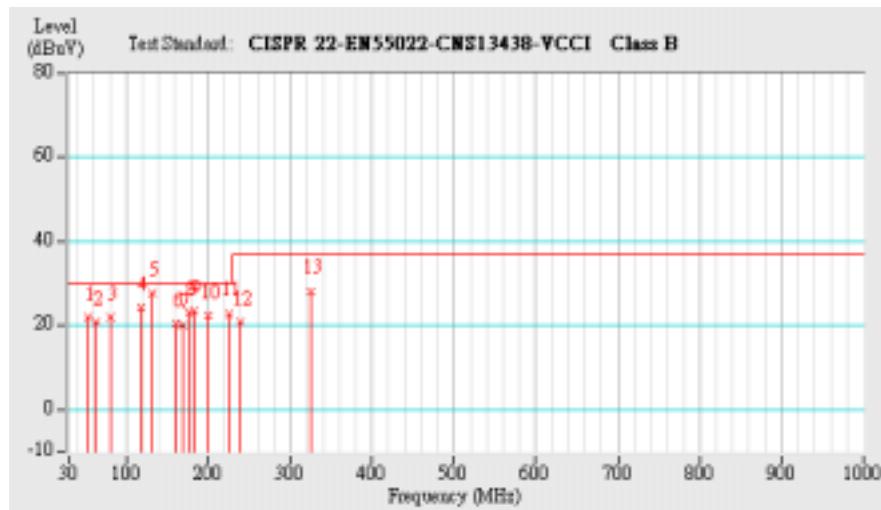

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION


### CONDUCTED EMISSION TEST



FCC ID: KX7LZE



### RADIATED EMISSION TEST

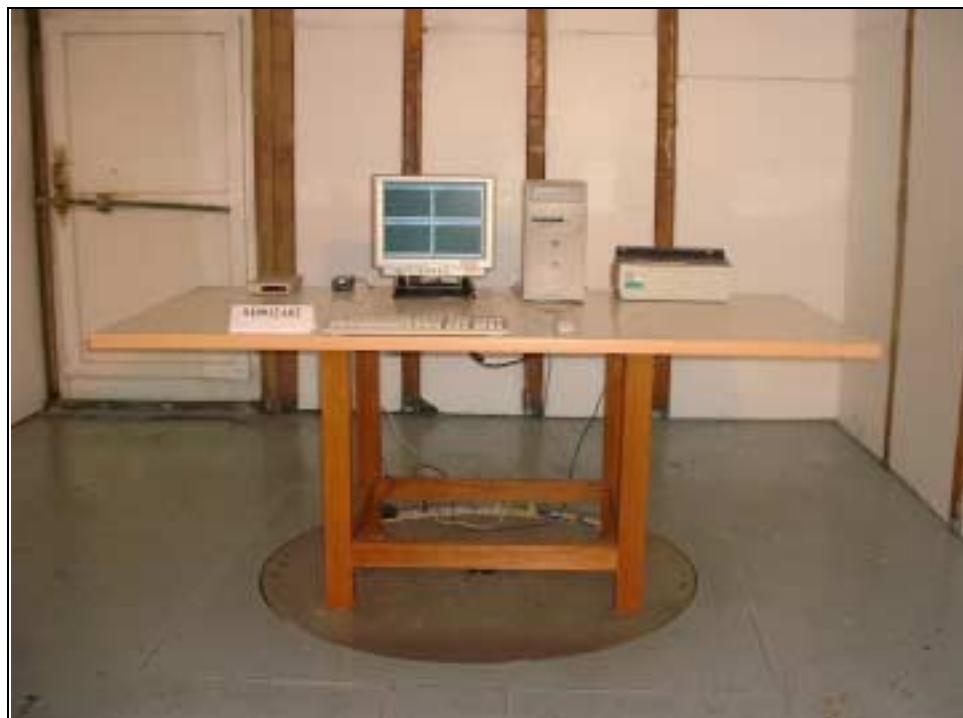

## 6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA
<b>R.O.C.</b>	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195  
Fax: 886-2-26093184

**Lin Kou RF & Telecom Lab.**

Tel: 886-3-3270910  
Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.