

## FCC CLASS B COMPLIANCE REPORT

for

Electromagnetic Emissions

of

### LCD MONITOR

**ID Number** : KXYNV721C  
**Trade Name** : GREAT WALL  
**Model Number** : NV721C  
**Serial Number** : N/A  
**Report Number** : SZ0303009  
**Date** : March 17~25, 2003

Prepared for :

**CHINA GREAT-WALL COMPUTER SHENZHEN CO., LTD.**  
**GREAT-WALL BLDG. SCIENCE & INDUSTRY PARK,**  
**SHENZHEN, CHINA**

Prepared by :

**COMPLIANCE ENGINEERING SERVICES (CHINA)**

*d.b.a.*  
**COMPLIANCE ENGINEERING SERVICES (CHINA)**  
**NO. 6, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD,**  
**DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN**  
**DISTRICT, SHENZHEN, CHINA**

**TEL: 86-755-28055000**  
**FAX: 86-755-28055221**

## TABLE OF CONTENTS

DESCRIPTION	PAGE
VERIFICATION OF COMPLIANCE	3
FCC ID	4
SPECIFICATION	5
SYSTEM DESCRIPTION	6
PRODUCT INFORMATION	7
SUPPORT EQUIPMENT	8
<b>SECTION 1 EN 55022(LINE CONDUCTED &amp; RADIATED EMISSION)</b>	9
MEASUREMENT PROCEDURE & LIMIT (LINE CONDUCTED EMISSION TEST)	9
MEASUREMENT PROCEDURE & LIMIT (RADIATED EMISSION TEST)	11
SUMMARY DATA	15
TEST FACILITY	17
TEST EQUIPMENT LIST	19
BLOCK DIAGRAM OF TEST SETUP	20
APPENDIX 1 PHOTOGRAPHS (TEST SETUP OF LINE CONDUCTED EMISSION)	21
APPENDIX 2 PHOTOGRAPHS (TEST SETUP OF RADIATED EMISSION)	23
APPENDIX 3 PHOTOGRAPHS OF EUT	25
APPENDIX 4 SPECTRUM PLOT OF L1 AND L2(FINAL TEST)	34

## VERIFICATION OF COMPLIANCE

**Equipment Under Test:** LCD MONITOR  
**Trade Name:** GREAT WALL  
**Model Number:** NV721C  
**Serial Number:** N/A  
**Applicant:** CHINA GREAT-WALL COMPUTER SHENZHEN CO., LTD.  
GREAT-WALL BLDG. SCIENCE & INDUSTRY PARK,  
SHENZHEN, CHINA  
**Manufacturer:** CHINA GREAT-WALL COMPUTER SHENZHEN CO., LTD.  
SHIYAN BRANCH, MONITOR DIVISION  
GREAT-WALL COMPUTER INDUSTRY PARK, BAOSHI EAST RD.  
SHIYAN COUNTRY, BAOAN, SHENZHEN, P.R. CHINA  
**Type of Test:** FCC Class B  
**Measurement Procedure:** ANSI C63.4: 2000  
**File Number:** SZ0303009  
**Date of test:** March 17~25,2003  
**Deviation:** None  
**Condition of Test Sample:** Normal

The above equipment was tested by Compliance Engineering Services (China) for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedure according to ANSI C63.4. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.




---

Tom Lai

Tom Lai / Q.A. Manager

## FCC ID LABEL

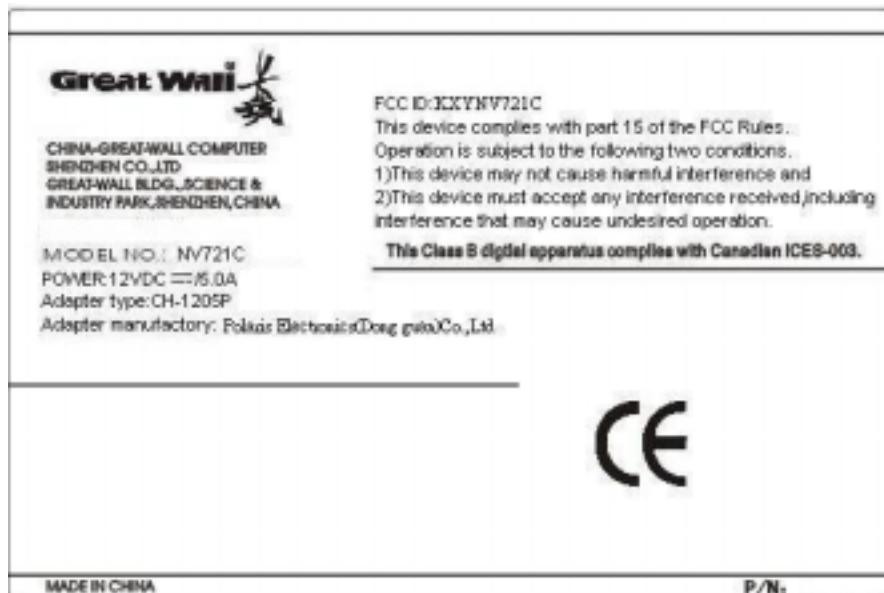

## 17" TFT LCD

**LCD POWER :** 12VDC/5.0AMAX

**ADAPTOR POWER :** 100V-240VAC 47-63Hz 1.0AMAX

Supported Timing

Display Mode			Analog		
VESA	VGA	640 x 480	Horizontal Frequency	Vertical Frequency	
			31.5 KHz	60 Hz	
			37.5 KHz	75 Hz	
	SVGA	800 x 600	31.5 KHz	70.1 Hz	
			35.2 KHz	56.3 Hz	
			37.9 KHz	60.3 Hz	
			46.9 KHz	75.0 Hz	
	XGA	1024 x 768	48.1 KHz	72.0 Hz	
			48.4 KHz	60.0 Hz	
			56.5 KHz	70.1 Hz	
			58.1 KHz	72.0 Hz	
	SXGA	1280 x 1024	60.0 KHz	75.0 Hz	
			63.98 KHz	60.02 Hz	
Macintosh	VGA	640 x 480	79.97 KHz	75.02 Hz	
		832 x 624	35.0 KHz	66.7 Hz	
MS-DOS			49.7 KHz	74.6 Hz	
			31.5 KHz	70.1 Hz	

## SYSTEM DESCRIPTION

### **EUT Test Program:**

1. EMC test program was loaded and executed in Windows 2000 mode.
2. Data was sent to EUT filling the screen with upper case of "H" patterns.
3. Test program sequentially exercised printer and modem, then sent "H" patterns to them individually.
4. Repeat 2 to 3. Test program is self-repeating throughout the test.

## PRODUCT INFORMATION

**Housing Type:** Plastic  
**EUT Power Rating:** DC12V  
**Power during Test:** DC12V  
**Power Cord Type:** Unshielded, 1.8m  
**Adaptor Model NO.** CH-1205P  
**OSC/Clock Frequencies:** 14.318MHz

### I/O Port of EUT:

I/O Port Type	Q'TY	Tested with
1) DC IN	1	1
2) VGA	1	1

Difference between model numbers as below:

	Model Number	Trade Name
1.	NV721C	KDS
2.	NV721C	HANSOL
3.	NV721C	WESCOM
4.	NV721C	DAEWO
5.	NV721C	MARVIN
6.	NV721C	VERSUS
7.	NV721C	DAYTEK
8.	NV721C	iiyama
9.	NV721C	e-life

**Note:** The trade names(list on this report) are different, (Please refer list as above) just for marketing only.

There are two types of LCD panel(SAMSUNG and AU); The pre-tests have passed, And the sample(LCD panel---SAMSUNG) was the worse one. It was the final-test sample, The report based on its final-test data.

## SUPPORT EQUIPMENT

No.	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	PC	PC4	N/A	DoC	N/A	N/A	Unshielded 1.8m
2.	PRINTER	P310B	C41344000NK 02520275	DoC	EPSON	Shielded 1.5m	Shielded 1.8m
3.	KEYBOARD	KB-9970	1D35101526B	DoC	HP	Unshielded 1.8m	N/A
4.	MOUSE	MUS9JN	298792-001	DoC	COMPAQ	Unshielded 1.8m	N/A
5.	MODEM	SUPERFAX6.0	9013593	DoC	ACCEX	Shielded 1.8m	Unshielded 1.8m

**Note:** All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

**Grounding:** Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

## SECTION 1 EN 55022(LINE CONDUCTED AND RADIATED EMISSION)

### MEASUREMENT PROCEDURE (PRELIMINARY LINE CONDUCTED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55022 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per EN 55022.
- 3) All I/O cables were positioned to simulate typical actual usage as per EN 55022.
- 4) The EUT received DC power from an adaptor, and adaptor received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipment received power from a second LISN supplying power of 120VAC/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Preliminary Conducted Emission Test			
Frequency Range Investigated		150KHz TO 30 MHz	
Mode of operation	Date	Data Report No.	Worst Mode
640*480	03/17/2003	NV721C_1(L) NV721C_1(N)	<input type="checkbox"/>
1024*768	03/17/2003	NV721C_2(L) NV721C_2(N)	<input type="checkbox"/>
1280*1024	03/17/2003	NV721C_3(L) NV721C_3(N)	<input checked="" type="checkbox"/>

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## MEASUREMENT PROCEDURE (FINAL LINE CONDUCTED EMISSION TEST)

- 1) EUT and support equipment was set up on the test bench as per step 9 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using an Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

### Data Sample:

Freq. MHz	Peak Raw dBuV	Q.P. Raw dBuV	Average Raw dBuV	Q.P. Limit dBuV	Average Limit dBuV	Q.P. Margin dB	Average Margin dB	Note
x.xx	43.90	---	---	56.00	46.00	---	-2.10	L 1

Freq. = Emission frequency in MHz  
Raw dBuV = Uncorrected Analyzer/Receiver reading  
Limit dBuV = Limit stated in standard  
Margin dB = Reading in reference to limit  
Note = Current carrying line of reading  
“---“ = The emission level complied with the Average limits, with at least 2 dB margin, so no further recheck.

## LINE CONDUCTED EMISSION LIMIT

Frequency	Maximum RF Line Voltage	
	Q.P.	AVERAGE
150kHz-500kHz	66-56dBuV	56-46dBuV
500kHz-5MHz	56dBuV	46dBuV
5MHz-30MHz	60dBuV	50dBuV

**Note:** The lower limit shall apply at the transition frequency.

## MEASUREMENT PROCEDURE (PRELIMINARY RADIATED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per EN 55022 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per EN 55022.
- 3) All I/O cables were positioned to simulate typical actual usage as per EN 55022.
- 4) The EUT received DC power from an adaptor, and adaptor received AC power from the outlet socket under the turntable. All support equipment received 120VAC/60Hz power from socket under the turntable, if any.
- 5) The antenna was placed at 10 meter away from the EUT as stated in EN 55022. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The following test mode(s) were scanned during the preliminary test:

Preliminary Radiated Emission Test			
Frequency Range Investigated		30 MHz TO 1000 MHz	
Mode of operation	Date	Data Report No.	Worst Mode
640*480	03/20/2003	NV721C_1(V) NV721C_1(H)	<input type="checkbox"/>
1024*768	03/20/2003	NV721C_2(V) NV721C_2(H)	<input type="checkbox"/>
1280*1024	03/20/2003	NV721C_3(V) NV721C_3(H)	<input checked="" type="checkbox"/>

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.

## MEASUREMENT PROCEDURE (FINAL RADIATED EMISSION TEST)

- 1) EUT and support equipment were set up on the turntable as per step 7 of the preliminary test.
- 2) The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 3) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Peak/ Q.P. reading is presented.
- 4) The test data of the worst case condition(s) was reported on the Summary Data page.

### Data Sample:

Freq. (MHz)	Raw Data (dBuV/m)	Corr. Factor (dB)	Emiss. Level ( dBuV/m )	Limits ( dBuV/m )	Margin (dB)	Reading Type P/Q
xx.xx	14.02	12.25	26.27	30.00	-3.73	P

Freq.	= Emission frequency in MHz
Raw Data (dBuV/m)	= Uncorrected Analyzer / Receiver reading
Corr. Factor (dB)	= Correction factors of antenna factor and cable loss
Emiss. Level	= Raw reading converted to dBuV and CF added
Limit dBuV/m	= Limit stated in standard
Margin dB	= Reading in reference to limit
P	=Peak Reading
Q	=Quasi-peak

## RADIATED EMISSION LIMIT

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBu V/m/ Q.P.)
30-230	10	30.0
230-1000	10	37.0

**Note:** The lower limit shall apply at the transition frequency.

## SUMMARY DATA (LINE CONDUCTED TEST)

**Model Number:** NV721C

**Location:** G-site

**Tested by:** Emily

**Test Mode:** 1280\*1024

**Test Results:** Passed

**Temperature:** 25°C

**Humidity:** 65%RH

(The chart below shows the highest readings taken from the final data)

FREQ MHz	Peak dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.191	46.45	---	---	64.81	54.81	---	-8.36	L1
3.410	39.19	---	---	56.00	46.00	---	-6.81	L1
3.800	39.54	---	---	56.00	46.00	---	-6.46	L1
17.900	52.61	---	42.52	60.00	50.00	-7.39	-7.48	L1
19.560	46.21	---	---	60.00	50.00	---	-3.79	L1
26.820	46.07	---	---	60.00	50.00	---	-3.93	L1
0.191	47.25	---	---	64.81	54.81	---	-7.56	L2
4.660	39.85	---	---	56.00	46.00	---	-6.15	L2
5.060	39.93	---	---	60.00	50.00	---	-10.07	L2
17.940	51.37	---	41.98	60.00	50.00	-8.63	-8.02	L2
19.300	45.59	---	---	60.00	50.00	---	-4.41	L2
26.880	48.28	---	36.99	60.00	50.00	-11.72	-13.01	L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

**\*\*NOTE:** “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

**SUMMARY DATA**  
**(RADIATED EMISSION TEST)**

**Model Number:** NV721C

**Location:** G-site

**Tested by:** Emily

**Polar:** Vertical--10m

**Test Mode:** 1280\*1024

**Test Results:** Passed

**Detector Function:** Peak/QP

**Temperature:** 25°C

**Humidity:** 65%RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data ( dBuV/m )	Corr. Factor (dB)	Emiss. Level ( dBuV/m )	Limits (dB)	Margin (dB)	Reading Type (P/Q)
50.23	14.27	13.10	27.37	30.00	-2.63	P
113.12	12.10	11.55	28.45	30.00	-6.35	Q
167.82	14.56	9.74	24.30	30.00	-5.70	P
190.00	15.88	9.90	25.78	30.00	-4.22	P
201.55	17.25	10.51	27.76	30.00	-2.24	P
211.37	14.99	11.22	26.21	30.00	-3.79	P

**SUMMARY DATA**  
**(RADIATED EMISSION TEST)**

**Model Number:** NV721C

**Location:** G-Site

**Tested by:** Emily

**Polar:** Horizontal--10m

**Test Mode:** 1280\*1024

**Test Results:** Passed

**Detector Function:** Peak/QP

**Temperature:** 25°C

**Humidity:** 65% RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data ( dBuV/m )	Corr. Factor (dB)	Emiss. Level ( dBuV/m )	Limits (dB)	Margin (dB)	Reading Type (P/Q)
113.57	12.02	11.59	23.61	30.00	-6.39	P
135.48	12.27	11.74	24.01	30.00	-5.99	P
187.27	8.96	9.87	18.83	30.00	-11.17	P
209.32	9.10	11.05	20.15	30.00	-9.85	P
229.58	9.52	11.71	21.23	30.00	-8.77	P
648.11	5.65	18.45	24.10	37.00	-12.90	P

## TEST FACILITY

**Location:** No. 6, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

**Description:** There is one 3/10m open area test sites and one line conducted labs for final test.

The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

**Site Filing:** A site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

**Site Accreditation:** Accredited by NVLAP(Lab code:200577-0) for EMC.

**Instrument Tolerance:** All measuring equipment is in accord with ANSI C63.4 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.

**Ground Plane:** Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

## TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Compliance Engineering Services (China) for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10kHz to 1.0GHz or above.

**Equipment used during the tests:**

**Open Area Test Site:** G

Open Area Test Site G					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
EMI Test Receiver	HP	8546A	3448A00232	06/01/2002	05/31/2003
AMPLIFIER	HP	8447D	2944A07999	06/01/2002	05/31/2003
ANTENNA	EMCO	3142	9910-1436	06/01/2002	05/31/2003
CABLE	TIME MICROWAVE	LMR-400	N-TYPE04	06/01/2002	05/31/2003

**Conducted Emission Test Site:** G

Conducted Emission Test Site G					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
EMI Test Receiver	HP	8546A	3448A00232	06/01/2002	05/31/2003
EMI MEASURING RECEIVER	SCHAFFNER	SCR3501	1001021293	06/01/2002	05/31/2003
LISN(EUT)	EMCO	3825/2	1371	06/01/2002	05/31/2003
LISN	EMCO	3825/2	8901-1459	06/01/2002	05/31/2003

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

## BLOCK DIAGRAM OF TEST SETUP


### System Diagram of Connections between EUT and Simulators

**EUT: LCD MONITOR**

**Trade Name: GREAT WALL**

**Model Number: NV721C**

**Power Cord: Unshielded, 1.8m**

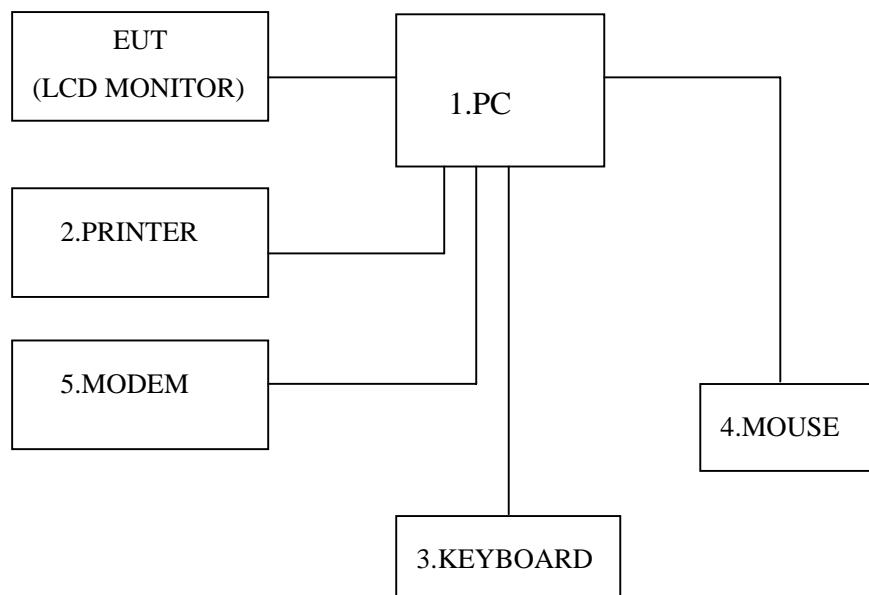

## **APPENDIX 1**

### **PHOTOGRAPHS OF TEST SETUP**

**(TEST SETUP OF LINE CONDUCTED EMISSION )**

## LINE CONDUCTED EMISSION TEST (EN 55022)



## **APPENDIX 2**

### **PHOTOGRAPHS OF TEST SETUP**

**(TEST SETUP OF RADIATED EMISSION )**

## RADIATED EMISSION TEST (EN 55022)



## **APPENDIX 3**

### **PHOTOGRAPHS OF EUT**

### Front view of EUT



### Back view of EUT






**Left view of EUT**




### Inside view of EUT


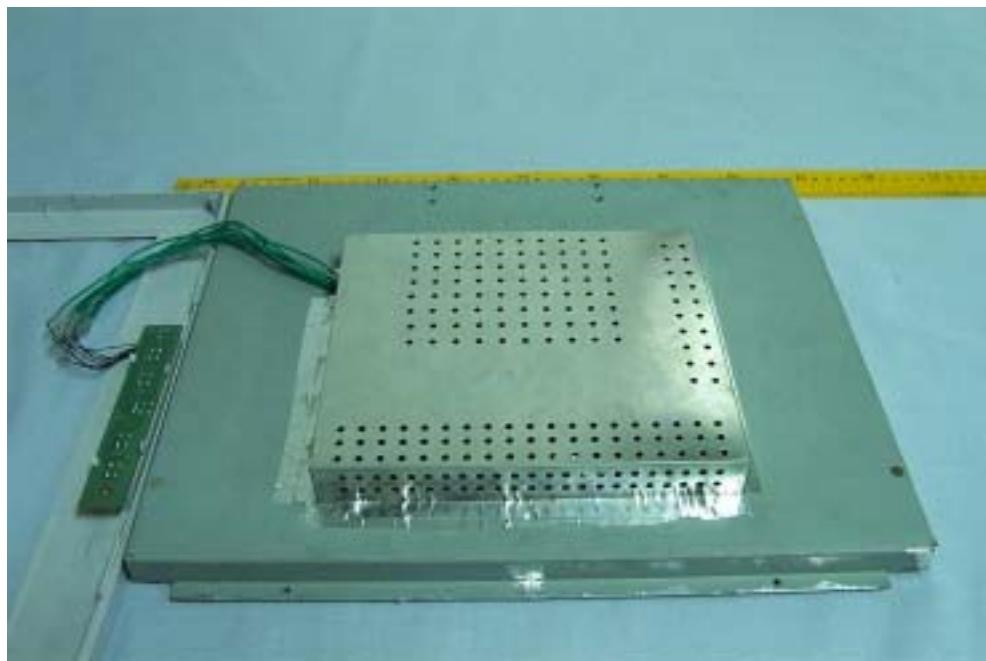






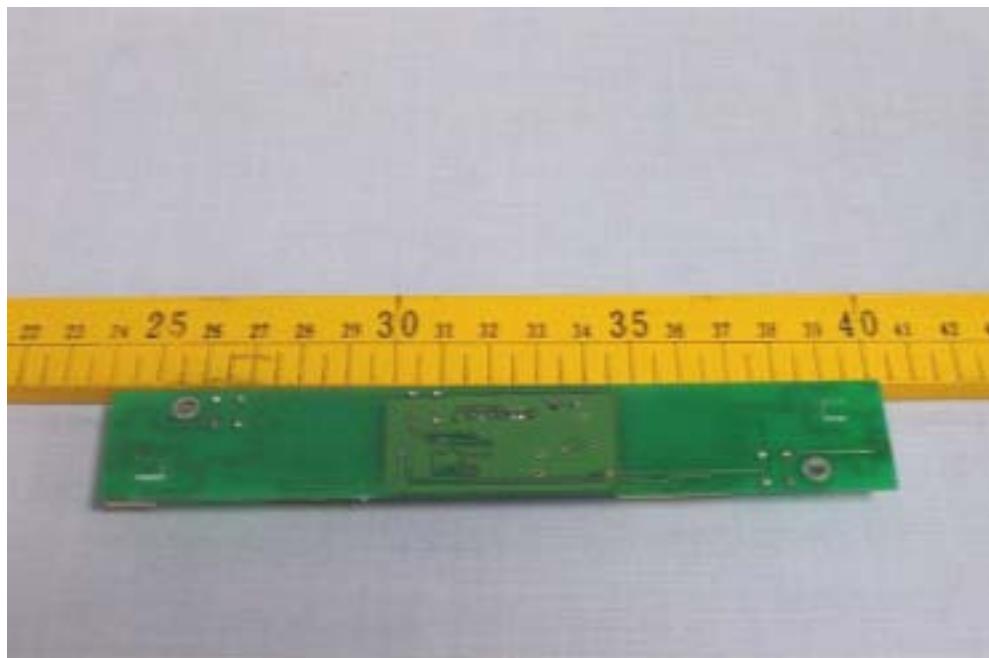

**Internal photos of AC adaptor**

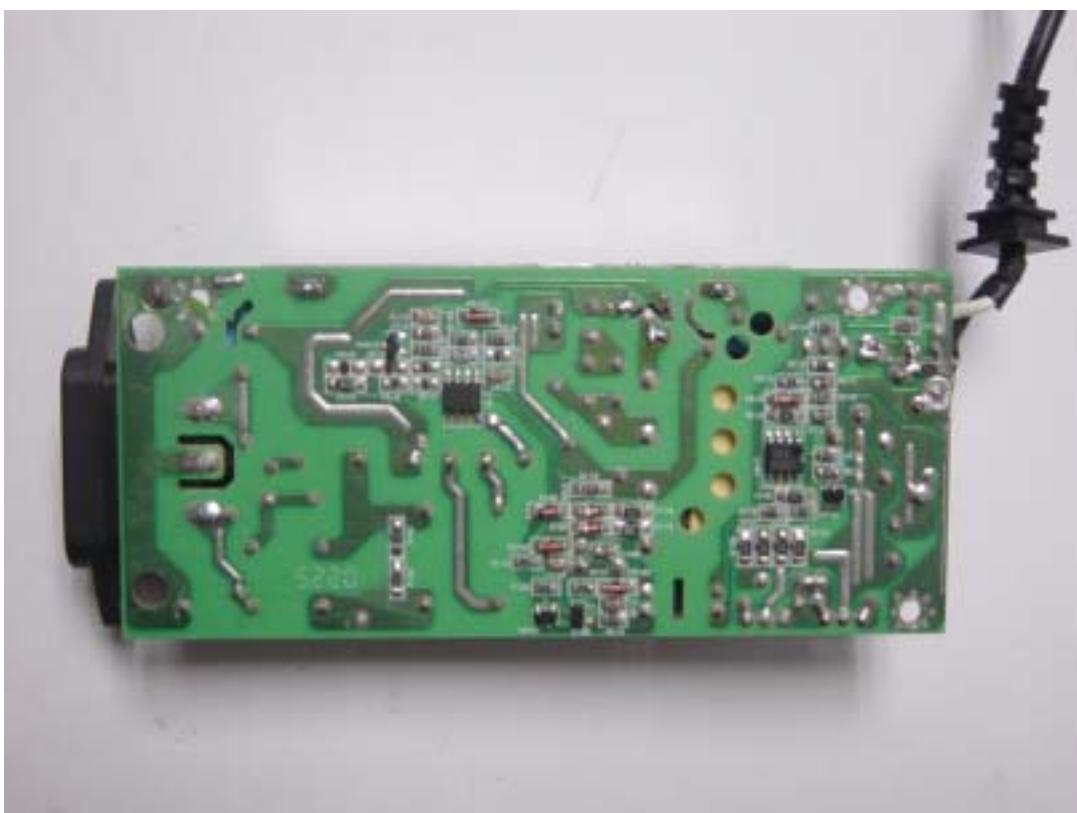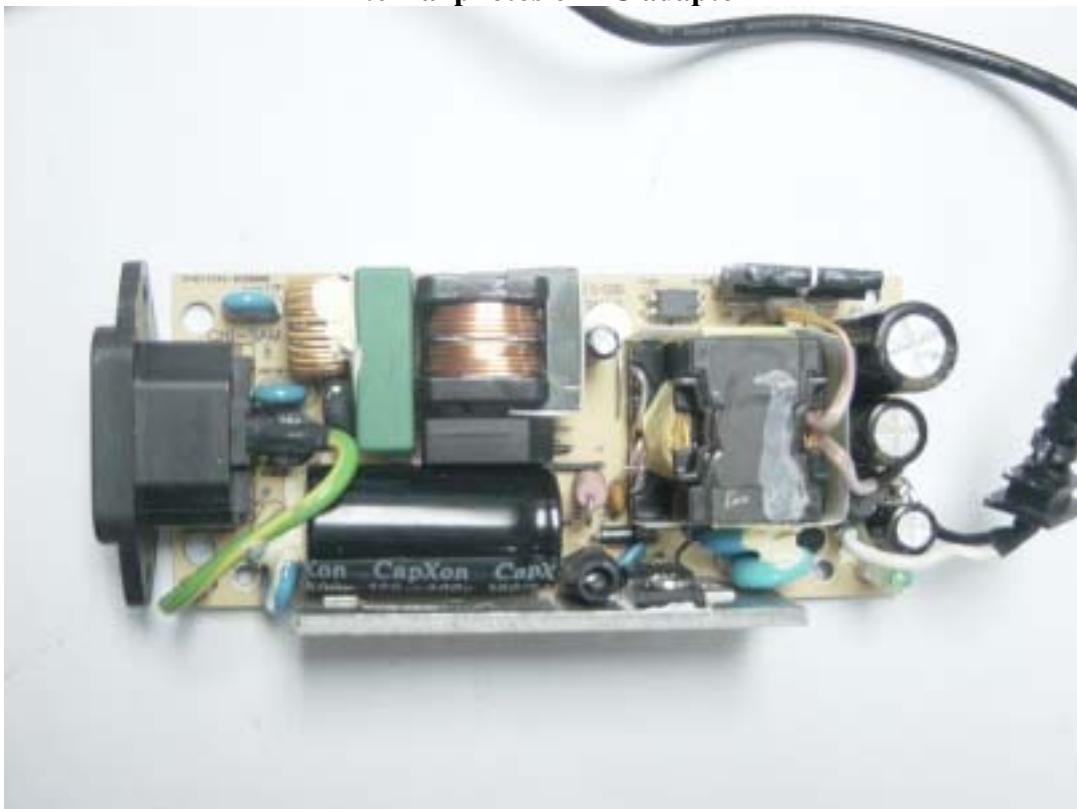



## SPECTRUM PLOT OF L1 AND L2



Tel: 86-755-28059000  
Fax: 86-755-28055221

### Site G


Custom Name: GREATWALL

Project No.:  
Engineer Name: super

Model Name: NV721C

Test Mode: 1280\*1024 75Hz(120V )

Index 3

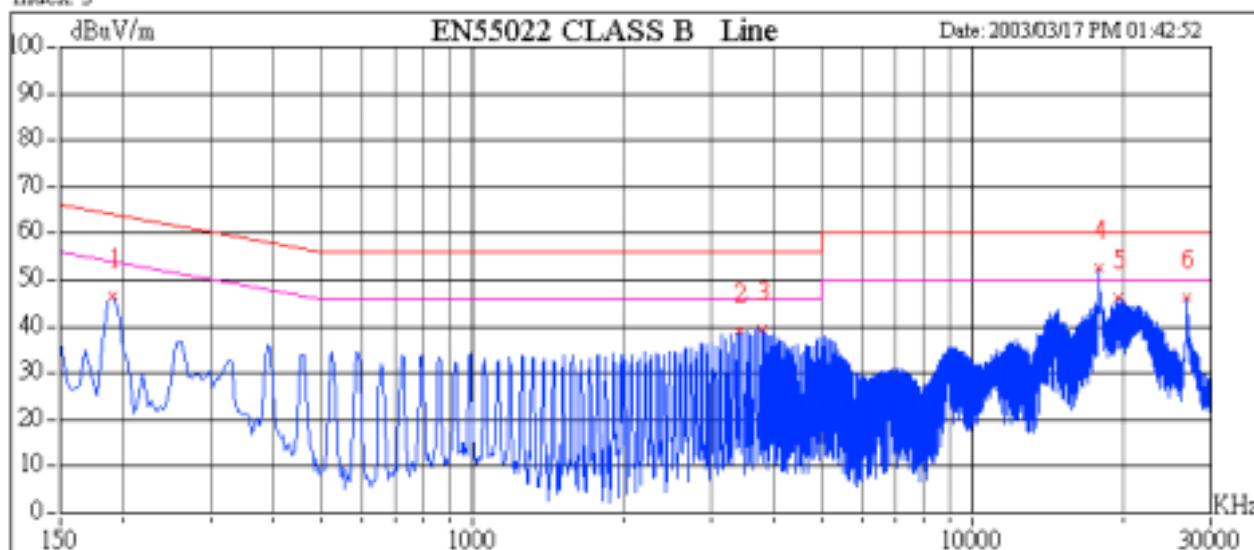



Tel: 86-755-28055000  
Fax: 86-755-28055221

### Site G

Custom Name: GREATWALL

Model Name: NV721C

Test Mode: 1280\*1024 75Hz(120V)

Project No.:  
Engineer Name: super

Index 3

