







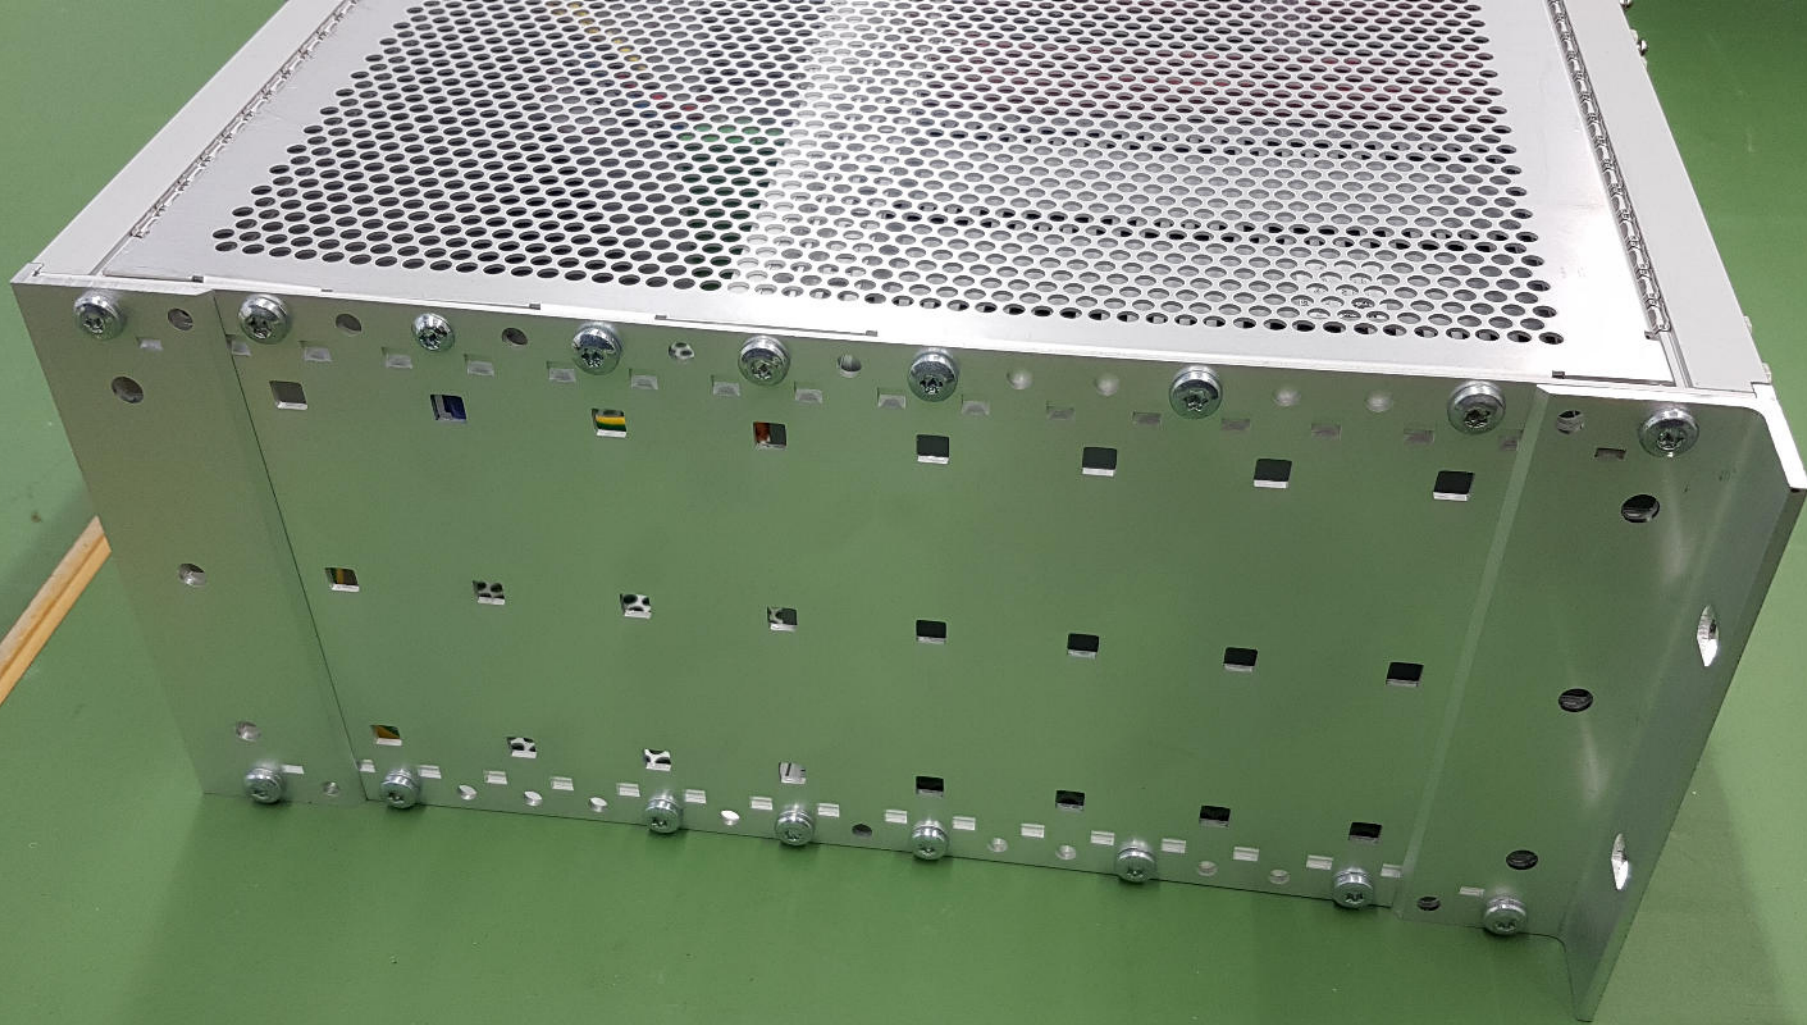

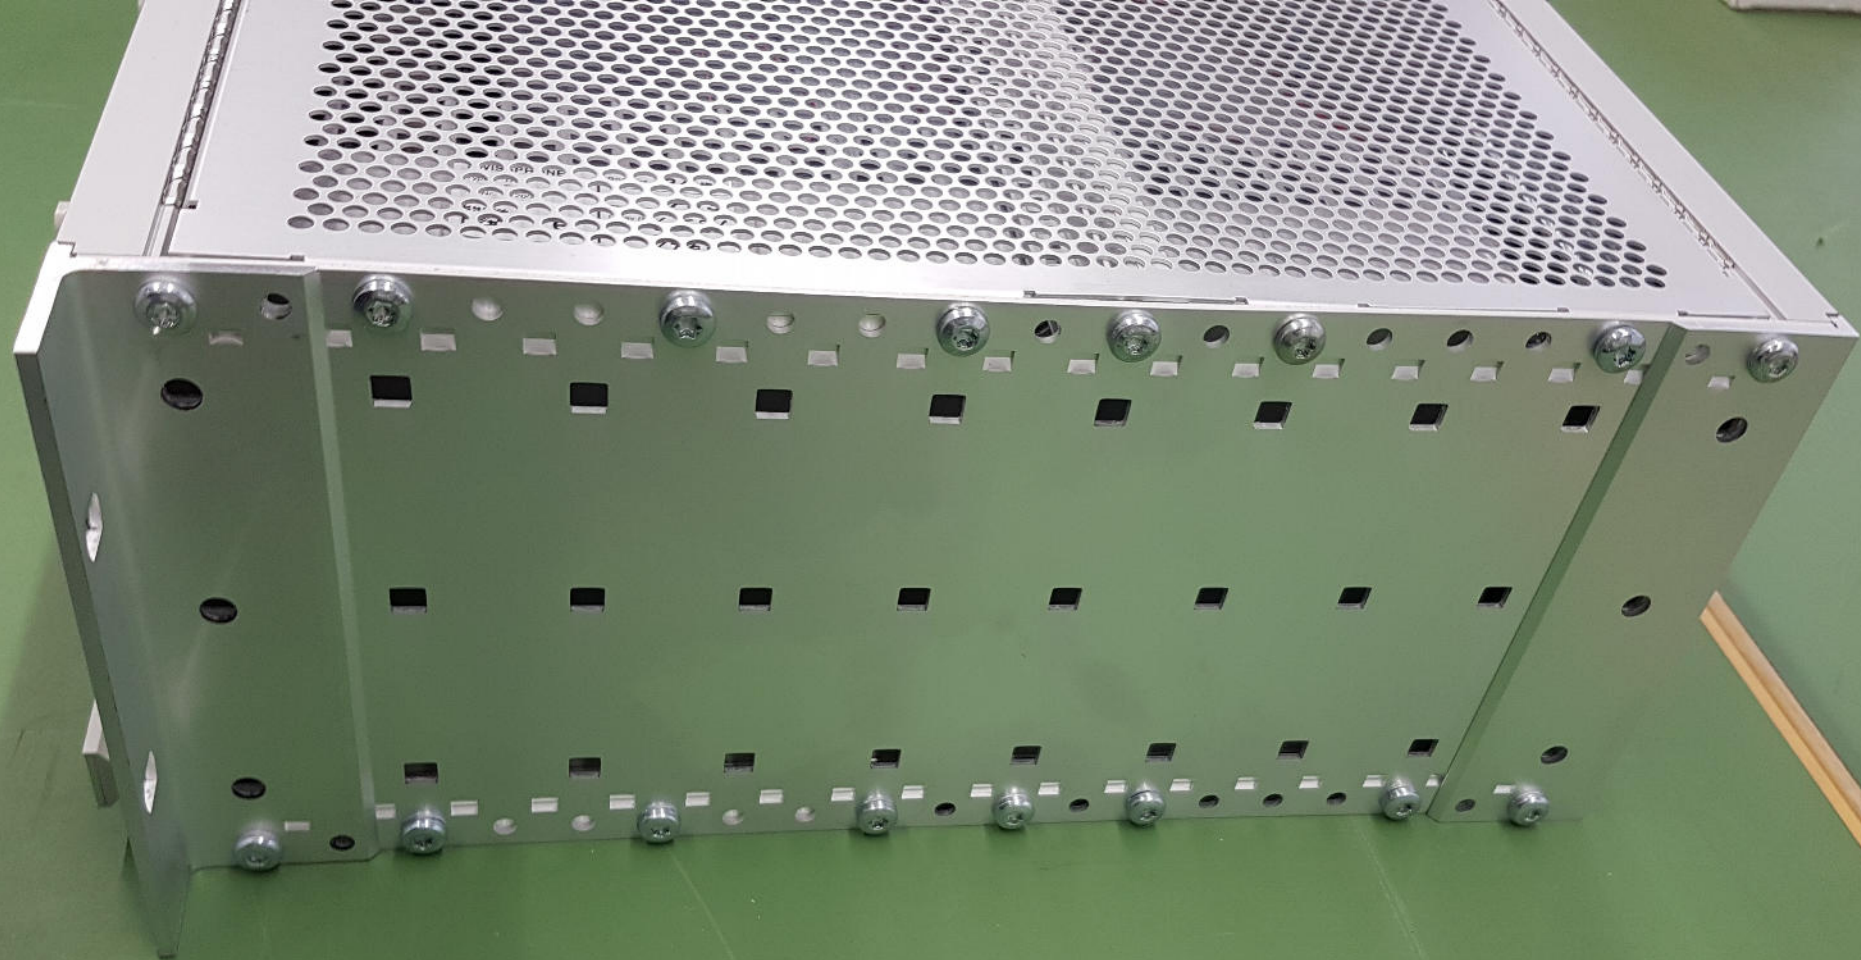

Single antenna use

Dual antenna use

Rx: For dual antenna use only

Rx / Tx: Single antenna use

Tx: Dual antenna use

13.5V/1A max
OUT

Battery
IN



SWISSPHONE ITC2500 NA
Type/Model: ITC 2500-NA 4HS Band: 400-470 MHz
100 - 240 VAC, 50/60Hz, 2 SA, 1 A, 250VAC
A4 No: 0721685
S/N: C301737 03513
FCC ID: LHM-ITC2500-4HS
IC: 4404A-ITC2500-4HS
CE FC

Mains in

SWISSPHONE ITC2500 NA

Type/Model: ITC 2500-NA 4H5 Band: 400-470 MHz

Space: 12.5kHz

100 - 240 VAC; 50/60Hz; 2.5A-1.1A; 260VA

FCC ID: L3M-ITC2500-4H5

IC: 4404A-ITC25004H5



Art.Nr.: 0721686

S/Nr.: C201737.03513



Mains in

