

**A RADIO TEST REPORT
FOR
TEDD ENGINEERING
ON
TRACK HANDSET**

DOCUMENT NO. TRA-009355-W-US-3

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com



TRaC Wireless Test Report : TRA-009355-W-US-3

Applicant : Tedd Engineering Ltd

Apparatus : Track Handset

Specification(s) : FCC Part 15.249
IC RSS-210

Purpose of Test : Certification

FCC ID : L3U-TRACKHS914

IC ID : 10302A-TRACKHS914

Authorised by :



(Radio Products Manager)

Issue Date : 26th June 2012

Authorised Copy Number : PDF

Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes relating to the assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	10
3.1	Modifications Performed During Assessment	10
Appendix A:	Formal Emission Test Results	11
A1	Transmitter Intentional Emission Radiated	12
A2	Radiated Electric Field Emissions	13
Appendix B:	Supporting Graphical Data	15
Appendix C:	Additional Test and Sample Details	20
C1	Test samples	21
C2	EUT operating mode during testing	22
C3	EUT Configuration Information	23
C4	List of EUT Ports	24
C5	Details of Equipment Used	25
Appendix D:	Cross Reference FCC Part 15c to IC RSS-210	26
Appendix E:	Photographs and Figures	27

Section 1:

Introduction

1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: D Winstanley

Report author: S Bharat

**This report must not be reproduced except in full without prior written permission from
TRaC Global Ltd.**

1.2 Tests Requested By

This testing in this report was requested by:

Tedd Engineering Ltd
Blenhim Road
Airfield Ind Est
Ashbourne
Derbyshire
DE6 1HA

1.3 Manufacturer

Same as above

1.4 Apparatus Assessed

The following apparatus was assessed between 23rd and 24th May 2012

Track Handset

The above unit consists of a 914.5MHz radio transmitter.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.249	ANSI C63.10	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.249	ANSI C63.10	Pass
Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass

Abbreviations used in the above table:

ANSI C 63.10:2009 is outside the scope of the laboratories UKAS accreditation.

CFR	: Code of Federal Regulations	ANSI	: American National Standards Institution
REFE	: Radiated Electric Field Emissions	PLCE	: Power Line Conducted Emissions
RSS	: Radio Standards Specification		

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values****Radio Testing – General Uncertainty Schedule**

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**
Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**
Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,
Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,
Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**
Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**
Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**
Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:	Modifications
-------------------	----------------------

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Test Details	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.249
Measurement standard	ANSI C63.10:2003
EUT sample number	S04
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20
Photographs (Appendix E)	1

Frequency (MHz)	Measurement Rx Reading (dB μ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	3m Field Strength (dB μ V/m)	3m Field Strength (mV/m)
914.5	61.3	4.0	24.2	-	89.5	29.85
Limit value @ 3m			50 mV/m			
Band occupancy @ -20 dBc			f _{lower} (MHz)		f _{higher} (MHz)	
			914.441		914.552	
			Bandwidth = 111kHz			

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Receiver detector @ fc = Average, 10kHz bandwidth
- 3 When battery powered the EUT was powered with new batteries

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.10
- 2 Measuring distances 3m
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable
- 5 Raising and lowering the receiver antenna between 1m & 4m
- 6 Horizontal and vertical polarisations, of the receive antenna
- 7 EUT orientation in three orthogonal planes
- 8 Maximum results recorded

A2 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S04
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20
Photographs (Appendix E)	1 & 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Frequency (MHz)	Received Level (dB μ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Summary
1828.85	24.33	1.9	27.2	0.0	53.43	54	-0.57	Pass
2743.29	53.48	2.2	29.1	35.5	49.28	54	-4.72	Pass
3657.71	54.87	2.9	31.7	35.6	53.87	54	-0.13	Pass
4572.11	46.63	2.9	32.2	35.7	46.03	54	-7.97	Pass
5486.61	37.99	3.7	33.8	35.8	39.69	54	-14.31	Pass
6401.11	36.45	4.1	34.3	36.0	38.85	54	-15.15	Pass

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW=VBW= 1MHz
Average	RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR part 15 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR part 15- Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength (μ V/m)	Measurement Distance (m)	Field strength (dB μ V/m)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

(a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

(b) The levels may have been rounded for display purposes.

(c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				


Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.


Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.


Radiated spurious emissions 30 MHz to 1 GHz - Vertical Polarisation

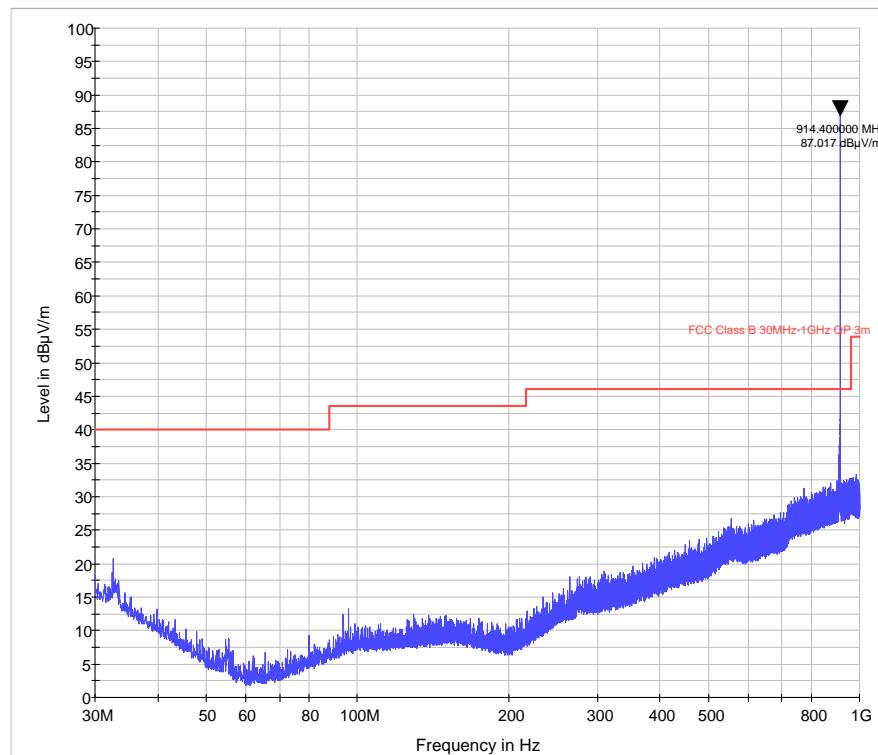

Radiated spurious emissions 30 MHz to 1 GHz - Horizontal Polarisation

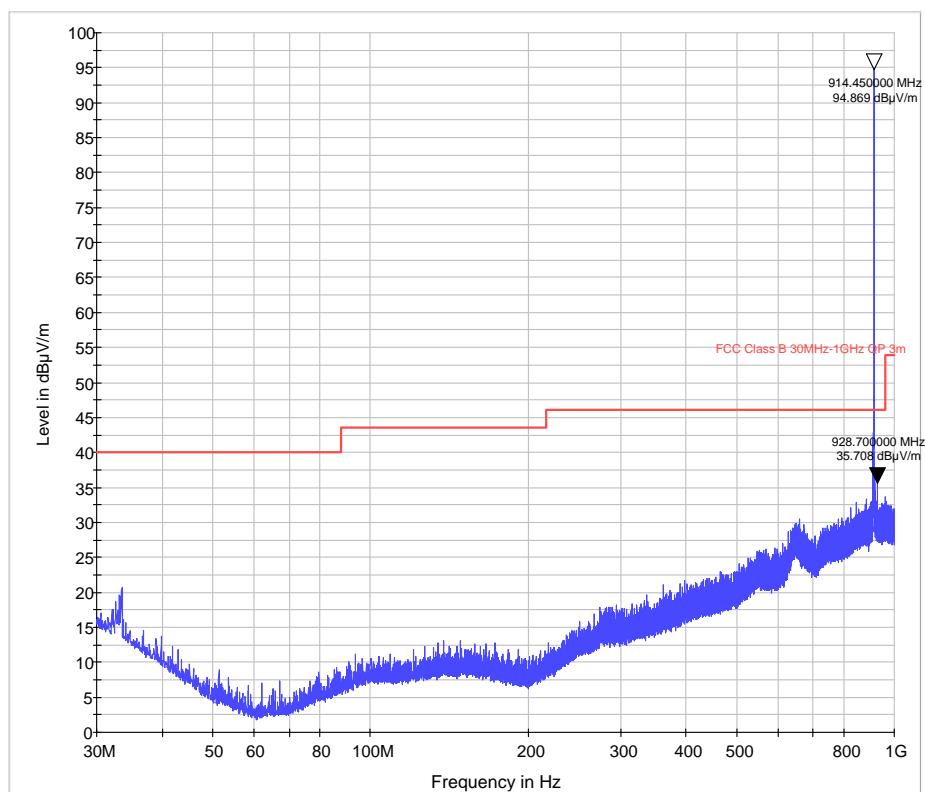


Radiated spurious emissions 1 GHz to 5 GHz - Vertical Polarisation

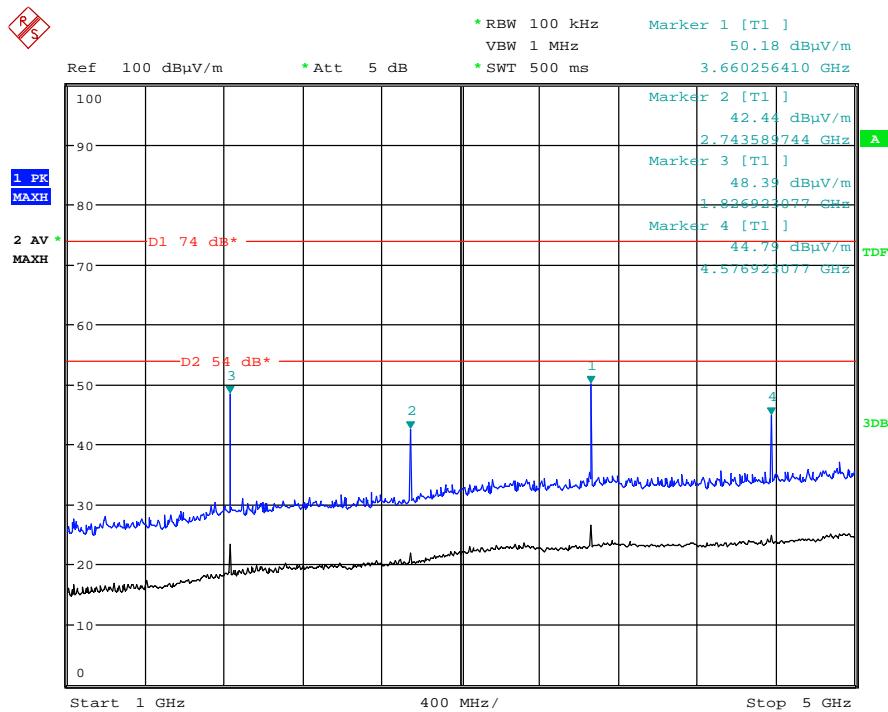


Date: 11.JUN.2012 14:42:02

Radiated spurious emissions 1 GHz to 5 GHz - Horizontal Polarisation

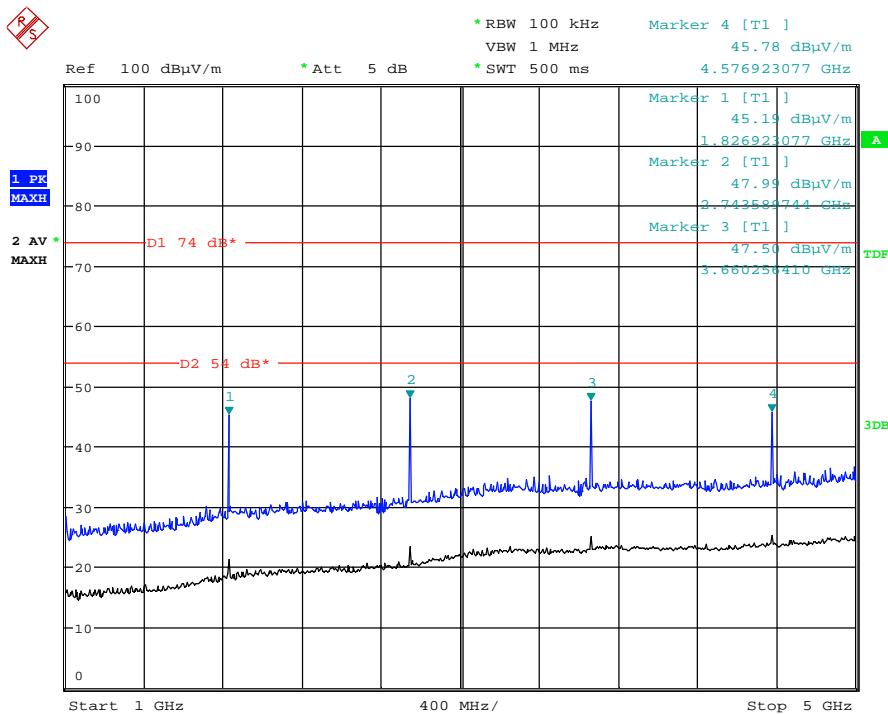


Date: 11.JUN.2012 14:47:02

Radiated spurious emissions 5 GHz to 10 GHz - Vertical Polarisation

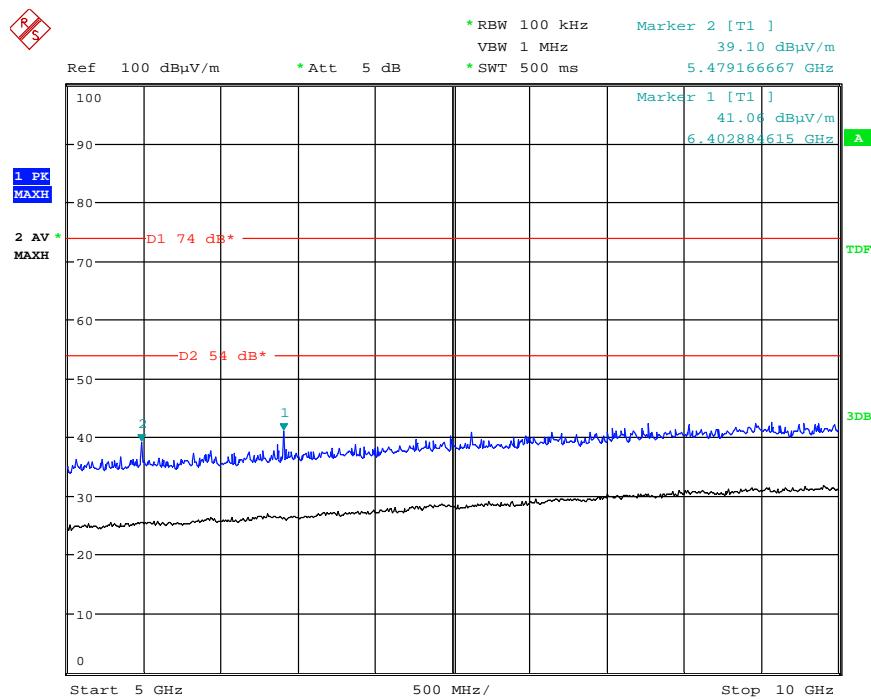


Date: 11.JUN.2012 14:44:25

Radiated spurious emissions 5 GHz to 10 GHz - Horizontal Polarisation

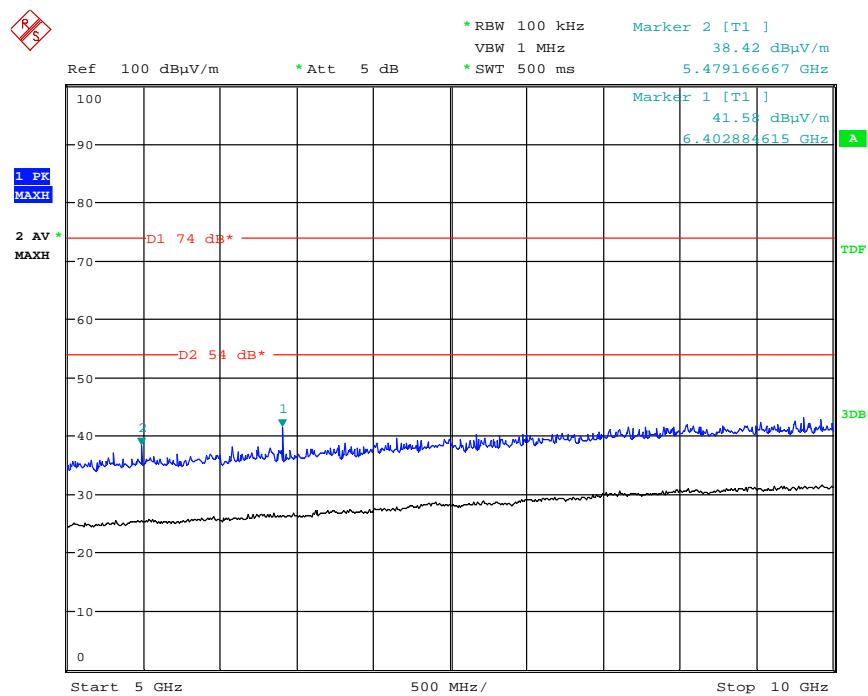

Date: 11.JUN.2012 14:45:59

20dB Bandwidth

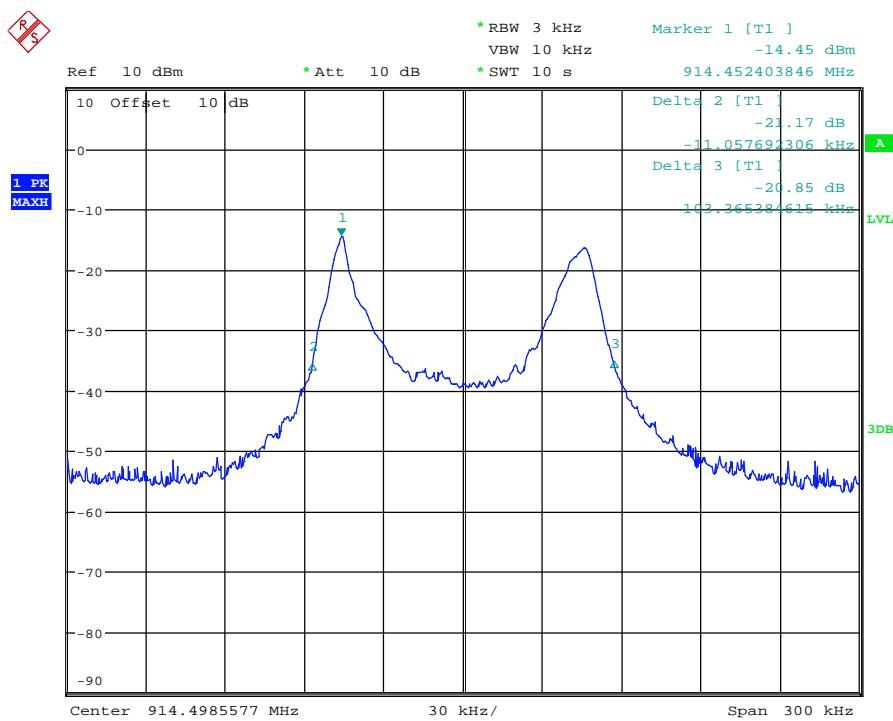

Date: 11.JUN.2012 13:25:17

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S04	Track Handset	None

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following table:

Test	Description of Operating Mode
All tests detailed in the report	EUT actively transmitting

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The table below describes the termination of EUT ports:

Sample : S04

Port	Description of Cable Attached	Cable length	Equipment Connected
None			

C5 Details of Equipment Used

TRAC Ref	Type	Description	Manufacturer	Date Calibrated
TRLUH281	FSU46	Spectrum Analyser	Rohde & Schwarz	09/02/2012
TRL138	3115	1-18GHz Horn Antenna	EMCO	08/11/2011
TRL572	8499B	1 – 26.5 GHz Pre Amplifier	Agilent	24/11/2010
TRLUH004	ESVS10	Receiver	Rohde & Schwarz	12/01/2012
TRLUH191	CBL611/A	30MHz – 1GHz Bilog Antenna	York	08/11/2010

Appendix D:**Cross Reference FCC Part 15c to IC RSS-210**


The testing was carried out to FCC 47CFR Part 15c and the results for this testing can be found in Appendix A of this report.

All measurements were carried out in accordance with ANSI C63.4, 'Methods of Measurements of RF Emissions from Low Voltage Electrical and Electronic Equipment' in the range 9 kHz to 10 GHz.

The table below shows the applicable RSS-210 parts and the corresponding FCC 47CFR Part 15 rules:

RSS-210 Issue 8 Section	FCC 47CFR Part 15 Section
A2.9	Part 15.249
2.1 (RSS-Gen 7.2.5)	Part 15.209

In addition below is a plot of the 99% emissions bandwidth, as stipulated in Section 4.6.1 of RSS-Gen.

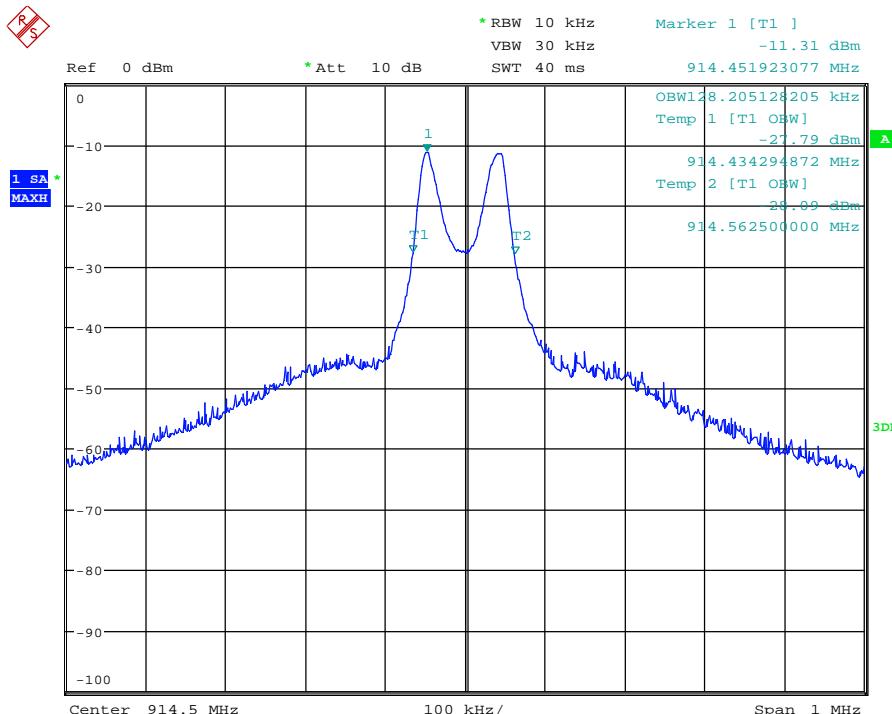

Date: 14.JUN.2012 16:14:08


Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement (30MHz – 1GHz): front view
2. Radiated electric field emissions arrangement (1GHz – 10GHz): front view

Photograph 1

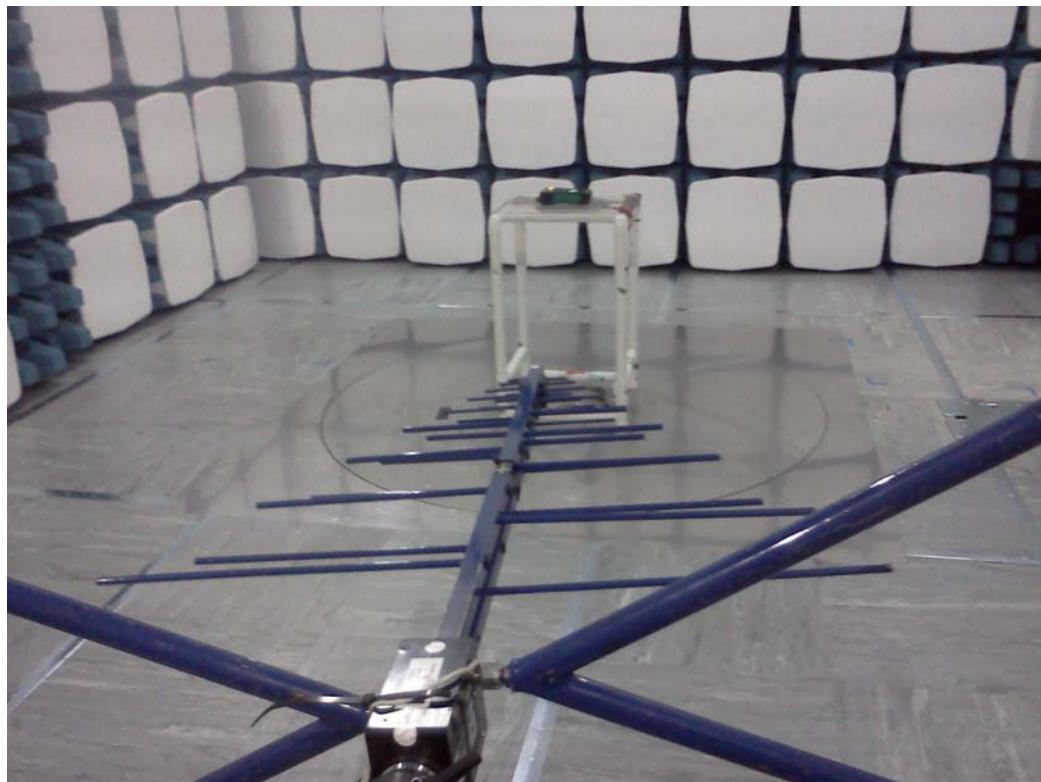

Photograph 2

