


Power Combiner/Divider Type RMPD4.800-2500SfC - 4-Way, 0° SMA female

Frequency	Amplitude Unbalance	Phase Unbalance	VSWR	Insertion Loss	Isolation
800-2500MHz	0.5dB max	+/-5° max	1.15:1 typ 1.3:1 max	0.35dB typ 0.9dB max	25dB typ 20dB min

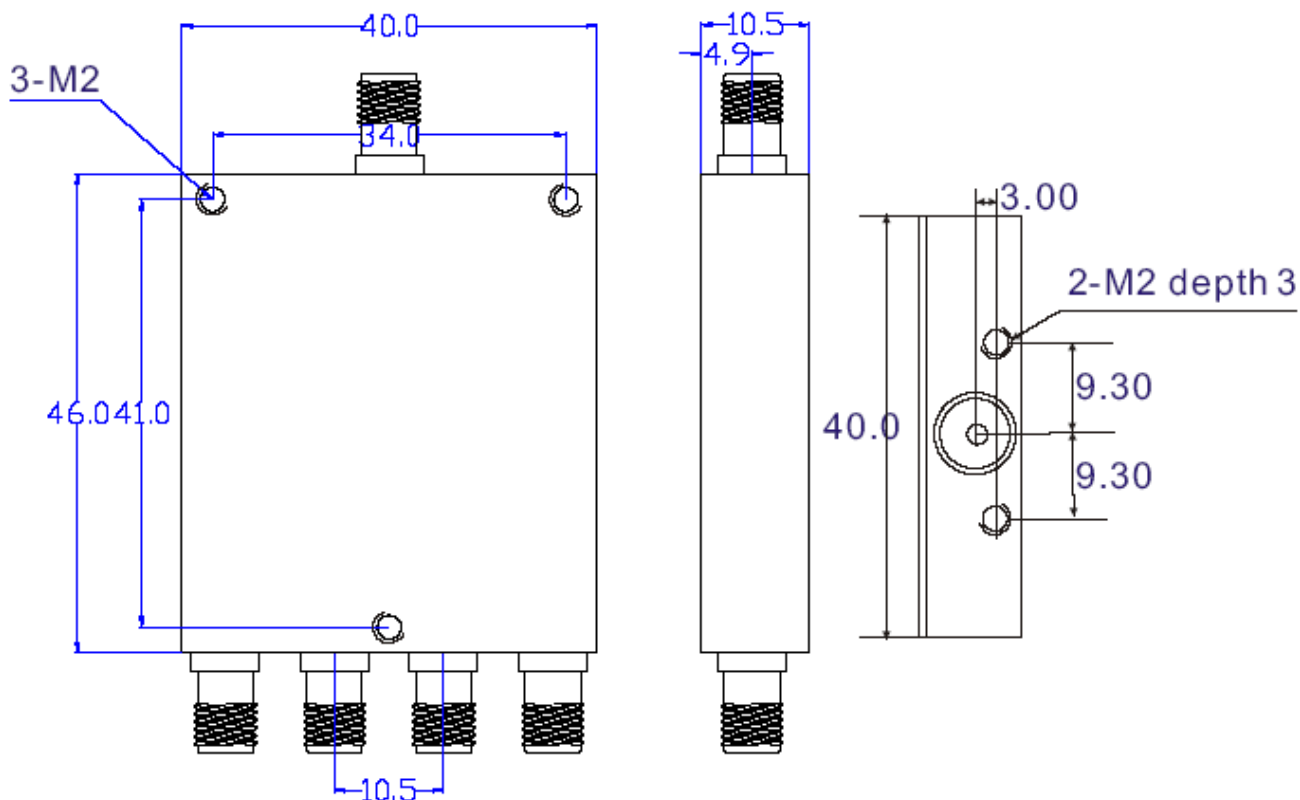

All specifications are subject to change without notice.

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 5 places
- Power: Forward/Reverse ≤ 50 W
- Case material: Aluminium alloy
- Operation temperature: -35C to +80C deg
- RoHS compliant per directive 2002/95/EC

 COMPEL				Scale :1 (mm)		Project:	DIN A4
						Customer:	Rev. 3
Description: "Power Splitter 4-way"							
			Date:	Name:	Partnumber: RMPD4.08-2500Sf		
			3/7/09	CRi			
		Basic design	29-08-97	HLS:			